

	<b>ESTECH Co., Ltd.</b> Rm 1015, World Venture Center II, 426-5 Gasan-dong, Guncheon-gu, Seoul, 158-803, Korea			<b>Electromagnetic Interference Test Report</b>
---	---	---	--	---

## Test Report for FCC

FCC ID : TKWXR-10

Report Number		ESTF151210-002		
Applicant	Company name	Suprema Inc.		
	Address	16F Parkview Tower, Jeongja-dong, Bundang-gu, Seongnam, Gyeonggi, 463-863 Korea		
	Telephone	+82-31-710-2492		
Product	Product name	Xpass Slim Dummy		
	Model No.	XR-10	Manufacturer	Suprema Inc.
	Serial No.	NONE	Country of origin	KOREA
Test date	17-Sep-12		Date of issue	18-Oct-12
Testing location	ESTECH Co., Ltd. 58-1 OSan-Ri Kanam-Myon, Yeoju-Gun, KyungKi-Do, Korea 97-1 Hoiuk-Ri Majang-Myon, Icheon-Si, KyungKi-Do, Korea			
Standard	FCC PART 15 (2010) , ANSI C 63.4 2003			
Test item	<input checked="" type="checkbox"/> Conducted Emission	<input type="checkbox"/> Class A	<input checked="" type="checkbox"/> Class B	Test result
	<input checked="" type="checkbox"/> Radiated Emission	<input type="checkbox"/> Class A	<input checked="" type="checkbox"/> Class B	Test result
Measurement facility registration number	915135			
Tested by	Engineer D.H. Jung (Signature)			
Reviewed by	Engineering Manager J.M.Yang (Signature)			
Abbreviation	OK, Pass = Complied, Fail = Failed, N/A = not applicable			
<p>* Note</p> <p>– This test report is not permitted to copy partly without our permission  – This test result is dependent on only equipment to be used  – This test result based on a single evaluation of one sample of the above mentioned</p>				



**ESTECH Co., Ltd.**

Rm 1015, World Venture Center II,  
426-5 Gasan-dong, Guncheon-gu,  
Seoul, 158-803, Korea



**Electromagnetic  
Interference  
Test Report**

## Contents

1. Laboratory Information .....	3
2. Description of EUT .....	4
3. Test Standards .....	5
4. Measurement condition .....	6
5. Measurement of radiated emission .....	8
5.1 Measurement equipment .....	8
5.2 Environmental conditions .....	8
5.3 Test data .....	9
6. Measurement of conducted emission .....	10
6.1 Measurement equipment .....	10
6.2 Environmental conditions .....	10
6.3 Test data .....	11
7. Photographs of test setup .....	12
8. Photographs of EUT .....	14

Appendix 1. Special diagram

	<b>ESTECH Co., Ltd.</b> Rm 1015, World Venture Center II, 426-5 Gasan-dong, Guncheon-gu, Seoul, 158-803, Korea	  	<b>Electromagnetic Interference Test Report</b>
---	---	--	---

## 1. Laboratory Information

### 1.1 General

This EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards and is tested in accordance with the measurement procedures as indicated in this report. ESTECH Lab attests to accuracy of test data. All measurement reported herein were performed by ESTECH Co., Ltd.

ESTECH Lab assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

### 1.2 Test Lab.

Corporation Name : ESTECH Co., Ltd.

Head Office : Rm 1015, World Venture Center II, 426-5, Gasan-dong, Geumcheon-gu, Seoul, Korea  
(Safety & Telecom. Test Lab)

EMC Test Lab : 97-1 Hoiuk-Ri Majang-Myon, Icheon-city, KyungKi-Do, Korea

### 1.3 Official Qualification(s)

KCC : Granted Accreditation from Ministry of Information & Communication for EMC, Safety and Telecommunication

KOLAS : Accredited Lab By Korea Laboratory Accreditation Schema base on CENELEC requirements

FCC : Filed Laboratory at Federal Communications Commission

VCCI : Granted Accreditation from Voluntary Control Council for Interference from ITE

**ESTECH Co., Ltd.**

Rm 1015, World Venture Center II,  
426-5 Gasan-dong, Guncheon-gu,  
Seoul, 158-803, Korea

**Electromagnetic  
Interference  
Test Report**

## 2. Description of EUT

### 2.1 Summary of Equipment Under Test

Product	: Xpass Slim Dummy
Model Number	: XR-10
Serial Number	: NONE
Manufacturer	: Suprema Inc.
Country of origin	: KOREA
Power Rating	: 12 V d.c., 1.5 A
Receipt Date	: 3-Sep-12
X-tal list(s) or Frequencies generated	: The highest operating frequency is 25 MHz in the system.

### 2.2 General descriptions of EUT

## Specification

<b>CPU</b>	32 bit Micro-processor
<b>Memory</b>	1MB FLASH + 16MB SDRAM
<b>RF Card</b>	13.56 MHz ISO14443A/B, ISO15693, Mifare/DesFire(CSN), Inside(CSN), Felica(IDM)
<b>User Capacity</b>	40,000 user
<b>Log Capacity</b>	50,000 log
<b>Interfaces</b>	RS485, Wiegand In or Out
<b>IP Rate</b>	IP65 class
<b>Sound</b>	Multi-tone Buzzer
<b>LED</b>	Multi-color LED
<b>RTC</b>	Lithium-ion Rechargeable Batteries
<b>I/O</b>	Tamper x 1 Switch Input x 2 Wiegand x 1
<b>Power</b>	12VDC
<b>Operating Temperature</b>	-20 ~ 50°C
<b>Size</b>	80 x 120 x 11.4mm (W x H x D )
<b>Certificates</b>	CE, FCC, KCC, RoHS, IP65



**ESTECH Co., Ltd.**

Rm 1015, World Venture Center 11,  
426-5 Gasan-dong, Guncheon-gu,  
Seoul, 158-803, Korea



**Electromagnetic  
Interference  
Test Report**

### 3. Test Standards

#### Test Standard : FCC PART 15 (2010)

This Standard sets out the regulations under which an intentional, unintentional, or incidental radiator may be operated without an individual license. It also contains the technical specifications, administrative requirements and other conditions relating to the marketing of Part 15 devices.

#### Test Method : ANSI C 63.4 (2003)

This standard sets forth uniform methods of measurement of radio-frequency (RF) signals and noise emitted from both unintentional and intentional emitters of RF energy in the frequency range 9 kHz to 40 GHz. Methods for the measurement of radiated and AC power-line conducted radio noise are covered and may be applied to any such equipment unless otherwise specified by individual equipment requirements. These methods cover measurement of certain devices that deliberately radiate energy, such as intentional emitters, but does not cover licensed transmitters. This standard is not intended for certification/approval of avionic equipment or for industrial, scientific, and medical (ISM) equipment. These methods apply to the measurement of individual units or systems comprised of multiple units.



**ESTECH Co., Ltd.**

Rm 1015, World Venture Center II,  
426-5 Gasan-dong, Guncheon-gu,  
Seoul, 158-803, Korea



**Electromagnetic  
Interference  
Test Report**


## 4. Measurement Condition

### 4.1 EUT Operation.

- The EUT was in the following operation mode during all testing

1. Connect the EUT with Note PC.
2. Execute a provided program to operate RS-485 and RF card.
3. Check communication status between the EUT and RF tag
4. The operational conditions of the EUT was determined by the manufacturer according to the typical use of the EUT with respect to the expected highest level of emission.

### 4.2 Configuration and Peripherals

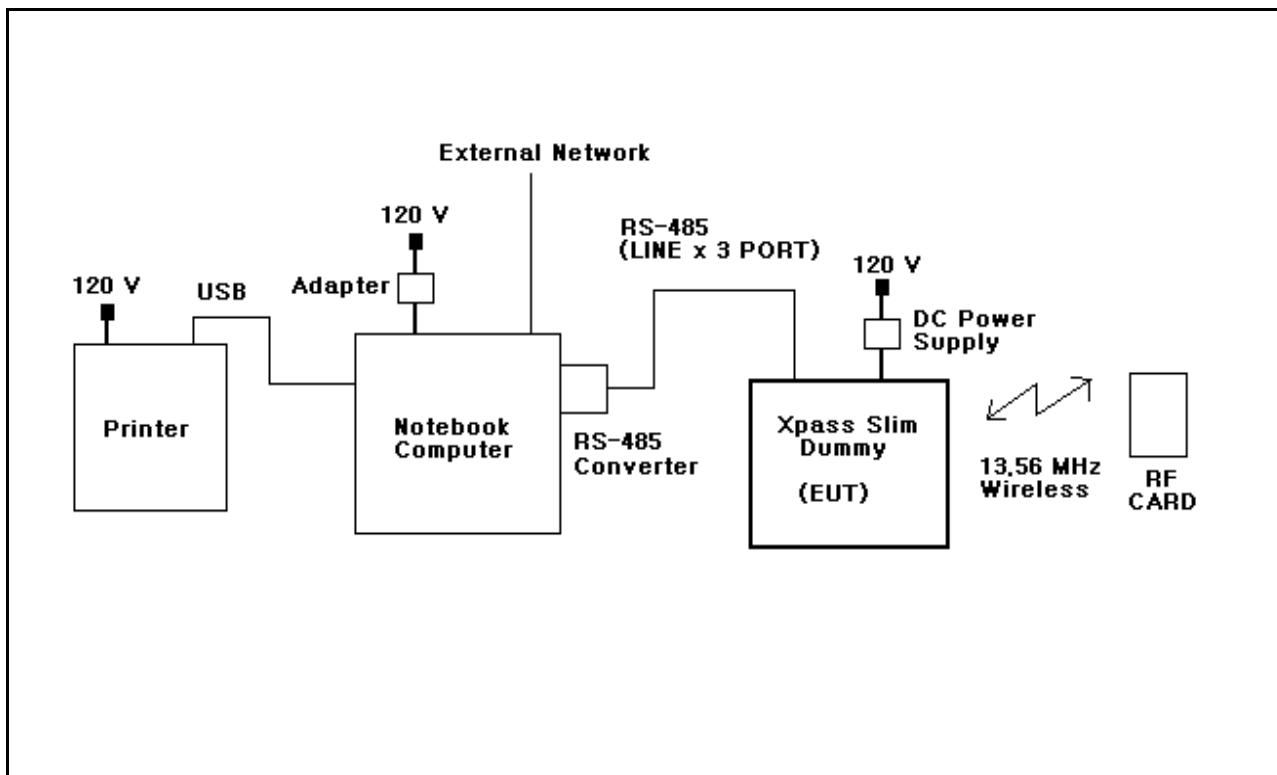

	<b>ESTECH Co., Ltd.</b> Rm 1015, World Venture Center II, 426-5 Gasan-dong, Guncheon-gu, Seoul, 158-803, Korea	   	<b>Electromagnetic Interference Test Report</b>
---	---	---	---

#### 4.3 EUT and Support equipment

Equipment Name	Model Name	S/N	Manufacturer	Remark (FCC ID)
Xpass Slim Dummy	XR-10	NONE	Suprema Inc.	EUT
DC Power Supply	HPS-5010	NONE	HANIL T&M CO.	
Notebook Computer	GW687AV	CNU0295RBD	HEWLETT-PACKARD COMPANY	
Adapter	PPP009D	WBGSV0ADDZ3O6N	DELTA ELECTRONICS (JIANG SU), LTD.	
RS-485 Converter	TCC-80	TAZE01060460	MOXA	
RF CARD	NONE	NONE	Suprema Inc.	
Printer	K10229	NONE	CANON VIETNAM CO., LTD.	

#### 4.4 Cable Connecting

Start Equipment		End Equipment		Cable Standard		Remark
Name	I/O port	Name	I/O port	Length	Shielded	
Xpass Slim Dummy	Power	DC Power Supply	-	2	Unshielded	
Xpass Slim Dummy	RS-485	RS-485 Converter	RS-485	3	Unshielded	
Xpass Slim Dummy	13.56 MHz Wireless	RF CARD	13.56 MHz Wireless	-	-	
Xpass Slim Dummy	LINE (Relay)	-	-	3	Unshielded	
Xpass Slim Dummy	Line (Switch)	-	-	3	Unshielded	
Xpass Slim Dummy	Line (Wiegand)	-	-	3	Unshielded	
Xpass Slim Dummy	Serial	RS-485 Converter	Serial	-	-	
Xpass Slim Dummy	Power	Adapter	-	2	Shielded	
Notebook Computer	USB	Printer	USB	2	Shielded	
Notebook Computer	LAN	External Network	LAN	20	Unshielded	

	<b>ESTECH Co., Ltd.</b> Rm 1015, World Venture Center 11, 426-5 Gasan-dong, Guncheon-gu, Seoul, 158-803, Korea	  	<b>Electromagnetic Interference Test Report</b>
---	---	--	---

## 5. Measurement of radiated disturbance

Above 30 MHz Electric Field strength was measured in accordance with FCC PART 15 (2010). The test setup was made according to ANSI C 63.4 (2003) on an open test site, which allows a 3 m distance measurement. The EUT was placed in the center of wooden turntable. The height of this table was 0.8 m. The measurement was conducted with both horizontal and vertical antenna polarization. The turntable has fully rotated. For further description of the configuration refer to the picture of the test setup.

### 5.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
TEST Receiver	ESCI7	ROHDE & SCHWARZ	1166.5950.07	28-Mar-13
Logbicon Antenna	VULB 9168	SCHWARZBECK	237	20-Jan-13
Turn Table	DT3000-2t	Innco System GmbH	N/A	–
Antenna Mast	MA4000-EP	Innco System GmbH	N/A	–
Antenna Master & Turn table controller	CO2000-P	Innco System GmbH	CO2000/641 /28051111/L	–

### 5.2 Environmental Condition

Test Place : 10 m Semi-anechoic chamber

#### Below 1 GHz

Temperature (°C) : 25 °C

Humidity (% R.H.) : 47 % R.H.

Test Place : 3 m Semi-anechoic chamber(3 m)

#### Above 1 GHz

Temperature (°C) N/A

Humidity (% R.H.) N/A



ESTECH Co., Ltd.

Rm 1015, World Venture Center II,  
426-5 Gasan-dong, Guncheon-gu,  
Seoul, 158-803, Korea



# Electromagnetic Interference Test Report

### 5.3 Test data (Below 1 GHz)

Test Date : 17-Sep-12

Measurement Distance : 3 m

**ESTECH Co., Ltd.**Rm 1015, World Venture Center II,  
426-5 Gasan-dong, Guncheon-gu,  
Seoul, 158-803, Korea**Electromagnetic  
Interference  
Test Report**

### 5.3 Test data (Above 1 GHz)–N/A

Test Date :

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB $\mu$ V)	Position (V/H)	Height (m)	Correction Factor		Result Value		
				Ant Factor (dB)	Cable (dB)	Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Margin (dB)
Peak(RBW:1 MHz VBW:1 MHz)								
Average(RBW:1 MHz VBW:10 Hz)								
Remark	<p>H : Horizontal, V : Vertical  *Reading = receiver reading + Amplifier Gain  *CL = Cable Loss–Amplifier Gain  *The resolution bandwidth and video bandwidth of spectrum analyzer is 1 MHz and 10 Hz for average detection at frequency above 1 GHz.</p> <p><b>*Application method of the highest frequency is in the following</b>  <b>*Highest frequency of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz.</b>  <b>*Highest frequency of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz.</b>  <b>*Highest frequency of the EUT is between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz.</b>  <b>*Highest frequency of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 40 GHz,</b></p>							



**ESTECH Co., Ltd.**

Rm 1015, World Venture Center II,  
426-5 Gasan-dong, Guncheon-gu,  
Seoul, 158-803, Korea



**Electromagnetic  
Interference  
Test Report**

## 6. Measurement of conducted disturbance

The continuous disturbance voltage of AC Mains in the frequency from 0.15 MHz to 30 MHz was measured in accordance to FCC PART 15 (2010). The test setup was made according to ANSI C 63.4 (2003) in a shielded room. The EUT was placed on a non-conductive table at least 0.8 m above the ground plan. A grounded vertical reference plane was positioned in a distance of 0.4 m from the EUT. The distance from the EUT to other metal surfaces was at least 0.8 m. The EUT was only earthen by its power cord through the line impedance stabilizing network. The power cord has been bundled to a length of 1.0 m. The test receiver with Quasi Peak detector complies with CISPR 16.

### 6.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
TEST Receiver	ESHS 30	Rohde & Schwarz	828765/002	16-Dec-12
LISN	ENV 216	Rohde & Schwarz	101231	19-Sep-13
LISN	ESH3-Z5	Rohde & Schwarz	838979/010	26-Jan-13
Pulse Limiter	ESH3Z2	Rohde & Schwarz	NONE	25-Jan-13

### 6.2 Environmental Condition

Test Place : Shielded Room

Temperature (°C) : 24 °C

Humidity (% R.H.) : 46 % R.H.



ESTECH Co., Ltd.

Rm 1015, World Venture Center II,  
426-5 Gasan-dong, Gyeongheung-gu,  
Seoul, 158-803, Korea



# Electromagnetic Interference Test Report

### 6.3 Test data

Test Date : 17-Sep-12



**ESTECH Co., Ltd.**

Rm 1015, World Venture Center II,  
426-5 Gasan-dong, Gumcheon-gu,  
Seoul, 158-803, Korea




**Electromagnetic  
Interference  
Test Report**


## 7. Photographs of test setup

### 7.1 Setup for Radiated Test : 30 MHz ~ 1000 MHz

[ Front ]

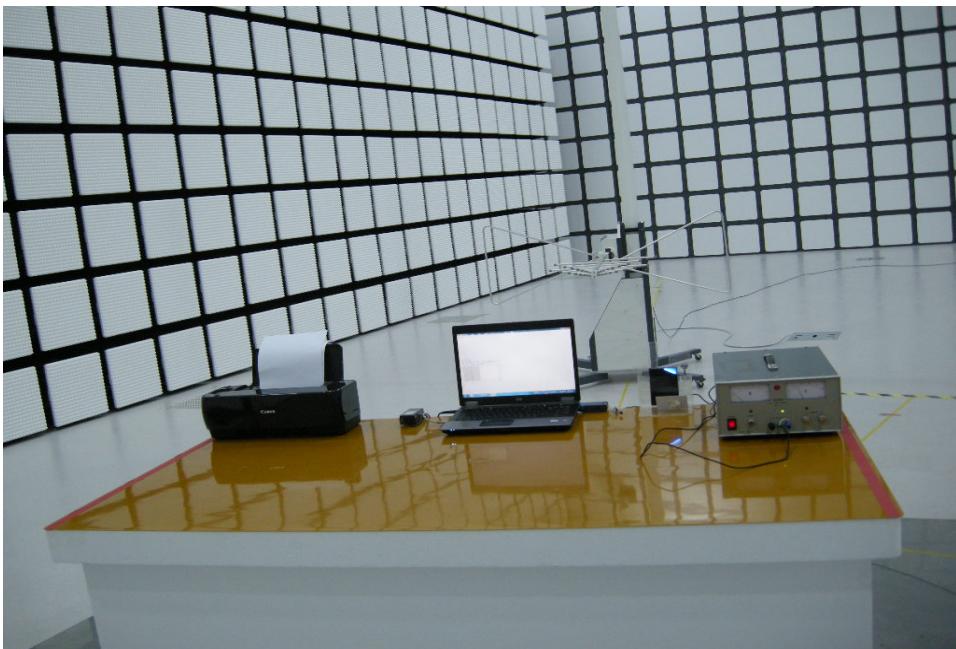

[ Rear ]

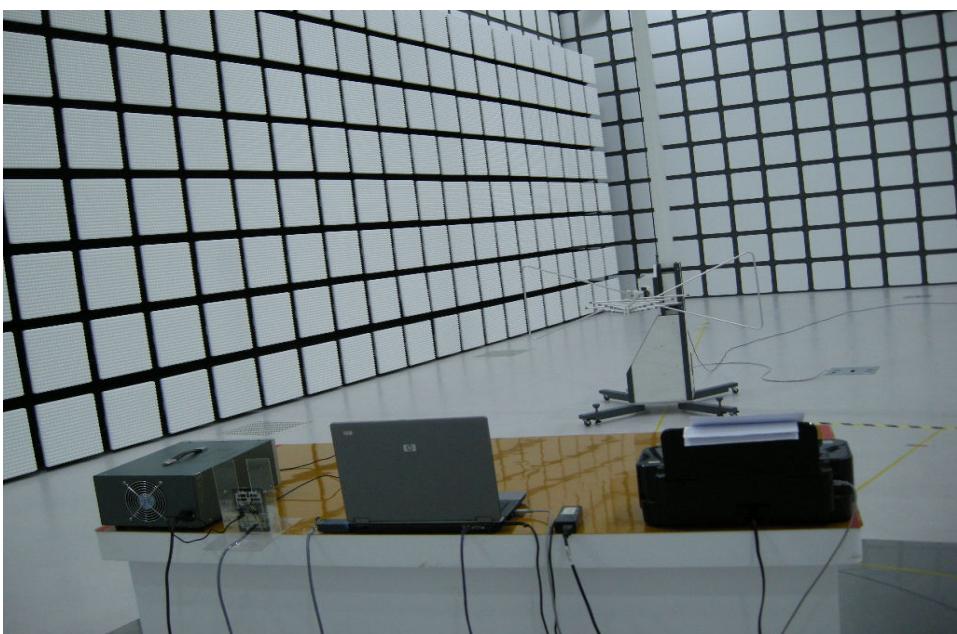



**ESTECH Co., Ltd.**

Rm 1015, World Venture Center 11,  
426-5 Gasan-dong, Gumcheon-gu,  
Seoul, 158-803, Korea



**Electromagnetic  
Interference  
Test Report**

## 7.2 Setup for Radiated Test : Above 1 GHz

[ Front ]

N/A

[ Rear ]

N/A



**ESTECH Co., Ltd.**

Rm 1015, World Venture Center II,  
426-5 Gasan-dong, Guncheon-gu,  
Seoul, 158-803, Korea




**Electromagnetic  
Interference  
Test Report**

### 7.3 Setup for Conducted Test : 0.15 MHz ~ 30 MHz

[ Front ]



[ Rear ]

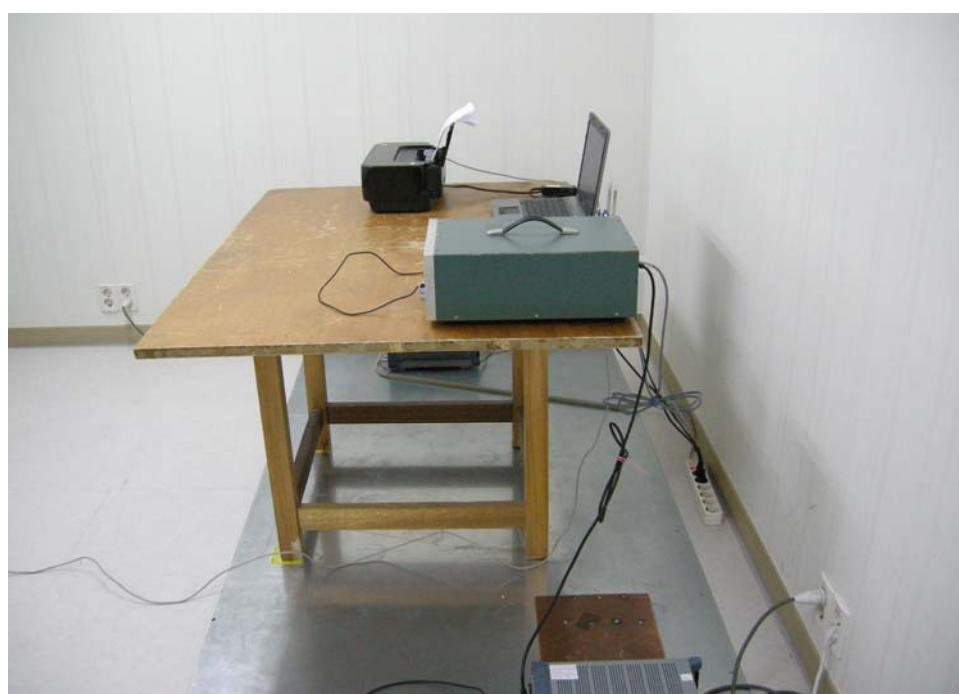



**ESTECH Co., Ltd.**

Rm 1015, World Venture Center II,  
426-5 Gasan-dong, Guncheon-gu,  
Seoul, 158-803, Korea




**Electromagnetic  
Interference  
Test Report**

## 8. Photographs of EUT

[ Front ]



[ Rear ]

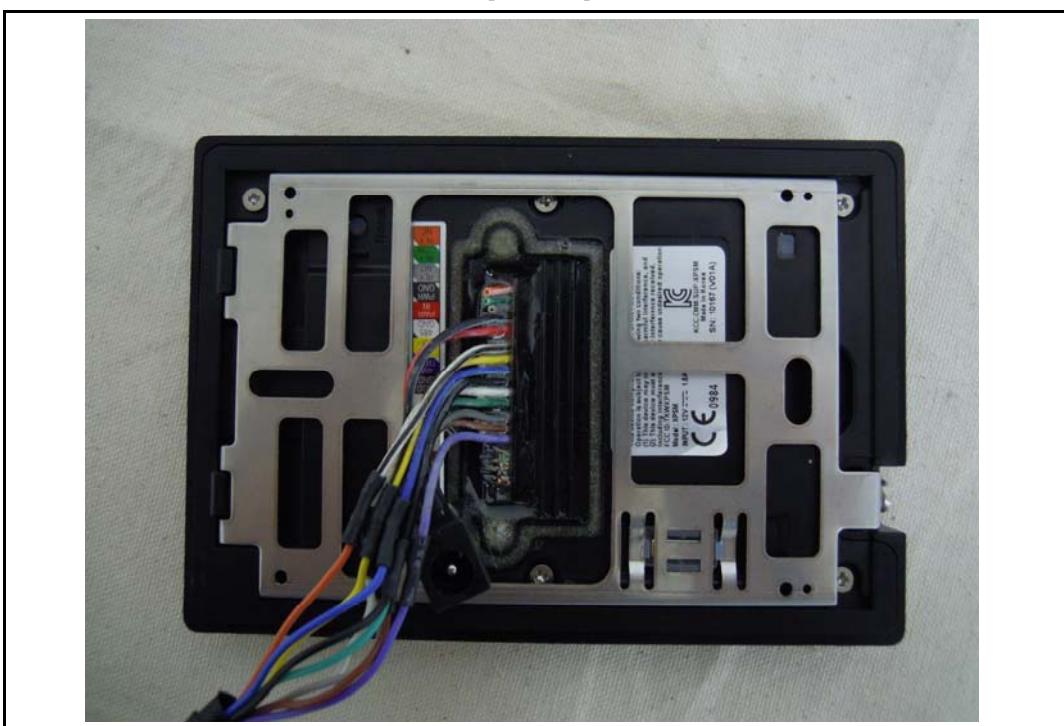

## Appendix 1. Special diagram

\*HOT

ES TECH

17 Sep 2012 09:57

HOT

EUT: XR-10

Manuf:

Op Cond: 120 V

Operator: D.H. JUNG

Test Spec: CLASS B

Comment:

Result File: 121002\_h.dat :

Scan Settings (1 Range)


Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	30MHz	0.8%	10kHz	PK+AV	10msec	Auto	OFF	60dB

Final Measurement: Detectors: X QP / + AV

Meas Time: 1sec

Subranges: 25

Acc Margin: 0 dB

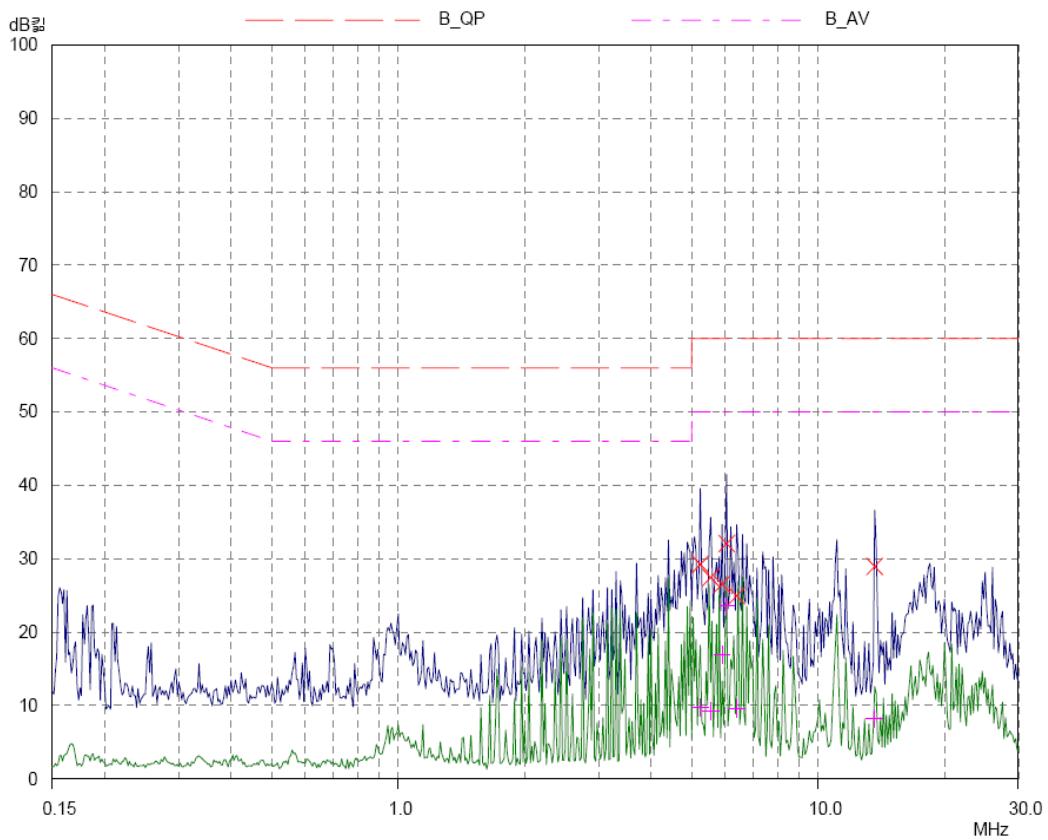

\*NEUTRAL

ES TECH

NEUTRAL

17 Sep 2012 10:01

EUT: XR-10

Manuf:

Op Cond: 120 V

Operator: D.H. JUNG

Test Spec: CLASS B

Comment:

Result File: 121002\_n.dat :

Scan Settings (1 Range)

Frequencies			Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten
150kHz	30MHz	0.8%	10kHz	PK+AV	10msec	Auto

Final Measurement: Detectors: X QP / + AV  
Meas Time: 1sec  
Subranges: 25  
Acc Margin: 0 dB

