

FCC TEST REPORT

REPORT NO.: RF980526L14

MODEL NO.: AW-NE106

RECEIVED: May 25, 2009

TESTED: Jun. 01 ~ Jun. 09, 2009

ISSUED: Jun. 11, 2009

APPLICANT: AzureWave Technologies, Inc.

ADDRESS: 8F, No. 94, Baozhong Rd., Xindian, Taipei,
Taiwan 231.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan,
R.O.C.

This test report consists of 80 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





TABLE OF CONTENTS

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3.	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	8
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	9
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3.4	DESCRIPTION OF SUPPORT UNITS	11
4.	TEST TYPES AND RESULTS	12
4.1	RADIATED EMISSION MEASUREMENT	12
4.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	12
4.1.2	TEST INSTRUMENTS.....	13
4.1.3	TEST PROCEDURES	14
4.1.4	DEVIATION FROM TEST STANDARD	14
4.1.5	TEST SETUP.....	15
4.1.6	EUT OPERATING CONDITIONS	15
4.1.7	TEST RESULTS	16
4.2	CONDUCTED EMISSION MEASUREMENT	30
4.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	30
4.2.2	TEST INSTRUMENTS.....	30
4.2.3	TEST PROCEDURES	31
4.2.4	DEVIATION FROM TEST STANDARD	31
4.2.5	TEST SETUP.....	32
4.2.6	EUT OPERATING CONDITIONS	32
4.2.7	TEST RESULTS	33
4.3	6dB BANDWIDTH MEASUREMENT	35
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	35
4.3.2	TEST INSTRUMENTS.....	35
4.3.3	TEST PROCEDURE.....	35
4.3.4	DEVIATION FROM TEST STANDARD	35
4.3.5	TEST SETUP.....	36
4.3.6	EUT OPERATING CONDITIONS	36
4.3.7	TEST RESULTS	37
4.4	MAXIMUM PEAK OUTPUT POWER	45
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	45
4.4.2	INSTRUMENTS.....	45
4.4.3	TEST PROCEDURES	45
4.4.4	DEVIATION FROM TEST STANDARD	45
4.4.5	TEST SETUP.....	46
4.4.6	EUT OPERATING CONDITIONS	46
4.4.7	TEST RESULTS	47
4.5	POWER SPECTRAL DENSITY MEASUREMENT.....	49
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	49
4.5.2	TEST INSTRUMENTS.....	49
4.5.3	TEST PROCEDURE.....	49
4.5.4	DEVIATION FROM TEST STANDARD	49
4.5.5	TEST SETUP.....	50
4.5.6	EUT OPERATING CONDITION	50



A D T

4.5.7	TEST RESULTS	51
4.6	BAND EDGES MEASUREMENT	59
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	59
4.6.2	TEST INSTRUMENTS	59
4.6.3	TEST PROCEDURE	60
4.6.4	DEVIATION FROM TEST STANDARD	60
4.6.5	EUT OPERATING CONDITION	60
4.6.6	TEST RESULTS	61
4.7	ANTENNA REQUIREMENT	77
4.7.1	STANDARD APPLICABLE	77
4.7.2	ANTENNA CONNECTED CONSTRUCTION	77
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	78
6.	INFORMATION ON THE TESTING LABORATORIES	79
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	80

1. CERTIFICATION

PRODUCT: IEEE 802.11b/g/n PCI-E wireless Module

MODEL: AW-NE106

BRAND: AzureWave

APPLICANT: AzureWave Technologies, Inc.

TESTED: Jun. 01 ~ Jun. 09, 2009

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart C (Section 15.247)
ANSI C63.4-2003

The above equipment (model: AW-NE106) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Peggy Chen , **DATE:** Jun. 11, 2009
Peggy Chen / Specialist

TECHNICAL ACCEPTANCE : Long Chen , **DATE:** Jun. 11, 2009
Responsible for RF Long Chen / Senior Engineer

APPROVED BY : Gary Chang , **DATE:** Jun. 11, 2009
Gary Chang / Assistant Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -10.47dB at 3.996MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.02dB at 2390.00MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.34 dB
	200MHz ~1000MHz	3.35 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	IEEE 802.11b/g/n PCI-E wireless Module
MODEL NO.	AW-NE106
FCC ID	TLZ-NE106
POWER SUPPLY	3.3Vdc from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps Draft 802.11n: up to 135Mbps
OPERATING FREQUENCY	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, draft 802.11n (20MHz) 7 for draft 802.11n (40MHz)
MAXIMUM OUTPUT POWER	283.139mW
ANTENNA TYPE	PIFA antenna with 1.73 dBi gain
DATA CABLE	NA
I/O PORTS	NA
ACCESSORY DEVICES	NA

NOTE:

- The EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
802.11b	1TX
802.11g	1TX
Draft 802.11n (20MHz)	1TX
Draft 802.11n (40MHz)	1TX

- The antenna connector of EUT has two kinds of designs:
 - Two antenna connectors, 1TX & 1RX, RX with diversity function.
 - One antenna connector, 1TX & 1RX, RX without diversity function and without RLC component for RX path 2 BALUN & METCING.

Difference between these two designs is only non transmitter portions.
Transmitter portions are identical to each other.

*After pre-testing, "two antenna connectors" is the worst case and for final test.

- The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES


Eleven channels are provided for 802.11b, 802.11g and draft 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for draft 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2422MHz	5	2442MHz
2	2427MHz	6	2447MHz
3	2432MHz	7	2452MHz
4	2437MHz		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

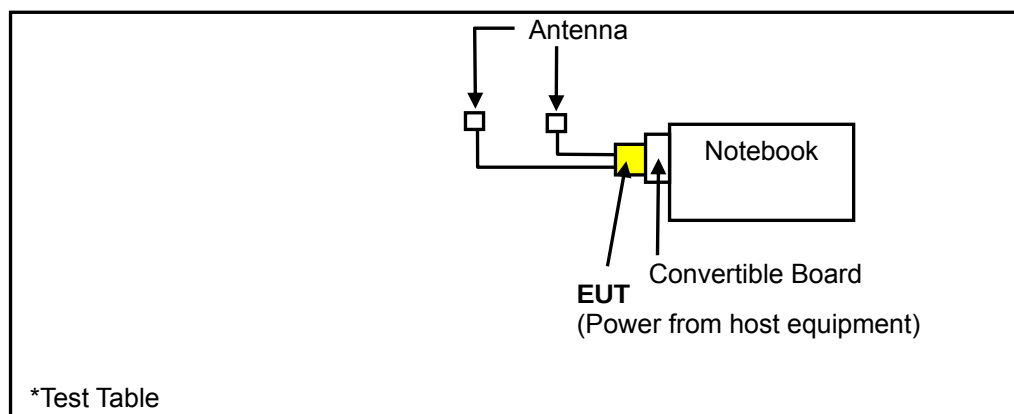

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission **RE<1G**: Radiated Emission below 1GHz
RE $\geq$ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
-	Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	Draft 802.11n (20MHz)	1 to 11	6	OFDM	BPSK	6.5

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	Draft 802.11n (20MHz)	1 to 11	6	OFDM	BPSK	6.5

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 11	DSSS	DBPSK	1
-	802.11g	1 to 11	1, 11	OFDM	BPSK	6
-	Draft 802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	6.5
-	Draft 802.11n (40MHz)	1 to 7	1, 7	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
-	Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	Dell	D830	10026042688	FCC DoC Approved
2	CONVERTIBLE BOARD	AzureWave	1106-fixturre	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA

NOTE:

1. All power cords of the above support units are non shielded (1.8m).
2. Item 2 was provided by the client.

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400 / F(kHz)	300
0.490 ~ 1.705	24000 / F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100212	May 25, 2009	May 24, 2010
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Aug. 08, 2008	Aug. 07, 2009
BILOG Antenna SCHWARZBECK	VULB9168	9168-156	Apr. 30, 2009	Apr. 29, 2010
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-563	Aug. 06, 2008	Aug. 05, 2009
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 06, 2009	Jan. 05, 2010
Preamplifier Agilent	8449B	3008A01911	Sep. 10, 2008	Sep. 09, 2009
Preamplifier Agilent	8447D	2944A10638	Dec. 26, 2008	Dec. 25, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218190/4 231241/4	May 13, 2009	May 12, 2010
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Aug. 09, 2008	Aug. 08, 2009
Software	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn Table Controller EMCO	2090	NA	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 9.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 460141.
 5. The IC Site Registration No. is IC 7450F-4.

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

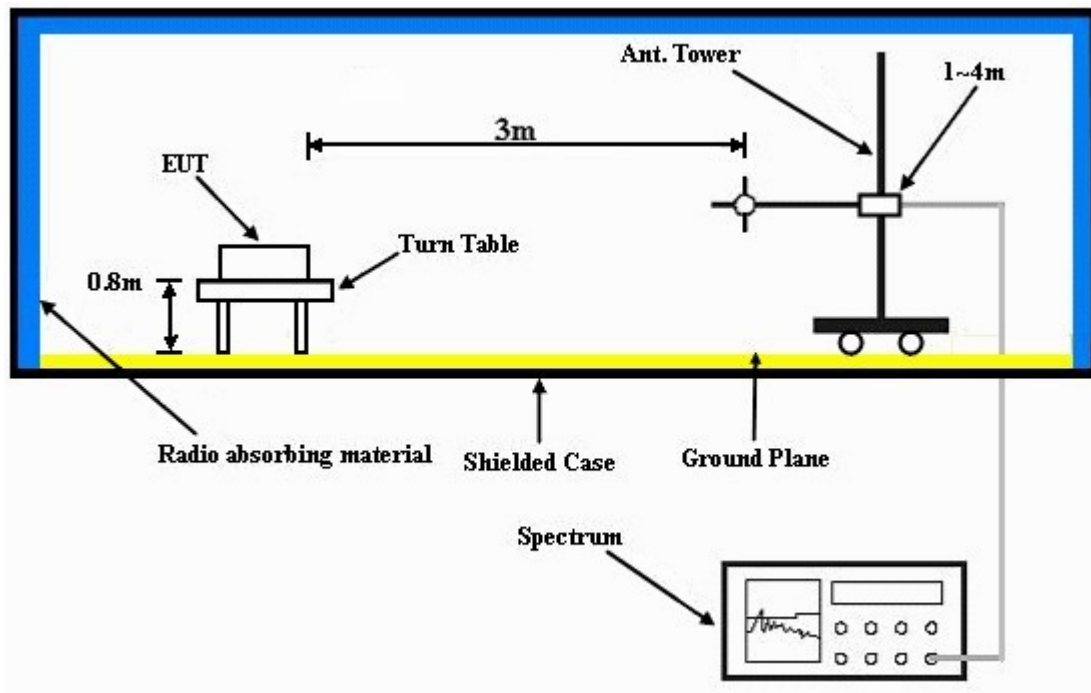

For the actual test configuration, please refer to the attached file (Test Setup Photo)

4.1.6 EUT OPERATING CONDITIONS

- Plugged the EUT to the notebook and placed them on the testing table.
- The notebook system ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.

4.1.7 TEST RESULTS

802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24.0deg. C, 64.0%RH 1002hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.87 PK	74.00	-17.13	1.36 H	276	23.79	33.08
2	2390.00	47.00 AV	54.00	-7.00	1.36 H	276	13.92	33.08
3	*2412.00	104.50 PK			1.36 H	276	71.32	33.18
4	*2412.00	99.30 AV			1.36 H	276	66.12	33.18
5	#3216.00	51.78 PK	84.50	-32.72	1.00 H	174	16.22	35.56
6	#3216.00	45.62 AV	79.30	-33.68	1.00 H	174	10.06	35.56
7	4824.00	50.77 PK	74.00	-23.23	1.35 H	347	11.62	39.15
8	4824.00	42.59 AV	54.00	-11.41	1.35 H	347	3.44	39.15
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.46 PK	74.00	-14.54	1.15 V	278	26.38	33.08
2	2390.00	48.84 AV	54.00	-5.16	1.15 V	278	15.76	33.08
3	*2412.00	110.05 PK			1.15 V	278	76.87	33.18
4	*2412.00	105.24 AV			1.15 V	278	72.06	33.18
5	#3216.00	54.43 PK	90.05	-35.62	1.05 V	64	18.87	35.56
6	#3216.00	51.10 AV	85.24	-34.14	1.05 V	64	15.54	35.56
7	4824.00	51.97 PK	74.00	-22.03	1.07 V	10	12.82	39.15
8	4824.00	46.91 AV	54.00	-7.09	1.07 V	10	7.76	39.15

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. “#”: The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24.0deg. C, 64.0%RH 1002hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.42 PK			1.28 H	258	71.14	33.28
2	*2437.00	99.19 AV			1.28 H	258	65.91	33.28
3	#3249.00	51.89 PK	84.42	-32.53	1.21 H	136	16.35	35.54
4	#3249.00	45.90 AV	79.19	-33.29	1.21 H	136	10.36	35.54
5	4874.00	47.28 PK	74.00	-26.72	1.07 H	37	8.14	39.14
6	4874.00	39.79 AV	54.00	-14.21	1.07 H	37	0.65	39.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	109.91 PK			1.20 V	255	76.63	33.28
2	*2437.00	105.07 AV			1.20 V	255	71.79	33.28
3	#3249.00	54.37 PK	89.91	-35.54	1.06 V	100	18.83	35.54
4	#3249.00	51.84 AV	85.07	-33.23	1.06 V	100	16.30	35.54
5	4874.00	49.44 PK	74.00	-24.56	1.30 V	261	10.29	39.14
6	4874.00	41.37 AV	54.00	-12.63	1.30 V	261	2.22	39.14

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. “ # ”: The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24.0deg. C, 64.0%RH 1002hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.01 PK			1.22 H	222	70.63	33.38
2	*2462.00	99.28 AV			1.22 H	222	65.90	33.38
3	2483.50	56.88 PK	74.00	-17.12	1.22 H	222	23.42	33.46
4	2483.50	47.61 AV	54.00	-6.39	1.22 H	222	14.15	33.46
5	#3282.00	52.34 PK	84.01	-31.67	1.01 H	180	16.83	35.51
6	#3282.00	46.30 AV	79.28	-32.98	1.01 H	180	10.79	35.51
7	4924.00	52.83 PK	74.00	-21.17	1.16 H	351	13.47	39.35
8	4924.00	44.54 AV	54.00	-9.46	1.16 H	351	5.18	39.35
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.74 PK			1.12 V	249	76.36	33.38
2	*2462.00	104.89 AV			1.12 V	249	71.51	33.38
3	2483.50	60.74 PK	74.00	-13.26	1.10 V	280	27.28	33.46
4	2483.50	49.17 AV	54.00	-4.83	1.10 V	280	15.71	33.46
5	#3282.00	54.12 PK	89.74	-35.62	1.03 V	73	18.61	35.51
6	#3282.00	52.43 AV	84.89	-32.46	1.03 V	73	16.92	35.51
7	4924.00	52.38 PK	74.00	-21.62	1.06 V	4	13.02	39.35
8	4924.00	46.82 AV	54.00	-7.18	1.06 V	4	7.46	39.35

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”: The radiated frequency is out the restricted band.

802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24.0deg. C, 64.0%RH 1002hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.38 PK	74.00	-16.62	1.32 H	115	24.30	33.08
2	2390.00	47.39 AV	54.00	-6.61	1.32 H	115	14.31	33.08
3	*2412.00	103.51 PK			1.32 H	115	70.33	33.18
4	*2412.00	92.53 AV			1.32 H	115	59.35	33.18
5	#3216.00	51.88 PK	83.51	-31.63	1.00 H	101	16.32	35.56
6	#3216.00	45.63 AV	72.53	-26.90	1.00 H	101	10.07	35.56
7	4824.00	48.58 PK	74.00	-25.42	1.32 H	108	9.43	39.15
8	4824.00	35.43 AV	54.00	-18.57	1.32 H	108	-3.72	39.15
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.97 PK	74.00	-5.03	1.18 V	228	35.89	33.08
2	2390.00	52.98 AV	54.00	-1.02	1.18 V	228	19.90	33.08
3	*2412.00	109.82 PK			1.21 V	0	76.64	33.18
4	*2412.00	98.70 AV			1.21 V	0	65.52	33.18
5	#3216.00	55.18 PK	89.82	-34.64	1.00 V	246	19.62	35.56
6	#3216.00	51.88 AV	78.70	-26.82	1.00 V	246	16.32	35.56
7	4824.00	50.00 PK	74.00	-24.00	1.19 V	4	10.85	39.15
8	4824.00	37.06 AV	54.00	-16.94	1.19 V	4	-2.09	39.15

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”: The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24.0deg. C, 64.0%RH 1002hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.63 PK			1.11 H	351	71.35	33.28
2	*2437.00	93.66 AV			1.11 H	351	60.38	33.28
3	#3249.00	51.37 PK	84.63	-33.26	1.07 H	168	15.83	35.54
4	#3249.00	45.84 AV	73.66	-27.82	1.07 H	168	10.30	35.54
5	4874.00	48.01 PK	74.00	-25.99	1.00 H	6	8.87	39.14
6	4874.00	36.58 AV	54.00	-17.42	1.00 H	6	-2.56	39.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	110.96 PK			1.20 V	28	77.68	33.28
2	*2437.00	99.56 AV			1.20 V	28	66.28	33.28
3	#3249.00	53.84 PK	90.96	-37.12	1.27 V	8	18.30	35.54
4	#3249.00	51.83 AV	79.56	-27.73	1.27 V	8	16.29	35.54
5	4874.00	48.82 PK	74.00	-25.18	1.22 V	207	9.67	39.14
6	4874.00	37.01 AV	54.00	-16.99	1.22 V	207	-2.14	39.14

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. “ # ”: The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24.0deg. C, 64.0%RH 1002hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.58 PK			1.28 H	207	68.20	33.38
2	*2462.00	90.67 AV			1.28 H	207	57.29	33.38
3	2483.50	57.55 PK	74.00	-16.45	1.28 H	207	24.09	33.46
4	2483.50	47.61 AV	54.00	-6.39	1.28 H	207	14.15	33.46
5	#3282.00	52.79 PK	81.58	-28.79	1.01 H	123	17.28	35.51
6	#3282.00	46.68 AV	70.67	-23.99	1.01 H	123	11.17	35.51
7	4924.00	48.37 PK	74.00	-25.63	1.41 H	189	9.02	39.35
8	4924.00	36.00 AV	54.00	-18.00	1.41 H	189	-3.35	39.35
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.75 PK			1.17 V	359	74.37	33.38
2	*2462.00	96.23 AV			1.17 V	359	62.85	33.38
3	2483.50	67.42 PK	74.00	-6.58	1.38 V	89	33.96	33.46
4	2483.50	52.96 AV	54.00	-1.04	1.38 V	89	19.50	33.46
5	#3282.00	56.41 PK	87.75	-31.34	1.24 V	34	20.90	35.51
6	#3282.00	52.95 AV	76.23	-23.28	1.24 V	34	17.44	35.51
7	4924.00	48.99 PK	74.00	-25.01	1.10 V	108	9.63	39.35
8	4924.00	36.16 AV	54.00	-17.84	1.10 V	108	-3.20	39.35

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. “#”: The radiated frequency is out the restricted band.

DRAFT 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24.0deg. C, 64.0%RH 1002hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.57 PK	74.00	-16.43	1.11 H	226	24.49	33.08
2	2390.00	47.30 AV	54.00	-6.70	1.11 H	226	14.22	33.08
3	*2412.00	102.16 PK			1.11 H	226	68.98	33.18
4	*2412.00	91.02 AV			1.11 H	226	57.84	33.18
5	#3216.00	49.73 PK	82.16	-32.43	1.20 H	51	14.17	35.56
6	#3216.00	44.22 AV	71.02	-26.80	1.20 H	51	8.66	35.56
7	4824.00	48.00 PK	74.00	-26.00	1.05 H	285	8.85	39.15
8	4824.00	35.43 AV	54.00	-18.57	1.05 H	285	-3.72	39.15
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.65 PK	74.00	-6.35	1.18 V	229	34.57	33.08
2	2390.00	52.93 AV	54.00	-1.07	1.18 V	229	19.85	33.08
3	*2412.00	108.58 PK			1.23 V	42	75.40	33.18
4	*2412.00	97.53 AV			1.23 V	42	64.35	33.18
5	#3216.00	52.86 PK	88.58	-35.72	1.24 V	63	17.30	35.56
6	#3216.00	49.80 AV	77.53	-27.73	1.24 V	63	14.24	35.56
7	4824.00	48.13 PK	74.00	-25.87	1.24 V	188	8.98	39.15
8	4824.00	35.53 AV	54.00	-18.47	1.24 V	188	-3.62	39.15

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24.0deg. C, 64.0%RH 1002hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.66 PK			1.01 H	116	71.38	33.28
2	*2437.00	93.74 AV			1.01 H	116	60.46	33.28
3	#3249.00	50.01 PK	84.66	-34.65	1.42 H	159	14.47	35.54
4	#3249.00	45.87 AV	73.74	-27.87	1.42 H	159	10.33	35.54
5	4874.00	48.21 PK	74.00	-25.79	1.11 H	157	9.07	39.14
6	4874.00	35.55 AV	54.00	-18.45	1.11 H	157	-3.59	39.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	110.82 PK			1.21 V	26	77.54	33.28
2	*2437.00	99.68 AV			1.21 V	26	66.40	33.28
3	#3249.00	54.54 PK	90.82	-36.28	1.22 V	169	19.00	35.54
4	#3249.00	51.37 AV	79.68	-28.31	1.22 V	169	15.83	35.54
5	4874.00	48.34 PK	74.00	-25.66	1.00 V	287	9.20	39.14
6	4874.00	35.61 AV	54.00	-18.39	1.00 V	287	-3.53	39.14

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. “ # ”: The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24.0deg. C, 64.0%RH 1002hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	100.11 PK			1.20 H	157	66.73	33.38
2	*2462.00	89.09 AV			1.20 H	157	55.71	33.38
3	2483.50	57.49 PK	74.00	-16.51	1.20 H	157	24.03	33.46
4	2483.50	47.28 AV	54.00	-6.72	1.20 H	157	13.82	33.46
5	#3282.00	52.66 PK	80.11	-27.45	1.32 H	166	17.15	35.51
6	#3282.00	42.97 AV	69.09	-26.12	1.32 H	166	7.46	35.51
7	4924.00	48.40 PK	74.00	-25.60	1.00 H	133	9.05	39.35
8	4924.00	35.66 AV	54.00	-18.34	1.00 H	133	-3.69	39.35
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.74 PK			1.18 V	1	73.36	33.38
2	*2462.00	95.68 AV			1.18 V	1	62.30	33.38
3	2483.50	70.75 PK	74.00	-3.25	1.13 V	202	37.29	33.46
4	2483.50	52.96 AV	54.00	-1.04	1.13 V	202	19.50	33.46
5	#3282.00	53.89 PK	86.74	-32.85	1.24 V	32	18.38	35.51
6	#3282.00	50.14 AV	75.68	-25.54	1.24 V	32	14.63	35.51
7	4924.00	48.46 PK	74.00	-25.54	1.11 V	102	9.10	39.35
8	4924.00	35.72 AV	54.00	-18.28	1.11 V	102	-3.64	39.35

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. “#”: The radiated frequency is out the restricted band.

DRAFT 802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24.0deg. C, 64.0%RH 1002hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.83 PK	74.00	-13.17	1.32 H	56	27.75	33.08
2	2390.00	48.62 AV	54.00	-5.38	1.32 H	56	15.54	33.08
3	*2422.00	93.99 PK			1.31 H	45	60.77	33.22
4	*2422.00	82.55 AV			1.31 H	45	49.33	33.22
5	#3229.00	49.24 PK	73.99	-24.75	1.14 H	38	13.69	35.55
6	#3229.00	44.57 AV	62.55	-17.98	1.14 H	38	9.02	35.55
7	4844.00	47.65 PK	74.00	-26.35	1.02 H	288	8.50	39.15
8	4844.00	34.78 AV	54.00	-19.22	1.02 H	288	-4.37	39.15
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.17 PK	74.00	-5.83	1.07 V	78	35.09	33.08
2	2390.00	52.46 AV	54.00	-1.54	1.07 V	78	19.38	33.08
3	*2422.00	99.73 PK			1.08 V	136	66.51	33.22
4	*2422.00	88.84 AV			1.08 V	136	55.62	33.22
5	#3229.00	53.29 PK	79.73	-26.44	1.01 V	244	17.74	35.55
6	#3229.00	49.11 AV	68.84	-19.73	1.01 V	244	13.56	35.55
7	4844.00	47.66 PK	74.00	-26.34	1.10 V	215	8.51	39.15
8	4844.00	34.85 AV	54.00	-19.15	1.10 V	215	-4.30	39.15

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24.0deg. C, 64.0%RH 1002hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.65 PK	74.00	-16.35	1.22 H	257	24.57	33.08
2	2390.00	47.08 AV	54.00	-6.92	1.22 H	257	14.00	33.08
3	*2437.00	98.34 PK			1.22 H	257	65.06	33.28
4	*2437.00	86.78 AV			1.22 H	257	53.50	33.28
5	2483.50	58.50 PK	74.00	-15.50	1.22 H	257	25.04	33.46
6	2483.50	48.22 AV	54.00	-5.78	1.22 H	257	14.76	33.46
7	#3249.00	50.34 PK	78.34	-28.00	1.33 H	24	14.80	35.54
8	#3249.00	45.63 AV	66.78	-21.15	1.33 H	24	10.09	35.54
9	4874.00	48.00 PK	74.00	-26.00	1.01 H	114	8.86	39.14
10	4874.00	35.19 AV	54.00	-18.81	1.01 H	114	-3.95	39.14

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24.0deg. C, 64.0%RH 1002hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.71 PK	74.00	-8.29	1.14 V	281	32.63	33.08
2	2390.00	51.29 AV	54.00	-2.71	1.14 V	281	18.21	33.08
3	*2437.00	104.32 PK			1.11 V	278	71.04	33.28
4	*2437.00	92.78 AV			1.11 V	278	59.50	33.28
5	2483.50	65.72 PK	74.00	-8.28	1.09 V	272	32.26	33.46
6	2483.50	52.47 AV	54.00	-1.53	1.09 V	272	19.01	33.46
7	#3249.00	54.51 PK	84.32	-29.81	1.07 V	135	18.97	35.54
8	#3249.00	50.95 AV	72.78	-21.83	1.07 V	135	15.41	35.54
9	4874.00	48.22 PK	74.00	-25.78	1.21 V	10	9.08	39.14
10	4874.00	35.34 AV	54.00	-18.66	1.21 V	10	-3.80	39.14

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. “#”: The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24.0deg. C, 64.0%RH 1002hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	94.19 PK			1.10 H	143	60.85	33.34
2	*2452.00	82.70 AV			1.10 H	143	49.36	33.34
3	2483.50	58.24 PK	74.00	-15.76	1.10 H	143	24.78	33.46
4	2483.50	47.01 AV	54.00	-6.99	1.10 H	143	13.55	33.46
5	#3269.00	51.34 PK	74.19	-22.85	1.20 H	216	15.82	35.52
6	#3269.00	46.66 AV	62.70	-16.04	1.20 H	216	11.14	35.52
7	4904.00	48.22 PK	74.00	-25.78	1.00 H	19	9.04	39.18
8	4904.00	35.54 AV	54.00	-18.46	1.00 H	19	-3.64	39.18
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	99.81 PK			1.09 V	277	66.47	33.34
2	*2452.00	88.90 AV			1.09 V	277	55.56	33.34
3	2483.50	67.08 PK	74.00	-6.92	1.09 V	277	33.62	33.46
4	2483.50	51.97 AV	54.00	-2.03	1.09 V	277	18.51	33.46
5	#3269.00	55.39 PK	79.81	-24.42	1.05 V	314	19.87	35.52
6	#3269.00	51.27 AV	68.90	-17.63	1.05 V	314	15.75	35.52
7	4904.00	48.36 PK	74.00	-25.64	1.34 V	37	9.18	39.18
8	4904.00	35.60 AV	54.00	-18.40	1.34 V	37	-3.58	39.18

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. “#”: The radiated frequency is out the restricted band.

BELOW 1GHz WORST-CASE DATA : DRAFT 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23.0deg. C, 63.0%RH 1000hPa	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	99.89	39.65 QP	43.50	-3.85	2.00 H	322	28.08	11.56
2	199.05	40.21 QP	43.50	-3.29	1.25 H	181	29.70	10.51
3	298.21	35.02 QP	46.00	-10.98	1.00 H	283	21.29	13.73
4	397.37	35.98 QP	46.00	-10.02	2.00 H	220	18.04	17.94
5	498.47	34.63 QP	46.00	-11.37	1.50 H	301	14.24	20.39
6	663.74	39.02 QP	46.00	-6.98	1.00 H	295	14.88	24.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	70.73	37.29 QP	40.00	-2.71	1.00 V	277	24.40	12.88
2	107.67	38.89 QP	43.50	-4.61	1.00 V	319	27.39	11.50
3	397.37	32.25 QP	46.00	-13.75	1.25 V	43	14.32	17.94
4	500.42	32.66 QP	46.00	-13.34	1.50 V	325	12.23	20.44
5	665.68	39.35 QP	46.00	-6.65	1.50 V	259	15.17	24.18
6	832.89	33.93 QP	46.00	-12.07	1.50 V	220	7.31	26.62

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 19, 2008	Nov. 18, 2009
RF signal cable Woken	5D-FB	Cable-HYC01-01	Dec. 31, 2008	Dec. 30, 2009
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Jun. 13, 2008	Jun. 12, 2009
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Dec. 04, 2008	Dec. 03, 2009
Software ADT	ADT_Conc_ V7.3.7	NA	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

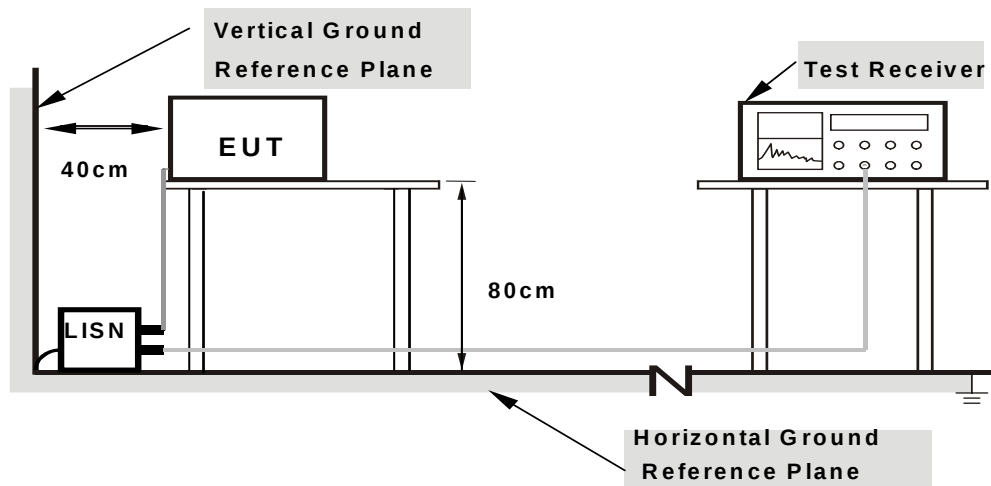

Note: 1.Support units were connected to second LISN.
 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.


4.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA: DRAFT 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60Hz
TRANSFER RATE	6.5Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH, 1027hPa	TESTED BY	Sun Lin

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.166	0.13	50.96	-	51.09	-	65.17	55.17	-14.08	-
2	0.224	0.13	43.43	-	43.56	-	62.66	52.66	-19.10	-
3	0.279	0.13	42.76	-	42.89	-	60.85	50.85	-17.95	-
4	0.338	0.14	33.77	-	33.91	-	59.26	49.26	-25.36	-
5	2.168	0.24	41.54	-	41.78	-	56.00	46.00	-14.22	-
6	3.945	0.37	44.10	-	44.47	-	56.00	46.00	-11.53	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

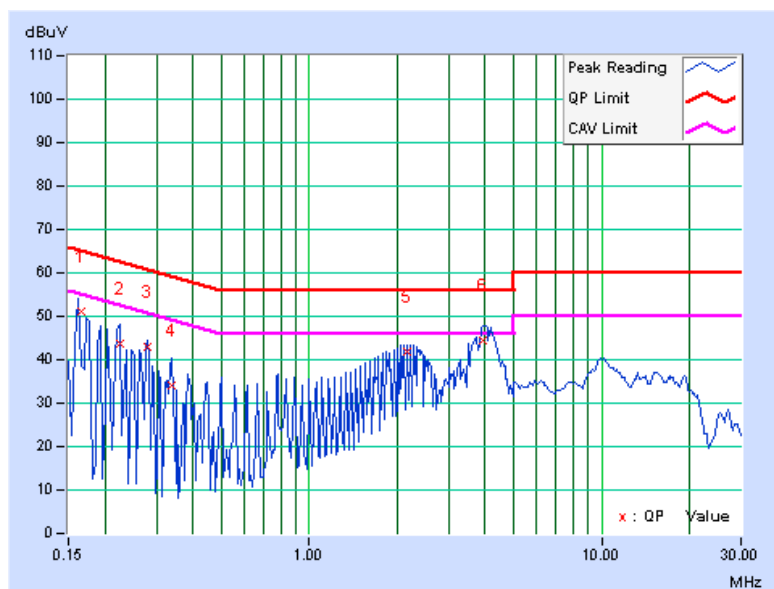

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60Hz
TRANSFER RATE	6.5Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH, 1027hPa	TESTED BY	Sun Lin

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.14	48.98	-	49.12	-	65.38	55.38	-16.25	-
2	0.170	0.14	52.39	-	52.53	-	64.98	54.98	-12.45	-
3	0.220	0.15	48.30	-	48.45	-	62.81	52.81	-14.36	-
4	0.388	0.16	39.35	-	39.51	-	58.10	48.10	-18.59	-
5	2.055	0.25	42.02	-	42.27	-	56.00	46.00	-13.73	-
6	3.996	0.39	45.14	-	45.53	-	56.00	46.00	-10.47	-

- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

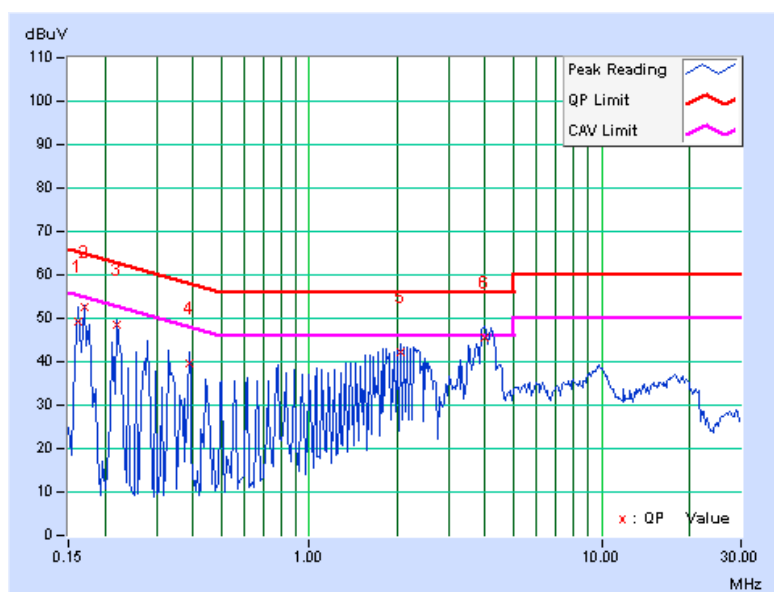

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100040	Jul. 04, 2008	Jul. 03, 2009

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS

802.11b DSSS MODULATION

MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	27deg.C, 66%RH, 991hPa
TESTED BY	Lori Chiu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	12.03	0.5	PASS
6	2437	12.09	0.5	PASS
11	2462	11.20	0.5	PASS

CH 1

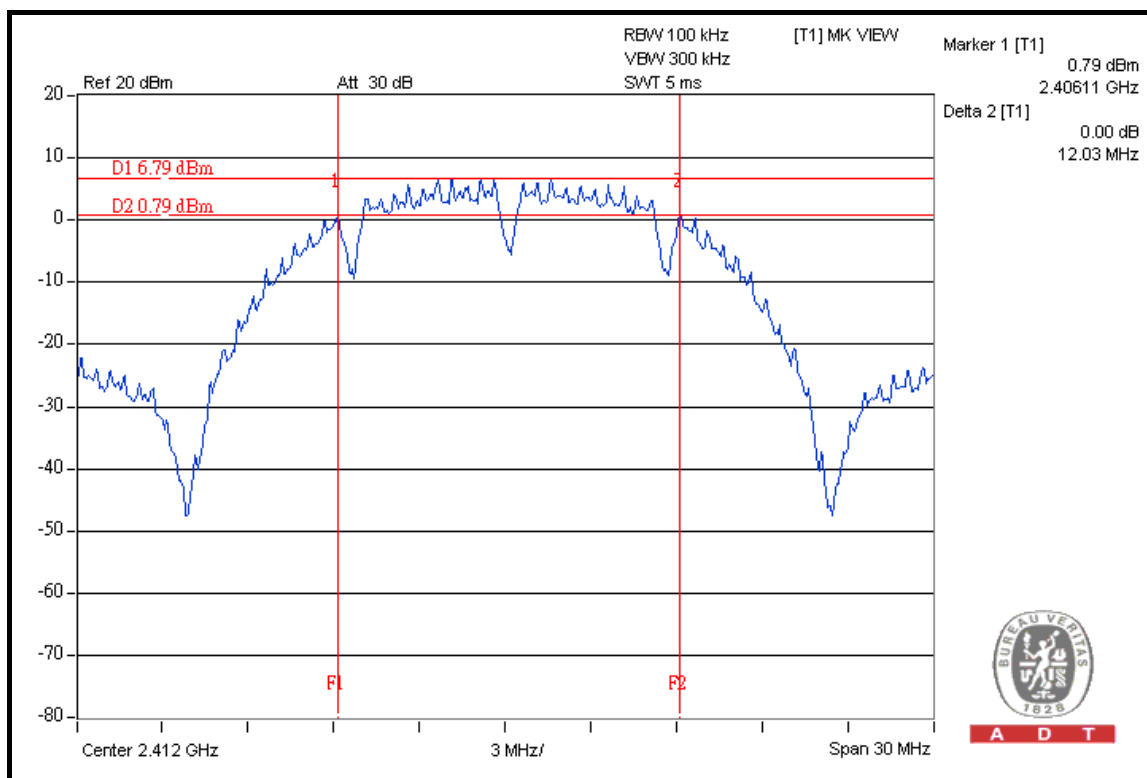




A D T

802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	27deg.C, 66%RH, 991hPa
TESTED BY	Lori Chiu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.43	0.5	PASS
6	2437	16.44	0.5	PASS
11	2462	16.45	0.5	PASS

CH 1

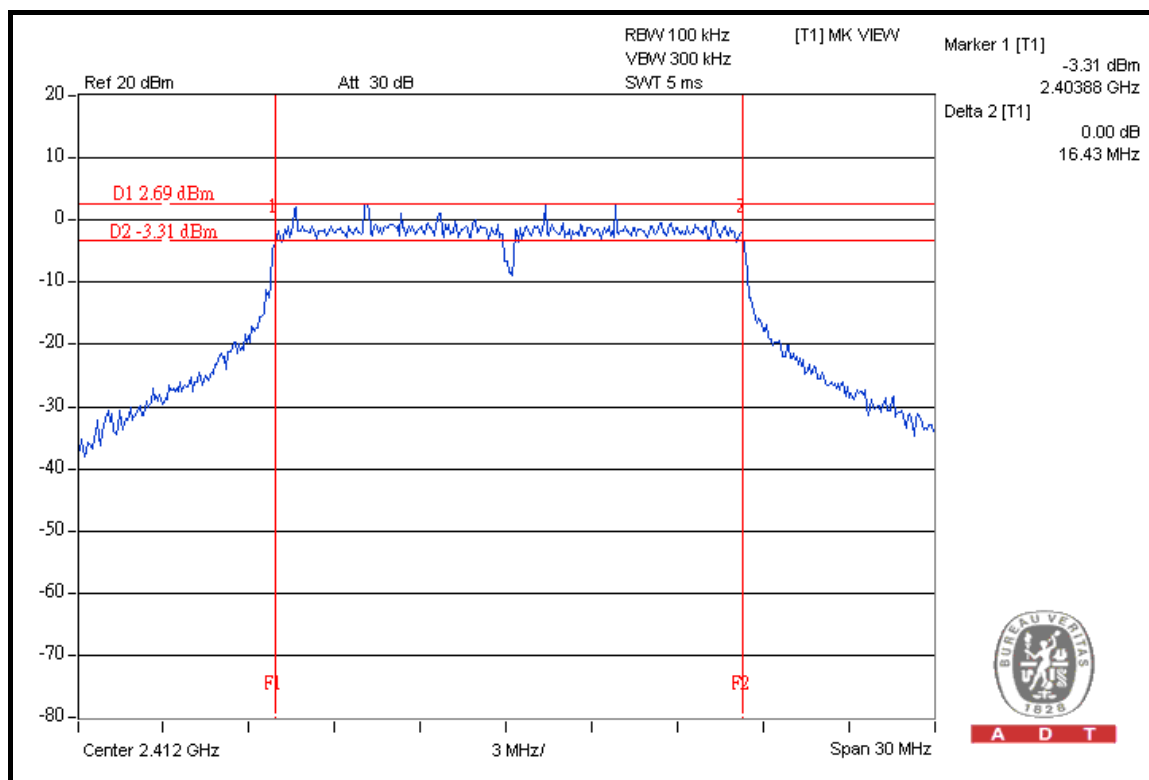



Ref 20 dBm Att 30 dB RBW 100 kHz VBW 300 kHz [T1] MK VIEW
SWT 5 ms

Marker 1 [T1] -1.45 dBm 2.42888 GHz
Delta 2 [T1] 0.00 dB 16.44 MHz

D1 4.55 dBm
D2 -1.45 dBm

F1 F2

Center 2.437 GHz 3 MHz/ Span 30 MHz

BUREAU VERITAS
1828
A D T

Ref 20 dBm Att 30 dB RBW 100 kHz VBW 300 kHz SWT 5 ms [T1] MK VIEW

Marker 1 [T1] -4.93 dBm 2.45386 GHz

Delta 2 [T1] 0.00 dB 16.45 MHz

D1 1.07 dBm D2 -4.93 dBm

Center 2.462 GHz 3 MHz/ Span 30 MHz

A D T




A D T

DRAFT 802.11n (20MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	27deg.C, 66%RH, 991hPa
TESTED BY	Lori Chiu		


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.67	0.5	PASS
6	2437	17.67	0.5	PASS
11	2462	17.67	0.5	PASS

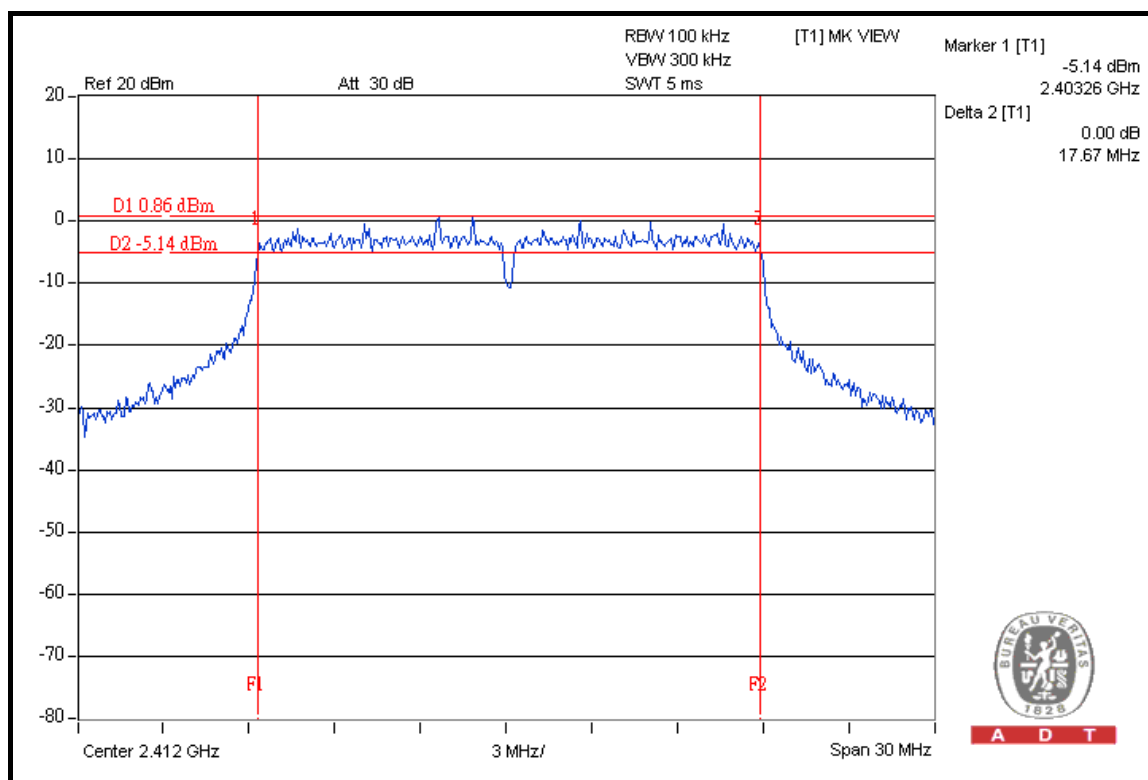CH 1




A D T

CH 6

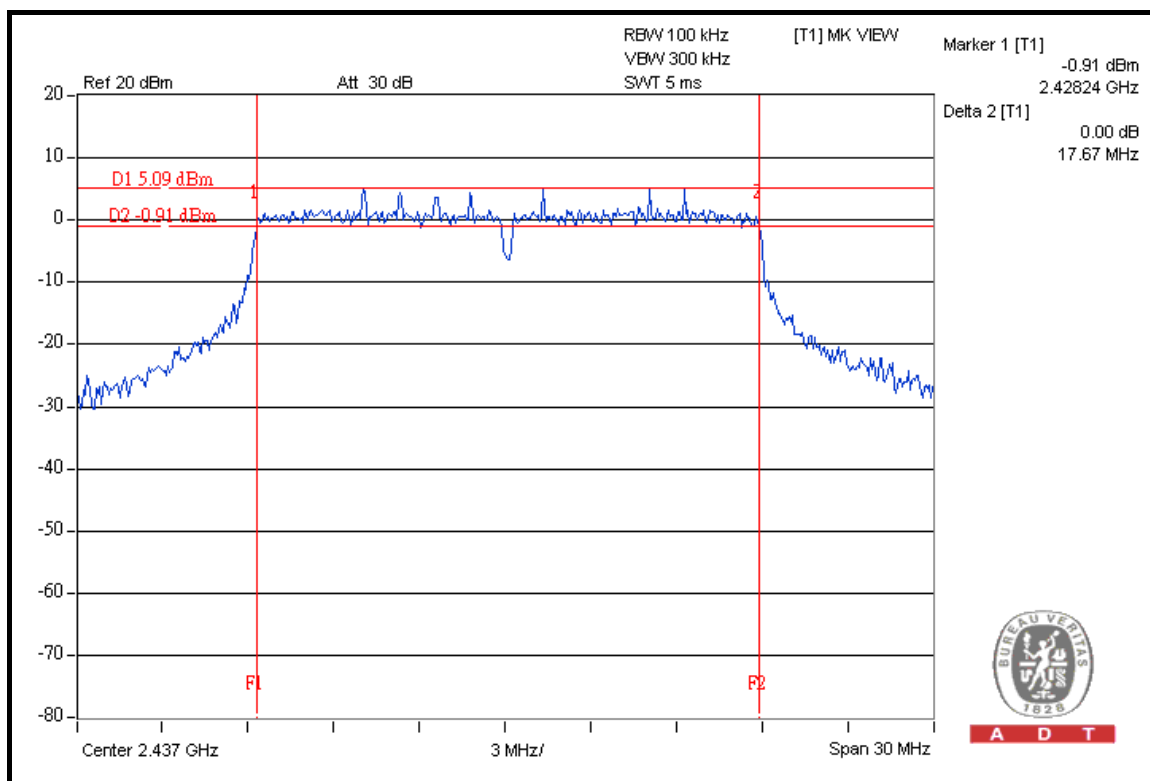

CH 11

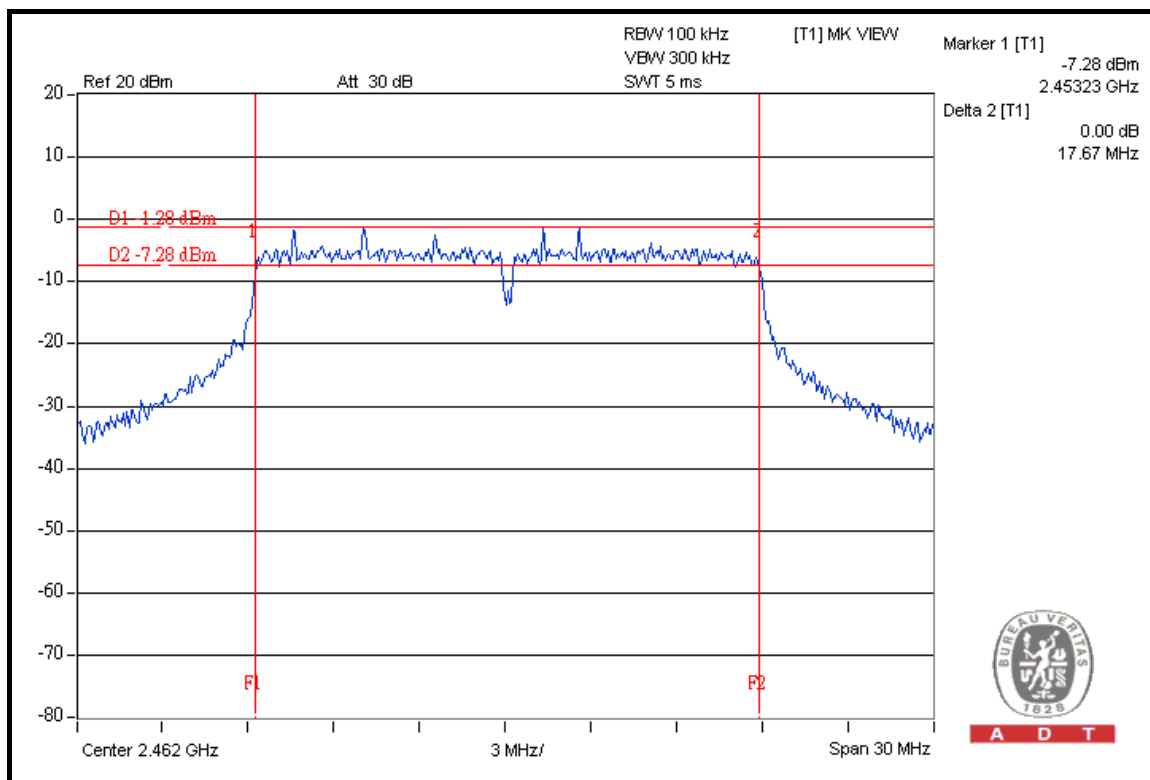


DRAFT 802.11n (40MHz) OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	13.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	27deg.C, 66%RH, 991hPa
TESTED BY	Lori Chiu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2422	36.42	0.5	PASS
4	2437	36.54	0.5	PASS
7	2452	36.54	0.5	PASS


CH 1

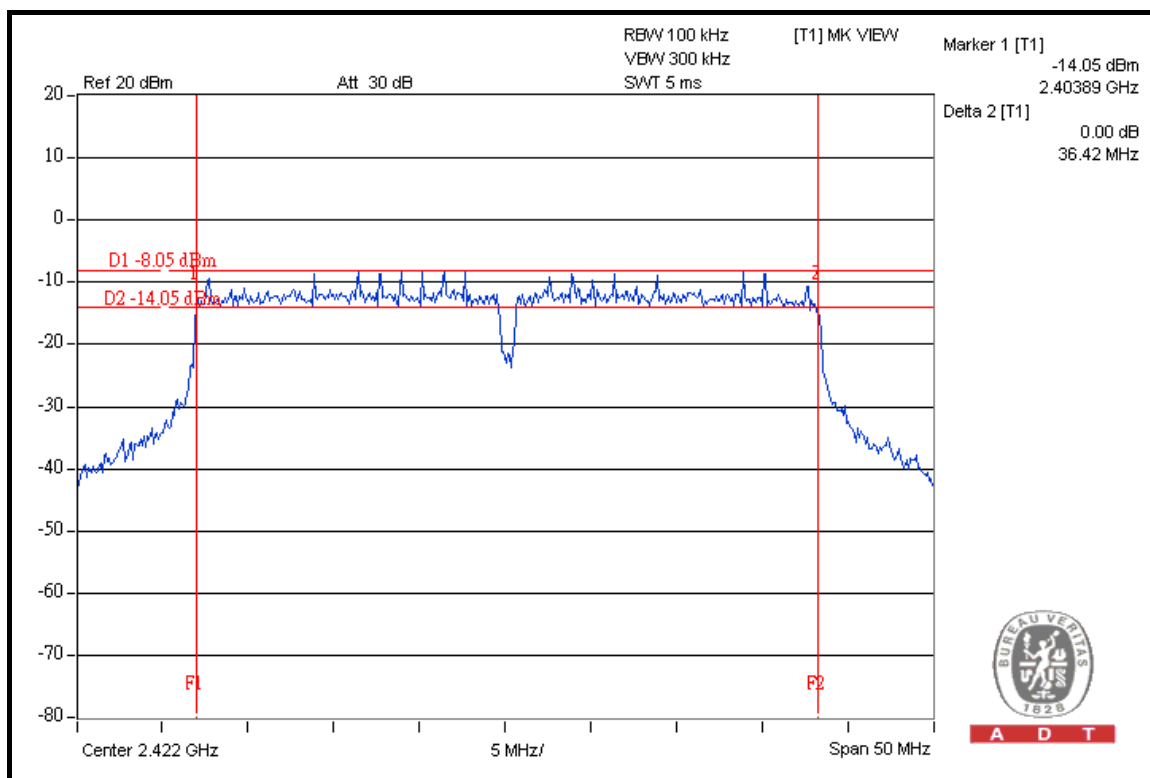

CH 4

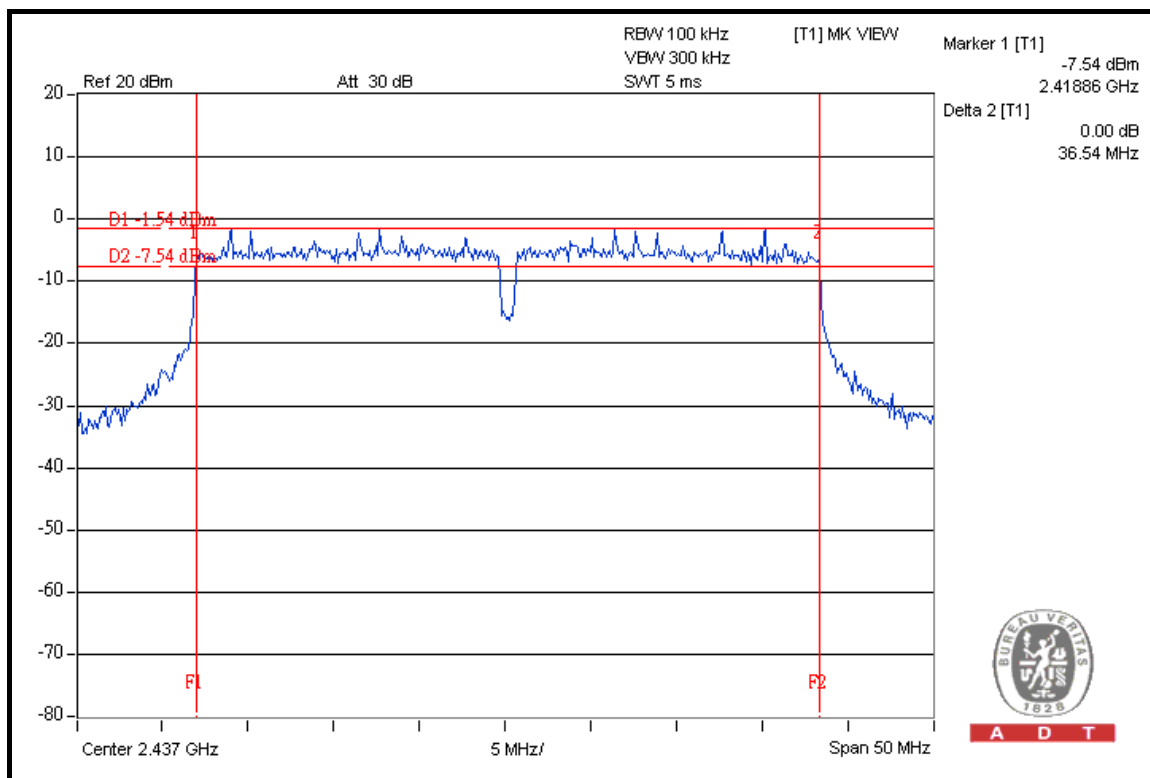

CH 7

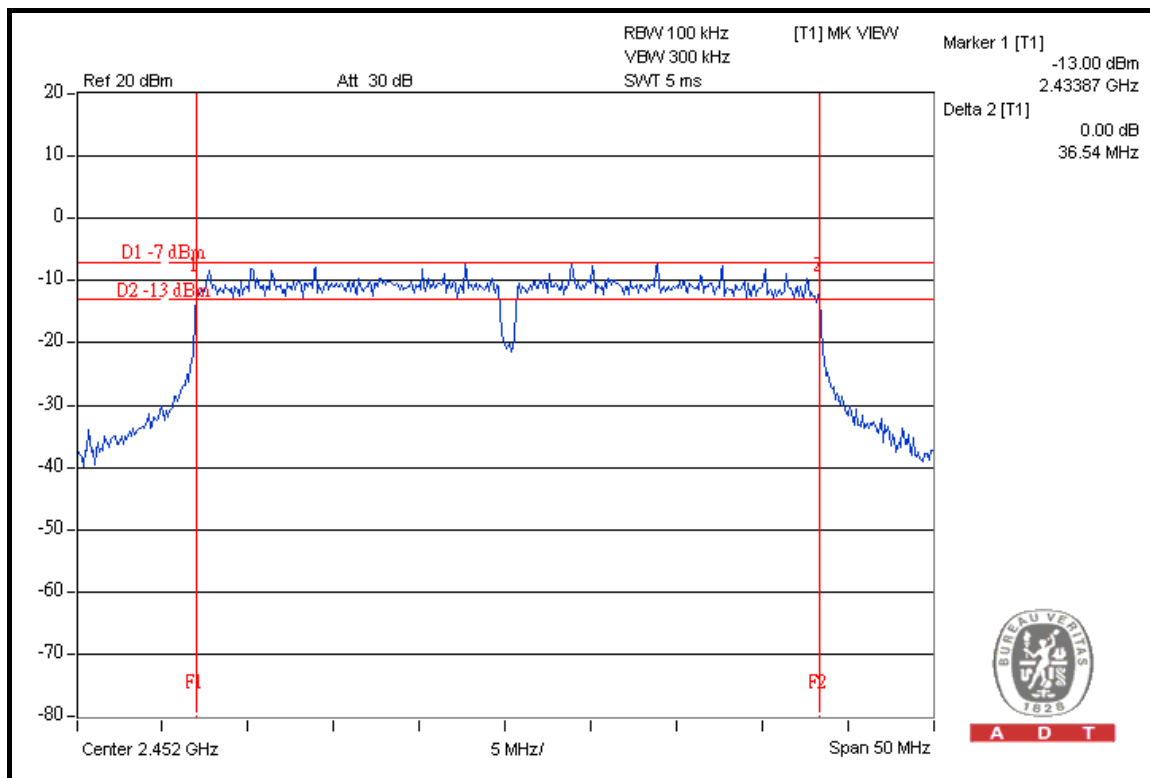

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
High Speed Peak Power Meter	ML2495A	0824012	Aug. 04, 2008	Aug. 03, 2009
Power Sensor	MA2411B	0738138	Aug. 04, 2008	Aug. 03, 2009

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Measurement Bandwidth of ML2495A is 65MHz greater than 6dB bandwidth of emission.


4.4.3 TEST PROCEDURES

A power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP

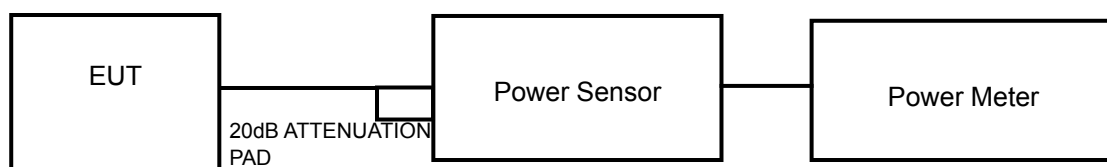

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.

4.4.7 TEST RESULTS

802.11b DSSS MODULATION

MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	27deg.C, 66%RH, 991hPa
TESTED BY	Lori Chiu		

CHAN	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	80.168	19.04	30	PASS
6	2437	81.096	19.09	30	PASS
11	2462	79.799	19.02	30	PASS

802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	27deg.C, 66%RH, 991hPa
TESTED BY	Lori Chiu		

CHAN	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	161.808	22.09	30	PASS
6	2437	252.930	24.03	30	PASS
11	2462	113.763	20.56	30	PASS



A D T

DRAFT 802.11n (20MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	27deg.C, 66%RH, 991hPa
TESTED BY	Lori Chiu		

CHAN	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	113.240	20.54	30	PASS
6	2437	283.139	24.52	30	PASS
11	2462	71.945	18.57	30	PASS

DRAFT 802.11n (40MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	13.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	27deg.C, 66%RH, 991hPa
TESTED BY	Lori Chiu		

CHAN	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2422	40.551	16.08	30	PASS
4	2437	179.473	22.54	30	PASS
7	2452	50.816	17.06	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100040	Jul. 04, 2008	Jul. 03, 2009

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6.


4.5.7 TEST RESULTS

802.11b DSSS MODULATION

MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	27deg.C, 66%RH, 991hPa
TESTED BY	Lori Chiu		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-7.26	8	PASS
6	2437	-7.14	8	PASS
11	2462	-7.11	8	PASS


CH 1

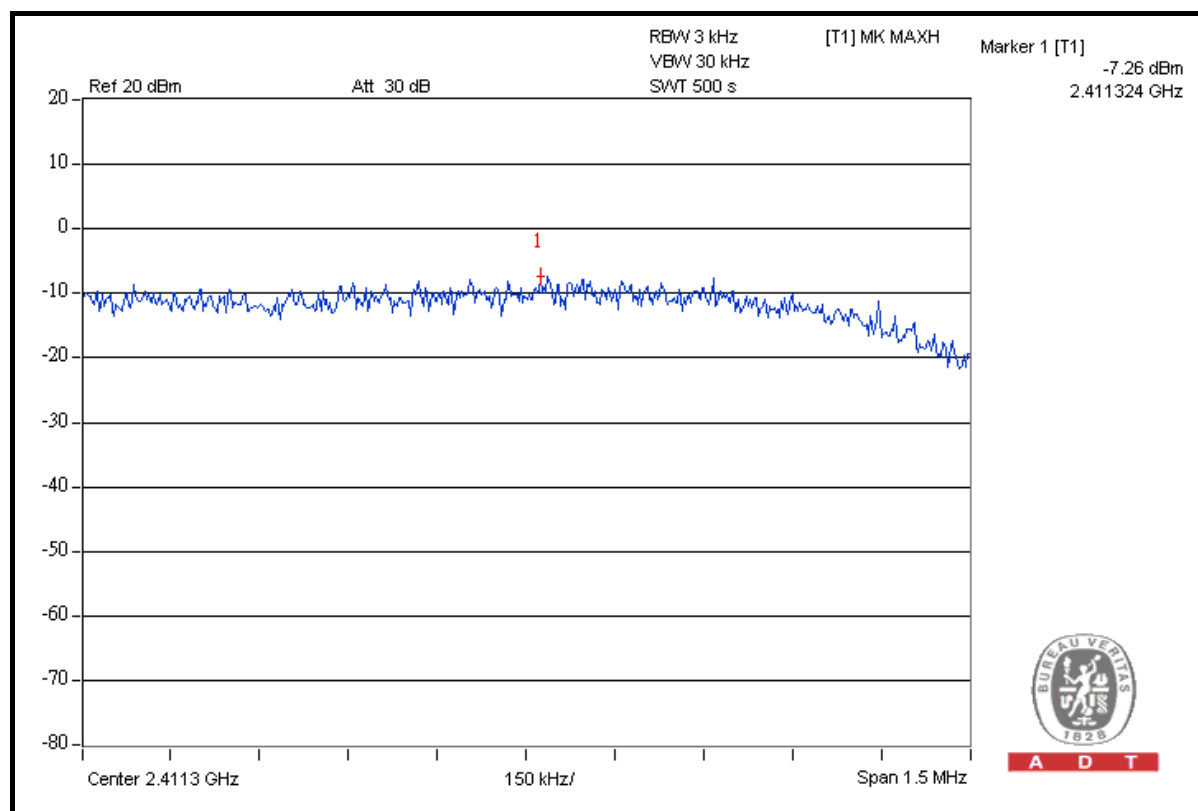




A D T

CH 6

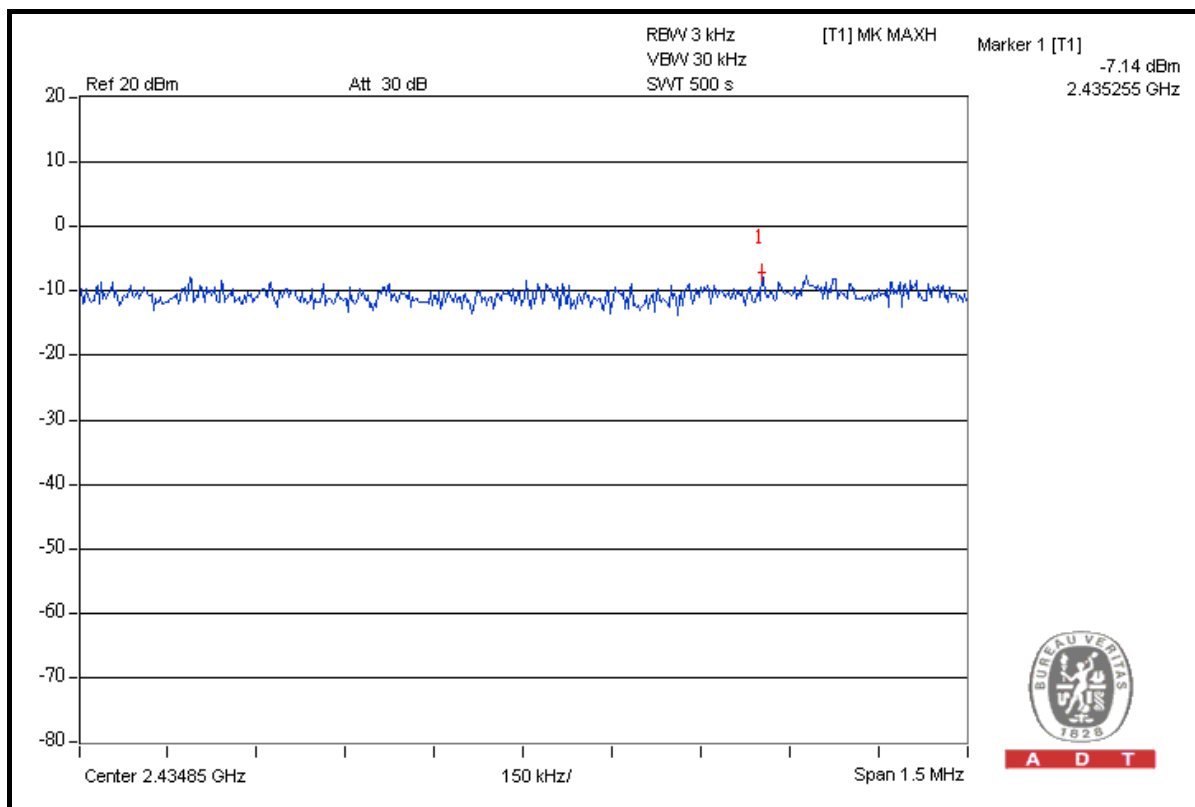

CH 11

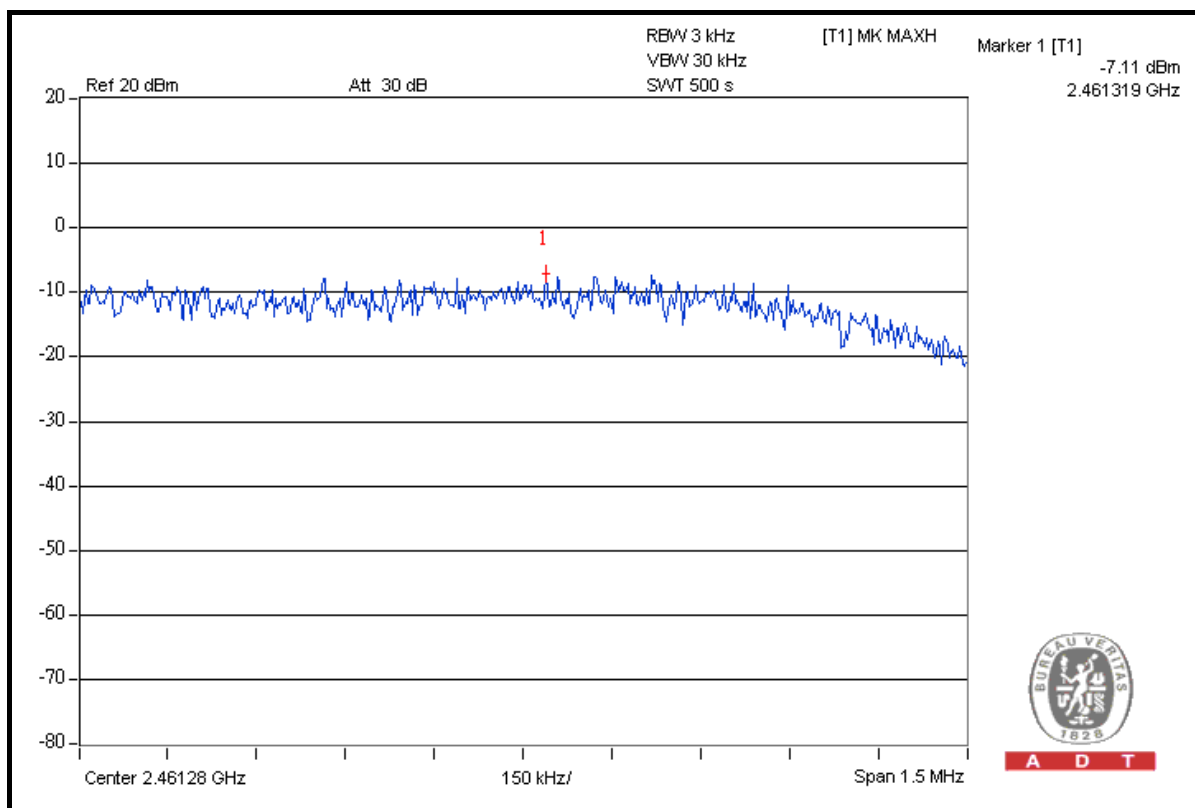


802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	27deg.C, 66%RH, 991hPa
TESTED BY	Lori Chiu		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-10.40	8	PASS
6	2437	-8.23	8	PASS
11	2462	-11.73	8	PASS


CH 1

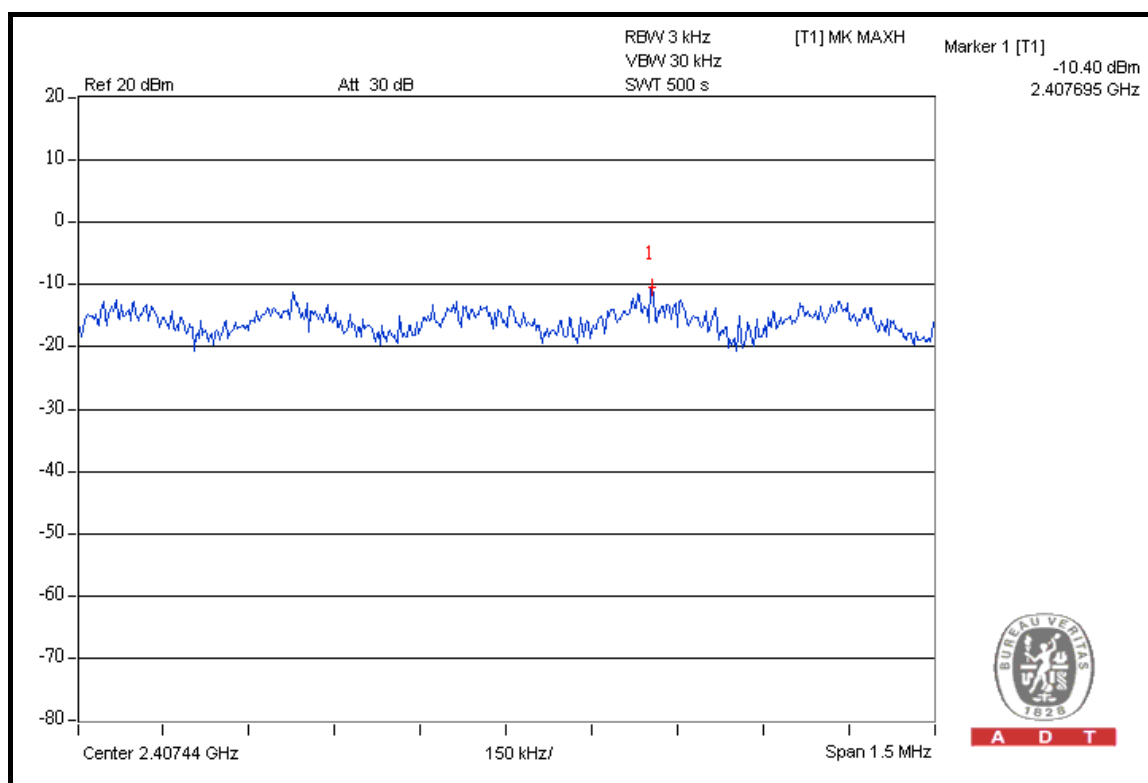




A D T

CH 6

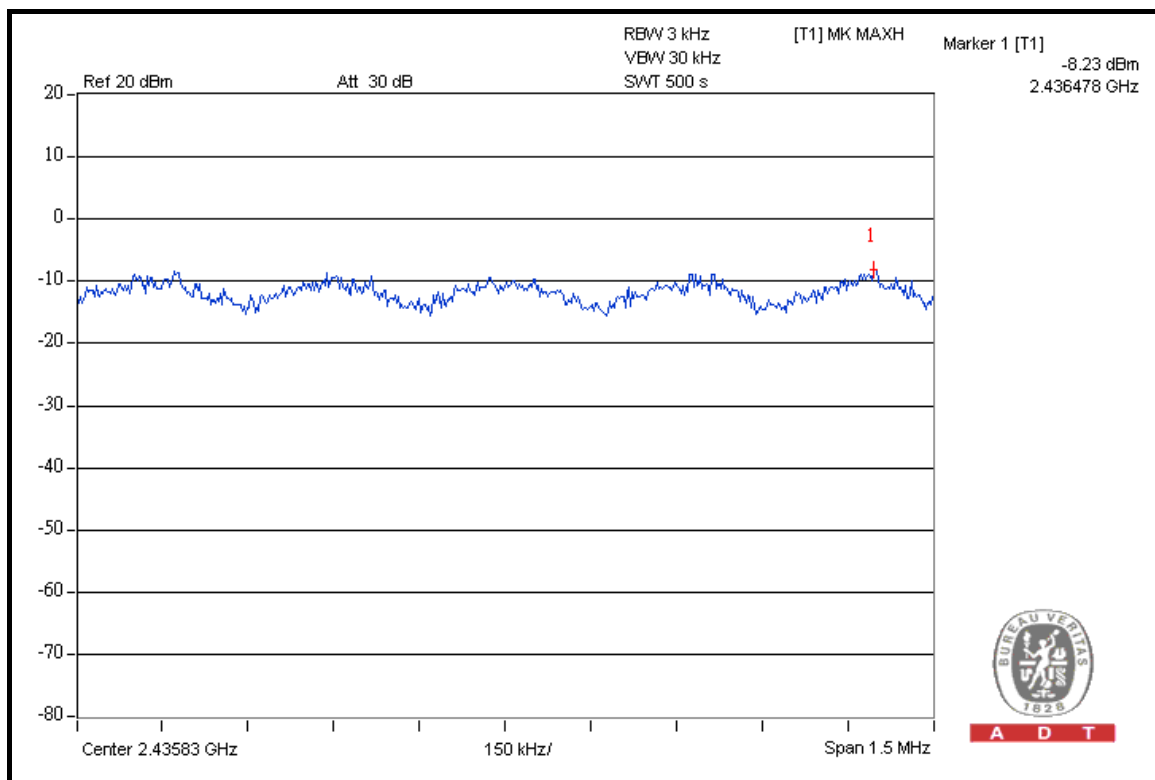

CH 11

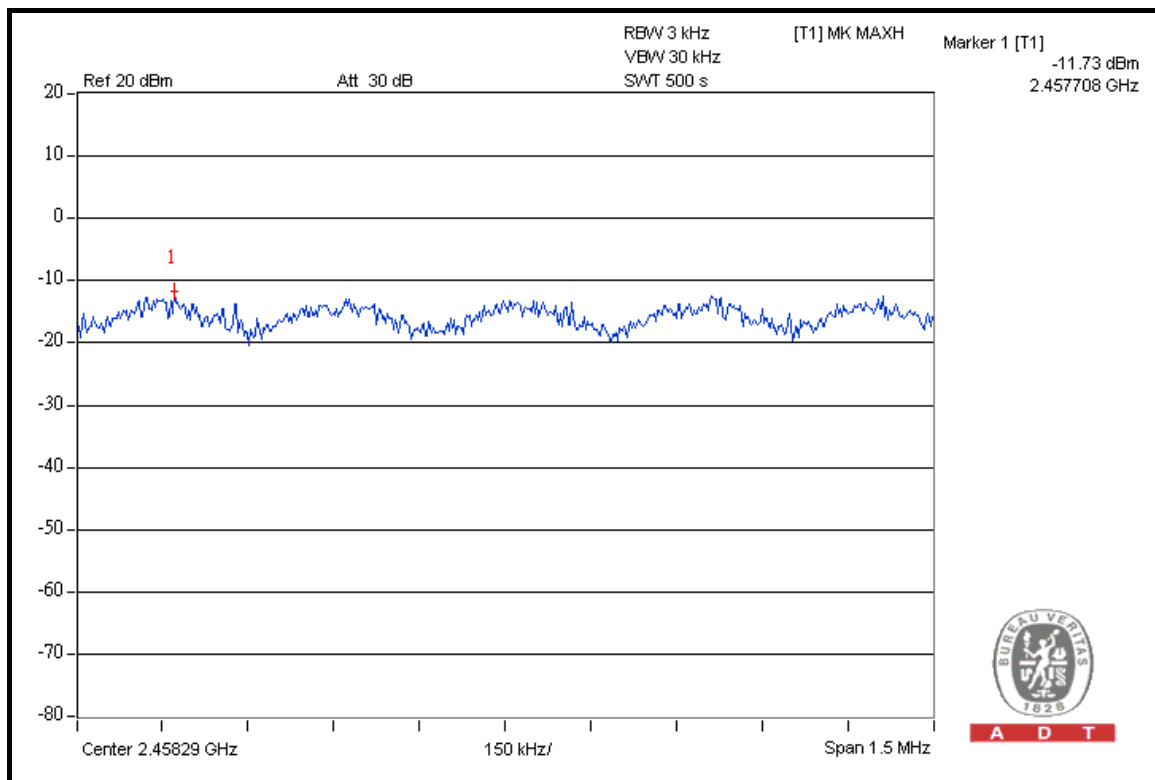


DRAFT 802.11n (20MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	27deg.C, 66%RH, 991hPa
TESTED BY	Lori Chiu		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-13.85	8	PASS
6	2437	-9.71	8	PASS
11	2462	-15.63	8	PASS


CH 1

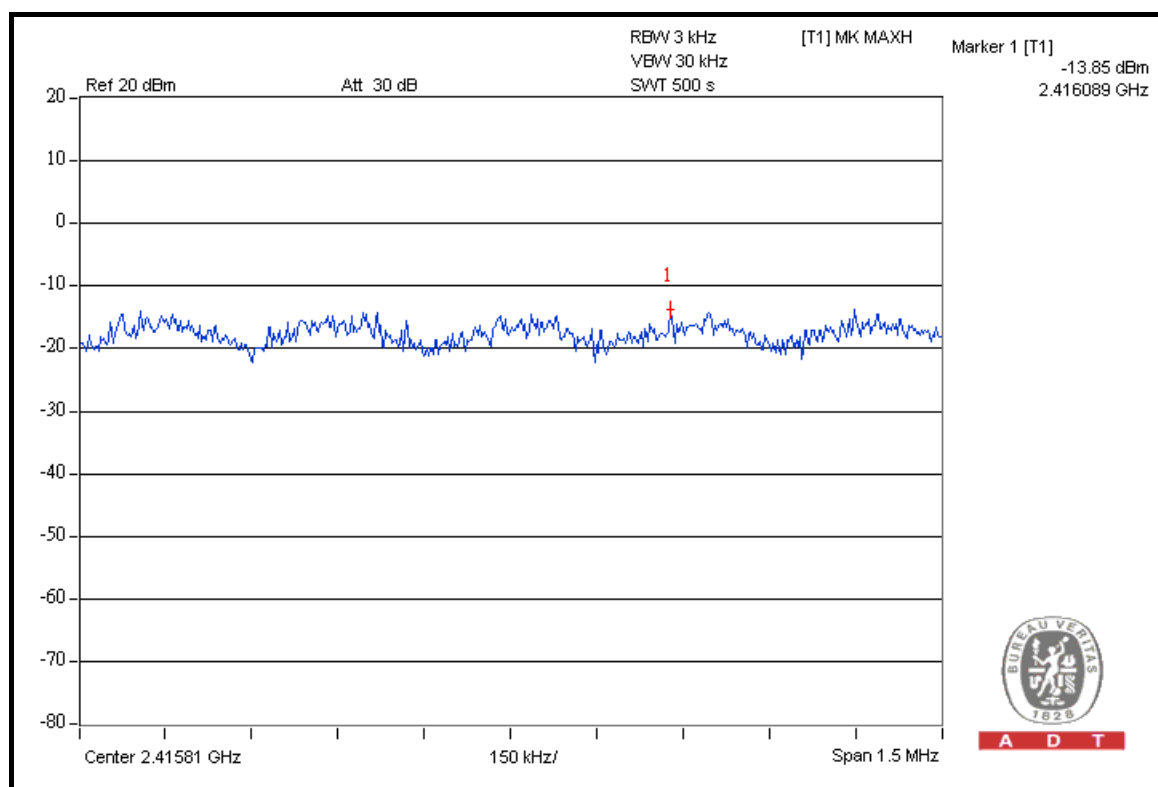




A D T

CH 6

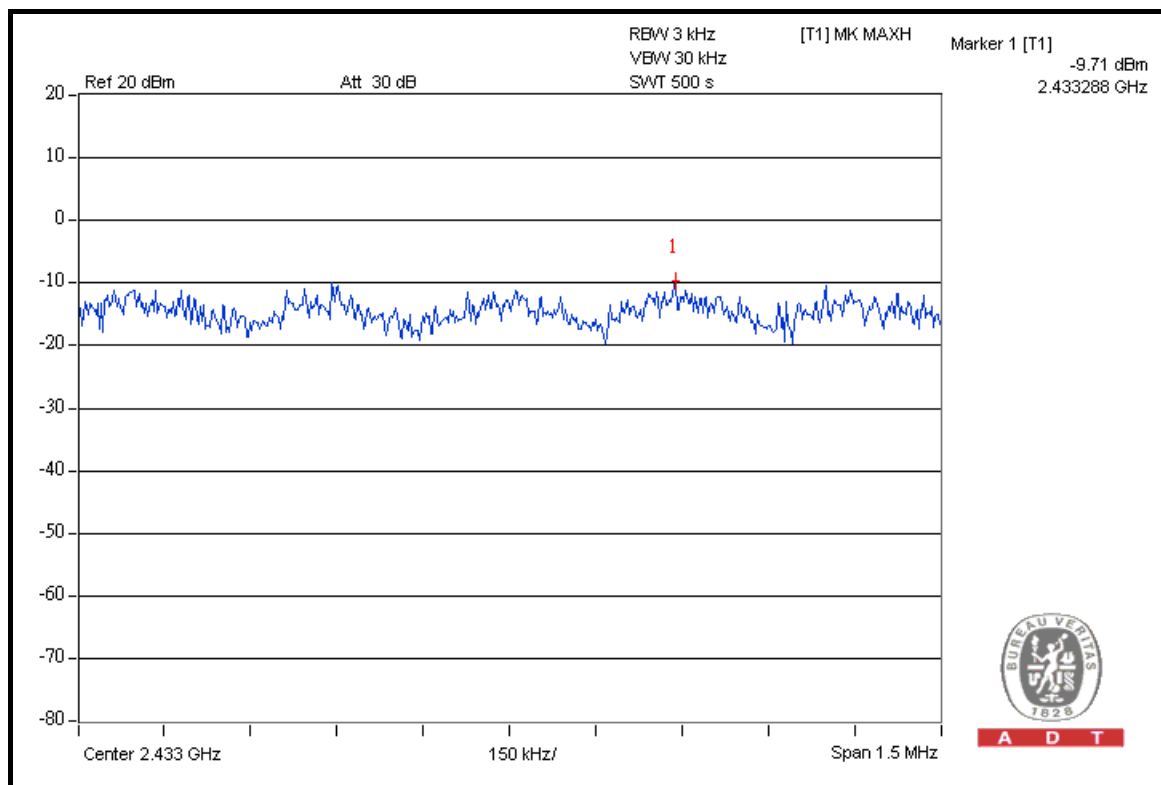

CH 11

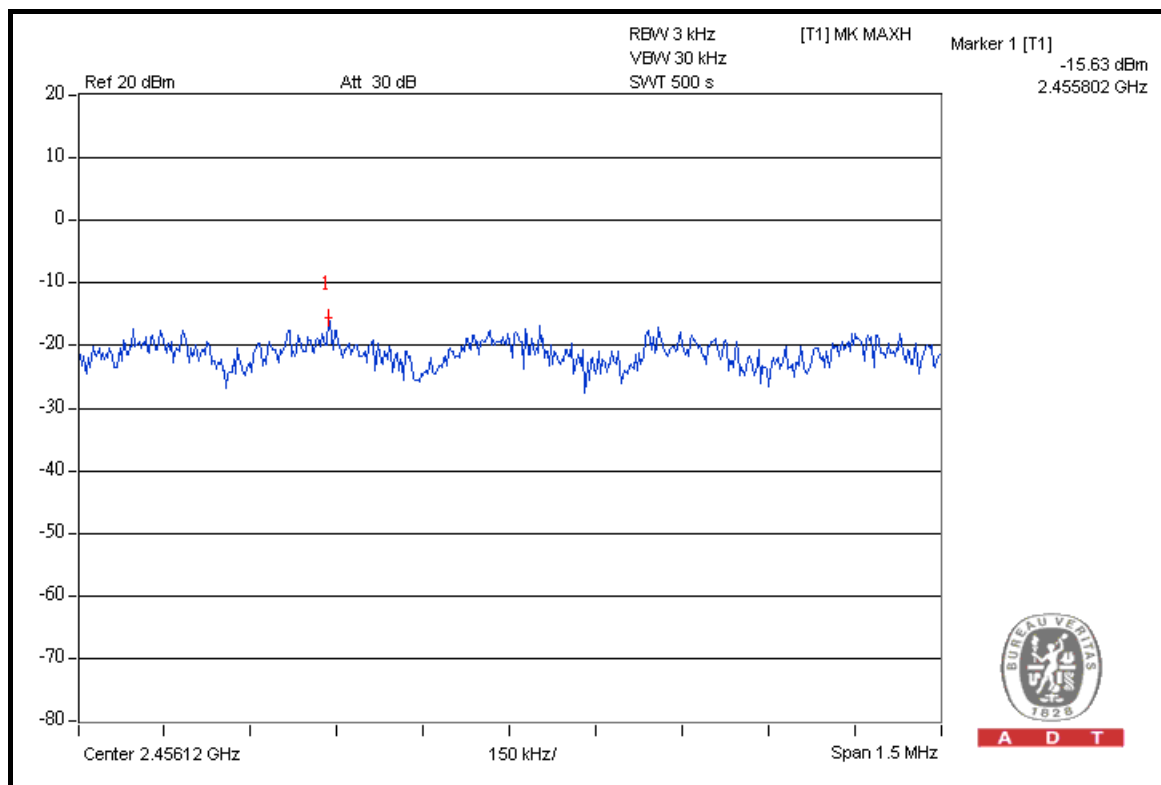


DRAFT 802.11n (40MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	13.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	27deg.C, 66%RH, 991hPa
TESTED BY	Lori Chiu		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2422	-22.46	8	PASS
4	2437	-15.82	8	PASS
7	2452	-21.41	8	PASS


CH 1

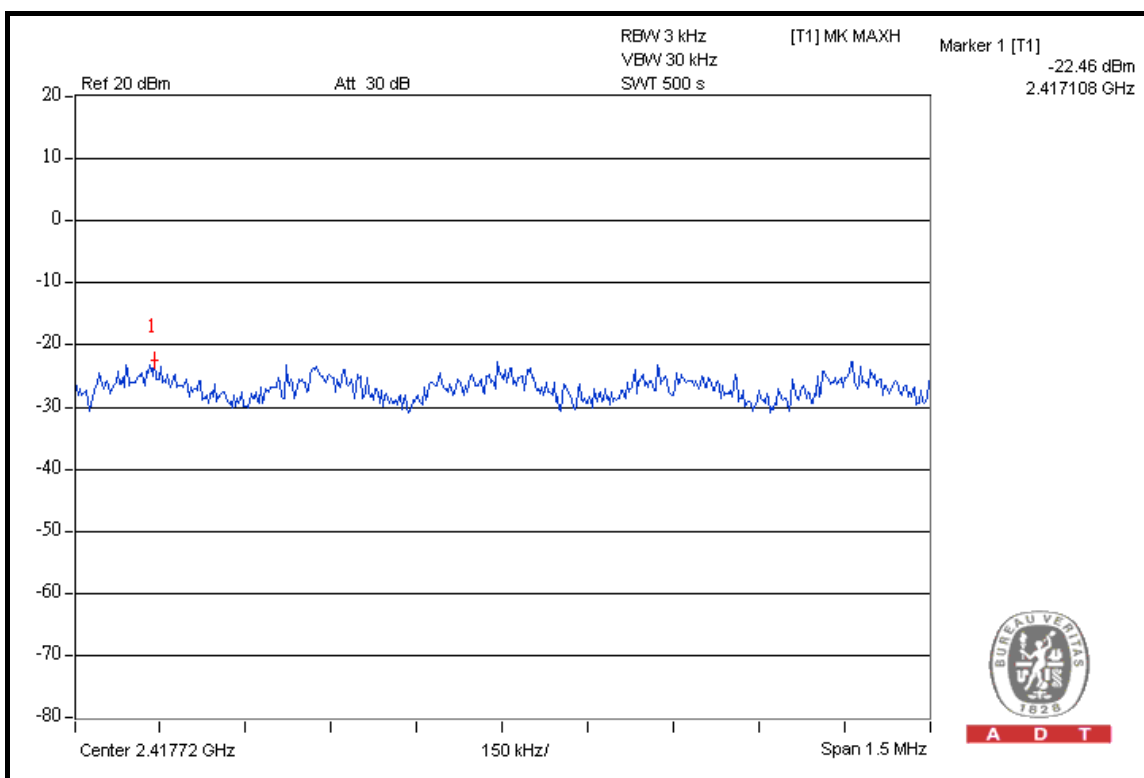




A D T

CH 4

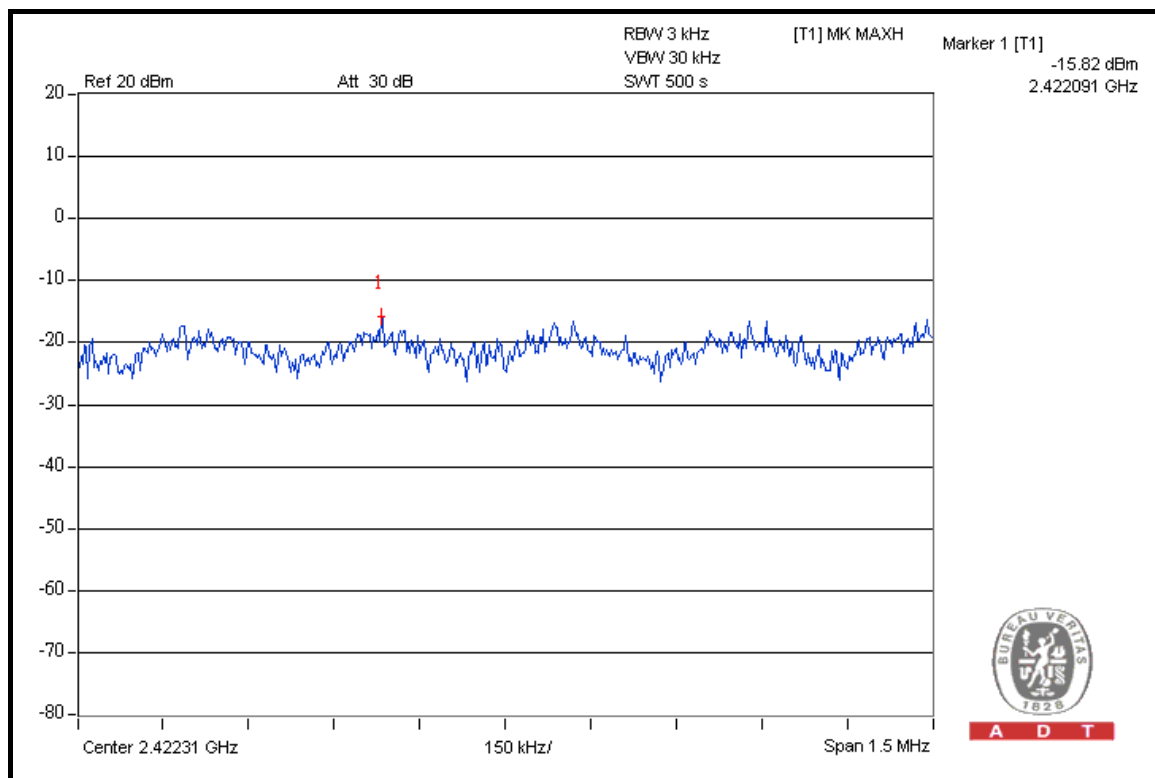

CH 7

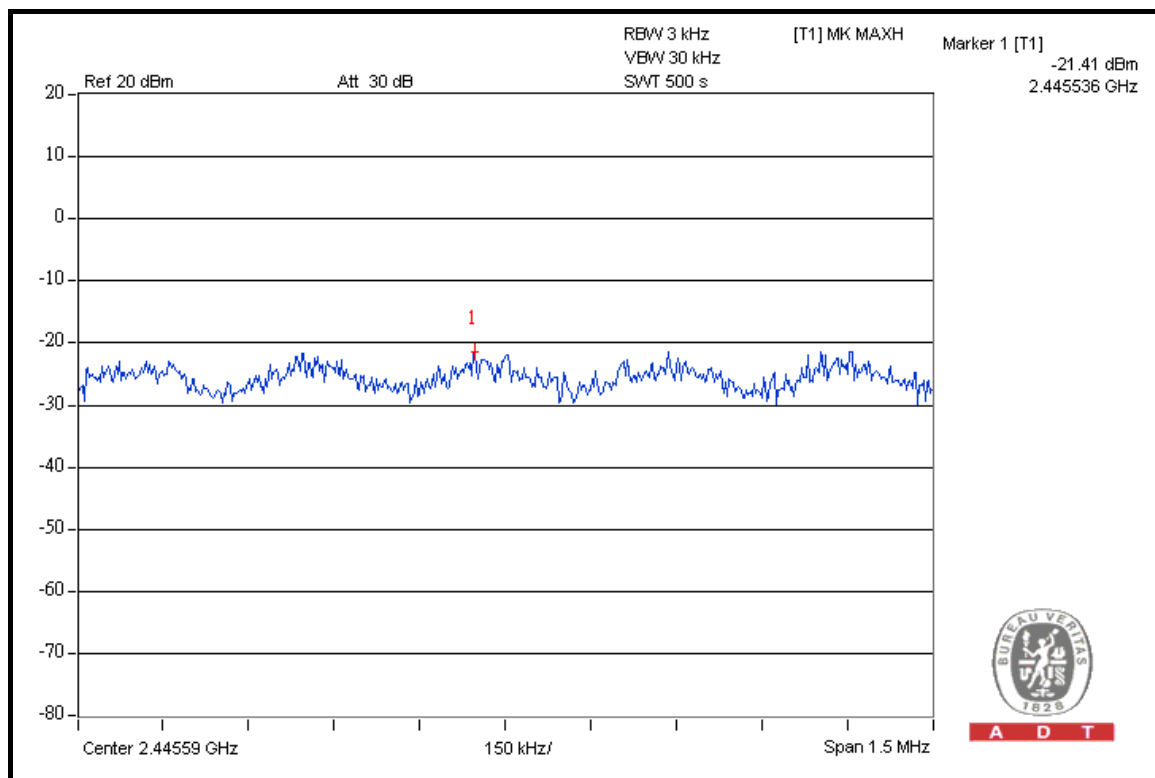

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100040	Jul. 04, 2008	Jul. 03, 2009

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100kHz and 300kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW = 100kHz, VBW = 300kHz; Average RBW = 1MHz, VBW = 10Hz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6.

4.6.6 TEST RESULTS

The spectrum plots are attached on the following 24 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION

NOTE 1: The band edge emission plot on the next page shows 54.41dBc between carrier maximum power and local maximum emission in restrict band (2.38960GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 110.05dBuV/m (Peak), so the maximum field strength in restrict band is $110.05 - 54.41 = 55.64\text{dBuV/m}$ which is under 74dBuV/m limit.


The band edge emission plot on the next page shows 57.20dBc between carrier maximum power and local maximum emission in restrict band (2.38940GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 105.24dBuV/m (Average), so the maximum field strength in restrict band is $105.24 - 57.20 = 48.04\text{dBuV/m}$ which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 53.92dBc between carrier maximum power and local maximum emission in restrict band (2.48480GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 109.74dBuV/m (Peak), so the maximum field strength in restrict band is $109.74 - 53.92 = 55.82\text{dBuV/m}$ which is under 74dBuV/m limit.


The band edge emission plot on the next third page shows 55.08dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 104.89dBuV/m (Average), so the maximum field strength in restrict band is $104.89 - 55.08 = 49.81\text{dBuV/m}$ which is under 54dBuV/m limit.



A D T

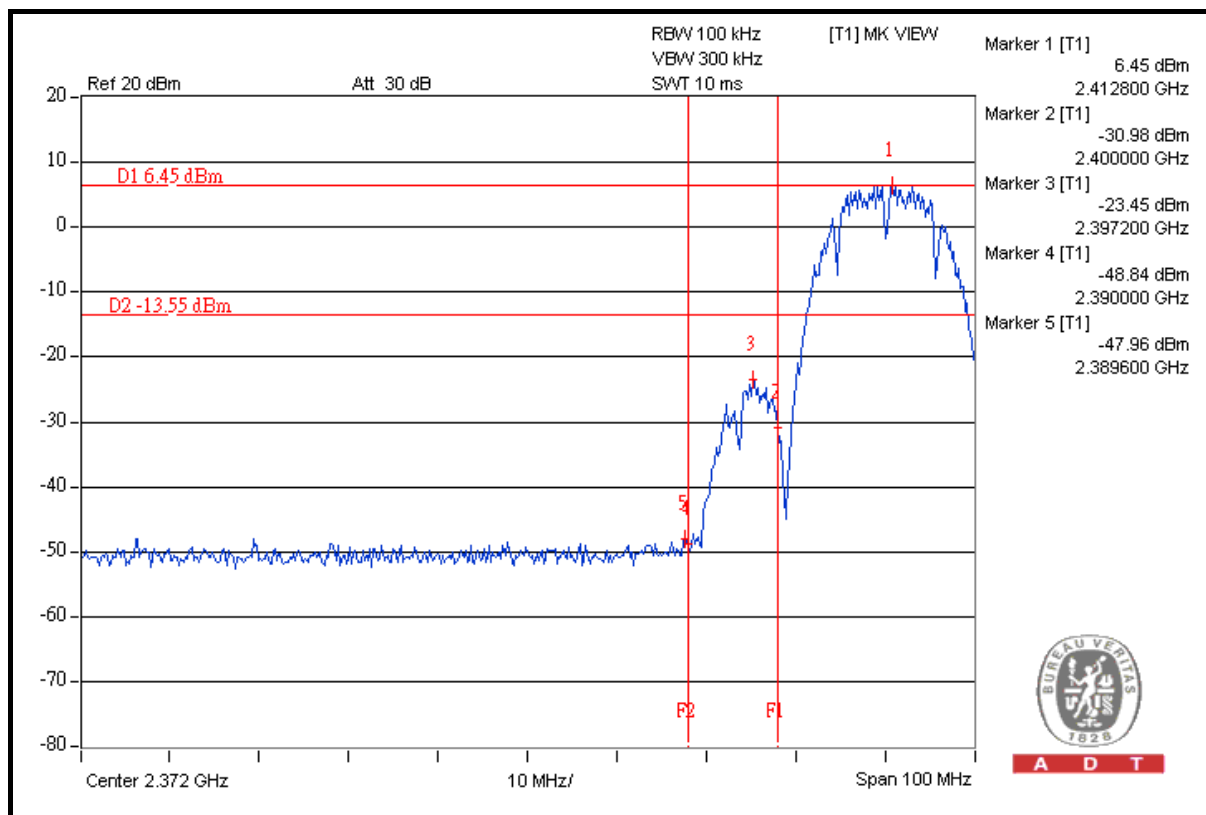


A D T

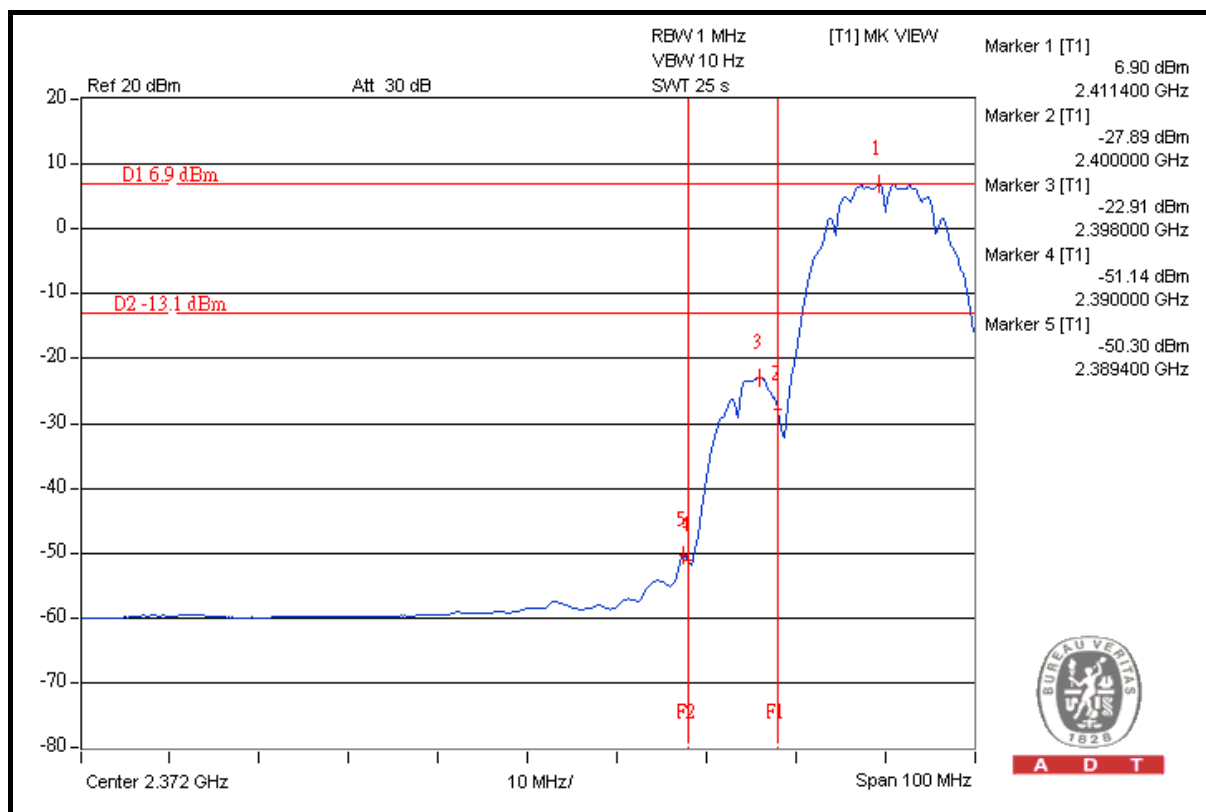


A D T



A D T

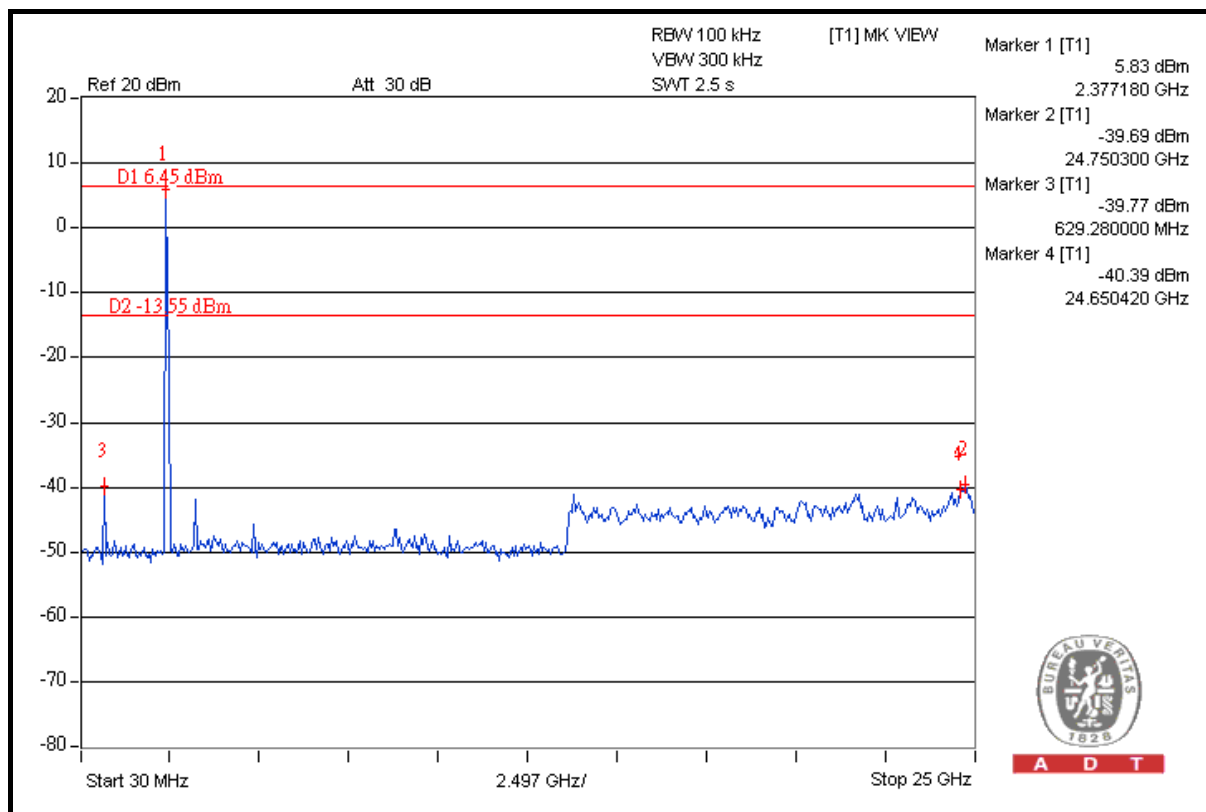



A D T

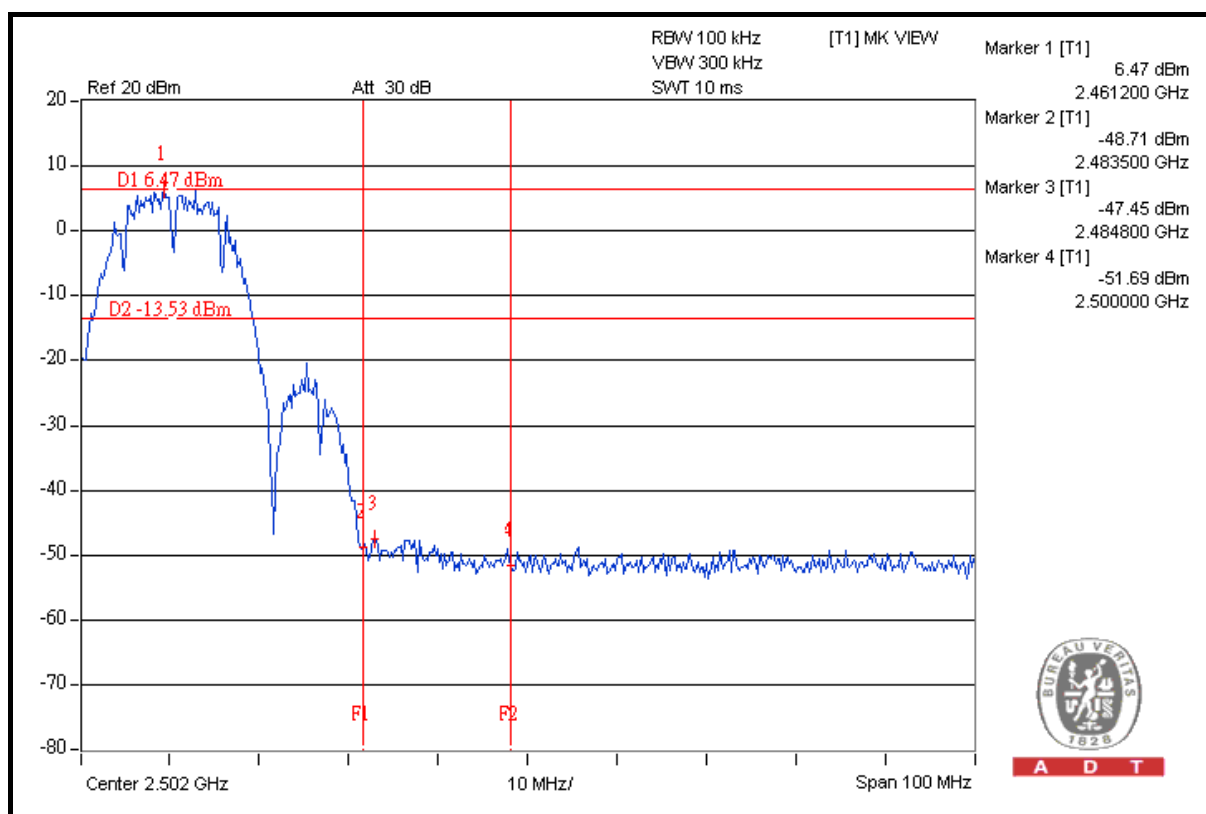

A D T



A D T

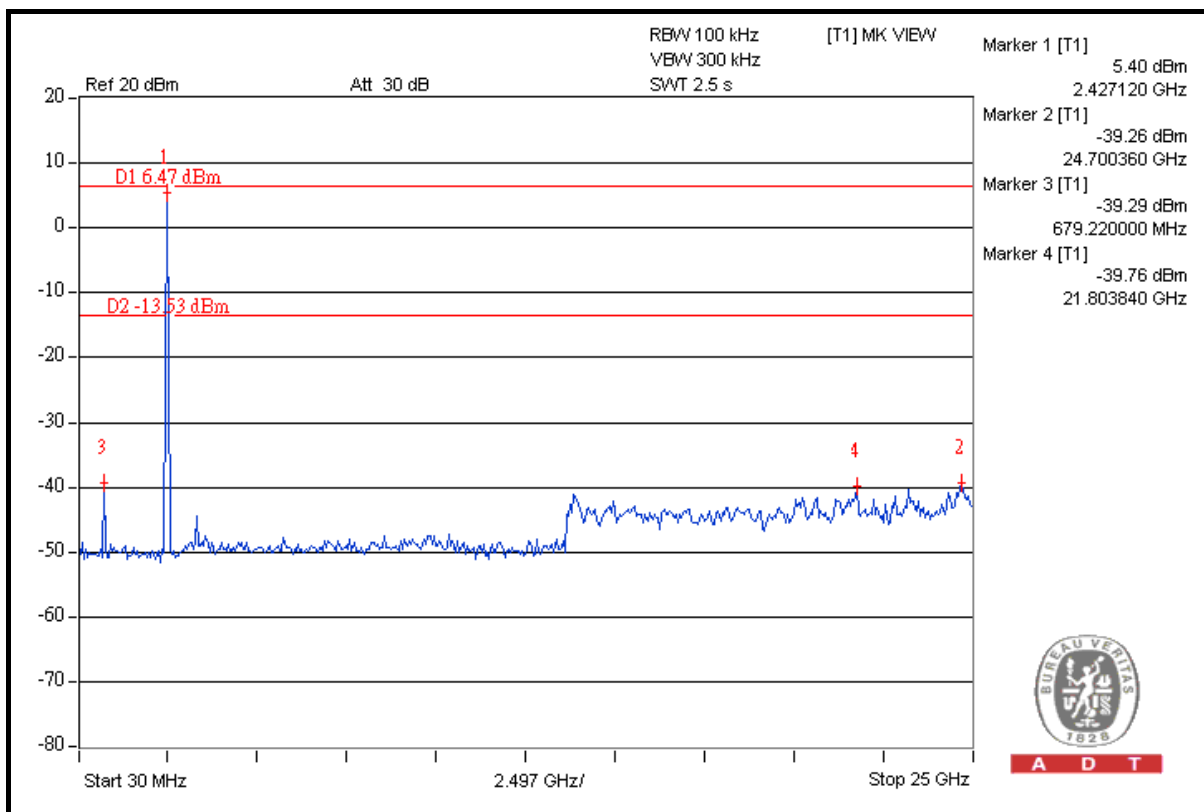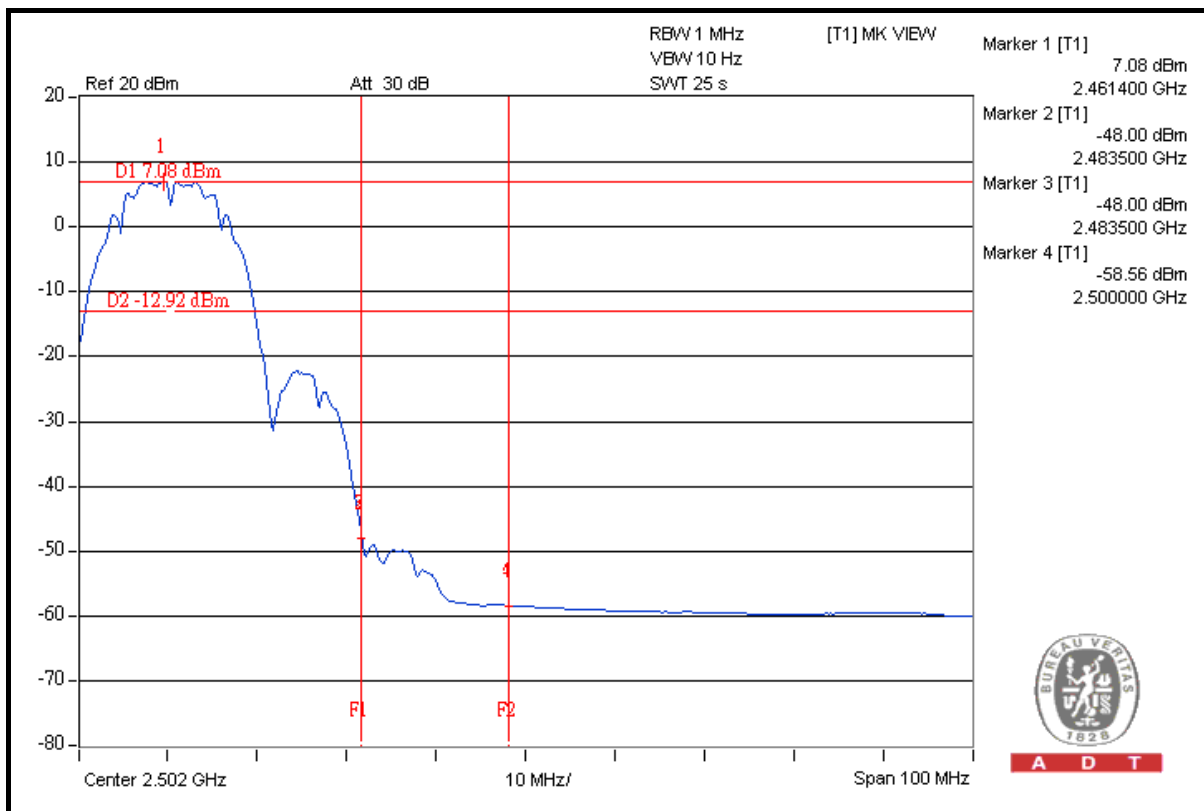

802.11g OFDM MODULATION

NOTE 1: The band edge emission plot on the next page shows 47.70dBc between carrier maximum power and local maximum emission in restrict band (2.38980GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 109.82dBuV/m (Peak), so the maximum field strength in restrict band is $109.82 - 47.70 = 62.12\text{dBuV/m}$ which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 50.11dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 98.70dBuV/m (Average), so the maximum field strength in restrict band is $98.70 - 50.11 = 48.59\text{dBuV/m}$ which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 44.66dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 107.75dBuV/m (Peak), so the maximum field strength in restrict band is $107.75 - 44.66 = 63.09\text{dBuV/m}$ which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 46.32dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 96.23dBuV/m (Average), so the maximum field strength in restrict band is $96.23 - 46.32 = 49.91\text{dBuV/m}$ which is under 54dBuV/m limit.





A D T

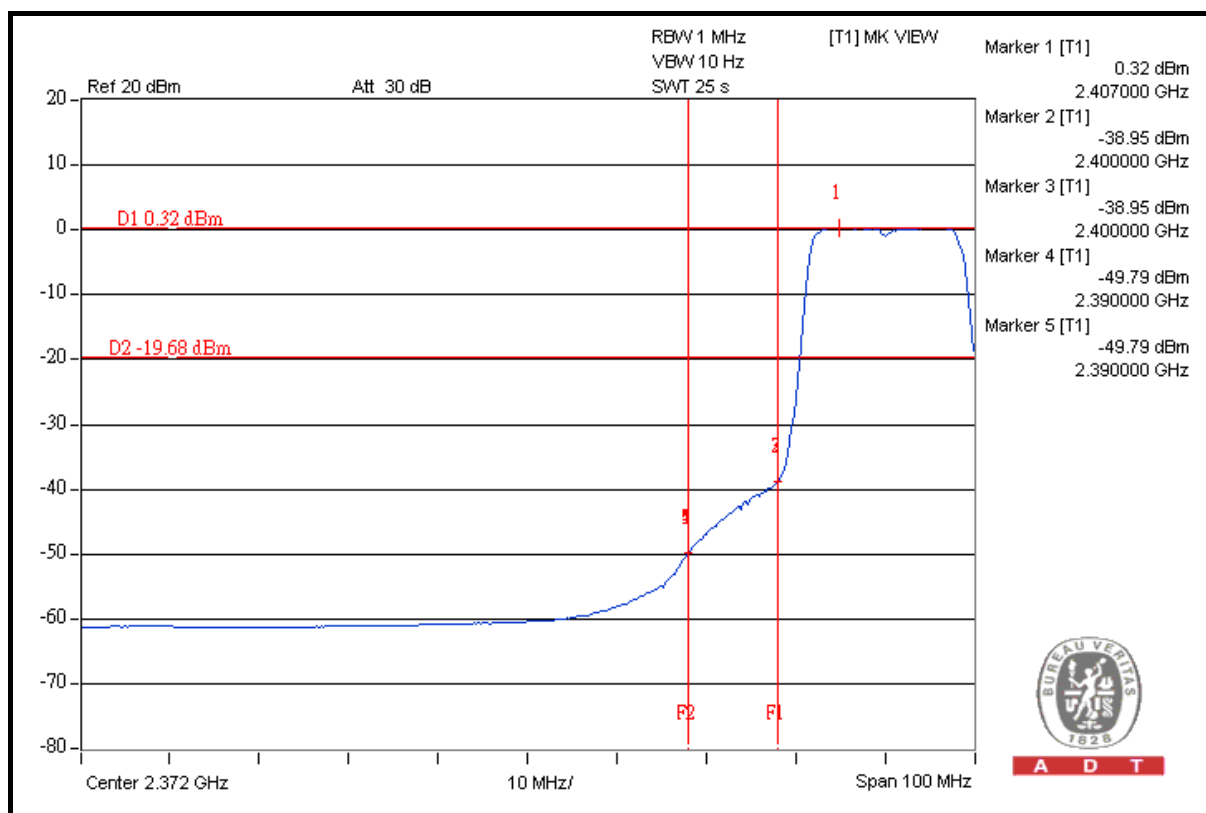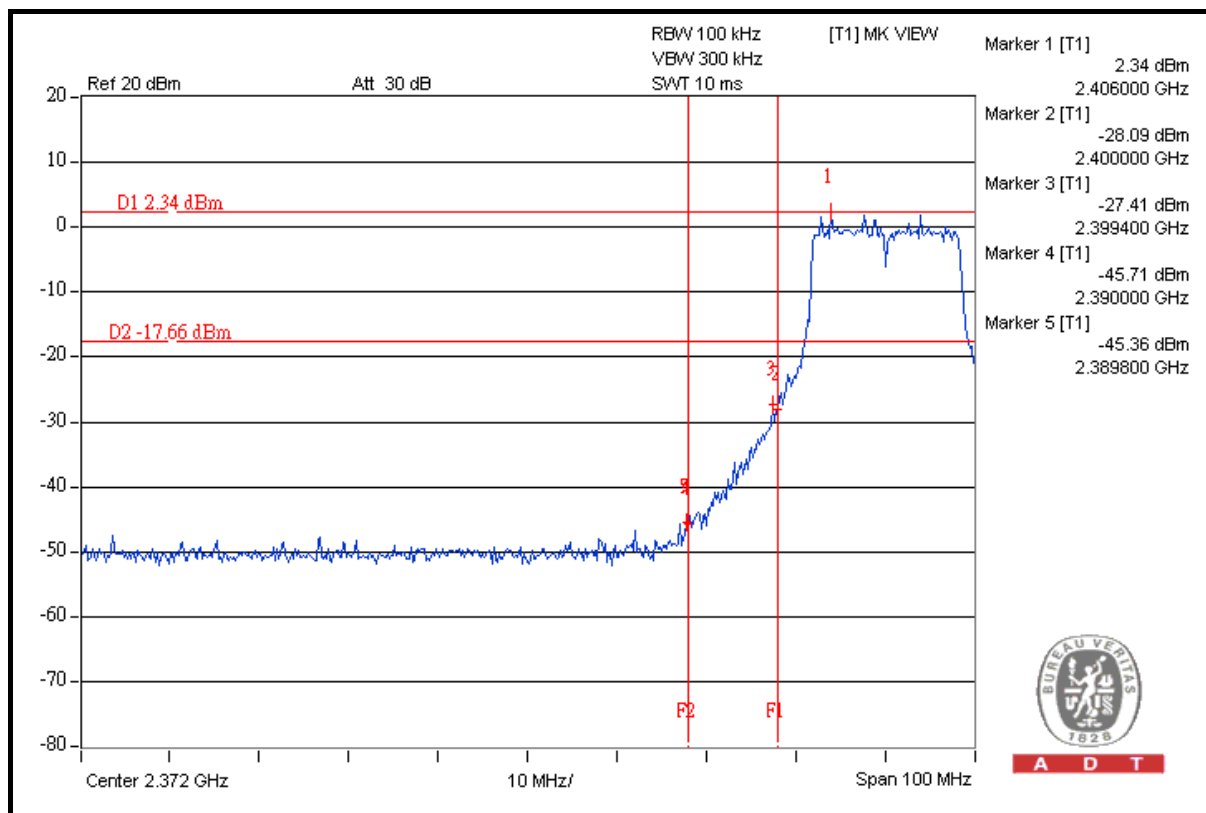





A D T

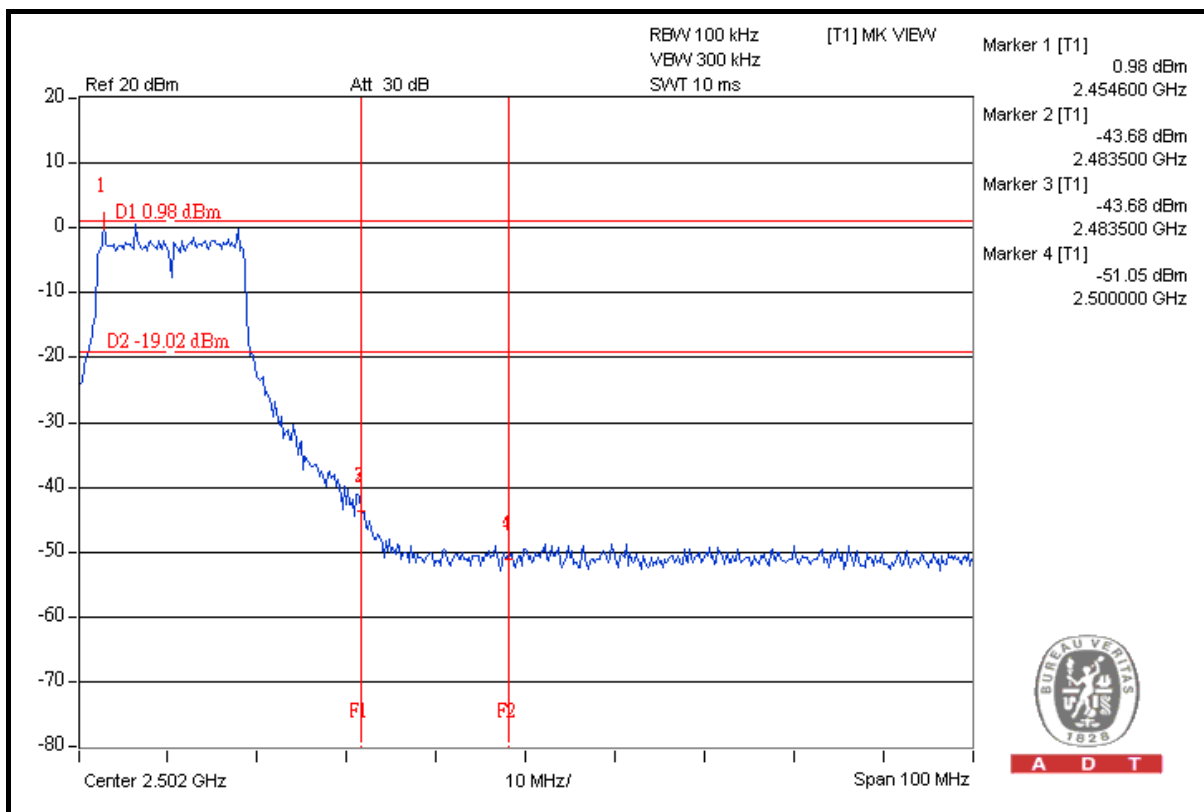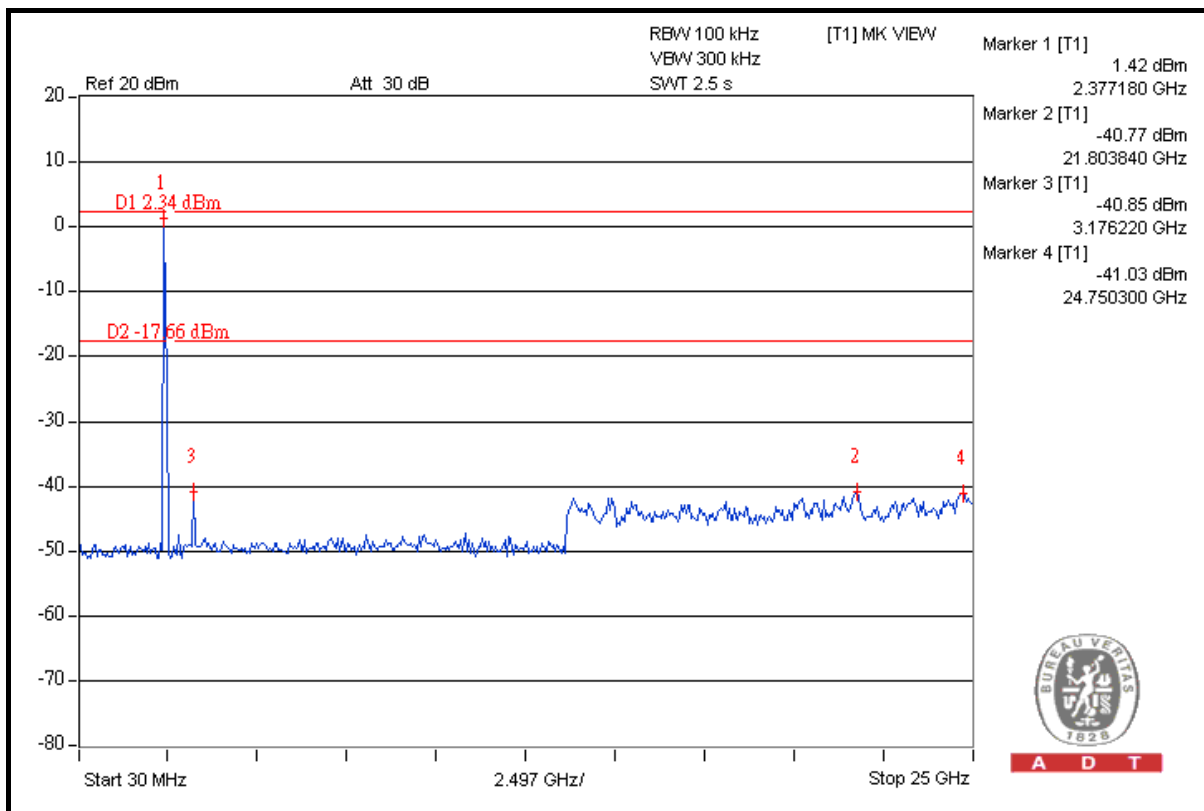



A D T

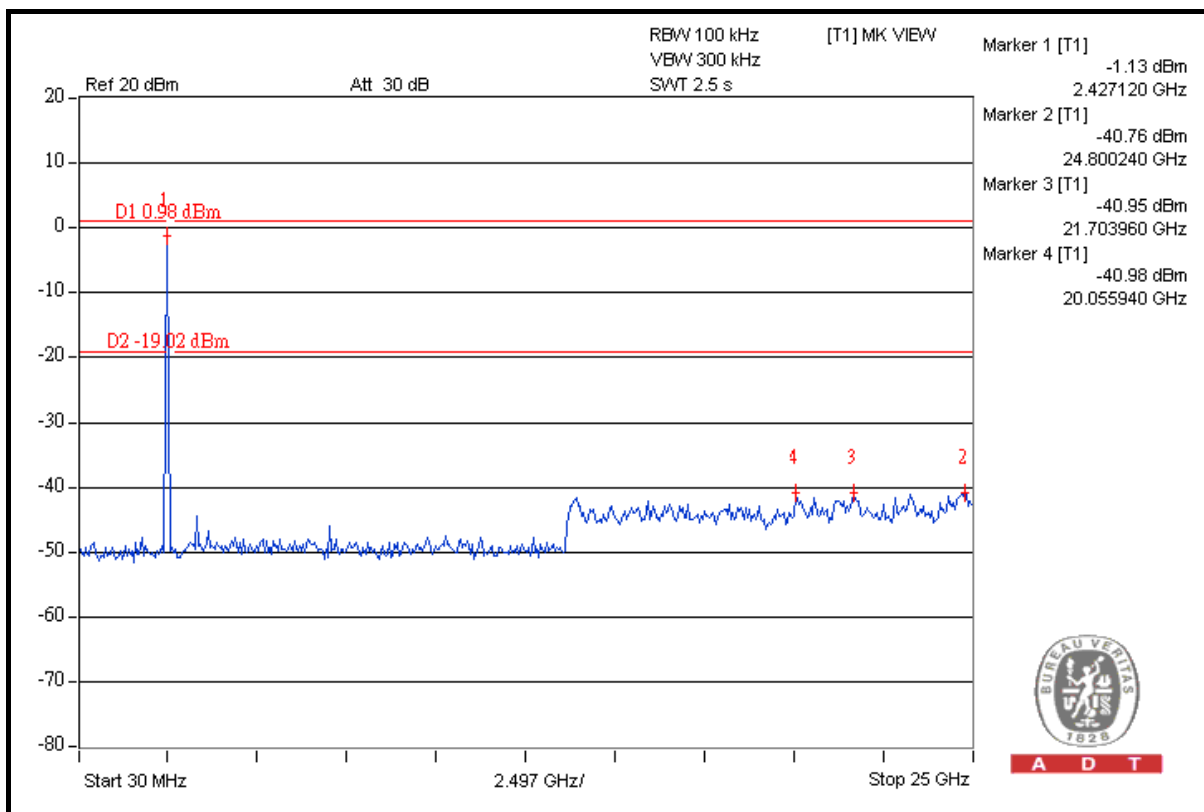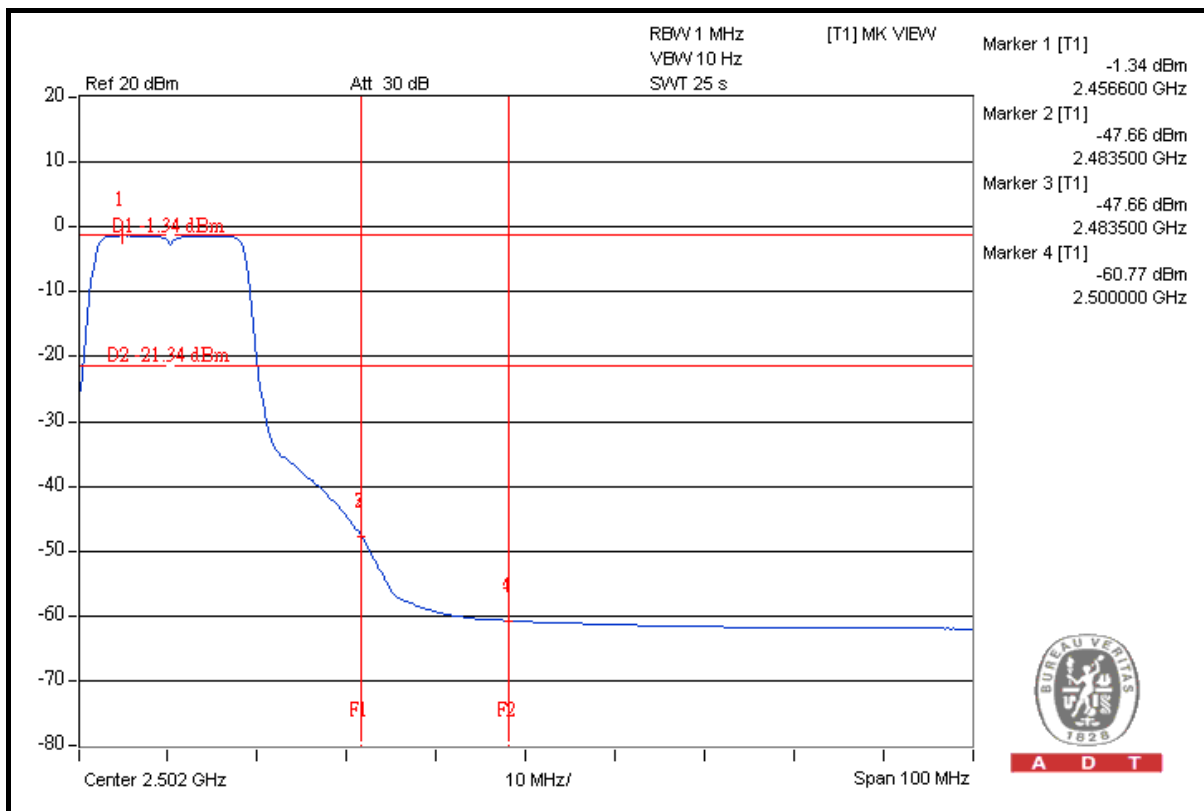

DRAFT 802.11n (20MHz) OFDM MODULATION

NOTE 1: The band edge emission plot on the next page shows 38.85dBc between carrier maximum power and local maximum emission in restrict band (2.38880GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 108.58dBuV/m (Peak), so the maximum field strength in restrict band is $108.58 - 38.85 = 69.73\text{dBuV/m}$ which is under 74dBuV/m limit.


The band edge emission plot on the next page shows 49.58dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 97.53dBuV/m (Average), so the maximum field strength in restrict band is $97.53 - 49.58 = 47.95\text{dBuV/m}$ which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 35.54dBc between carrier maximum power and local maximum emission in restrict band (2.48400GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 106.74dBuV/m (Peak), so the maximum field strength in restrict band is $106.74 - 35.54 = 71.20\text{dBuV/m}$ which is under 74dBuV/m limit.


The band edge emission plot on the next third page shows 44.02dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 95.68dBuV/m (Average), so the maximum field strength in restrict band is $95.68 - 44.02 = 51.66\text{dBuV/m}$ which is under 54dBuV/m limit.



A D T

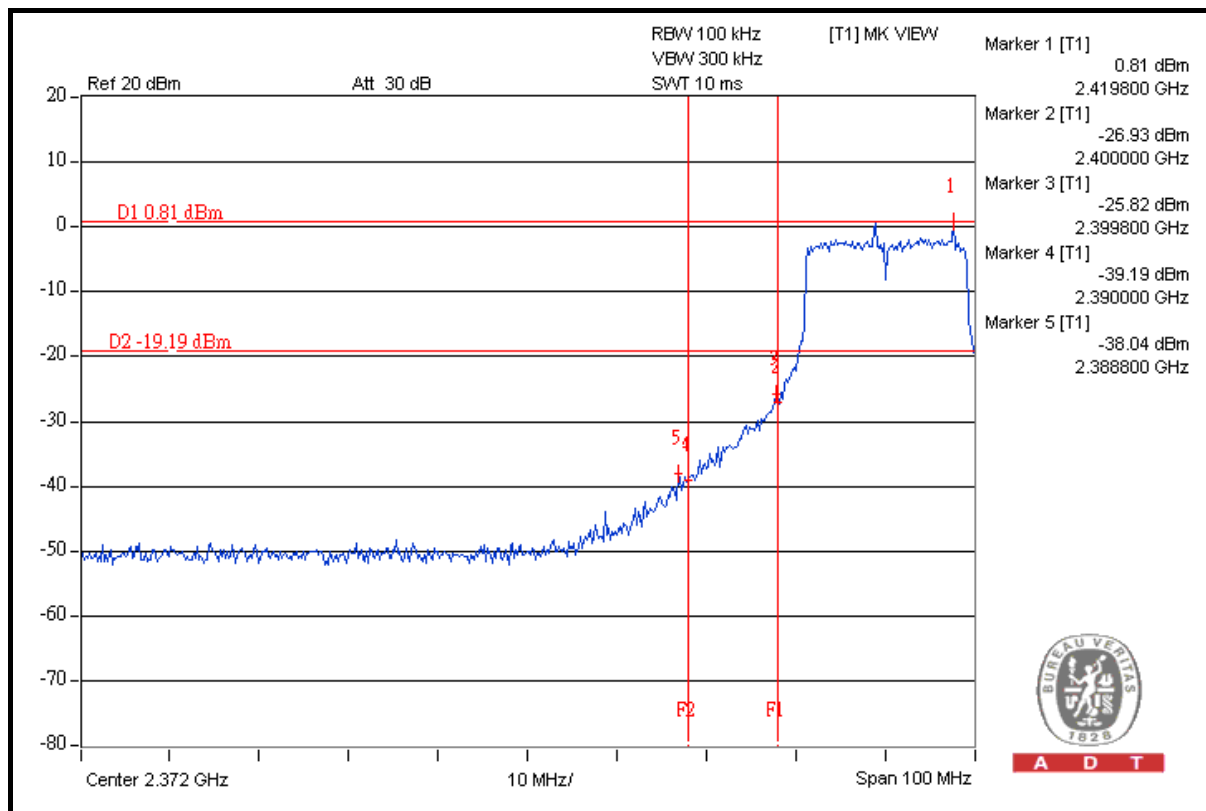



A D T

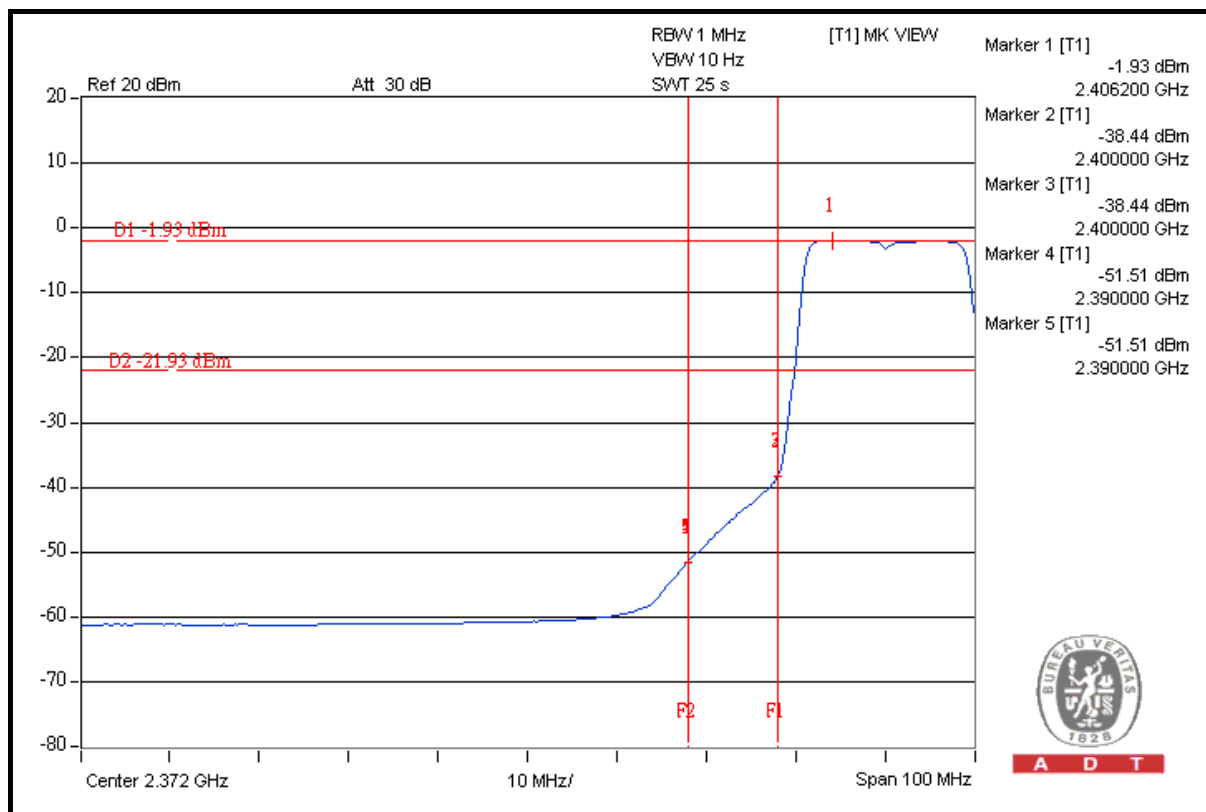

A D T




A D T

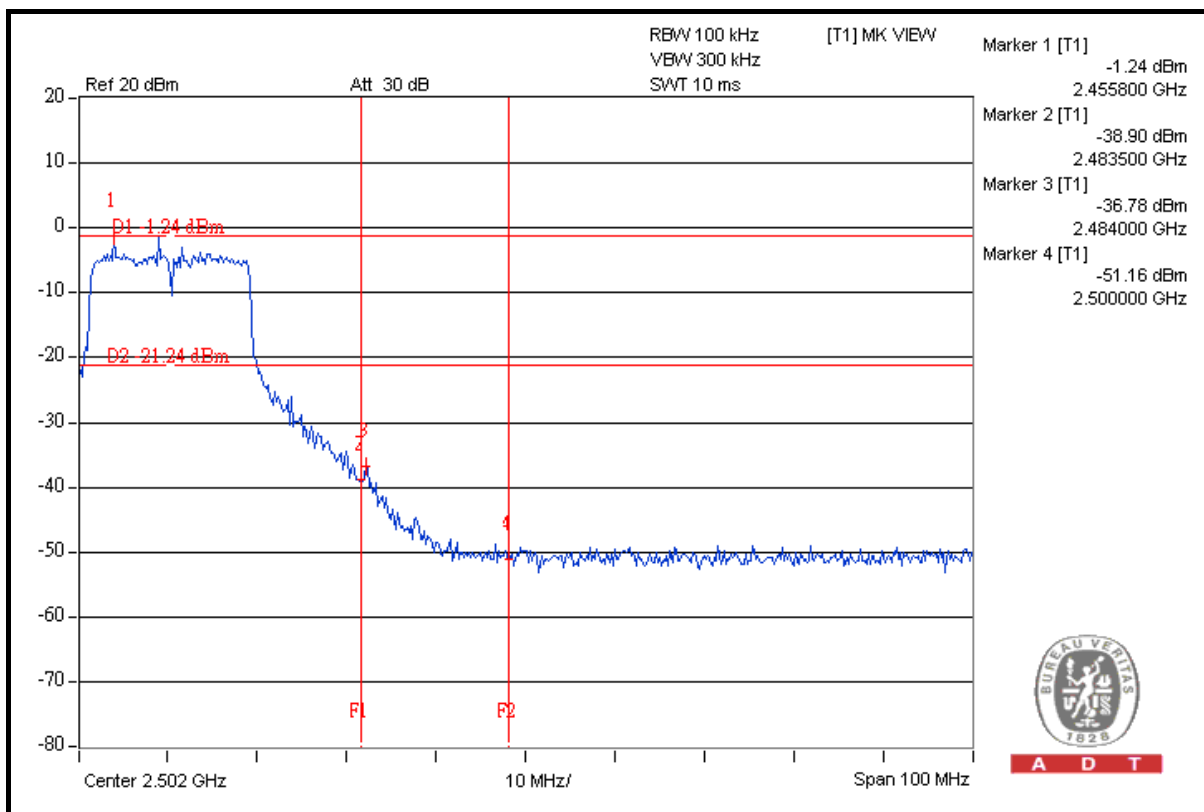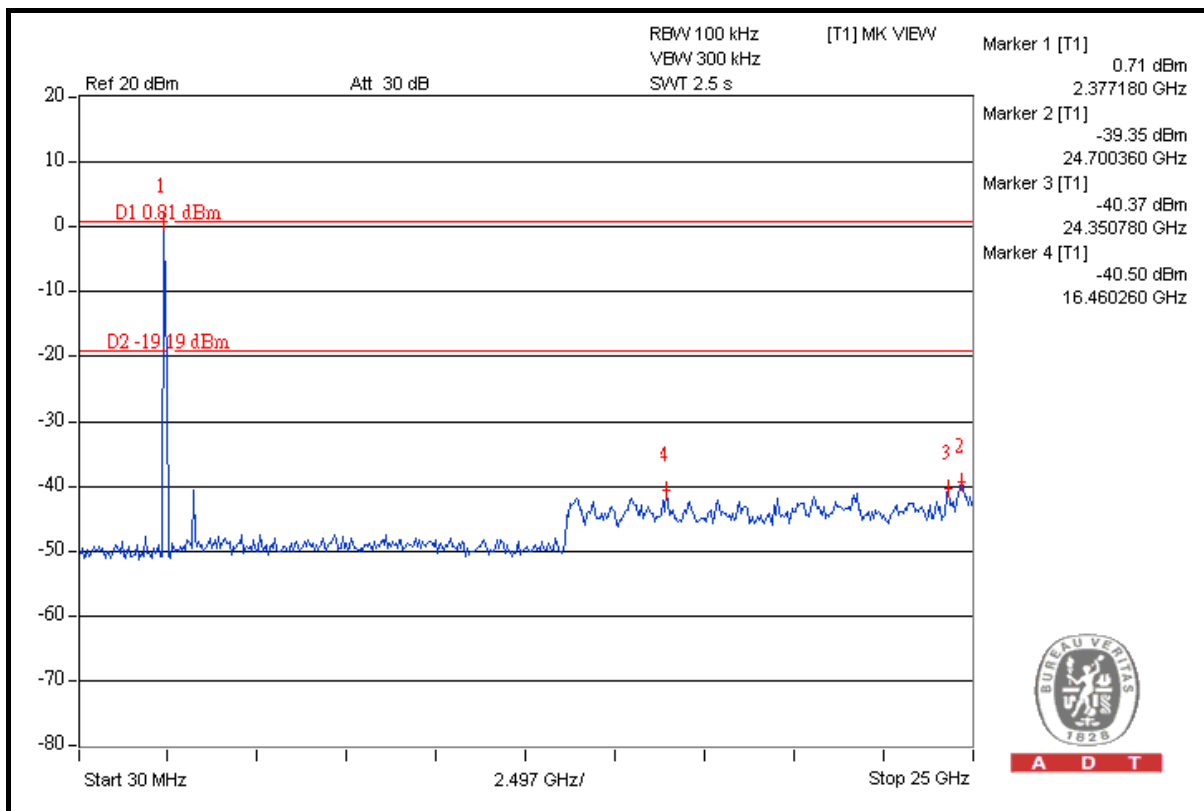




A D T

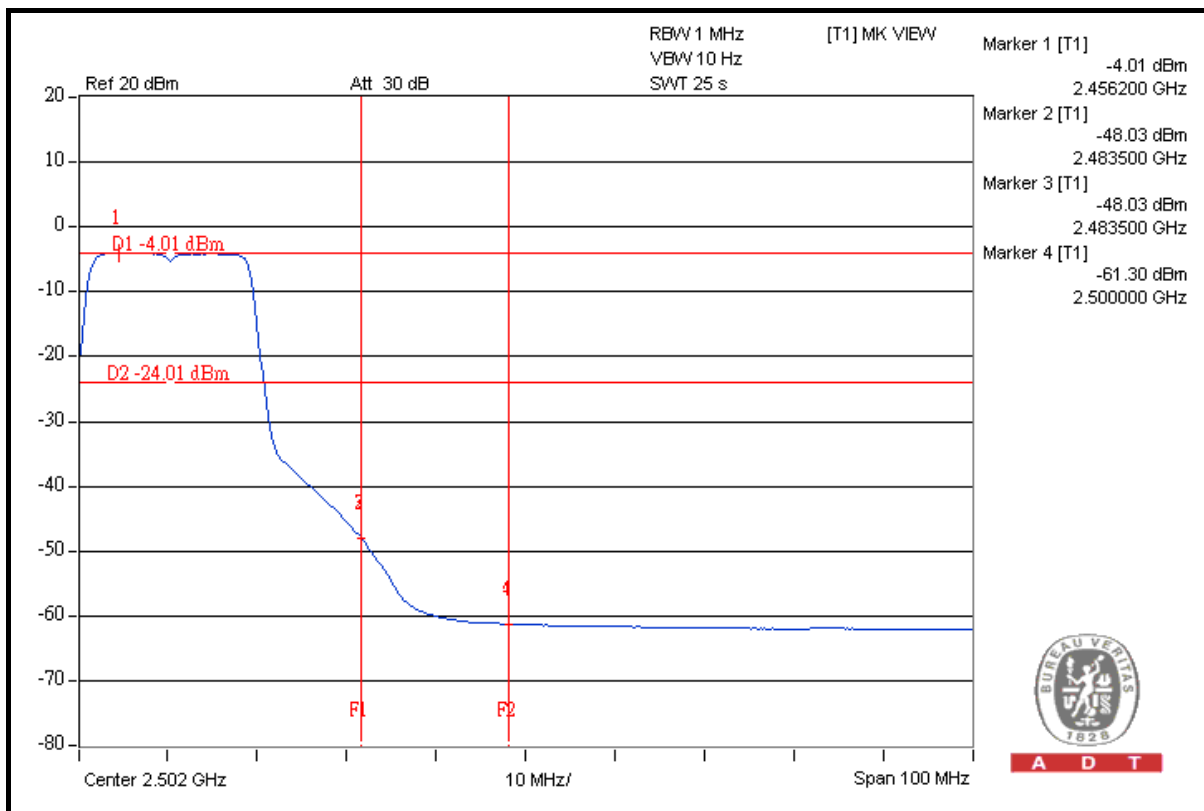

A D T

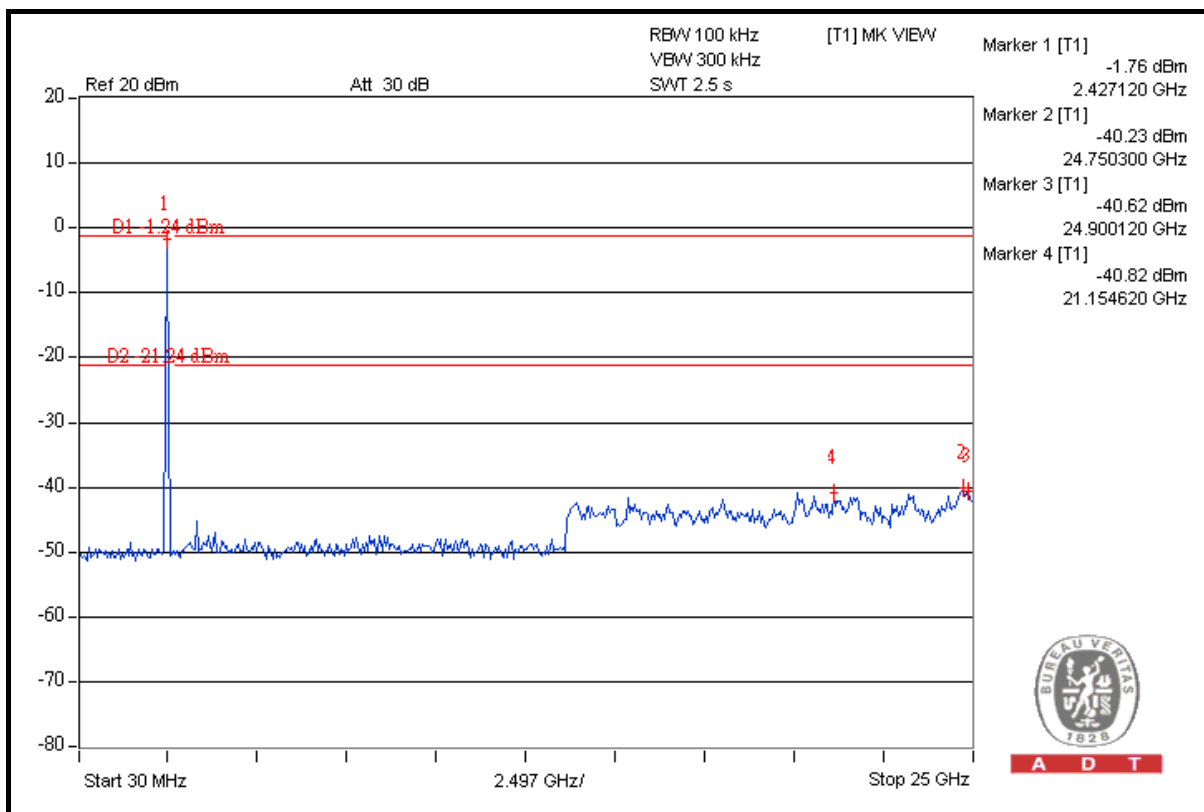

A D T

DRAFT 802.11n (40MHz) OFDM MODULATION

NOTE 1: The band edge emission plot on the next page shows 36.66dBc between carrier maximum power and local maximum emission in restrict band (2.38840GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 99.73dBuV/m (Peak), so the maximum field strength in restrict band is $99.73 - 36.66 = 63.07$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 37.73dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 88.84dBuV/m (Average), so the maximum field strength in restrict band is $88.84 - 37.73 = 51.11$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 36.59dBc between carrier maximum power and local maximum emission in restrict band (2.48360GHz). The emission of carrier strength list in the test result of channel 7 at the item 4.1.7 is 99.81dBuV/m (Peak), so the maximum field strength in restrict band is $99.81 - 36.59 = 63.22$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 36.17dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 7 at the item 4.1.7 is 88.90dBuV/m (Average), so the maximum field strength in restrict band is $88.90 - 36.17 = 52.73$ dBuV/m which is under 54dBuV/m limit.




A D T

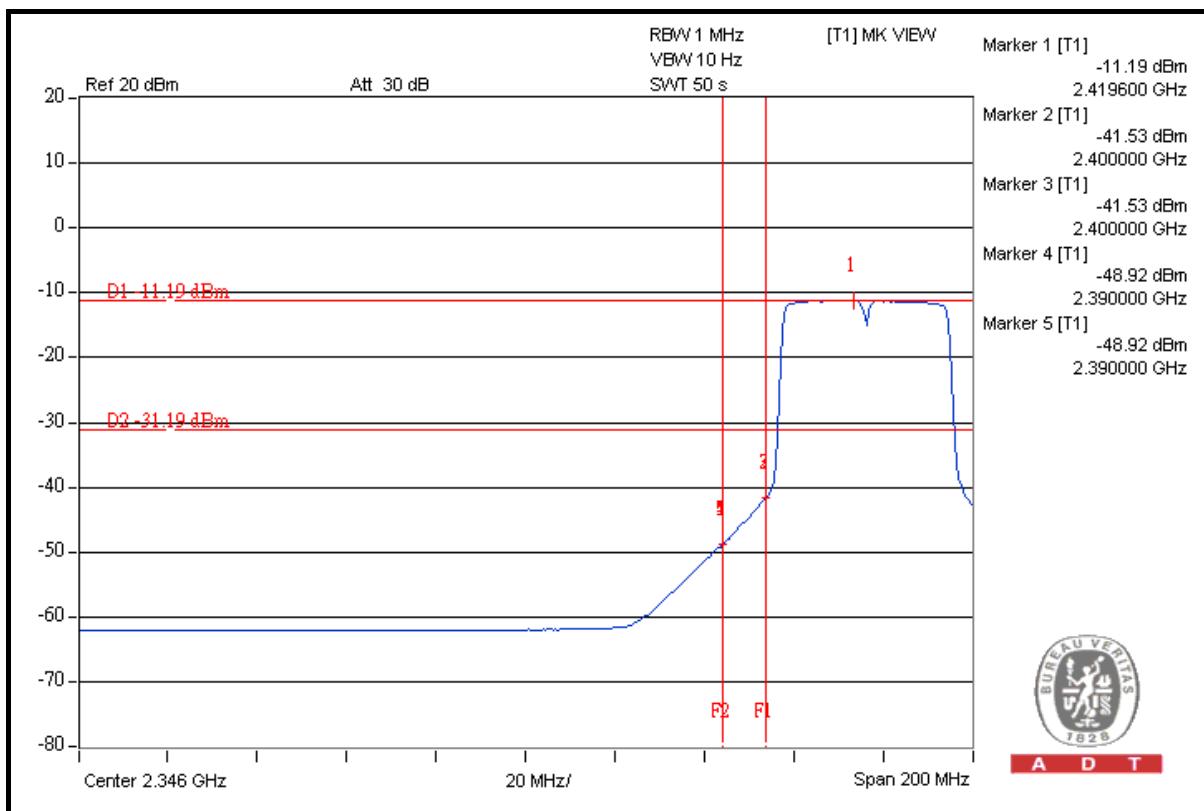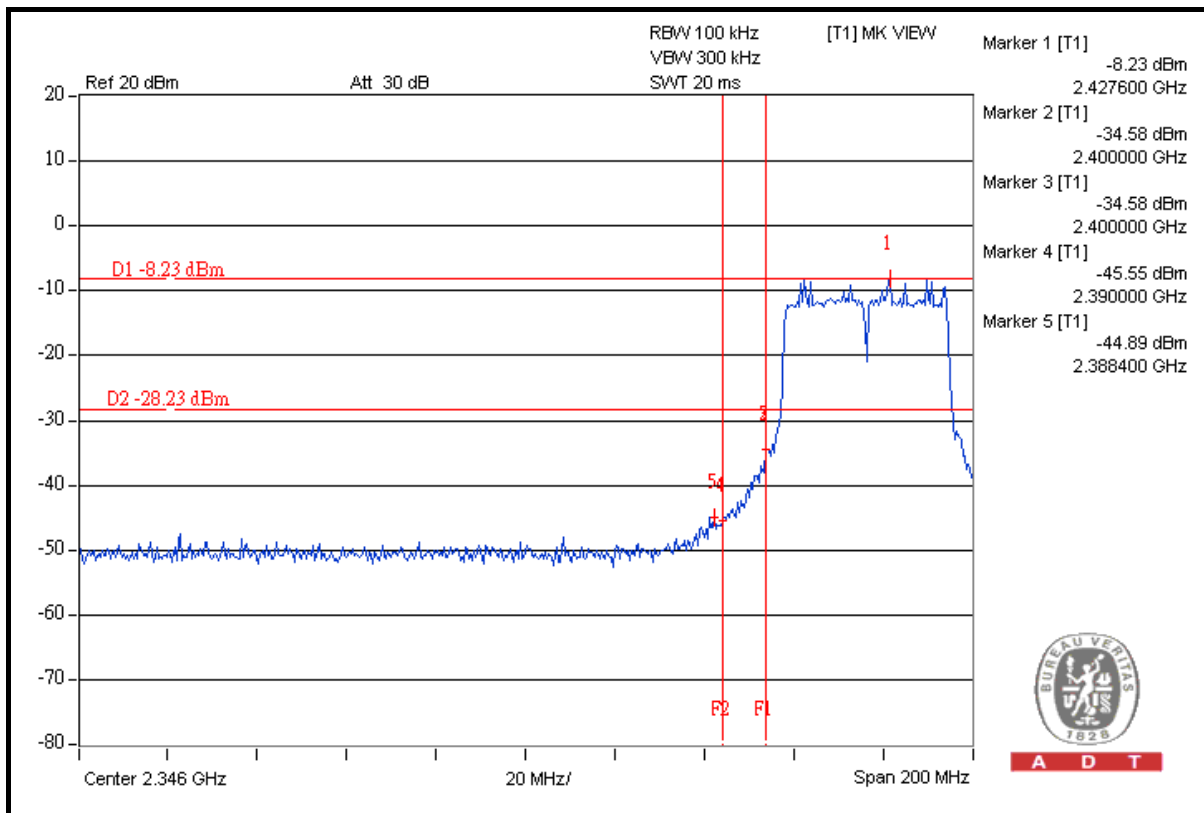




A D T

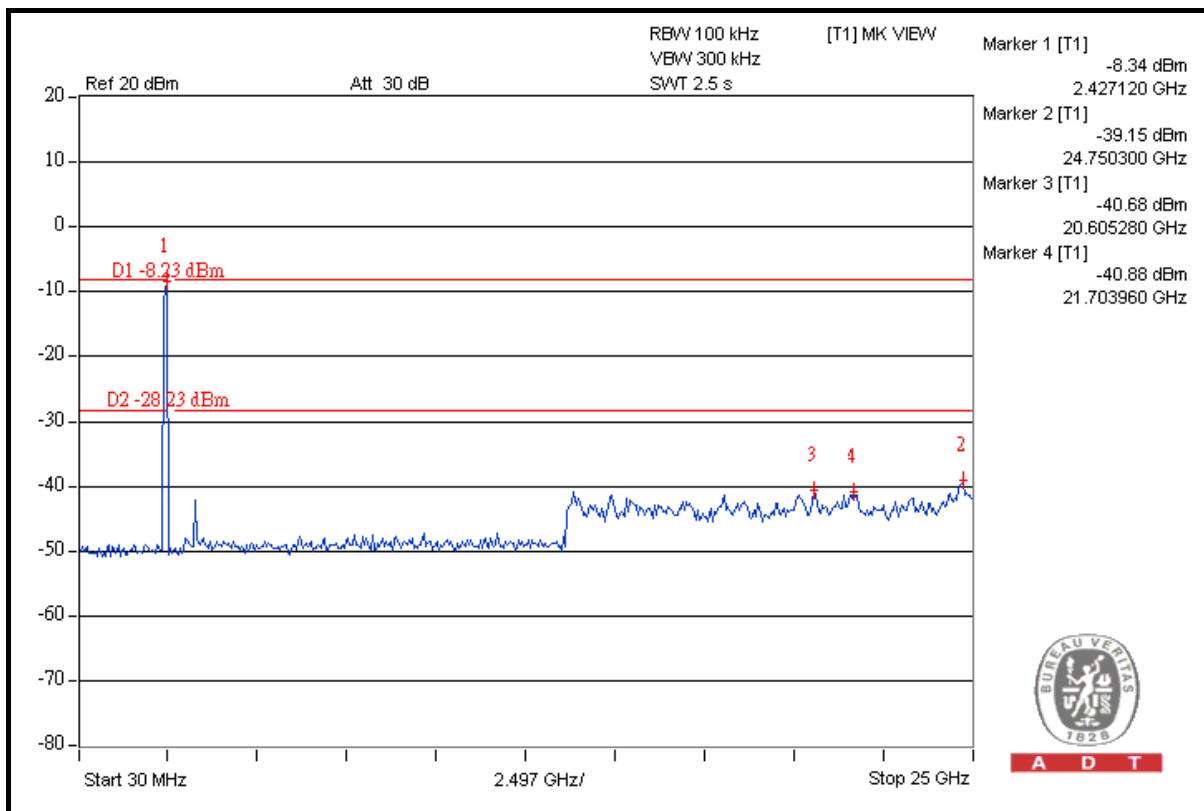


A D T

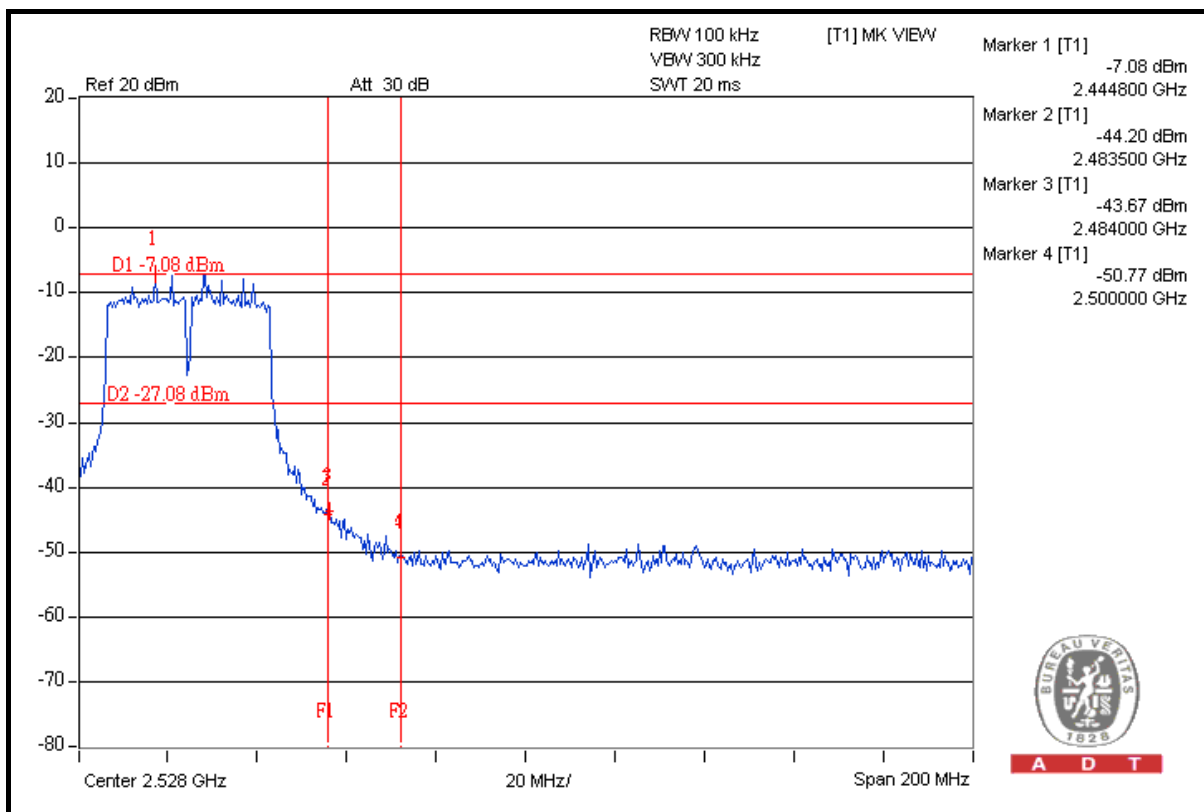


A D T



A D T

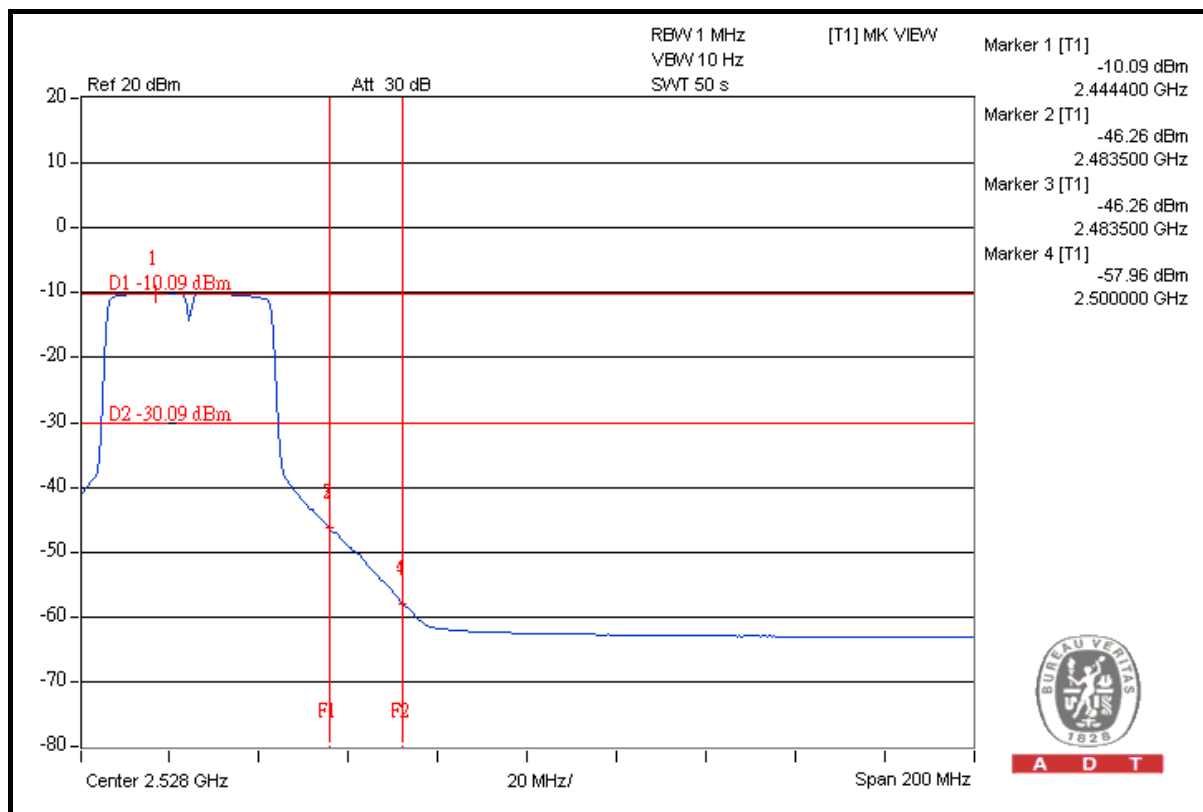

A D T

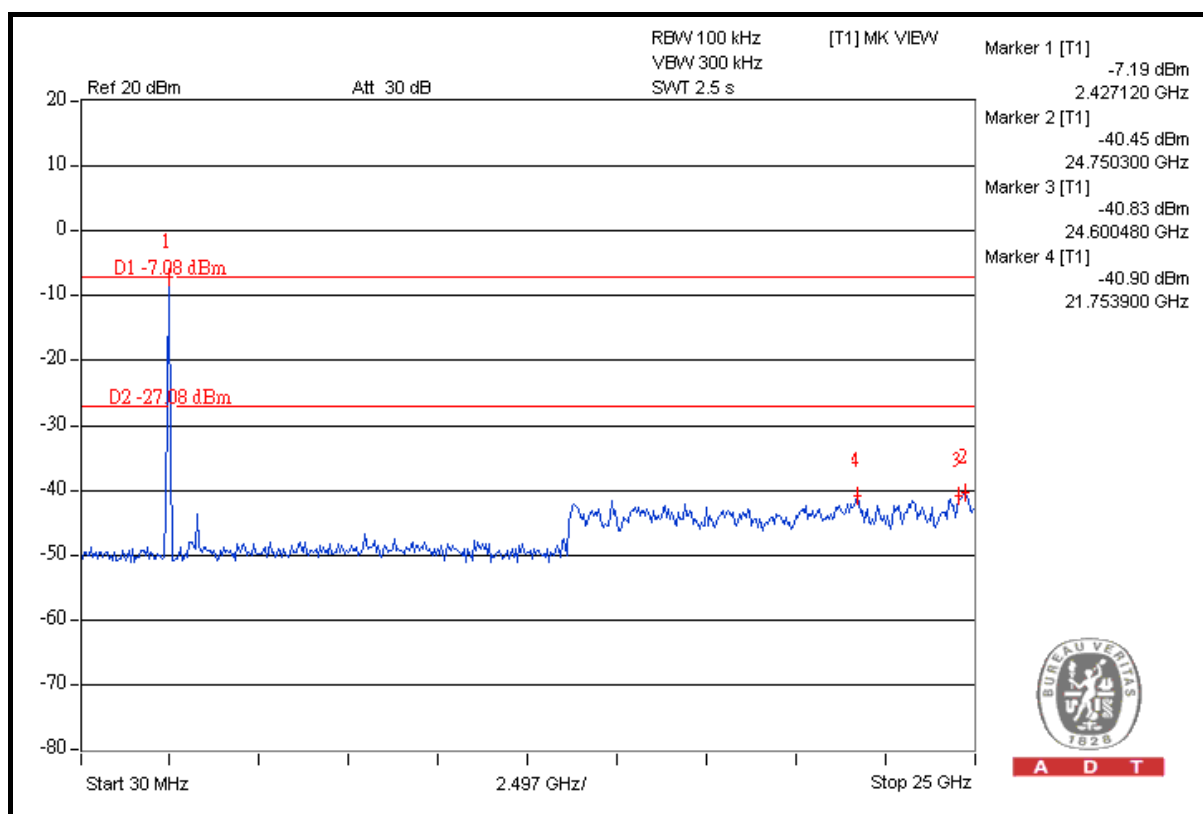

A D T

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is PIFA antenna with UFL antenna connector. The maximum Gain of the antenna is 1.73dBi.

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---