

FCC TEST REPORT

REPORT NO.: RF990423C17

MODEL NO.: AW-NU137

RECEIVED: Apr. 26, 2010

TESTED: Apr. 29 ~ Jun. 03, 2010

ISSUED: Jun. 07, 2010

APPLICANT: AzureWave Technologies, Inc.

ADDRESS: 8F, No. 94, Baozhong Rd., Xindian, Taipei,
Taiwan 231.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan,
R.O.C.

This test report consists of 86 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3.	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	7
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	8
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	10
3.4	DESCRIPTION OF SUPPORT UNITS	10
4.	TEST TYPES AND RESULTS	11
4.1	RADIATED EMISSION MEASUREMENT	11
4.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT	11
4.1.2	TEST INSTRUMENTS	12
4.1.3	TEST PROCEDURES	13
4.1.4	DEVIATION FROM TEST STANDARD	13
4.1.5	TEST SETUP	14
4.1.6	EUT OPERATING CONDITIONS	14
4.1.7	TEST RESULTS	15
4.2	CONDUCTED EMISSION MEASUREMENT	41
4.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	41
4.2.2	TEST INSTRUMENTS	41
4.2.3	TEST PROCEDURES	42
4.2.4	DEVIATION FROM TEST STANDARD	42
4.2.5	TEST SETUP	43
4.2.6	EUT OPERATING CONDITIONS	43
4.2.7	TEST RESULTS	44
4.3	6dB BANDWIDTH MEASUREMENT	48
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	48
4.3.2	TEST INSTRUMENTS	48
4.3.3	TEST PROCEDURE	48
4.3.4	DEVIATION FROM TEST STANDARD	48
4.3.5	TEST SETUP	49
4.3.6	EUT OPERATING CONDITIONS	49
4.3.7	TEST RESULTS	50
4.4	MAXIMUM OUTPUT POWER	54
4.4.1	LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT	54
4.4.2	INSTRUMENTS	54
4.4.3	TEST PROCEDURES	54



A D T

4.4.4	DEVIATION FROM TEST STANDARD	54
4.4.5	TEST SETUP.....	55
4.4.6	EUT OPERATING CONDITIONS	55
4.4.7	TEST RESULTS	56
4.5	POWER SPECTRAL DENSITY MEASUREMENT.....	57
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	57
4.5.2	TEST INSTRUMENTS.....	57
4.5.3	TEST PROCEDURE.....	57
4.5.4	DEVIATION FROM TEST STANDARD	57
4.5.5	TEST SETUP.....	58
4.5.6	EUT OPERATING CONDITION	58
4.5.7	TEST RESULTS	59
4.6	BAND EDGES MEASUREMENT	63
4.6.1	LIMITS OF BAND EDGES MEASUREMENT.....	63
4.6.2	TEST INSTRUMENTS.....	63
4.6.3	TEST PROCEDURE.....	63
4.6.4	DEVIATION FROM TEST STANDARD	63
4.6.5	EUT OPERATING CONDITION	63
4.6.6	TEST RESULTS	64
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	84
6.	INFORMATION ON THE TESTING LABORATORIES	85
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	86

1. CERTIFICATION

PRODUCT: IEEE 802.11n/g/b Wireless USB Module

MODEL: AW-NU137

BRAND: AzureWave

APPLICANT: AzureWave Technologies, Inc.

TESTED: Apr. 29 ~ Jun. 03, 2010

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart C (Section 15.247)
ANSI C63.4-2003

The above equipment (model: AW-NU137) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Polly Chien , **DATE** : Jun. 07, 2010
Polly Chien / Specialist

TECHNICAL ACCEPTANCE : Long Chen , **DATE** : Jun. 07, 2010
Responsible for RF Long Chen / Senior Engineer

APPROVED BY : Gary Chang , **DATE** : Jun. 07, 2010
Gary Chang / Assistant Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -15.09dB at 0.170MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.0dB at 2483.50MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is I-PEX not a standard connector.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.34 dB
	200MHz ~1000MHz	3.35 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	IEEE 802.11n/g/b Wireless USB Module
MODEL NO.	AW-NU137
FCC ID	TLZ-NU137
POWER SUPPLY	5.0Vdc
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 150Mbps
OPERATING FREQUENCY	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz)
OUTPUT POWER	154.9mW
ANTENNA TYPE	Refer to NOTE for more details
ANTENNA CONNECTOR	I-PEX
DATA CABLE	NA
I/O PORTS	NA
ACCESSORY DEVICES	NA

NOTE:

- The EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
802.11b	1TX
802.11g	1TX
802.11n (20MHz)	1TX
802.11n (40MHz)	1TX

- The EUT uses with following antennas:

ANTENNA	BRAND	MODEL NO.	TYPE	GAIN (dBi)	CONNECTOR
Antenna 1	HSL	CAR-ATR-179-008	Dipole	2.00	I-PEX
Antenna 2	ACON	ADP6P-70003	Printed	2.14	I-PEX

- The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided for 802.11b, 802.11g and 802.11n (20MHz):


CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2422MHz	5	2442MHz
2	2427MHz	6	2447MHz
3	2432MHz	7	2452MHz
4	2437MHz		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

TEST MODE A, B

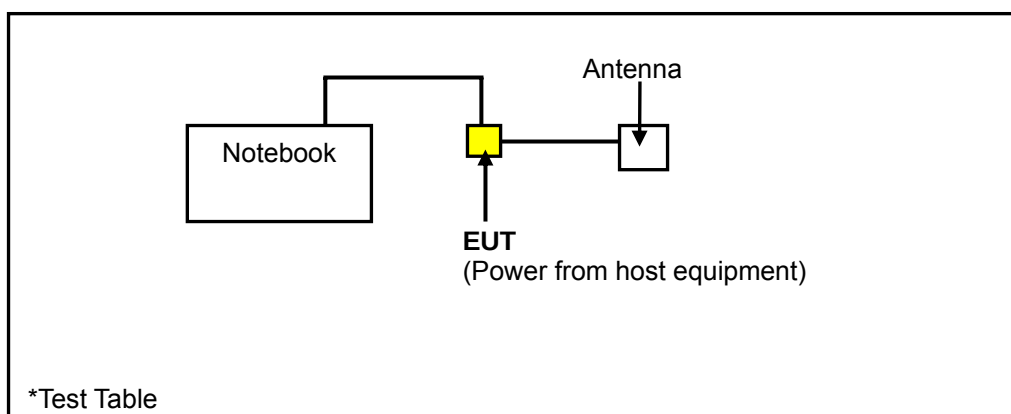

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	√	√	√	√	Antenna 1
B	√	√	√	-	Antenna 2

Where **PLC**: Power Line Conducted Emission
RE $\geq$ 1G: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz
APCM: Antenna Port Conducted Measurement

NOTE: "-": Means no effect.

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT AXIS	ANT. AXIS
A, B	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0	X	Z
A, B	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0	X	Z
A, B	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5	X	Z
A, B	802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5	X	Z

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT AXIS	ANT. AXIS
A, B	802.11g	1 to 11	1	OFDM	BPSK	6.0	X	Z

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11g	1 to 11	1	OFDM	BPSK	6.0

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT AXIS	ANT. AXIS
A, B	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0	X	Z
A, B	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0	X	Z
A, B	802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	6.5	X	Z
A, B	802.11n (40MHz)	1 to 7	1, 7	OFDM	BPSK	13.5	X	Z

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
A	802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
RE $\geq$ 1G	25deg. C, 65%RH, 1018 hPa	120Vac, 60Hz	Brad Wu
RE<1G	23deg. C, 68%RH, 1012 hPa	120Vac, 60Hz	Sun Lin
PLC	23deg. C, 65%RH, 1008 hPa	120Vac, 60Hz	Dean Wang
APCM	25deg. C, 63%RH, 1006 hPa	120Vac, 60Hz	Brad Wu

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	PP05L	25191592336	E2K24CLNS

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	0.29m USB cable.

NOTE:

1. All power cords of the above support units are non shielded (1.8m).
2. The 0.29m USB cable was provided by the client.

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400 / F(kHz)	300
0.490 ~ 1.705	24000 / F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESI7	100033	Jul. 06, 2009	Jul. 05, 2010
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Dec 31, 2009	Dec 30, 2010
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Apr. 27, 2010	Apr. 26, 2011
HORN Antenna SCHWARZBECK	9120D	9120D-209	Jul. 01, 2009	Jun. 30, 2010
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Dec. 25, 2009	Dec. 24, 2010
Preamplifier Agilent	8447D	2944A10633	Nov. 10, 2009	Nov. 09, 2010
Preamplifier Agilent	8449B	3008A01964	Nov. 09, 2009	Nov. 08, 2010
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	274041/4	Aug. 28, 2009	Aug. 27, 2010
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	283397/4	Aug. 28, 2009	Aug. 27, 2010
Software ADT.	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table ADT.	TT100.	TT93021703	NA	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 988962.
 5. The IC Site Registration No. is IC 7450F-3.

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

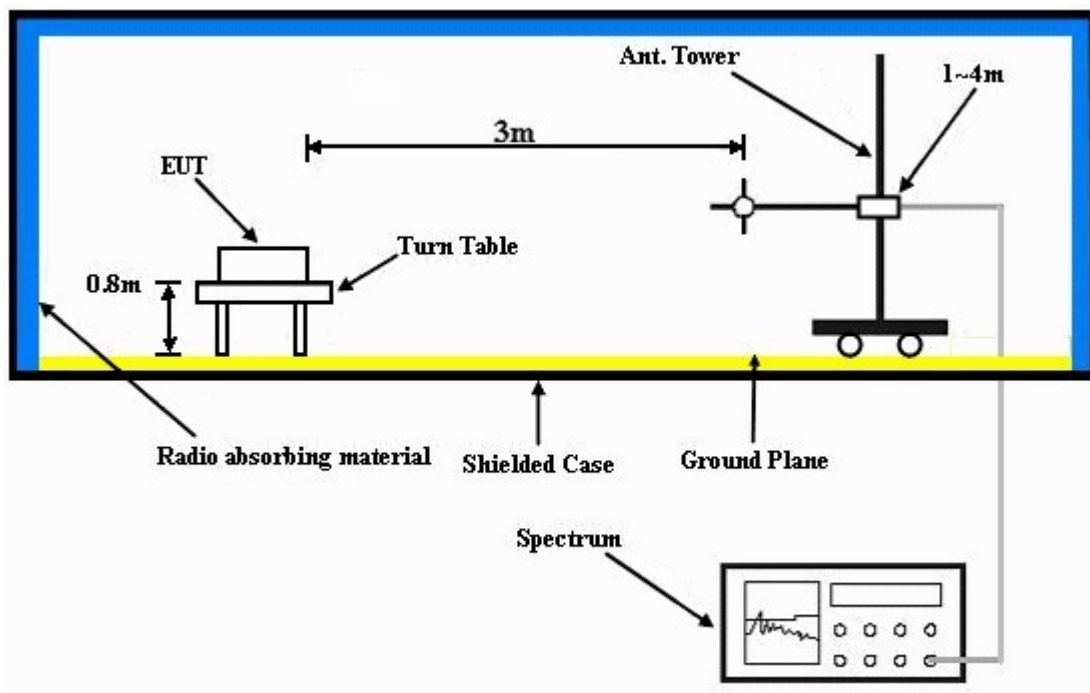

For the actual test configuration, please refer to the attached file (Test Setup Photo)

4.1.6 EUT OPERATING CONDITIONS

- Connected the EUT with a notebook via USB cable and placed on a testing table.
- The notebook system ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.

4.1.7 TEST RESULTS

802.11b

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.1 PK	74.0	-16.9	1.27 H	42	26.60	30.50
2	2390.00	45.9 AV	54.0	-8.1	1.27 H	42	15.40	30.50
3	*2412.00	102.9 PK			1.27 H	42	72.30	30.60
4	*2412.00	99.1 AV			1.27 H	42	68.50	30.60
5	#3216.00	52.3 PK	82.9	-30.6	1.00 H	349	19.80	32.50
6	#3216.00	48.9 AV	79.1	-30.2	1.00 H	349	16.40	32.50
7	4824.00	53.4 PK	74.0	-20.6	1.16 H	174	17.30	36.10
8	4824.00	48.1 AV	54.0	-5.9	1.16 H	174	12.00	36.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.3 PK	74.0	-15.7	1.14 V	316	27.80	30.50
2	2390.00	48.4 AV	54.0	-5.6	1.14 V	316	17.90	30.50
3	*2412.00	109.8 PK			1.14 V	316	79.20	30.60
4	*2412.00	106.2 AV			1.14 V	316	75.60	30.60
5	#3216.00	57.7 PK	89.8	-32.1	1.41 V	30	25.20	32.50
6	#3216.00	55.9 AV	86.2	-30.3	1.41 V	30	23.40	32.50
7	4824.00	57.4 PK	74.0	-16.6	1.00 V	28	21.30	36.10
8	4824.00	52.9 AV	54.0	-1.1	1.00 V	28	16.80	36.10

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. “ # ”: The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.6 PK			1.26 H	45	72.00	30.60
2	*2437.00	98.8 AV			1.26 H	45	68.20	30.60
3	#3249.00	51.8 PK	82.6	-30.8	1.04 H	265	19.30	32.50
4	#3249.00	48.4 AV	78.8	-30.4	1.04 H	265	15.90	32.50
5	4874.00	53.1 PK	74.0	-20.9	1.08 H	192	16.90	36.20
6	4874.00	47.8 AV	54.0	-6.2	1.08 H	192	11.60	36.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	109.4 PK			1.12 V	312	78.80	30.60
2	*2437.00	105.9 AV			1.12 V	312	75.30	30.60
3	#3249.00	55.0 PK	89.4	-34.4	1.39 V	1	22.50	32.50
4	#3249.00	53.0 AV	85.9	-32.9	1.39 V	1	20.50	32.50
5	4874.00	56.3 PK	74.0	-17.7	1.00 V	9	20.10	36.20
6	4874.00	52.8 AV	54.0	-1.2	1.00 V	9	16.60	36.20

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. “ # ”: The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.2 PK			1.25 H	46	71.50	30.70
2	*2462.00	98.4 AV			1.25 H	46	67.70	30.70
3	2483.50	57.4 PK	74.0	-16.6	1.25 H	46	26.60	30.80
4	2483.50	46.2 AV	54.0	-7.8	1.25 H	46	15.40	30.80
5	#3282.00	51.2 PK	82.2	-31.0	1.01 H	95	18.70	32.50
6	#3282.00	47.8 AV	78.4	-30.6	1.01 H	95	15.30	32.50
7	4924.00	51.4 PK	74.0	-22.6	1.10 H	95	15.10	36.30
8	4924.00	46.2 AV	54.0	-7.8	1.10 H	95	9.90	36.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.1 PK			1.12 V	316	78.40	30.70
2	*2462.00	105.5 AV			1.12 V	316	74.80	30.70
3	2483.50	61.0 PK	74.0	-13.0	1.12 V	316	30.20	30.80
4	2483.50	49.7 AV	54.0	-4.3	1.12 V	316	18.90	30.80
5	#3282.00	54.3 PK	89.1	-34.8	1.35 V	29	21.80	32.50
6	#3282.00	51.1 AV	85.5	-34.4	1.35 V	29	18.60	32.50
7	4924.00	54.4 PK	74.0	-19.6	1.10 V	36	18.10	36.30
8	4924.00	50.0 AV	54.0	-4.0	1.10 V	36	13.70	36.30

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”: The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.2 PK	74.0	-16.8	1.28 H	35	26.70	30.50
2	2390.00	45.9 AV	54.0	-8.1	1.28 H	35	15.40	30.50
3	*2412.00	101.7 PK			1.28 H	35	71.10	30.60
4	*2412.00	98.0 AV			1.28 H	35	67.40	30.60
5	#3216.00	50.9 PK	81.7	-30.8	1.00 H	309	18.40	32.50
6	#3216.00	47.2 AV	78.0	-30.8	1.00 H	309	14.70	32.50
7	4824.00	55.3 PK	74.0	-18.7	1.08 H	54	19.20	36.10
8	4824.00	51.9 AV	54.0	-2.1	1.08 H	54	15.80	36.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.3 PK	74.0	-13.7	1.18 V	157	29.80	30.50
2	2390.00	49.5 AV	54.0	-4.5	1.18 V	157	19.00	30.50
3	*2412.00	108.5 PK			1.18 V	159	77.90	30.60
4	*2412.00	104.8 AV			1.18 V	159	74.20	30.60
5	#3216.00	53.4 PK	88.5	-35.1	1.20 V	152	20.90	32.50
6	#3216.00	50.9 AV	84.8	-33.9	1.20 V	152	18.40	32.50
7	4824.00	55.6 PK	74.0	-18.4	1.08 V	294	19.50	36.10
8	4824.00	52.7 AV	54.0	-1.3	1.08 V	294	16.60	36.10

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. “#”: The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.0 PK			1.26 H	34	71.40	30.60
2	*2437.00	98.3 AV			1.26 H	34	67.70	30.60
3	#3249.00	51.4 PK	82.0	-30.6	1.03 H	318	18.90	32.50
4	#3249.00	47.6 AV	78.3	-30.7	1.03 H	318	15.10	32.50
5	4874.00	55.6 PK	74.0	-18.4	1.11 H	49	19.40	36.20
6	4874.00	52.2 AV	54.0	-1.8	1.11 H	49	16.00	36.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	109.1 PK			1.38 V	84	78.50	30.60
2	*2437.00	105.2 AV			1.38 V	84	74.60	30.60
3	#3249.00	54.9 PK	89.1	-34.2	1.00 V	74	22.40	32.50
4	#3249.00	52.8 AV	85.2	-32.4	1.00 V	74	20.30	32.50
5	4874.00	56.3 PK	74.0	-17.7	1.07 V	55	20.10	36.20
6	4874.00	52.9 AV	54.0	-1.1	1.07 V	55	16.70	36.20

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. “ # ”: The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.5 PK			1.26 H	38	70.80	30.70
2	*2462.00	97.8 AV			1.26 H	38	67.10	30.70
3	2483.50	56.6 PK	74.0	-17.4	1.26 H	38	25.80	30.80
4	2483.50	45.4 AV	54.0	-8.6	1.26 H	38	14.60	30.80
5	#3282.00	50.5 PK	81.5	-31.0	1.03 H	295	18.00	32.50
6	#3282.00	46.9 AV	77.8	-30.9	1.03 H	295	14.40	32.50
7	4924.00	55.0 PK	74.0	-19.0	1.10 H	48	18.70	36.30
8	4924.00	51.6 AV	54.0	-2.4	1.10 H	48	15.30	36.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.3 PK			1.14 V	359	77.60	30.70
2	*2462.00	104.6 AV			1.14 V	359	73.90	30.70
3	2483.50	57.5 PK	74.0	-16.5	1.14 V	359	26.70	30.80
4	2483.50	47.4 AV	54.0	-6.6	1.14 V	359	16.60	30.80
5	#3282.00	54.6 PK	88.3	-33.7	1.00 V	72	22.10	32.50
6	#3282.00	52.0 AV	84.6	-32.6	1.00 V	72	19.50	32.50
7	4924.00	55.5 PK	74.0	-18.5	1.00 V	39	19.20	36.30
8	4924.00	52.5 AV	54.0	-1.5	1.00 V	39	16.20	36.30

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. “#”: The radiated frequency is out the restricted band.

802.11g

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.2 PK	74.0	-15.8	1.90 H	59	27.70	30.50
2	2390.00	45.9 AV	54.0	-8.1	1.90 H	59	15.40	30.50
3	*2412.00	101.8 PK			1.90 H	59	71.20	30.60
4	*2412.00	91.7 AV			1.90 H	59	61.10	30.60
5	4824.00	48.5 PK	74.0	-25.5	1.09 H	264	12.40	36.10
6	4824.00	35.2 AV	54.0	-18.8	1.09 H	264	-0.90	36.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.6 PK	74.0	-5.4	1.10 V	270	38.10	30.50
2	2390.00	50.9 AV	54.0	-3.1	1.10 V	270	20.40	30.50
3	*2412.00	110.1 PK			1.10 V	270	79.50	30.60
4	*2412.00	100.3 AV			1.10 V	270	69.70	30.60
5	4824.00	55.4 PK	74.0	-18.6	1.09 V	75	19.30	36.10
6	4824.00	40.2 AV	54.0	-13.8	1.09 V	75	4.10	36.10

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.5 PK			1.88 H	56	70.90	30.60
2	*2437.00	91.4 AV			1.88 H	56	60.80	30.60
3	4874.00	48.2 PK	74.0	-25.8	1.15 H	284	12.00	36.20
4	4874.00	34.9 AV	54.0	-19.1	1.15 H	284	-1.30	36.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	109.8 PK			1.09 V	272	79.20	30.60
2	*2437.00	100.0 AV			1.09 V	272	69.40	30.60
3	4874.00	55.1 PK	74.0	-18.9	1.10 V	82	18.90	36.20
4	4874.00	39.9 AV	54.0	-14.1	1.10 V	82	3.70	36.20

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.0 PK			1.85 H	61	70.30	30.70
2	*2462.00	90.9 AV			1.85 H	61	60.20	30.70
3	2483.50	57.6 PK	74.0	-16.4	1.85 H	61	26.80	30.80
4	2483.50	45.2 AV	54.0	-8.8	1.85 H	61	14.40	30.80
5	4924.00	48.8 PK	74.0	-25.2	1.14 H	212	12.50	36.30
6	4924.00	35.6 AV	54.0	-18.4	1.14 H	212	-0.70	36.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.3 PK			1.08 V	268	78.60	30.70
2	*2462.00	99.5 AV			1.08 V	268	68.80	30.70
3	2483.50	67.4 PK	74.0	-6.6	1.08 V	268	36.60	30.80
4	2483.50	52.9 AV	54.0	-1.1	1.08 V	268	22.10	30.80
5	4924.00	56.3 PK	74.0	-17.7	1.25 V	94	20.00	36.30
6	4924.00	41.4 AV	54.0	-12.6	1.25 V	94	5.10	36.30

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.7 PK	74.0	-14.3	1.29 H	33	29.20	30.50
2	2390.00	47.8 AV	54.0	-6.2	1.29 H	33	17.30	30.50
3	*2412.00	99.3 PK			1.29 H	33	68.70	30.60
4	*2412.00	89.6 AV			1.29 H	33	59.00	30.60
5	4824.00	47.6 PK	74.0	-26.4	1.19 H	62	11.50	36.10
6	4824.00	34.5 AV	54.0	-19.5	1.19 H	62	-1.60	36.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.9 PK	74.0	-6.1	1.14 V	80	37.40	30.50
2	2390.00	52.9 AV	54.0	-1.1	1.14 V	80	22.40	30.50
3	*2412.00	108.2 PK			1.12 V	80	77.60	30.60
4	*2412.00	98.5 AV			1.12 V	80	67.90	30.60
5	4824.00	48.0 PK	74.0	-26.0	1.12 V	81	11.90	36.10
6	4824.00	34.9 AV	54.0	-19.1	1.12 V	81	-1.20	36.10

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	99.5 PK			1.30 H	34	68.90	30.60
2	*2437.00	89.8 AV			1.30 H	34	59.20	30.60
3	4874.00	47.9 PK	74.0	-26.1	1.16 H	54	11.70	36.20
4	4874.00	34.8 AV	54.0	-19.2	1.16 H	54	-1.40	36.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.5 PK			1.13 V	81	77.90	30.60
2	*2437.00	98.8 AV			1.13 V	81	68.20	30.60
3	4874.00	48.2 PK	74.0	-25.8	1.16 V	92	12.00	36.20
4	4874.00	35.1 AV	54.0	-18.9	1.16 V	92	-1.10	36.20

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	99.1 PK			1.26 H	34	68.40	30.70
2	*2462.00	89.4 AV			1.26 H	34	58.70	30.70
3	2483.50	59.9 PK	74.0	-14.1	1.26 H	34	29.10	30.80
4	2483.50	48.0 AV	54.0	-6.0	1.26 H	34	17.20	30.80
5	4924.00	47.9 PK	74.0	-26.1	1.16 H	54	11.60	36.30
6	4924.00	34.8 AV	54.0	-19.2	1.16 H	54	-1.50	36.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.0 PK			1.10 V	84	77.30	30.70
2	*2462.00	98.3 AV			1.10 V	84	67.60	30.70
3	2483.50	67.2 PK	74.0	-6.8	1.10 V	84	36.40	30.80
4	2483.50	52.8 AV	54.0	-1.2	1.10 V	84	22.00	30.80
5	4924.00	47.8 PK	74.0	-26.2	1.13 V	241	11.50	36.30
6	4924.00	34.6 AV	54.0	-19.4	1.13 V	241	-1.70	36.30

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.

802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.6 PK	74.0	-16.4	1.86 H	62	27.10	30.50
2	2390.00	45.1 AV	54.0	-8.9	1.86 H	62	14.60	30.50
3	*2412.00	100.6 PK			1.86 H	62	70.00	30.60
4	*2412.00	90.5 AV			1.86 H	62	59.90	30.60
5	4824.00	47.8 PK	74.0	-26.2	1.12 H	39	11.70	36.10
6	4824.00	34.5 AV	54.0	-19.5	1.12 H	39	-1.60	36.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.0 PK	74.0	-9.0	1.09 V	270	34.50	30.50
2	2390.00	49.1 AV	54.0	-4.9	1.09 V	270	18.60	30.50
3	*2412.00	108.7 PK			1.09 V	270	78.10	30.60
4	*2412.00	99.1 AV			1.09 V	270	68.50	30.60
5	4824.00	54.2 PK	74.0	-19.8	1.10 V	61	18.10	36.10
6	4824.00	39.1 AV	54.0	-14.9	1.10 V	61	3.00	36.10

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	100.3 PK			1.85 H	68	69.70	30.60
2	*2437.00	90.2 AV			1.85 H	68	59.60	30.60
3	4874.00	47.4 PK	74.0	-26.6	1.13 H	95	11.20	36.20
4	4874.00	34.2 AV	54.0	-19.8	1.13 H	95	-2.00	36.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.5 PK			1.10 V	272	77.90	30.60
2	*2437.00	98.9 AV			1.10 V	272	68.30	30.60
3	4874.00	53.9 PK	74.0	-20.1	1.19 V	52	17.70	36.20
4	4874.00	38.4 AV	54.0	-15.6	1.19 V	52	2.20	36.20

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	100.1 PK			1.84 H	69	69.40	30.70
2	*2462.00	90.0 AV			1.84 H	69	59.30	30.70
3	2483.50	63.4 PK	74.0	-10.6	1.84 H	69	32.60	30.80
4	2483.50	48.5 AV	54.0	-5.5	1.84 H	69	17.70	30.80
5	4924.00	47.8 PK	74.0	-26.2	1.15 H	29	11.50	36.30
6	4924.00	34.5 AV	54.0	-19.5	1.15 H	29	-1.80	36.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.1 PK			1.08 V	269	77.40	30.70
2	*2462.00	98.5 AV			1.08 V	269	67.80	30.70
3	2483.50	68.9 PK	74.0	-5.1	1.08 V	269	38.10	30.80
4	2483.50	52.6 AV	54.0	-1.4	1.08 V	269	21.80	30.80
5	4924.00	53.2 PK	74.0	-20.8	1.09 V	26	16.90	36.30
6	4924.00	37.9 AV	54.0	-16.1	1.09 V	26	1.60	36.30

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.9 PK	74.0	-15.1	1.30 H	34	28.40	30.50
2	2390.00	47.0 AV	54.0	-7.0	1.30 H	34	16.50	30.50
3	*2412.00	98.2 PK			1.30 H	34	67.60	30.60
4	*2412.00	88.5 AV			1.30 H	34	57.90	30.60
5	4824.00	47.4 PK	74.0	-26.6	1.11 H	26	11.30	36.10
6	4824.00	34.2 AV	54.0	-19.8	1.11 H	26	-1.90	36.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.0 PK	74.0	-7.0	1.11 V	81	36.50	30.50
2	2390.00	52.1 AV	54.0	-1.9	1.11 V	81	21.60	30.50
3	*2412.00	107.0 PK			1.11 V	81	76.40	30.60
4	*2412.00	97.2 AV			1.11 V	81	66.60	30.60
5	4824.00	47.8 PK	74.0	-26.2	1.15 V	231	11.70	36.10
6	4824.00	34.6 AV	54.0	-19.4	1.15 V	231	-1.50	36.10

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	98.5 PK			1.32 H	36	67.90	30.60
2	*2437.00	88.8 AV			1.32 H	36	58.20	30.60
3	4874.00	47.8 PK	74.0	-26.2	1.15 H	29	11.60	36.20
4	4874.00	34.6 AV	54.0	-19.4	1.15 H	29	-1.60	36.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	107.2 PK			1.10 V	82	76.60	30.60
2	*2437.00	97.5 AV			1.10 V	82	66.90	30.60
3	4874.00	48.3 PK	74.0	-25.7	1.16 V	234	12.10	36.20
4	4874.00	35.2 AV	54.0	-18.8	1.16 V	234	-1.00	36.20

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	97.9 PK			1.28 H	31	67.20	30.70
2	*2462.00	88.2 AV			1.28 H	31	57.50	30.70
3	2483.50	59.2 PK	74.0	-14.8	1.28 H	31	28.40	30.80
4	2483.50	47.4 AV	54.0	-6.6	1.28 H	31	16.60	30.80
5	4924.00	47.2 PK	74.0	-26.8	1.01 H	62	10.90	36.30
6	4924.00	34.0 AV	54.0	-20.0	1.01 H	62	-2.30	36.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.8 PK			1.10 V	84	76.10	30.70
2	*2462.00	97.0 AV			1.10 V	84	66.30	30.70
3	2483.50	66.4 PK	74.0	-7.6	1.10 V	84	35.60	30.80
4	2483.50	52.0 AV	54.0	-2.0	1.10 V	84	21.20	30.80
5	4924.00	48.1 PK	74.0	-25.9	1.14 V	216	11.80	36.30
6	4924.00	34.9 AV	54.0	-19.1	1.14 V	216	-1.40	36.30

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.

802.11n (40MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.6 PK	74.0	-16.4	1.03 H	356	27.10	30.50
2	2390.00	44.1 AV	54.0	-9.9	1.03 H	356	13.60	30.50
3	*2422.00	91.3 PK			1.03 H	356	60.70	30.60
4	*2422.00	80.6 AV			1.03 H	356	50.00	30.60
5	4844.00	46.9 PK	74.0	-27.1	1.03 H	265	10.70	36.20
6	4844.00	34.9 AV	54.0	-19.1	1.03 H	265	-1.30	36.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.0 PK	74.0	-7.0	1.10 V	28	36.50	30.50
2	2390.00	51.1 AV	54.0	-2.9	1.10 V	28	20.60	30.50
3	*2422.00	99.9 PK			1.10 V	28	69.30	30.60
4	*2422.00	88.8 AV			1.10 V	28	58.20	30.60
5	4844.00	47.3 PK	74.0	-26.7	1.05 V	216	11.10	36.20
6	4844.00	35.4 AV	54.0	-18.6	1.05 V	216	-0.80	36.20

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	91.0 PK			1.05 H	354	60.40	30.60
2	*2437.00	80.3 AV			1.05 H	354	49.70	30.60
3	4874.00	46.5 PK	74.0	-27.5	1.05 H	221	10.30	36.20
4	4874.00	34.6 AV	54.0	-19.4	1.05 H	221	-1.60	36.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	99.6 PK			1.10 V	31	69.00	30.60
2	*2437.00	88.5 AV			1.10 V	31	57.90	30.60
3	4874.00	47.1 PK	74.0	-26.9	1.06 V	225	10.90	36.20
4	4874.00	35.2 AV	54.0	-18.8	1.06 V	225	-1.00	36.20

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	90.8 PK			1.02 H	351	60.10	30.70
2	*2462.00	80.1 AV			1.02 H	351	49.40	30.70
3	2483.50	63.1 PK	74.0	-10.9	1.02 H	351	32.30	30.80
4	2483.50	48.8 AV	54.0	-5.2	1.02 H	351	18.00	30.80
5	4924.00	46.3 PK	74.0	-27.7	1.15 H	92	10.00	36.30
6	4924.00	34.4 AV	54.0	-19.6	1.15 H	92	-1.90	36.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	99.2 PK			1.11 V	32	68.50	30.70
2	*2462.00	88.3 AV			1.11 V	32	57.60	30.70
3	2483.50	67.2 PK	74.0	-6.8	1.11 V	32	36.40	30.80
4	2483.50	51.9 AV	54.0	-2.1	1.11 V	32	21.10	30.80
5	4924.00	46.9 PK	74.0	-27.1	1.19 V	25	10.60	36.30
6	4924.00	35.0 AV	54.0	-19.0	1.19 V	25	-1.30	36.30

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.6 PK	74.0	-14.4	1.28 H	39	29.10	30.50
2	2390.00	47.8 AV	54.0	-6.2	1.28 H	39	17.30	30.50
3	*2422.00	90.4 PK			1.28 H	39	59.80	30.60
4	*2422.00	80.8 AV			1.28 H	39	50.20	30.60
5	4844.00	47.1 PK	74.0	-26.9	1.01 H	106	10.90	36.20
6	4844.00	33.9 AV	54.0	-20.1	1.01 H	106	-2.30	36.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.5 PK	74.0	-7.5	1.16 V	90	36.00	30.50
2	2390.00	52.9 AV	54.0	-1.1	1.16 V	90	22.40	30.50
3	*2422.00	99.2 PK			1.16 V	90	68.60	30.60
4	*2422.00	89.4 AV			1.16 V	90	58.80	30.60
5	4844.00	47.3 PK	74.0	-26.7	1.11 V	260	11.10	36.20
6	4844.00	34.1 AV	54.0	-19.9	1.11 V	260	-2.10	36.20

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	90.6 PK			1.26 H	41	60.00	30.60
2	*2437.00	81.0 AV			1.26 H	41	50.40	30.60
3	4874.00	47.6 PK	74.0	-26.4	1.04 H	222	11.40	36.20
4	4874.00	34.3 AV	54.0	-19.7	1.04 H	222	-1.90	36.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	99.5 PK			1.15 V	92	68.90	30.60
2	*2437.00	89.6 AV			1.15 V	92	59.00	30.60
3	4874.00	47.6 PK	74.0	-26.4	1.04 V	29	11.40	36.20
4	4874.00	34.2 AV	54.0	-19.8	1.04 V	29	-2.00	36.20

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018 hPa	TESTED BY	Brad Wu
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	90.1 PK			1.26 H	38	59.40	30.70
2	*2452.00	80.5 AV			1.26 H	38	49.80	30.70
3	2483.50	59.4 PK	74.0	-14.6	1.26 H	38	28.60	30.80
4	2483.50	47.5 AV	54.0	-6.5	1.26 H	38	16.70	30.80
5	4904.00	47.4 PK	74.0	-26.6	1.12 H	91	11.20	36.20
6	4904.00	34.2 AV	54.0	-19.8	1.12 H	91	-2.00	36.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	99.0 PK			1.15 V	88	68.30	30.70
2	*2452.00	89.1 AV			1.15 V	88	58.40	30.70
3	2483.50	66.8 PK	74.0	-7.2	1.15 V	88	36.00	30.80
4	2483.50	53.0 AV	54.0	-1.0	1.15 V	88	22.20	30.80
5	4904.00	47.6 PK	74.0	-26.4	1.15 V	223	11.40	36.20
6	4904.00	34.5 AV	54.0	-19.5	1.15 V	223	-1.70	36.20

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.

BELOW 1GHz WORST-CASE DATA : 802.11g

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 68%RH 1012 hPa	TESTED BY	Sun Lin
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	146.56	33.5 QP	43.5	-10.0	1.25 H	196	19.10	14.40
2	241.83	31.1 QP	46.0	-14.9	1.00 H	67	18.10	13.00
3	399.31	30.4 QP	46.0	-15.6	1.00 H	10	12.40	18.00
4	465.42	27.1 QP	46.0	-18.9	1.25 H	106	7.20	19.90
5	733.73	36.6 QP	46.0	-9.4	1.00 H	169	11.40	25.20
6	867.89	31.5 QP	46.0	-14.5	1.00 H	10	3.80	27.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	31.2 QP	40.0	-8.8	1.50 V	340	18.30	12.90
2	132.95	33.8 QP	43.5	-9.7	2.00 V	31	20.90	12.90
3	352.65	28.8 QP	46.0	-17.2	1.00 V	319	11.90	16.90
4	399.31	29.2 QP	46.0	-16.8	1.50 V	211	11.20	18.00
5	467.36	31.2 QP	46.0	-14.8	1.25 V	55	11.30	19.90
6	865.94	33.5 QP	46.0	-12.5	1.25 V	208	5.80	27.70

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 68%RH 1012 hPa	TESTED BY	Sun Lin
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	177.67	37.2 QP	43.5	-6.3	1.50 H	241	24.10	13.10
2	239.88	34.3 QP	46.0	-11.7	1.00 H	220	21.40	12.90
3	397.37	33.0 QP	46.0	-13.0	1.00 H	259	15.10	17.90
4	517.92	34.8 QP	46.0	-11.2	1.50 H	109	13.60	21.20
5	733.73	33.5 QP	46.0	-12.5	1.00 H	112	8.30	25.20
6	862.06	33.1 QP	46.0	-12.9	1.50 H	121	5.50	27.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.84	32.2 QP	40.0	-7.8	1.50 V	160	19.40	12.80
2	171.83	31.1 QP	43.5	-12.4	1.00 V	157	17.50	13.60
3	237.94	28.9 QP	46.0	-17.1	1.00 V	88	16.10	12.80
4	480.97	33.1 QP	46.0	-12.9	2.00 V	154	12.80	20.30
5	733.73	33.6 QP	46.0	-12.4	1.00 V	13	8.40	25.20
6	862.06	33.5 QP	46.0	-12.5	1.50 V	337	5.90	27.60

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Sep. 24, 2009	Sep. 23, 2010
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Dec. 31, 2009	Dec. 30, 2010
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Aug. 24, 2009	Aug. 23, 2010
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jul. 29, 2009	Jul. 28, 2010
Software ADT	ADT_Cond_ V7.3.7	NA	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-2047.

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

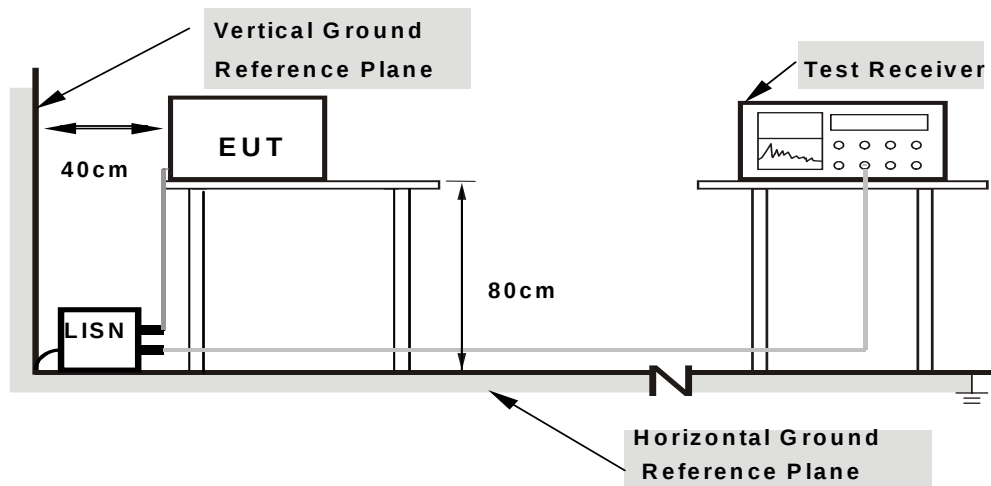

Note: 1.Support units were connected to second LISN.
 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.


4.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA: 802.11g

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.16	49.72	-	49.88	-	64.98	54.98	-15.11	-
2	0.227	0.16	42.48	-	42.64	-	62.56	52.56	-19.92	-
3	0.283	0.17	40.88	-	41.05	-	60.73	50.73	-19.68	-
4	3.610	0.34	37.40	-	37.74	-	56.00	46.00	-18.26	-
5	3.895	0.35	39.16	-	39.51	-	56.00	46.00	-16.49	-
6	10.435	0.36	31.67	-	32.03	-	60.00	50.00	-27.97	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

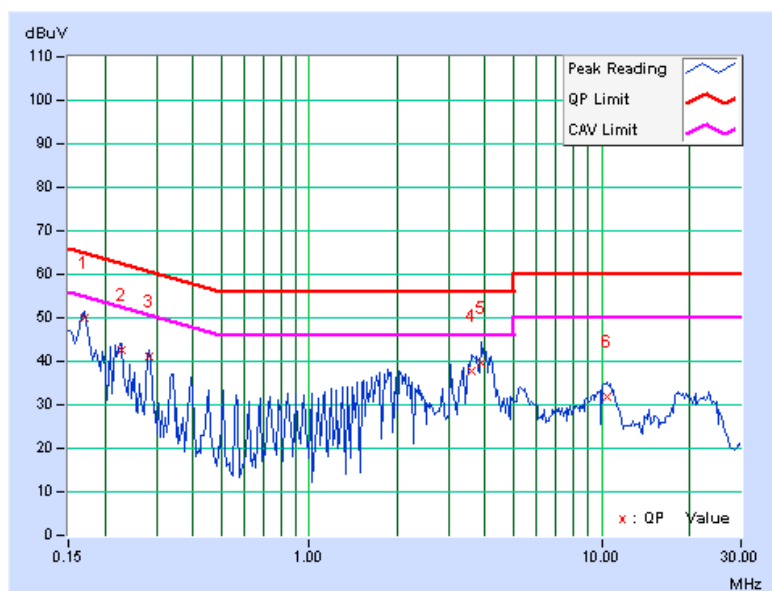

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.13	49.70	-	49.83	-	64.98	54.98	-15.16	-
2	0.224	0.13	42.94	-	43.07	-	62.66	52.66	-19.59	-
3	0.283	0.14	38.50	-	38.64	-	60.73	50.73	-22.09	-
4	2.031	0.30	35.75	-	36.05	-	56.00	46.00	-19.95	-
5	3.892	0.36	37.78	-	38.14	-	56.00	46.00	-17.86	-
6	10.707	0.47	30.87	-	31.34	-	60.00	50.00	-28.66	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

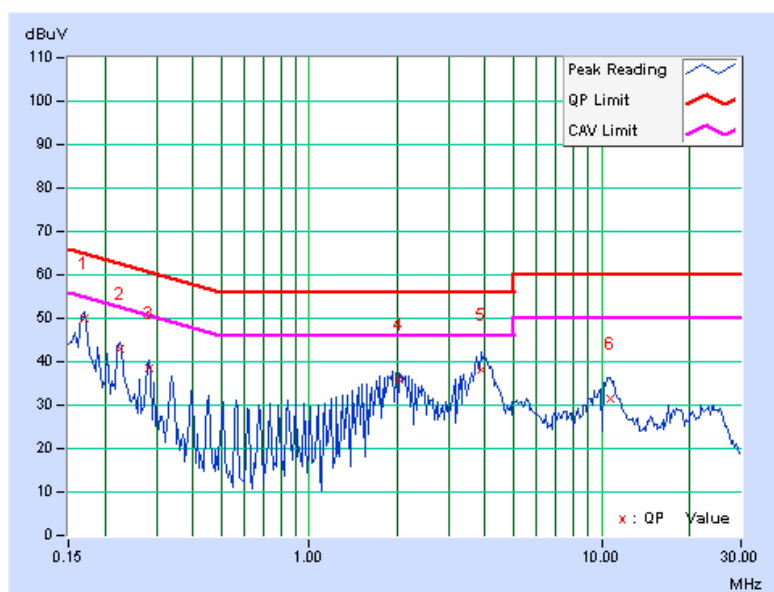

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.16	49.74	-	49.90	-	64.98	54.98	-15.09	-
2	0.224	0.16	42.54	-	42.70	-	62.66	52.66	-19.96	-
3	0.283	0.17	40.92	-	41.09	-	60.73	50.73	-19.64	-
4	3.613	0.34	37.28	-	37.62	-	56.00	46.00	-18.38	-
5	4.004	0.35	39.07	-	39.42	-	56.00	46.00	-16.58	-
6	10.609	0.37	31.39	-	31.76	-	60.00	50.00	-28.24	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

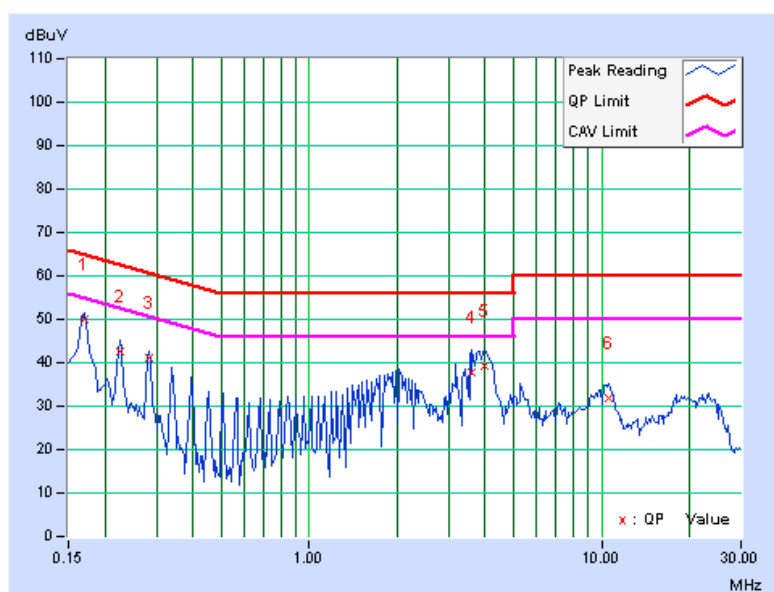

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.13	49.74	-	49.87	-	64.98	54.98	-15.12	-
2	0.227	0.13	42.54	-	42.67	-	62.57	52.57	-19.89	-
3	0.283	0.14	38.68	-	38.82	-	60.73	50.73	-21.91	-
4	1.975	0.30	36.05	-	36.35	-	56.00	46.00	-19.65	-
5	4.063	0.36	39.16	-	39.52	-	56.00	46.00	-16.48	-
6	10.438	0.46	32.40	-	32.86	-	60.00	50.00	-27.14	-

- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

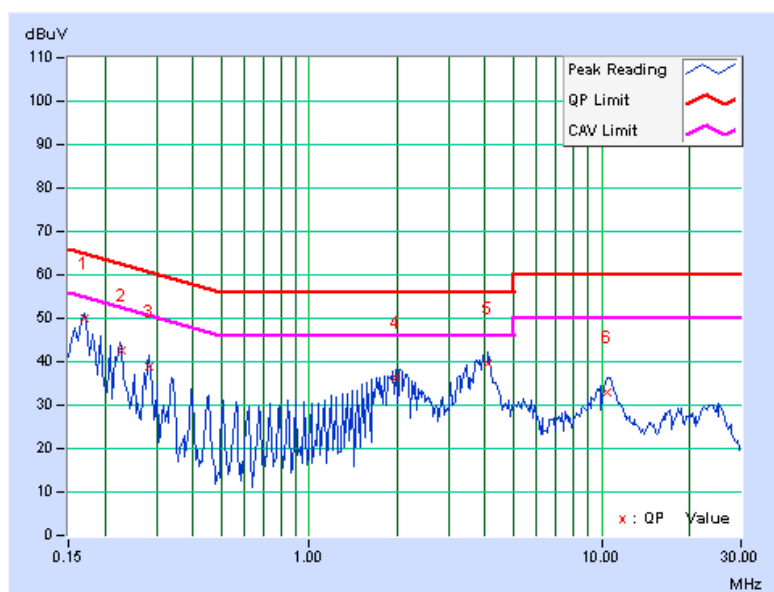

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100040	Jul. 07, 2009	Jul. 06, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	12.09	0.5	PASS
6	2437	12.05	0.5	PASS
11	2462	12.59	0.5	PASS


CH 11

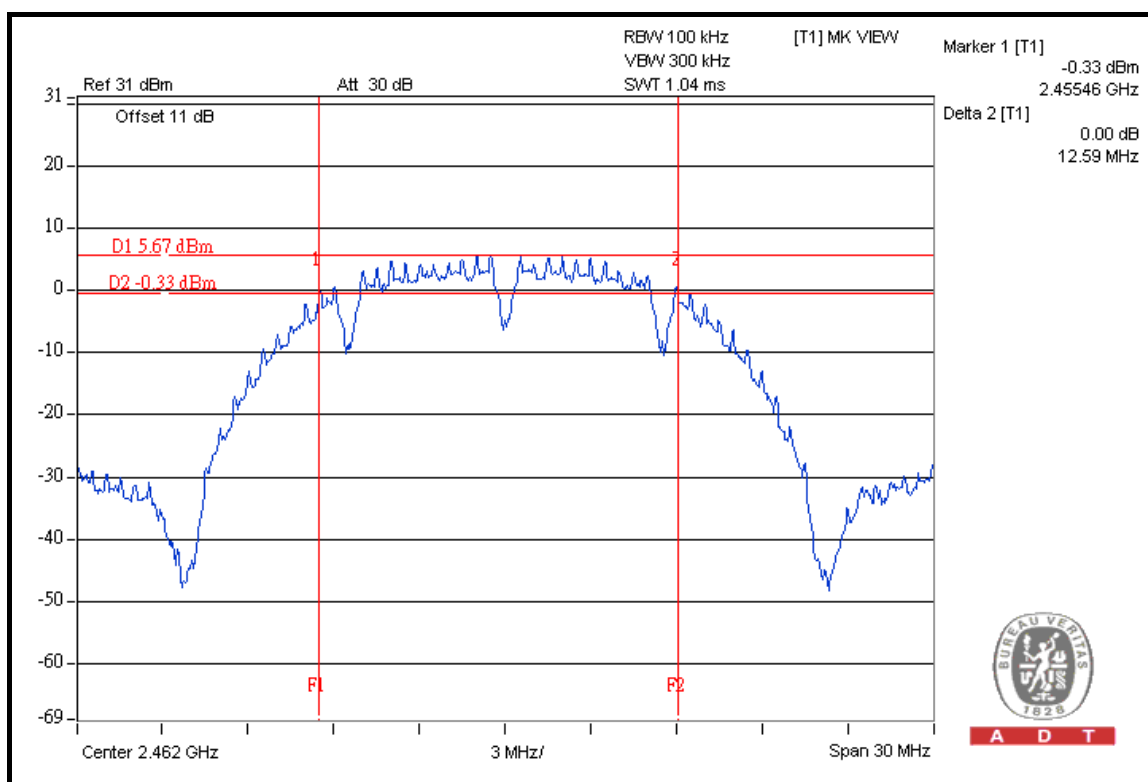

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.45	0.5	PASS
6	2437	16.53	0.5	PASS
11	2462	16.42	0.5	PASS


CH 6

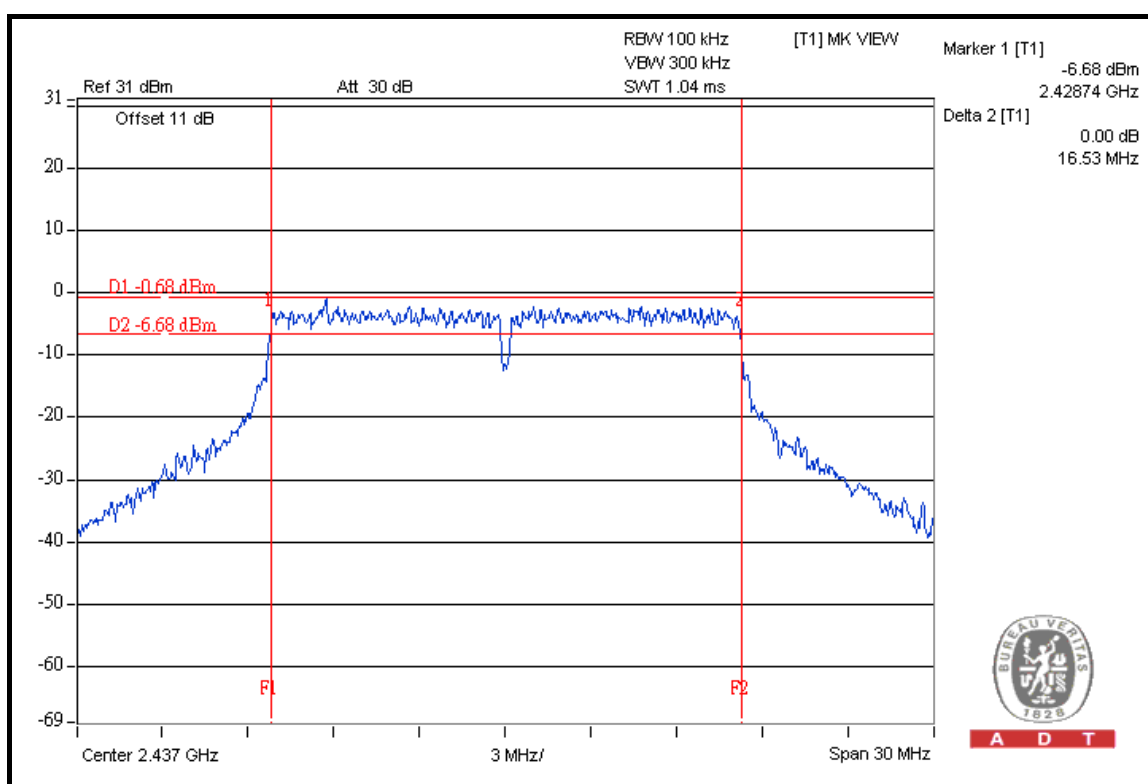

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.65	0.5	PASS
6	2437	17.64	0.5	PASS
11	2462	17.64	0.5	PASS


CH 1

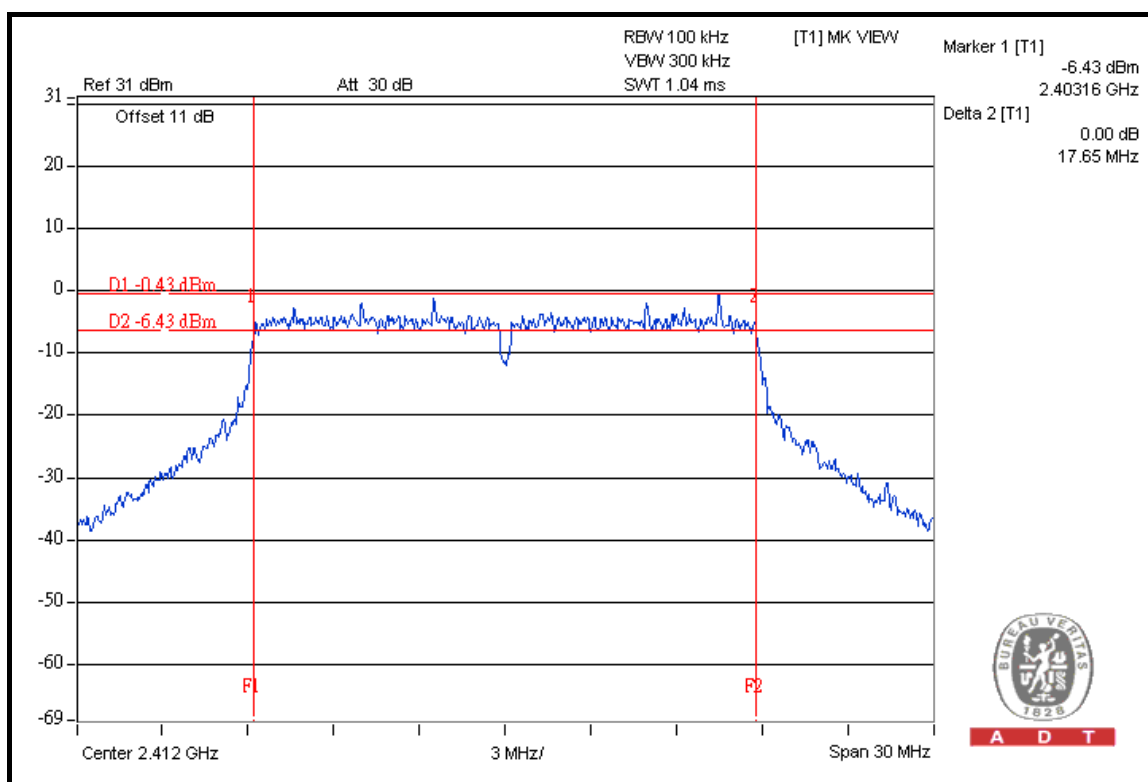

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2422	36.13	0.5	PASS
4	2437	36.39	0.5	PASS
7	2452	36.39	0.5	PASS

CH 4

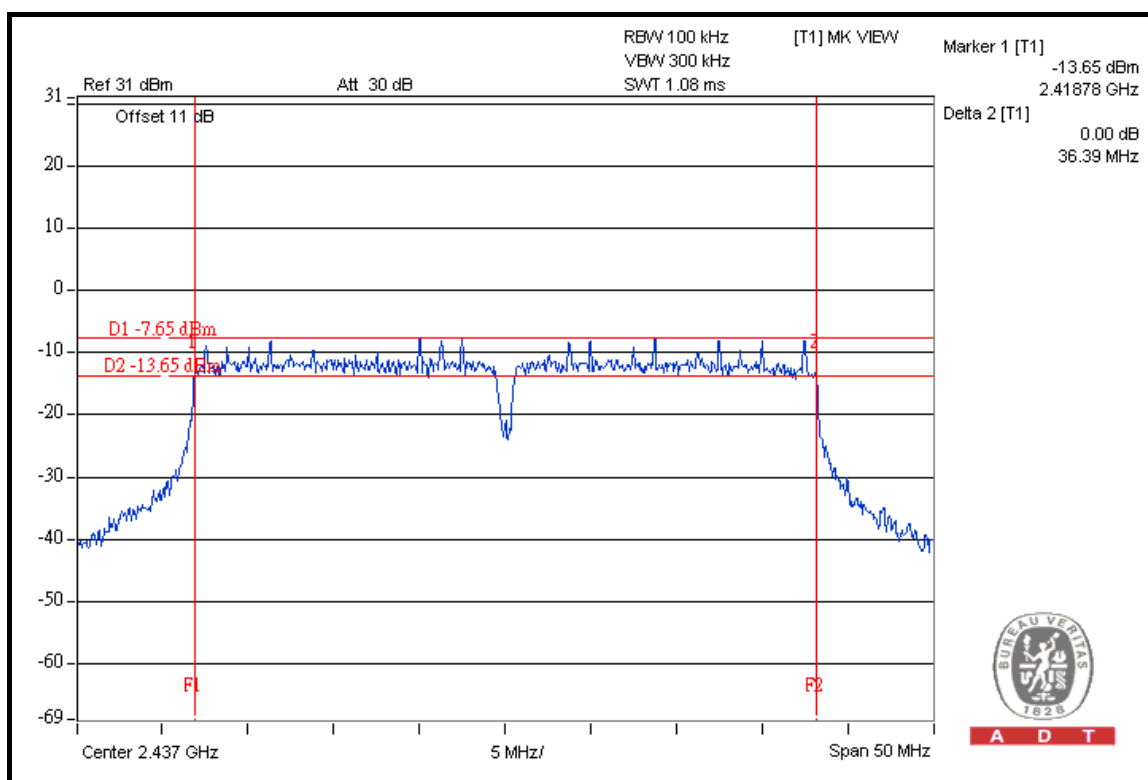

4.4 MAXIMUM OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT

The Maximum Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
High Speed Peak Power Meter	ML2495A	0824012	Aug. 10, 2009	Aug. 09, 2010
Power Sensor	MA2411B	0738138	Aug. 10, 2009	Aug. 09, 2010

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Measurement Bandwidth of ML2495A is 65MHz greater than 6dB bandwidth of emission.


4.4.3 TEST PROCEDURES

A power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP

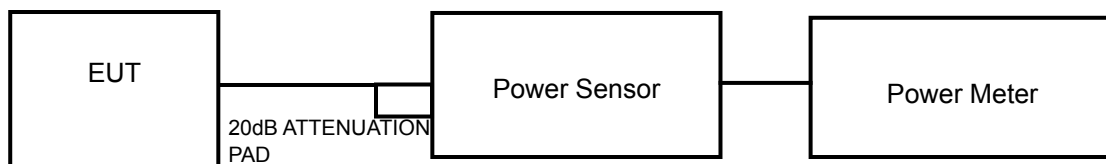

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.

4.4.7 TEST RESULTS

802.11b

CHAN.	CHANNEL FREQUENCY (MHz)	POWER OUTPUT (mW)	POWER OUTPUT (dBm)	POWER LIMIT (dBm)	PASS/FAIL
1	2412	87.1	19.4	30	PASS
6	2437	85.1	19.3	30	PASS
11	2462	83.2	19.2	30	PASS

802.11g

CHAN.	CHANNEL FREQUENCY (MHz)	POWER OUTPUT (mW)	POWER OUTPUT (dBm)	POWER LIMIT (dBm)	PASS/FAIL
1	2412	154.9	21.9	30	PASS
6	2437	141.3	21.5	30	PASS
11	2462	151.4	21.8	30	PASS

802.11n (20MHz)

CHAN.	CHANNEL FREQUENCY (MHz)	POWER OUTPUT (mW)	POWER OUTPUT (dBm)	POWER LIMIT (dBm)	PASS/FAIL
1	2412	107.2	20.3	30	PASS
6	2437	114.8	20.6	30	PASS
11	2462	104.7	20.2	30	PASS

802.11n (40MHz)

CHAN.	CHANNEL FREQUENCY (MHz)	POWER OUTPUT (mW)	POWER OUTPUT (dBm)	POWER LIMIT (dBm)	PASS/FAIL
1	2422	42.7	16.3	30	PASS
4	2437	44.7	16.5	30	PASS
7	2452	40.7	16.1	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100040	Jul. 07, 2009	Jul. 06, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION


Same as Item 4.3.6.

4.5.7 TEST RESULTS

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-6.73	8	PASS
6	2437	-7.05	8	PASS
11	2462	-7.07	8	PASS


CH 1

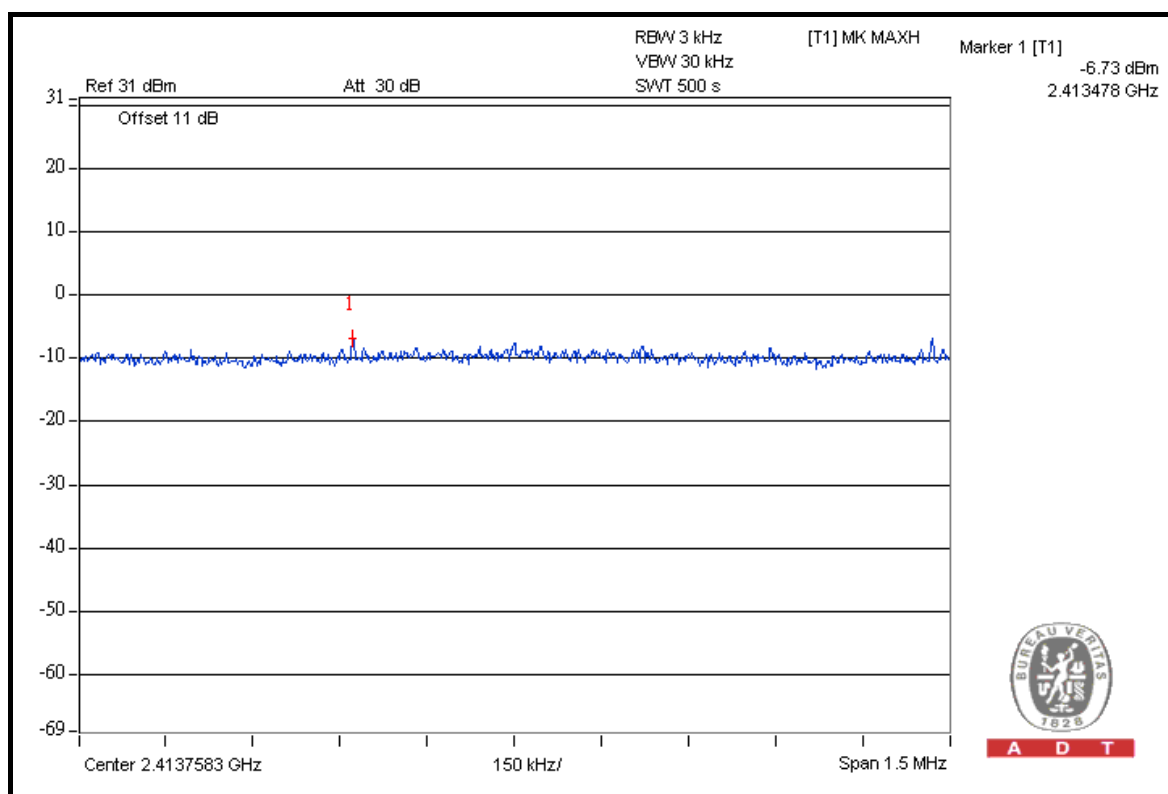

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-11.79	8	PASS
6	2437	-12.01	8	PASS
11	2462	-11.80	8	PASS


CH 1

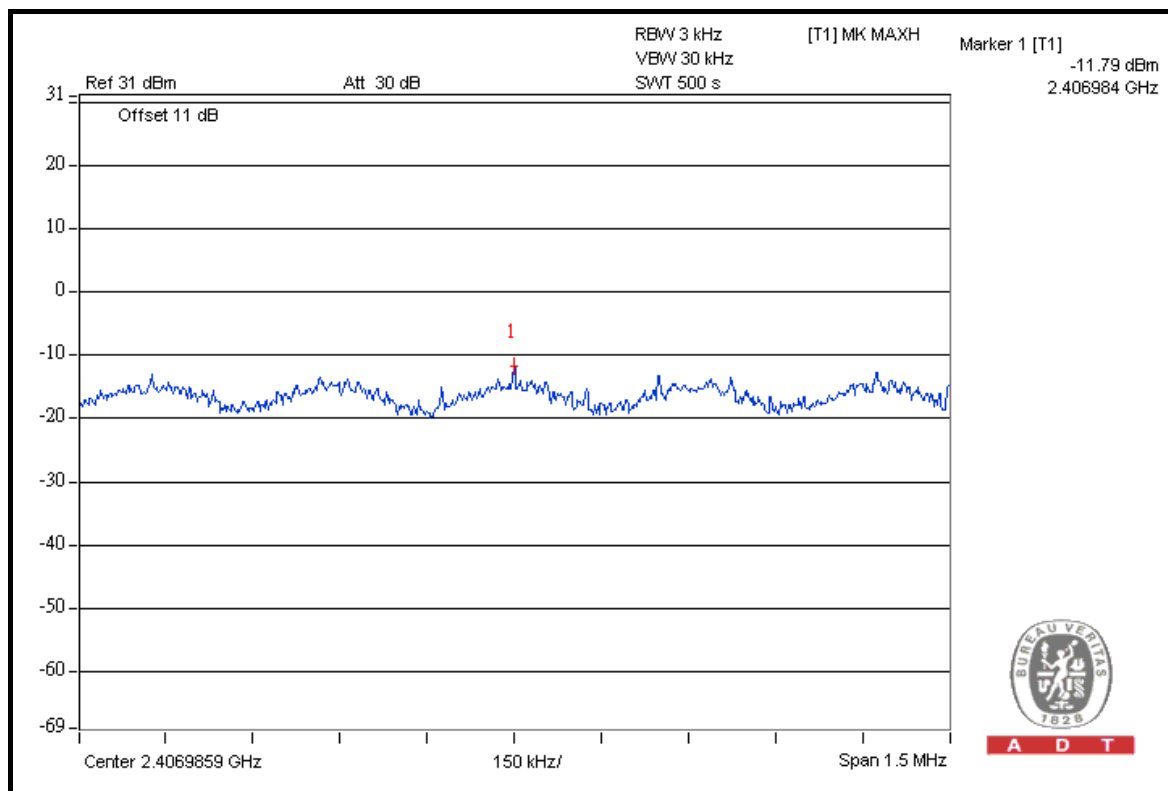

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-13.69	8	PASS
6	2437	-13.21	8	PASS
11	2462	-13.57	8	PASS


CH 6

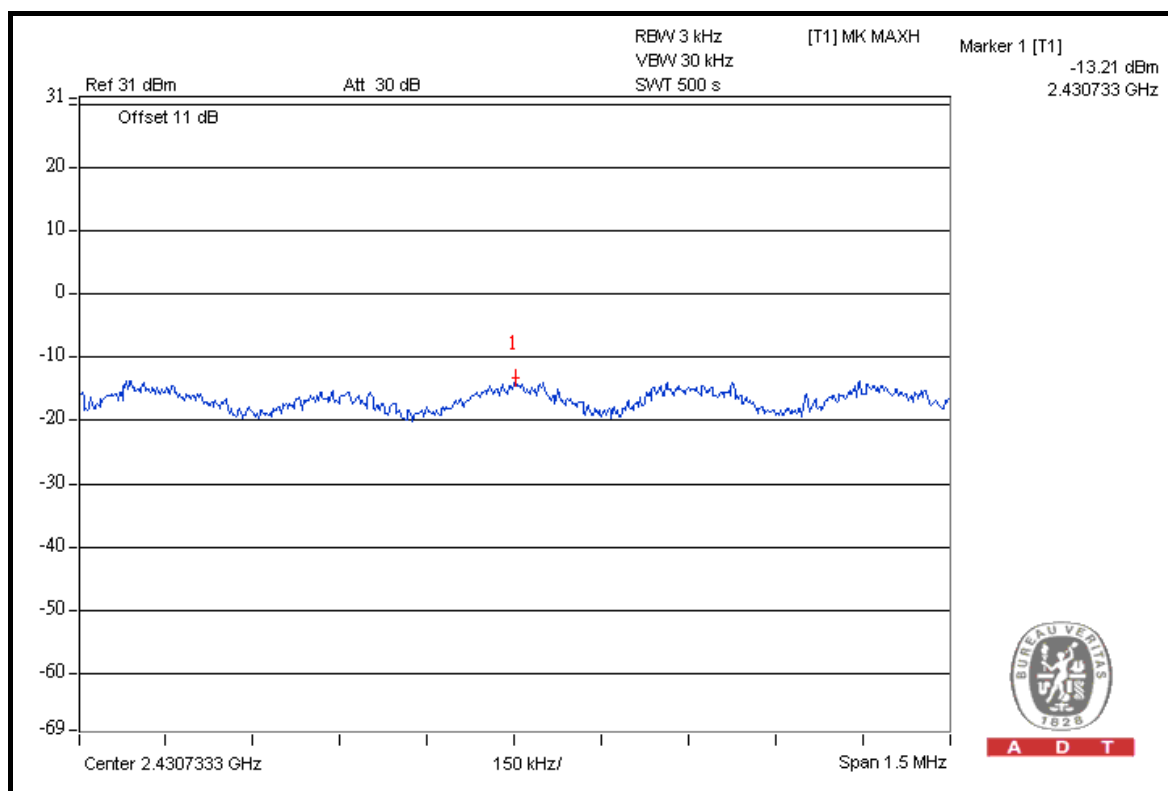

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2422	-21.46	8	PASS
4	2437	-21.16	8	PASS
7	2452	-21.86	8	PASS

CH 4

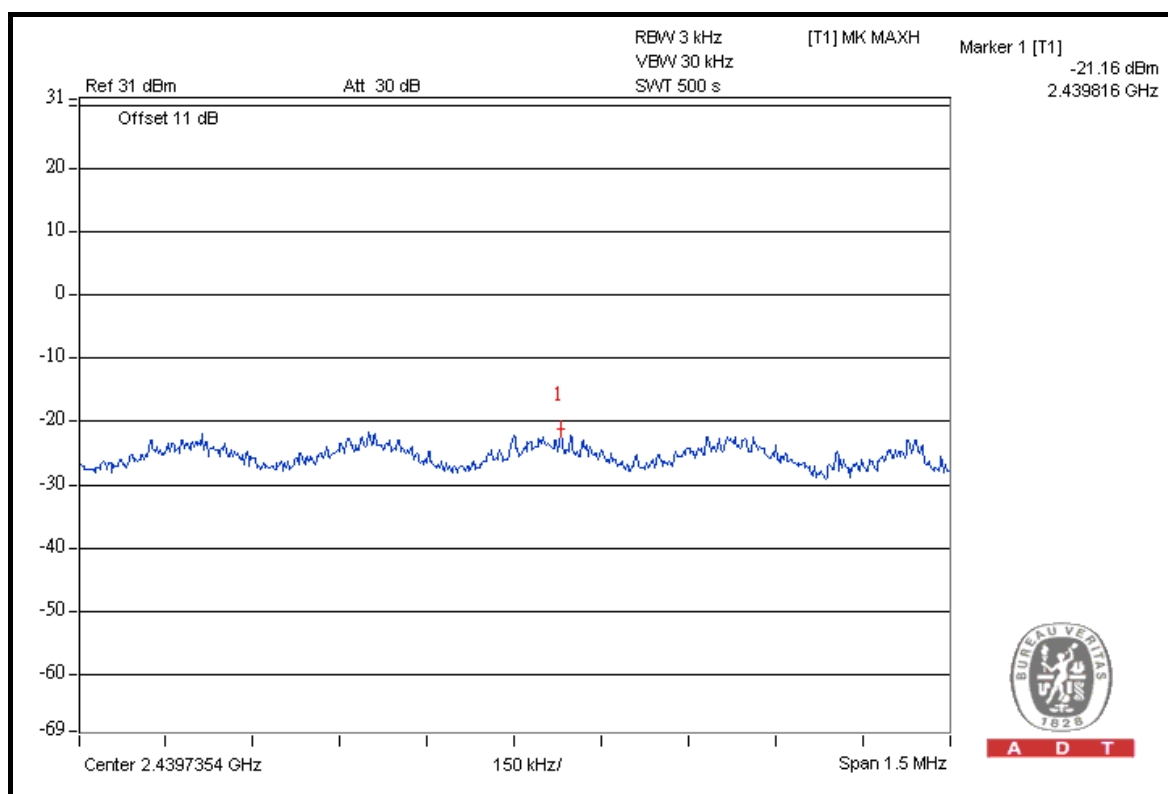

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100040	Jul. 07, 2009	Jul. 06, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 300kHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW =100kHz, VBW = 300kHz; Average RBW = 1MHz, VBW = 10Hz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6.

4.6.6 TEST RESULTS

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b TEST MODE A

RESTRICT BAND (2310 ~ 2390 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2412.00 (PK)	109.8	53.00	56.80	74.00
2412.00 (AV)	106.2	55.50	50.70	54.00

RESTRICT BAND (2483.5 ~ 2500 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2462.00 (PK)	109.1	52.84	56.26	74.00
2462.00 (AV)	105.5	55.32	50.18	54.00

NOTE:

- Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission. Please check following 3 pages.
- Maximum field strength in restrict band = Fundamental emission – Delta.

TEST MODE B

RESTRICT BAND (2310 ~ 2390 MHz)



FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2412.00 (PK)	108.5	53.00	55.50	74.00
2412.00 (AV)	104.8	55.50	49.30	54.00

RESTRICT BAND (2483.5 ~ 2500 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2462.00 (PK)	108.3	52.84	55.46	74.00
2462.00 (AV)	104.6	55.32	49.28	54.00


NOTE:

1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission.
Please check following 3 pages.
2. Maximum field strength in restrict band = Fundamental emission – Delta.

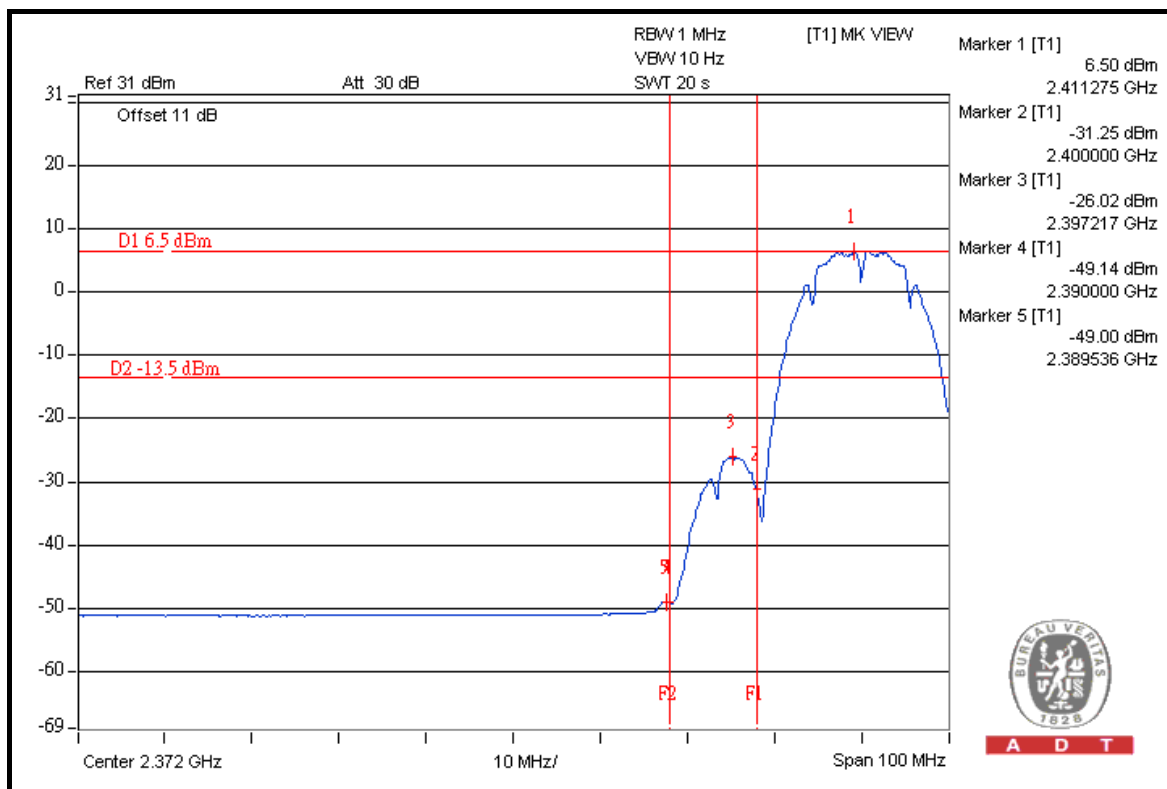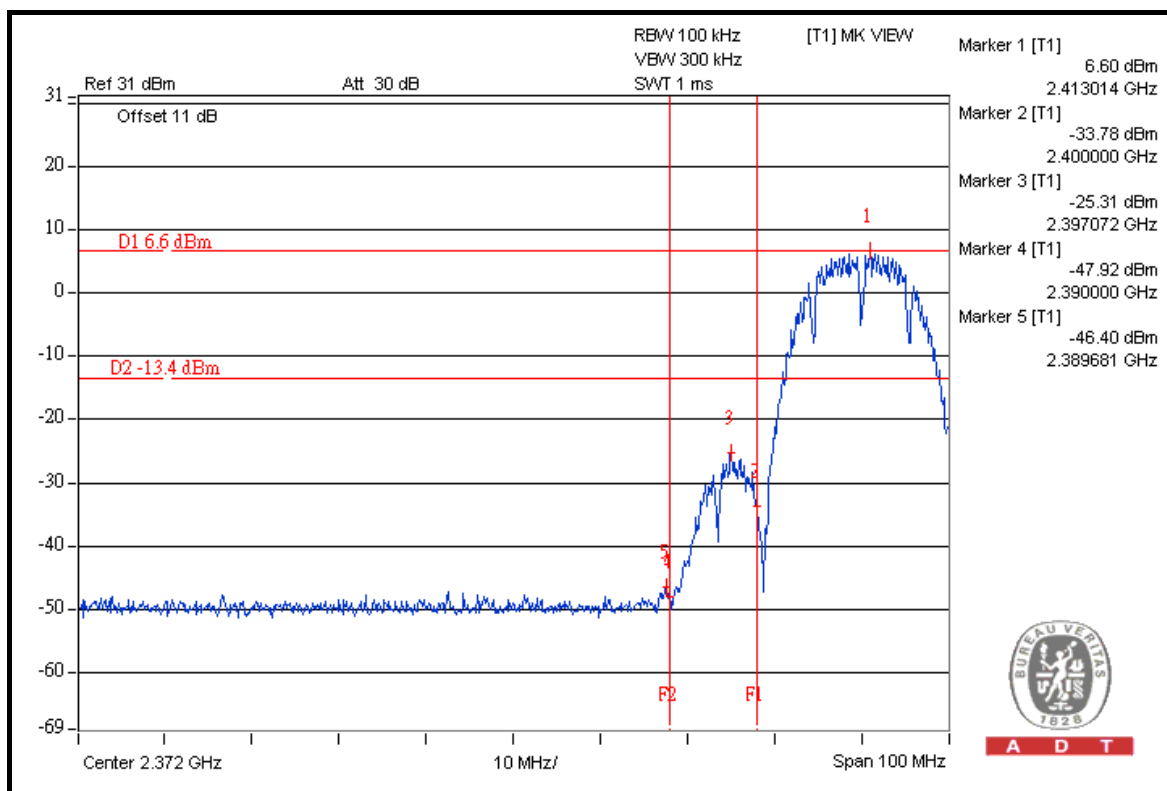




A D T

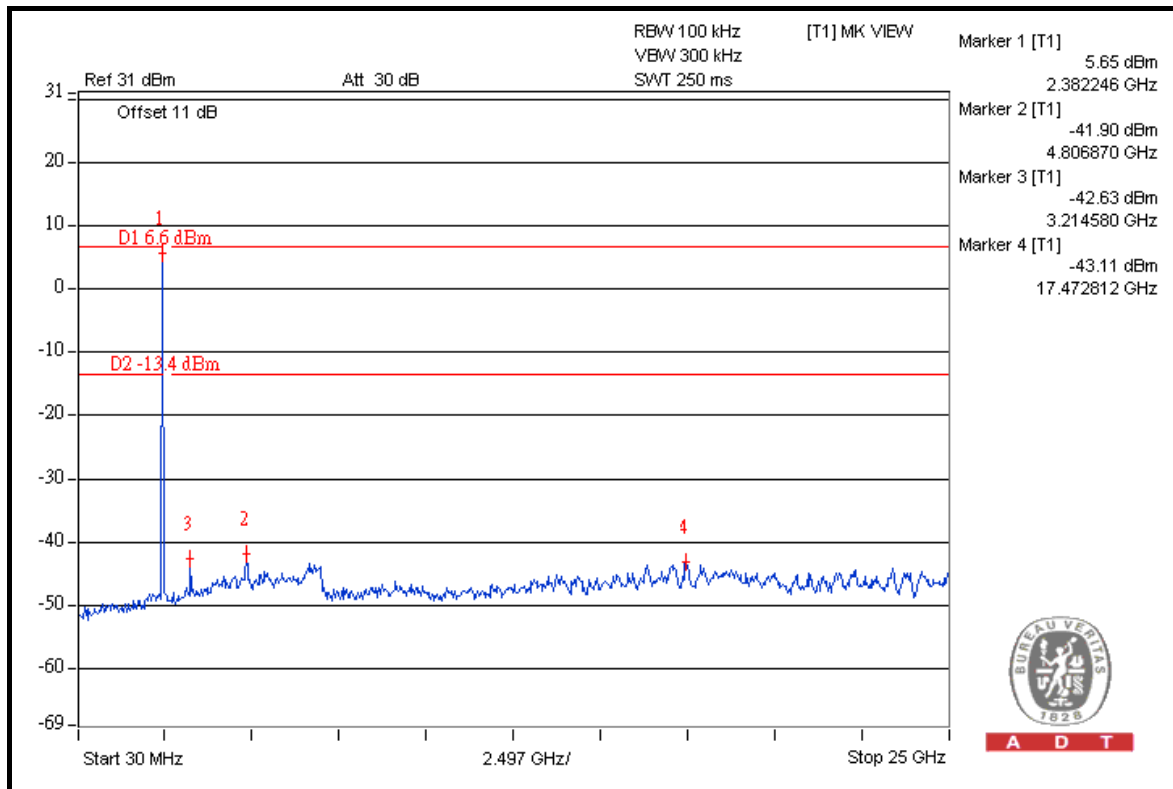


A D T

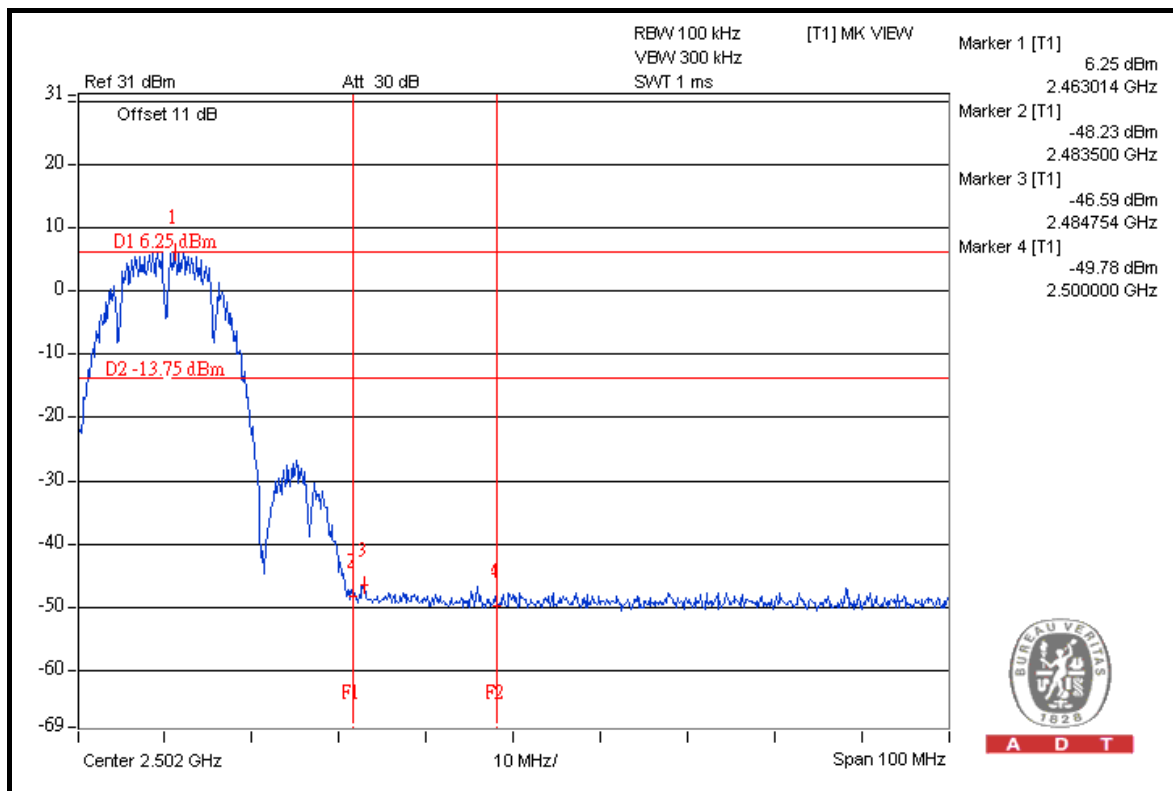


A D T



A D T

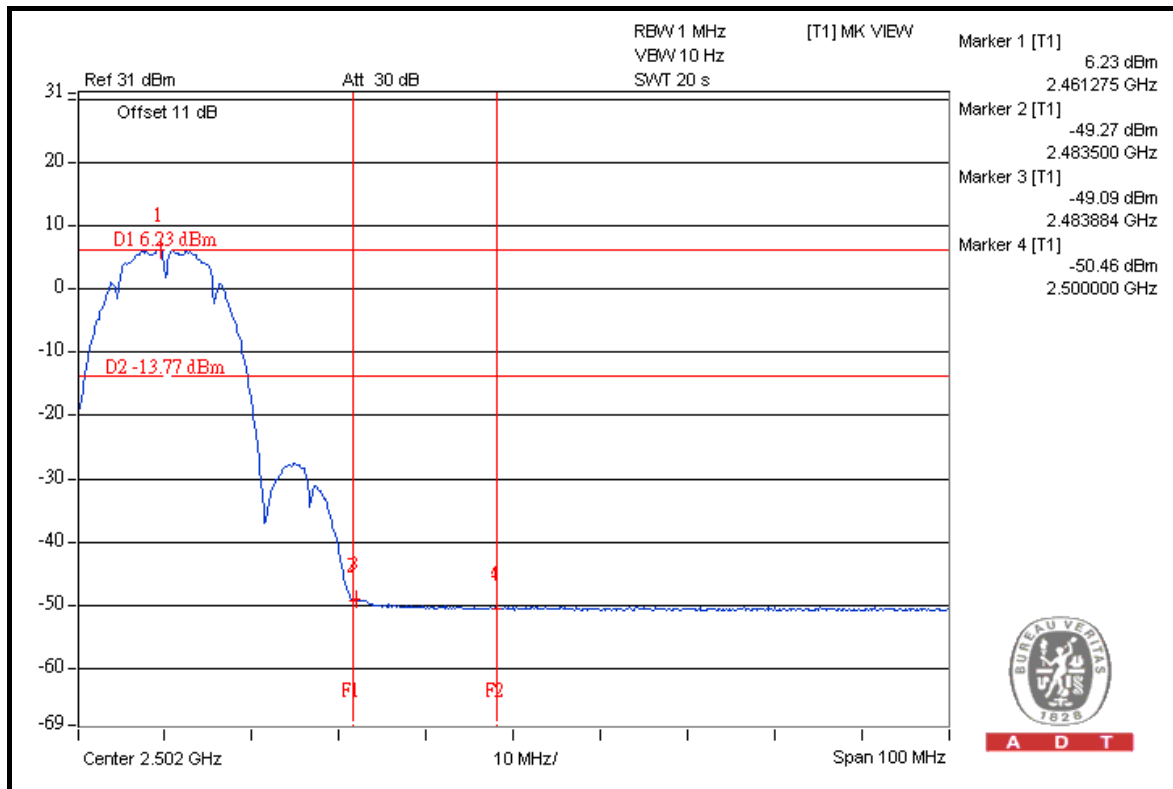

A D T

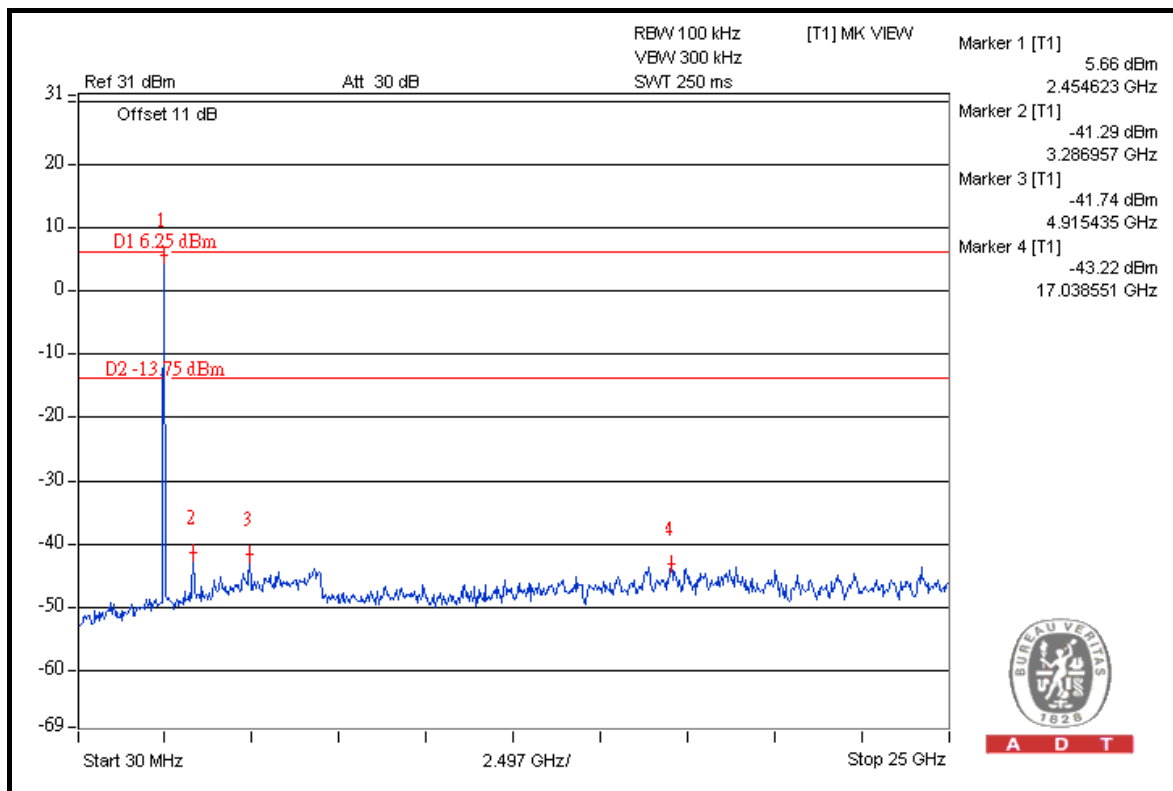

A D T

802.11g

TEST MODE A

RESTRICT BAND (2310 ~ 2390 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2412.00 (PK)	110.1	44.49	65.61	74.00
2412.00 (AV)	100.3	47.75	52.55	54.00

RESTRICT BAND (2483.5 ~ 2500 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2462.00 (PK)	109.3	44.52	64.78	74.00
2462.00 (AV)	99.5	46.55	52.95	54.00

NOTE:

1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission. Please check following 3 pages.
2. Maximum field strength in restrict band = Fundamental emission – Delta.

TEST MODE B

RESTRICT BAND (2310 ~ 2390 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2412.00 (PK)	108.2	44.49	63.71	74.00
2412.00 (AV)	98.5	47.75	50.75	54.00

RESTRICT BAND (2483.5 ~ 2500 MHz)


FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2462.00 (PK)	108.0	44.52	63.48	74.00
2462.00 (AV)	98.3	46.55	51.75	54.00

NOTE:


1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission. Please check following 3 pages.
2. Maximum field strength in restrict band = Fundamental emission – Delta.



A D T

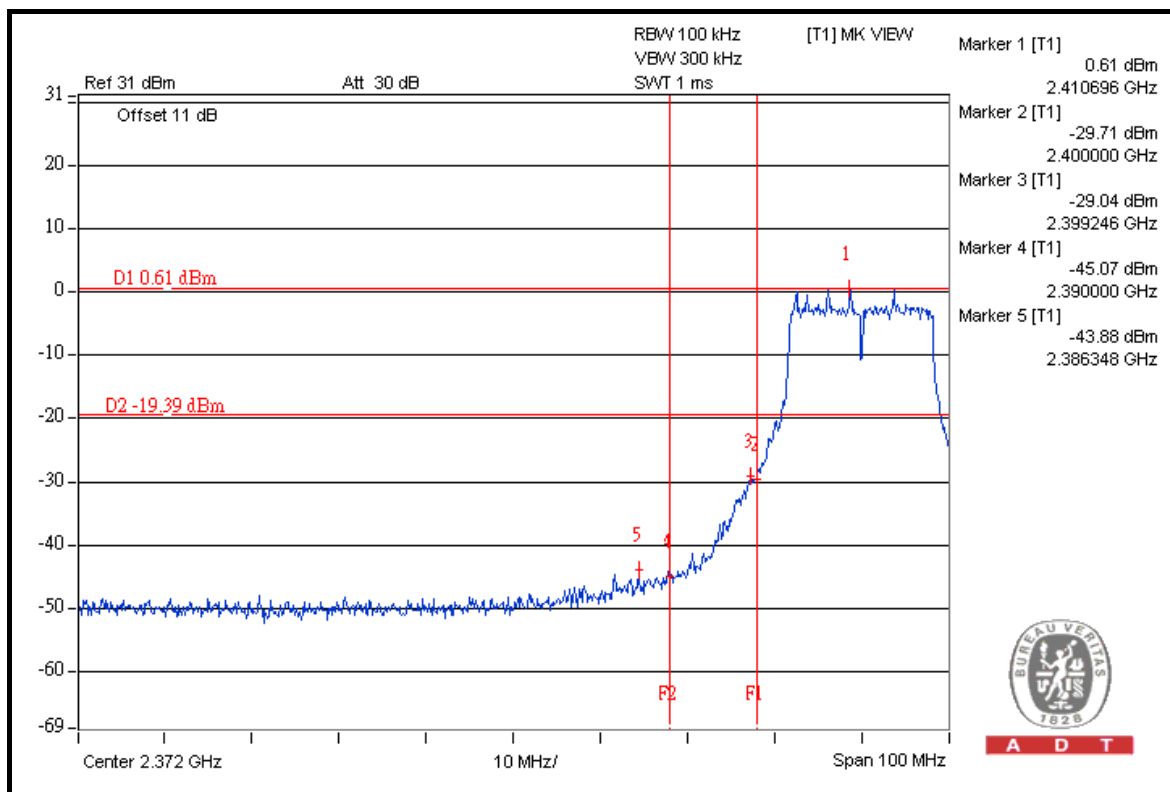



A D T

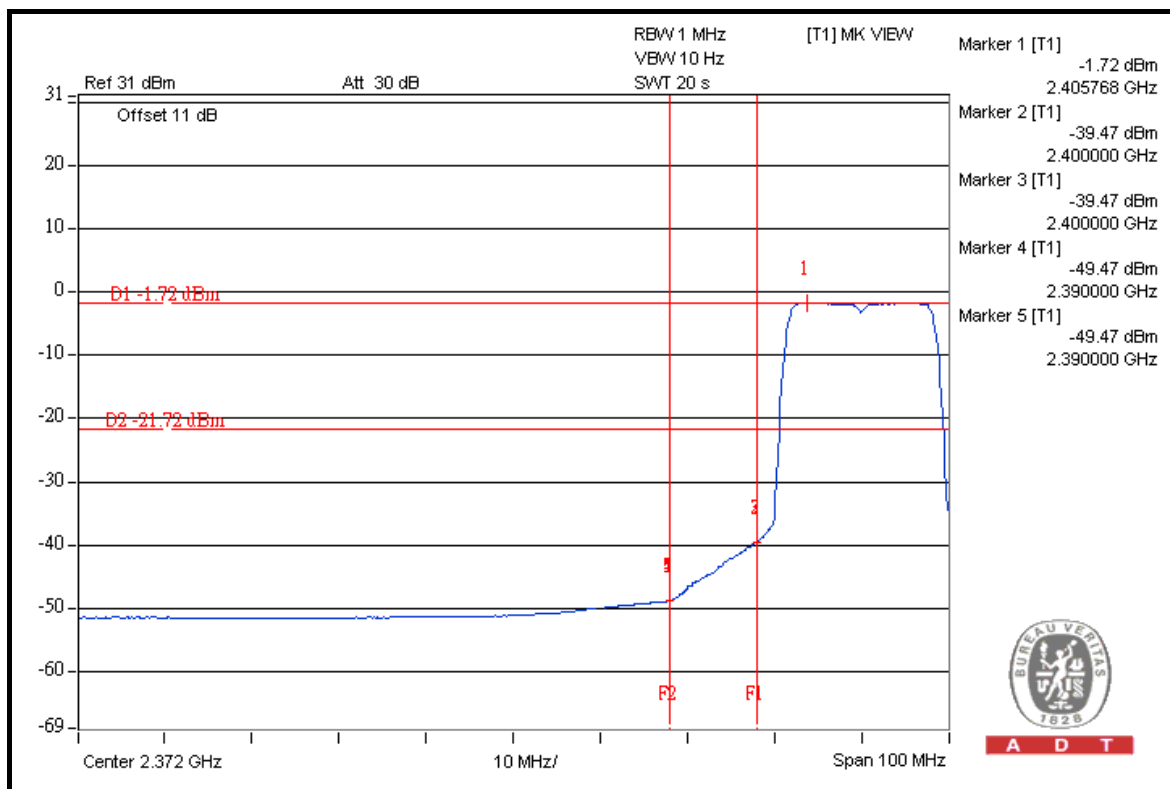

A D T



A D T

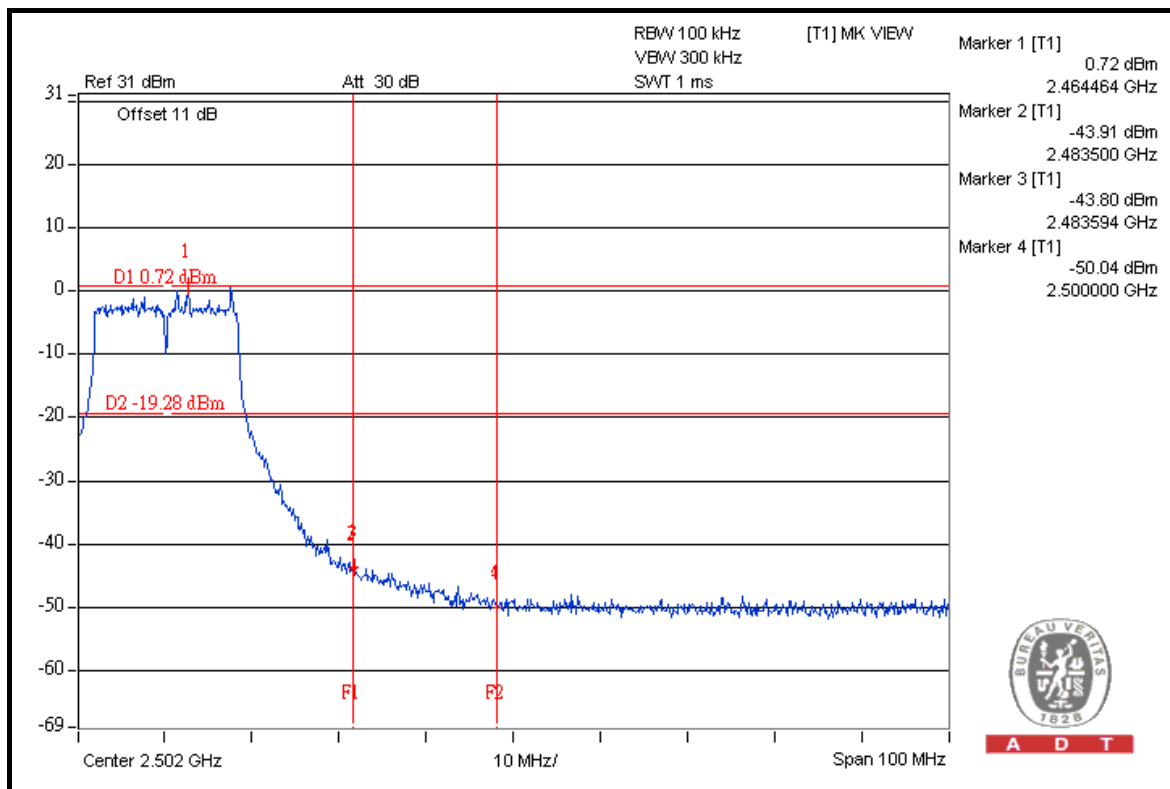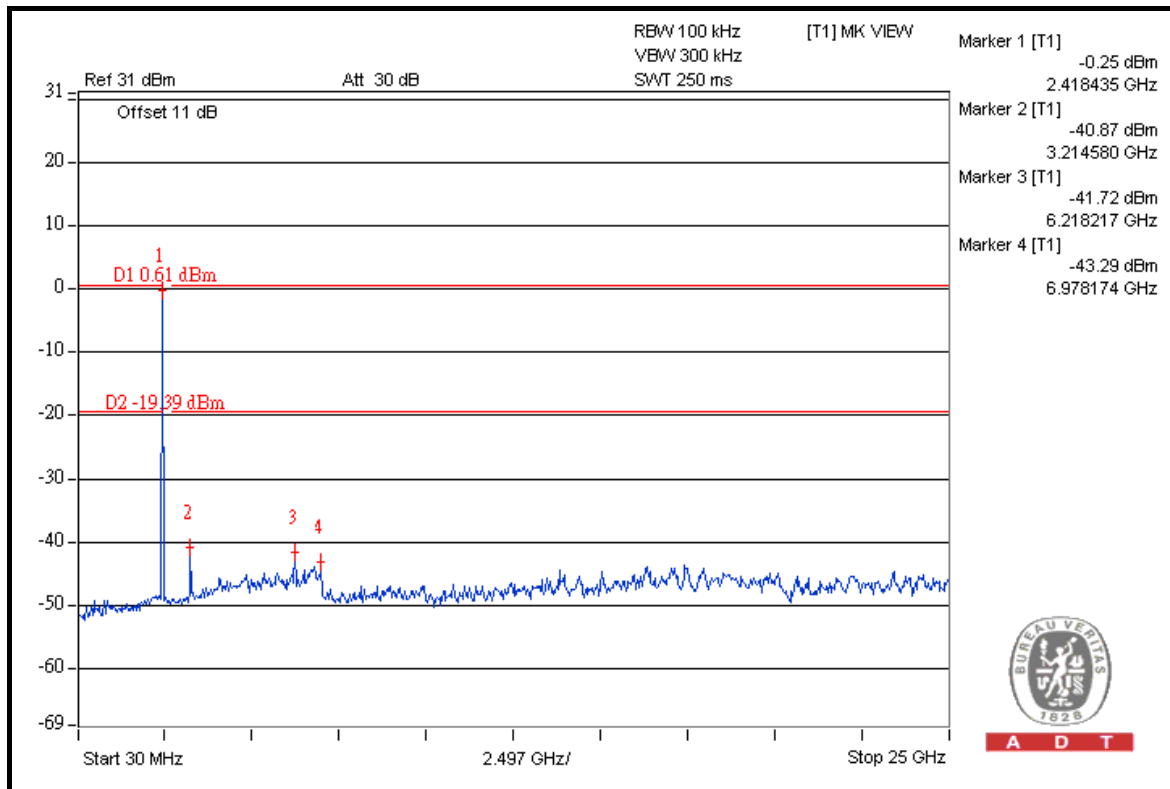



802.11n (20MHz)

TEST MODE A

RESTRICT BAND (2310 ~ 2390 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2412.00 (PK)	108.7	41.73	66.97	74.00
2412.00 (AV)	99.1	45.60	53.50	54.00

RESTRICT BAND (2483.5 ~ 2500 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2462.00 (PK)	108.1	45.19	62.91	74.00
2462.00 (AV)	98.5	45.30	53.20	54.00

NOTE:

1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission. Please check following 3 pages.
2. Maximum field strength in restrict band = Fundamental emission – Delta.

TEST MODE B

RESTRICT BAND (2310 ~ 2390 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2412.00 (PK)	107.0	41.73	65.27	74.00
2412.00 (AV)	97.2	45.60	51.60	54.00

RESTRICT BAND (2483.5 ~ 2500 MHz)


FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2462.00 (PK)	106.8	45.19	61.61	74.00
2462.00 (AV)	97.0	45.30	51.70	54.00

NOTE:


1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission.
Please check following 3 pages.
2. Maximum field strength in restrict band = Fundamental emission – Delta.



A D T

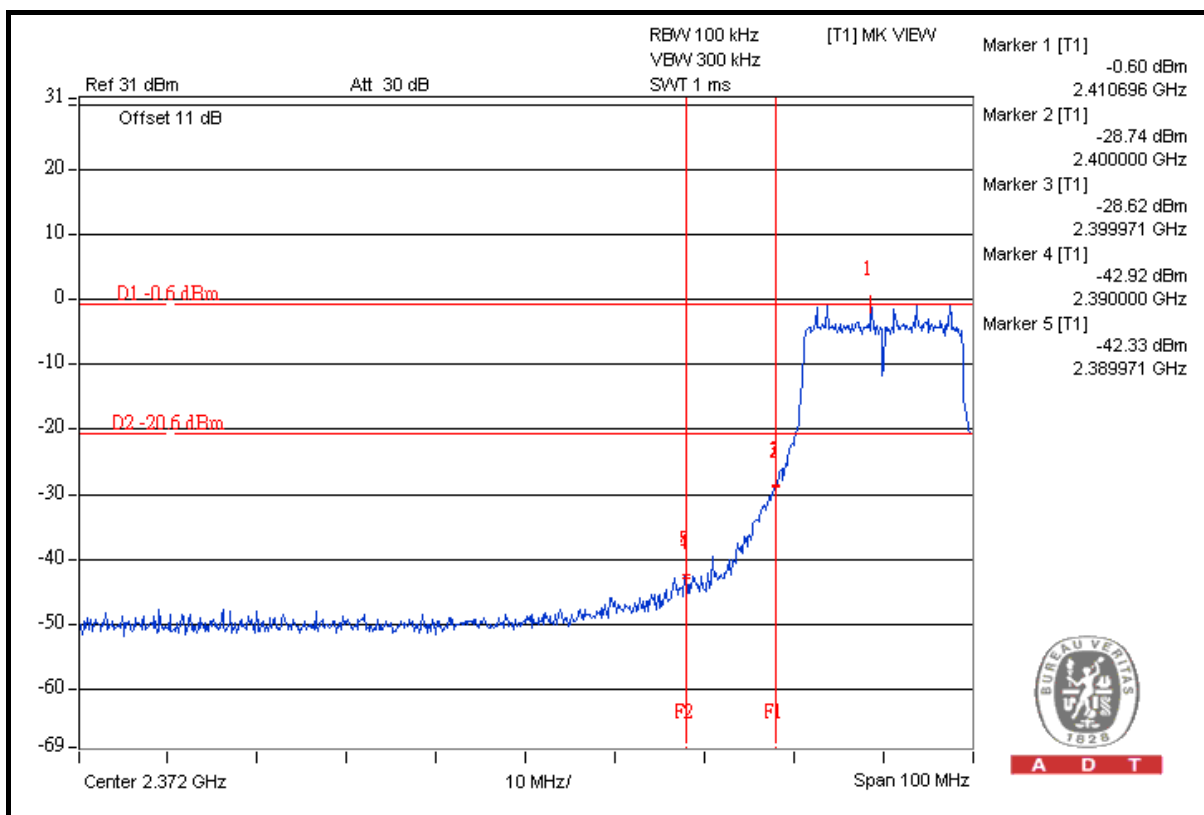


A D T

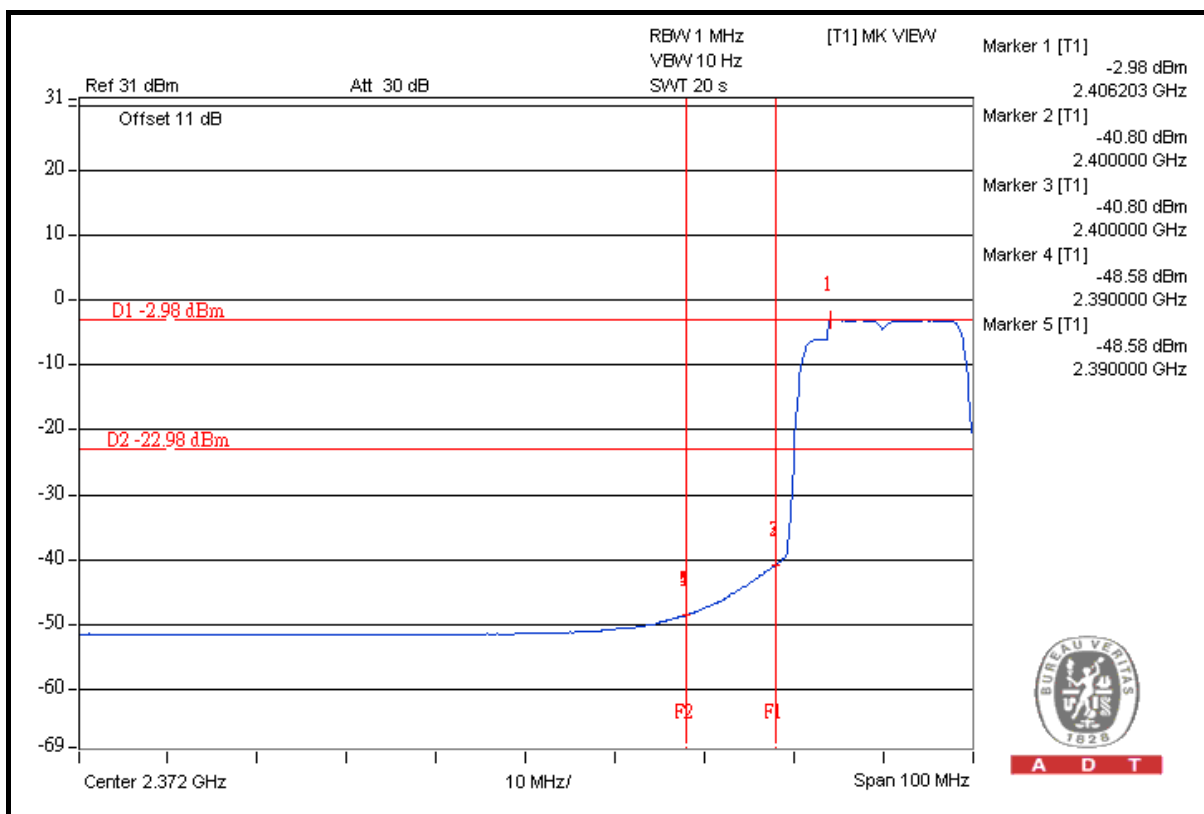


A D T



A D T

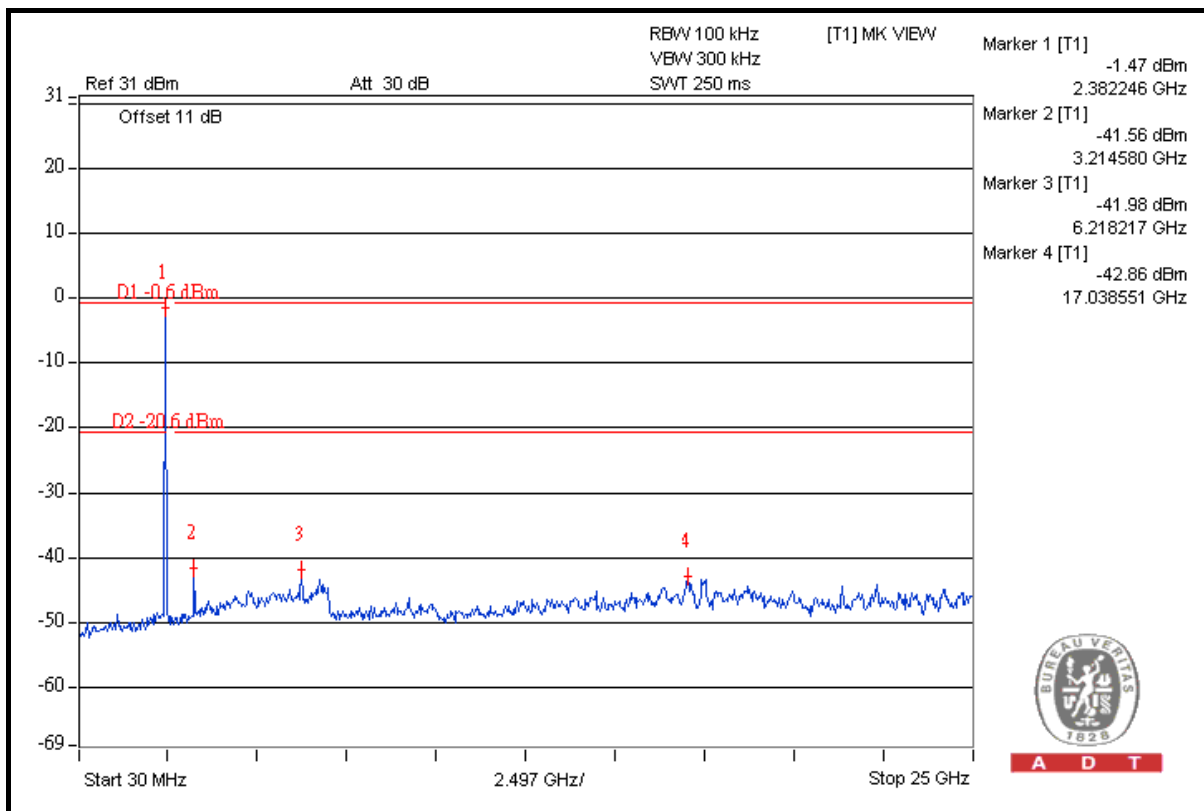



A D T

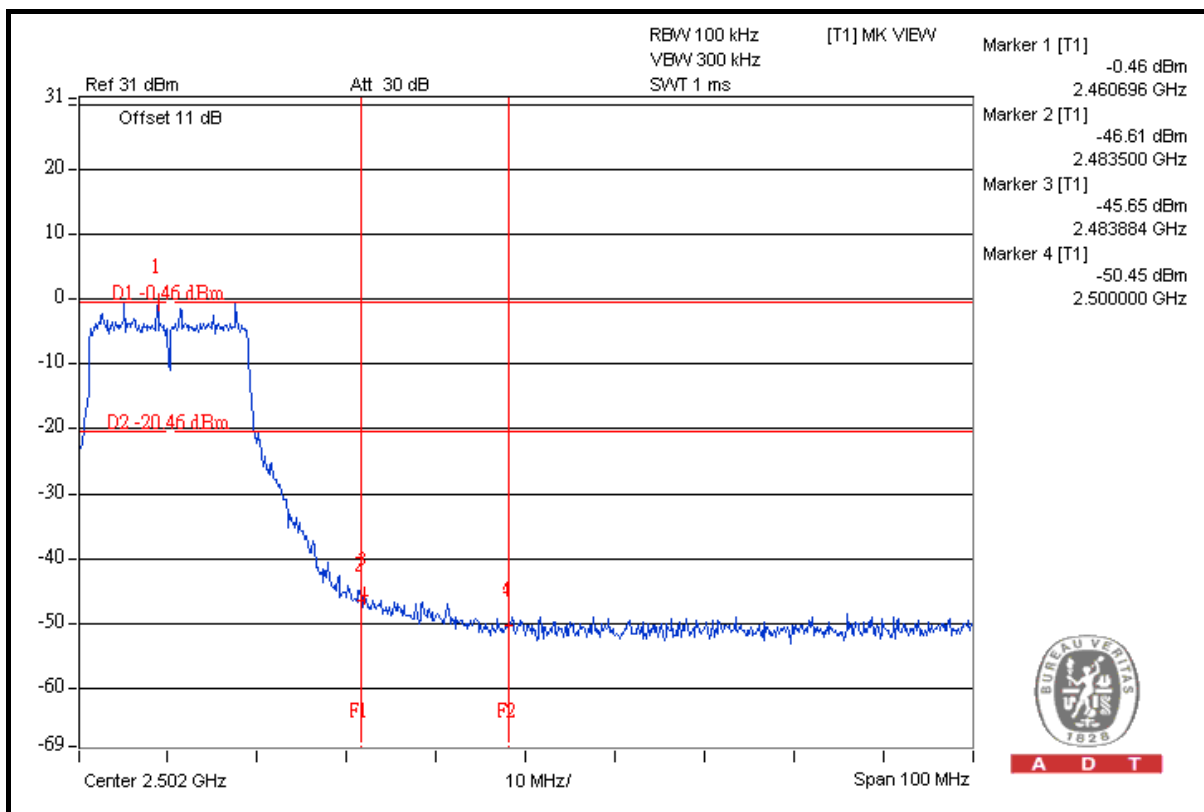

A D T



A D T

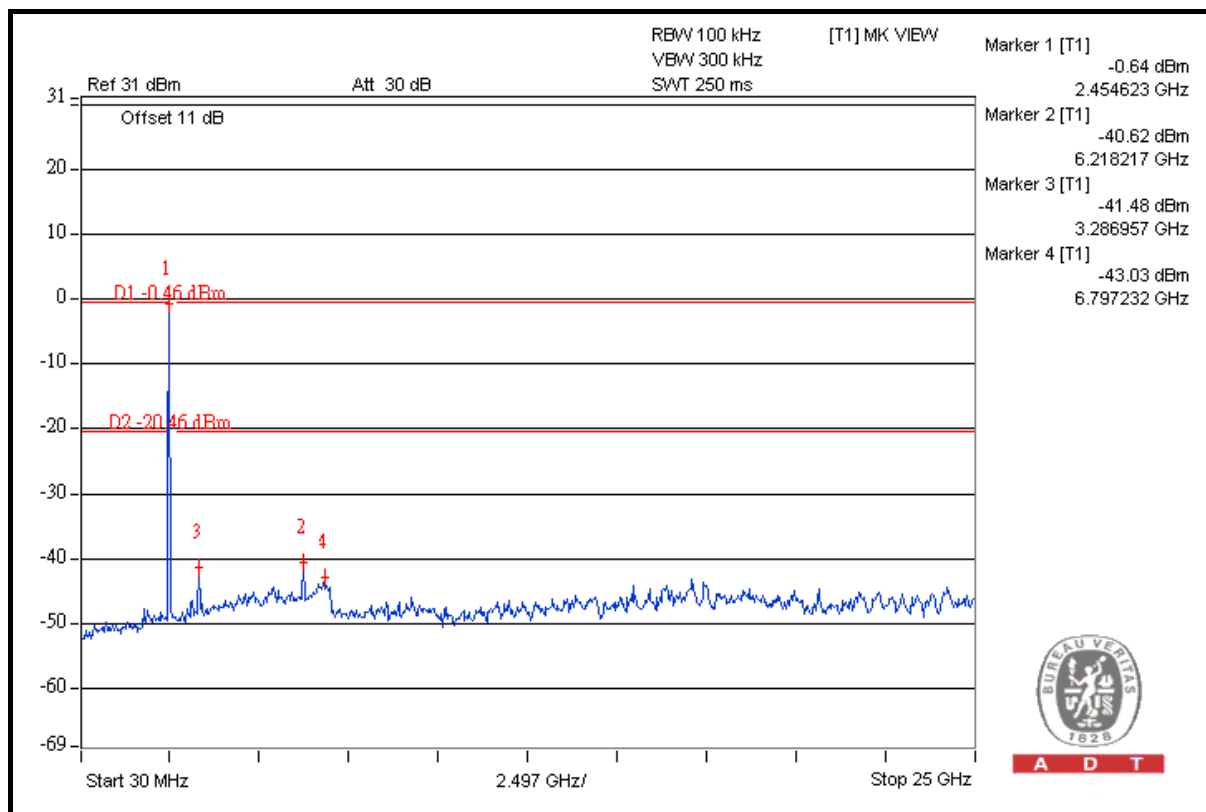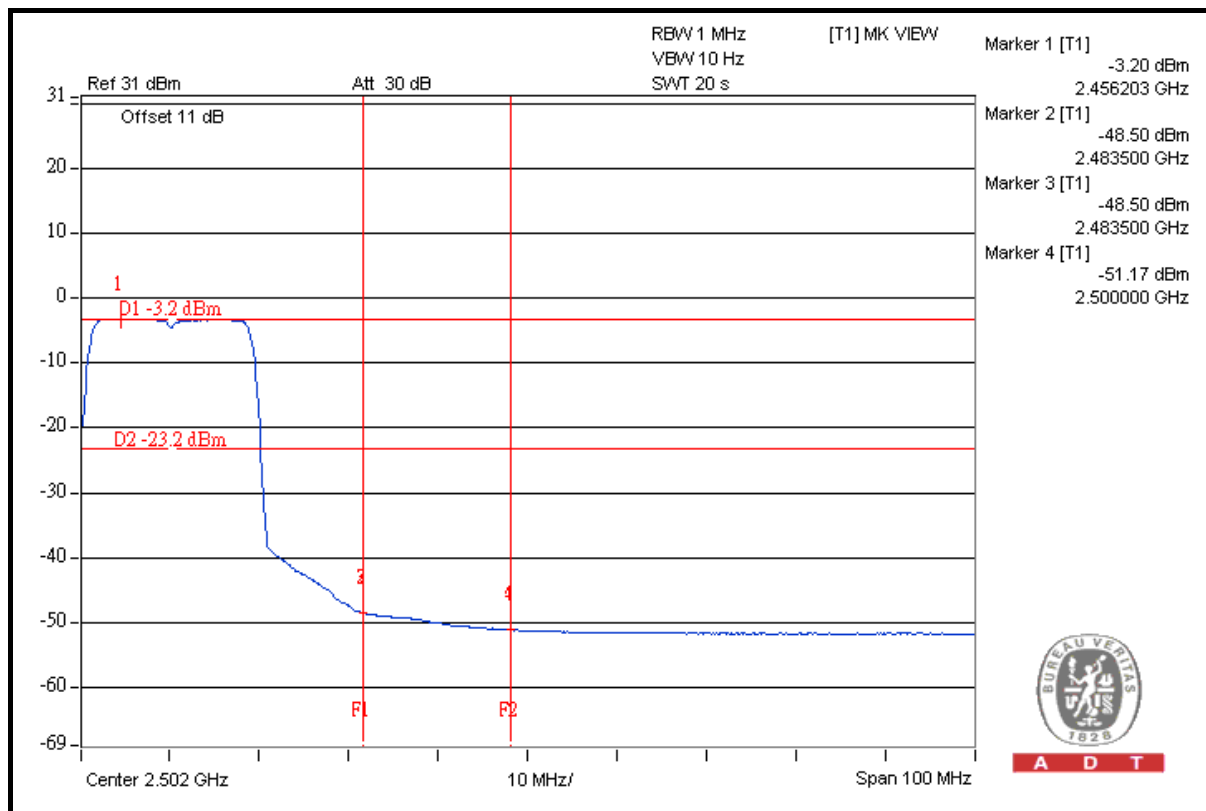

802.11n (40MHz)

TEST MODE A

RESTRICT BAND (2310 ~ 2390 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2422.00 (PK)	99.9	36.64	63.26	74.00
2422.00 (AV)	88.8	36.67	52.13	54.00

RESTRICT BAND (2483.5 ~ 2500 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2452.00 (PK)	99.2	36.33	62.87	74.00
2452.00 (AV)	88.3	36.37	51.93	54.00

NOTE:

1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission. Please check following 3 pages.
2. Maximum field strength in restrict band = Fundamental emission – Delta.

TEST MODE B

RESTRICT BAND (2310 ~ 2390 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2422.00 (PK)	99.2	36.64	62.56	74.00
2422.00 (AV)	89.4	36.67	52.73	54.00

RESTRICT BAND (2483.5 ~ 2500 MHz)


FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2452.00 (PK)	99.0	36.33	62.67	74.00
2452.00 (AV)	89.1	36.37	52.73	54.00

NOTE:


1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission.
Please check following 3 pages.
2. Maximum field strength in restrict band = Fundamental emission – Delta.



A D T

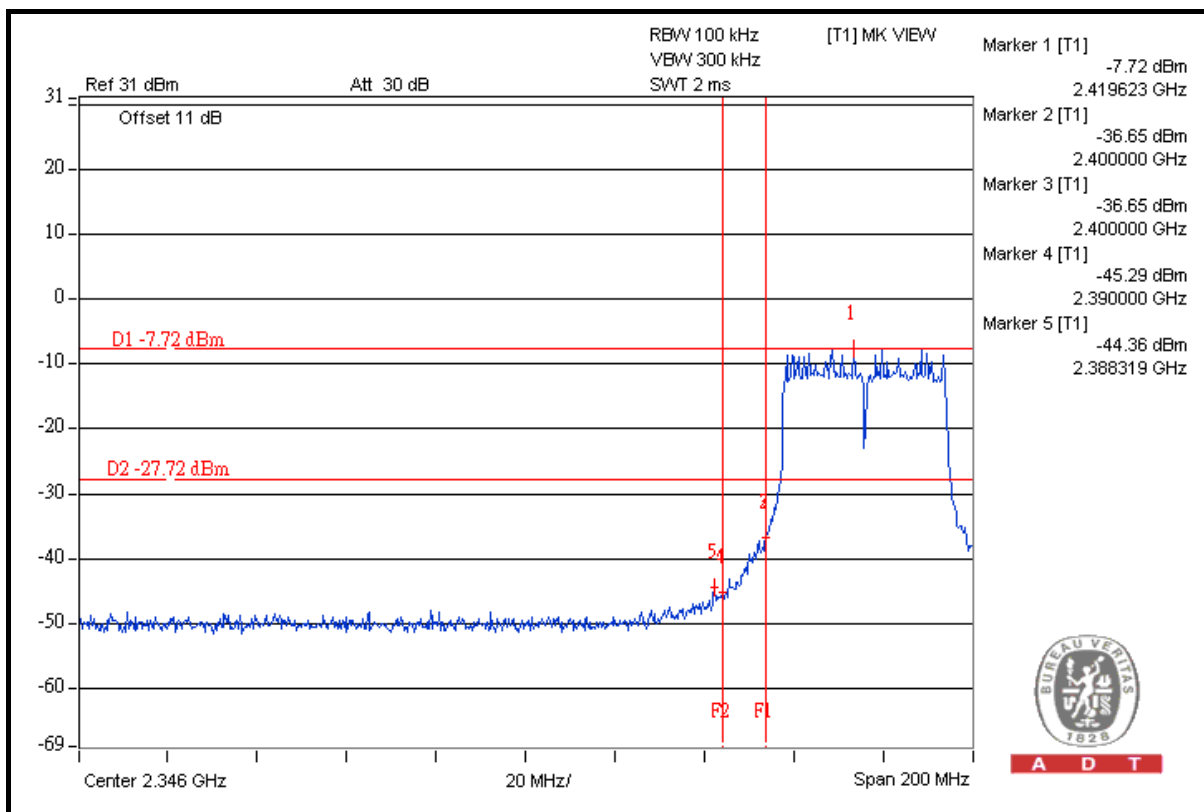


A D T

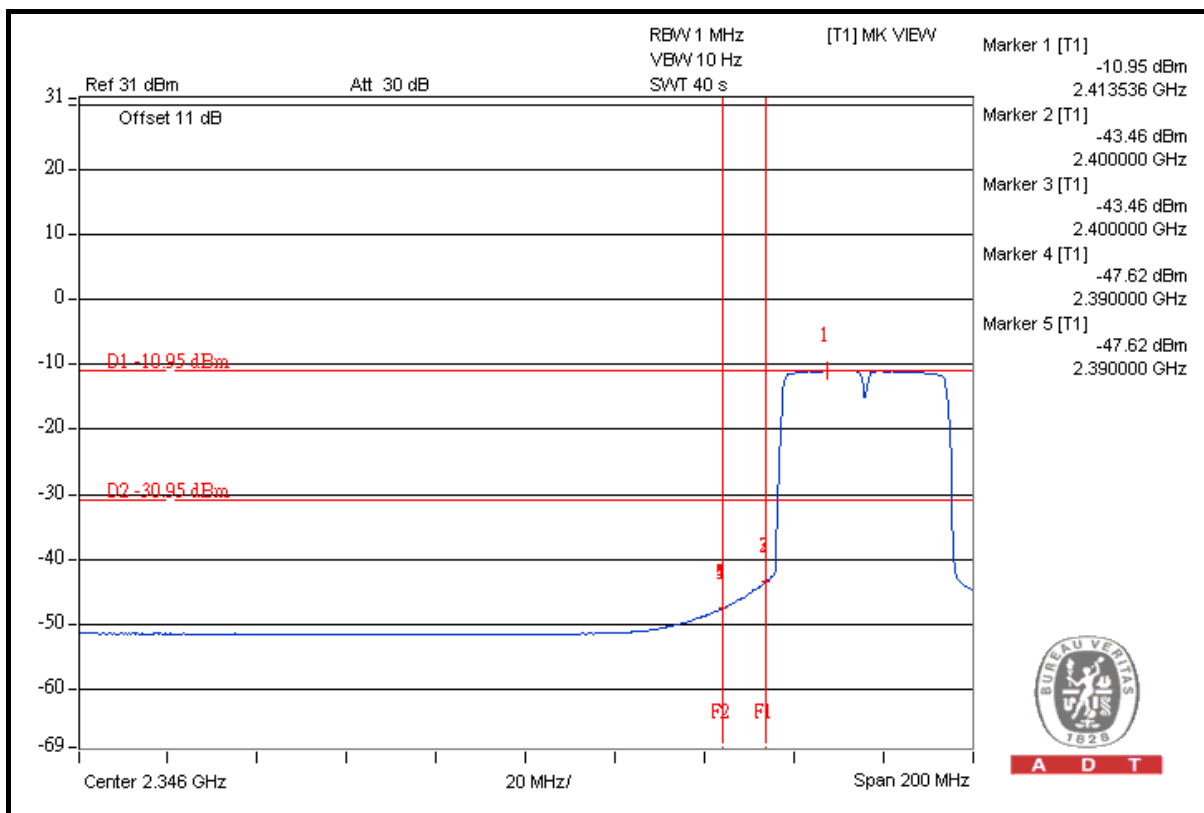


A D T



A D T

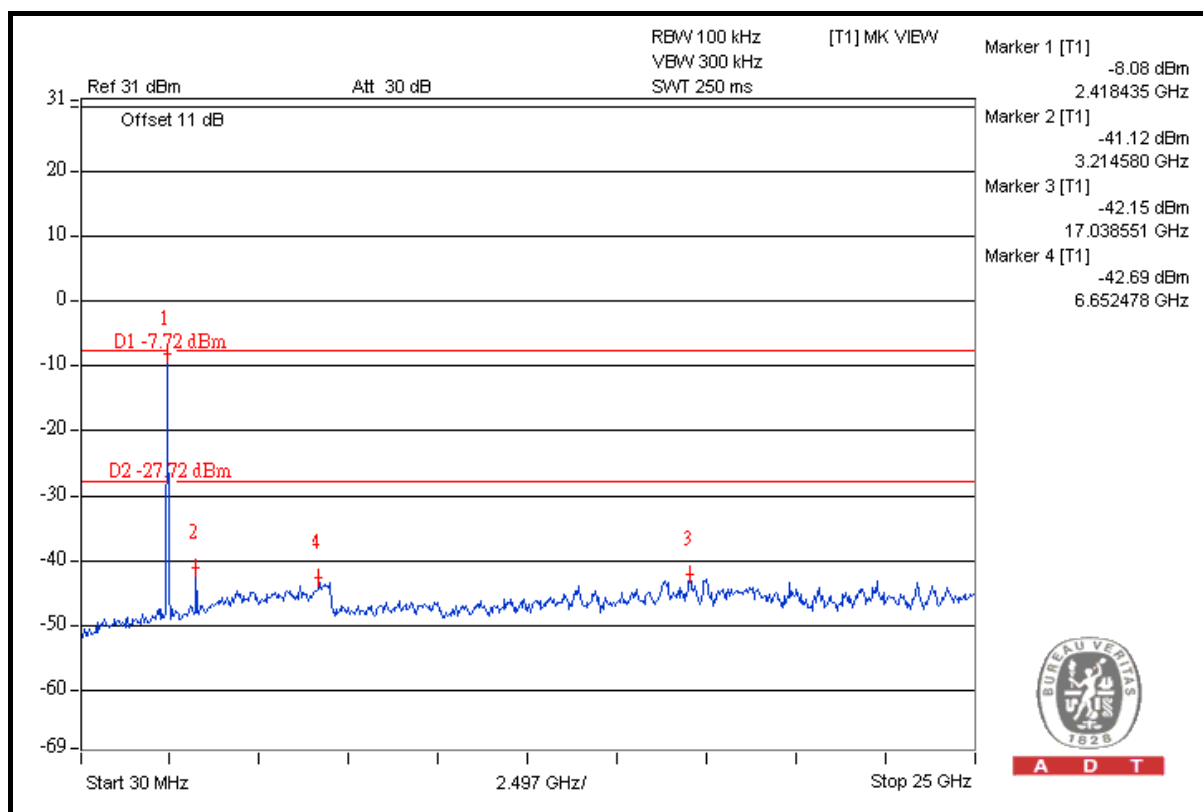



A D T

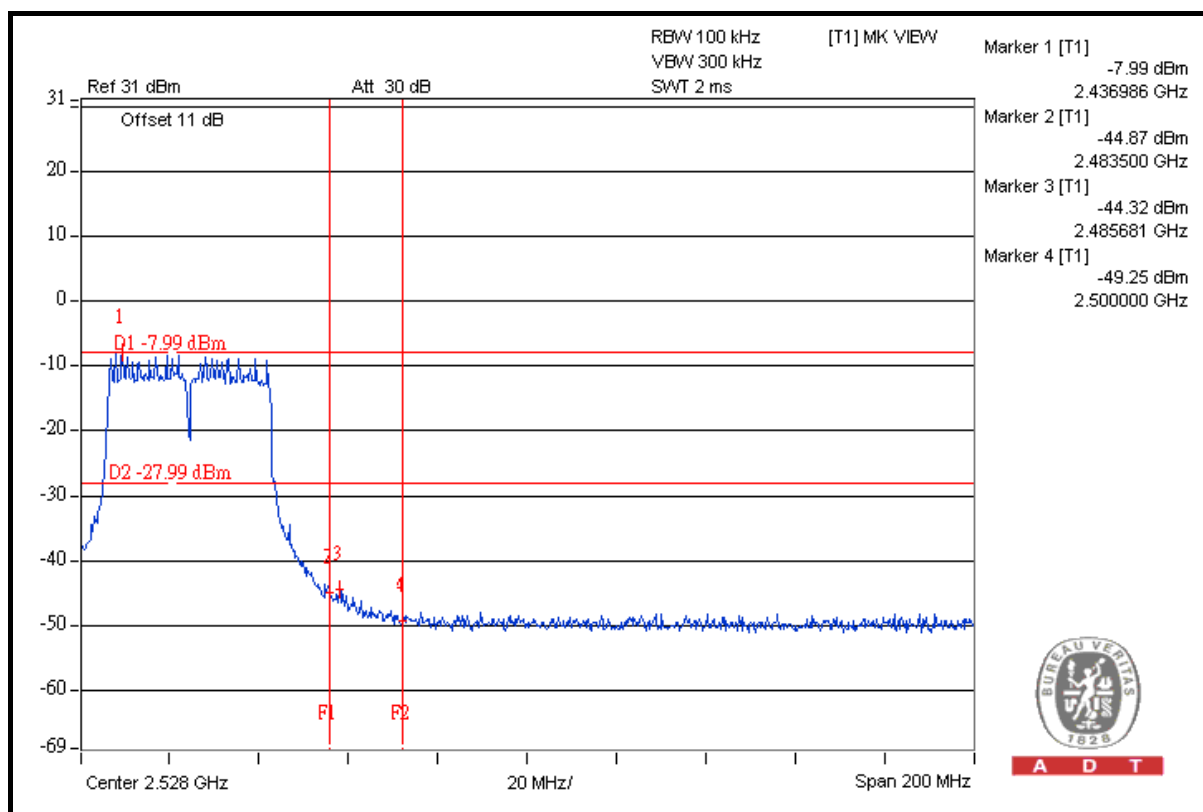

A D T



A D T

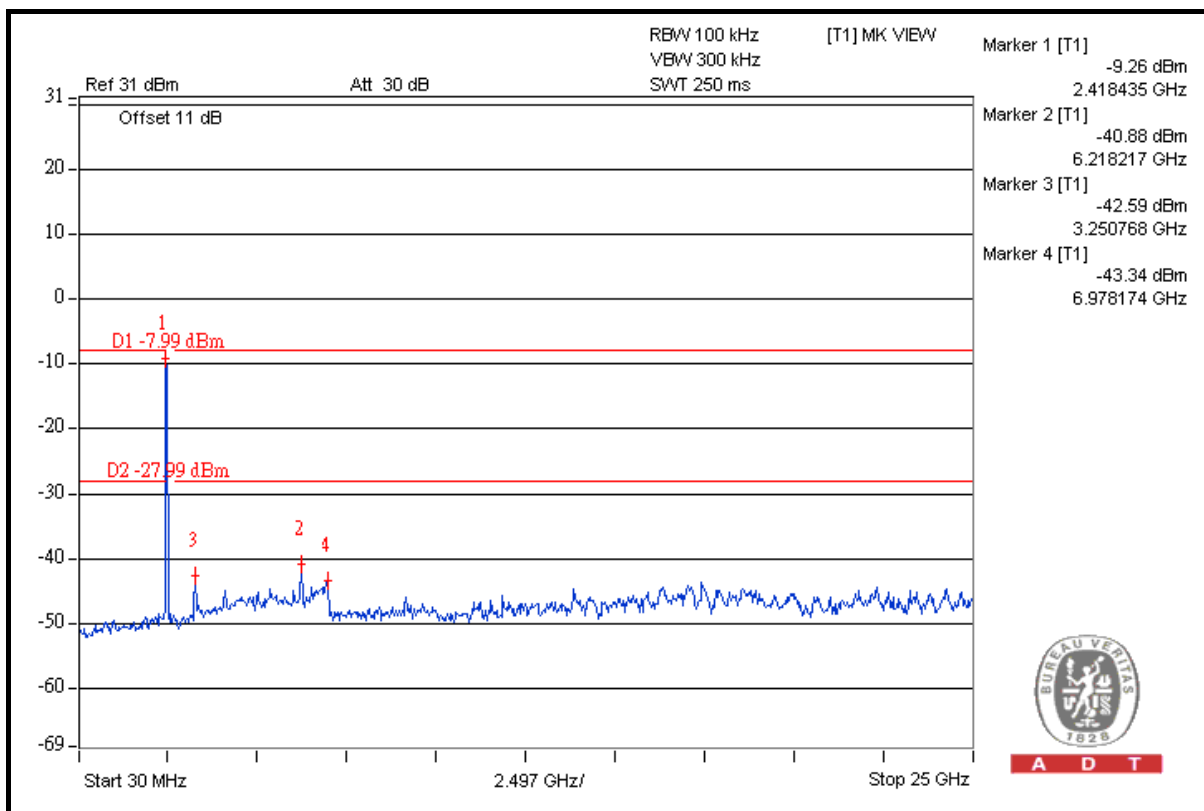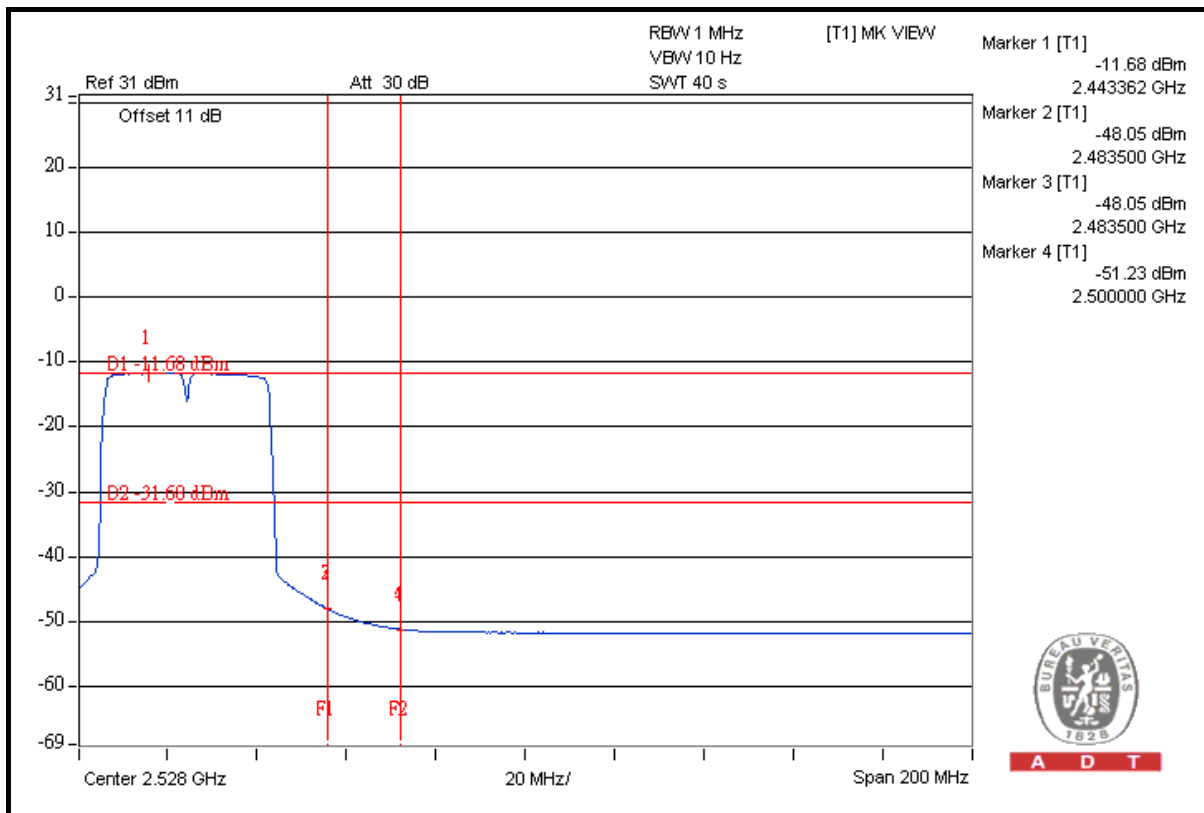

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/TPCI Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---