

FCC RF Test Report

APPLICANT : AzureWave Technologies, Inc.
EQUIPMENT : HSPA+ Mobile Router
BRAND NAME : Azurewave
MODEL NAME : WW-R20
FCC ID : TLZ-R20
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
CLASSIFICATION : PCS Licensed Transmitter (PCB)

The product was received on Jul. 05, 2012 and completely tested on Jul. 18, 2012. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-C-2004 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : TLZ-R20

Page Number : 1 of 117

Report Issued Date : Aug. 03, 2012

Report Version : Rev. 01



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test.....	5
1.4 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	6
1.5 Testing Site.....	7
1.6 Applied Standards	7
1.7 Ancillary Equipment List.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System	10
3 TEST RESULT	11
3.1 Conducted Output Power Measurement.....	11
3.2 Peak-to-Average Ratio	13
3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement	29
3.4 Occupied Bandwidth and 26dB Bandwidth Measurement.....	35
3.5 Band Edge Measurement.....	59
3.6 Conducted Spurious Emission Measurement.....	74
3.7 Field Strength of Spurious Radiation Measurement	93
3.8 Frequency Stability Measurement.....	110
4 LIST OF MEASURING EQUIPMENTS.....	116
5 UNCERTAINTY OF EVALUATION	117
APPENDIX A. PHOTOGRAPHS OF EUT	
APPENDIX B. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG270532	Rev. 01	Initial issue of report	Aug. 03, 2012

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	§2.1046	N/A	Conducted Output Power	N/A	PASS	-
3.2	§24.232(d) §27.50(d)(5)	N/A	Peak-to-Average Ratio	< 13 dB	PASS	-
3.3	§22.913(a)(2)	RSS-132(4.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts	PASS	-
3.3	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.3	§27.50(d)(4)	RSS-139 (6.4) SRSP-513(5.1.2)	Equivalent Isotropic Radiated Power	< 1 Watts	PASS	-
3.4	§2.1049 §22.917(a) §24.238(a) §27.53(g)	N/A	Occupied Bandwidth	N/A	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a) §27.53(g)	RSS-132 (4.5.1) RSS-133 (6.5.1) RSS-139 (6.5)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS	-
3.6	§2.1051 §22.917(a) §24.238(a) §27.53(g)	RSS-132 (4.5.1) RSS-133 (6.5.1) RSS-139 (6.5)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
3.7	§2.1053 §22.917(a) §24.238(a) §27.53(g)	RSS-132 (4.5.1) RSS-133 (6.5.1) RSS-139 (6.5)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 10.63 dB at 1672.000 MHz
3.8	§2.1055 §22.355 §24.235 §27.54	RSS-132 (4.3) RSS-133 (6.3) RSS-139 (6.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-

1 General Description

1.1 Applicant

AzureWave Technologies, Inc.

8F., No. 94, Baozhong Rd., Xindian Dist., New Taipei City 231, Taiwan (R.O.C.)

1.2 Manufacturer

AzureWave Technologies, Inc.

8F., No. 94, Baozhong Rd., Xindian Dist., New Taipei City 231, Taiwan (R.O.C.)

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	HSPA+ Mobile Router
Brand Name	Azurewave
Model Name	WW-R20
FCC ID	TLZ-R20
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA WLAN 11bgn
HW Version	v.04
SW Version	1.0.5.3
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Product Specification subjective to this standard	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II : 1932.4 MHz ~ 1987.6 MHz
Maximum Output Power to Antenna	GSM850 : 32.94 dBm GSM1900 : 30.10 dBm WCDMA Band V : 22.87 dBm WCDMA Band IV : 23.71 dBm WCDMA Band II : 23.54 dBm
Antenna Type	Fixed Internal Antenna
Type of Modulation	GPRS: GMSK EDGE: 8PSK WCDMA: QPSK (Uplink) HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink)

1.4 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (% , Hz, ppm)	Emission Designator
Part 22	GSM850 GPRS 8	GMSK	0.1493	0.07 ppm	250KGXW
Part 22	GSM850 EDGE 8	GMSK / 8PSK	0.0421	0.07 ppm	252KG7W
Part 22	WCDMA Band V RMC 12.2Kbps	QPSK	0.0227	0.03 ppm	4M20F9W
Part 24	GSM1900 GPRS 8	GMSK	0.6657	0.04 ppm	248KGXW
Part 24	GSM1900 EDGE 8	GMSK / 8PSK	0.3718	0.04 ppm	248KG7W
Part 24	WCDMA Band II RMC 12.2Kbps	QPSK	0.1426	0.01 ppm	4M22F9W
Part 27	WCDMA Band IV RMC 12.2Kbps	QPSK	0.2344	0.01 ppm	4M22F9W

1.5 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	TH02-HY	03CH05-HY	722060/4086B-1

1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ Preliminary Guidance for Receiving Applications for Certification of 3G Device. May 9, 2006.
- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v01
- ♦ IC RSS-132 Issue 2
- ♦ IC RSS-133 Issue 5
- ♦ IC RSS-139 Issue 2

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.7 Ancillary Equipment List

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU200	N/A	N/A	Unshielded, 1.8 m
2.	AC Adapter	Amigo	AMS47-0501000FU	N/A	N/A	N/A

Remark: Adapter is only for testing.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Frequency range investigated for radiated emission is as follows:

1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 18000 MHz for WCDMA Band IV.
3. 30 MHz to 19000 MHz for GSM1900 and WCDMA Band II.

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GPRS 8 Link ■ EDGE 8 Link	■ GPRS 8 Link ■ EDGE 8 Link
GSM 1900	■ GPRS 8 Link ■ EDGE 8 Link	■ GPRS 8 Link ■ EDGE 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

Note:


1. The maximum power levels are GPRS multi-slot class 8 mode for GMSK link, EDGE multi-slot class 8 mode for 8PSK link, RMC 12.2Kbps mode for WCDMA band V, RMC 12.2Kbps mode for WCDMA band IV, and RMC 12.2Kbps mode for WCDMA band II, only these modes were used for all tests.
2. Because there are individual antennas for each WWAN, and WLAN, the co-location test modes are not required.

The conducted power tables are as follows:

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880	1909.8
GPRS 8	32.94	32.93	32.93	30.10	30.05	30.00
GPRS 10	30.08	29.98	29.99	27.24	27.08	27.12
GPRS 12	27.14	27.07	27.08	24.28	24.13	24.22
EGPRS 8	27.18	27.10	27.11	26.30	26.17	26.22
EGPRS 10	27.18	27.10	27.11	26.30	26.16	26.22
EGPRS 12	25.25	25.17	25.18	24.24	24.10	24.16

Conducted Power (*Unit: dBm)									
Band	WCDMA Band V			WCDMA Band II			WCDMA Band IV		
Tx Channel	4132	4182	4233	9262	9400	9538	1312	1413	1513
Rx Channel	4357	4408	4458	9662	9800	9938	1537	1638	1738
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
RMC 12.2K	22.74	22.87	22.80	23.54	22.63	22.52	23.71	23.55	23.64
HSDPA Subtest-1	21.90	22.02	21.98	22.79	21.84	21.73	22.95	22.77	22.89
HSDPA Subtest-2	21.86	21.98	21.93	22.78	21.84	21.72	22.92	22.76	22.86
HSDPA Subtest-3	21.35	21.47	21.41	22.26	21.34	21.21	22.40	22.31	22.36
HSDPA Subtest-4	21.34	21.46	21.40	22.28	21.35	21.22	22.41	22.30	22.37
HSUPA Subtest-1	21.93	22.09	22.04	22.95	22.01	21.96	23.08	22.98	23.04
HSUPA Subtest-2	19.94	20.09	20.02	20.98	20.12	20.05	21.09	21.04	21.07
HSUPA Subtest-3	20.92	21.07	21.02	21.99	21.11	21.03	22.11	22.04	22.07
HSUPA Subtest-4	19.96	20.08	20.02	21.02	20.14	20.07	21.11	21.09	21.11
HSUPA Subtest-5	21.73	21.84	21.81	22.77	21.88	21.79	22.88	22.83	22.94

2.2 Connection Diagram of Test System

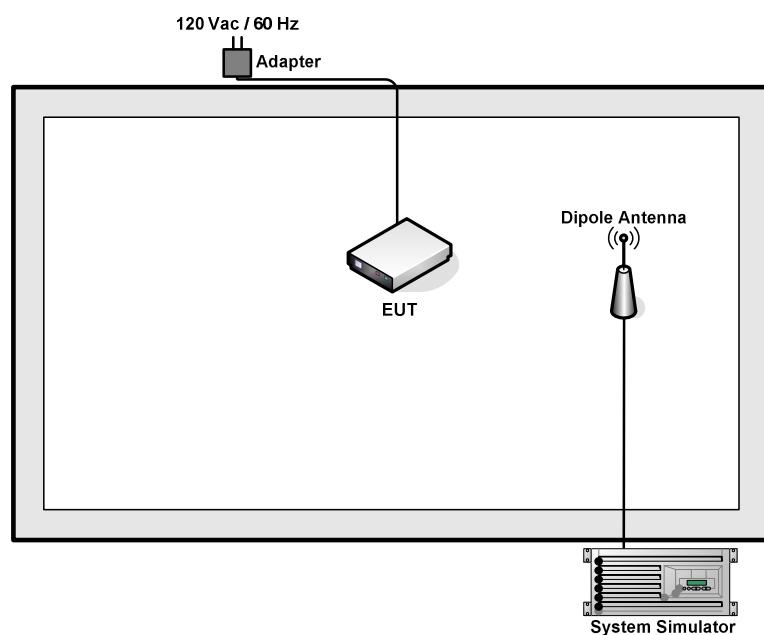

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Compare each band and different modulation combination to show the worst data rate.

3.1.4 Test Setup

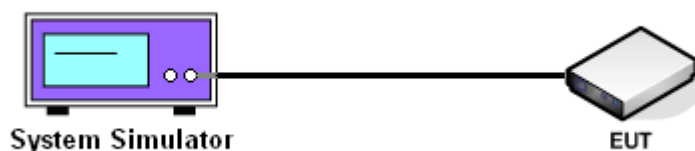

3.1.5 Test Result of Conducted Output Power

Cellular Band									
Modes	GSM850 (GPRS 8)			GSM850 (EDGE 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Conducted Power (dBm)	32.94	32.93	32.93	27.18	27.10	27.11	22.74	22.87	22.80
Conducted Power (Watts)	1.97	1.96	1.96	0.52	0.51	0.51	0.19	0.19	0.19

PCS Band									
Modes	GSM1900 (GPRS 8)			GSM1900 (EDGE 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Conducted Power (dBm)	30.10	30.05	30.00	26.30	26.17	26.22	23.54	22.63	22.52
Conducted Power (Watts)	1.02	1.01	1.00	0.43	0.41	0.42	0.23	0.18	0.18

AWS Band			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312(Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
Conducted Power (dBm)	23.71	23.55	23.64
Conducted Power (Watts)	0.23	0.23	0.23

Note: maximum burst average power for GSM, and maximum average power for WCDMA.

3.2 Peak-to-Average Ratio

3.2.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. The following guidelines are offered for performing a CCDF measurement.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The CCDF (Complementary Cumulative Distribution Function) of the middle channel for the highest RF powers were measured.

3.2.4 Test Setup

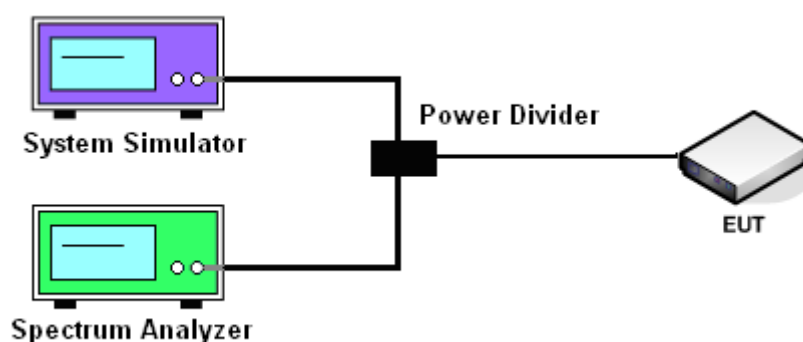

3.2.5 Test Result of Peak-to-Average Ratio

Cellular Band									
Modes	GSM850 (GPRS 8)			GSM850 (EDGE 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Peak-to-Average Ratio (dB)	0.07	0.09	0.10	0.45	0.52	0.43	3.20	2.76	3.32


PCS Band									
Modes	GSM1900 (GPRS 8)			GSM1900 (EDGE 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Peak-to-Average Ratio (dB)	0.04	0.06	0.05	0.40	0.44	0.45	2.96	3.20	3.36

AWS Band			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312(Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
Peak-to-Average Ratio (dB)	3.08	2.76	2.92

3.2.6 Test Result (Plots) of Peak-to-Average Ratio


Band :	GSM 850	Test Mode :	GPRS 8 Link
--------	---------	-------------	-------------

Peak-to-Average Ratio on Channel 128 (824.2 MHz)

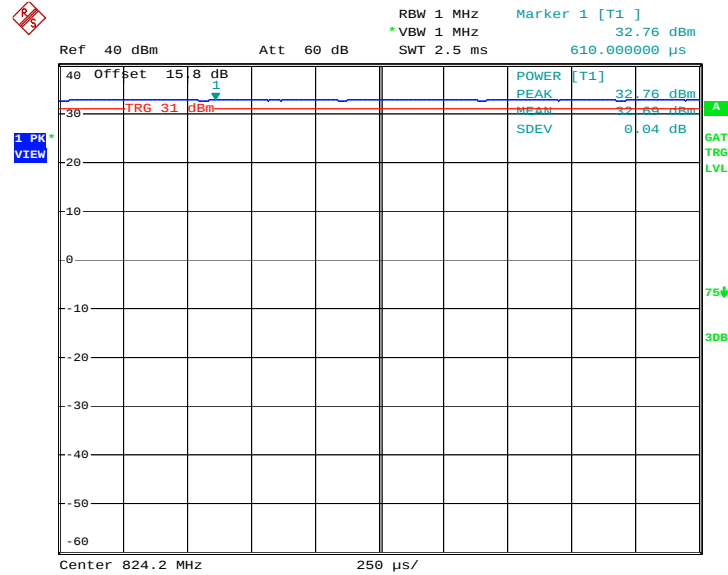

Date: 14.JUL.2012 22:17:16


Peak-to-Average Ratio on Channel 189 (836.4 MHz)

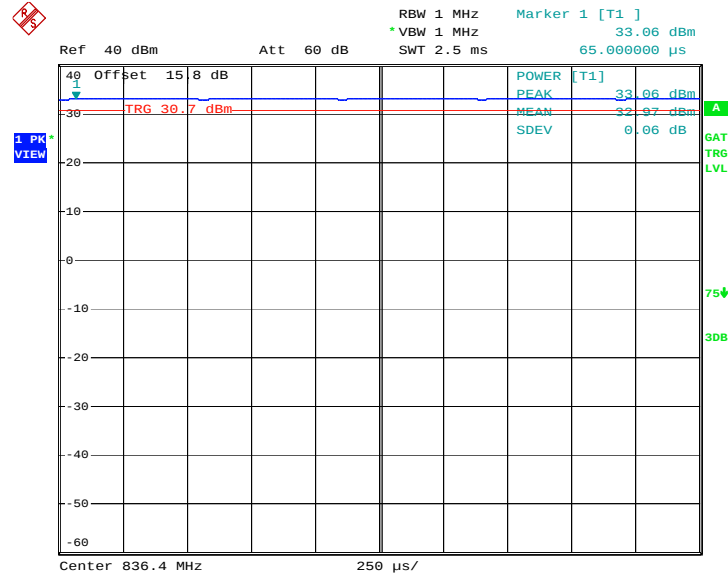

Date: 14.JUL.2012 22:16:20



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

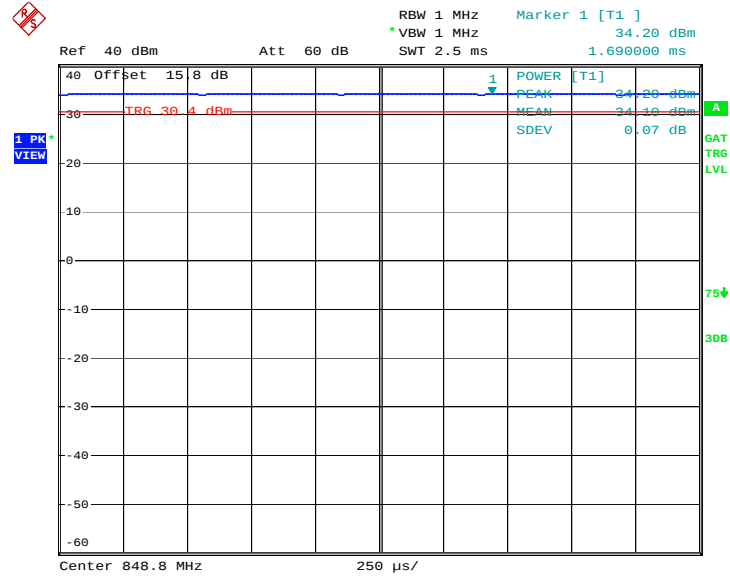


Date: 14.JUL.2012 22:15:41




Band :	GSM 850	Test Mode :	EDGE 8 Link
--------	---------	-------------	-------------

Peak-to-Average Ratio on Channel 128 (824.2 MHz)

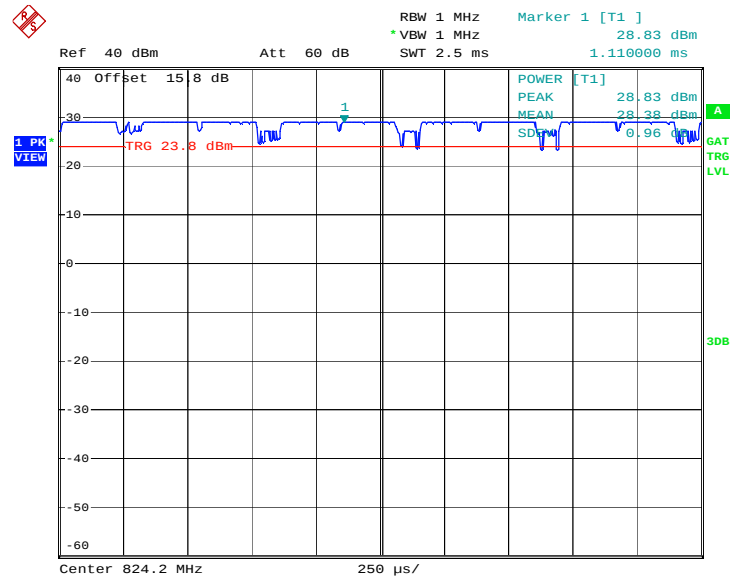

Date: 15.JUL.2012 04:04:22


Peak-to-Average Ratio on Channel 189 (836.4 MHz)

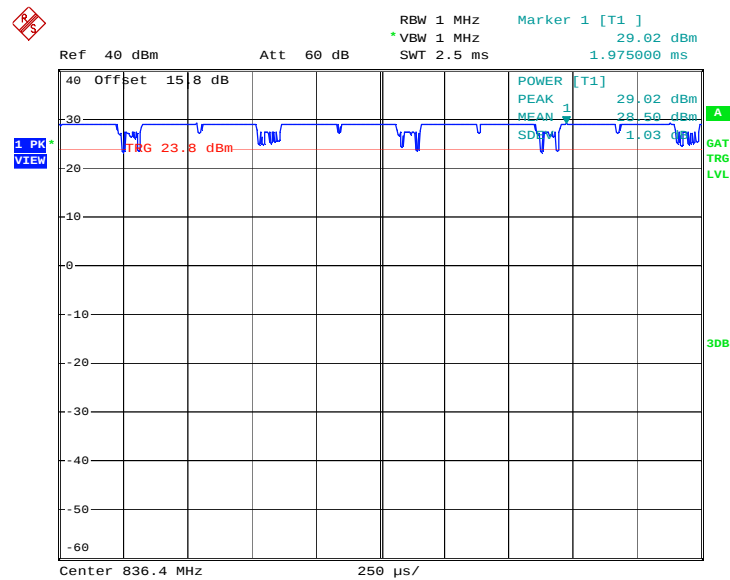

Date: 15.JUL.2012 04:03:04



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

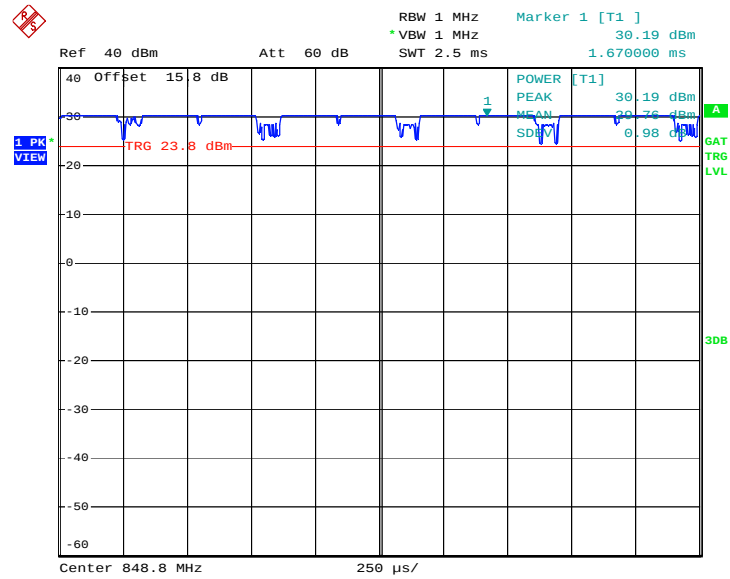


Date: 15.JUL.2012 04:04:48




Band :	GSM 1900	Test Mode :	GPRS 8 Link
--------	----------	-------------	-------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

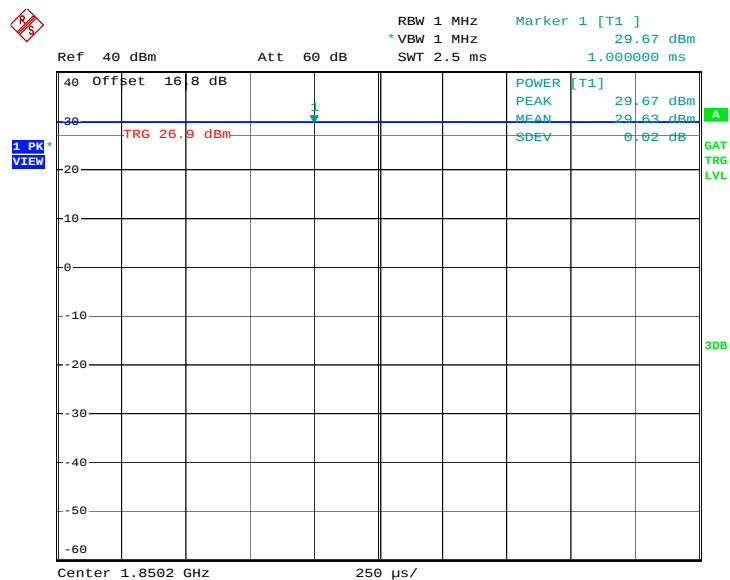

Date: 15.JUL.2012 01:28:22


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

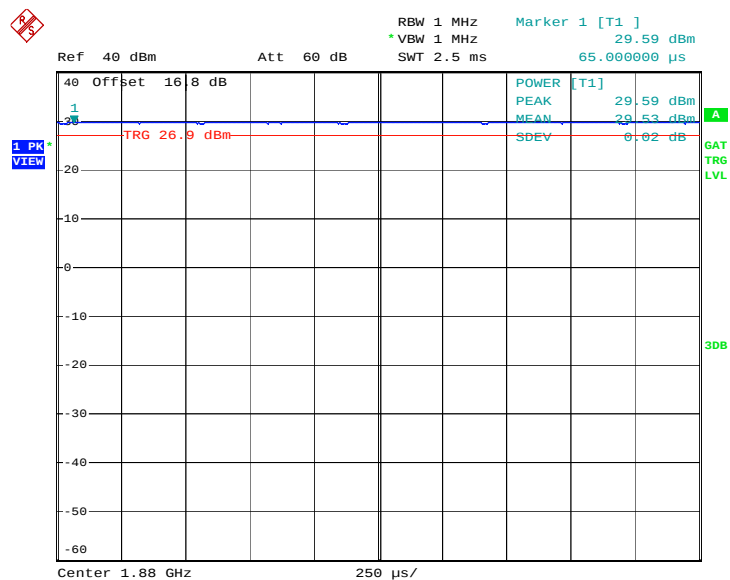

Date: 15.JUL.2012 01:27:56



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

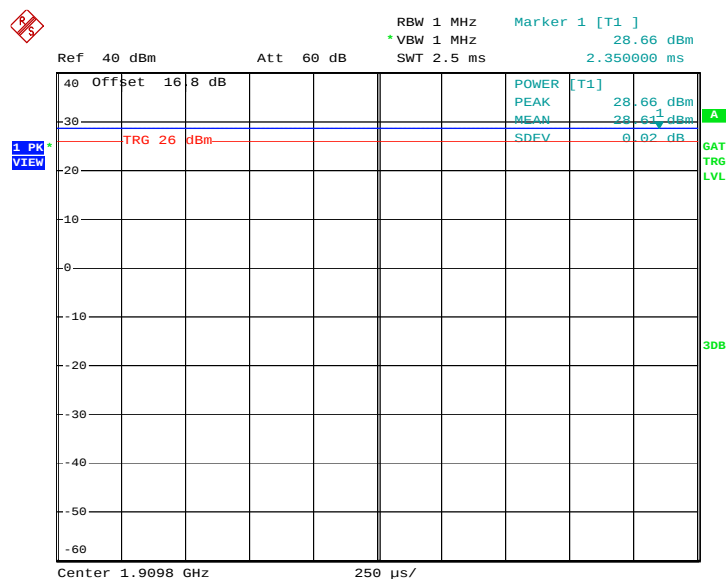


Date: 15.JUL.2012 01:27:25




Band :	GSM 1900	Test Mode :	EDGE 8 Link
--------	----------	-------------	-------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

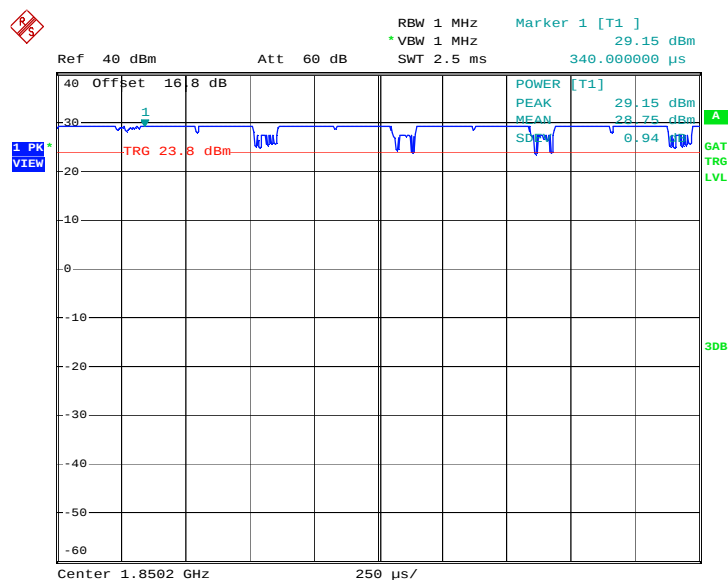

Date: 15.JUL.2012 03:51:46


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

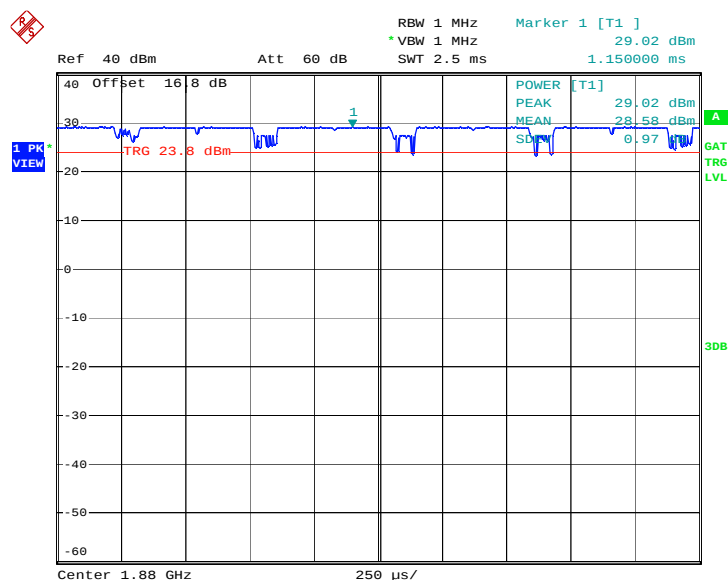

Date: 15.JUL.2012 03:51:03




Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

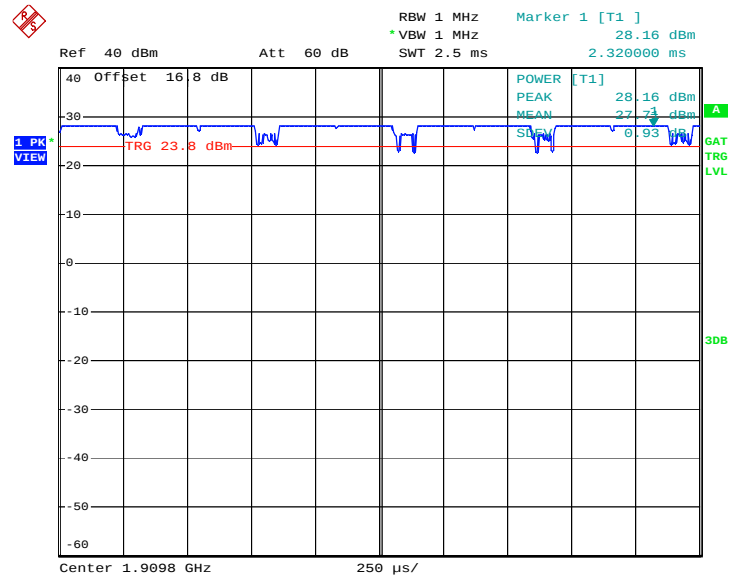

Date: 15.JUL.2012 03:52:16


Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link
---------------	--------------	--------------------	-------------------

Peak-to-Average Ratio on Channel 4132 (826.4 MHz)

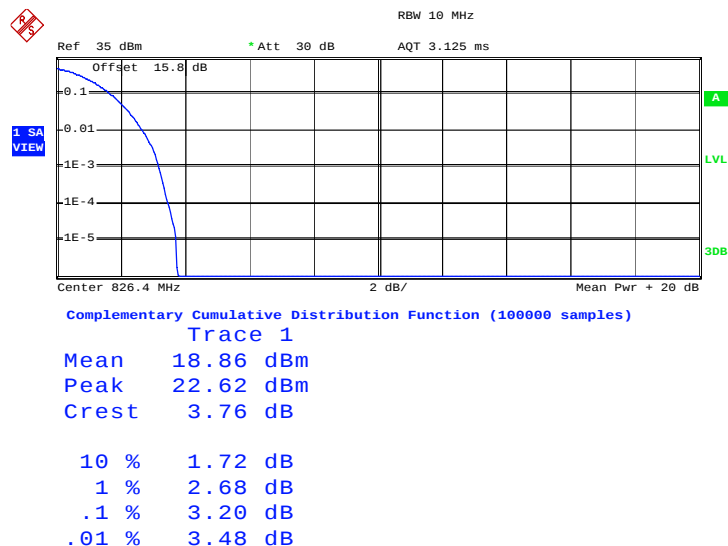


Date: 15.JUL.2012 04:30:58

Peak-to-Average Ratio on Channel 4182 (836.4 MHz)

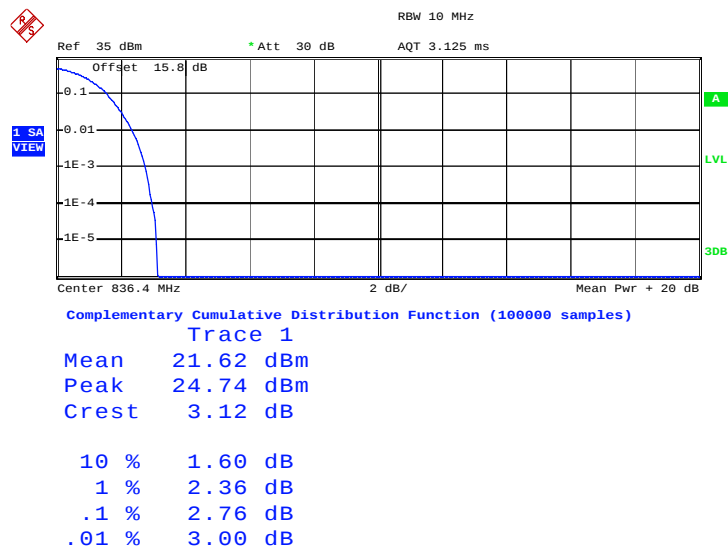

Date: 15.JUL.2012 04:43:46

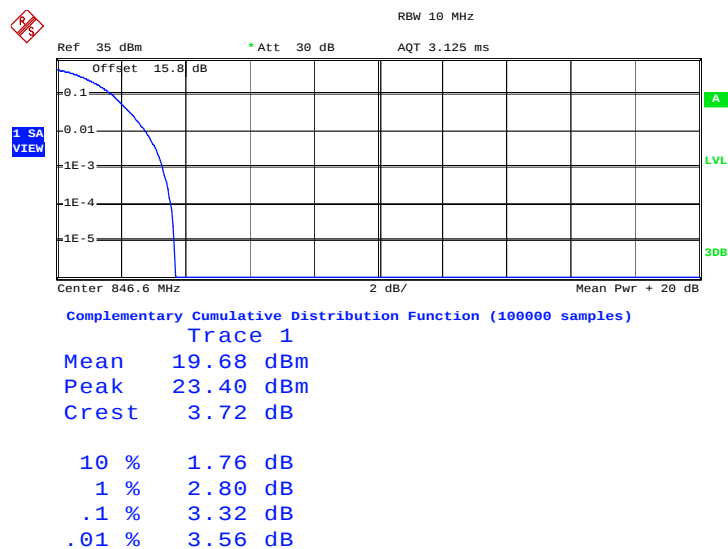
Peak-to-Average Ratio on Channel 4233 (846.6 MHz)


Date: 15.JUL.2012 04:32:07




Band :	WCDMA Band IV	Test Mode :	RMC 12.2Kbps Link
--------	---------------	-------------	-------------------

Peak-to-Average Ratio on Channel 1312 (1712.4 MHz)

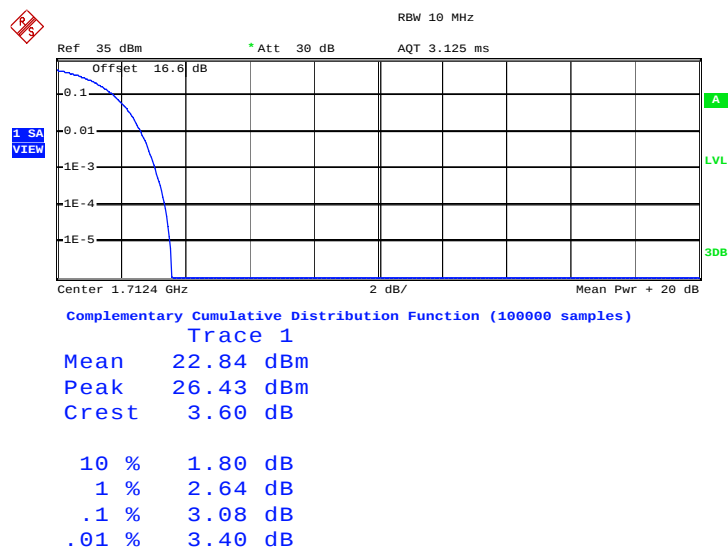


Date: 15.JUL.2012 04:45:23

Peak-to-Average Ratio on Channel 1413 (1732.6 MHz)

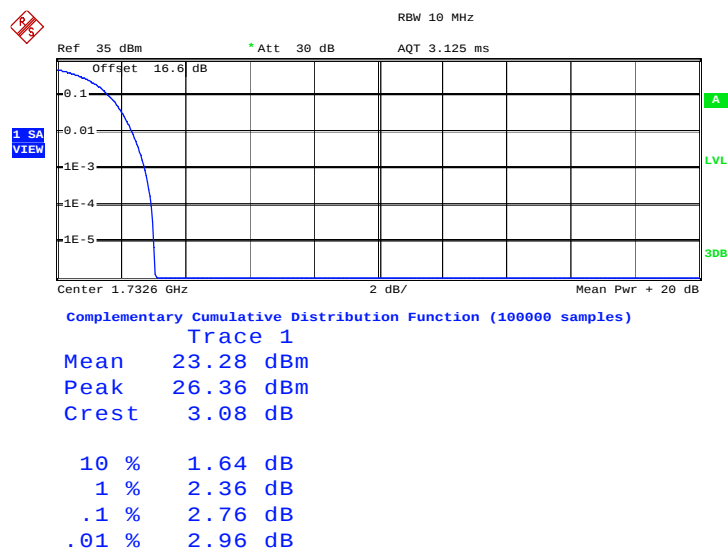

Date: 15.JUL.2012 04:45:49


Peak-to-Average Ratio on Channel 1513 (1752.6 MHz)

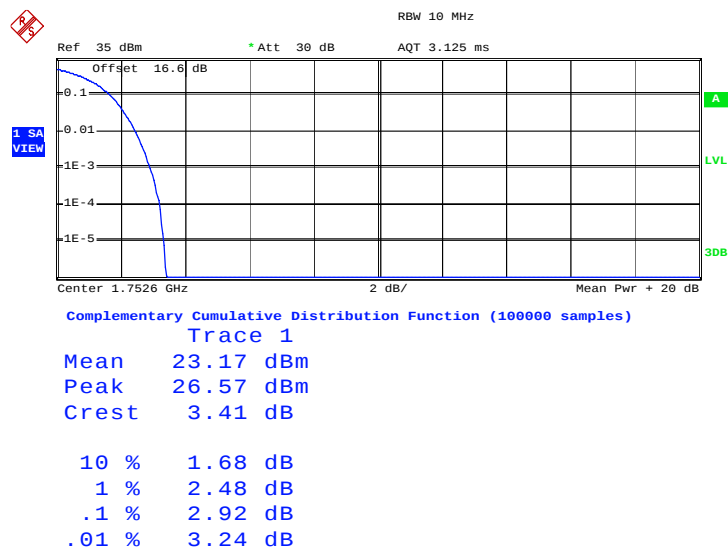

Date: 15.JUL.2012 04:46:13


Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link
---------------	---------------	--------------------	-------------------

Peak-to-Average Ratio on Channel 9262 (1852.4 MHz)

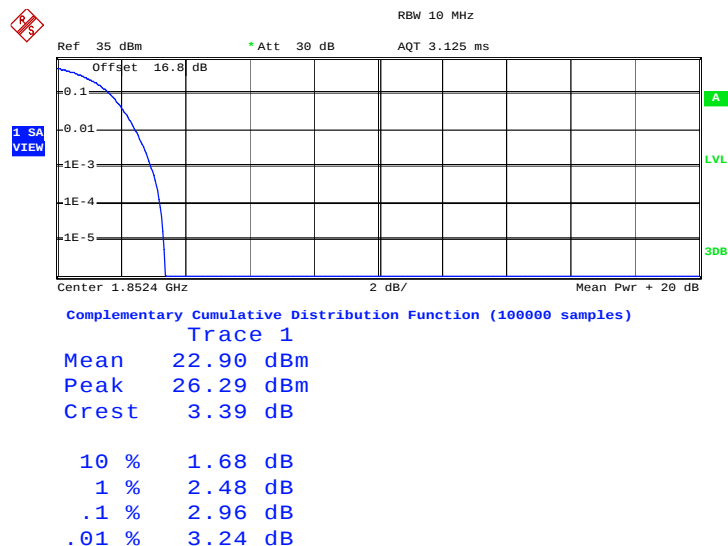


Date: 15.JUL.2012 04:15:45

Peak-to-Average Ratio on Channel 9400 (1880.0 MHz)

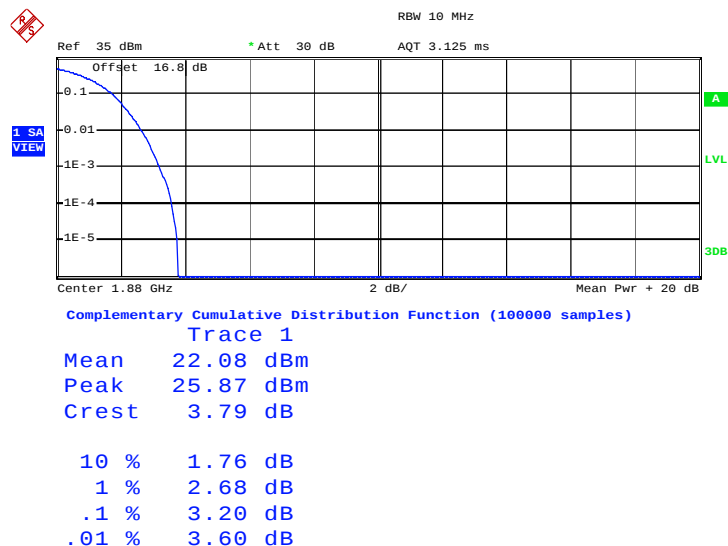

Date: 15.JUL.2012 04:16:11

Peak-to-Average Ratio on Channel 9538 (1907.6 MHz)

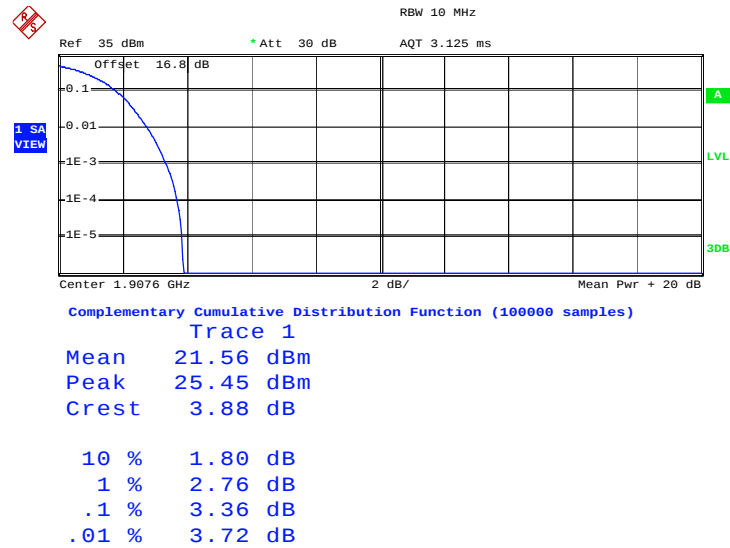

Date: 15.JUL.2012 04:16:33

3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

3.3.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v01. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.

3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The EUT was placed on a turntable with 1.0 meter height in a fully anechoic chamber.
2. The EUT was set at 1.2 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiated power.
4. The height of the receiving antenna is adjusted to look for the maximum ERP/EIRP.
5. Taking the record of maximum ERP/EIRP.
6. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
7. The conducted power at the terminal of the dipole antenna is measured.
8. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
9. $ERP/EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$

P_s (dBm) : Input power to substitution antenna.

G_s (dBi or dBd) : Substitution antenna Gain.

$E_t = R_t + AF$


$E_s = R_s + AF$

AF (dB/m) : Receive antenna factor

R_t : The highest received signal in spectrum analyzer for EUT.

R_s : The highest received signal in spectrum analyzer for substitution antenna.

3.3.4 Test Setup

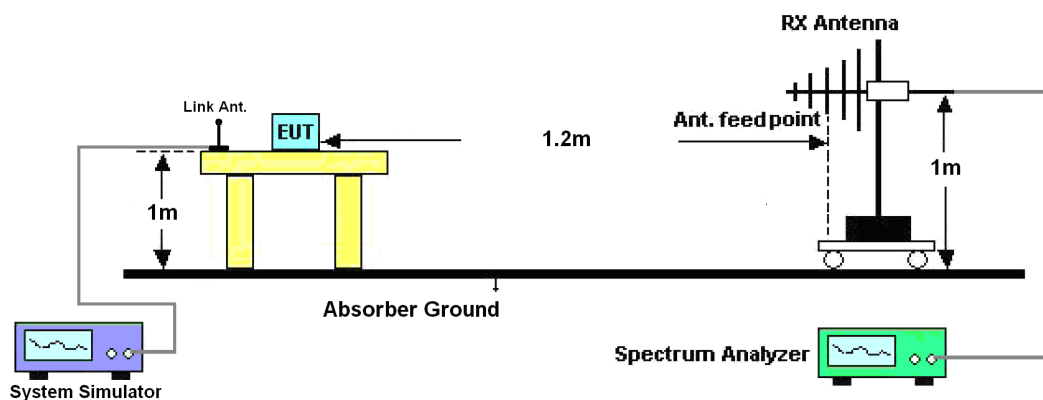

3.3.5 Test Result of ERP

GSM850 (GPRS 8) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-27.09	-48.12	0.00	-1.08	19.95	0.0989
836.40	-26.75	-48.28	0.00	-0.93	20.60	0.1148
848.80	-25.85	-48.35	0.00	-0.76	21.74	0.1493
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-35.96	-47.97	0.00	-1.08	10.93	0.0124
836.40	-36.14	-48.01	0.00	-0.93	10.94	0.0124
848.80	-36.31	-48.05	0.00	-0.76	10.98	0.0125

GSM850 (EDGE 8) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-32.81	-48.12	0.00	-1.08	14.23	0.0265
836.40	-36.49	-48.28	0.00	-0.93	10.86	0.0122
848.80	-31.35	-48.35	0.00	-0.76	16.24	0.0421
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-42.92	-47.97	0.00	-1.08	3.97	0.0025
836.40	-47.01	-48.01	0.00	-0.93	0.07	0.0010
848.80	-43.38	-48.05	0.00	-0.76	3.91	0.0025



WCDMA Band V (RMC 12.2Kbps) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
826.40	-34.85	-48.12	0.00	-1.08	12.19	0.0166
836.40	-35.02	-48.28	0.00	-0.93	12.33	0.0171
846.60	-34.04	-48.35	0.00	-0.76	13.55	0.0227
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
826.40	-44.42	-47.97	0.00	-1.08	2.47	0.0018
836.40	-45.27	-48.01	0.00	-0.93	1.81	0.0015
846.60	-45.21	-48.05	0.00	-0.76	2.08	0.0016

3.3.6 Test Result of EIRP

GSM1900 (GPRS 8) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-25.99	-51.88	0.00	1.96	27.85	0.6092
1880.00	-27.13	-52.99	0.00	2.00	27.86	0.6112
1909.80	-28.03	-54.28	0.00	1.98	28.23	0.6657
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-31.00	-52.13	0.00	1.96	23.09	0.2037
1880.00	-31.53	-53.17	0.00	2.00	23.64	0.2311
1909.80	-30.83	-54.13	0.00	1.98	25.28	0.3369

GSM1900 (EDGE 8) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-28.68	-51.88	0.00	1.96	25.16	0.3282
1880.00	-29.29	-52.99	0.00	2.00	25.70	0.3718
1909.80	-30.61	-54.28	0.00	1.98	25.65	0.3675
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-33.69	-52.13	0.00	1.96	20.40	0.1096
1880.00	-34.09	-53.17	0.00	2.00	21.08	0.1283
1909.80	-33.50	-54.13	0.00	1.98	22.61	0.1825

WCDMA Band IV (RMC 12.2Kbps) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1712.4	-30.44	-51.88	0.00	1.96	23.40	0.2186
1732.6	-31.29	-52.99	0.00	2.00	23.70	0.2344
1752.6	-33.59	-54.28	0.00	1.98	22.67	0.1849
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1712.4	-32.78	-52.13	0.00	1.96	21.31	0.1351
1732.6	-34.47	-53.17	0.00	2.00	20.70	0.1174
1752.6	-37.47	-54.13	0.00	1.98	18.64	0.0731

WCDMA Band II (RMC 12.2Kbps) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1852.40	-32.30	-51.88	0.00	1.96	21.54	0.1426
1880.00	-34.23	-52.99	0.00	2.00	20.76	0.1192
1907.60	-35.54	-54.28	0.00	1.98	20.72	0.1181
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1852.40	-37.38	-52.13	0.00	1.96	16.71	0.0469
1880.00	-38.58	-53.17	0.00	2.00	16.59	0.0456
1907.60	-38.41	-54.13	0.00	1.98	17.70	0.0589

3.4 Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 99% occupied bandwidth and 26 dB bandwidth of the middle channel for the highest RF powers were measured.

3.4.4 Test Setup

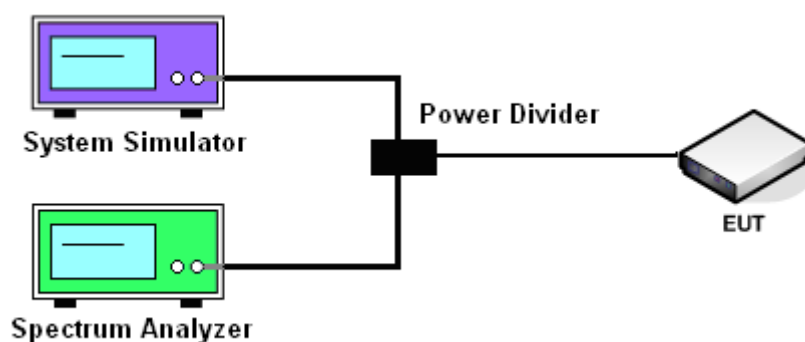

3.4.5 Test Result of Occupied Bandwidth and 26dB Bandwidth

Cellular Band						
Modes	GSM850 (GPRS 8)			GSM850 (EDGE 8)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8
99% OBW (KHz)	250.00	250.00	246.00	252.00	248.00	248.00
26dB BW (KHz)	316.00	318.00	316.00	306.00	298.00	302.00

PCS Band						
Modes	GSM1900 (GPRS 8)			GSM1900 (EDGE 8)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8
99% OBW (KHz)	246.00	246.00	248.00	244.00	248.00	246.00
26dB BW (KHz)	312.00	318.00	310.00	312.00	304.00	302.00

Cellular Band			
Modes	WCDMA Band V (RMC 12.2Kbps)		
Channel	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	826.4	836.4	846.6
99% OBW (MHz)	4.16	4.20	4.16
26dB BW (MHz)	4.82	4.84	4.82

AWS Band			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312(Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
99% OBW (MHz)	4.22	4.18	4.20
26dB BW (MHz)	4.84	4.82	4.84




PCS Band			
Modes	WCDMA Band II (RMC 12.2Kbps)		
Channel	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1852.4	1880	1907.6
99% OBW (MHz)	4.20	4.22	4.22
26dB BW (MHz)	4.84	4.84	4.84

3.4.6 Test Result (Plots) of Occupied Bandwidth and 26dB Bandwidth


Band :	GSM 850	Test Mode :	GPRS 8 Link
---------------	---------	--------------------	-------------

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

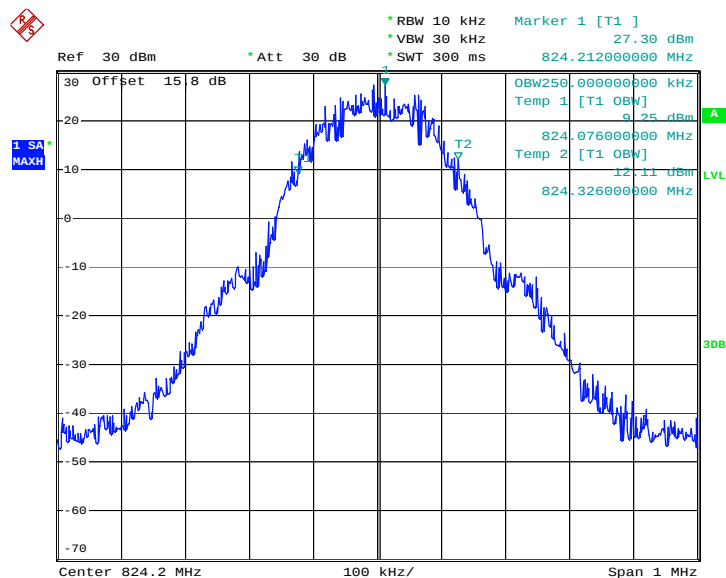


Date: 14.JUL.2012 22:08:36


26dB Bandwidth Plot on Channel 128 (824.2 MHz)

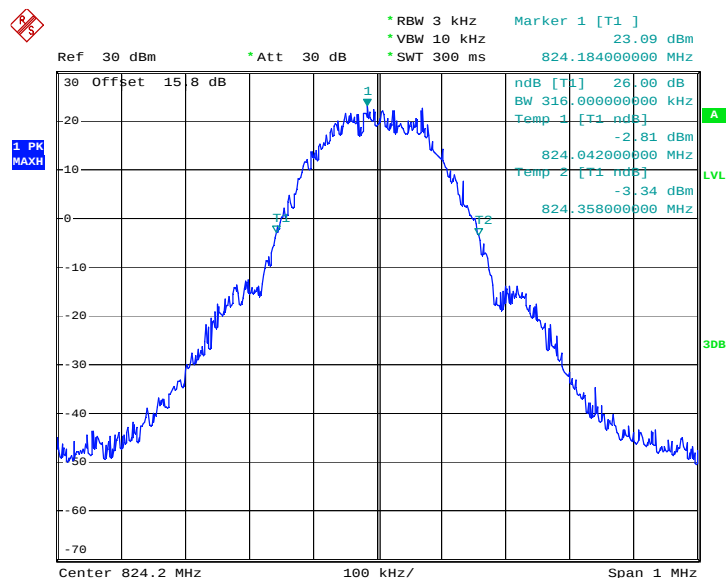

Date: 14.JUL.2012 22:07:16

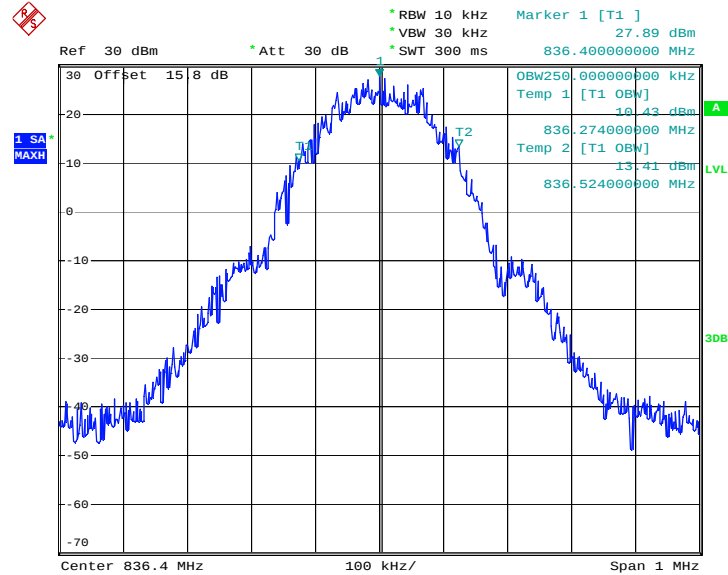
99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)


Date: 14.JUL.2012 22:09:02

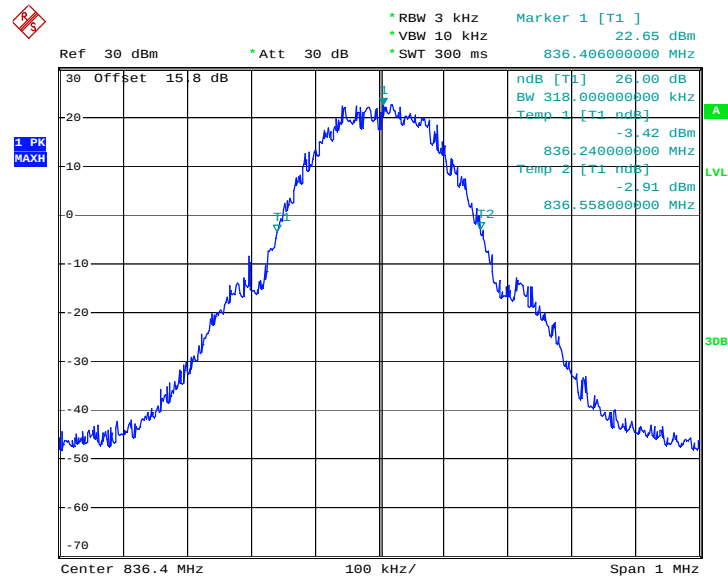26dB Bandwidth Plot on Channel 189 (836.4 MHz)


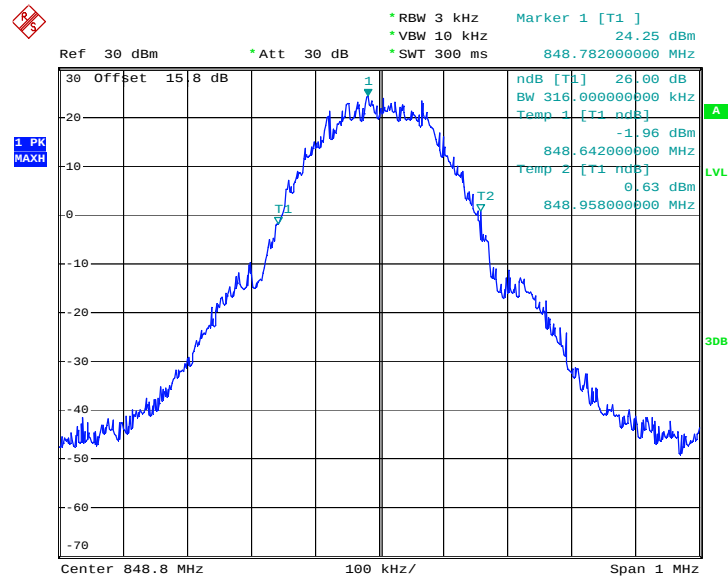
Date: 14.JUL.2012 22:07:42

99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

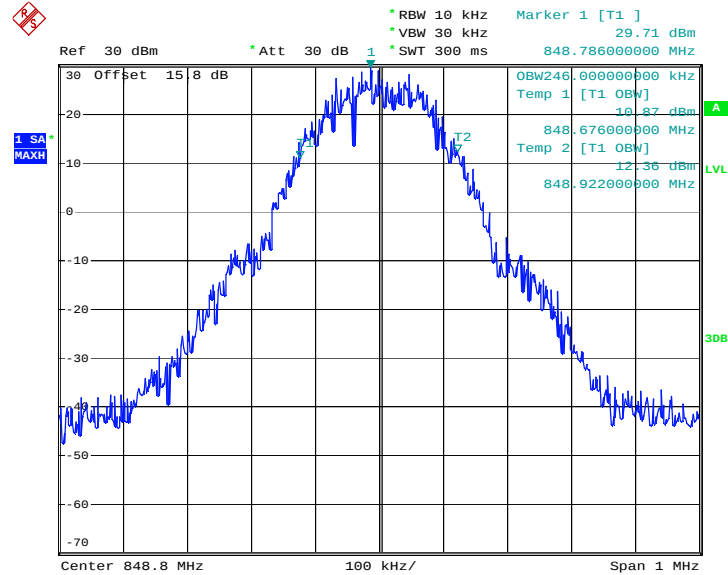

Date: 14.JUL.2012 22:09:28

26dB Bandwidth Plot on Channel 251 (848.8 MHz)




Date: 14.JUL.2012 22:08:08




Band :	GSM 850	Test Mode :	EDGE 8 Link
--------	---------	-------------	-------------

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

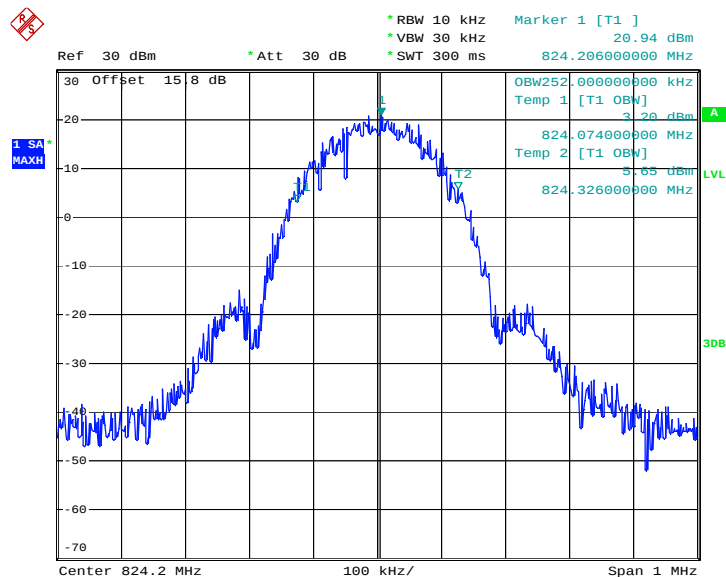


Date: 15.JUL.2012 04:08:35

26dB Bandwidth Plot on Channel 128 (824.2 MHz)

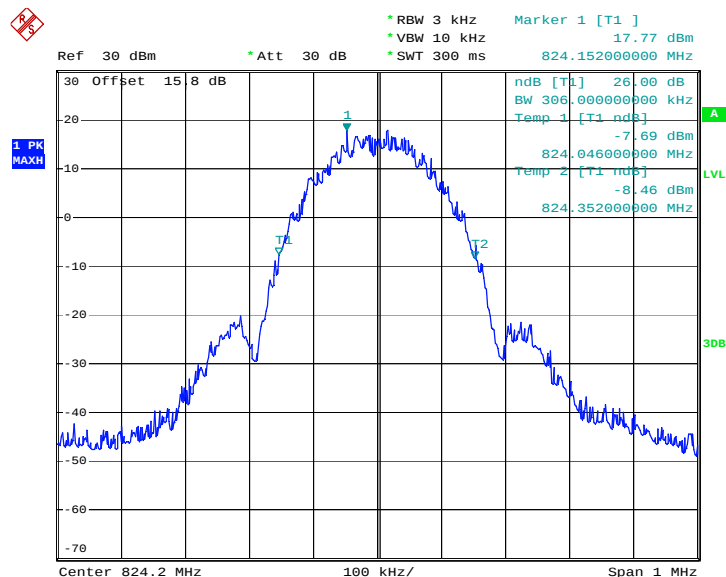


Date: 15.JUL.2012 04:07:16

99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

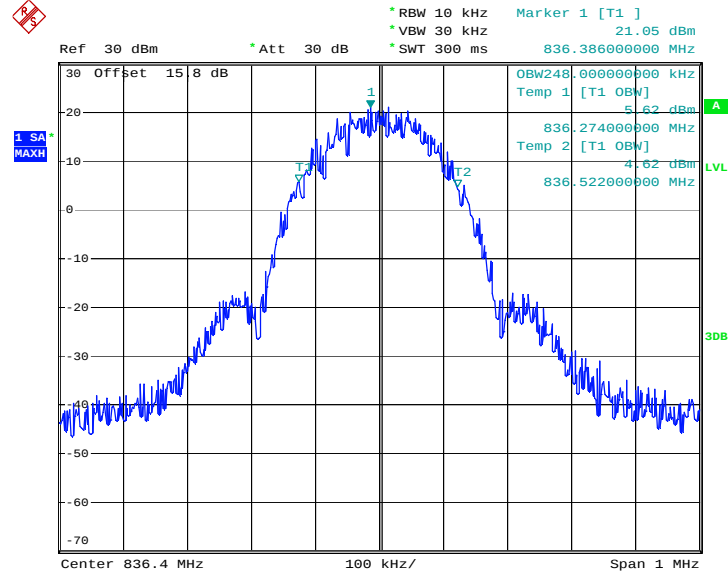


Date: 15.JUL.2012 04:09:01

26dB Bandwidth Plot on Channel 189 (836.4 MHz)

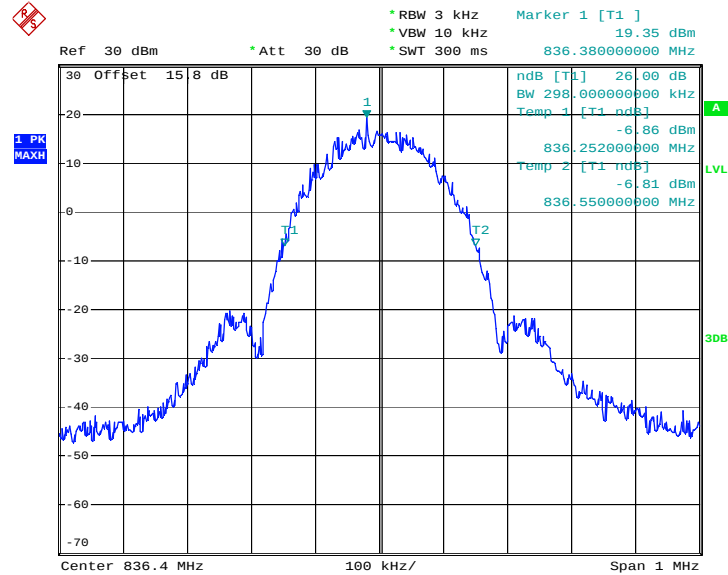


Date: 15.JUL.2012 04:07:43

99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

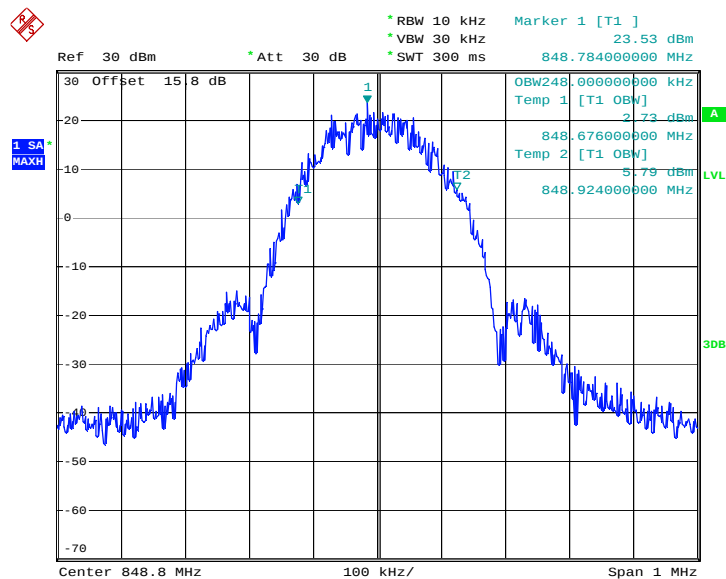

Date: 15.JUL.2012 04:09:27


26dB Bandwidth Plot on Channel 251 (848.8 MHz)

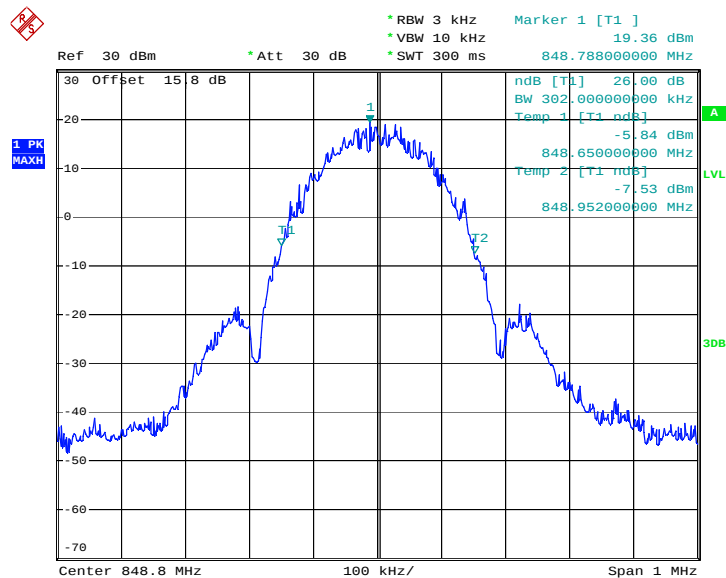

Date: 15.JUL.2012 04:08:09


Band :	GSM 1900	Test Mode :	GPRS 8 Link
--------	----------	-------------	-------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

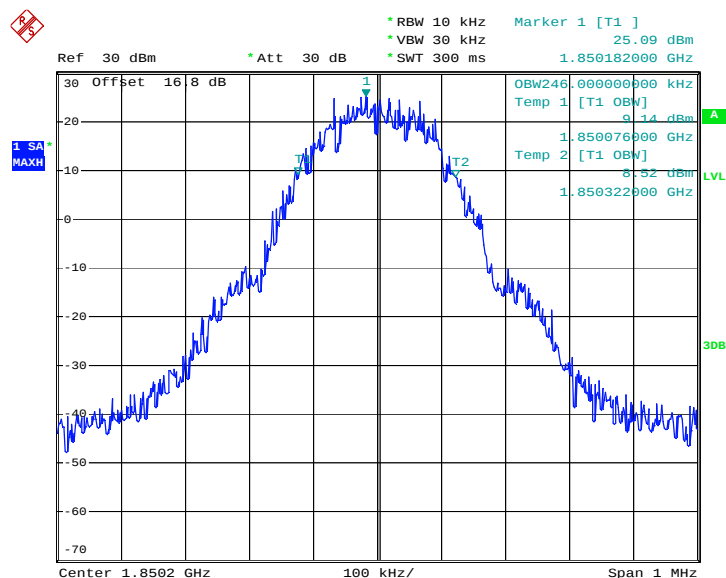

Date: 15.JUL.2012 01:22:53


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

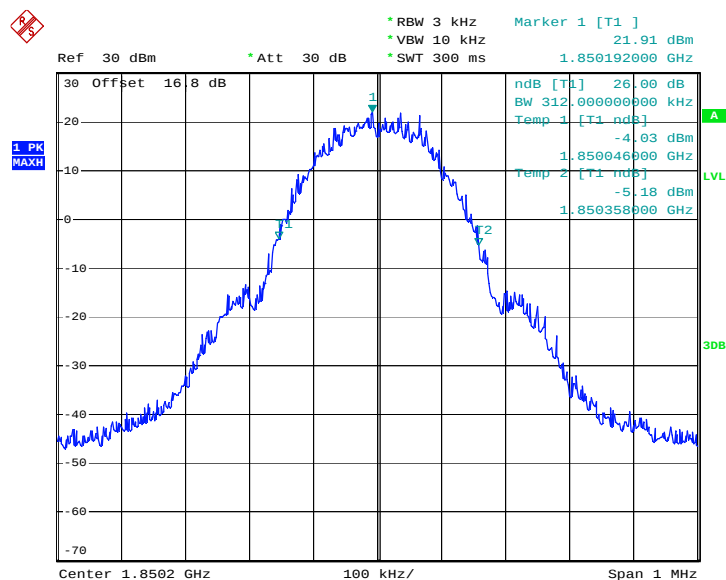

Date: 15.JUL.2012 01:21:34




99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

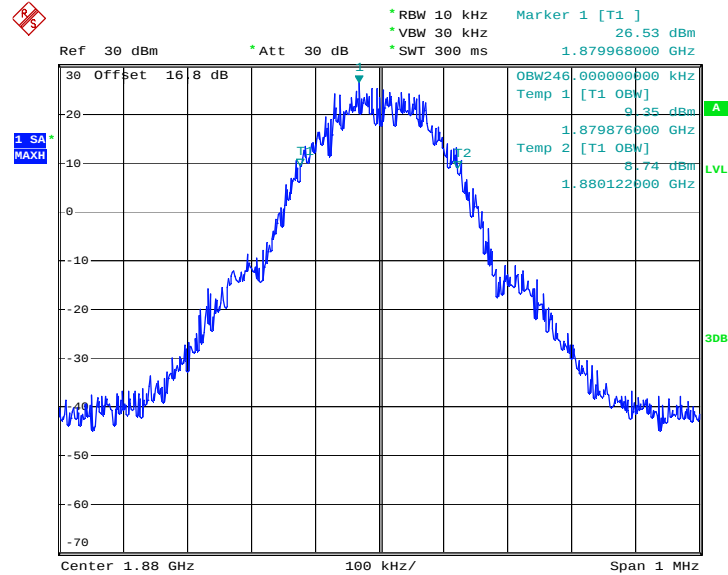


Date: 15.JUL.2012 01:23:19

26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

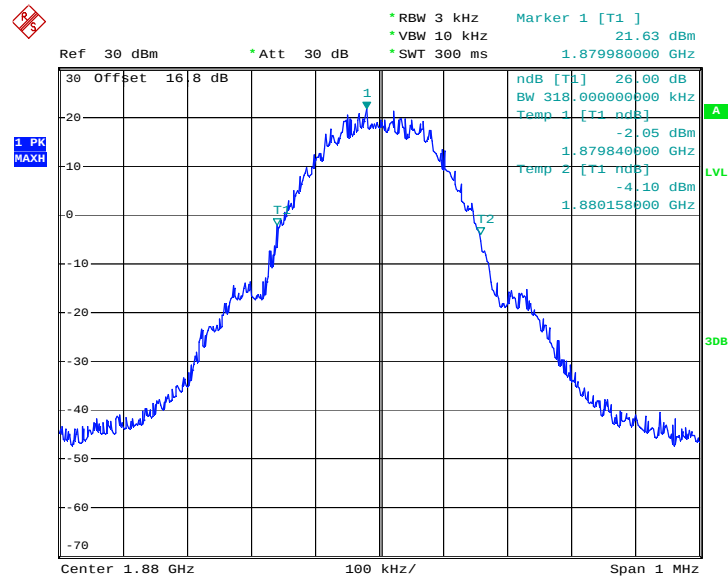


Date: 15.JUL.2012 01:22:00

99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

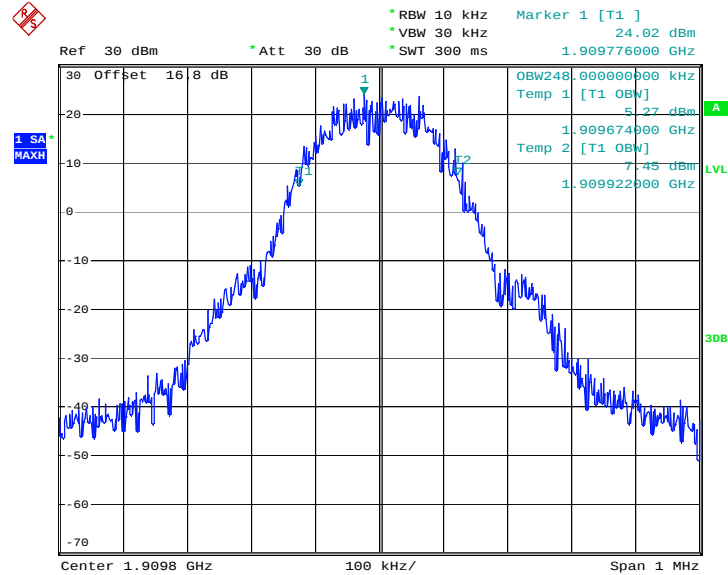

Date: 15.JUL.2012 01:23:45

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

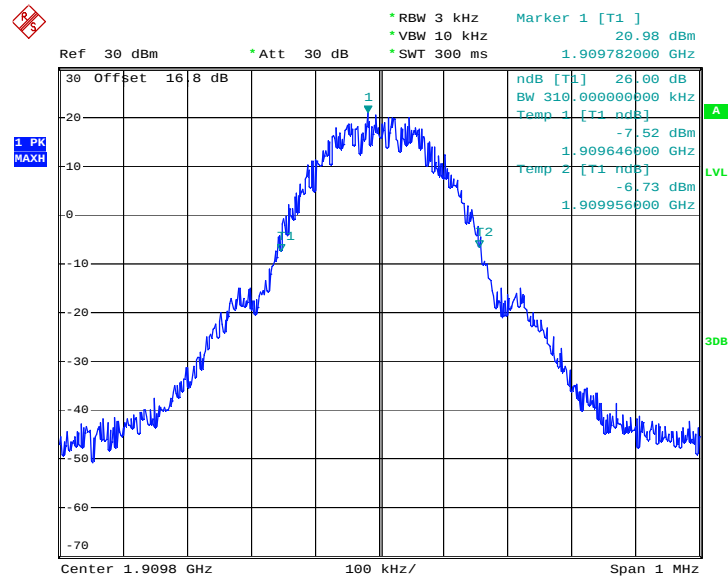


Date: 15.JUL.2012 01:22:26




Band :	GSM 1900	Test Mode :	EDGE 8 Link
--------	----------	-------------	-------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

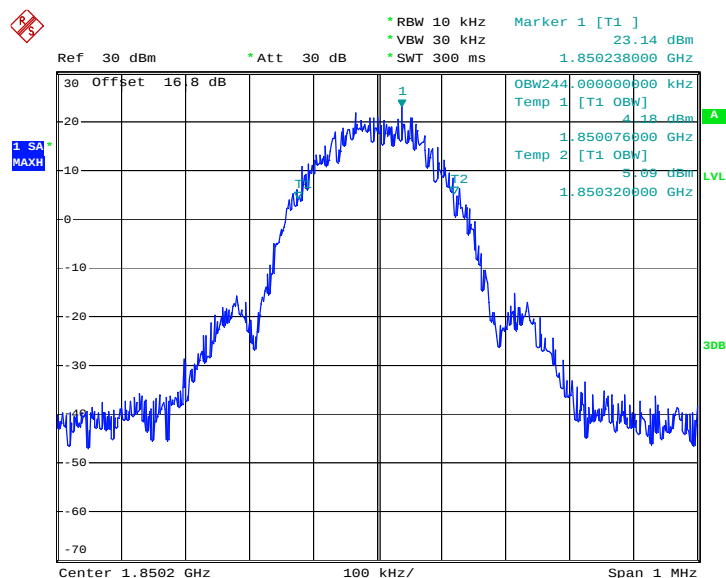


Date: 15.JUL.2012 03:56:10


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

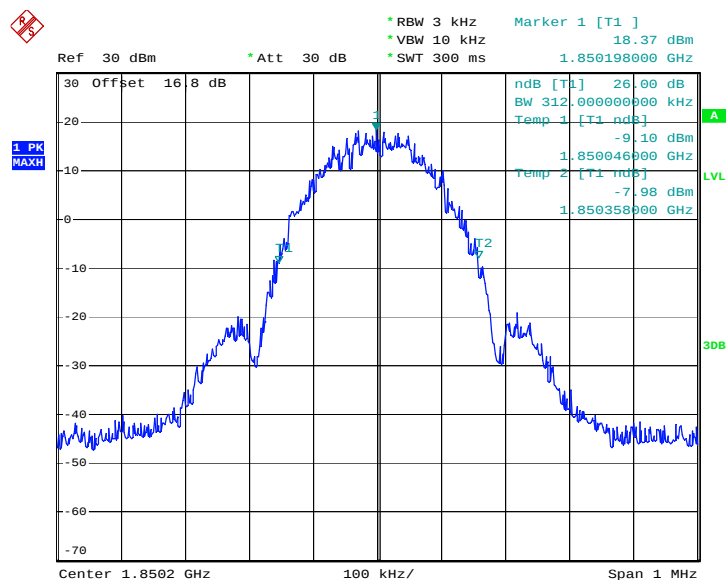

Date: 15.JUL.2012 03:54:50

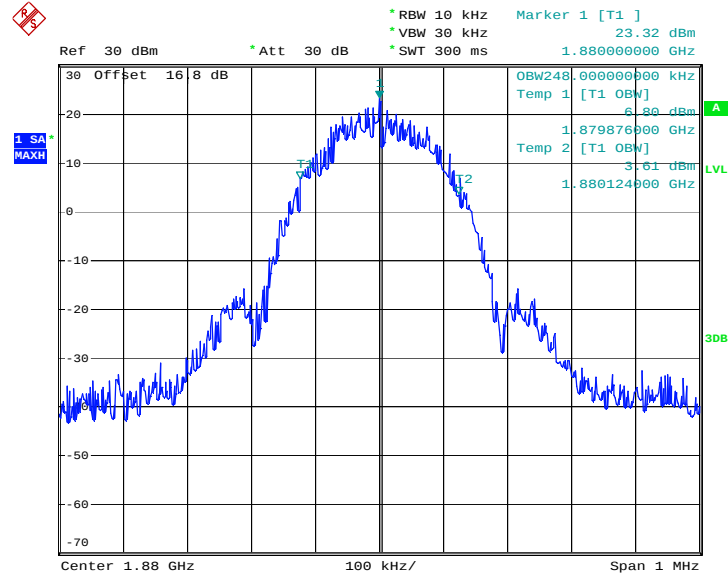
99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)


Date: 15.JUL.2012 03:56:36

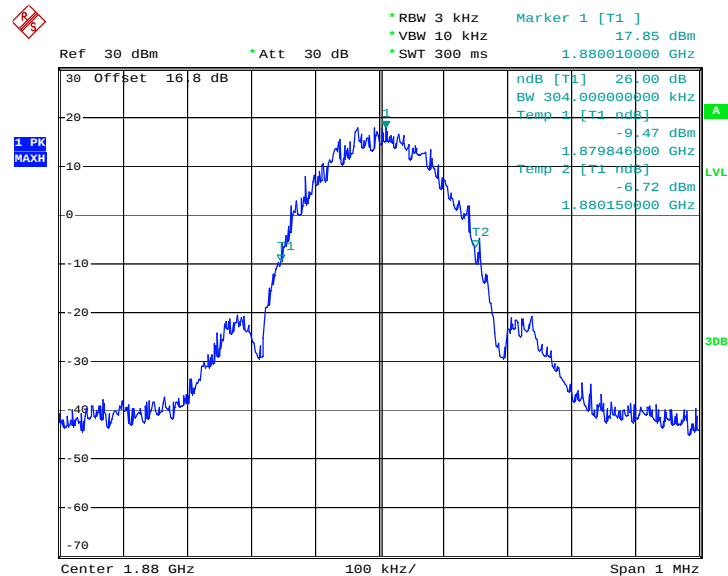26dB Bandwidth Plot on Channel 661 (1880.0 MHz)


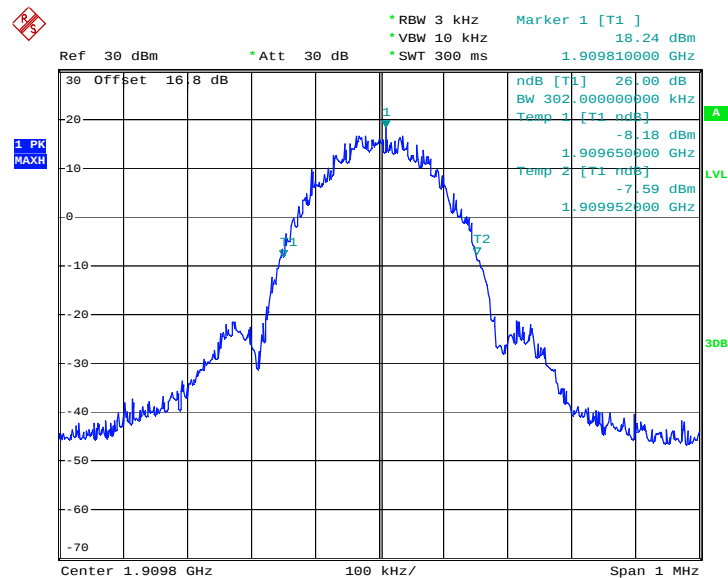
Date: 15.JUL.2012 03:55:16

99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

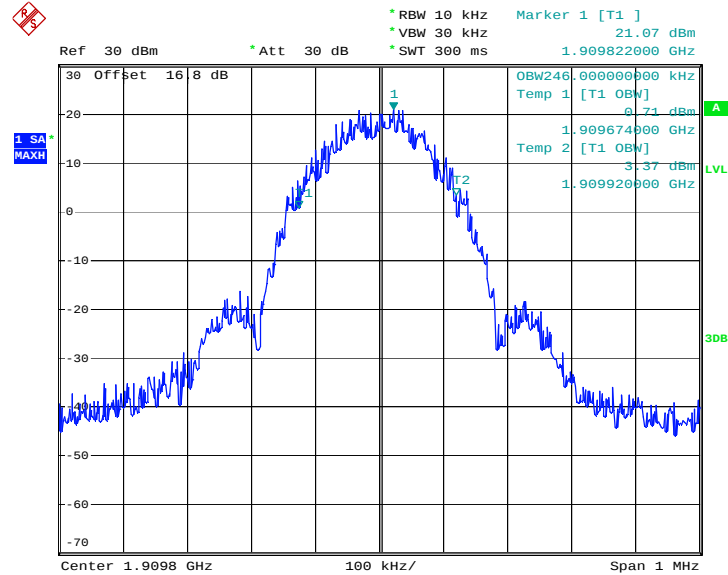


Date: 15.JUL.2012 03:57:04

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)




Date: 15.JUL.2012 03:55:43

Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link
---------------	--------------	--------------------	-------------------

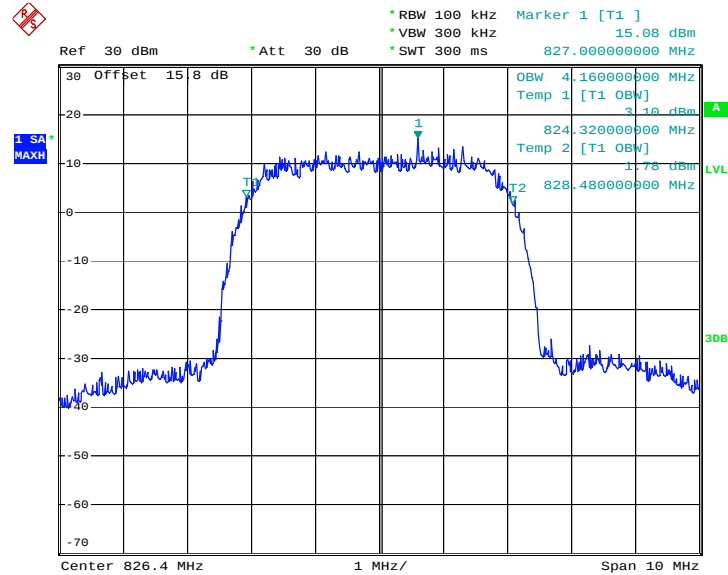
99% Occupied Bandwidth Plot on Channel 4132 (826.4 MHz)


Date: 15.JUL.2012 04:34:51

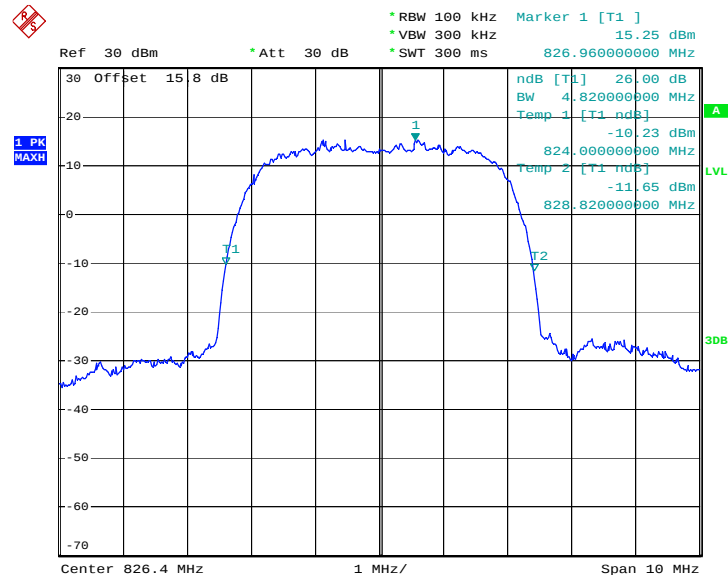26dB Bandwidth Plot on Channel 4132 (826.4 MHz)


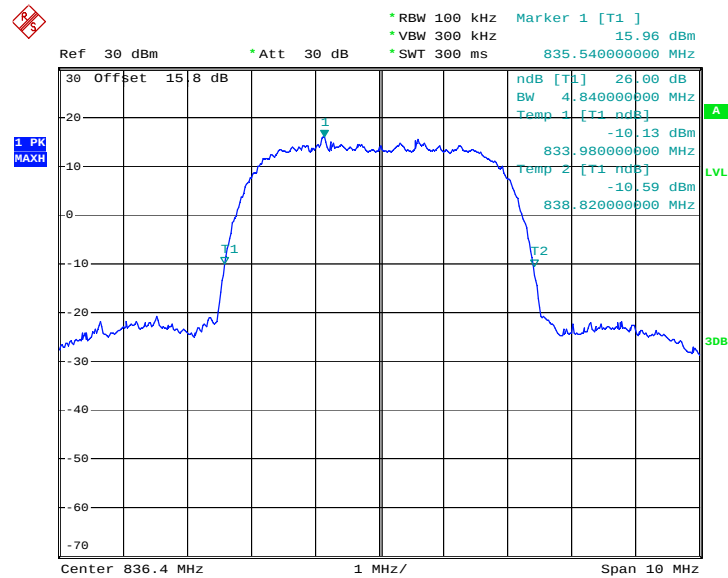
Date: 15.JUL.2012 04:33:32

99% Occupied Bandwidth Plot on Channel 4182 (836.4 MHz)

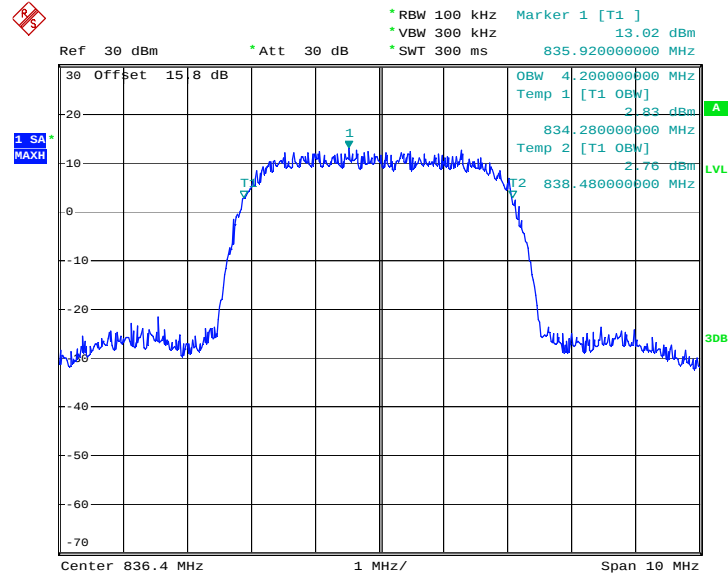


Date: 15.JUL.2012 04:35:17


26dB Bandwidth Plot on Channel 4182 (836.4 MHz)



Date: 15.JUL.2012 04:33:59

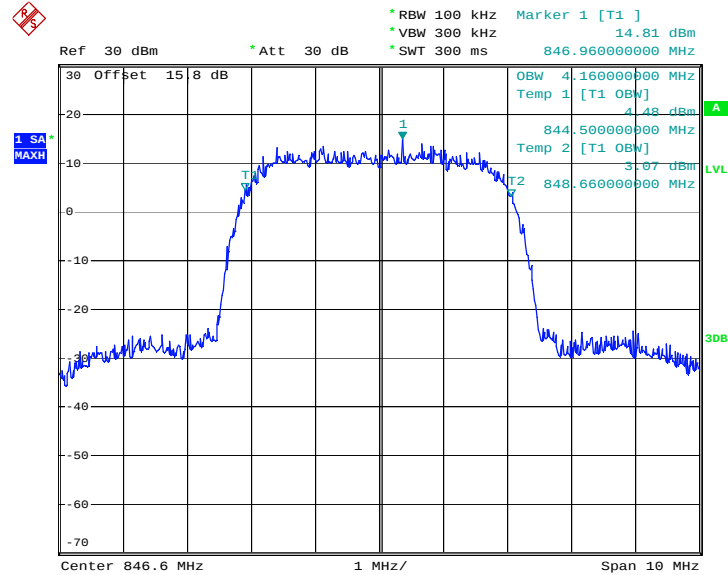
99% Occupied Bandwidth Plot on Channel 4233 (846.6 MHz)


Date: 15.JUL.2012 04:35:43

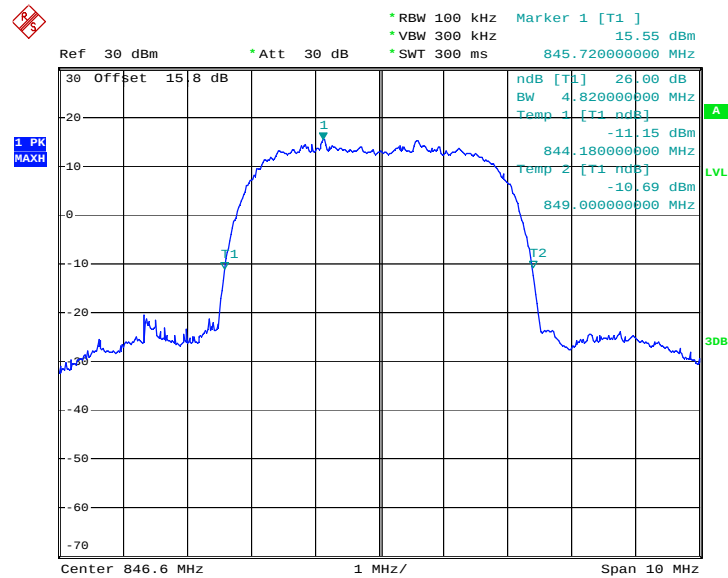
26dB Bandwidth Plot on Channel 4233 (846.6 MHz)


Date: 15.JUL.2012 04:34:25

Band :	WCDMA Band IV	Test Mode :	RMC 12.2Kbps Link
---------------	---------------	--------------------	-------------------

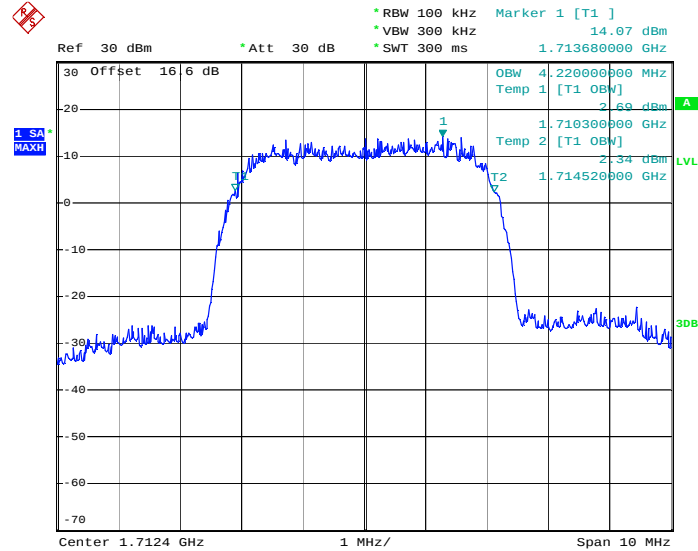
99% Occupied Bandwidth Plot on Channel 1312 (1712.4 MHz)


Date: 15.JUL.2012 04:49:33

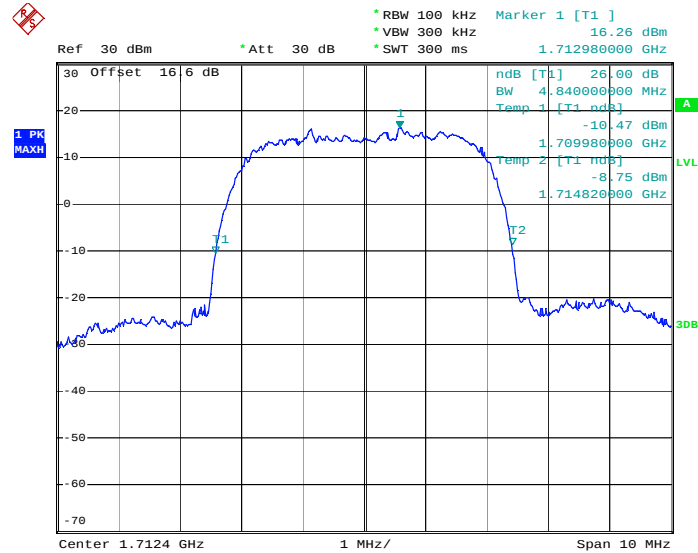26dB Bandwidth Plot on Channel 1312 (1712.4 MHz)


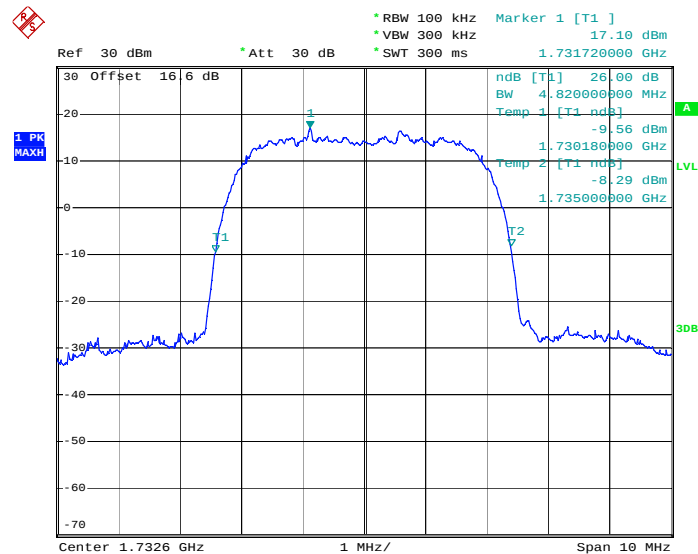
Date: 15.JUL.2012 04:48:14

99% Occupied Bandwidth Plot on Channel 1413 (1732.6 MHz)

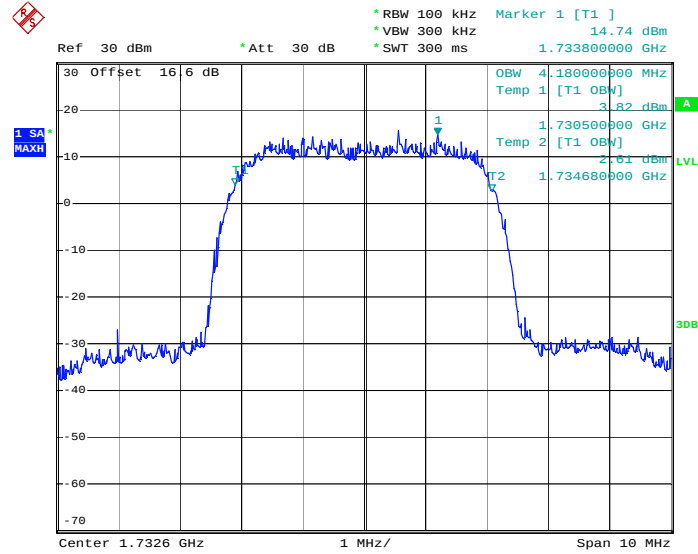

Date: 15.JUL.2012 04:49:59


26dB Bandwidth Plot on Channel 1413 (1732.6 MHz)



Date: 15.JUL.2012 04:48:40




99% Occupied Bandwidth Plot on Channel 1513 (1752.6 MHz)

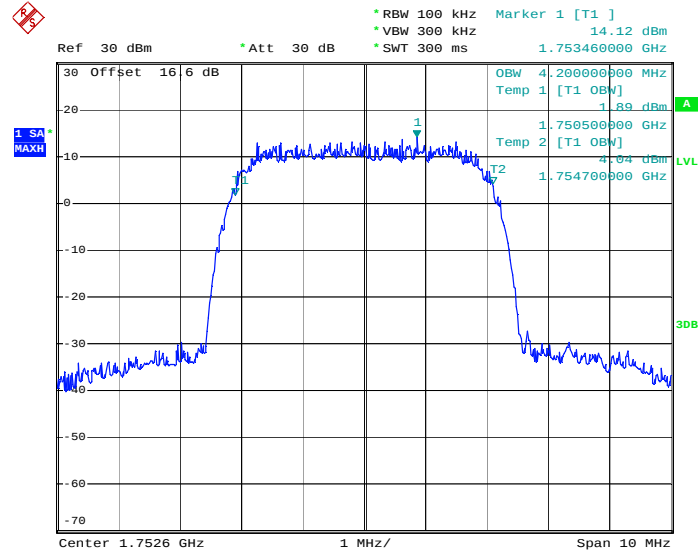

Date: 15.JUL.2012 04:50:25


26dB Bandwidth Plot on Channel 1513 (1752.6 MHz)

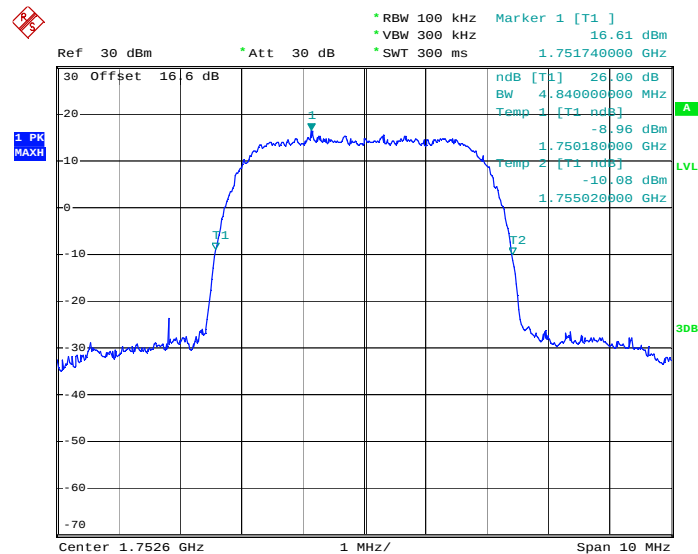

Date: 15.JUL.2012 04:49:06


Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link
--------	---------------	-------------	-------------------

99% Occupied Bandwidth Plot on Channel 9262 (1852.4 MHz)

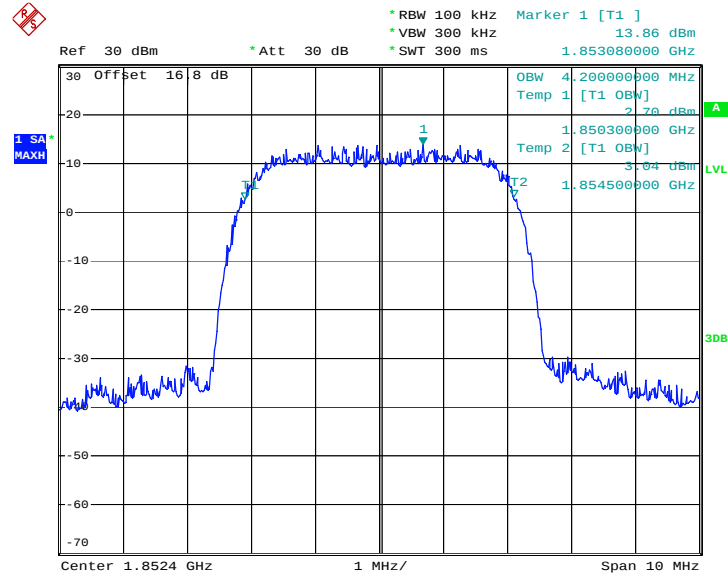


Date: 15.JUL.2012 04:24:01


26dB Bandwidth Plot on Channel 9262 (1852.4 MHz)

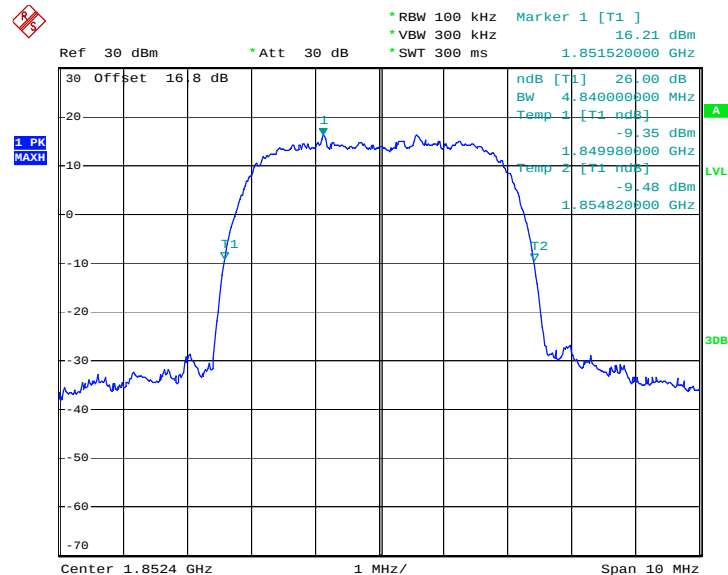

Date: 15.JUL.2012 04:22:41

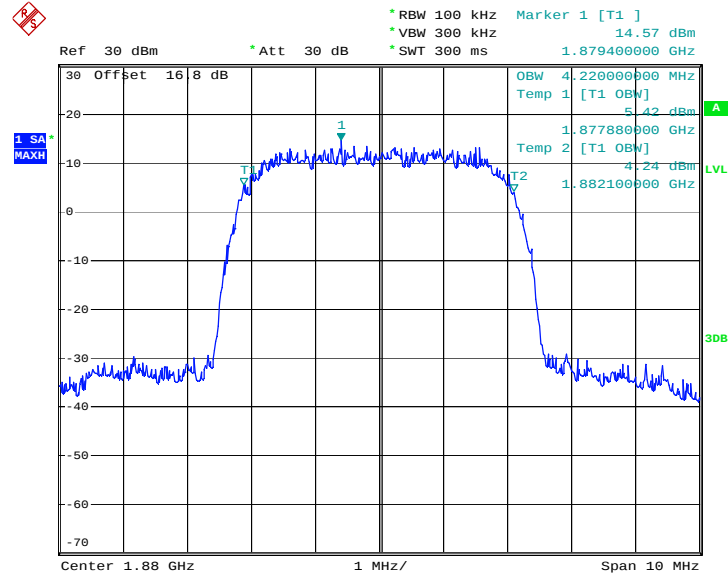
99% Occupied Bandwidth Plot on Channel 9400 (1880.0 MHz)


Date: 15.JUL.2012 04:24:28

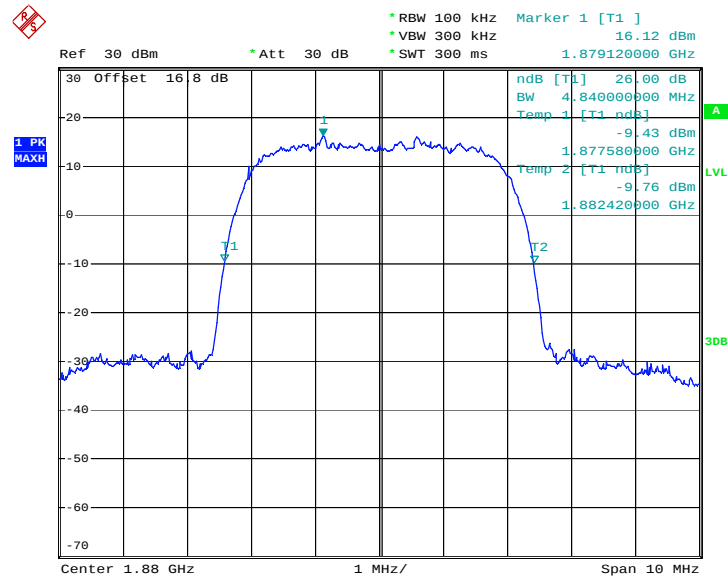26dB Bandwidth Plot on Channel 9400 (1880.0 MHz)


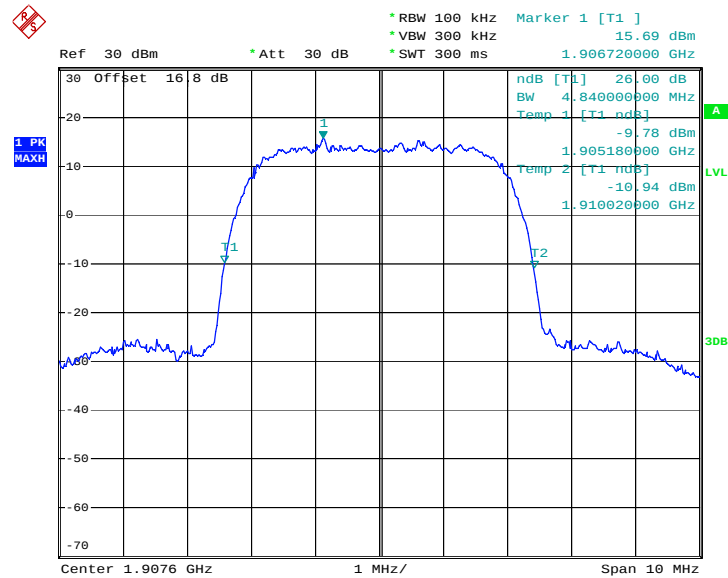
Date: 15.JUL.2012 04:23:08

99% Occupied Bandwidth Plot on Channel 9538 (1907.6 MHz)

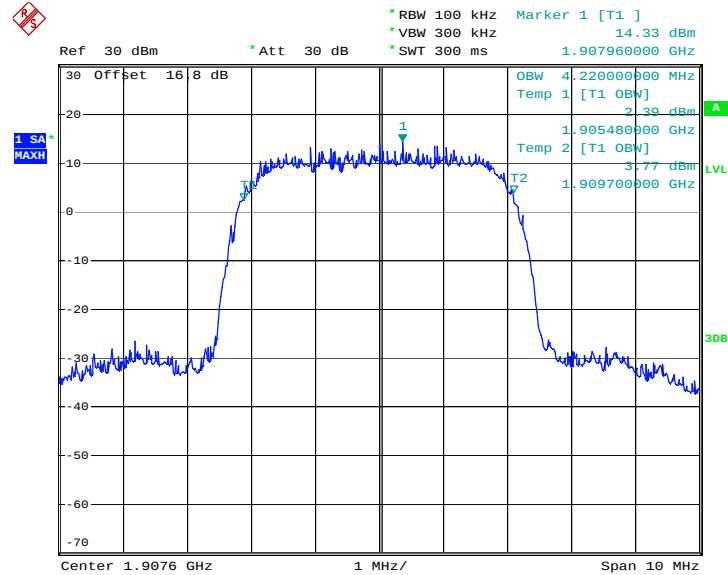

Date: 15.JUL.2012 04:24:54

26dB Bandwidth Plot on Channel 9538 (1907.6 MHz)



Date: 15.JUL.2012 04:23:34

3.5 Band Edge Measurement

3.5.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The band edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly $BW/100$.


3.5.4 Test Setup

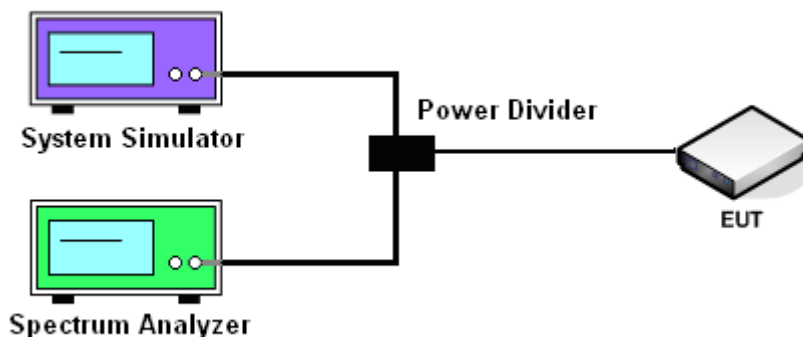

3.5.5 Test Result (Plots) of Conducted Band Edge

Band :	GSM850	Test Mode :	GPRS 8 Link
Correction Factor :	0.25dB	Maximum 26dB Bandwidth :	0.318MHz
Band Edge :	-16.61dBm	Measurement Value :	-16.86dBm


Lower Band Edge Plot on Channel 128 (824.2 MHz)

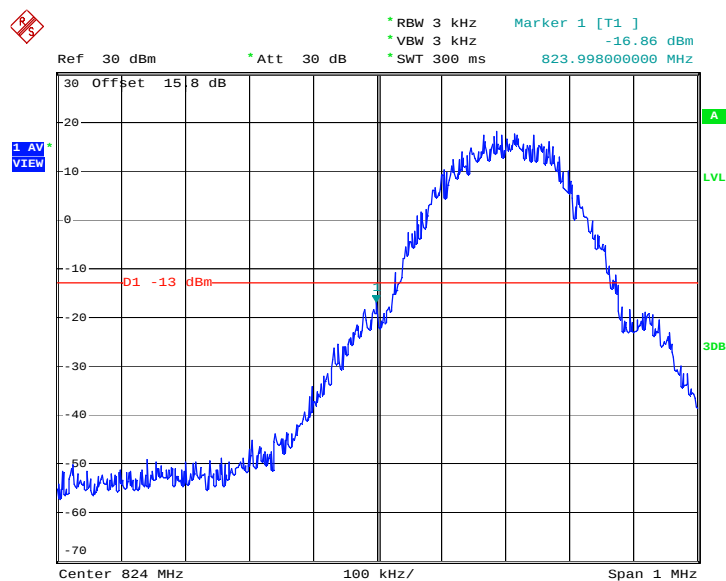

Date: 14.JUL.2012 22:10:54

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)


Band :	GSM850	Test Mode :	GPRS 8 Link
Correction Factor :	0.25dB	Maximum 26dB Bandwidth :	0.318MHz
Band Edge :	-17.36dBm	Measurement Value :	-17.61dBm

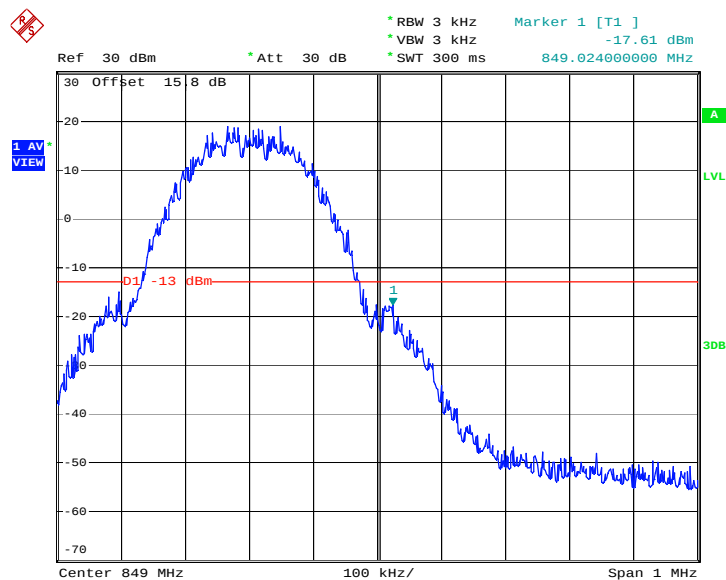Higher Band Edge Plot on Channel 251 (848.8 MHz)


Date: 14.JUL.2012 22:11:20

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)

Band :	GSM850	Test Mode :	EDGE 8 Link
Correction Factor :	0.09dB	Maximum 26dB Bandwidth :	0.306MHz
Band Edge :	-25.08dBm	Measurement Value :	-25.17dBm

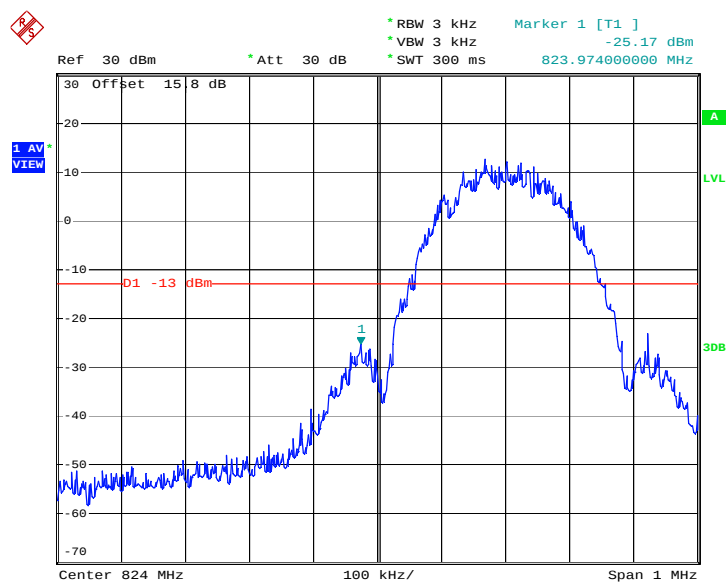Lower Band Edge Plot on Channel 128 (824.2 MHz)


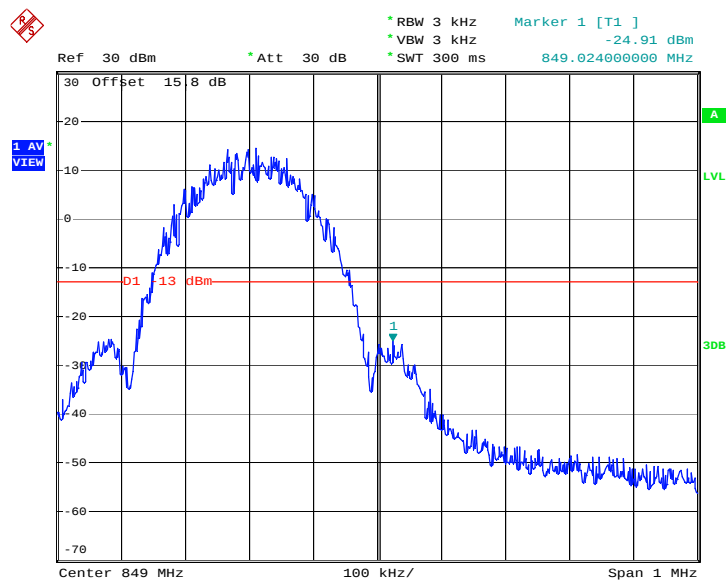
Date: 15.JUL.2012 04:10:53

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	GSM850	Test Mode :	EDGE 8 Link
Correction Factor :	0.09dB	Maximum 26dB Bandwidth :	0.306MHz
Band Edge :	-24.82dBm	Measurement Value :	-24.91dBm

Higher Band Edge Plot on Channel 251 (848.8 MHz)




Date: 15.JUL.2012 04:11:20

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)

Band :	GSM1900	Test Mode :	GPRS 8 Link
Correction Factor :	0.25dB	Maximum 26dB Bandwidth :	0.318MHz
Band Edge :	-18.16dBm	Measurement Value :	-18.41dBm


Lower Band Edge Plot on Channel 512 (1850.2 MHz)

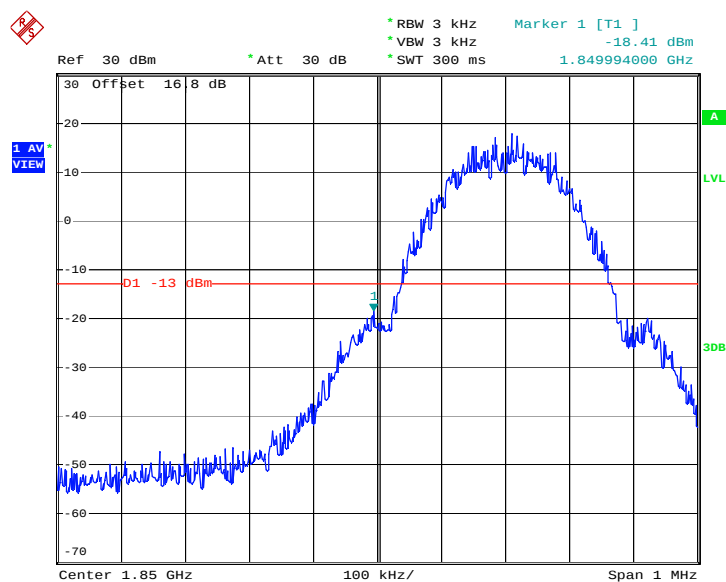

Date: 15.JUL.2012 01:25:11

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)


Band :	GSM1900	Test Mode :	GPRS 8 Link
Correction Factor :	0.25dB	Maximum 26dB Bandwidth :	0.318MHz
Band Edge :	-20.58dBm	Measurement Value :	-20.83dBm

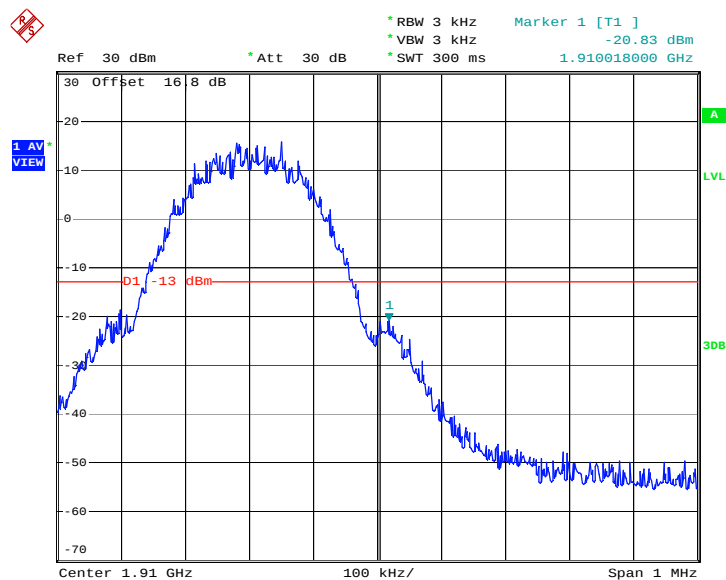Higher Band Edge Plot on Channel 810 (1909.8 MHz)


Date: 15.JUL.2012 01:25:38

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)


Band :	GSM1900	Test Mode :	EDGE 8 Link
Correction Factor :	0.17dB	Maximum 26dB Bandwidth :	0.312MHz
Band Edge :	-24.50dBm	Measurement Value :	-24.67dBm

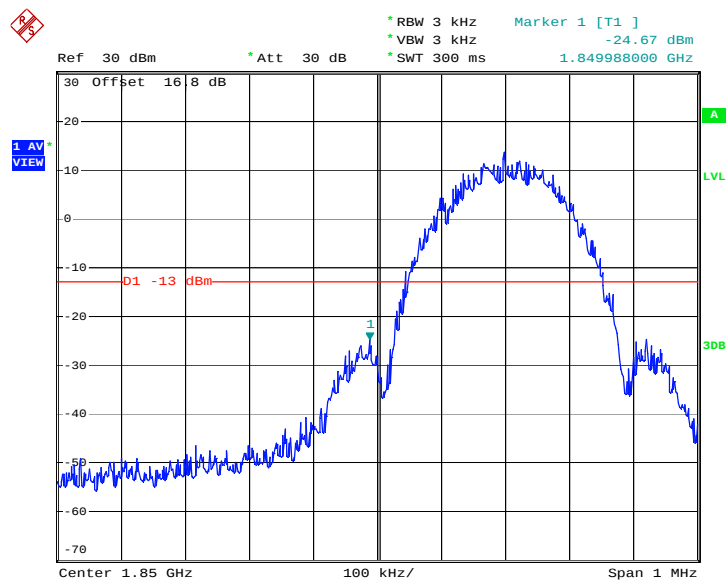Lower Band Edge Plot on Channel 512 (1850.2 MHz)


Date: 15.JUL.2012 03:58:31

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)


Band :	GSM1900	Test Mode :	EDGE 8 Link
Correction Factor :	0.17dB	Maximum 26dB Bandwidth :	0.312MHz
Band Edge :	-26.92dBm	Measurement Value :	-27.09dBm

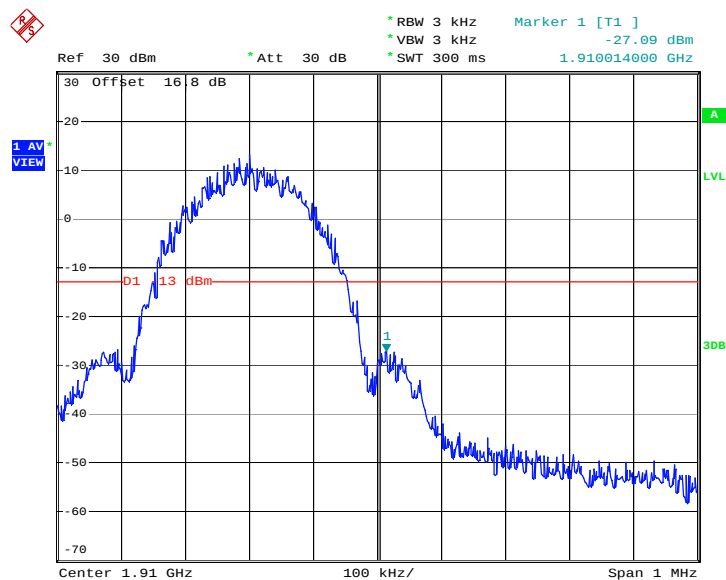Higher Band Edge Plot on Channel 810 (1909.8 MHz)


Date: 15.JUL.2012 03:58:57

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)


Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link
Correction Factor :	-3.15dB	Maximum 26dB Bandwidth :	4.840MHz
Band Edge :	-23.68dBm	Measurement Value :	-20.53dBm

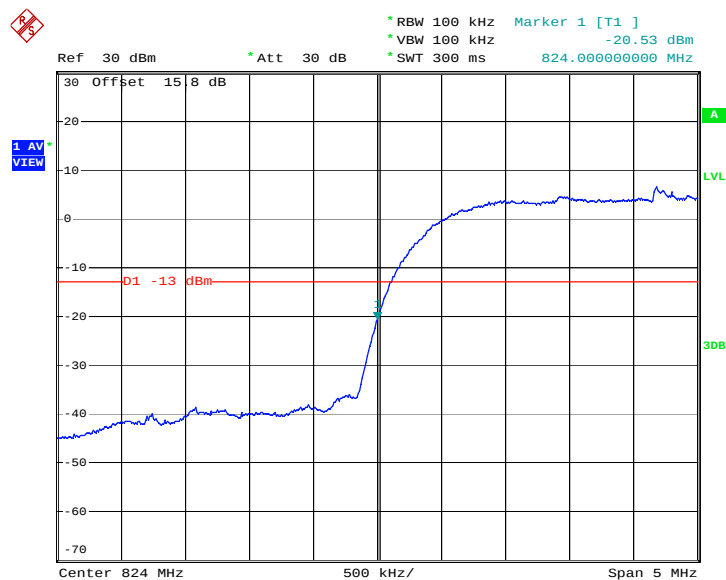Lower Band Edge Plot on Channel 4132 (826.4 MHz)


Date: 15.JUL.2012 04:37:12

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)


Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link
Correction Factor :	-3.15dB	Maximum 26dB Bandwidth :	4.840MHz
Band Edge :	-23.89dBm	Measurement Value :	-20.74dBm

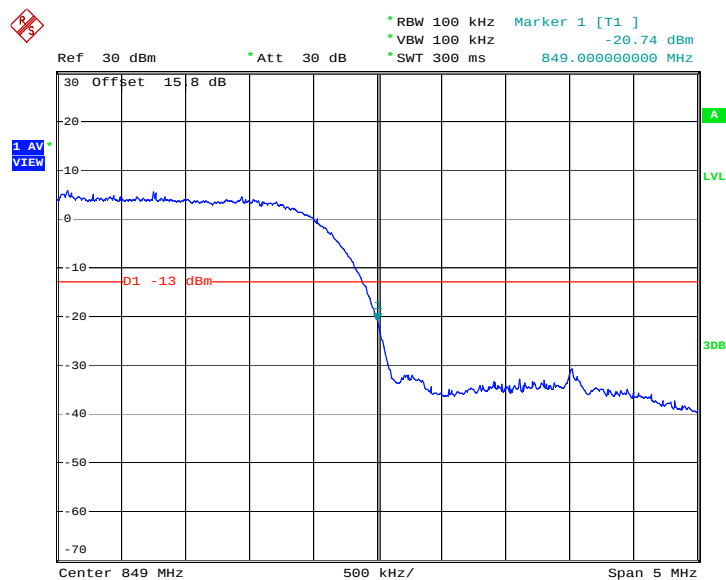Higher Band Edge Plot on Channel 4233 (846.6 MHz)


Date: 15.JUL.2012 04:37:38

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)


Band :	WCDMA Band IV	Test Mode :	RMC 12.2Kbps Link
Correction Factor :	-3.15dB	Maximum 26dB Bandwidth :	4.840MHz
Band Edge :	-22.05dBm	Measurement Value :	-18.90dBm

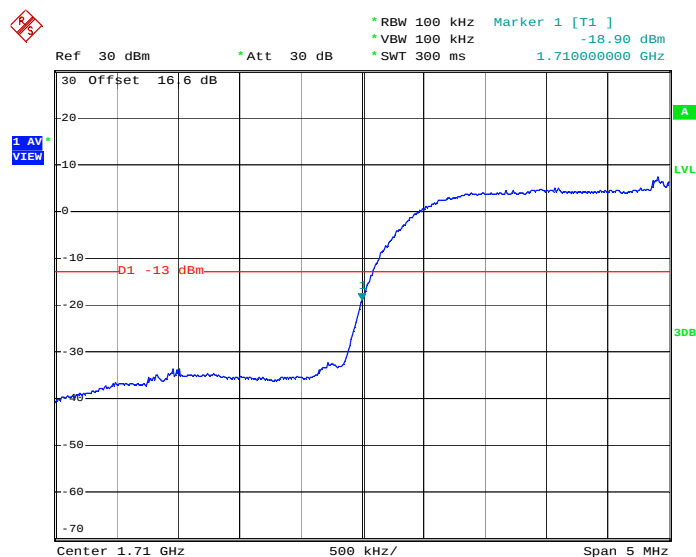Lower Band Edge Plot on Channel 1312 (1712.4 MHz)


Date: 15.JUL.2012 04:51:53

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)


Band :	WCDMA Band IV	Test Mode :	RMC 12.2Kbps Link
Correction Factor :	-3.15dB	Maximum 26dB Bandwidth :	4.840MHz
Band Edge :	-20.47dBm	Measurement Value :	-17.32dBm

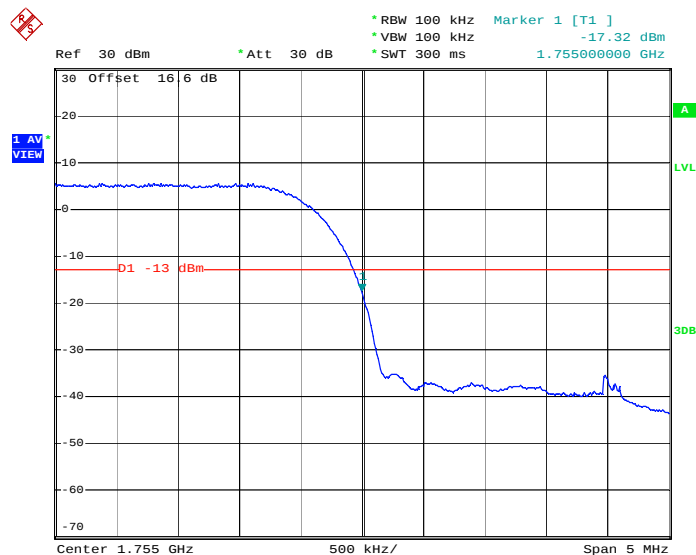Higher Band Edge Plot on Channel 1513 (1752.6 MHz)


Date: 15.JUL.2012 04:52:19

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)


Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link
Correction Factor :	-3.15dB	Maximum 26dB Bandwidth :	4.840MHz
Band Edge :	-21.15dBm	Measurement Value :	-18.00dBm

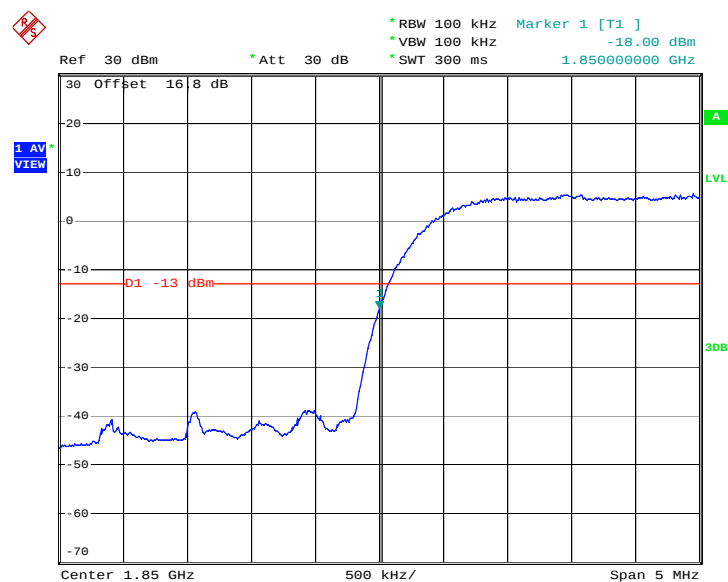Lower Band Edge Plot on Channel 9262 (1852.4 MHz)


Date: 15.JUL.2012 04:26:24

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)

Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link
Correction Factor :	-3.15dB	Maximum 26dB Bandwidth :	4.840MHz
Band Edge :	-21.60dBm	Measurement Value :	-18.45dBm

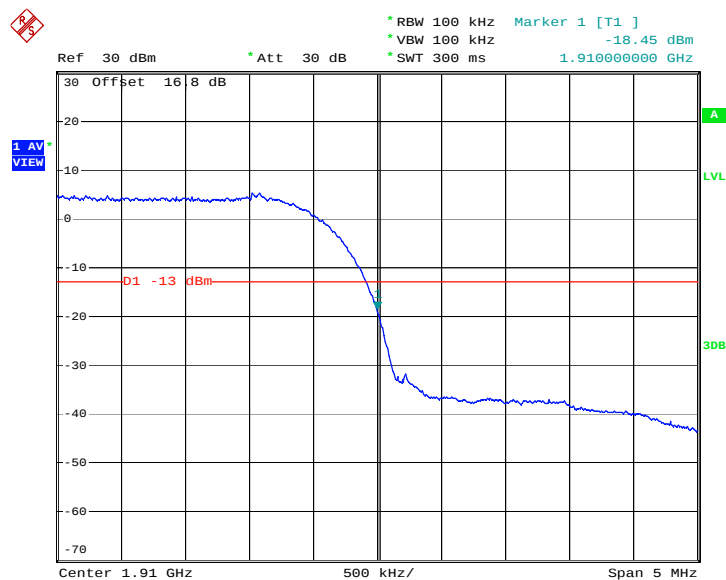Higher Band Edge Plot on Channel 9538 (1907.6 MHz)


Date: 15.JUL.2012 04:26:50

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)

3.6 Conducted Spurious Emission Measurement

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.

3.6.4 Test Setup

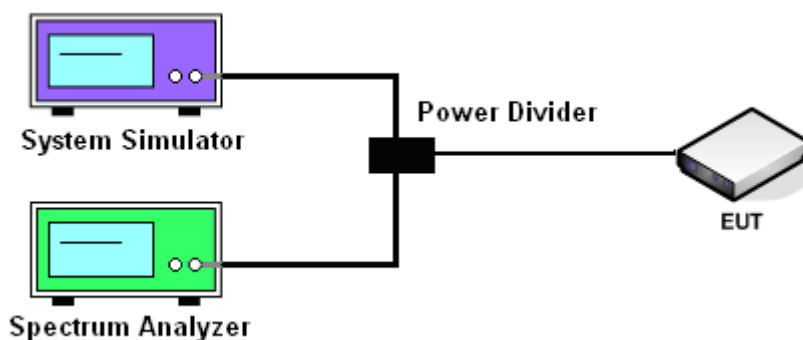


3.6.5 Test Result (Plots) of Conducted Emission

Band :	GSM850	Channel :	CH189
Test Mode :	GPRS 8 Link	Frequency :	836.4 MHz

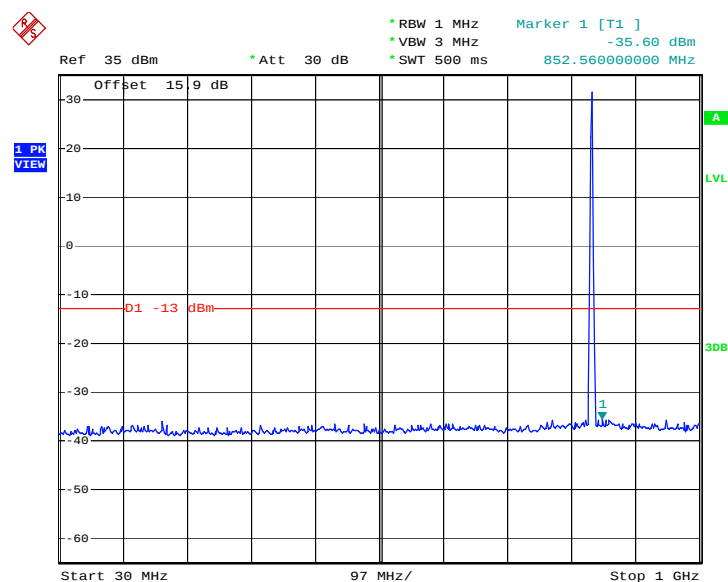
Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 14.JUL.2012 22:02:15

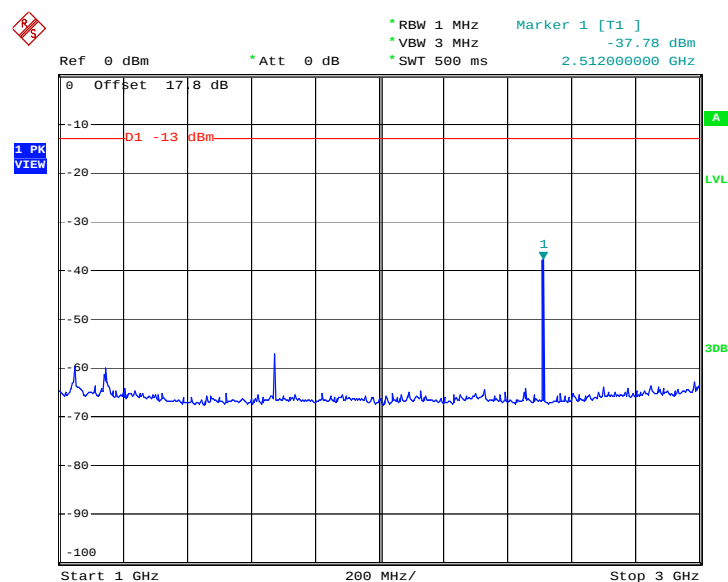Conducted Spurious Emission Plot between 1GHz ~ 3GHz


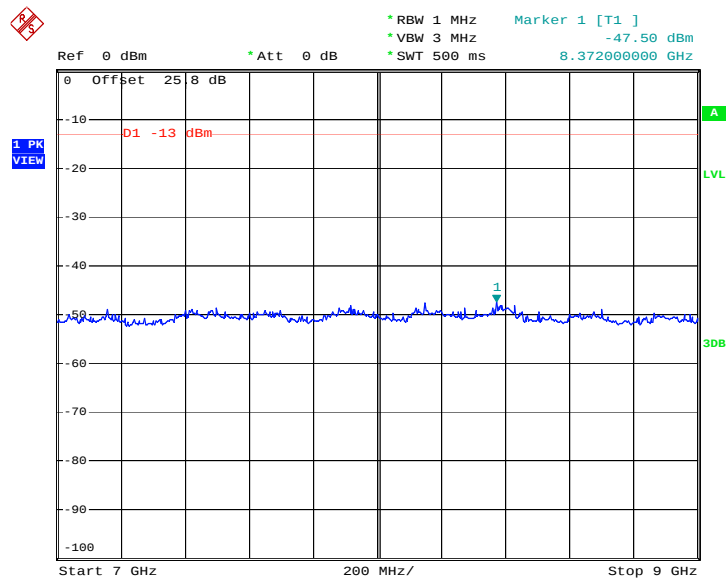
Date: 14.JUL.2012 22:02:39

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

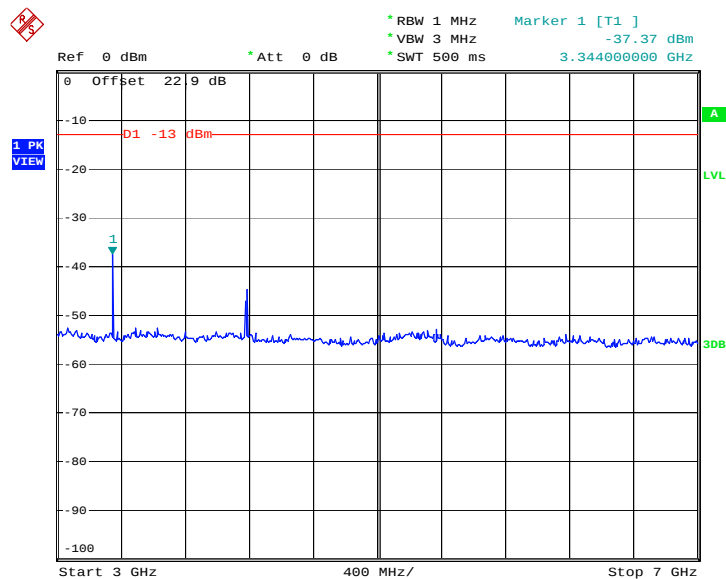


Date: 14.JUL.2012 22:02:52

Conducted Spurious Emission Plot between 7GHz ~ 9GHz




Date: 14.JUL.2012 22:03:04

Band :	GSM850	Channel :	CH189
Test Mode :	EDGE 8 Link	Frequency :	836.4 MHz

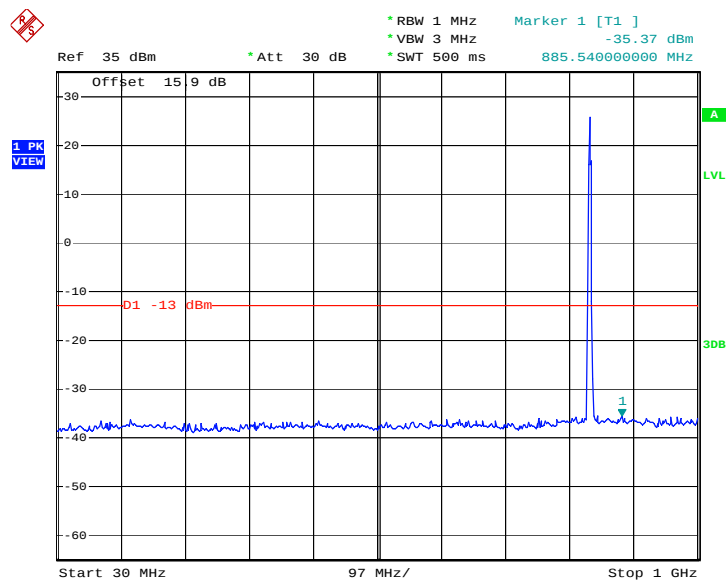
Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 15.JUL.2012 04:05:31

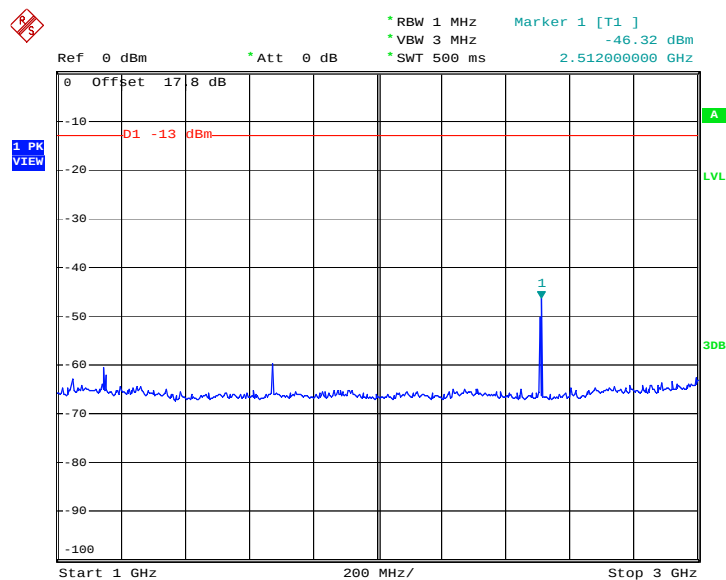Conducted Spurious Emission Plot between 1GHz ~ 3GHz


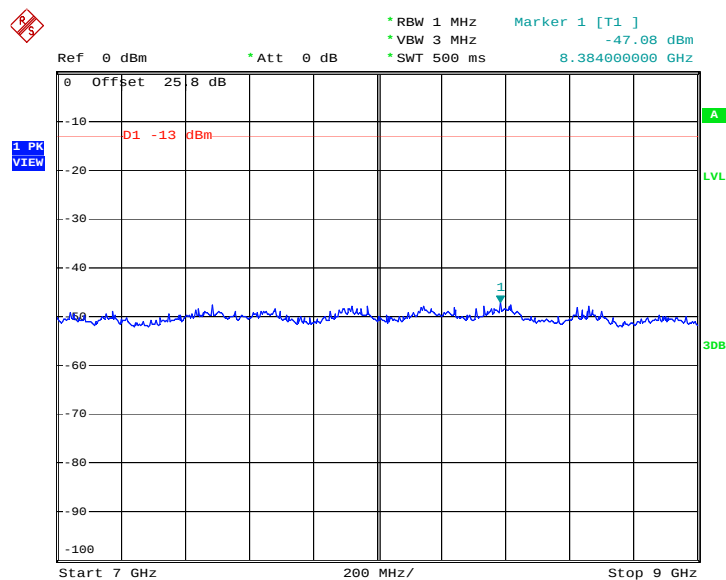
Date: 15.JUL.2012 04:06:09

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

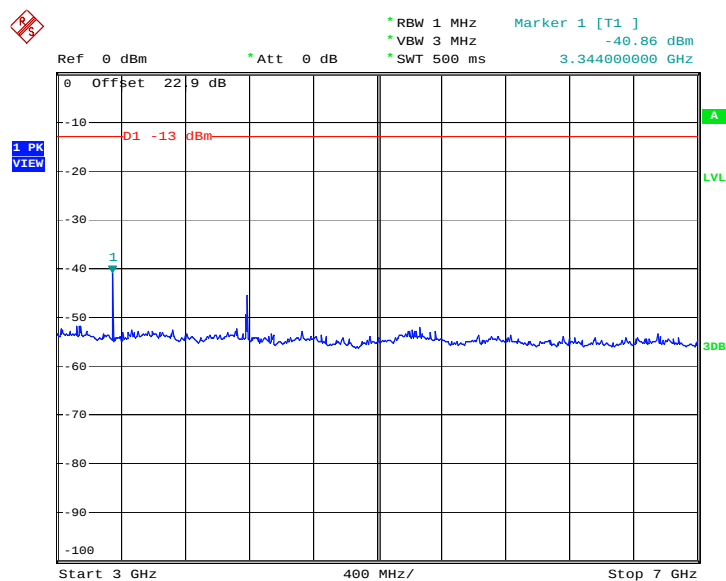

Date: 15.JUL.2012 04:06:21


Conducted Spurious Emission Plot between 7GHz ~ 9GHz



Date: 15.JUL.2012 04:06:35


Band :	GSM1900	Channel :	CH661
Test Mode :	GPRS 8 Link	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

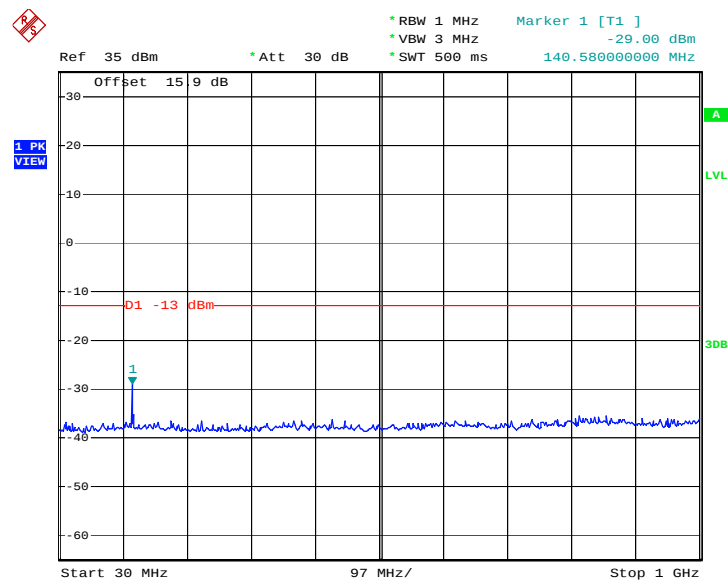


Date: 15.JUL.2012 01:19:19


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

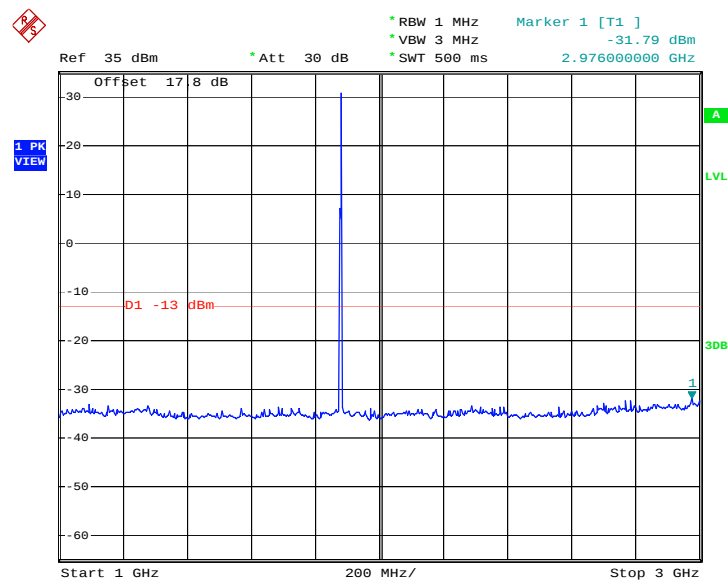

Date: 15.JUL.2012 01:19:32

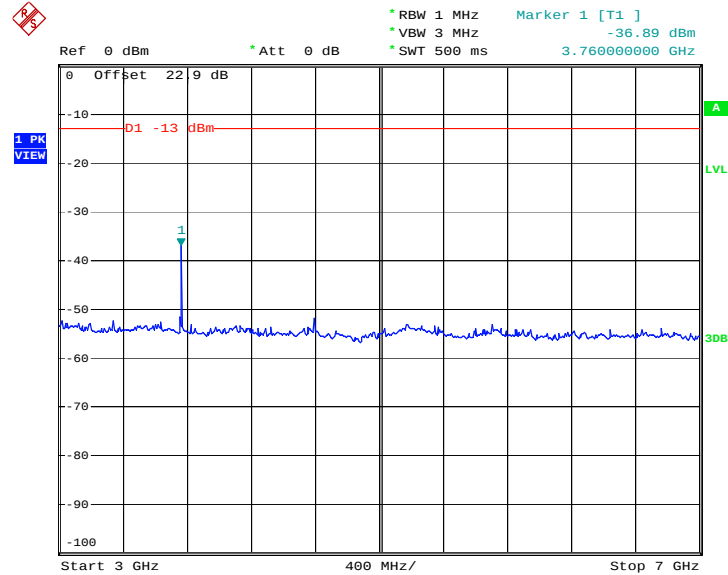Conducted Spurious Emission Plot between 3GHz ~ 7GHz


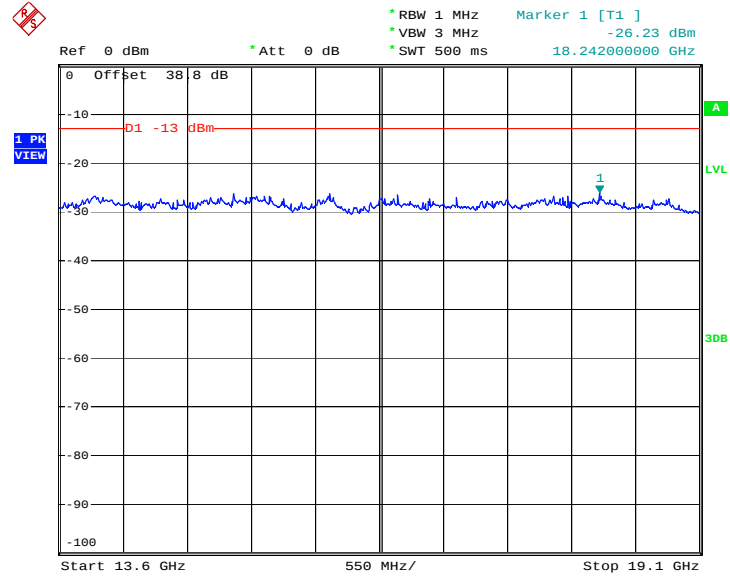
Date: 15.JUL.2012 01:19:49

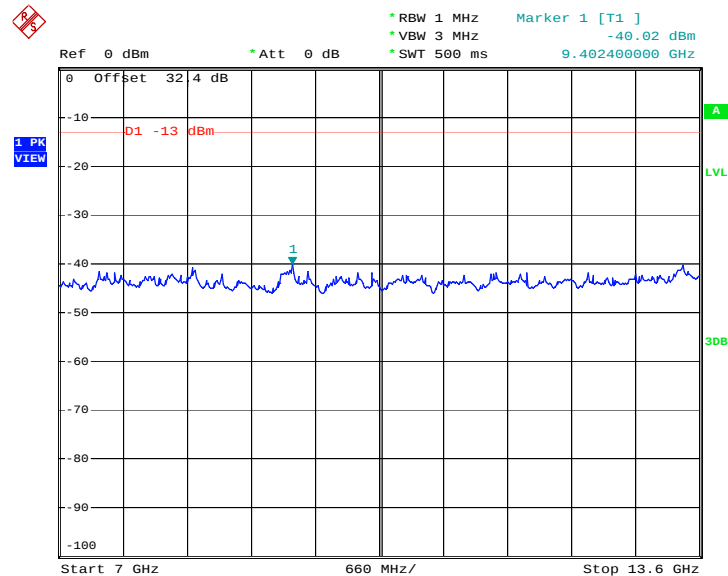Conducted Spurious Emission Plot between 7GHz ~ 13.6G


Date: 15.JUL.2012 01:20:02




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz




Date: 15.JUL.2012 01:20:14

Band :	GSM1900	Channel :	CH661
Test Mode :	EDGE 8 Link	Frequency :	1880.0 MHz

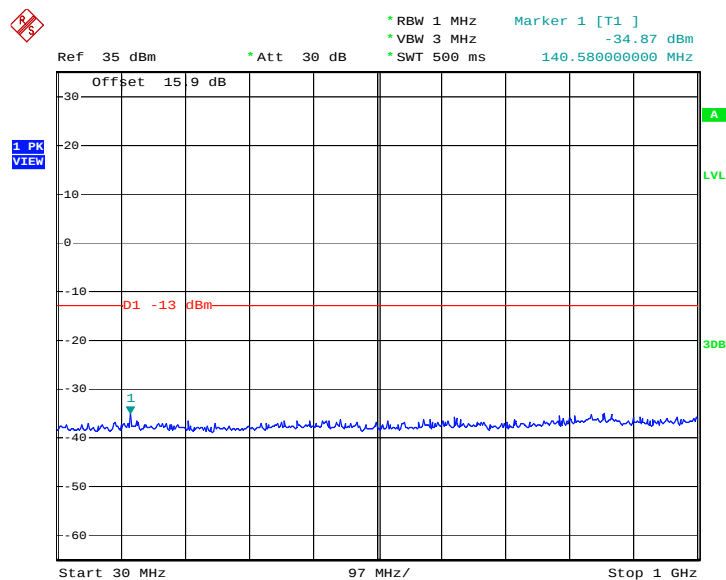
Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 15.JUL.2012 03:53:00

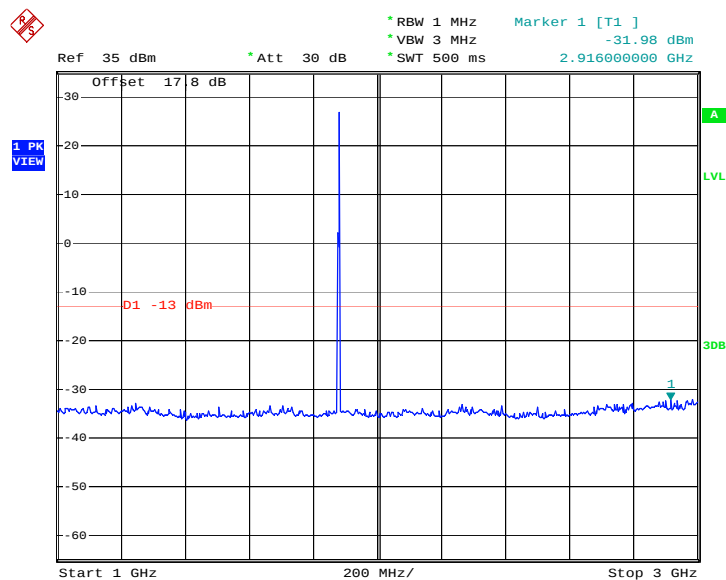Conducted Spurious Emission Plot between 1GHz ~ 3GHz


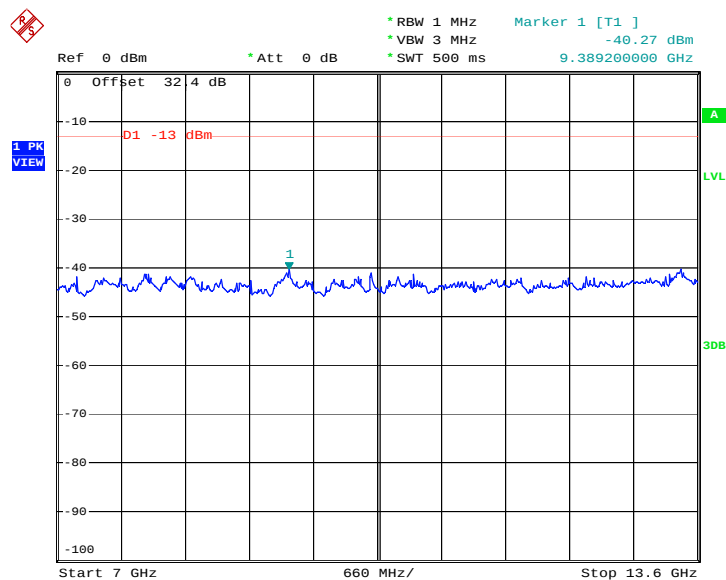
Date: 15.JUL.2012 03:53:13

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

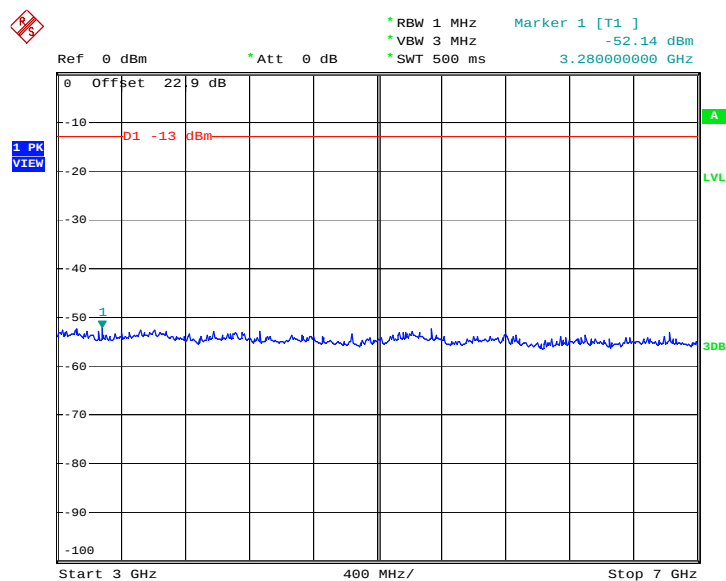

Date: 15.JUL.2012 03:53:28


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz



Date: 15.JUL.2012 03:53:41




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

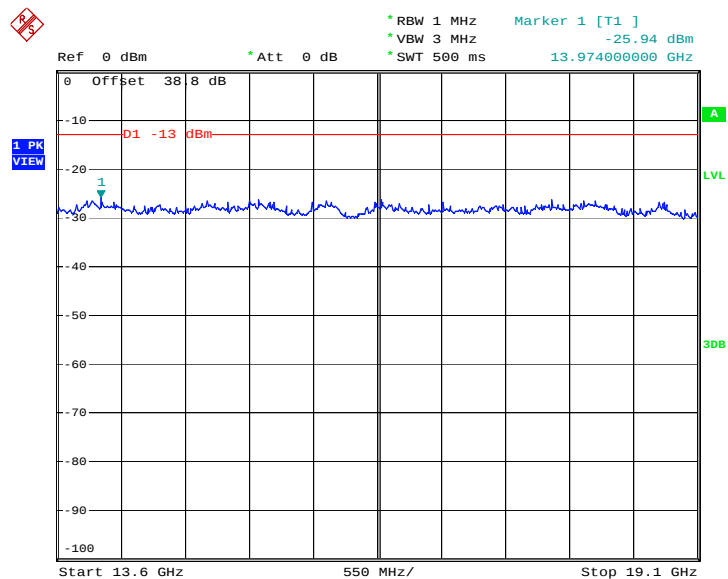

Date: 15.JUL.2012 03:53:54


Band :	WCDMA Band V	Channel :	CH4182
Test Mode :	RMC 12.2Kbps Link	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

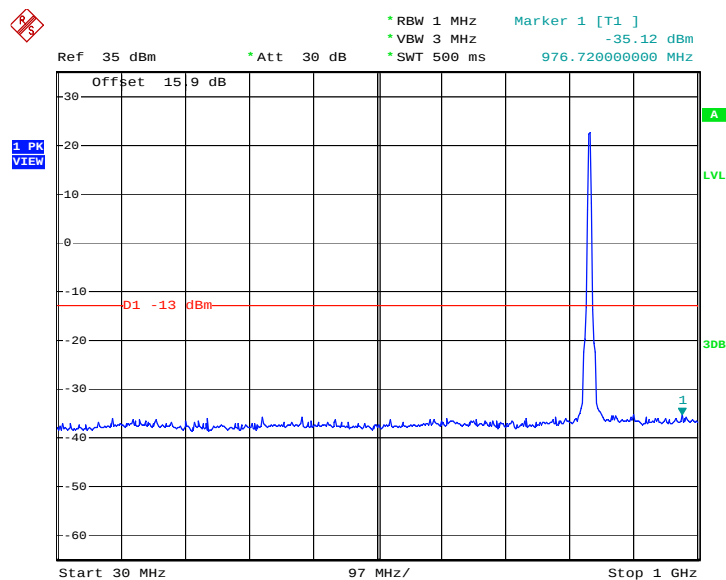


Date: 15.JUL.2012 04:41:38


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

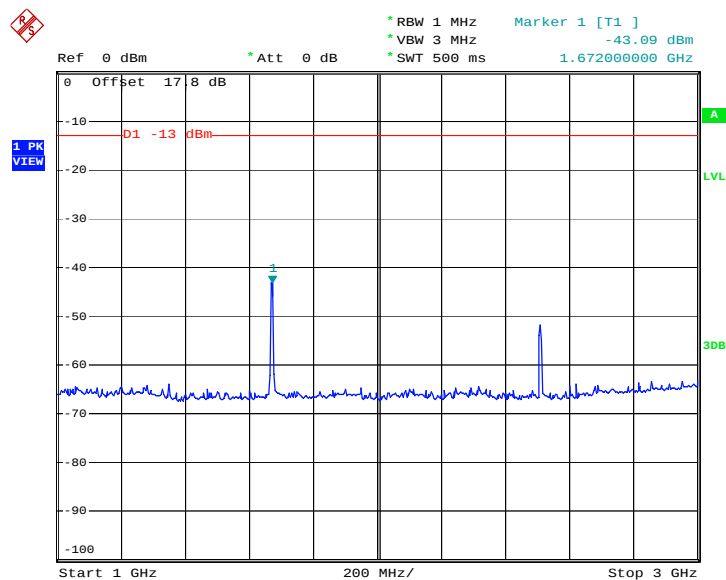

Date: 15.JUL.2012 04:41:56

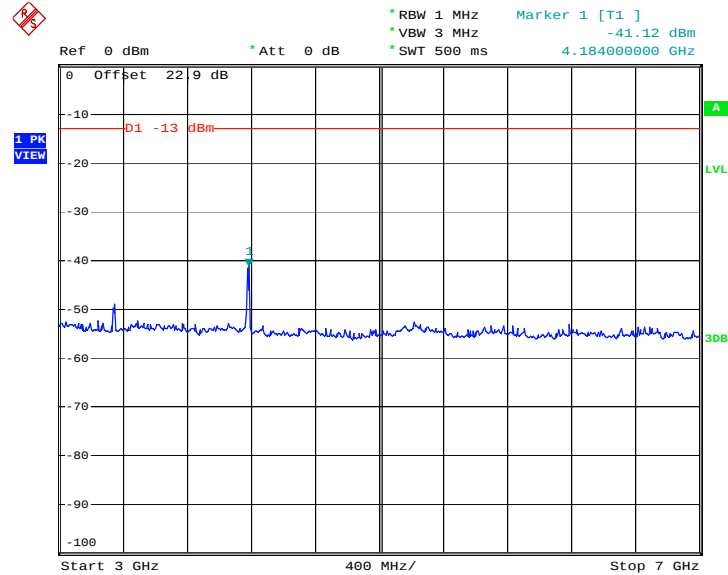
Conducted Spurious Emission Plot between 3GHz ~ 7GHz


Date: 15.JUL.2012 04:42:09

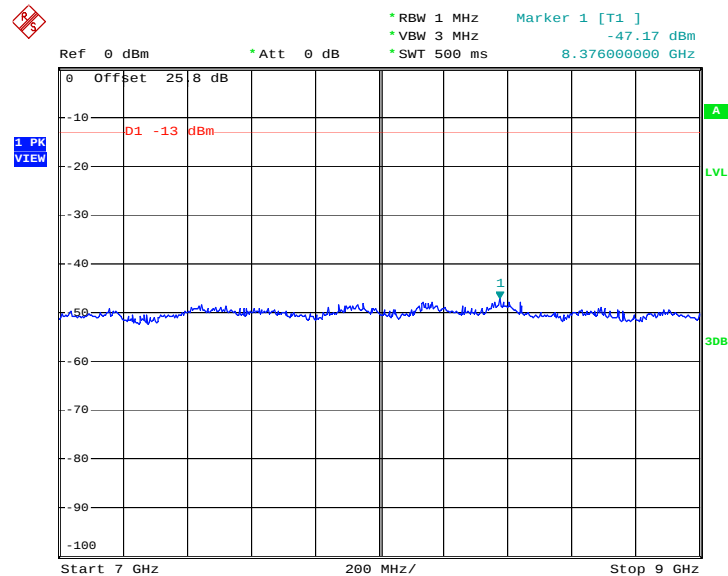
Conducted Spurious Emission Plot between 7GHz ~ 9GHz


Date: 15.JUL.2012 04:42:21


Band :	WCDMA Band IV	Channel :	CH1413
Test Mode :	RMC 12.2Kbps Link	Frequency :	1732.6 MHz

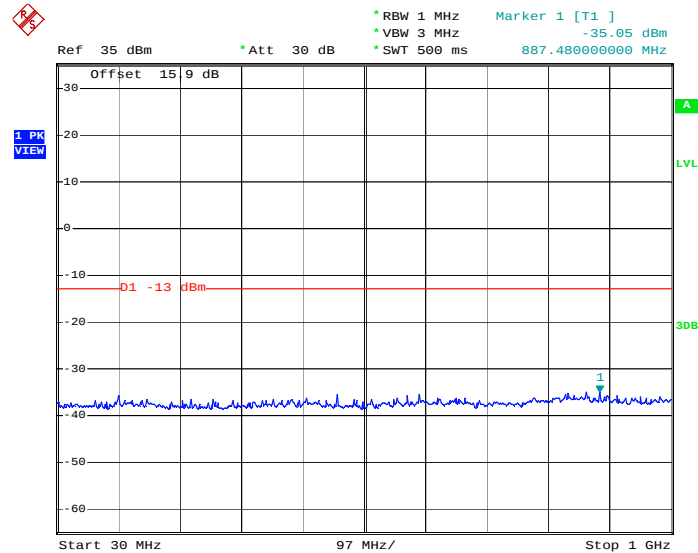Conducted Spurious Emission Plot between 30MHz ~ 1GHz


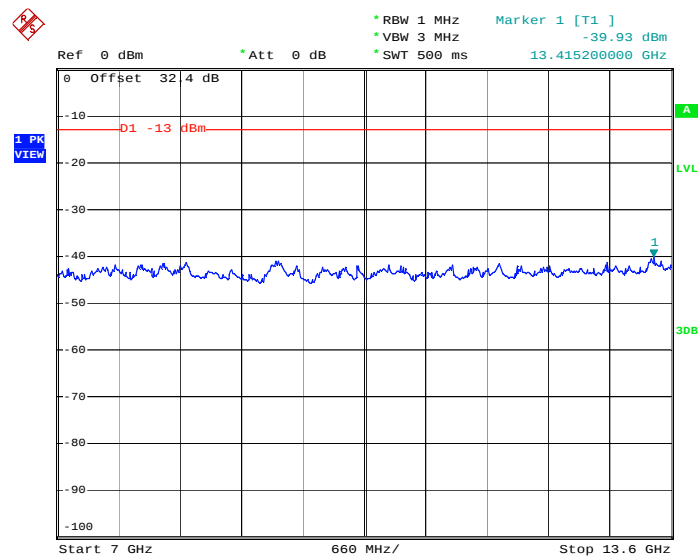
Date: 15.JUL.2012 04:46:40

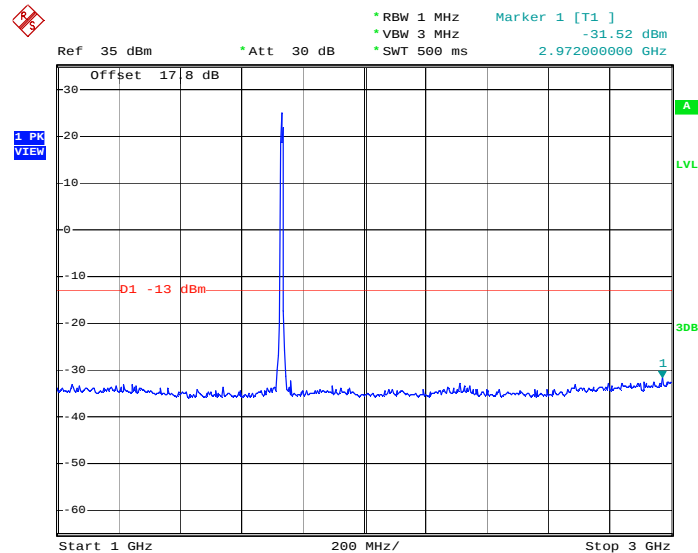Conducted Spurious Emission Plot between 1GHz ~ 3GHz


Date: 15.JUL.2012 04:46:53

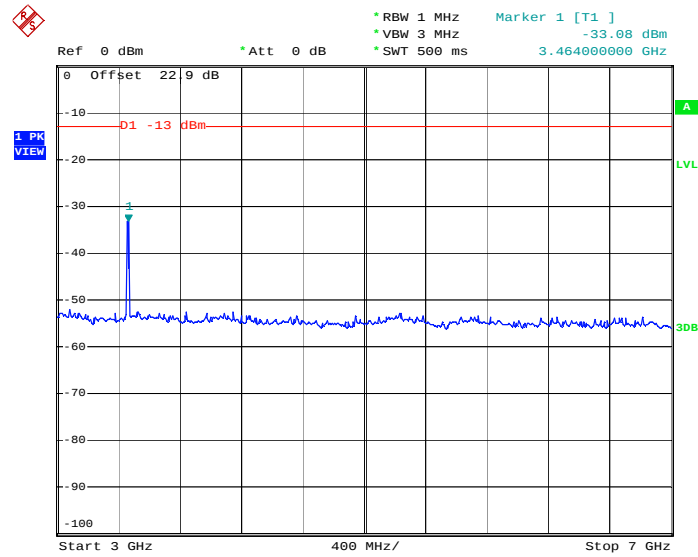Conducted Spurious Emission Plot between 3GHz ~ 7GHz


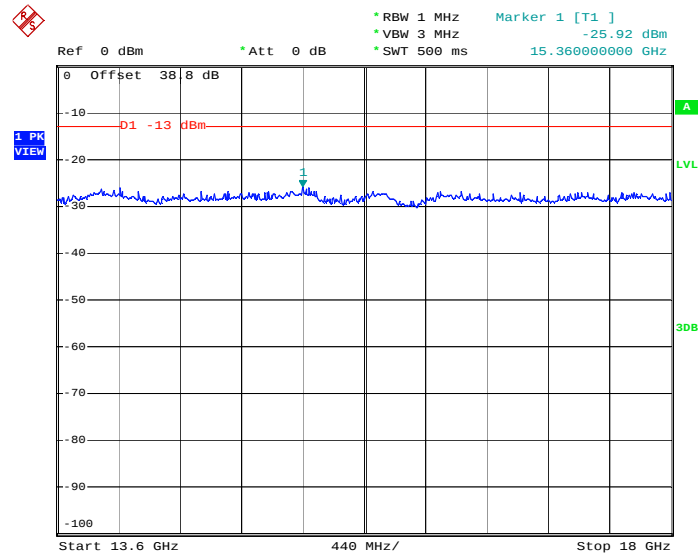
Date: 15.JUL.2012 04:47:08

Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz


Date: 15.JUL.2012 04:47:21




Conducted Spurious Emission Plot between 13.6GHz ~ 18GHz




Date: 15.JUL.2012 04:47:34

Band :	WCDMA Band II	Channel :	CH9400
Test Mode :	RMC 12.2Kbps Link	Frequency :	1880.0 MHz

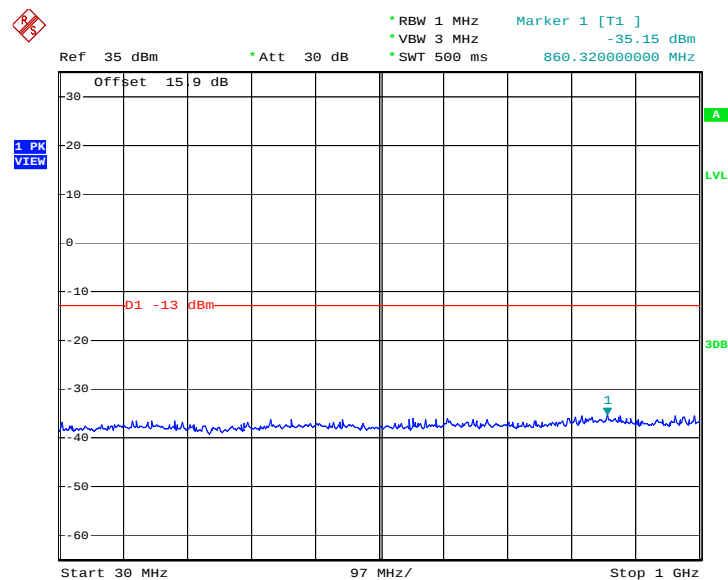
Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 15.JUL.2012 04:17:02

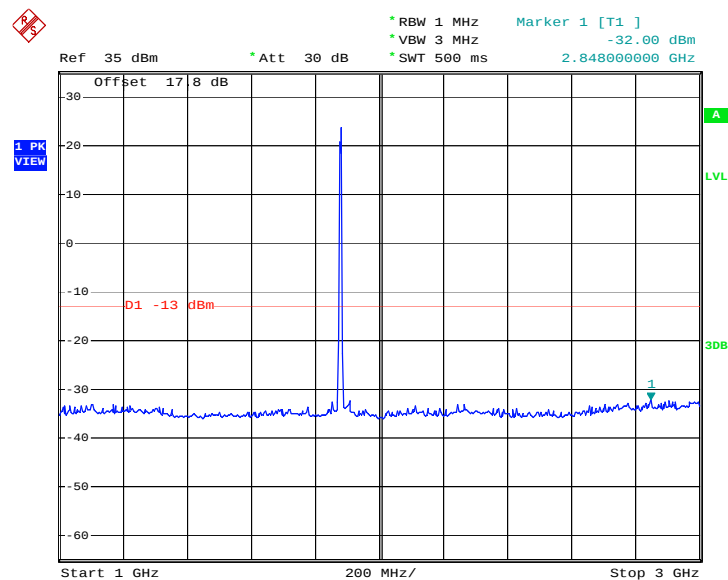Conducted Spurious Emission Plot between 1GHz ~ 3GHz


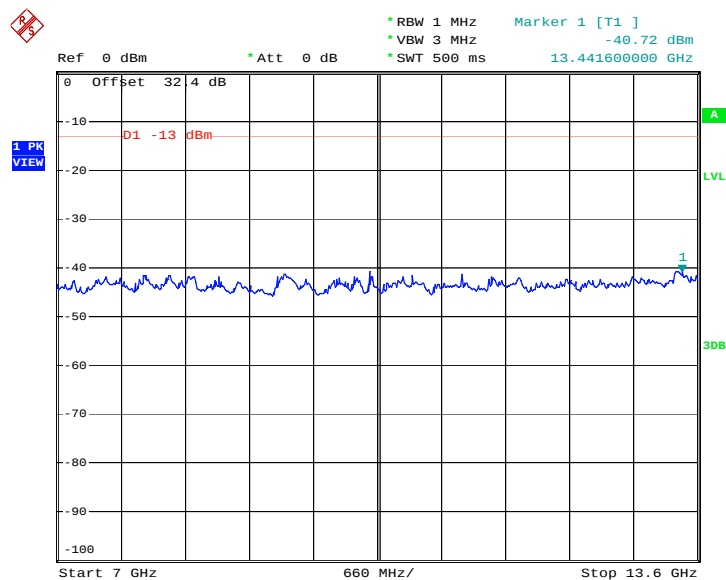
Date: 15.JUL.2012 04:17:15

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

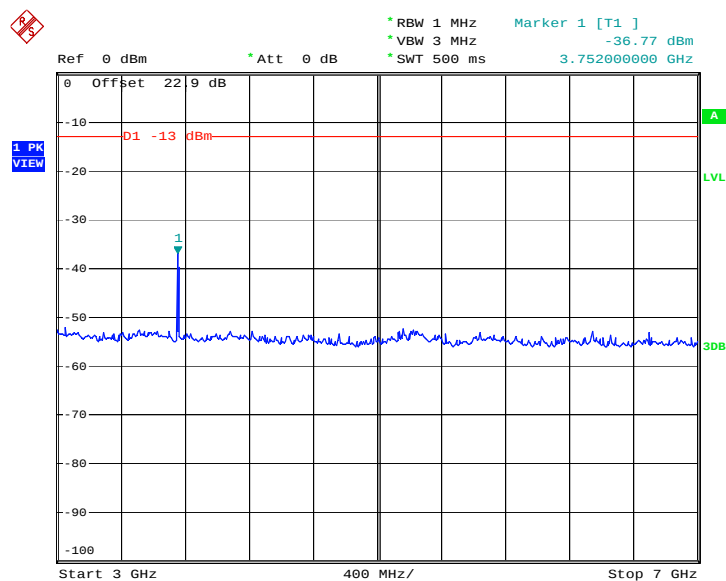

Date: 15.JUL.2012 04:17:29


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz



Date: 15.JUL.2012 04:17:42



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

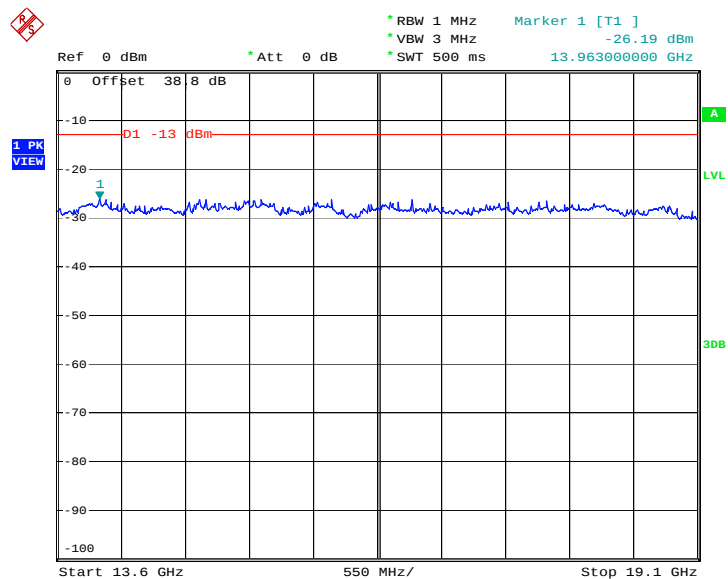

Date: 15.JUL.2012 04:17:55

3.7 Field Strength of Spurious Radiation Measurement

3.7.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.7.2 Measuring Instruments


See list of measuring instruments of this test report.

3.7.3 Test Procedures


1. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$

3.7.4 Test Setup


For radiated emissions below 30MHz

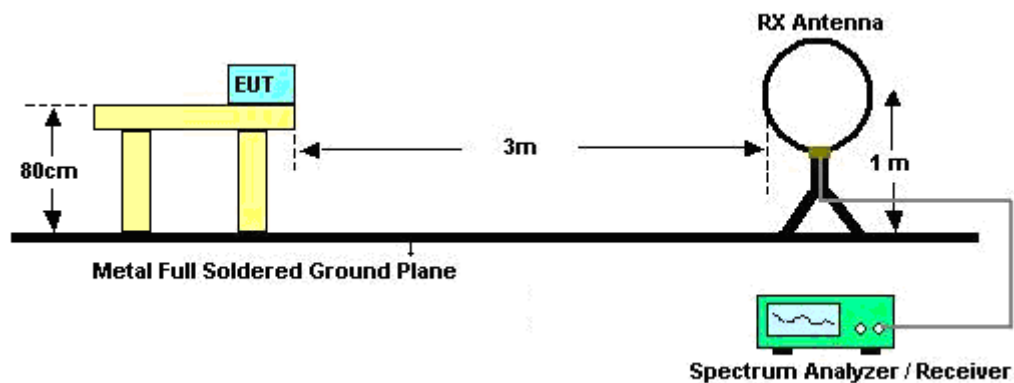

For radiated emissions from 30MHz to 1GHz

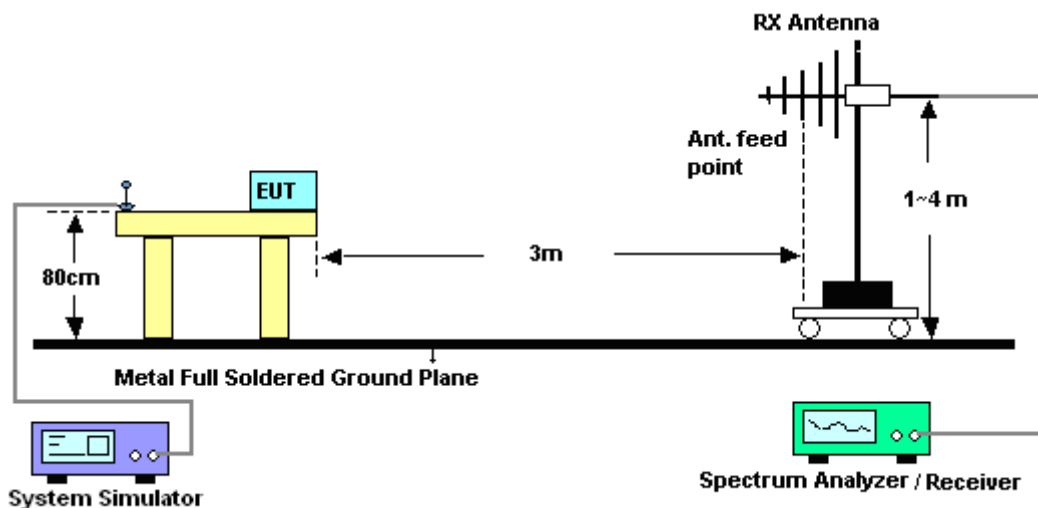

For radiated emissions above 1GHz

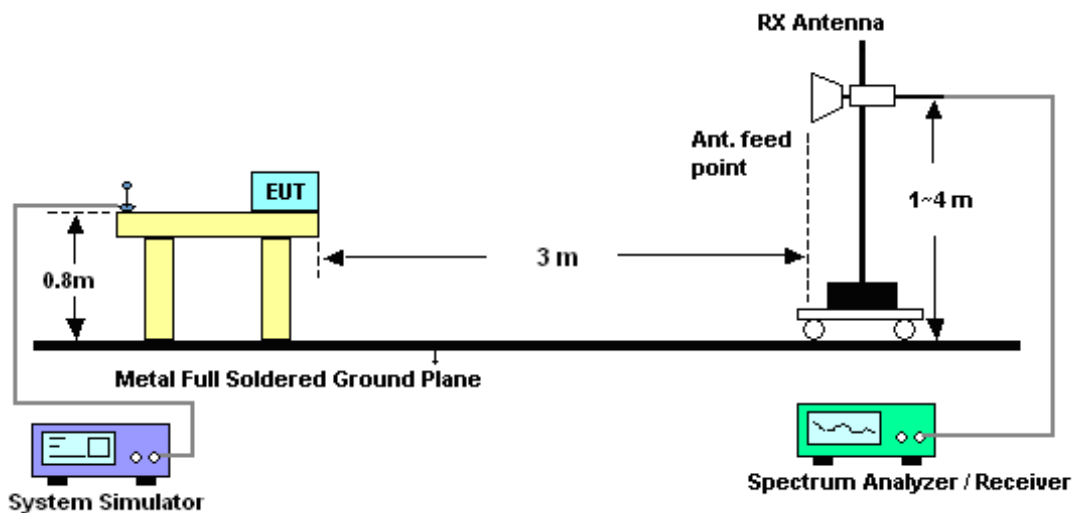


3.7.5 Test Results of Radiated Emissions (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.7.6 Test Result of Field Strength of Spurious Radiated


Band :	GSM850	Temperature :	23~24℃
Test Mode :	GPRS 8 Link	Relative Humidity :	51~53%
Test Engineer :	David Ke	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

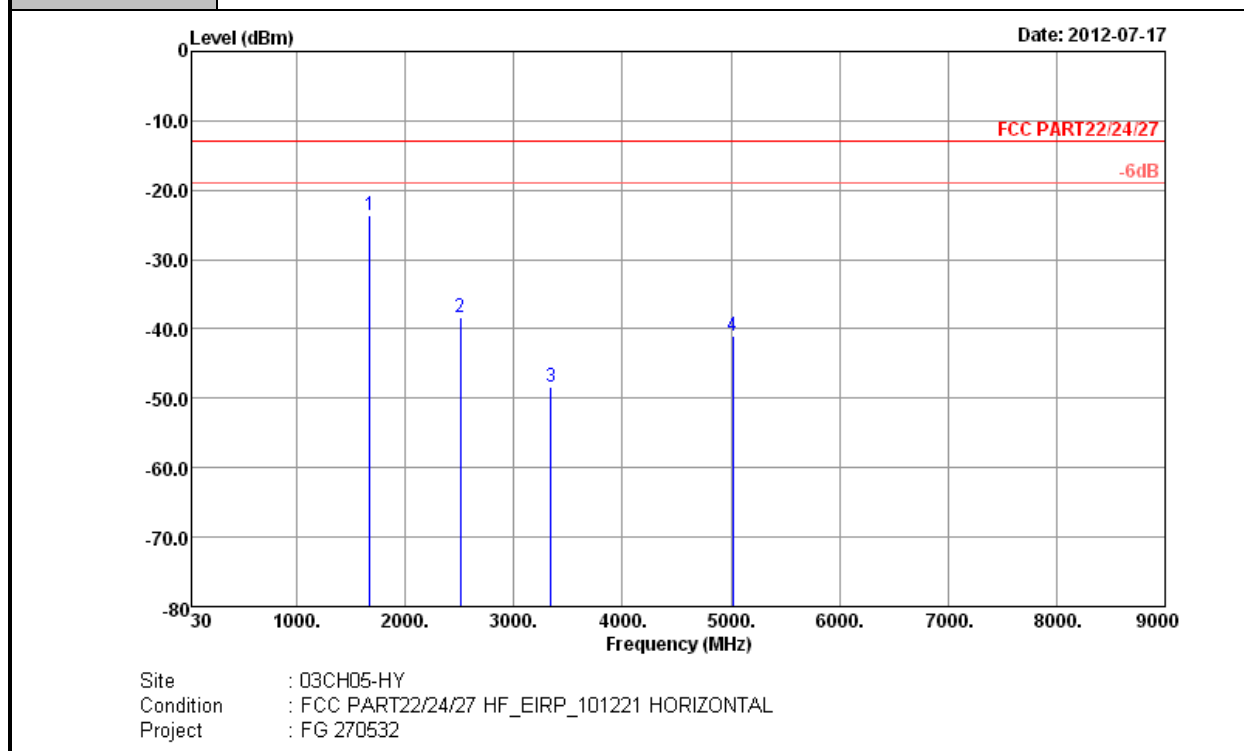

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-23.63	-13	-10.63	-29.51	-24.82	2.15	5.49	H	Pass
2509	-38.40	-13	-25.40	-47.46	-40.29	2.38	6.41	H	Pass
3345	-48.46	-13	-35.46	-60.22	-51.79	2.86	8.34	H	Pass
5018	-41.03	-13	-28.03	-58.52	-45.77	3.62	10.51	H	Pass




Band :	GSM850	Temperature :	23~24℃
Test Mode :	GPRS 8 Link	Relative Humidity :	51~53%
Test Engineer :	David Ke	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

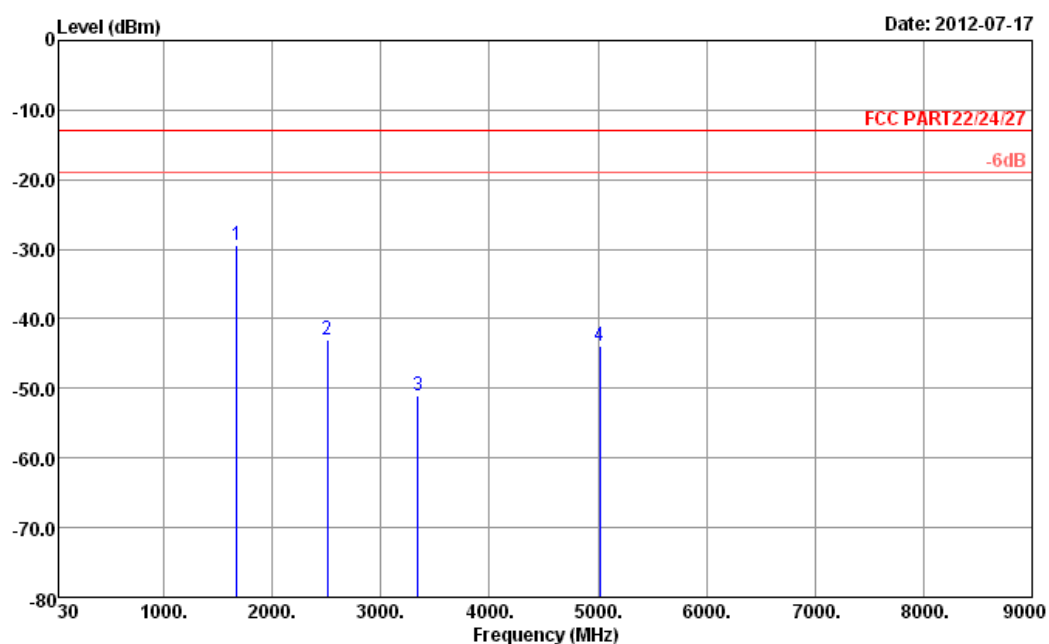

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-29.34	-13	-16.34	-35.08	-30.53	2.15	5.49	V	Pass
2509	-43.02	-13	-30.02	-52.41	-44.91	2.38	6.41	V	Pass
3345	-50.94	-13	-37.94	-62.15	-54.27	2.86	8.34	V	Pass
5018	-43.97	-13	-30.97	-60.55	-48.71	3.62	10.51	V	Pass



Band :	GSM850	Temperature :	23~24℃
Test Mode :	EDGE 8 Link	Relative Humidity :	51~53%
Test Engineer :	David Ke	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

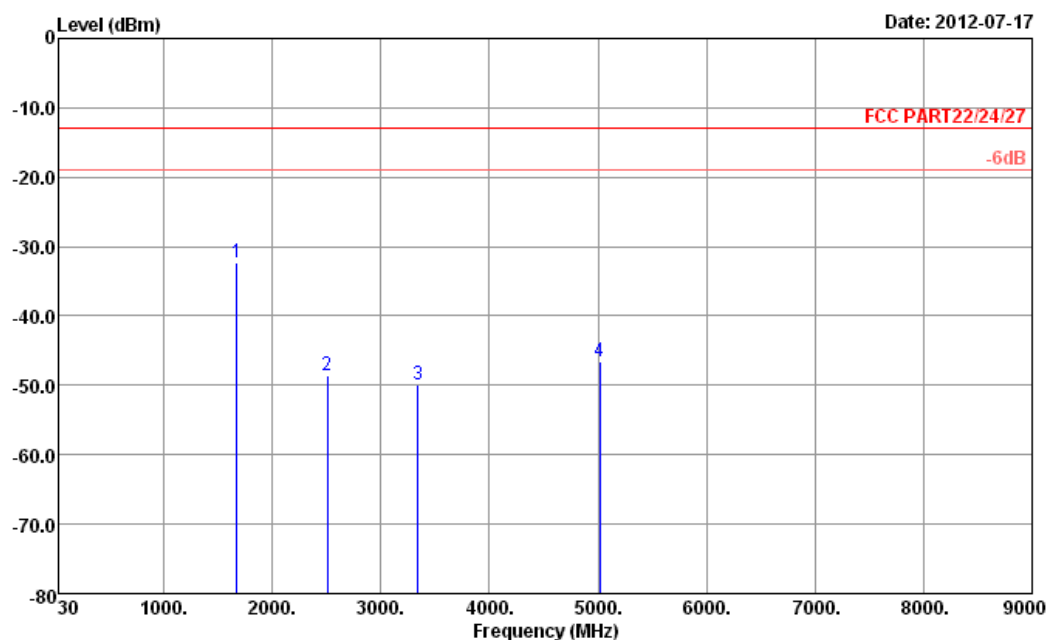


Site : 03CH05-HY
Condition : FCC PART22/24/27 HF_EIRP_101221 HORIZONTAL
Project : FG 270532

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-32.33	-13	-19.33	-37.97	-33.52	2.15	5.49	H	Pass
2509	-48.60	-13	-35.60	-59.16	-50.49	2.38	6.41	H	Pass
3345	-49.84	-13	-36.84	-61.25	-53.17	2.86	8.34	H	Pass
5018	-46.59	-13	-33.59	-63.49	-51.33	3.62	10.51	H	Pass




Band :	GSM850	Temperature :	23~24℃
Test Mode :	EDGE 8 Link	Relative Humidity :	51~53%
Test Engineer :	David Ke	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

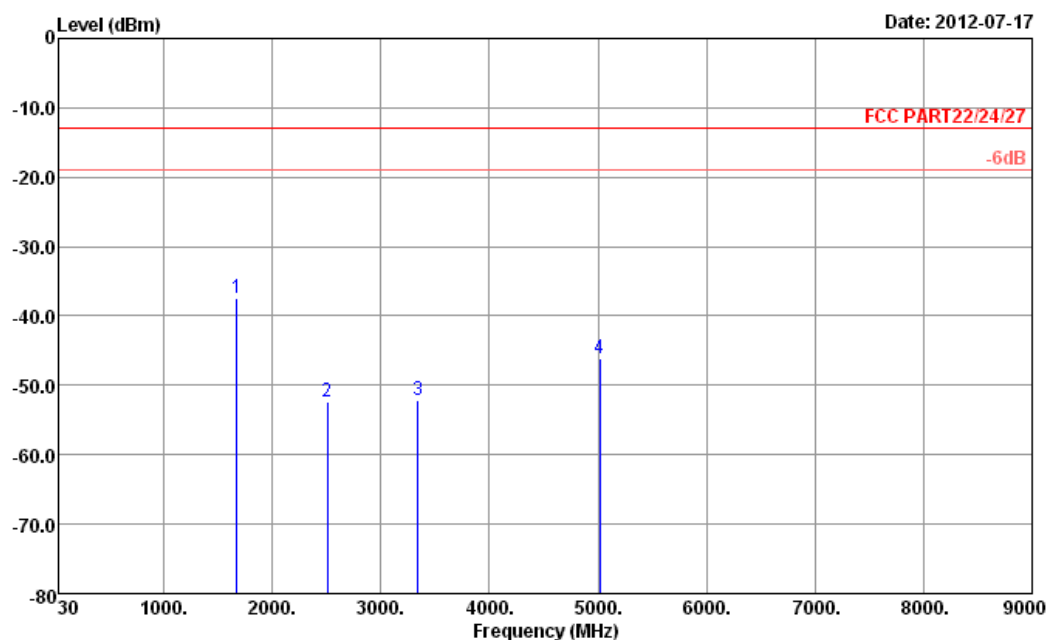

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-37.36	-13	-24.36	-43.85	-38.55	2.15	5.49	V	Pass
2509	-52.42	-13	-39.42	-61.67	-54.31	2.38	6.41	V	Pass
3345	-52.14	-13	-39.14	-63.21	-55.47	2.86	8.34	V	Pass
5018	-46.10	-13	-33.10	-62.92	-50.84	3.62	10.51	V	Pass




Band :	GSM1900	Temperature :	23~24℃
Test Mode :	GPRS 8 Link	Relative Humidity :	51~53%
Test Engineer :	David Ke	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

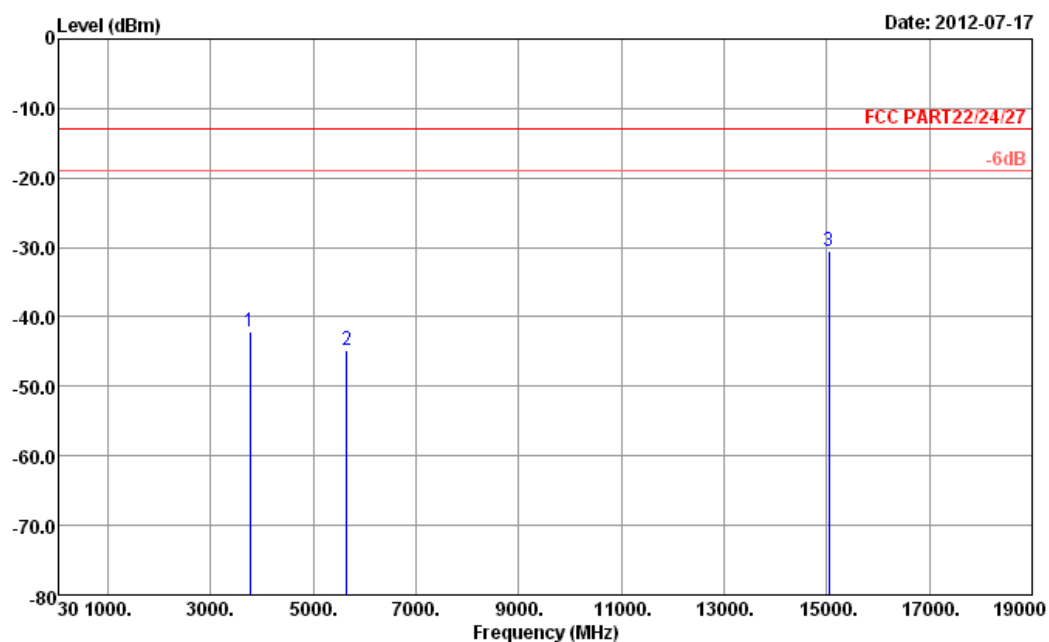

Site : 03CH05-HY
Condition : FCC PART22/24/27 HF_EIRP_101221 HORIZONTAL
Project : FG 270532

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-42.08	-13	-29.08	-55.53	-48.21	2.9292	9.06	H	Pass
5640	-44.74	-13	-31.74	-63.02	-51.66	3.9072	10.83	H	Pass
15040	-30.42	-13	-17.42	-61.53	-37.73	6.6704	13.98	H	Pass

Band :	GSM1900	Temperature :	23~24℃
Test Mode :	GPRS 8 Link	Relative Humidity :	51~53%
Test Engineer :	David Ke	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

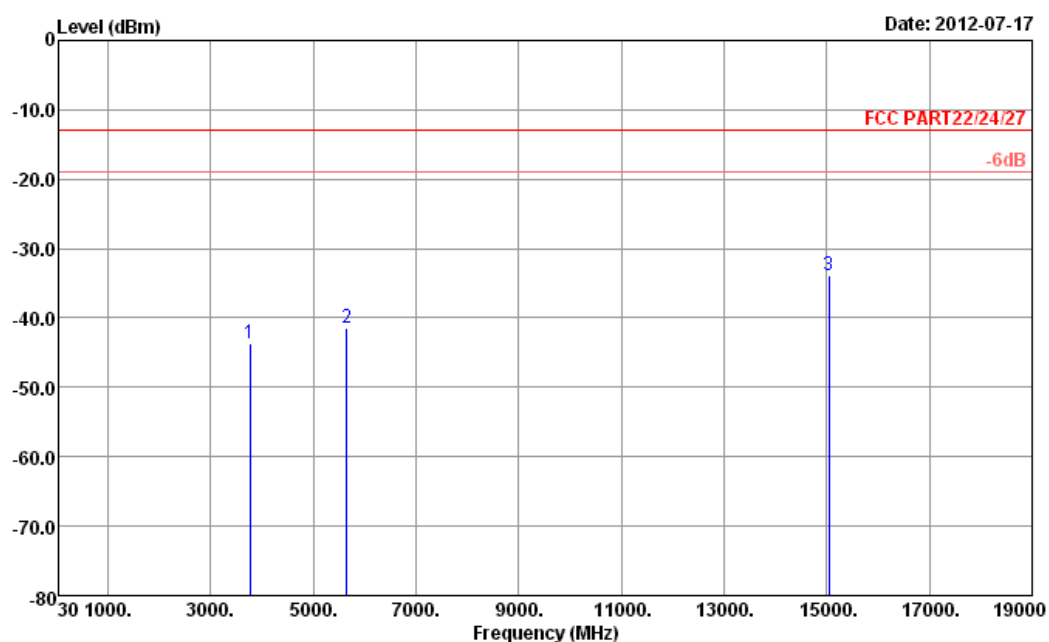


Site : 03CH05-HY
 Condition : FCC PART22/24/27 HF_EIRP_101221 VERTICAL
 Project : FG 270532

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-43.72	-13	-30.72	-56.43	-49.85	2.9292	9.06	V	Pass
5640	-41.39	-13	-28.39	-60.09	-48.31	3.9072	10.83	V	Pass
15040	-33.87	-13	-20.87	-64.44	-41.18	6.6704	13.98	V	Pass



Band :	GSM1900	Temperature :	23~24℃
Test Mode :	EDGE 8 Link	Relative Humidity :	51~53%
Test Engineer :	David Ke	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

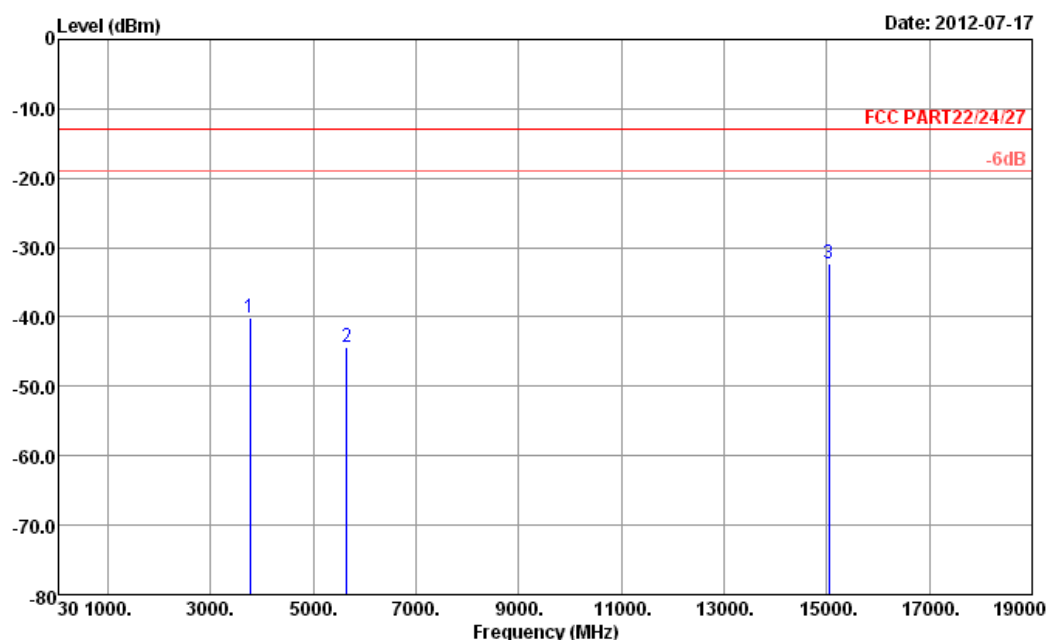


Site : 03CH05-HY
Condition : FCC PART22/24/27 HF_EIRP_101221 HORIZONTAL
Project : FG 270532

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-40.18	-13	-27.18	-52.66	-46.31	2.9292	9.06	H	Pass
5640	-44.40	-13	-31.40	-63.26	-51.32	3.9072	10.83	H	Pass
15040	-32.21	-13	-19.21	-63.19	-39.52	6.6704	13.98	H	Pass



Band :	GSM1900	Temperature :	23~24℃
Test Mode :	EDGE 8 Link	Relative Humidity :	51~53%
Test Engineer :	David Ke	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

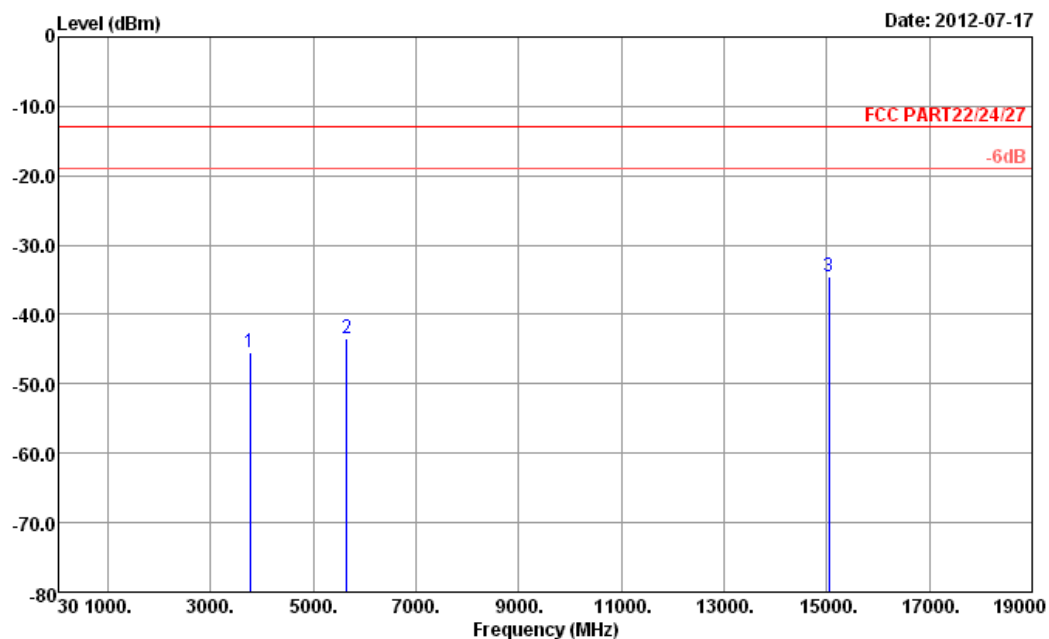


Site : 03CH05-HY
Condition : FCC PART22/24/27 HF_EIRP_101221 VERTICAL
Project : FG 270532

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-45.53	-13	-32.53	-58.87	-51.66	2.9292	9.06	V	Pass
5640	-43.50	-13	-30.50	-62.61	-50.42	3.9072	10.83	V	Pass
15040	-34.43	-13	-21.43	-65.13	-41.74	6.6704	13.98	V	Pass




Band :	WCDMA Band V	Temperature :	23~24℃
Test Mode :	RMC 12.2Kbps Link	Relative Humidity :	51~53%
Test Engineer :	David Ke	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

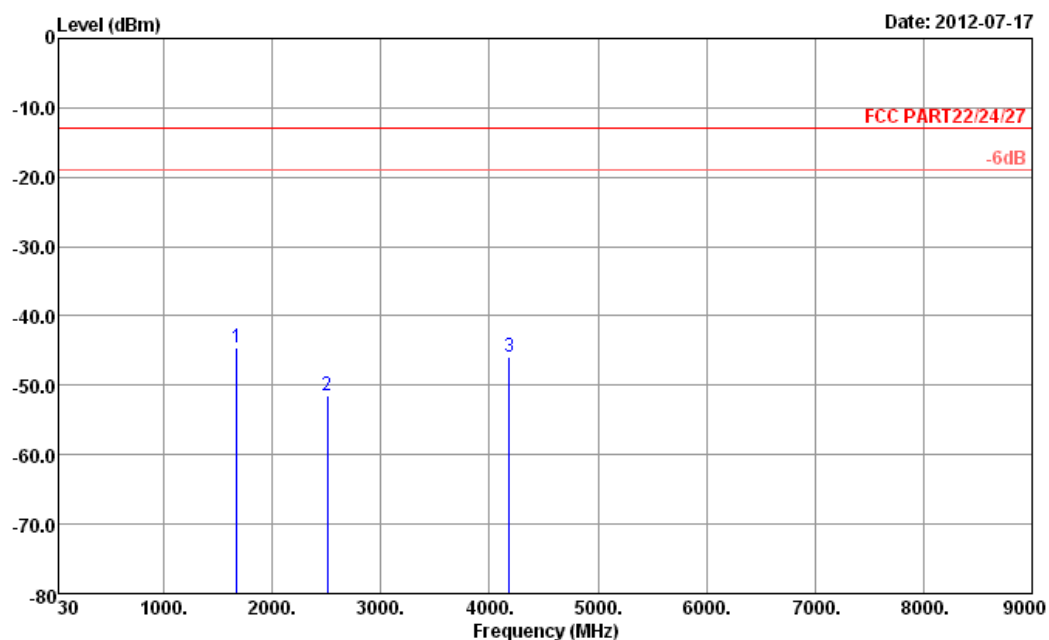

Site : 03CH05-HY
Condition : FCC PART22/24/27 HF_EIRP_101221 HORIZONTAL
Project : FG 270532

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-44.49	-13	-31.49	-49.96	-45.68	2.15	5.49	H	Pass
2509	-51.40	-13	-38.40	-61.01	-53.29	2.38	6.41	H	Pass
4182	-45.83	-13	-32.83	-60.82	-49.77	3.26	9.35	H	Pass


Band :	WCDMA Band V	Temperature :	23~24℃
Test Mode :	RMC 12.2Kbps Link	Relative Humidity :	51~53%
Test Engineer :	David Ke	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

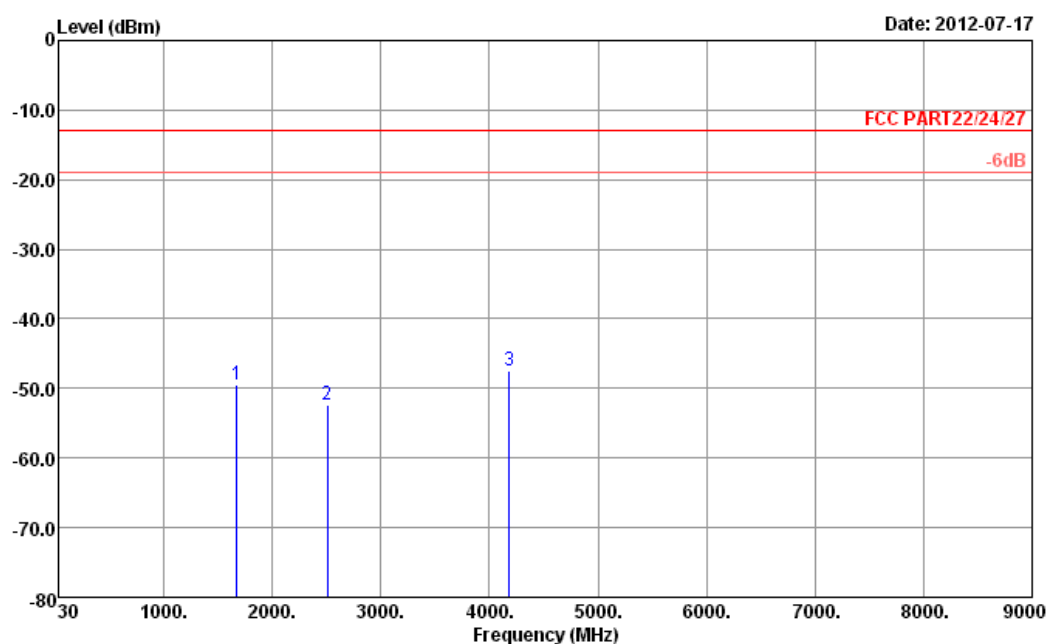

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-49.58	-13	-36.58	-55.05	-50.77	2.15	5.49	V	Pass
2509	-52.47	-13	-39.47	-61.81	-54.36	2.38	6.41	V	Pass
4182	-47.50	-13	-34.50	-62.71	-51.44	3.26	9.35	V	Pass




Band :	WCDMA Band IV	Temperature :	23~24℃
Test Mode :	RMC 12.2Kbps Link	Relative Humidity :	51~53%
Test Engineer :	David Ke	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

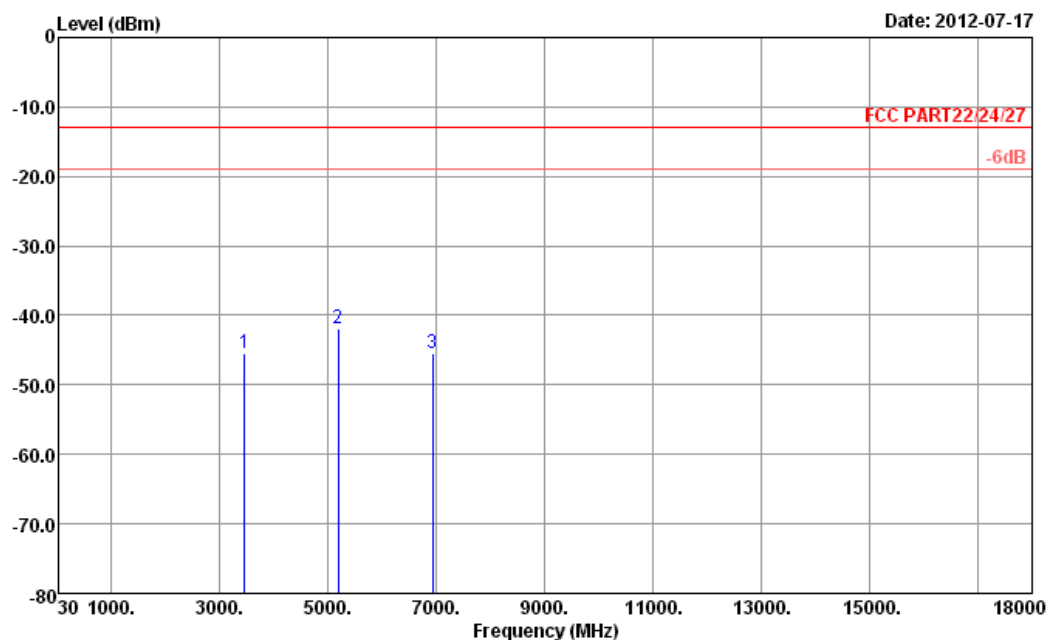

Site : 03CH05-HY
Condition : FCC PART22/24/27 HF_EIRP_101221 HORIZONTAL
Project : FG 270532

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3465.2	-45.37	-13	-32.37	-57.40	-51.63	2.58	8.84	H	Pass
5197.8	-41.85	-13	-28.85	-58.97	-48.79	3.78	10.72	H	Pass
6930.4	-45.41	-13	-32.41	-66.74	-53.16	4.3	12.05	H	Pass

Band :	WCDMA Band IV	Temperature :	23~24℃
Test Mode :	RMC 12.2Kbps Link	Relative Humidity :	51~53%
Test Engineer :	David Ke	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

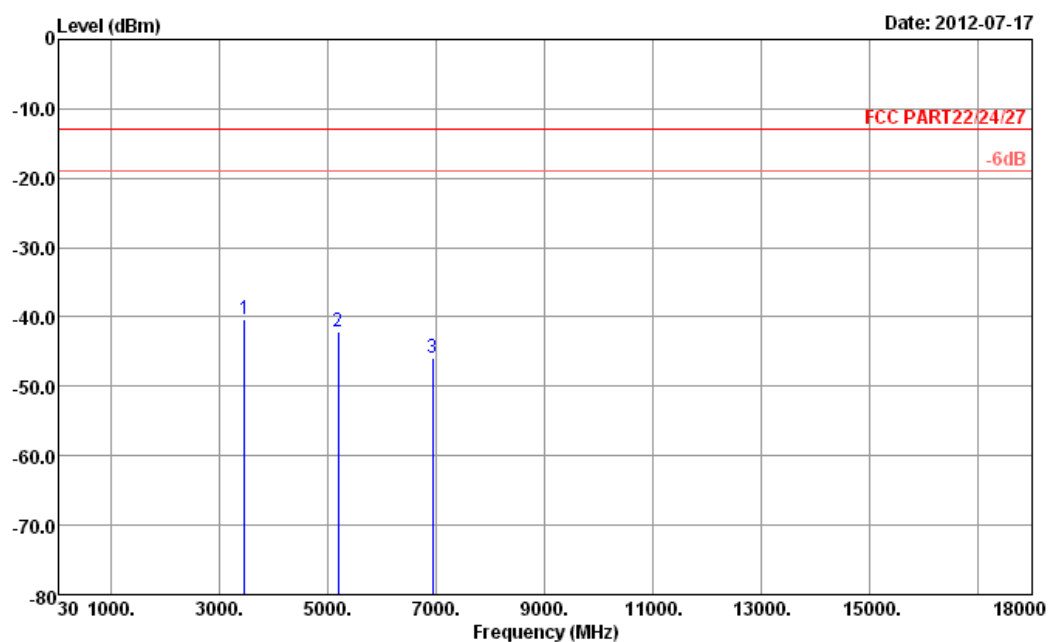


Site : 03CH05-HY
 Condition : FCC PART22/24/27 HF_EIRP_101221 VERTICAL
 Project : FG 270532

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3465.2	-40.27	-13	-27.27	-51.86	-46.53	2.58	8.84	V	Pass
5197.8	-42.02	-13	-29.02	-59.86	-48.96	3.78	10.72	V	Pass
6930.4	-45.93	-13	-32.93	-67.03	-53.68	4.3	12.05	V	Pass



Band :	WCDMA Band II	Temperature :	23~24℃
Test Mode :	RMC 12.2Kbps Link	Relative Humidity :	51~53%
Test Engineer :	David Ke	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

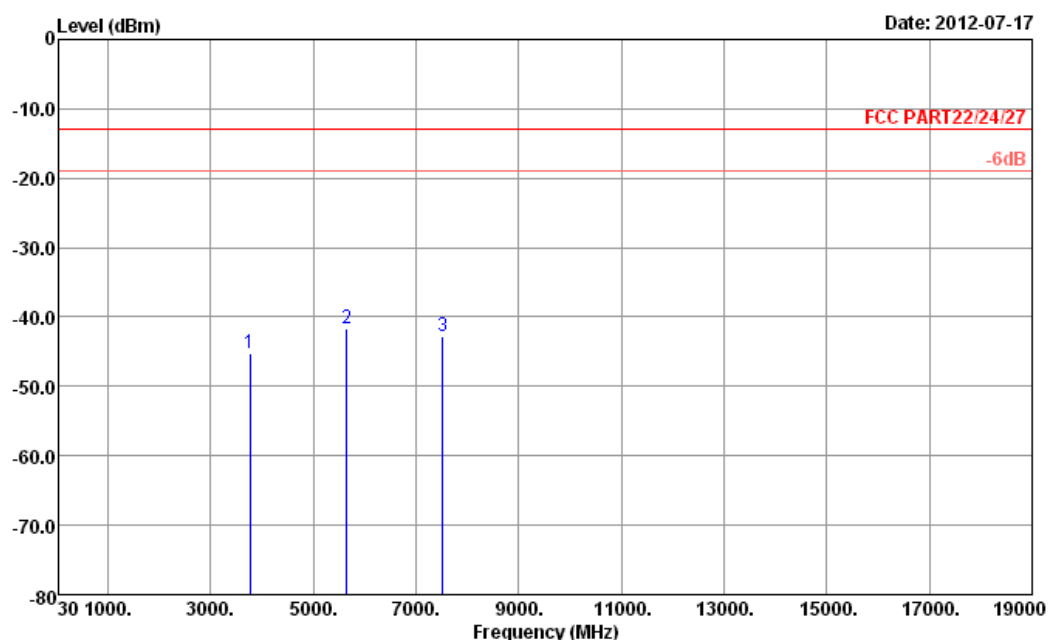


Site : 03CH05-HY
 Condition : FCC PART22/24/27 HF_EIRP_101221 HORIZONTAL
 Project : FG 270532

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-45.30	-13	-32.30	-58.43	-51.43	2.9292	9.06	H	Pass
5640	-41.74	-13	-28.74	-60.41	-48.66	3.9072	10.83	H	Pass
7520	-42.72	-13	-29.72	-64.45	-50.74	4.5988	12.62	H	Pass



Band :	WCDMA Band II	Temperature :	23~24℃
Test Mode :	RMC 12.2Kbps Link	Relative Humidity :	51~53%
Test Engineer :	David Ke	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

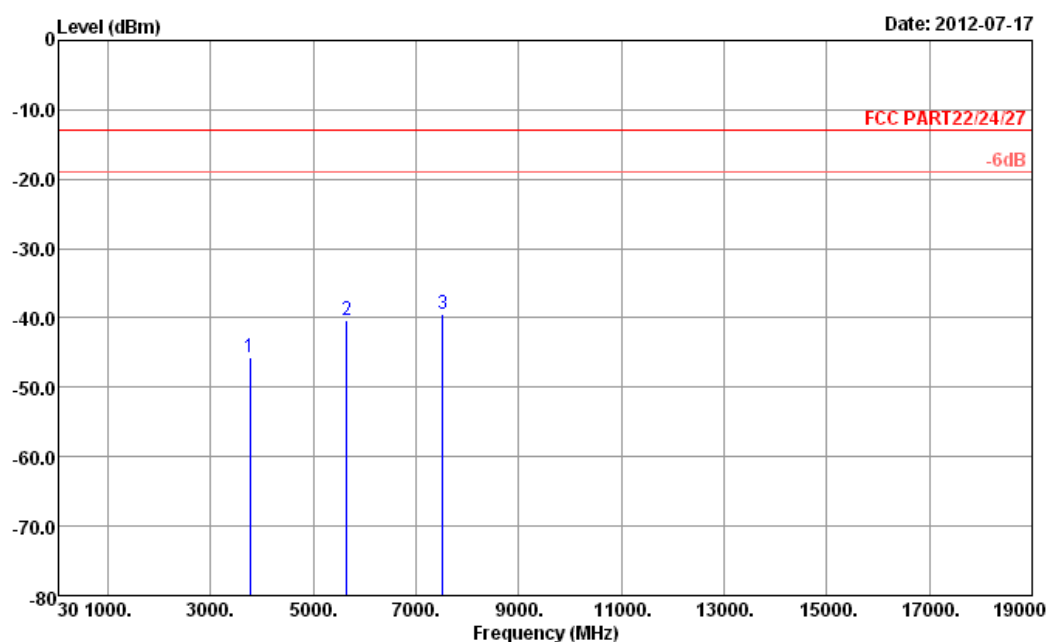

Site : 03CH05-HY
 Condition : FCC PART22/24/27 HF_EIRP_101221 VERTICAL
 Project : FG 270532

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-45.63	-13	-32.63	-59.22	-51.76	2.9292	9.06	V	Pass
5640	-40.43	-13	-27.43	-59.01	-47.35	3.9072	10.83	V	Pass
7520	-39.44	-13	-26.44	-60.8	-47.46	4.5988	12.62	V	Pass

3.8 Frequency Stability Measurement

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.8.2 Measuring Instruments

See list of measuring instruments of this test report.


3.8.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.
4. If the EUT cannot be turned on at -30°C , the testing lowest temperature will be raised in 10°C step until the EUT can be turned on.

3.8.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the base station.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

3.8.5 Test Setup

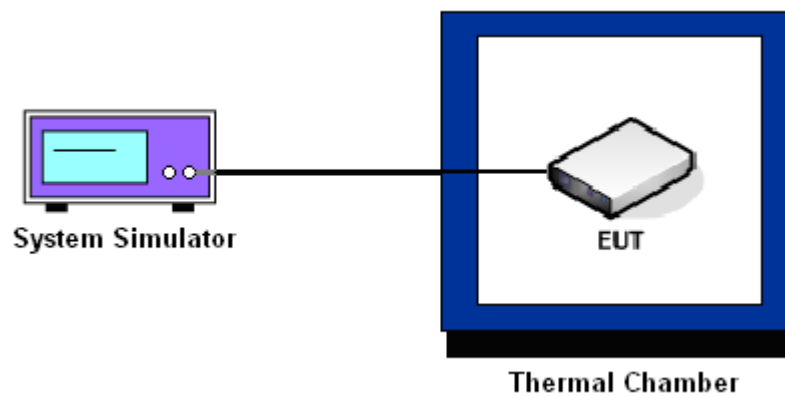

3.8.6 Test Result of Temperature Variation

Band :	GSM 850	Channel :	189
Limit (ppm) :	2.5	Frequency :	836.4 MHz

Temperature (°C)	GPRS 8		EDGE 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	29	0.03	41	0.05	PASS
-20	31	0.04	55	0.06	
-10	28	0.03	52	0.06	
0	45	0.05	46	0.05	
10	37	0.04	35	0.04	
20	32	0.04	49	0.06	
30	42	0.05	58	0.07	
40	55	0.06	42	0.05	
50	61	0.07	61	0.07	

Band :	GSM 1900	Channel :	661
Limit (ppm) :	2.5	Frequency :	1880.0 MHz

Temperature (°C)	GPRS 8		EDGE 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	52	0.03	65	0.03	PASS
-20	58	0.03	51	0.03	
-10	72	0.04	58	0.03	
0	61	0.03	62	0.03	
10	45	0.02	45	0.02	
20	51	0.03	59	0.03	
30	41	0.02	51	0.03	
40	53	0.03	46	0.02	
50	65	0.03	78	0.04	

Band :	WCDMA Band V	Channel :	4182
Limit (ppm) :	2.5	Frequency :	836.4 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	11	0.01	PASS
-20	15	0.02	
-10	22	0.03	
0	13	0.02	
10	18	0.02	
20	9	0.01	
30	10	0.01	
40	13	0.02	
50	21	0.02	

Band :	WCDMA Band IV	Channel :	1413
Limit (ppm) :	2.5	Frequency :	1732.6 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	11	0.01	PASS
-20	15	0.01	
-10	18	0.01	
0	11	0.01	
10	9	0.01	
20	16	0.01	
30	21	0.01	
40	18	0.01	
50	22	0.01	

Band :	WCDMA Band II	Channel :	9400
Limit (ppm) :	2.5	Frequency :	836.4 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	11	0.01	PASS
-20	15	0.01	
-10	16	0.01	
0	8	0.00	
10	10	0.01	
20	12	0.01	
30	14	0.01	
40	18	0.01	
50	19	0.01	

3.8.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GPRS 8	3.7	30	0.04	2.5	PASS
		BEP	41	0.05		
		4.2	52	0.06		
	EDGE 8	3.7	45	0.05		
		BEP	51	0.06		
		4.2	62	0.07		
GSM 1900 CH661	GPRS 8	3.7	58	0.03		
		BEP	52	0.03		
		4.2	62	0.03		
	EDGE 8	3.7	51	0.03		
		BEP	62	0.03		
		4.2	70	0.04		
WCDMA Band V CH4182	RMC 12.2Kbps	3.7	9	0.01		
		BEP	11	0.01		
		4.2	13	0.02		
WCDMA Band IV CH1413	RMC 12.2Kbps	3.7	8	0.00		
		BEP	11	0.01		
		4.2	15	0.01		
WCDMA Band II CH9400	RMC 12.2Kbps	3.7	11	0.01		
		BEP	10	0.01		
		4.2	13	0.01		

Note:

1. Normal Voltage = 3.7V.
2. Battery End Point (BEP) = 3.5 V.

4 List of Measuring Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
System Simulator	R&S	CMU200	117995	N/A	Jul. 28, 2011	Jul. 14, 2012 ~ Jul. 18, 2012	Jul. 27, 2012	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 06, 2012	Jul. 14, 2012 ~ Jul. 18, 2012	Jun. 05, 2013	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D35P	TBN-930701	N/A	Jul. 27, 2011	Jul. 14, 2012 ~ Jul. 18, 2012	Jul. 26, 2012	Conducted (TH02-HY)
Spectrum Analyzer	R&S	ESU26	100390	20Hz ~ 26.5GHz	Dec. 22, 2011	Jul. 17, 2012	Dec. 21, 2012	Radiation (03CH05-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2725	30MHz ~ 2GHz	Oct. 22, 2011	Jul. 17, 2012	Oct. 21, 2012	Radiation (03CH05-HY)
Turn Table	HD	Deis HD 2000	420/611	0 ~ 360 degree	N/A	Jul. 17, 2012	N/A	Radiation (03CH05-HY)
Antenna Mast	HD	MA 240	240/666	1 m ~ 4 m	N/A	Jul. 17, 2012	N/A	Radiation (03CH05-HY)
Horn Antenna	ESCO	3117	66584	1GHz ~ 18GHz	Aug. 04, 2011	Jul. 17, 2012	Aug. 03, 2012	Radiation (03CH05-HY)
Pre Amplifier	COM-POWER	PA-103A	161075	10Hz ~ 1000MHz Gain:32dB	Feb. 27, 2012	Jul. 17, 2012	Feb. 26, 2013	Radiation (03CH05-HY)
Pre Amplifier	MITEQ	AMF-7D-00 101800-30-1	159087	1GHz~18GHz	Feb. 27, 2012	Jul. 17, 2012	Feb. 26, 2013	Radiation (03CH05-HY)
Pre Amplifier	Agilent	8449B	3008A01917	1GHz~26.5GHz	Aug. 30, 2011	Jul. 17, 2012	Aug. 29, 2012	Radiation (03CH05-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA917025 1	15GHz ~ 40GHz	Oct. 21, 2011	Jul. 17, 2012	Oct. 20, 2012	Radiation (03CH05-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz~30 MHz	Jul. 29, 2010	Jul. 17, 2012	Jul. 28, 2012	Radiation (03CH05-HY)
System Simulator	R&S	CMU200	117995	N/A	Jul. 28, 2011	Jul. 17, 2012	Jul. 27, 2013	Radiation (03CH05-HY)

5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.54
--	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.72
---	------



Appendix A. Photographs of EUT

Please refer to Sporton report number EP270532 as below.