




FCC Radio Test Report

Equipment : 60GHz Wireless HD TX module
Brand Name : AzureWave
Model No. : AW-WH064T
FCC ID : TLZ-WH064T
Standard : 47 CFR FCC Part 15.255
Applicant : AzureWave Technologies, Inc.
8F., No.94, BaozhongRd., Xindian District, New
Taipei City, Taiwan 231
Manufacturer : AzureWave Technologies, Inc.
8F., No.94, BaozhongRd., Xindian District, New
Taipei City, Taiwan 231

The product sample received on May 07, 2013 and completely tested on Jun. 19, 2013. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

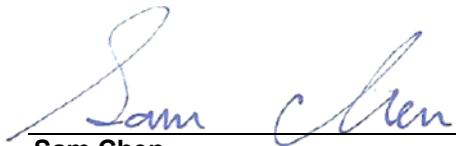

Sam Chen
SPORTON INTERNATIONAL INC.





TABLE OF CONTENTS

TABLE OF CONTENTS	2
SUMMARY OF TEST RESULT	3
REVISION HISTORY.....	4
1 GENERAL DESCRIPTION	5
1.1 Information.....	5
1.2 Additional Information Provided by the Submitter	7
1.3 Accessories	8
1.4 Support Equipment.....	8
1.5 EUT Operation during Test	9
1.6 Test Setup Diagram	10
1.7 Testing Applied Standards	13
1.8 Testing Location	13
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	14
2.1 Test Channel Frequencies	14
2.2 Conformance Tests and Related Test Frequencies	14
3 TRANSMITTER TEST RESULT	15
3.1 AC Power Conducted Emissions	15
3.2 Occupied Bandwidth	19
3.3 EIRP Power and Power Density.....	31
3.4 Peak Conducted Power.....	44
3.5 Transmitter Spurious Emissions.....	46
3.6 Frequency Stability	58
3.7 Publicly-accessible Coordination Channel	61
3.8 Operation Restriction and Group Installation	63
3.9 Transmitter Identification	64
4 TEST EQUIPMENT AND CALIBRATION DATA.....	65
APPENDIX A. TEST PHOTOS	A1 ~ A7
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3



SUMMARY OF TEST RESULT

Standard Requirements and Conformance Test Specifications				
Report Clause	Ref. Std. Clause	Description	Result	Remark
3.1	FCC 15.207	AC Power Conducted Emissions	Complied	-
3.2	FCC 15.255(e)	Occupied Bandwidth	Complied	-
3.3	FCC 15.255(b)(1)	EIRP Power and Power Density	Complied	-
3.4	FCC 15.255(e)	Peak Conducted Power	Complied	-
3.5	FCC 15.255(c)	Transmitter Spurious Emissions	Complied	-
3.6	FCC 15.255(f)	Frequency Stability	Complied	-
3.7	FCC 15.255(d)	Publicly-accessible Coordination Channel	Complied	-
3.8	FCC 15.255(a),(h)	Operation Restriction and Group Installation	Complied	-
3.9	FCC 15.255(i)	Transmitter Identification	Complied	-



REVISION HISTORY



1 General Description

1.1 Information

1.1.1 The Channel Plan(s)

The Channel Plan(s)	
Low-rate PHY (LRP) Band	Channel 2 LRP: 60.16-60.80 GHz Channel 3 LRP: 62.32-62.96 GHz
LRP Channel List	Channel 2 LRP: 60.16-60.80 GHz: 60.16 +n x 0.16 (n=0, 1, 2, 3, 4) GHz Channel 3 LRP: 62.32-62.96 GHz: 62.32 +n x 0.16 (n=0, 1, 2, 3, 4) GHz
Middle-rate PHY (MRP) Band	Channel 2 MRP: 60.48 GHz Channel 3 MRP: 62.64 GHz
High-rate PHY (HRP) Band	Channel 2 HRP: 60.48 GHz Channel 3 HRP: 62.64 GHz

1.1.2 Transmit Operating Modes

The Different Transmit Operating Modes	
<input checked="" type="checkbox"/>	Operating mode 1: Smart Antenna Systems - with beam forming
<input type="checkbox"/>	Operating mode 2: Smart Antenna Systems - without beam forming
<input type="checkbox"/>	Operating mode 3: Single Antenna Equipment

1.1.3 Antenna Information

Antenna Information				
<input type="checkbox"/>	Equipment placed on the market without antennas			
<input checked="" type="checkbox"/>	Integral antenna			
Integral antenna gain	16	dB _i for LRP	18	dB _i for MRP
	<input type="checkbox"/> Temporary RF connector provided			
	<input checked="" type="checkbox"/> No temporary RF connector provided			
<input type="checkbox"/>	External antenna (dedicated antennas)			
	<input type="checkbox"/> Single power level with corresponding antenna(s)			
	<input type="checkbox"/> Multiple power settings and corresponding antenna(s)			



1.1.4 Power Levels

Worst Power Levels for LRP				
Applicable power levels	<input type="checkbox"/> Conducted <input checked="" type="checkbox"/> EIRP			
Antenna gain	16 dBi			
Frequency (GHz)	Highest setting (P_{high}): (dBm)			
	Modulation	Data Rate (Mb/s)	AV Power	Peak Power
60.16	BPSK	20.337	30.01	31.30

Worst Power Levels for MRP				
Applicable power levels	<input type="checkbox"/> Conducted <input checked="" type="checkbox"/> EIRP			
Antenna gain	18 dBi			
Frequency (GHz)	Highest setting (P_{high}): (dBm)			
	Modulation	Data Rate (Gb/s)	AV Power	Peak Power
60.48	QPSK	0.476	23.72	31.81

Worst Power Levels for HRP				
Applicable power levels	<input type="checkbox"/> Conducted <input checked="" type="checkbox"/> EIRP			
Integral antenna gain	18 dBi			
Frequency (GHz)	Highest setting (P_{high}): (dBm)			
	Modulation	Data Rate (Gb/s)	AV Power	Peak Power
62.64	QPSK	0.952	26.74	36.04

1.1.5 Extreme Operating

The Extreme Operating Temperature Range that Apply to the Equipment				
<input checked="" type="checkbox"/> -20 °C to +50 °C				
<input type="checkbox"/> 0 °C to +40 °C				
<input type="checkbox"/> Other				
EUT Power Type	From Host System			
Supply Voltage	<input type="checkbox"/> AC	State AC voltage	V	
Supply Voltage	<input checked="" type="checkbox"/> DC	State DC voltage	5	V

1.1.6 Equipment Use Condition

Equipment Use Condition				
<input type="checkbox"/> Fixed field disturbance sensors at 61-61.5GHz				
<input type="checkbox"/> Except fixed field disturbance sensors at 61-61.5GHz				
<input checked="" type="checkbox"/> Except fixed field disturbance sensors				



1.2 Additional Information Provided by the Submitter

1.2.1 Modulation

Modulation	
The LRP modulation is BPSK / data rate is 20.337 Mb/s.	
The MRP modulation is QPSK / data rate is 0.476, 0.952, 0.714 or 1.190 Gb/s.	
The HRP modulation is QPSK or 16-QAM / data rate is QPSK at 0.952 Gb/s (Quarter Rate), QPSK at 1.904 Gb/s (Half Rate) and 16-QAM at 3.807 Gb/s (Full Rate).	
Can the transmitter operate un-modulated:	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No

1.2.2 Duty Cycle

Duty Cycle		Duty Cycle Factor	
The transmitter is intended for	LRP	1.93 %	17.14
	MRP	99.02 %	0.04
	HRP	96.25 %	0.17



1.3 Accessories

N/A

1.4 Support Equipment

For AC Power Conducted Emissions

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	AC adaptor	D-Link	AMS47-0501000FU	N/A
2	LCD Monitor	DELL	U2410	DoC
3	DVD Player	Pioneer	DV-600AV-S	N/A
4	60GHz Wireless HD Rx module	AzureWave	AW-WH064R	TLZ-WH064R
5	Test Fixture	AzureWave	3065-V05	N/A
6	Test Fixture	AzureWave	3065-V05	N/A

Radiated Emission (Below 1GHz)

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	AC adaptor	DVE	DSA-6E-05 CH050100	N/A
2	LCD TV	SONY	KLV-32U300A	DoC
3	PS3	SONY	CHCH-20074	N/A
4	60GHz Wireless HD Rx module	AzureWave	AW-WH064R	TLZ-WH064R
5	Test Fixture	AzureWave	3065-V05	N/A
6	Test Fixture	AzureWave	3065-V05	N/A





Radiated Emission (Above 1GHz) & RF Conducted

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	D420	E2KWM3945ABG
2	LCD TV	SONY	KLV-32U300A	DoC
3	PS3	SONY	CHCH-20074	N/A
4	60GHz Wireless HD Rx module	AzureWave	AW-WH064R	TLZ-WH064R
5	Test Fixture	AzureWave	3064-V03	N/A
6	Test Fixture	AzureWave	3064-V03	N/A

1.5 EUT Operation during Test


High Definition Audio / Video in the 1080p format was sent from the TX device to the receiver via the wireless link. A Blu-Ray player furnished HD A/V to the TX device. The receiver furnished HD A/V to the television. The television was placed outside the chamber. A laptop computer with test software was utilized to vary the radio configuration and antenna beam orientation for testing purposes. This computer was not connected during measurements. For Extreme environmental tests, an external Variable DC power supply was utilized in place of the AC/DC adapter to furnish power to the EUT.

1.6 Test Setup Diagram

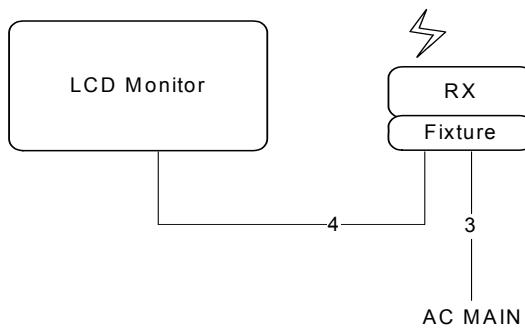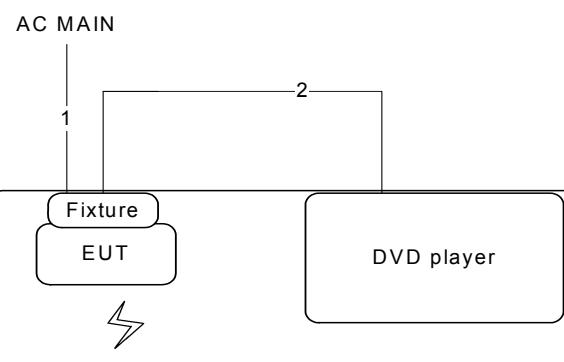


Item	Connection	Shielded	Length
1	USB Power Cable	No	0.5m
2	HDMI Cable	Yes	1.5m
3	USB Power Cable	No	0.5m
4	HDMI Cable	Yes	1.5m

Test Setup Diagram - Transmitter Spurious Emissions below 40 GHz

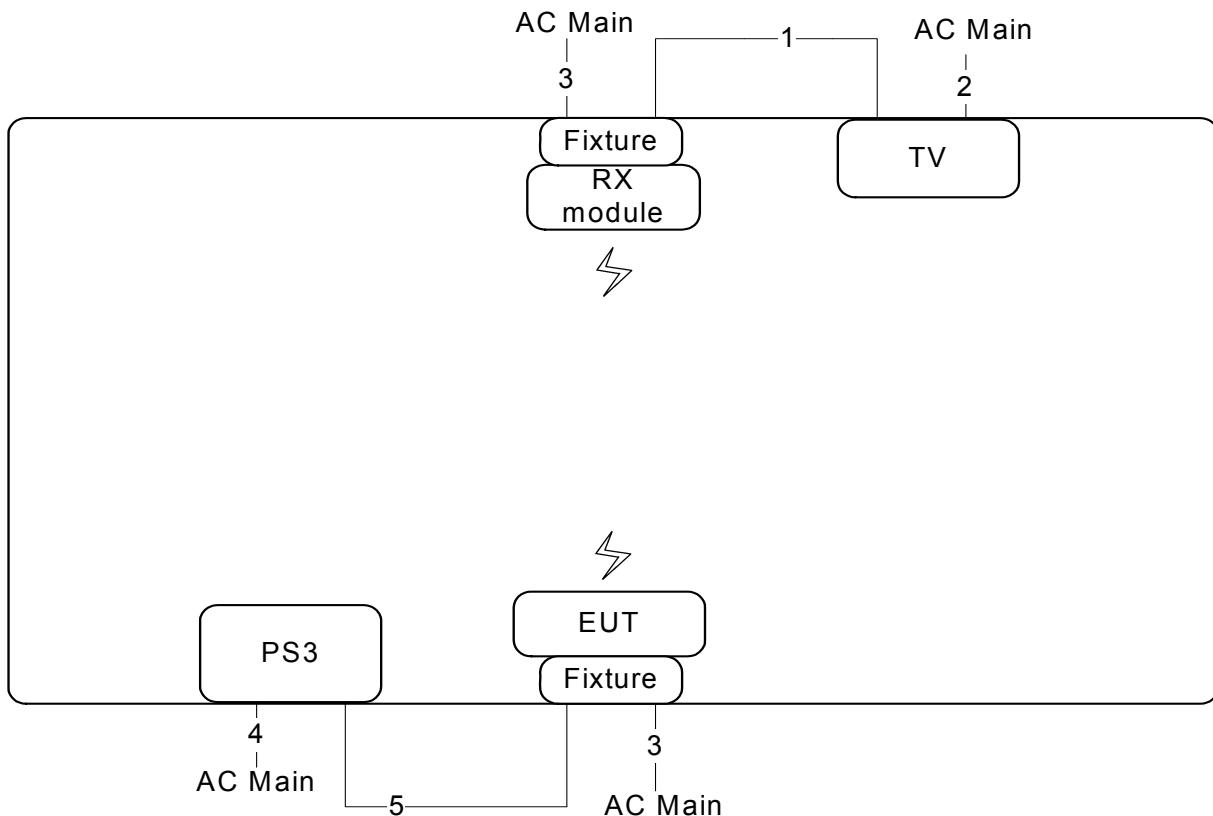

Item	Connection	Shielded	Length
1	HDMI Cable	No	1.2m
2	Power Cable	No	2.8m
3	Power Cable	No	1.2m
4	Power Cable	No	1.8m
5	HDMI Cable	No	1.2m

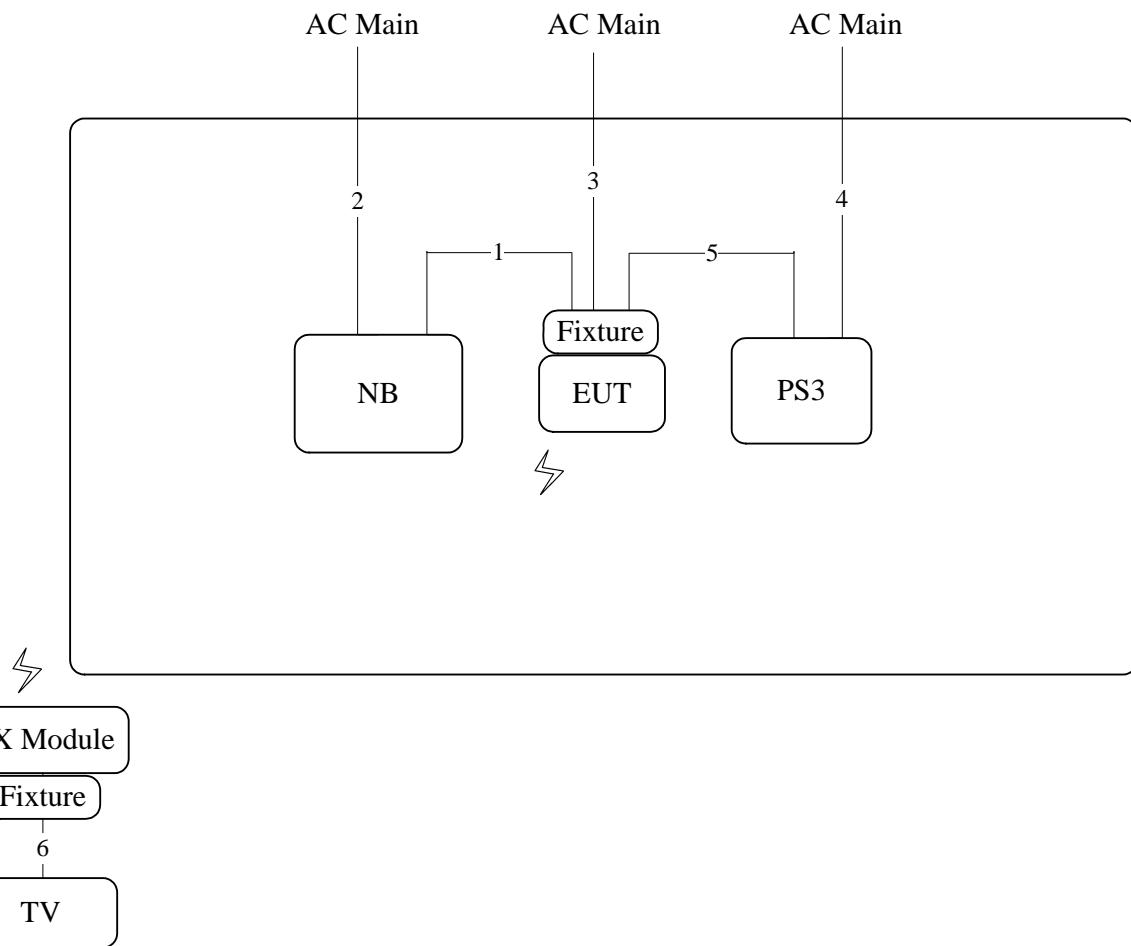Test Setup Diagram - Transmitter Spurious Emissions above 40 GHz

Item	Connection	Shielded	Length
1	USB Cable	No	0.8m
2	Power Cable	No	2.6m
3	Power Cable	No	1.2m
4	Power Cable	No	1.8m
5	HDMI Cable	No	1.2m
6	HDMI Cable	No	1.2m



1.7 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.255
- ♦ ANSI C63.10-2009
- ♦ KDB200443

1.8 Testing Location

Testing Location				
		Test Condition	Test Site No.	Test Engineer
		Test Environment		
<input type="checkbox"/>	HWA YA	AC Conducted Emission	CO01-CB	Parody Lin
<input type="checkbox"/>	JHUBEI	Radiated Emission	03CH01-CB	Sean Ku
<input type="checkbox"/>		RF Conducted	TH01-CB	Sean Ku



2 Test Configuration of Equipment under Test

2.1 Test Channel Frequencies

Nominal Channel Bandwidth			
Channel Plan (GHz)	Low Channel (GHz)	Middle Channel (GHz)	High Channel (GHz)
Channel 2 LRP: 60.16-60.80	60.16	60.48	60.80
Channel 2 MRP: 60.48	-	60.48	-
Channel 2 HRP: 60.48	-	60.48	-
Channel 3 LRP: 62.32-62.96	62.32	62.64	62.96
Channel 3 MRP: 62.64	-	62.64	-
Channel 3 HRP: 62.64	-	62.64	-

2.2 Conformance Tests and Related Test Frequencies

Test Item	Test Frequencies (GHz)		
	Channel Plan 2&3		
	LRP	MRP	HRP
AC Power Conducted Emissions	Normal Link		
Occupied Bandwidth	60.16, 60.48, 60.80 & 62.32, 62.64, 62.96	60.48 & 62.64	60.48 & 62.64
EIRP Power and Power Density	60.16, 60.48, 60.80 & 62.32, 62.64, 62.96	60.48 & 62.64	60.48 & 62.64
Peak Conducted Power	60.16, 60.48, 60.80 & 62.32, 62.64, 62.96	60.48 & 62.64	60.48 & 62.64
Transmitter Spurious Emissions (below 40 GHz)	Normal Link		
Transmitter Spurious Emissions (above 40 GHz)	60.48 & 62.64	60.48 & 62.64	60.48 & 62.64
Frequency Stability	Un-Modulation		

3 Transmitter Test Result

3.1 AC Power Conducted Emissions

3.1.1 Limit of AC Power Conducted Emissions

AC Power Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.1.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2009, clause 6.2.

3.1.4 Test Setup

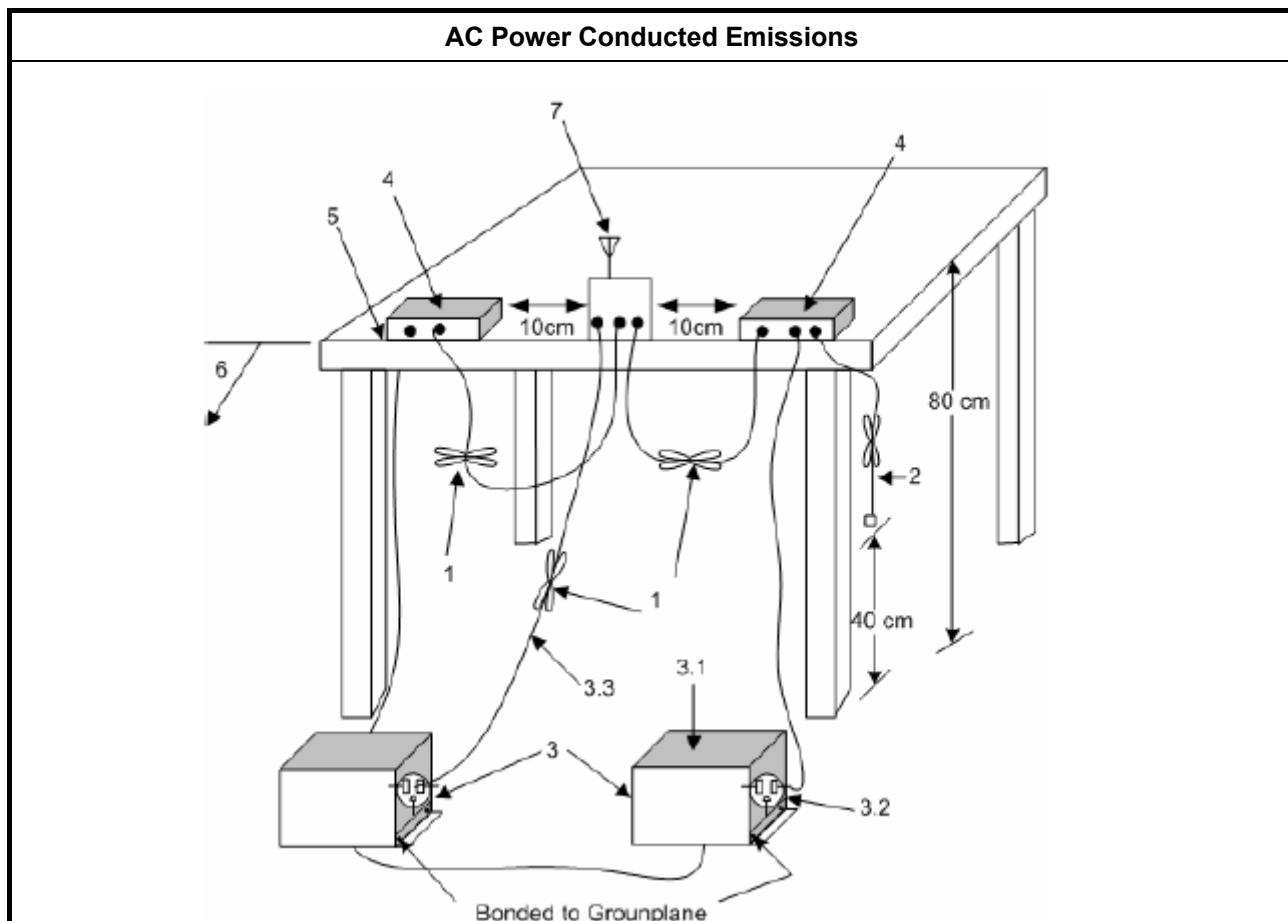

**AC Power Conducted Emissions**

1. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long (see ANSI C63.10, clause 6.2.3.1).
2. I/O cables that are not connected to an accessory shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m (see ANSI C63.10, clause 6.2.2).
3. EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 ohm loads. LISN can be placed on top of, or immediately beneath, reference ground plane (see ANSI C63.10, clauses 6.2.2 and 6.2.3).
 - 3.1. All other equipment powered from additional LISN(s).
 - 3.2. A multiple-outlet strip can be used for multiple power cords of non-EUT equipment.
 - 3.3. LISN at least 80 cm from nearest part of EUT chassis.
4. Non-EUT components of EUT system being tested.
5. Rear of EUT, including peripherals, shall all be aligned and flush with edge of tabletop (see ANSI C63.10, clause 6.2.3.1).
6. Edge of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane (see ANSI C63.10, clause 6.2.2 for options).
7. Antenna may be integral or detachable. If detachable, the antenna shall be attached for this test.


3.1.5 Test Result of AC Power Conducted Emissions**Test Conditions** see ANSI C63.10, clause 5.11**Test Setup** see ANSI C63.10, clause 6.2.3

NOTE 1: If equipment having different channel plan and nominal channel bandwidth modes (see test report clause 1.1.1), the measurements are uninfluenced by different channel plan and nominal channel bandwidth modes, may not need to be repeated for all modes. If equipment having different transmit operating modes (see test report clause 1.1.2), the measurements are uninfluenced by different transmit operating modes, may not need to be repeated for all the operating modes. Similar, if the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.12 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worse case combination to be used for the conformance testing.

NOTE 2: “>20dB” means the tables in this clause should only list values of spurious emissions that exceed the level of 20 dB below the applicable limit, see ANSI C63.4, clause 10.1.8.1.




Temp	25°C	Humidity	56%
Test Engineer	Parody Lin	Phase	Line
Configuration	Normal Link		

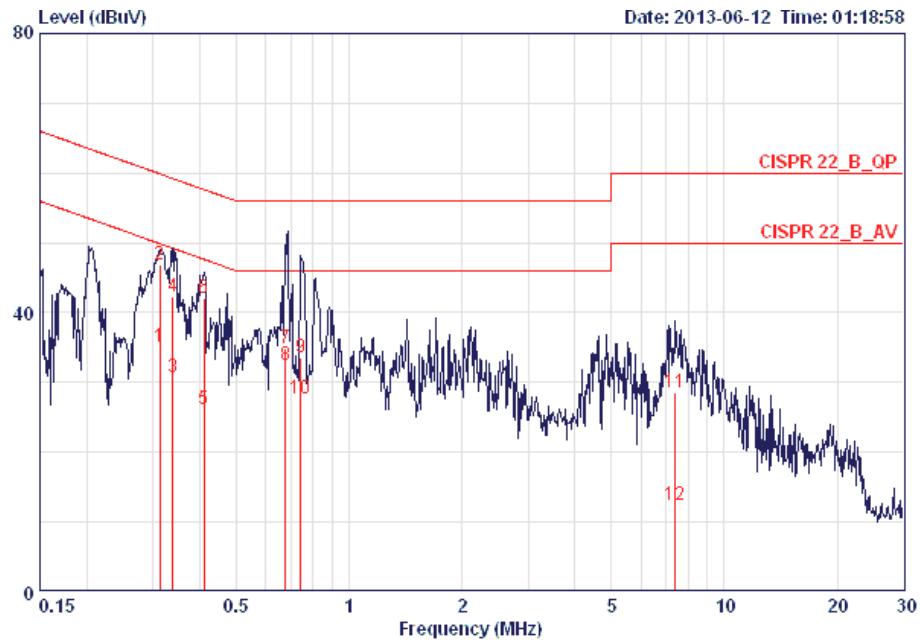

Freq	Over Limit		Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dB		
1	0.31328	34.99	-14.89	49.88	34.64	0.15	0.20	LINE AVERAGE
2	0.31328	46.88	-13.00	59.88	46.53	0.15	0.20	LINE QP
3	0.33920	30.65	-18.57	49.22	30.30	0.15	0.20	LINE AVERAGE
4	0.33920	42.23	-16.99	59.22	41.88	0.15	0.20	LINE QP
5	0.41048	26.12	-21.52	47.64	25.77	0.15	0.20	LINE AVERAGE
6	0.41048	42.09	-15.55	57.64	41.74	0.15	0.20	LINE QP
7	0.67726	34.92	-21.08	56.00	34.56	0.16	0.20	LINE QP
8	0.67726	32.47	-13.53	46.00	32.11	0.16	0.20	LINE AVERAGE
9	0.74302	33.46	-22.54	56.00	33.10	0.16	0.20	LINE QP
10	0.74302	27.66	-18.34	46.00	27.30	0.16	0.20	LINE AVERAGE
11	7.407	28.64	-31.36	60.00	28.05	0.29	0.30	LINE QP
12	7.407	12.53	-37.47	50.00	11.94	0.29	0.30	LINE AVERAGE



Temp	25°C	Humidity	56%
Test Engineer	Parody Lin	Phase	Neutral
Configuration	Normal Link		

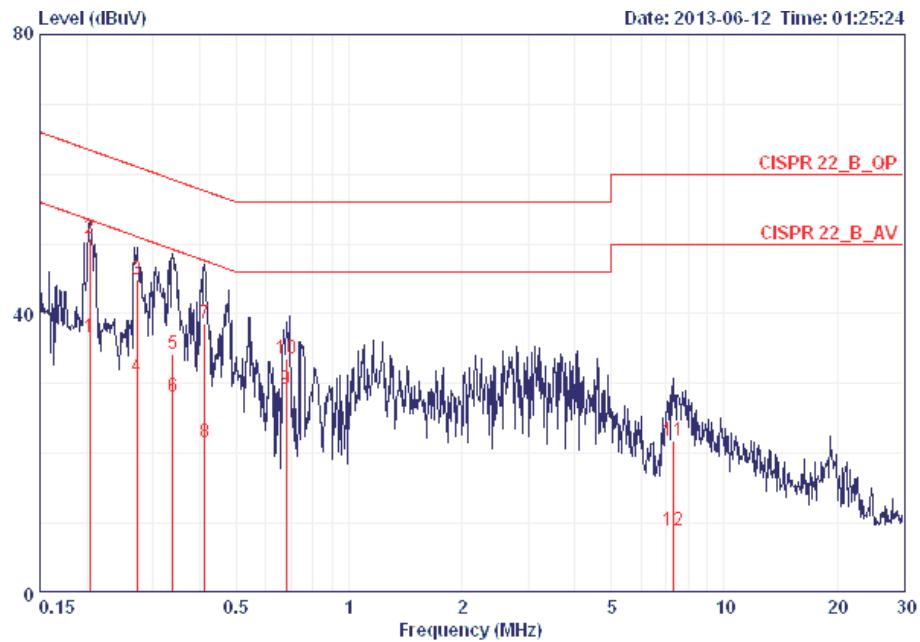

	Freq	Level	Over Limit	Limit	Read Line	LISN	Cable		
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	Pol/Phase	Remark
1	0.20396	36.55	-16.90	53.45	36.27	0.08	0.20	NEUTRAL	AVERAGE
2	0.20396	50.74	-12.71	63.45	50.46	0.08	0.20	NEUTRAL	QP
3	0.27152	44.92	-16.15	61.07	44.64	0.08	0.20	NEUTRAL	QP
4	0.27152	30.90	-20.17	51.07	30.62	0.08	0.20	NEUTRAL	AVERAGE
5	0.33920	34.15	-25.07	59.22	33.87	0.08	0.20	NEUTRAL	QP
6	0.33920	28.05	-21.17	49.22	27.77	0.08	0.20	NEUTRAL	AVERAGE
7	0.41266	38.58	-19.01	57.59	38.30	0.08	0.20	NEUTRAL	QP
8	0.41266	21.68	-25.91	47.59	21.40	0.08	0.20	NEUTRAL	AVERAGE
9	0.68075	29.18	-16.82	46.00	28.90	0.08	0.20	NEUTRAL	AVERAGE
10	0.68075	33.52	-22.48	56.00	33.24	0.08	0.20	NEUTRAL	QP
11	7.290	21.77	-38.23	60.00	21.28	0.19	0.30	NEUTRAL	QP
12	7.290	8.83	-41.17	50.00	8.34	0.19	0.30	NEUTRAL	AVERAGE

Measurement uncertainty: 2.4 dB

3.2 Occupied Bandwidth

3.2.1 Limit of Occupied Bandwidth

6dBc Bandwidth (see Note 1)	None
26dBc Bandwidth	None
99% Occupied Bandwidth (see Note 2)	None

NOTE 1: The 6dBc bandwidth is the frequency bandwidth of the signal power at the -6 dBc points when measured with a 100 kHz resolution bandwidth. These measurements shall also be performed at normal test conditions.

NOTE 2: The 99% occupied bandwidth is the frequency bandwidth of the signal power at the 99% channel power of occupied bandwidth when resolution bandwidth should be approximately 1 % to 5 % of the occupied bandwidth (OBW). These measurements shall also be performed at normal test conditions.


3.2.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.2.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2009, clauses 6.9.1 and 7.8.5.

3.2.4 Test Setup

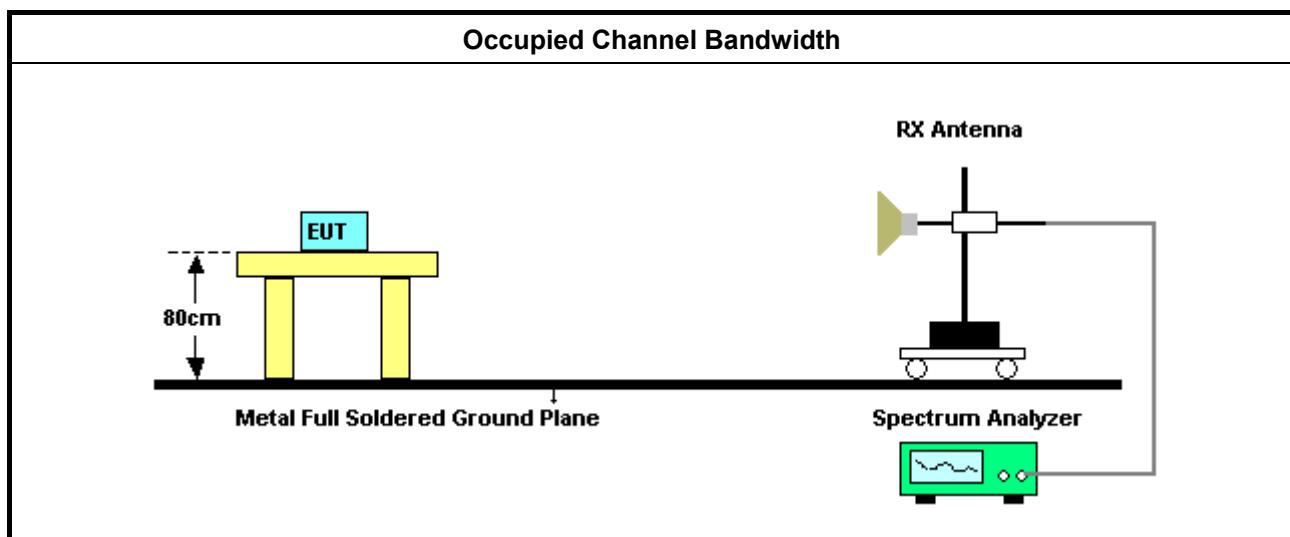





3.2.5 Test Result of Occupied Bandwidth

Test Conditions	see ANSI C63.10, clause 5.12
Test Setup	see ANSI C63.10, clause 7.8.5
NOTE: If equipment having different transmit operating modes (see test report clause 1.1.2), the measurements are uninfluenced by different transmit operating modes, may not need to be repeated for all the operating modes. Similar, if the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.12 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worse case combination to be used for the conformance testing. Refer as ANSI C63.10, clause 6.9.1, observe and record with plotted graphs or photographs the worst-case (i.e., widest) occupied bandwidth produced by these different modulation sources.	


Temp	24°C	Humidity	64%			
Test Engineer	Sean Ku					
Test Results						
Channel Plan (GHz)	Test Freq. (GHz)	6 dBc Bandwidth (MHz)	Occupied Bandwidth (MHz)	26 dBc Bandwidth (MHz)	Limit (MHz)	Margin (MHz)
Channel 2 LRP: 60.16-60.80	60.16	89.40	213.6000	293.4	N/A	N/A
	60.48	88.2	220.8000	297	N/A	N/A
	60.80	85.80	209.4000	291.0	N/A	N/A
Channel 2 MRP: 60.48	60.48	834.00	960.000	1194.0	N/A	N/A
Channel 2 HRP: 60.48	60.48	1740.00	1745.000	1960.0	N/A	N/A
Channel 3 LRP: 62.32-62.96	62.32	90.60	223.2000	296.4	N/A	N/A
	62.64	83.4	222.6000	294	N/A	N/A
	62.96	90.60	220.2000	293.4	N/A	N/A
Channel 3 MRP: 62.64	62.64	876.00	1140.0	1020.0	N/A	N/A
Channel 3 HRP: 62.64	62.64	1760.00	1755.0	2080.0	N/A	N/A
Measurement uncertainty: 4.4335 dB						

3.2.5.1 Bandwidth Plots

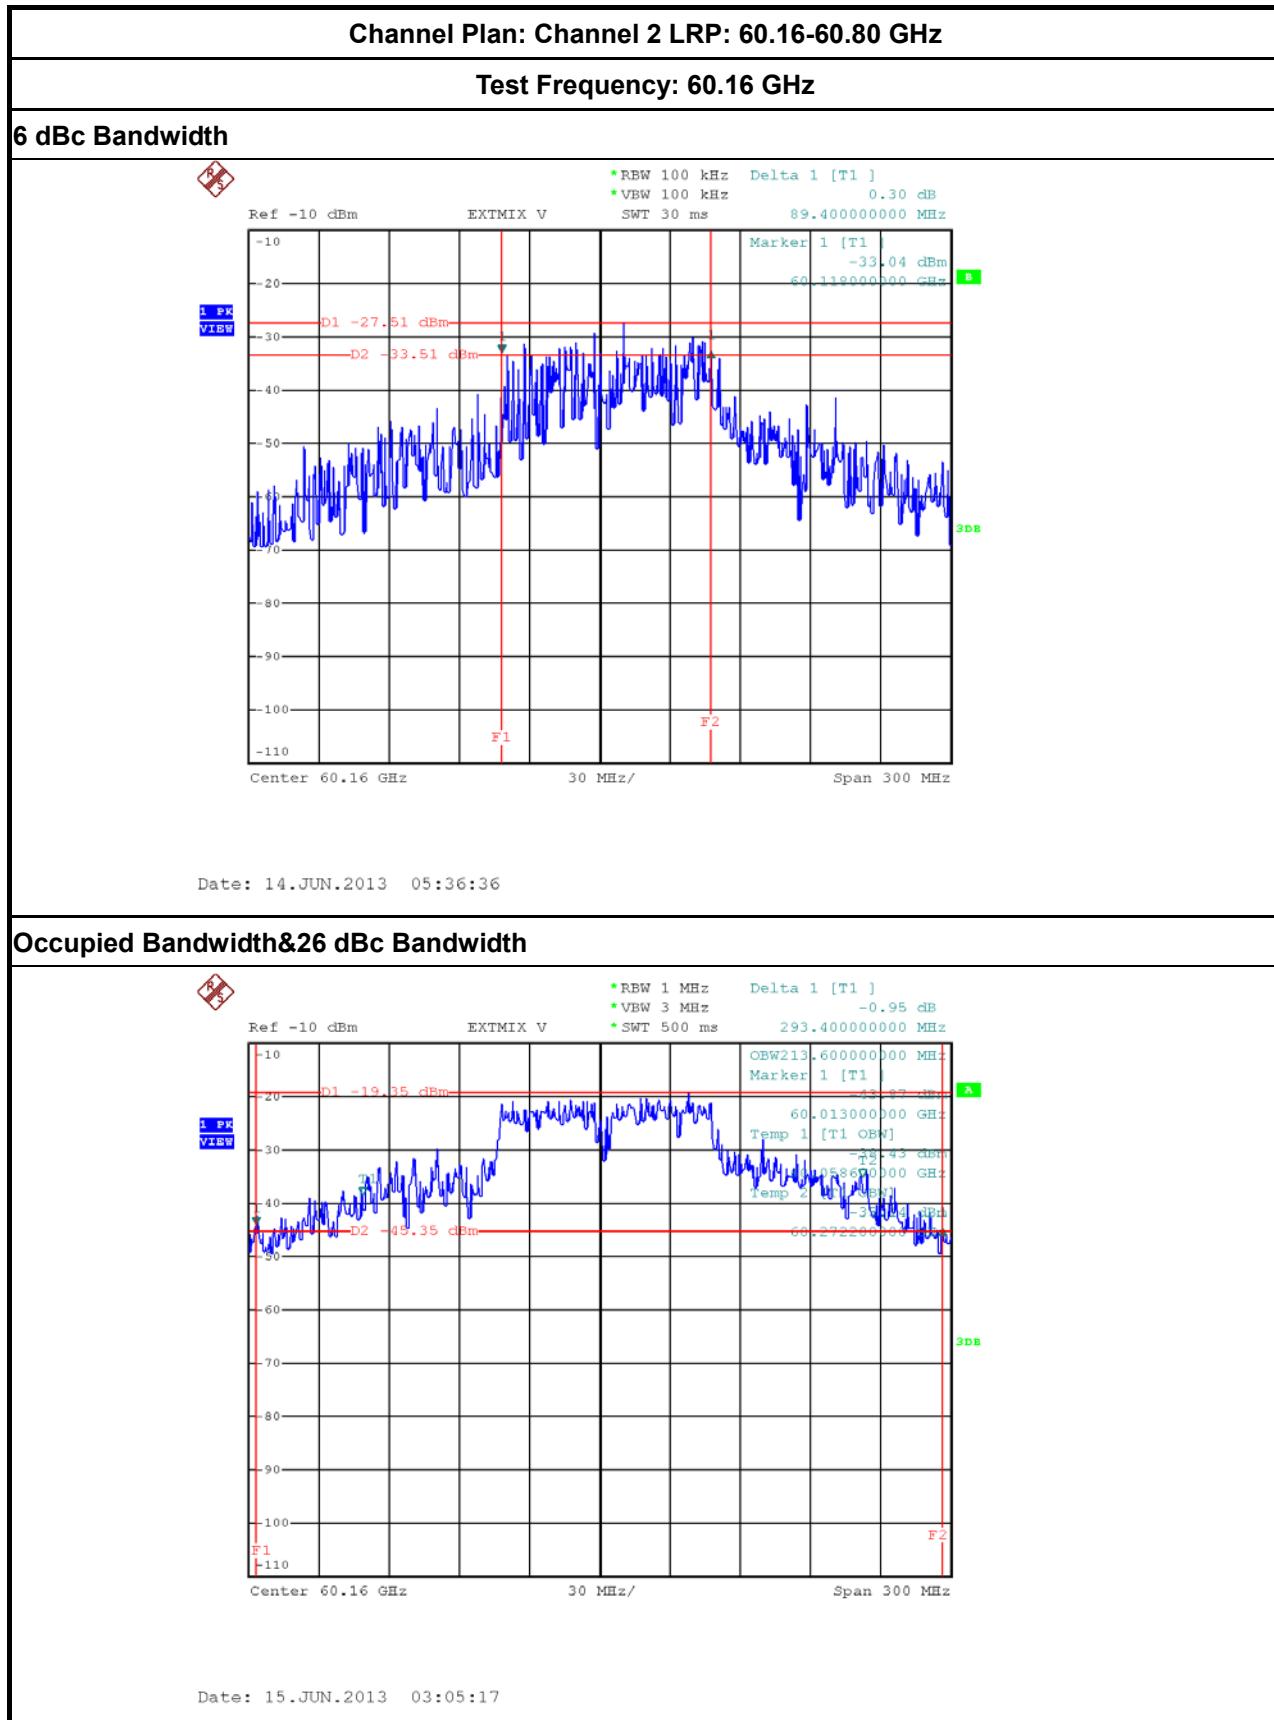

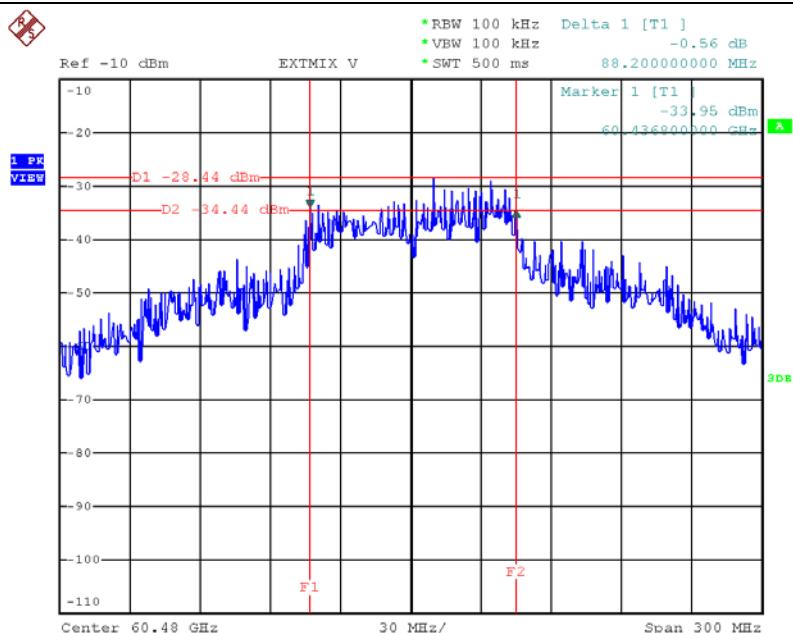Test Frequency: 60.48 GHz
6 dBc Bandwidth


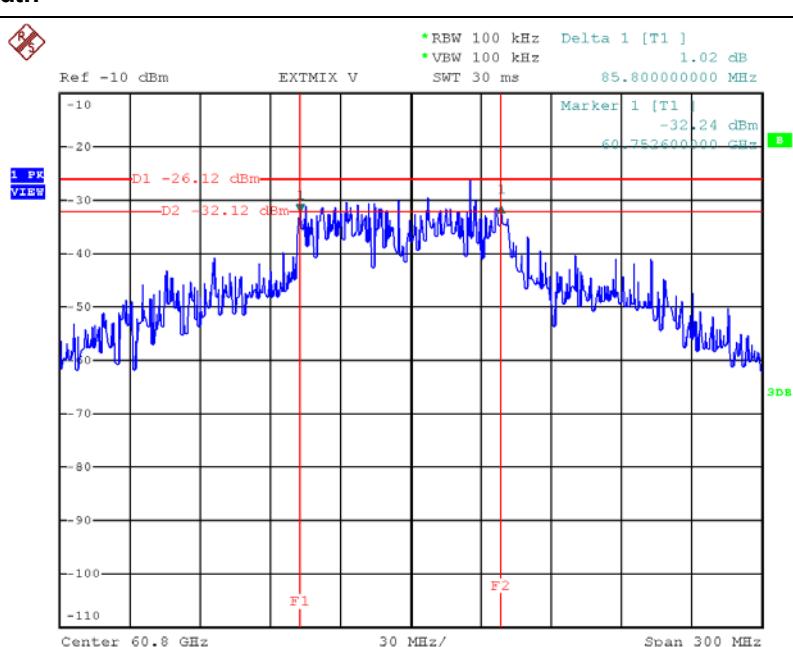
Date: 4.JUN.2013 04:03:07

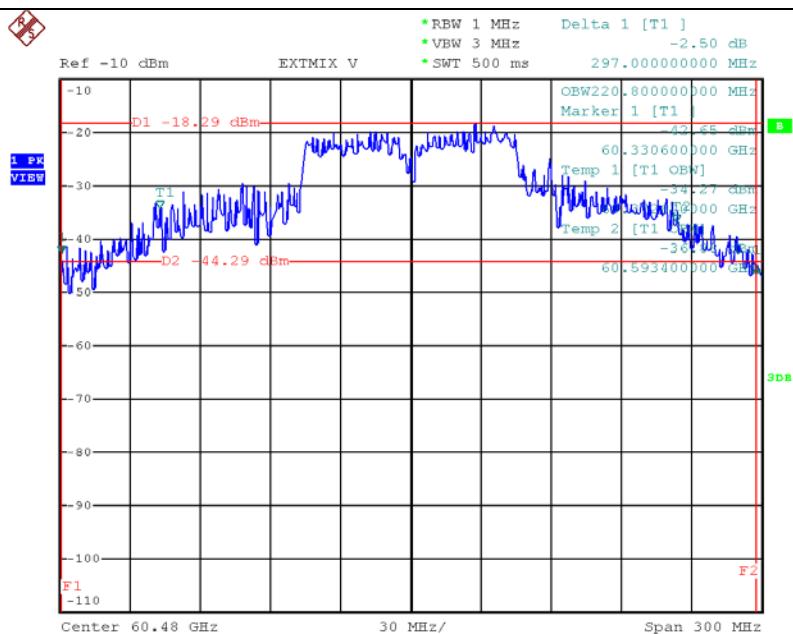Occupied Bandwidth&26 dBc Bandwidth


Date: 5.JUN.2013 03:57:34




—




Date: 14.JUN.2013 05:43:22


Occupied Bandwidth & 26 dBc Bandwidth

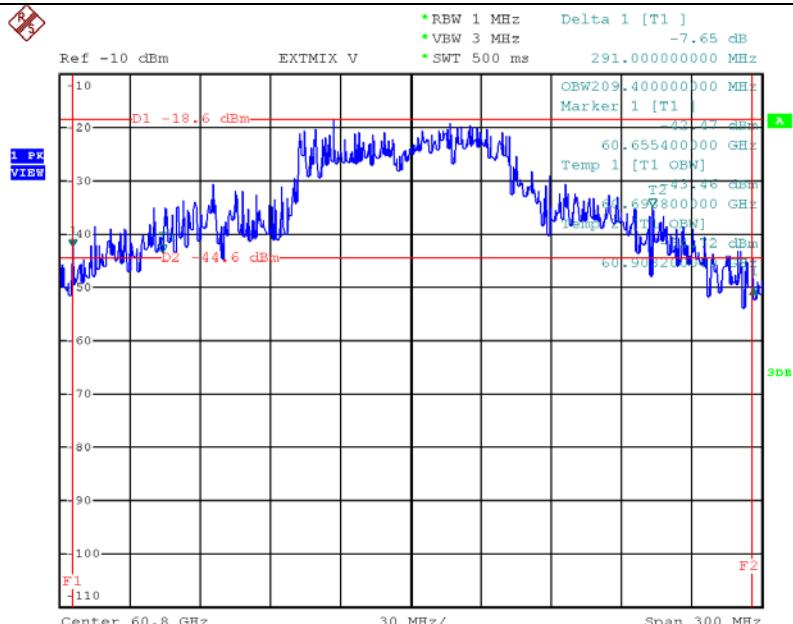


Date: 15.JUN.2013 03:14:25

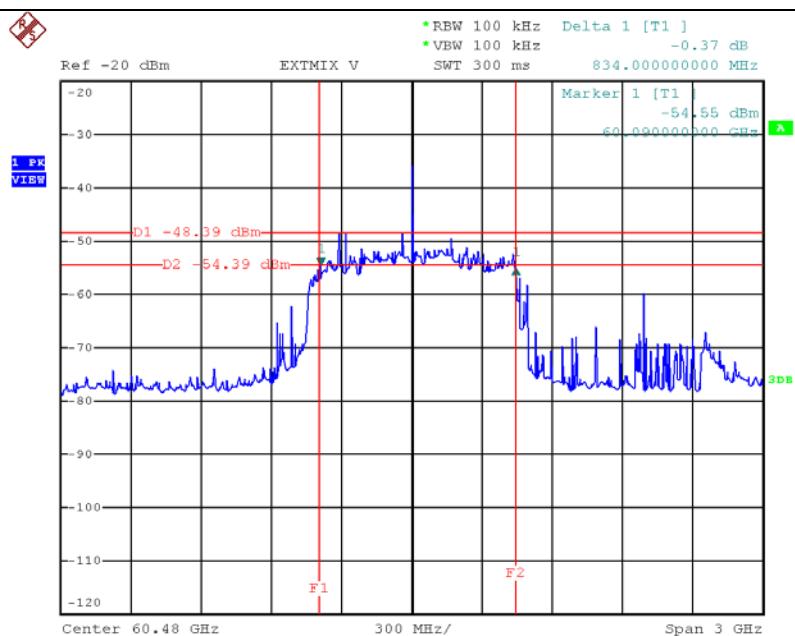Channel Plan: Channel 2 MRP: 60.48 GHz
Test Frequency: 60.48 GHz
6 dBc Bandwidth


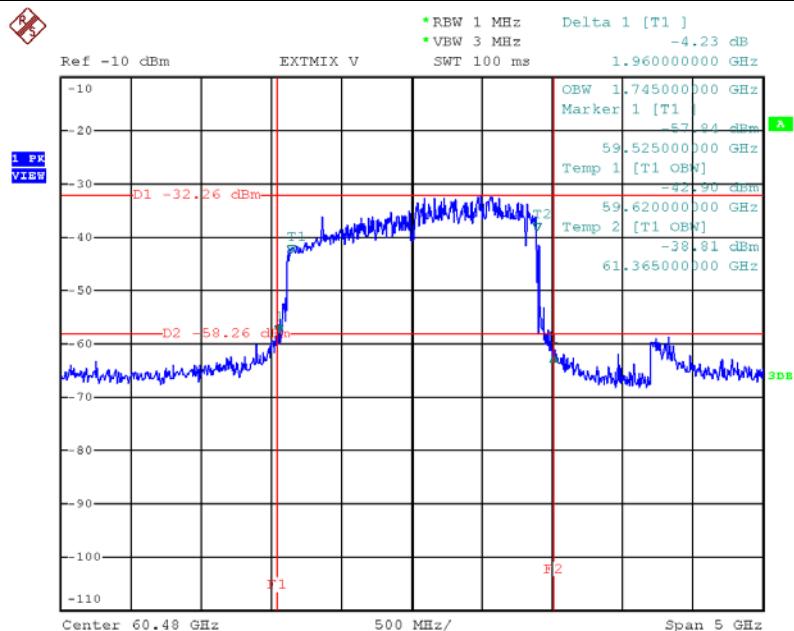
Date: 14.JUN.2013 06:49:43

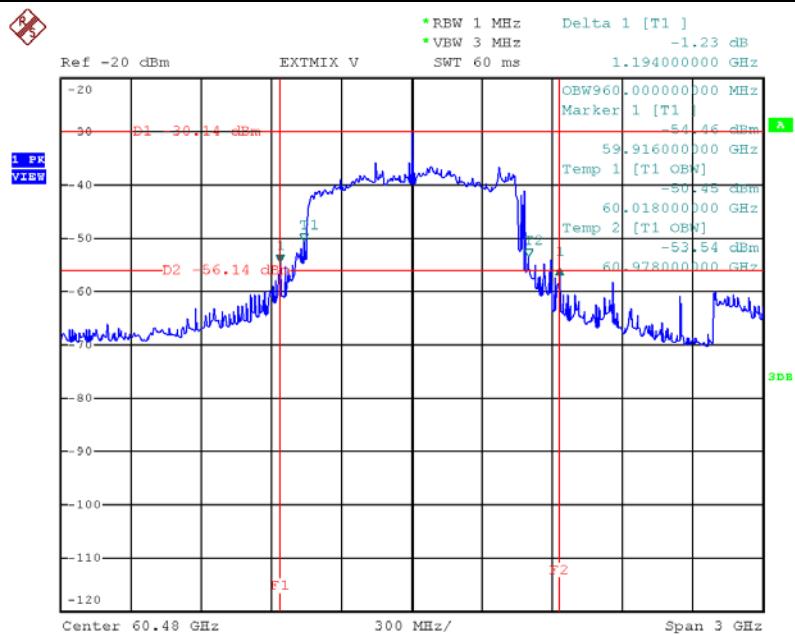Occupied Bandwidth&26 dBc Bandwidth


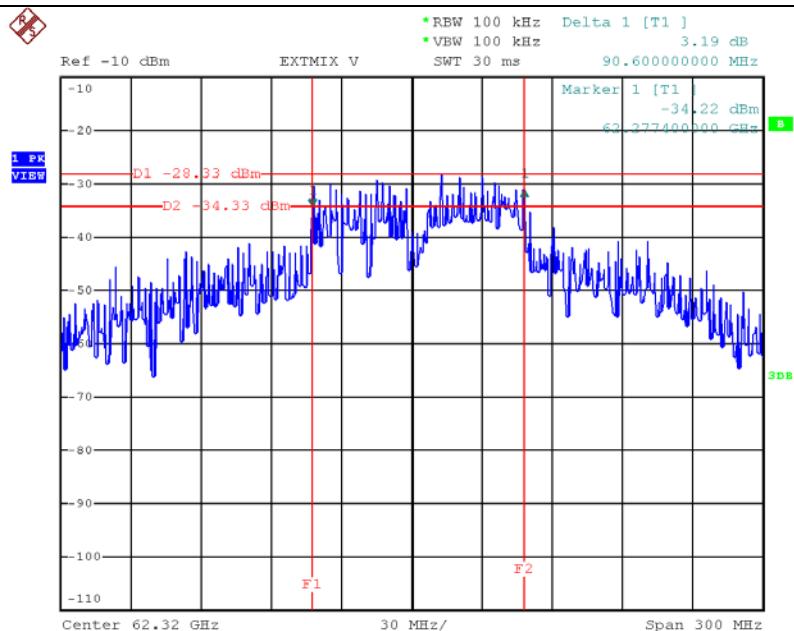
Date: 14.JUN.2013 07:01:42

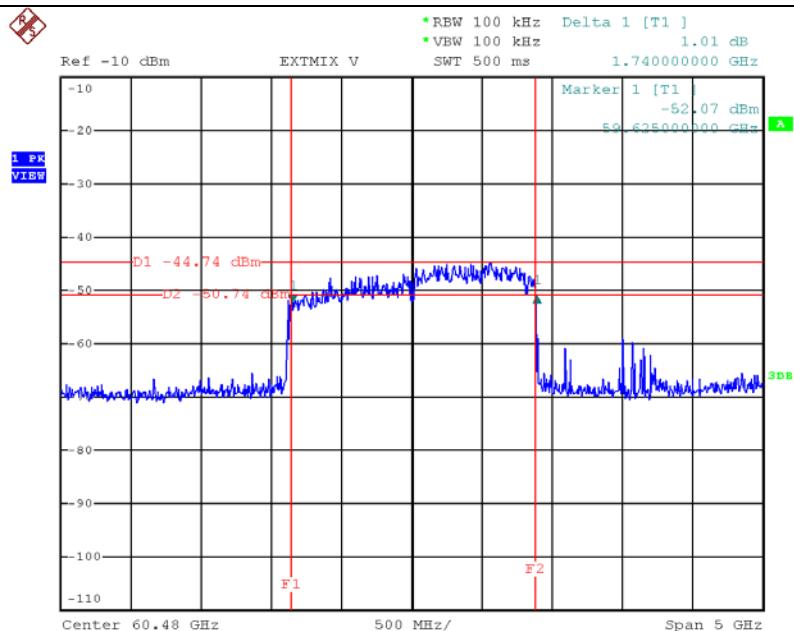Channel Plan: Channel 2 HRP: 60.48 GHz
Test Frequency: 60.48 GHz
6 dBc Bandwidth


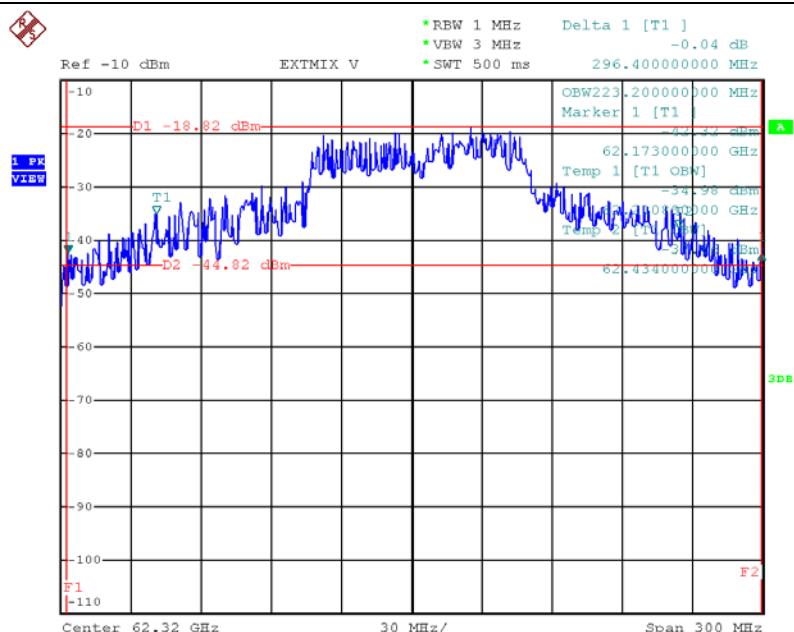
Date: 4.JUN.2013 01:49:43

Occupied Bandwidth&26 dBc Bandwidth


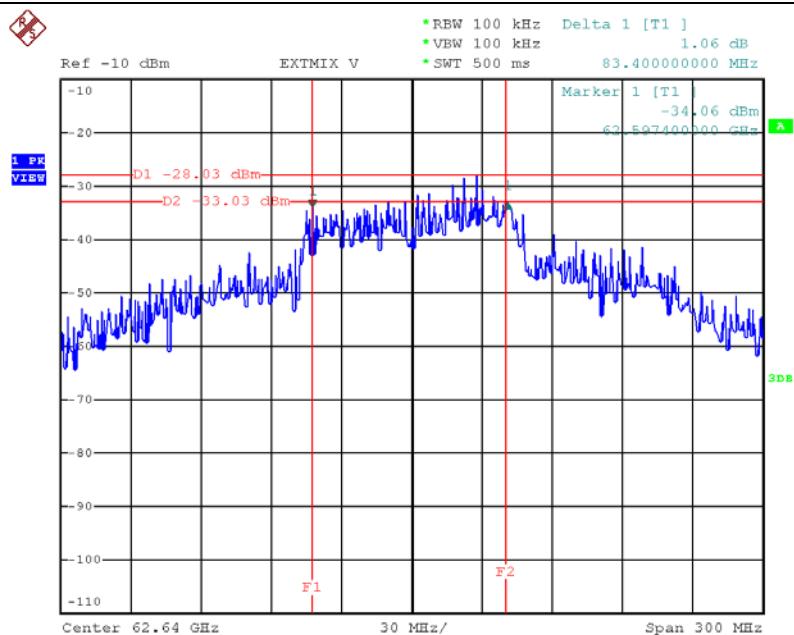
Date: 4.JUN.2013 01:43:15

Channel Plan: Channel 3 LRP: 62.32-62.96 GHz
Test Frequency: 62.32 GHz
6 dBc Bandwidth


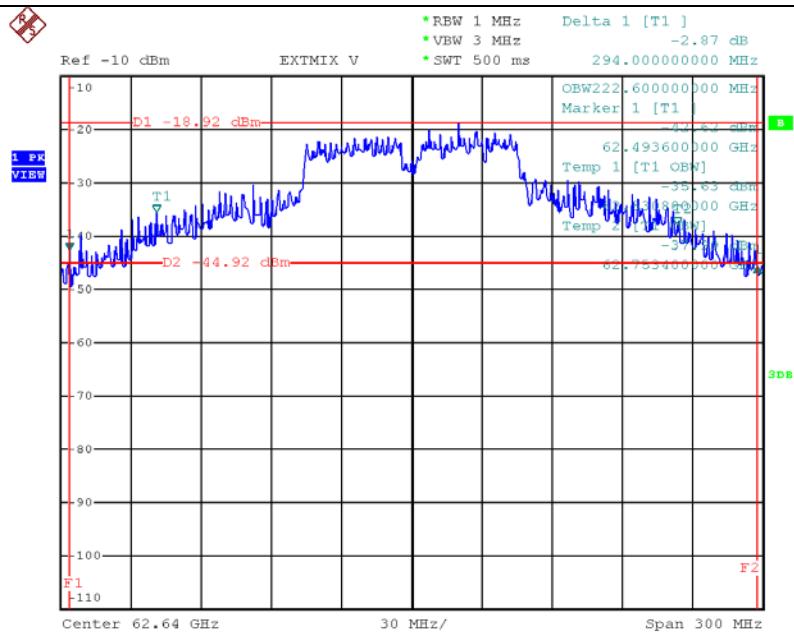
Date: 14.JUN.2013 05:29:06

Occupied Bandwidth&26 dBc Bandwidth


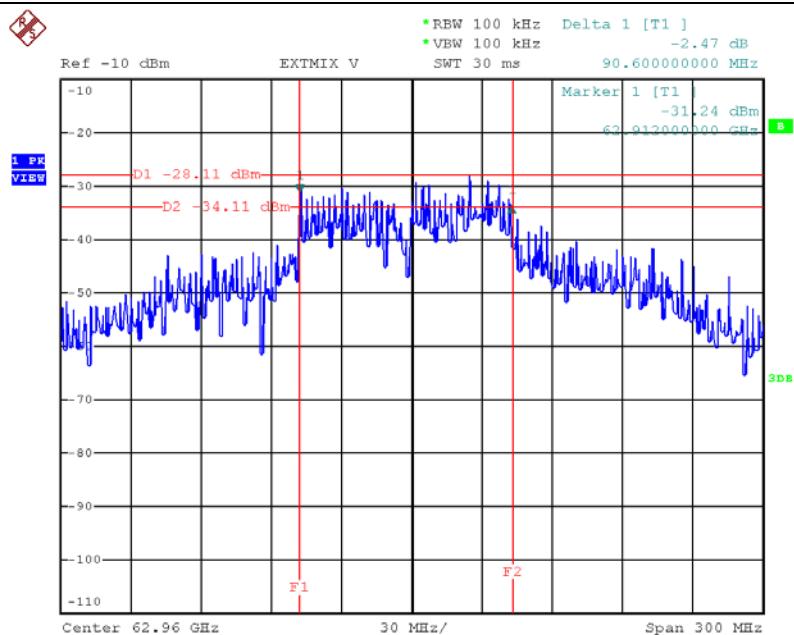
Date: 15.JUN.2013 03:31:47

Test Frequency: 62.64 GHz
6 dBc Bandwidth


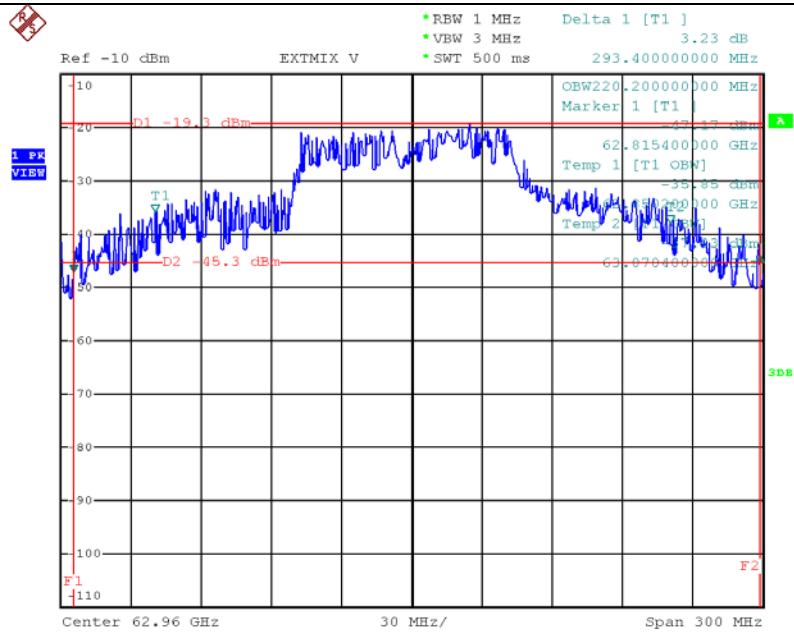
Date: 4.JUN.2013 03:49:55

Occupied Bandwidth&26 dBc Bandwidth


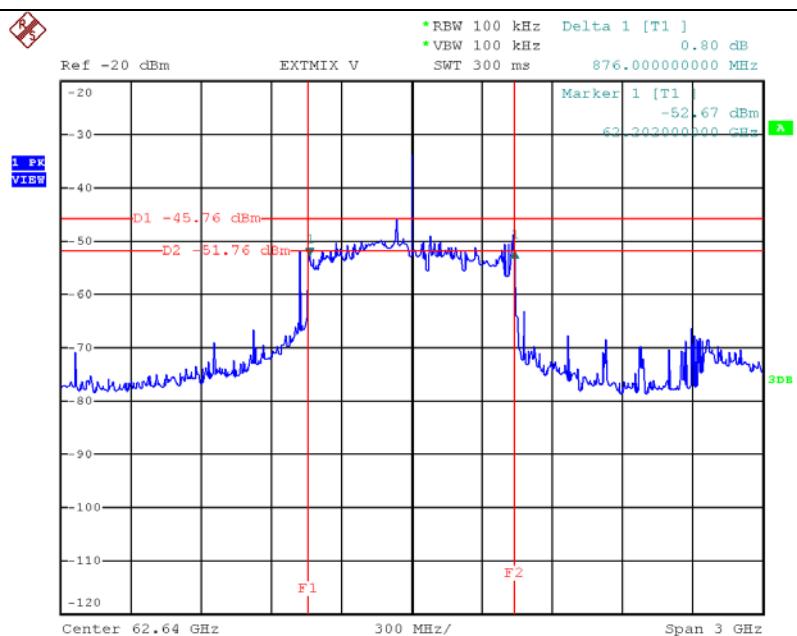
Date: 5.JUN.2013 03:52:48

Test Frequency: 62.96 GHz
6 dBc Bandwidth


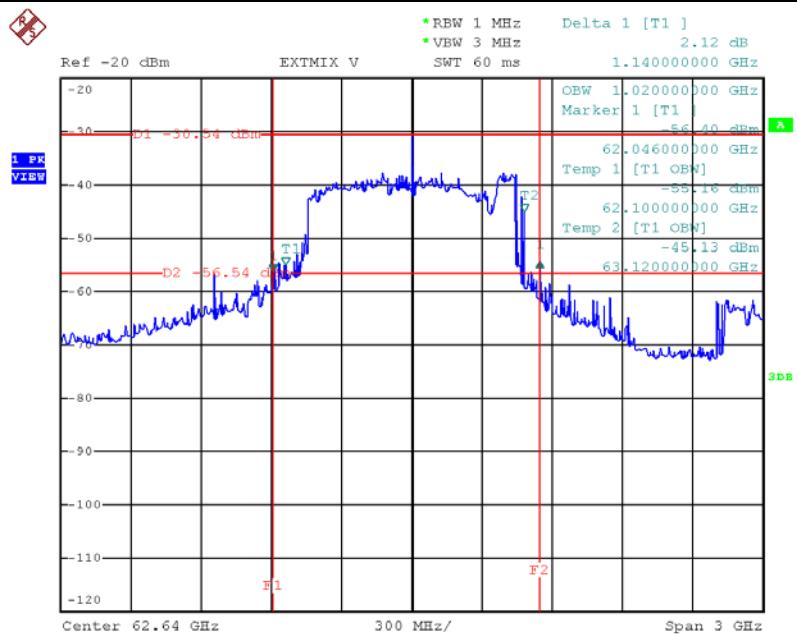
Date: 14.JUN.2013 05:22:06

Occupied Bandwidth&26 dBc Bandwidth


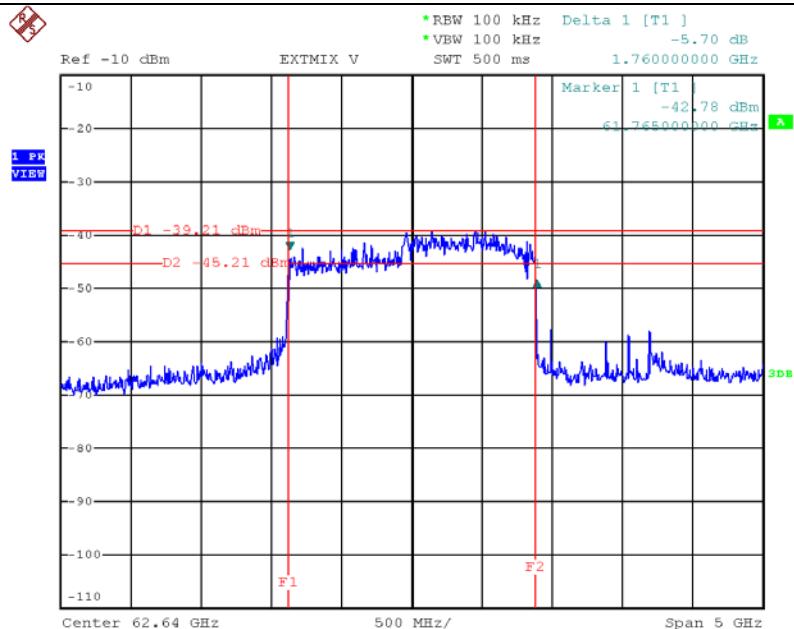
Date: 15.JUN.2013 03:24:11

Channel Plan: Channel 3 MRP: 62.64 GHz
Test Frequency: 62.64 GHz
6 dBc Bandwidth


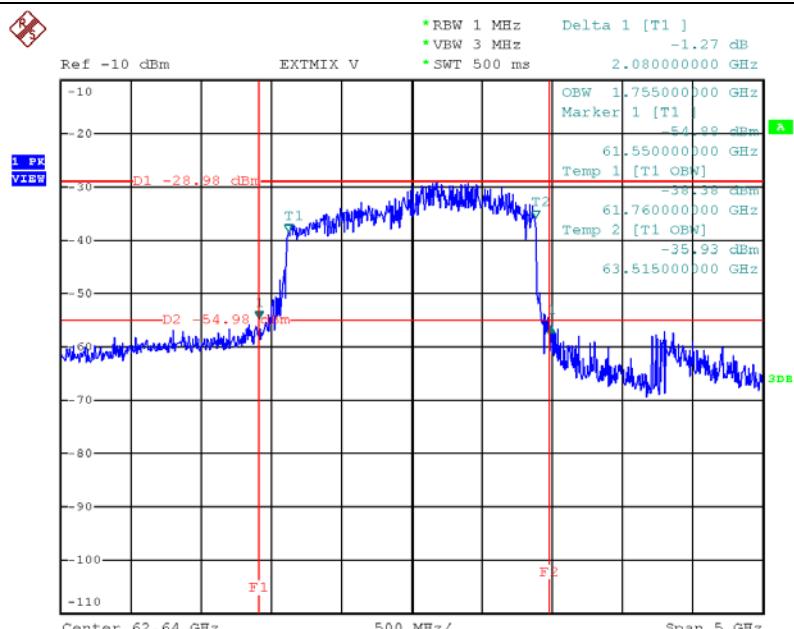
Date: 14.JUN.2013 07:15:36

Occupied Bandwidth&26 dBc Bandwidth


Date: 14.JUN.2013 07:11:44

Channel Plan: Channel 3 HRP: 62.64 GHz
Test Frequency: 62.64 GHz
6 dBc Bandwidth


Date: 4.JUN.2013 02:29:50

Occupied Bandwidth&26 dBc Bandwidth


Date: 4.JUN.2013 02:32:32

3.3 EIRP Power and Power Density

3.3.1 Limit of EIRP Power and Power Density

Power Density Limit		
Use Condition	EIRP Average Power Density	EIRP Peak Power Density
Fixed field disturbance sensors at 61-61.5GHz	9 nW/cm ² equivalent 10.2 mW (10.08 dBm)	18 nW/cm ² equivalent 10.2 mW (13.09 dBm)
Except fixed field disturbance sensors at 61-61.5GHz	N/A	9 nW/cm ² equivalent 10.2 mW (10.08 dBm)
Except fixed field disturbance sensors	9 μ W/cm ² equivalent 10W (40.08 dBm)	18 μ W/cm ² equivalent 20W (43.08 dBm)

NOTE: For the applicable limit, see FCC 15.255 (b)


3.3.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.3.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2009, clauses 7.8.3 and 7.8.6.

3.3.4 Test Setup

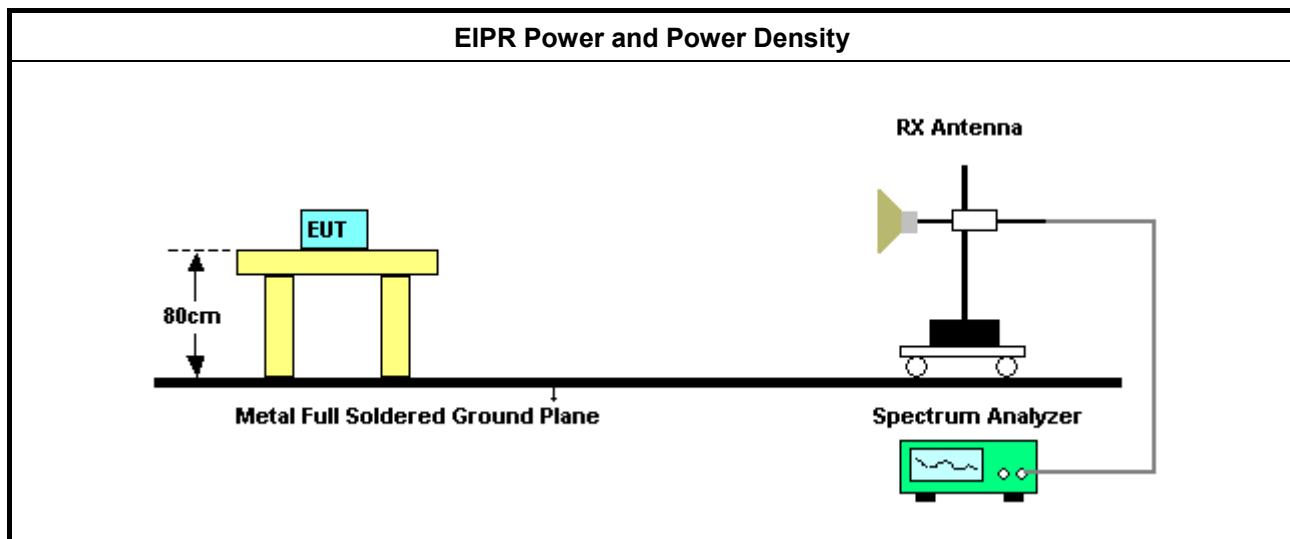

3.3.5 Test Result of EIPR Power and Power Density


Test Conditions	see ANSI C63.10, clause 5.11
Test Setup	see ANSI C63.10, clause 7.8.6
NOTE: If the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.12 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worse case combination to be used for the conformance testing.	



3.3.5.1 Test Result of EIRP Power

Temp	24°C		Humidity		64%				
Test Engineer	Sean Ku		Test Distance		1 m				
Test Results									
Channel Plan (GHz)	Test Freq. (GHz)	Measured Power (dBm)		EIRP (dBm)		EIRP Limit (dBm) (note 1)		Margin (dB)	
		AV	Peak	AV	Peak	AV	Peak	AV	Peak
Channel 2 LRP: 60.16-60.80	60.16	-32.16	-13.73	30.01	31.30	40.08	43.08	10.07	11.78
	60.48	-32.43	-13.9	29.79	31.17	40.08	43.08	10.29	11.91
	60.80	-33.11	-14.54	29.15	30.58	40.08	43.08	10.93	12.50
Channel 2 MRP: 60.48	60.48	-21.4	-13.26	23.72	31.81	40.08	43.08	16.36	11.27
Channel 2 HRP: 60.48	60.48	-18.53	-8.45	26.71	36.62	40.08	43.08	13.37	6.46
Channel 3 LRP: 62.32-62.96	62.32	-34.78	-15.95	27.70	29.38	40.08	43.08	12.38	13.70
	62.64	-34.71	-15.32	27.81	30.06	40.08	43.08	12.27	13.02
	62.96	-34.17	-15.98	28.40	29.44	40.08	43.08	11.68	13.64
Channel 3 MRP: 62.64	62.64	-22.07	-14.59	23.35	30.79	40.08	43.08	16.73	12.29
Channel 3 HRP: 62.64	62.64	-18.8	-9.34	26.74	36.04	40.08	43.08	13.34	7.04
Measurement uncertainty: 4.4335 dB									
The measured power level is converted to EIRP using the Friis equation:									
$\text{EIRP} = P_T * G_T = (P_R / G_R) * (4 * \pi * D / \lambda)^2$									
P_R = measured channel power									
G_R = 23 dBi, The gain of the receive measurement antenna									
D = The measurement distance									
λ = The wavelength.									
NOTE 1: For the applicable limit, see FCC 15.255 (b)									


3.3.5.2 Measured Power Plots

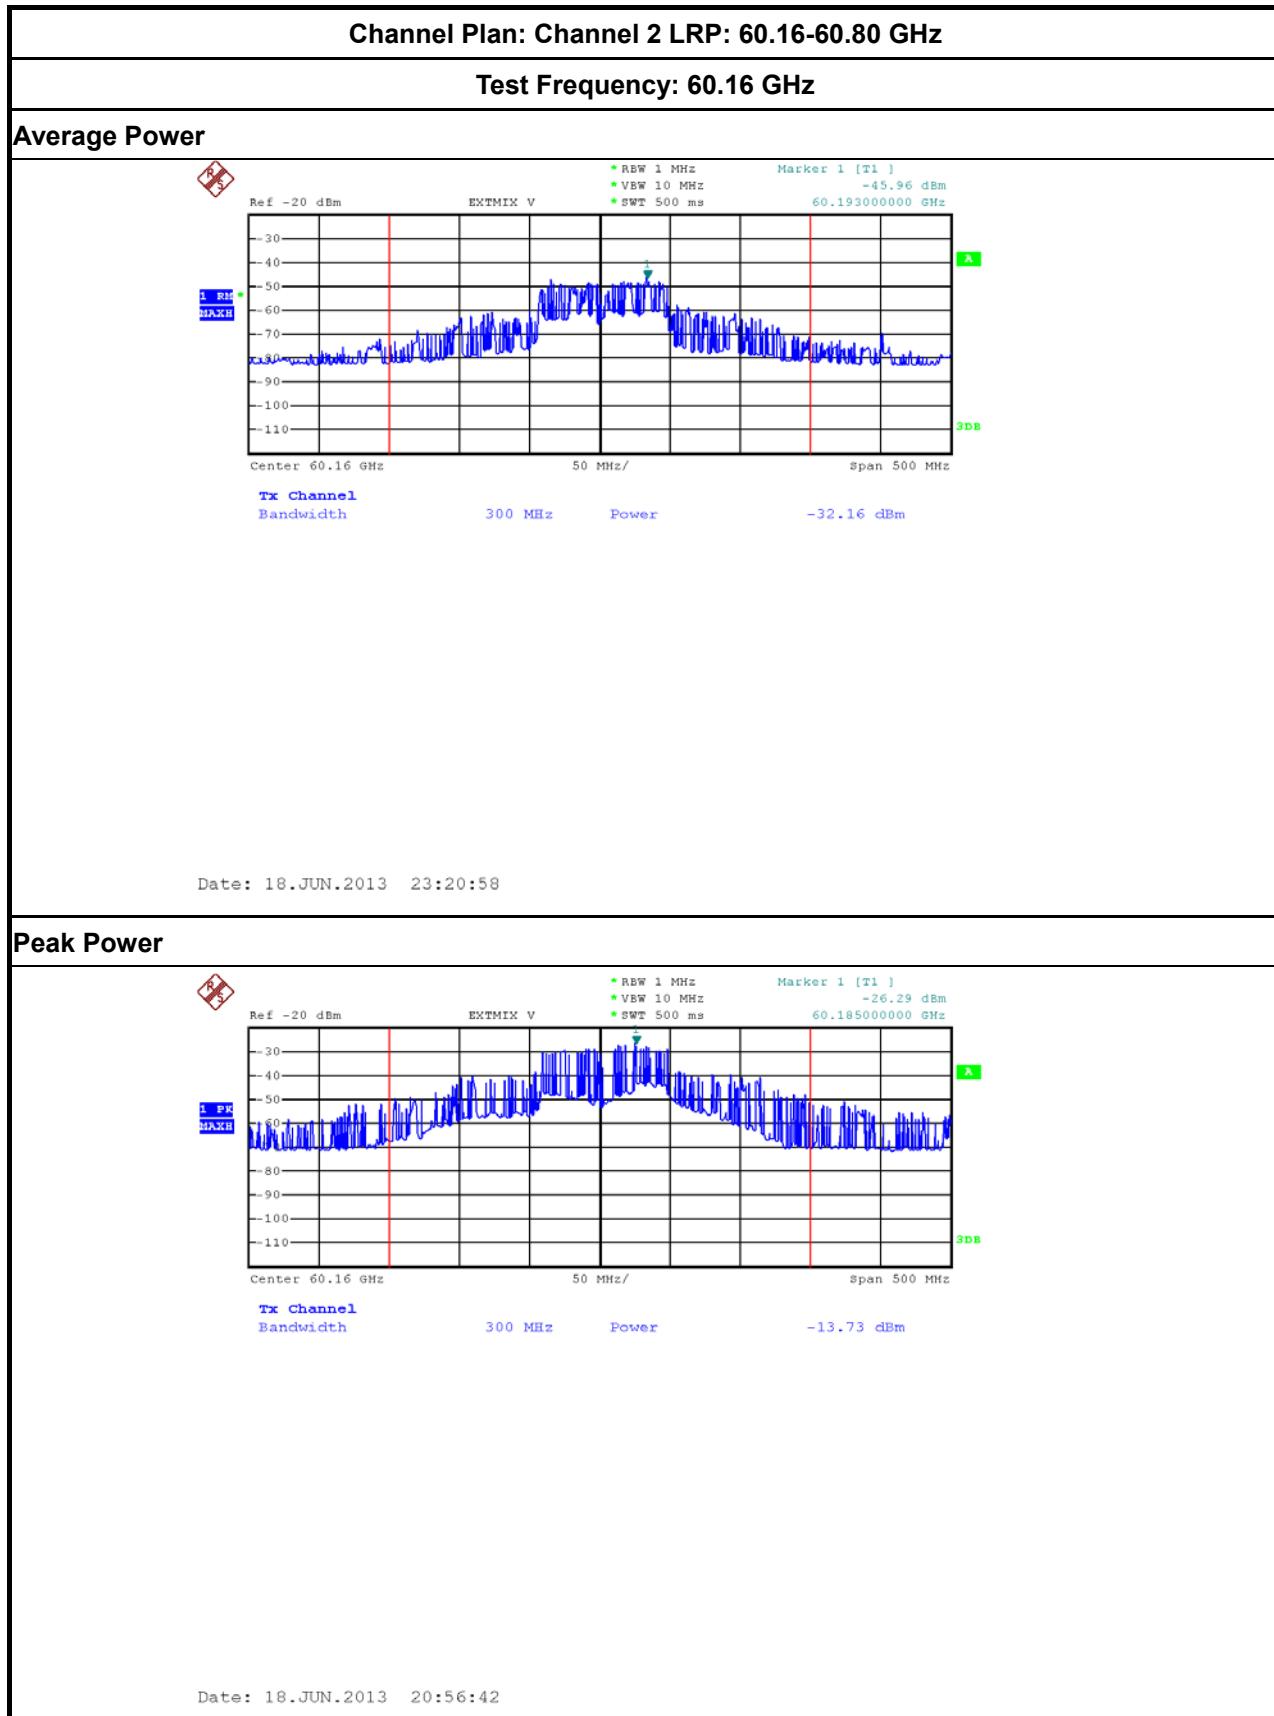




Test Frequency: 60.48 GHz

Average Power

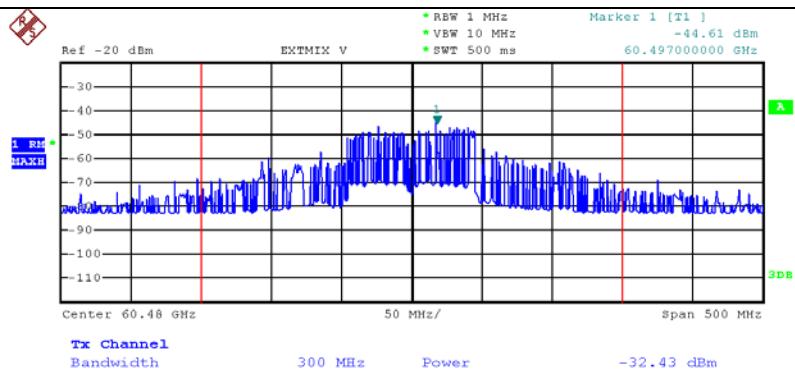

Date: 18.JUN.2013 22:04:44

Peak Power

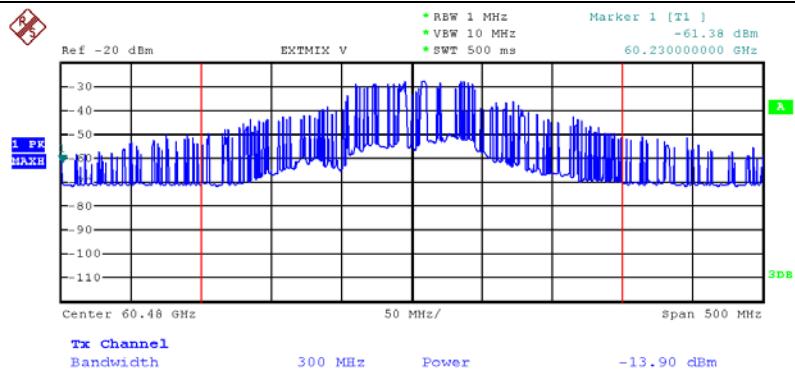


Date: 18.JUN.2013 21:51:11




Test Frequency: 60.80 GHz

Average Power

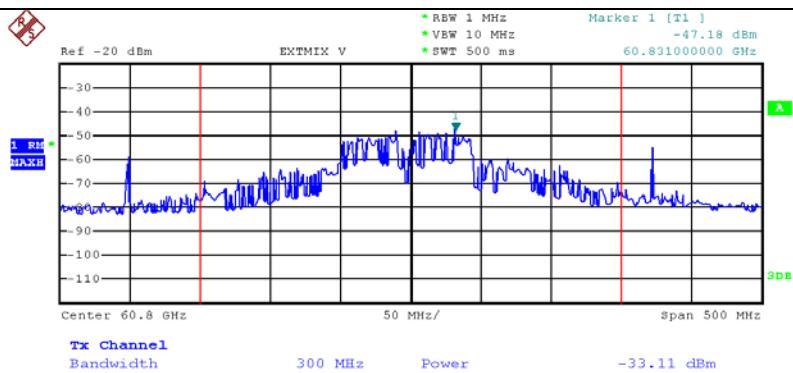

Date: 18.JUN.2013 23:59:08

Peak Power

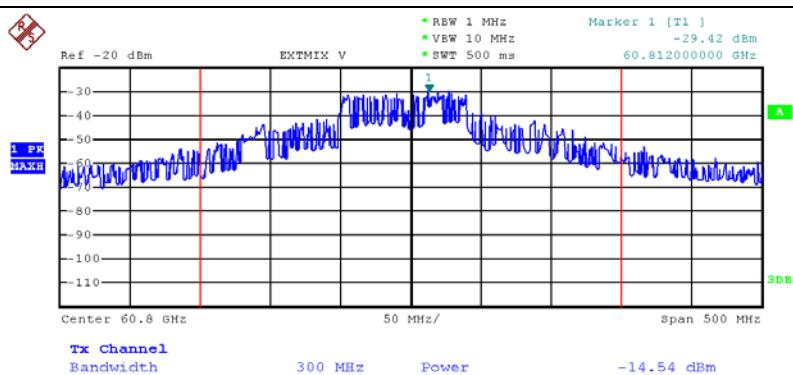


Date: 19.JUN.2013 00:05:53



Channel Plan: Channel 2 MRP: 60.48 GHz


Test Frequency: 60.48 GHz

Average Power

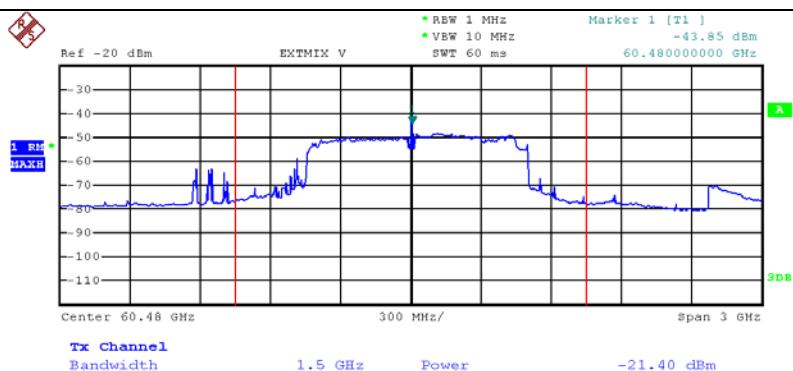

Date: 14.JUN.2013 06:37:41

Peak Power

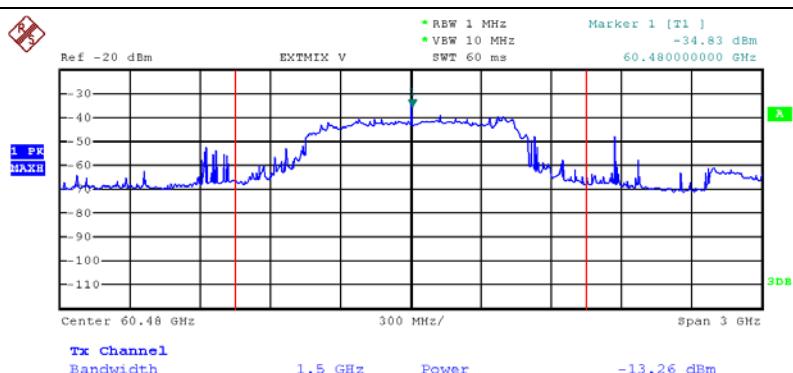


Date: 14.JUN.2013 06:36:36



Channel Plan: Channel 2 HRP: 60.48 GHz


Test Frequency: 60.48 GHz

Average Power

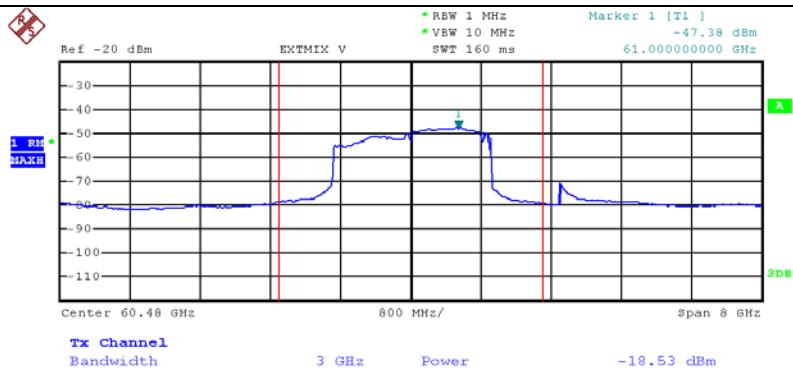

Date: 14.JUN.2013 00:52:02

Peak Power

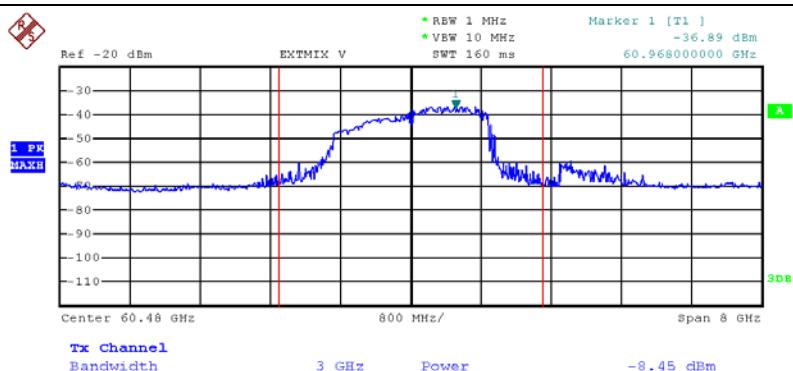


Date: 14.JUN.2013 00:51:13



Channel Plan: Channel 3 LRP: 62.32-62.96 GHz


Test Frequency: 62.32 GHz

Average Power

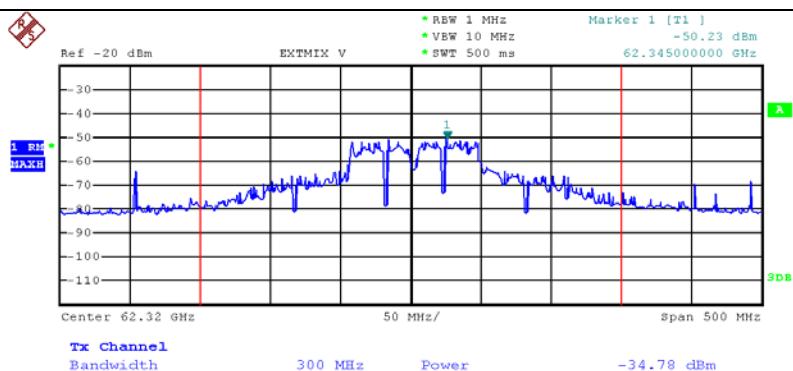

Date: 19.JUN.2013 02:25:54

Peak Power

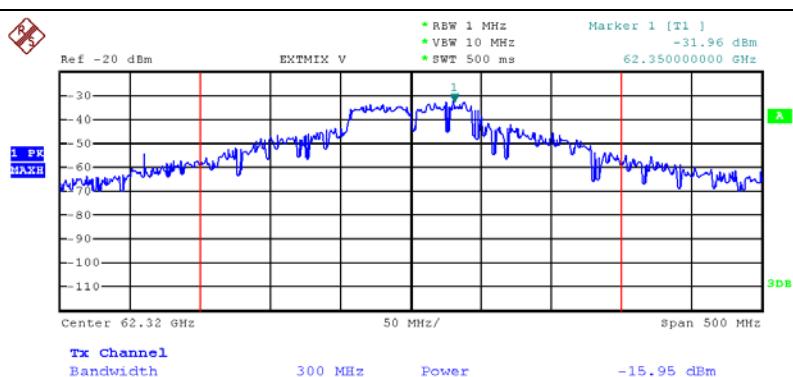


Date: 19.JUN.2013 01:51:33




Test Frequency: 62.64 GHz

Average Power

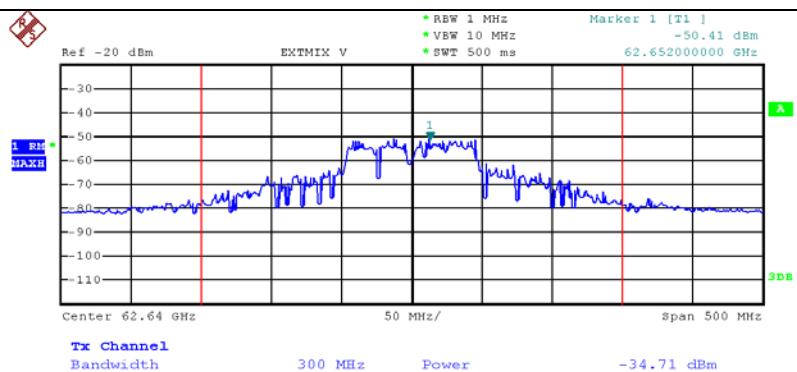

Date: 19.JUN.2013 00:57:38

Peak Power

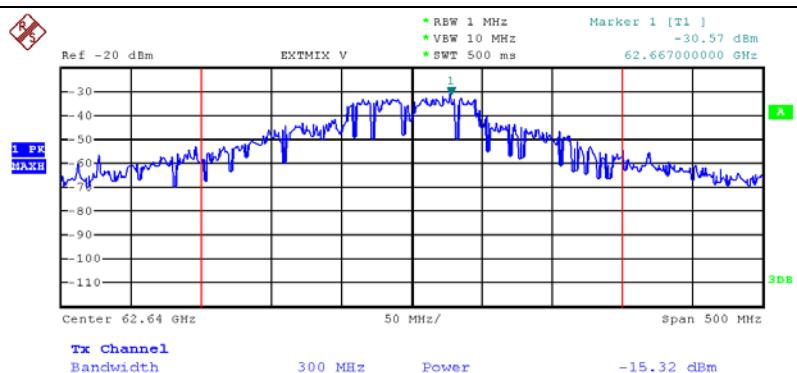


Date: 19.JUN.2013 01:12:02




Test Frequency: 62.96 GHz

Average Power

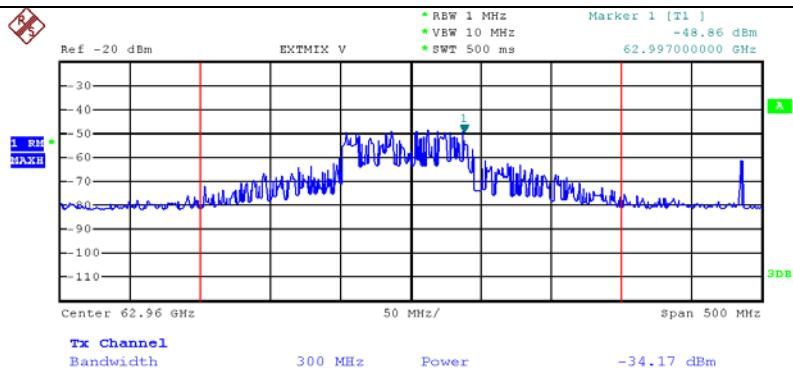

Date: 19.JUN.2013 00:23:39

Peak Power

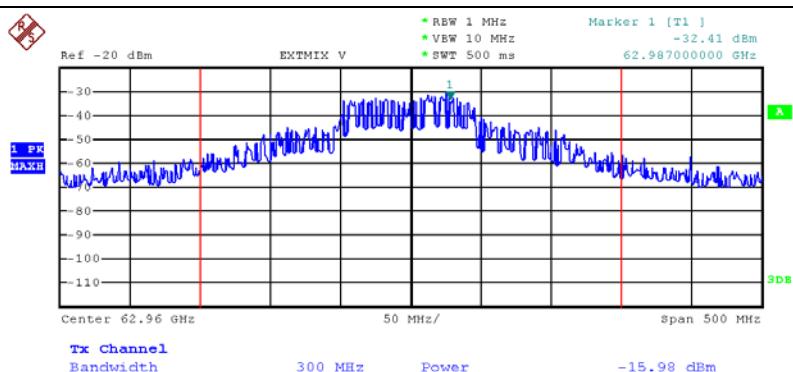


Date: 19.JUN.2013 00:17:58

Channel Plan: Channel 3 MRP: 62.64 GHz


Test Frequency: 62.64 GHz

Average Power

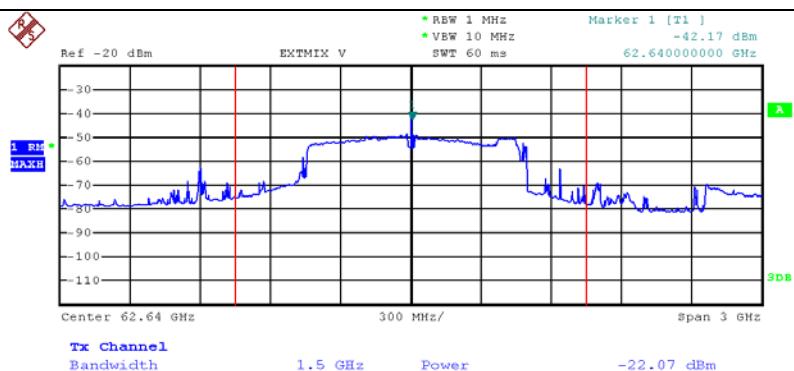

Date: 14.JUN.2013 06:31:22

Peak Power

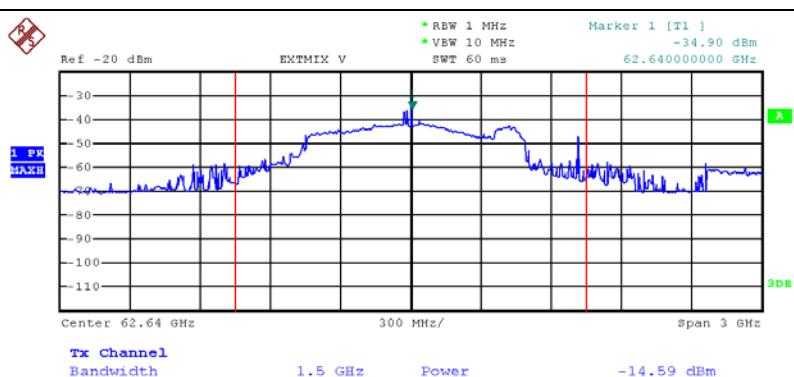


Date: 14.JUN.2013 06:32:52



Channel Plan: Channel 3 HRP: 62.64 GHz


Test Frequency: 62.64 GHz

Average Power

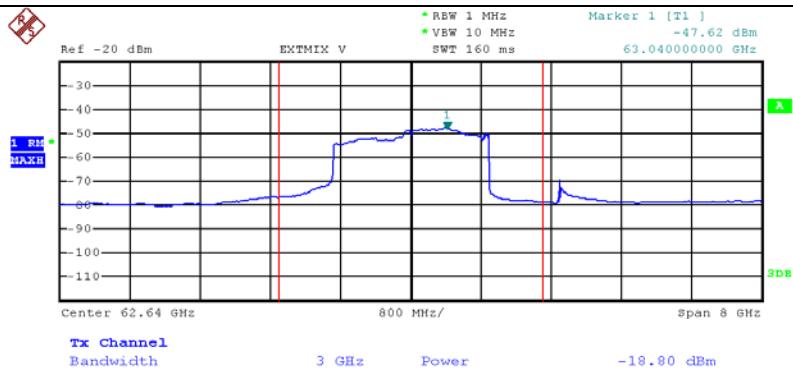

Date: 14.JUN.2013 00:41:13

Peak Power

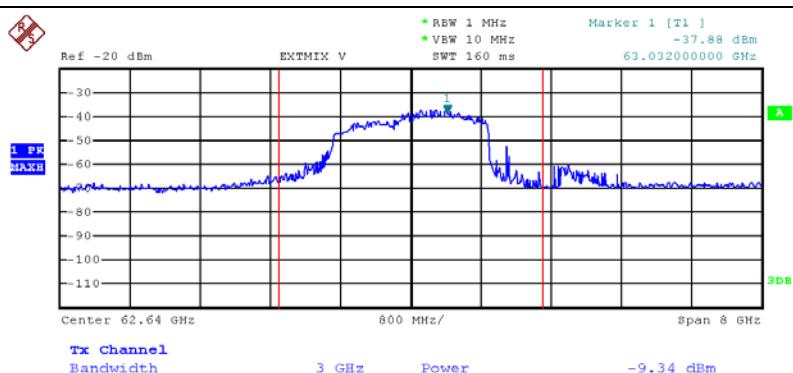

Date: 14.JUN.2013 00:38:39



3.3.5.3 Test Result of EIRP Power Density

Temp	24°C			Humidity		64%			
Test Engineer	Sean Ku			Test Distance		3 m			
Test Results									
Channel Plan (GHz)	Test Freq. (GHz)	EIRP Power (dBm)		EIRP Power Density (μ W/cm ²)		EIRP Power Density Limit (μ W/cm ²)		Margin (μ W/cm ²)	
		AV	Peak	AV	Peak	AV	Peak	AV	Peak
Channel 2 LRP: 60.16-60.80	60.16	30.01	31.30	0.887	1.192	9	18	8.113	16.808
	60.48	29.79	31.17	0.842	1.159	9	18	8.158	16.841
	60.80	29.15	30.58	0.728	1.010	9	18	8.272	16.990
Channel 2 MRP: 60.48	60.48	23.72	31.81	0.208	1.343	9	18	8.792	16.657
Channel 2 HRP: 60.48	60.48	26.71	36.62	0.415	4.064	9	18	8.585	13.936
Channel 3 LRP: 62.32-62.96	62.32	27.70	29.38	0.520	0.767	9	18	8.480	17.233
	62.64	27.81	30.06	0.534	0.896	9	18	8.466	17.104
	62.96	28.40	29.44	0.611	0.778	9	18	8.389	17.222
Channel 3 MRP: 62.64	62.64	23.35	30.79	0.191	1.060	9	18	8.809	16.940
Channel 3 HRP: 62.64	62.64	26.74	36.04	0.418	3.552	9	18	8.582	14.448
Measurement uncertainty: 4.4335 dB									
NOTE 1: The EIRP is converted to Power Density using the equation:									
PD = EIRP / (4 * Pi * D _S ²)									
D _S = the specification distance									
NOTE 2: For the applicable limit, see FCC 15.255 (b)									
NOTE 3: AV is average power density.									

3.4 Peak Conducted Power

3.4.1 Limit of Peak Conducted Power

Peak Conducted Power Limit	
6dBc Bandwidth	Peak Conducted Power (note 1)
> 100MHz	500mW
≤ 100MHz	500mW x (B/100) (see note 2)

NOTE 1: For the applicable limit, see FCC 15.255(e)

NOTE 2: B= 6dB bandwidth (measured at RBW 100kHz)


3.4.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.4.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2009, clauses 7.8.3 and 7.8.6.

3.4.4 Test Setup

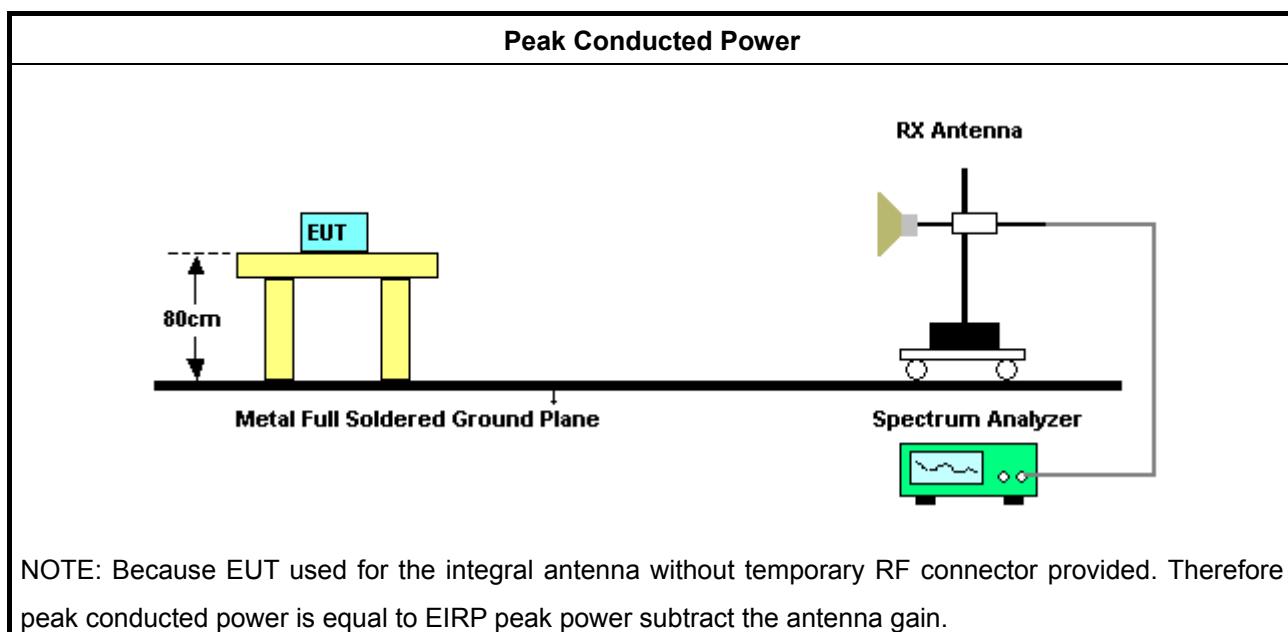

3.4.5 Test Result of Peak Conducted Power

Test Conditions	see ANSI C63.10, clause 5.11
Test Setup	see ANSI C63.10, clause 7.8.6
NOTE: If the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.12 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worse case combination to be used for the conformance testing.	



3.4.5.1 Peak Conducted Power

Temp	24°C		Humidity		64%									
Test Engineer	Sean Ku		Test Distance		1 m									
Test Date	Jun. 19, 2013													
Test Results														
Channel Plan (GHz)	Test Freq. (GHz)	EIRP (dBm)	Max. Ant. Gain	Peak Power (dBm) (note1)	Peak Power (mW)	6dBc BW (MHz) (note2)	Peak Power Limit (mW) (note3)	Margin (mW)						
Channel 2 LRP: 60.16-60.80	60.16	31.30	16	15.30	33.868	89.400	447.00	413.132						
	60.48	31.17	16	15.17	32.915	88.200	441.00	408.085						
	60.80	30.58	16	14.58	28.707	85.800	429.00	400.293						
Channel 2 MRP: 60.48	60.48	31.81	18	13.81	24.066	834.000	500.00	475.934						
Channel 2 HRP: 60.48	60.48	36.62	18	18.62	72.845	1,740	500.00	427.155						
Channel 3 LRP: 62.32-62.96	62.32	29.38	16	13.38	21.799	90.600	453.00	431.201						
	62.64	30.06	16	14.06	25.461	83.400	417.00	391.539						
	62.96	29.44	16	13.44	22.096	90.600	453.00	430.904						
Channel 3 MRP: 62.64	62.64	30.79	18	12.79	19.006	876.000	500.00	480.994						
Channel 3 HRP: 62.64	62.64	36.04	18	18.04	63.662	1,760	500.00	436.338						
Measurement uncertainty: 4.4335 dB														
NOTE 1: Because EUT used for the integral antenna without temporary RF connector provided. Therefore peak conducted power is equal to EIRP power subtract the antenna gain.														
NOTE 2: For the 6dBc bandwidth, see test report clause 3.2.5.														
NOTE 3: For the applicable limit, see FCC 15.255(e)														

3.5 Transmitter Spurious Emissions

3.5.1 Limit of Transmitter Spurious Emissions

Frequency Range	Limit
Radiated emissions below 40 GHz	FCC 15.209
Radiated emissions above 40 GHz – 200GHz	90 pW/cm ² @ 3 m (Equivalent EIRP 102 µW, -9.91dBm)

NOTE: Spurious emissions shall not exceed the level of the fundamental emission.


3.5.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.5.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2009, clauses 6.3, 6.4, 6.5, 6.6 and 7.8.6.

3.5.4 Test Setup

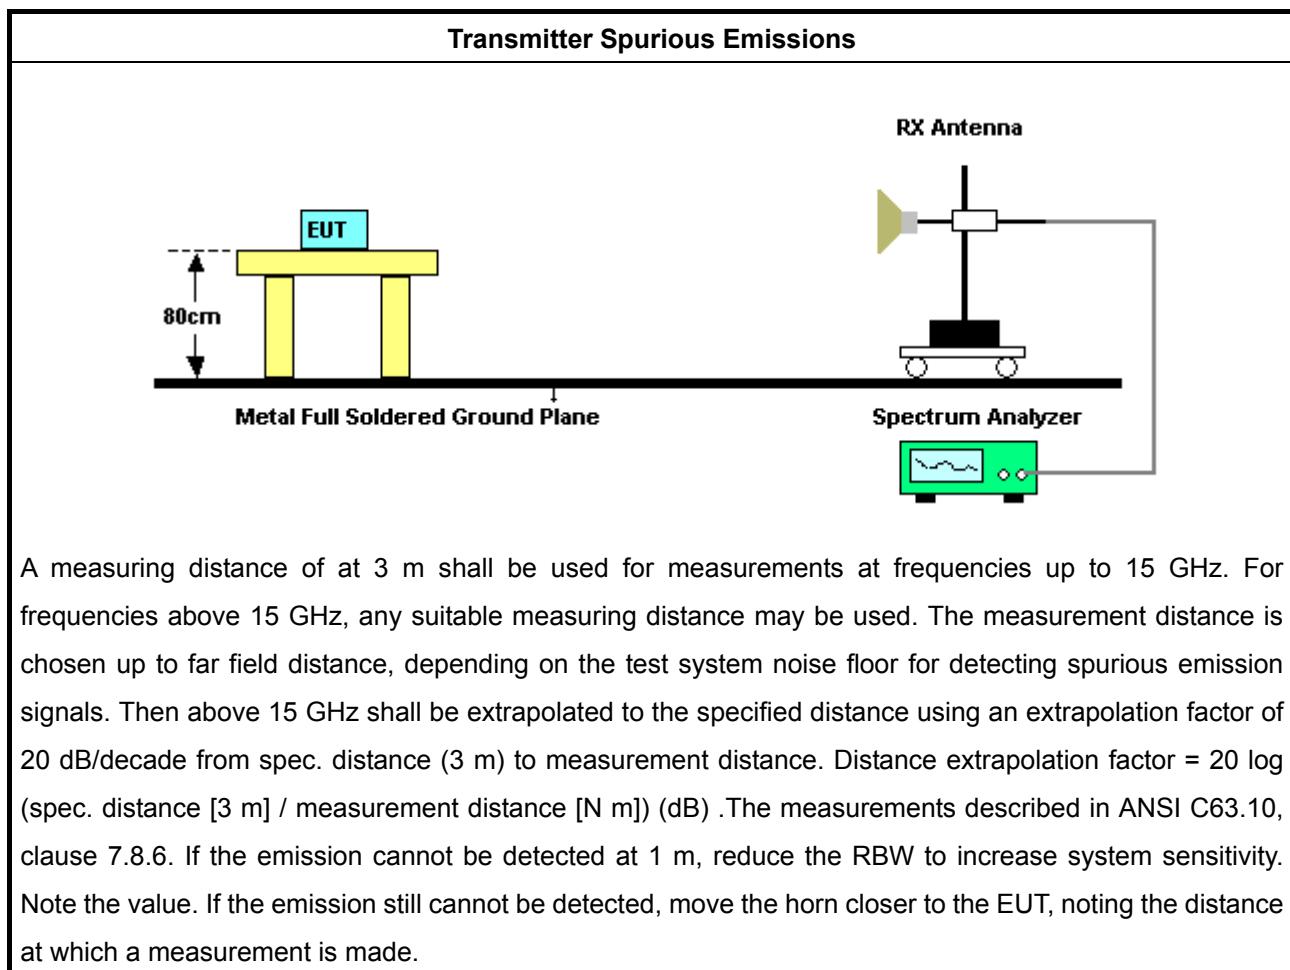

**3.5.5 Test Result of Transmitter Spurious Emissions**

Test Conditions	see ANSI C63.10, clause 5.11
Test Setup	see ANSI C63.10, clauses 6.3, 6.4, 6.5, 6.6 and 7.8.6


NOTE: If equipment having different channel plan and nominal channel bandwidth modes (see test report clause 1.1.1), the measurements are uninfluenced by different channel plan and nominal channel bandwidth modes, may not need to be repeated for all modes.
--



3.5.5.1 Test Result of Transmitter Spurious Emissions

Temp	24°C	Humidity	64%
Test Engineer	Sean Ku	Test Distance	3 m
Test Range	30 MHz – 1000 MHz	Test Configuration	Normal Link


Vertical

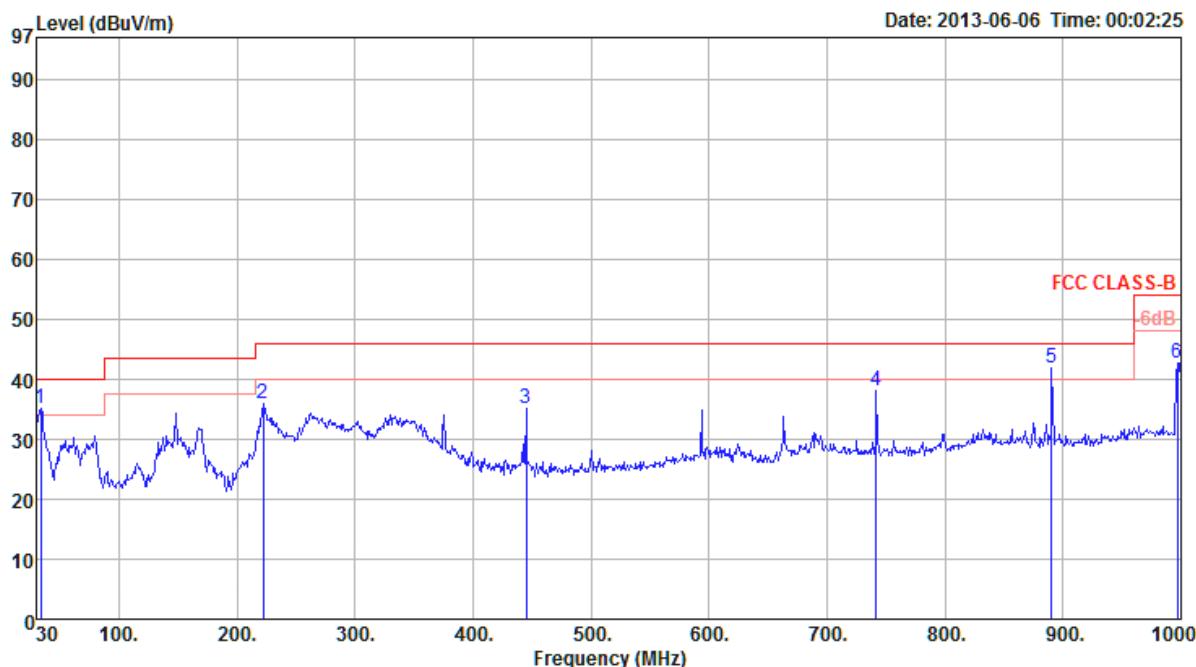

Freq	Level	Limit	Over	Read	Cable			Preamp	Antenna	T/Pos	A/Pos	Pol/Phase
					Line	Limit	Level					
MHz	dBuV/m	dBuV/m			dB		dBuV	dB	dB	dB	deg	cm
1 !	33.88	35.03	40.00	-4.97	44.62	0.90	27.99	17.50	Peak	0	400	VERTICAL
2	222.06	35.82	46.00	-10.18	49.91	2.26	27.09	10.74	Peak	0	400	VERTICAL
3	445.16	35.01	46.00	-10.99	42.60	3.22	27.76	16.95	Peak	0	400	VERTICAL
4	741.98	38.16	46.00	-7.84	40.90	4.20	27.11	20.17	Peak	0	400	VERTICAL
5 p	890.39	41.81	46.00	-4.19	42.65	4.56	26.84	21.44	Peak	0	400	VERTICAL
6	997.09	42.69	54.00	-11.31	41.91	4.84	26.24	22.18	Peak	0	400	VERTICAL



Horizontal

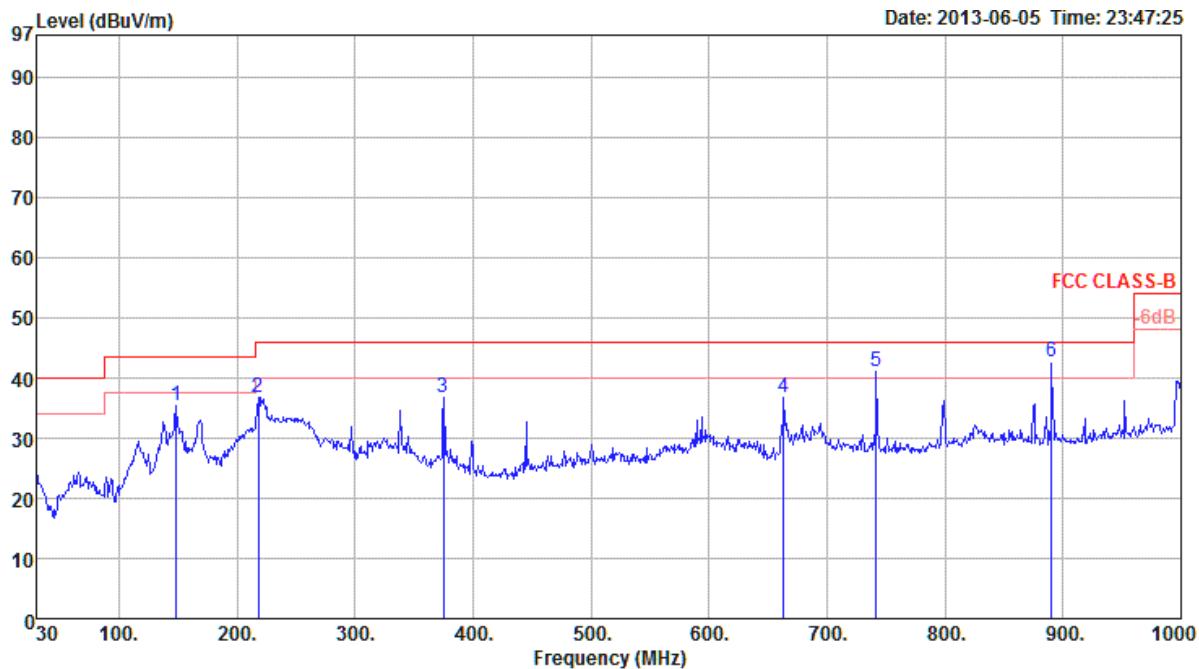


Freq MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Cable PreampAntenna			T/Pos deg	A/Pos cm	Pol/Phase
					Loss	Factor	Factor			
1	148.34	35.29	43.50	-8.21	49.65	1.79	27.51	11.36	Peak	0 400 HORIZONTAL
2	218.18	36.71	46.00	-9.29	50.99	2.24	27.12	10.60	Peak	0 400 HORIZONTAL
3	375.32	36.76	46.00	-9.24	45.22	2.89	27.26	15.91	Peak	0 400 HORIZONTAL
4	663.41	36.70	46.00	-9.30	40.45	3.97	27.43	19.71	Peak	0 400 HORIZONTAL
5	741.98	40.96	46.00	-5.04	43.70	4.20	27.11	20.17	Peak	0 400 HORIZONTAL
6 p	890.39	42.79	46.00	-3.21	43.63	4.56	26.84	21.44	Peak	0 400 HORIZONTAL

Measurement uncertainty: 2.2869 dB



Temp	24°C	Humidity	64%
Test Engineer	Sean Ku	Test Distance	3 m
Test Range	1 GHz – 18 GHz	Test Configuration	Normal Link


Vertical

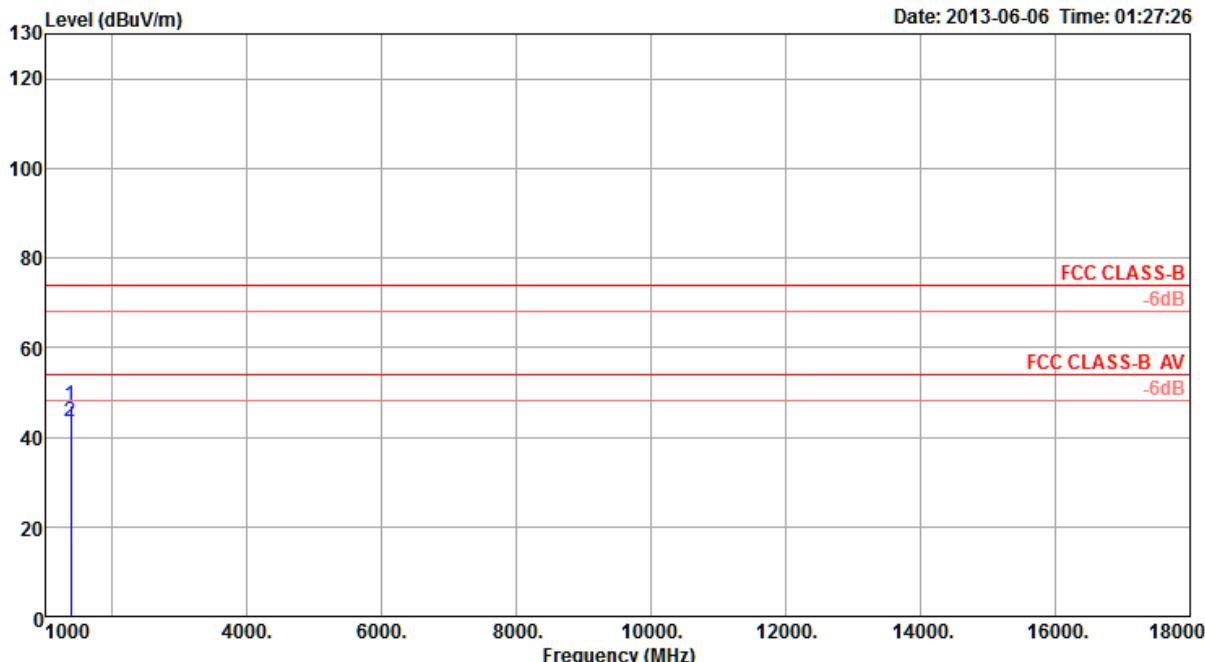

Freq MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Cable Loss dB			Preamp Factor	Antenna Factor	Remark	T/Pos deg	A/Pos cm	Pol/Phase
					Loss	Preamp	Antenna						
1 p	1374.91	47.05	74.00	-26.95	55.18	2.15	35.27	24.99	Peak		234	100	VERTICAL
2 a	1374.97	43.54	54.00	-10.46	51.67	2.15	35.27	24.99	Average		234	100	VERTICAL



Horizontal

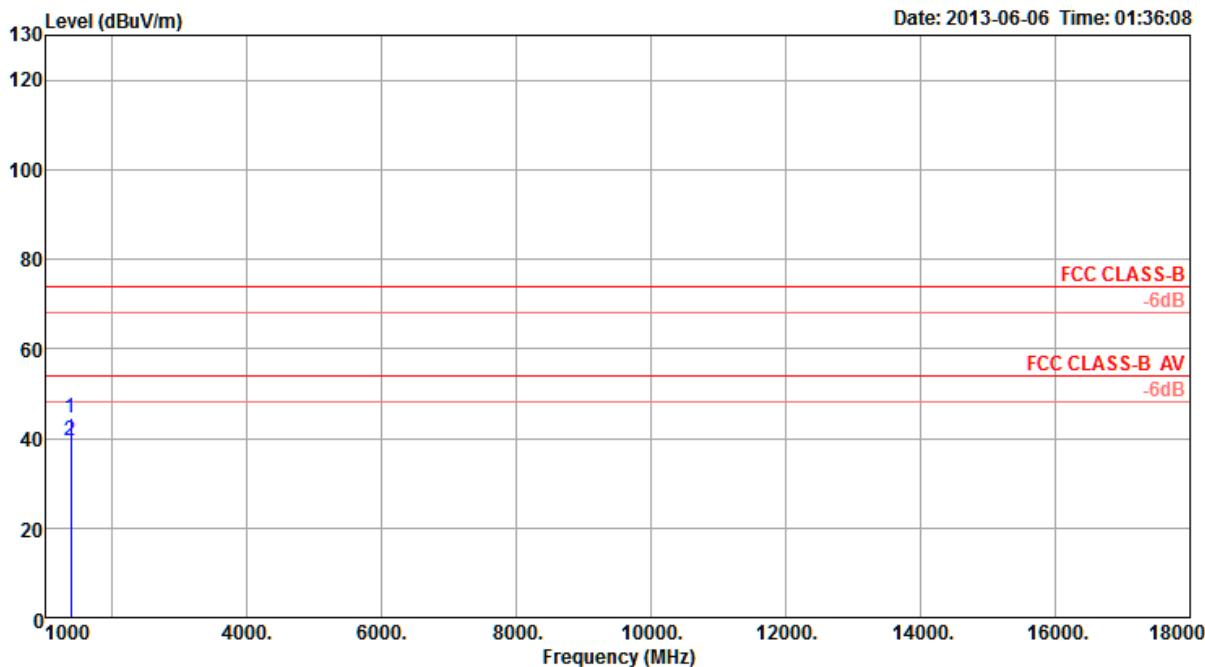


Freq MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Cable			Antenna Factor	Remark	T/Pos deg	A/Pos cm	Pol/Phase
					Loss	Preamp	Factor					
1 p	1374.97	44.44	74.00	-29.56	52.57	2.15	35.27	24.99	Peak	123	100	HORIZONTAL
2 a	1375.00	39.61	54.00	-14.39	47.74	2.15	35.27	24.99	Average	123	100	HORIZONTAL

Measurement uncertainty: 2.593 dB



Temp	24°C	Humidity	64%
Test Engineer	Sean Ku	Test Distance	1 m
Test Range	18 GHz – 26 GHz	Test Configuration	Normal Link


Vertical

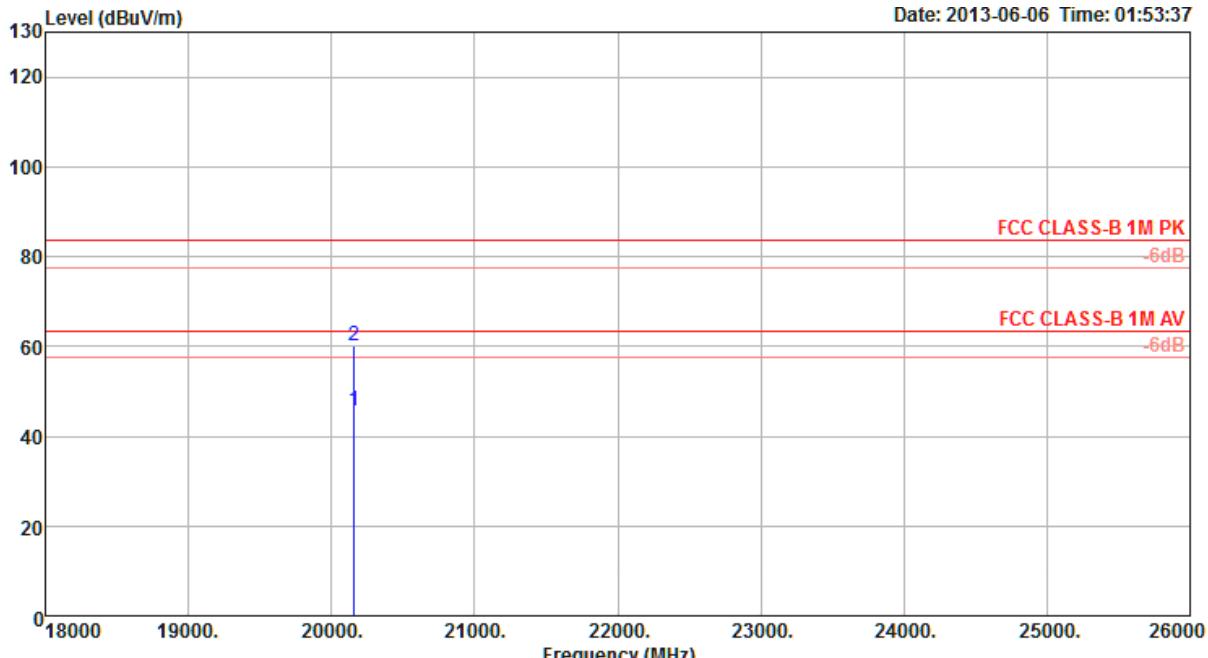

Freq MHz	Level dBuV/m	Limit Line dB	Over Limit dB	Read Level dBuV	Cable			Antenna Factor	Preamp Factor	Remark	T/Pos deg	A/Pos cm	Pol/Phase
					Loss	dB	dB/m						
1 a	20160.25	45.59	63.50	-17.91	34.31	8.75	34.73	37.26	Average		164	100	VERTICAL
2 p	20160.26	60.26	83.50	-23.24	48.98	8.75	34.73	37.26	Peak		164	100	VERTICAL



Horizontal

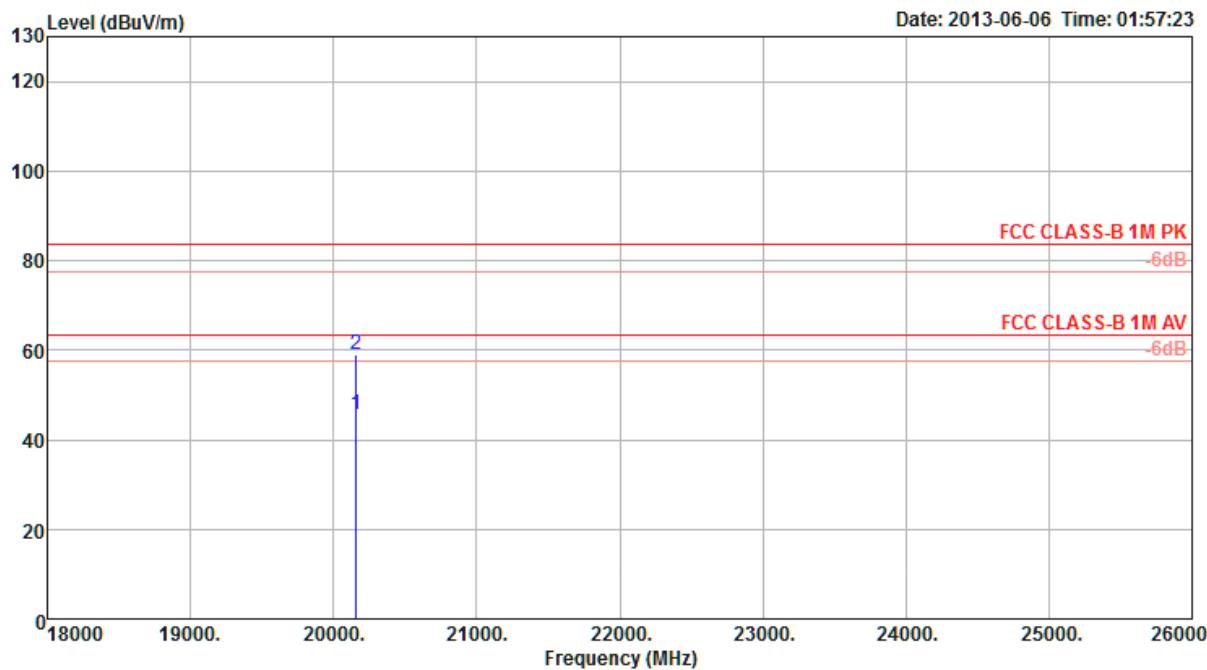


Freq	Level	Limit			Over Limit	Read Level	Cable			Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
		Line	dBuV/m	dBuV/m			dB	dBuV	dB						
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	dB	dB/m	deg	cm	deg	cm	deg	deg
1 a	20160.37	45.59	63.50	-17.91	34.31	8.75	34.73	37.26	Average	336	100	HORIZONTAL			
2 p	20160.78	59.08	83.50	-24.42	47.80	8.75	34.73	37.26	Peak	336	100	HORIZONTAL			

Measurement uncertainty: 2.3749 dB



Temp	24°C	Humidity	64%
Test Engineer	Sean Ku	Test Distance	1 m
Test Range	26 GHz – 40 GHz	Test Configuration	Normal Link


Vertical

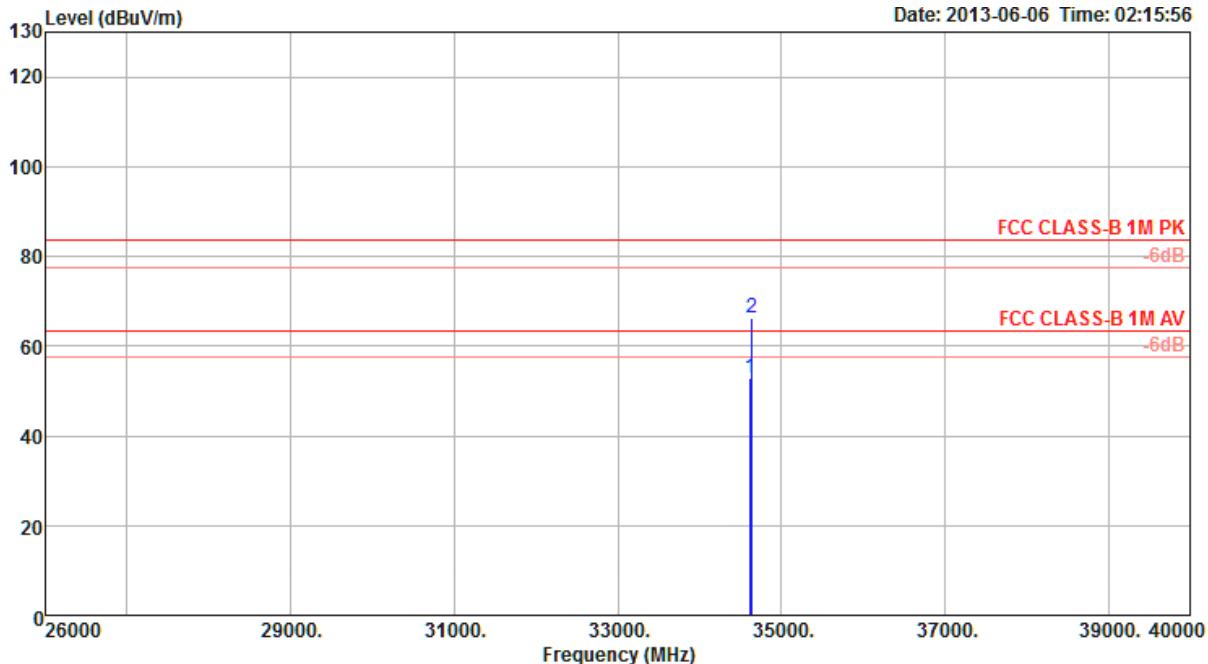

Freq	Level	Limit Line	Over Limit	Read Level	Cable Preamp Antenna			T/Pos	A/Pos	Pol/Phase	
					dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m
1 a	34625.80	52.92	63.50	-10.58	39.82	12.25	40.60	41.45	Average	256	100 VERTICAL
2 p	34640.90	66.40	83.50	-17.10	53.31	12.27	40.64	41.46	Peak	256	100 VERTICAL



Horizontal

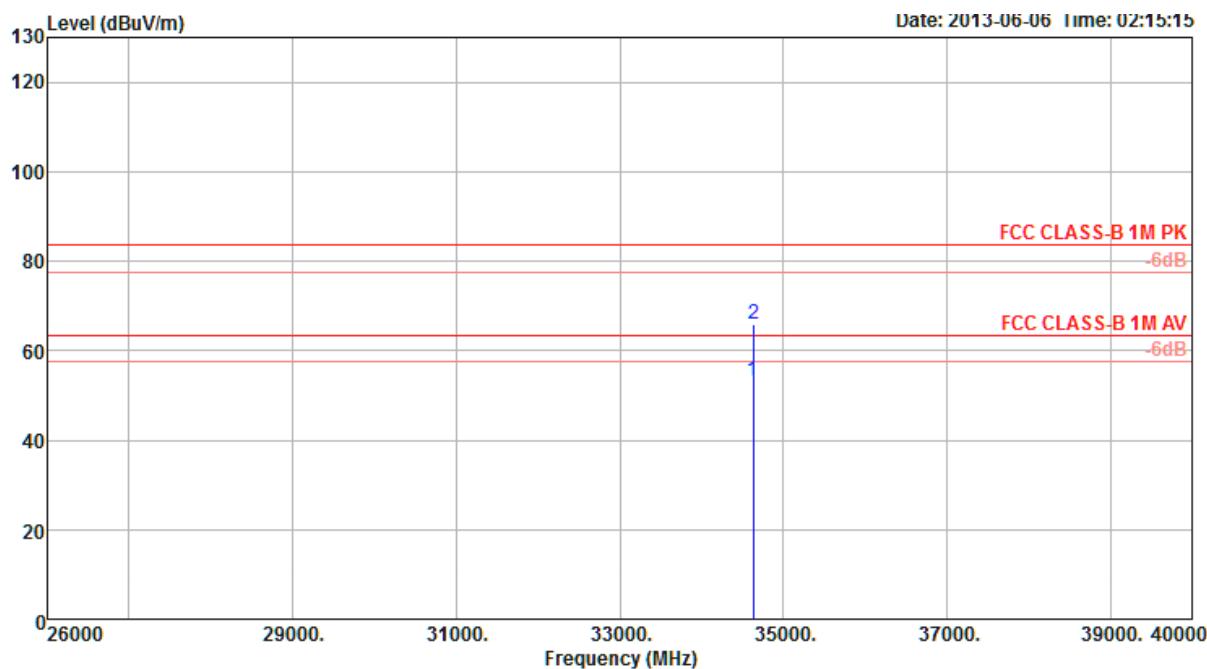

Freq MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Cable			Preamp Factor	Antenna Factor	Remark	T/Pos deg	A/Pos cm	Pol/Phase
					Loss	dB	dB/m						
1 a 34630.65	53.06	63.50	-10.44	39.96	12.25	40.60	41.45	Average			158	100	HORIZONTAL
2 p 34640.30	65.86	83.50	-17.64	52.77	12.27	40.64	41.46	Peak			158	100	HORIZONTAL

Measurement uncertainty: 2.3749 dB



Temp	24°C	Humidity	64%
Test Engineer	Sean Ku	Test Date	Jun. 19, 2013
Test Range	40GHz – 200GHz		

Test Plan: Channel 2 LRP: 60.16-60.80

Frequency (GHz)	Measurement Distance (m)	Peak Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
41.672	0.5	-70.77	23	-34.95
EIRP (W)	Specification Distance (m)	Power Density (W/m^2)	Power Density (pW/cm^2)	Limit (pW/cm^2)
3.19746E-07	3	2.83E-09	2.82718	90.00

Note: The peak density is less than the average limit.

Test Plan: Channel 2 MRP: 60.48

Frequency (GHz)	Measurement Distance (m)	Peak Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
40.27	0.5	-66.41	23	-30.89
EIRP (W)	Specification Distance (m)	Power Density (W/m^2)	Power Density (pW/cm^2)	Limit (pW/cm^2)
8.14854E-07	3	7.20E-09	7.20490	90.00

Note: The peak density is less than the average limit.

Test Plan: Channel 2 HRP: 60.48

Frequency (GHz)	Measurement Distance (m)	Peak Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
40.54	0.5	-56.81	23	-21.23
EIRP (W)	Specification Distance (m)	Power Density (W/m^2)	Power Density (pW/cm^2)	Limit (pW/cm^2)
7.53154E-06	3	6.66E-08	66.59352	90.00

Note: The peak density is less than the average limit.



Test Plan: Channel 3 LRP: 62.32-62.96

Frequency (GHz)	Measurement Distance (m)	Peak Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
42.189	0.5	-72.90	23	-36.97
EIRP (W)	Specification Distance (m)	Power Density (W/m^2)	Power Density (pW/cm^2)	Limit (pW/cm^2)
2.00685E-07	3	1.77E-09	1.77445	90.00

Note: The peak density is less than the average limit.

Test Plan: Channel 3 MRP: 62.64

Frequency (GHz)	Measurement Distance (m)	Peak Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
41.74	0.5	-68.66	23	-32.83
EIRP (W)	Specification Distance (m)	Power Density (W/m^2)	Power Density (pW/cm^2)	Limit (pW/cm^2)
5.2146E-07	3	4.61E-09	4.61073	90.00

Note: The peak density is less than the average limit.

Test Plan: Channel 3 HRP: 62.64

Frequency (GHz)	Measurement Distance (m)	Peak Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
42.0418	0.5	-57.68	23	-21.79
EIRP (W)	Specification Distance (m)	Power Density (W/m^2)	Power Density (pW/cm^2)	Limit (pW/cm^2)
6.62947E-06	3	5.86E-08	58.61747	90.00

Note: The peak density is less than the average limit.

Measurement uncertainty: 4.4335 dB

3.6 Frequency Stability

3.6.1 Limit of Frequency Stability

Frequency Stability	Limit
Refer as FCC 15.255(f)	within the frequency bands

Note: These measurements shall also be performed at normal and extreme test conditions.


3.6.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.6.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2009, clauses 6.8 and 7.8.7.

3.6.4 Test Setup

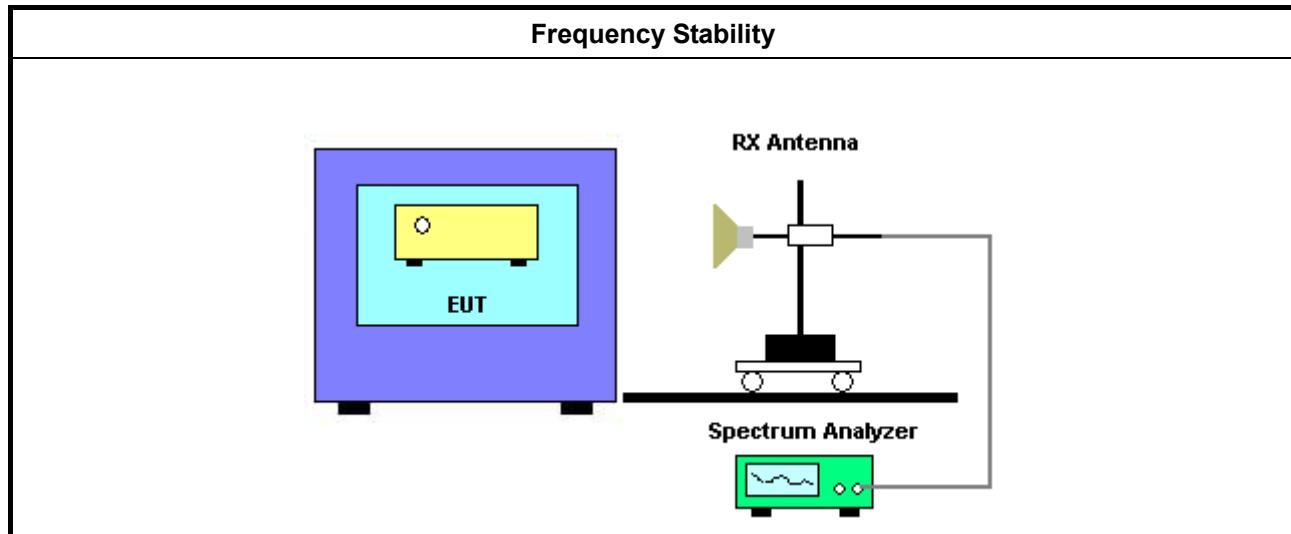



3.6.5 Test Result of Frequency Stability

Test Conditions	see ANSI C63.10, clause 5.11
Test Setup	see ANSI C63.10, clauses 6.8 and 7.8.7
NOTE: If equipment having different channel plan and nominal channel bandwidth modes (see test report clause 1.1.1), the measurements are uninfluenced by different channel plan and nominal channel bandwidth modes, may not need to be repeated for all modes.	

3.6.5.1 Frequency Stability with Respect to Ambient Temperature

Frequency Stability with Respect to Ambient Temperature			
Temp	24°C	Humidity	64%
Test Engineer	Sean Ku	Test Date	Jun. 19, 2013
Test Results			
Test Temperature (°C)	Measured Frequency (MHz)	Delta Frequency (kHz)	Limit (±kHz)
-20	60480.062	62	within band
-10	60480.066	66	within band
0	60480.078	-66	within band
10	60480.134	-10	within band
20	60480.144	Reference	within band
30	60480.156	12	within band
40	60480.178	34	within band
50	60480.199	43	within band
Measurement uncertainty:	4.4335 dB		
NOTE:			
1. For the applicable limit, see FCC 15.255(f).			
2. The EUT is intended for indoor use only with a manufacturer's specified temperature range of 0 to °C.			



3.6.5.2 Frequency Stability When Varying Supply Voltage

Frequency Stability When Varying Supply Voltage			
Temp	24°C	Humidity	64%
Test Engineer	Sean Ku	Test Date	Jun. 19, 2013
Test Results			
Test Voltage: (Vdc)	Measured Frequency (MHz)	Delta Frequency (kHz)	Limit (±kHz)
4.25	60480.145	12	within band
5	60480.133	Reference	within band
5.75	60480.123	-10	within band
Measurement uncertainty: 4.4335 dB			
NOTE: For the applicable limit, see FCC 15.255(f).			

3.7 Publicly-accessible Coordination Channel

3.7.1 Limit of Publicly-accessible Coordination Channel

Frequency Range	Limit
57 GHz-57.05 GHz	No emissions appear in the range 57-57.05 GHz

NOTE: For the applicable limit, see FCC 15.255(d)


3.7.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.7.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2009, clauses 6.3, 6.4, 6.5, 6.6 and 7.8.6.

3.7.4 Test Setup

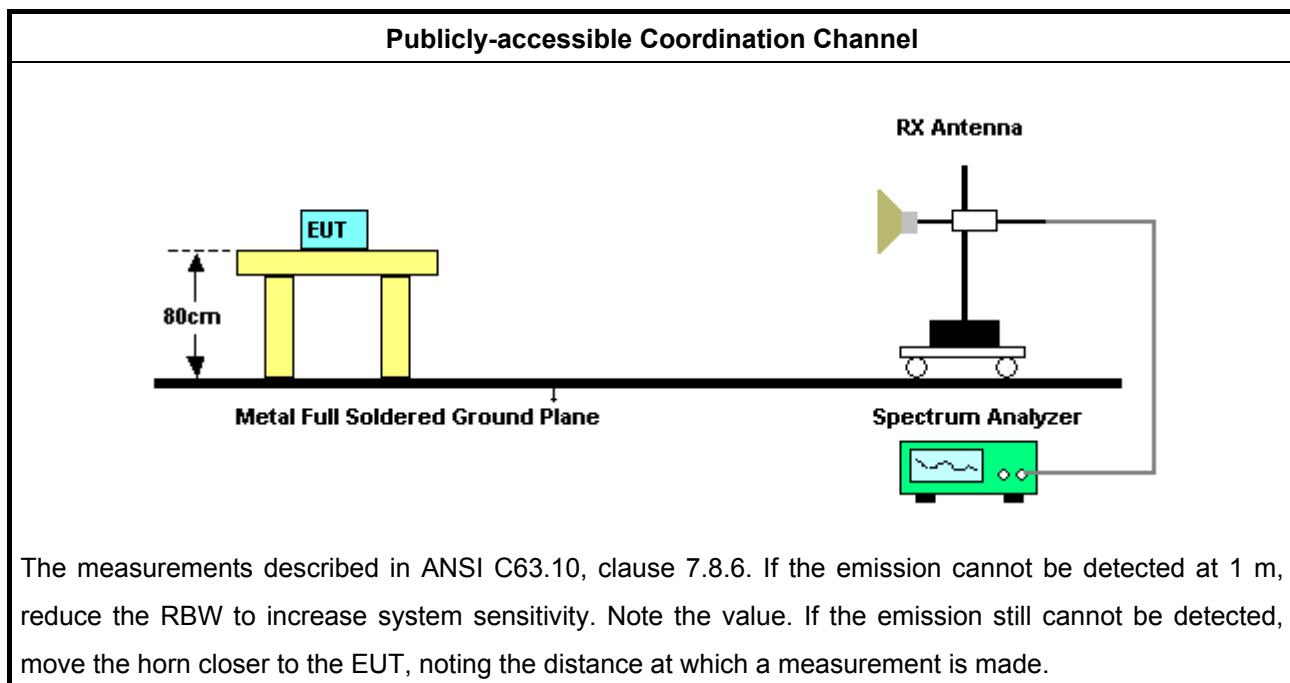

3.7.5 Test Result of Publicly-accessible Coordination Channel

Test Conditions	see ANSI C63.10, clause 5.11
Test Setup	see ANSI C63.10, clauses 6.3, 6.4, 6.5, 6.6 and 7.8.6
NOTE: If equipment having different channel plan and nominal channel bandwidth modes (see test report clause 1.1.1), the measurements are uninfluenced by different channel plan and nominal channel bandwidth modes, may not need to be repeated for all modes.	



3.7.5.1.1 Radiated Testing

Temp	24°C		Humidity	64%	
Test Engineer	Sean Ku		Test Distance	0.5 m	
Test Range	57 GHz-57.05 GHz		Test Date	Jun. 19, 2013	
Test Results					
Test Range	Emission Frequency (MHz)	Emission Observed (dBm)	Limit (dBm)	Margin (dB)	Remark
57 GHz-57.05 GHz	N/F	N/F	-9.91	N/F	-
Measurement uncertainty: 4.4335 dB					
NOTE 1: "N/F" means Nothing Found (No spurious emissions were detected.)					



3.8 Operation Restriction and Group Installation

3.8.1 Limit of Operation Restriction and Group Installation

Item	Limit
Operation Restriction	<p>Operation is not permitted for the following products:</p> <ul style="list-style-type: none">♦ Equipment used on aircraft or satellites. (Refer as FCC 15.255 (a))♦ Field disturbance sensors, including vehicle radar systems, unless the field disturbance sensors are employed for fixed operation. (Refer as FCC 15.255 (a))
Group Installation	<p>Operation is not permitted for the following products:</p> <ul style="list-style-type: none">♦ External phase-locking (Refer as FCC 15.255 (h))

3.8.2 Result of Operation Restriction

Manufacturer declares that EUT will not be used on aircraft or satellites. Then user manual will include a statement to caution EUT is not permitted for used on aircraft or satellites. EUT is a wireless video area network (WVAN) for the connection of consumer electronic (CE) audio and video devices.

3.8.3 Result of Group Installation

The frequency, amplitude and phase of the transmit signal are set within the EUT. There are no external phase-locking inputs or any other means of combining two or more units together to realize a beam-forming array.



3.9 Transmitter Identification

3.9.1 Limit of Transmitter Identification

Item	Limit
Transmitter Identification	Indoor use and transmitter emanate directed outside the building and peak power $\geq 0.1\text{mW}$ (EIRP) or 3nW/cm^2 , transmitter identification data block must provide the following fields: FCC ID, Serial Number, information at least 24 bytes data

NOTE: For the applicable limit, see FCC 15.255(i)

3.9.2 Result of Transmitter Identification

EUT's application is the WirelessHD targets the wireless video area network (WVAN). All units of the WVAN are for indoor operation only. There are no outdoor units therefore no transmissions are directed outside the building. EUT is not applicable for transmitter identification.



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Oct. 23, 2012	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 26, 2012	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9kHz ~ 30MHz	Jun. 22, 2012	Conduction (CO01-CB)
Impulsbegrenzer Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz~30MHz	Feb. 21, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 04, 2012	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	-	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Apr. 16, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Jul. 31, 2012	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9KHz~40GHz	Nov. 16, 2012	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Apr. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Oct. 08, 2012	TH01-CB
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 04, 2013	TH01-CB
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 19, 2012	TH01-CB
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 19, 2012	TH01-CB
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 19, 2012	TH01-CB
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 19, 2012	TH01-CB
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 19, 2012	TH01-CB
Mixer	OML	M19HW/A	U91113-1	40 ~ 60 GHz	Mar. 23, 2011**	TH01-CB
Mixer	OML	M15HW/A	V91113-1	50 ~ 75 GHz	Mar. 23, 2011**	TH01-CB
Diplexer	OML	DPL313B	N/A	40~200GHz	N.C.R	TH01-CB
Mixer	OML	M12HW/A	E91113-1	60 ~ 90 GHz	Mar. 23, 2011**	TH01-CB
Mixer	OML	M08HW/A	F91113-1	90 ~ 140 GHz	Mar. 23, 2011**	TH01-CB
Mixer	OML	M05HW/A	G91113-1	140 ~ 220 GHz	N.C.R	TH01-CB
Standard Horn Antenna	Custom Microwave	HO19R	U91113-A	40 ~ 60 GHz	N.C.R	TH01-CB
Standard Horn Antenna	Custom Microwave	HO15R	V91113-A	50 ~ 75 GHz	N.C.R	TH01-CB
Standard Horn Antenna	Custom Microwave	HO12R	E91113-A	60 ~ 90 GHz	N.C.R	TH01-CB
Standard Horn Antenna	Custom Microwave	HO08R	F91113-A	90 ~ 140 GHz	N.C.R	TH01-CB
Standard Horn Antenna	Custom Microwave	HO05R	G91113-A	140 ~ 220 GHz	N.C.R	TH01-CB

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

“**” Calibration Interval of instruments listed above is three years.

NCR means Non-Calibration required.