

# DFS TEST REPORT

**FCC ID** : TLZ-XM666  
**Equipment** : IEEE 802.11 a/b/g/n/ac/ax Wireless LAN 1T1R and BLE/802.15.4 Solution Family 12 x 12 LGA Module  
**Brand Name** : AzureWave  
**Model Name** : AW-XM646G-SUR, AW-XM646G-USB, AW-XM646F-SUR, AW-XM646F-USB, AW-XM646C-SUR, AW-XM646C-USB, AW-XM646B-SUR, AW-XM646B-USB  
**Applicant** : AzureWave Technologies, Inc.  
8F., No.94, Baozhong Rd. , Xindian Dist., New Taipei City , Taiwan 231  
**Manufacturer** : AzureWave Technologies, Inc.  
8F., No.94, Baozhong Rd. , Xindian Dist., New Taipei City , Taiwan 231  
**Standard** : 47 CFR FCC Part 15.407

The product was received on Feb. 21, 2025, and testing was started from Mar. 05, 2025 and completed on Mar. 07, 2025. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

*Sportun International Inc. Hsinchu Laboratory*

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



## Table of Contents

<b>History of this test report.....</b>	<b>3</b>
<b>Summary of Test Result.....</b>	<b>4</b>
<b>1 General Description .....</b>	<b>6</b>
1.1 Information.....	6
1.2 Accessories .....	8
1.3 Support Equipment.....	8
1.4 Applicable Standards .....	10
1.5 Testing Location Information.....	10
<b>2 Test Configuration of EUT.....</b>	<b>11</b>
2.1 Test Channel Frequencies Configuration.....	11
2.2 The Worst Case Measurement Configuration.....	11
<b>3 Dynamic Frequency Selection (DFS) Test Result.....</b>	<b>12</b>
3.1 General DFS Information .....	12
3.2 Radar Test Waveform Calibration.....	15
3.3 In-service Monitoring .....	20
<b>4 Test Equipment and Calibration Data .....</b>	<b>25</b>
<b>5 Measurement Uncertainty .....</b>	<b>26</b>
<b>Appendix A. Spot Check Results</b>	
<b>Appendix B. Test Photos</b>	
<b>Photographs of EUT v01</b>	



## History of this test report



## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	FCC KDB 905462 7.8.1	DFS: UNII Detection Bandwidth Measurement	N/A	-
-	FCC KDB 905462 7.8.2.1	DFS: Initial Channel Availability Check Time	N/A	-
-	FCC KDB 905462 7.8.2.2	DFS: Radar Burst at the Beginning of the Channel Availability Check Time	N/A	-
-	FCC KDB 905462 7.8.2.3	DFS: Radar Burst at the End of the Channel Availability Check Time	N/A	-
3.3	FCC KDB 905462 7.8.3	DFS: In-Service Monitoring for Channel Move Time (CMT)	PASS	Data Referencing
3.3	FCC KDB 905462 7.8.3	DFS: In-Service Monitoring for Channel Closing Transmission Time (CCTT)	PASS	Data Referencing
3.3	FCC KDB 905462 7.8.3	DFS: In-Service Monitoring for Non-Occupancy Period (NOP)	PASS	Data Referencing
-	FCC KDB 905462 7.8.4	DFS: Statistical Performance Check	N/A	-
<p>Note: Since the product is client without radar detection function, only Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period are required to perform.</p> <p>Data Referencing Statement:            This report references test data from the parent device (Original Sporton Report No.: FZ521124, FCC ID: TLZ-XM646).            The variant device (FCC ID: TLZ-XM666) is electrically identical to the parent device for the portions of the circuitry corresponding to the data referencing.            The differences compared to the parent device are as follows:            Increase in maximum output power rating for Bluetooth and thread via software change. The variant has the same components (no depopulation).            The details of spot-check testing are at the discretion of the applicant's engineering judgment. Accordingly, only the following items were spot-checked on the worst-case channel identified in the original report, and all results are included in this report:</p> <ol style="list-style-type: none"> <li>1. In-Service Monitoring for Channel Move Time (CMT)</li> <li>2. n-Service Monitoring for Channel Closing Transmission Time (CCTT)</li> </ol> <p>The applicant takes full responsibility that the test data as referenced in FCC ID: TLZ-XM646 represents compliance with the new FCC ID: TLZ-XM666.</p>				

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: Sam Chen****Report Producer: Vicky Huang**



# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

Specification Items	Description	
<b>Frequency Range</b>	5250 MHz – 5350 MHz 5470 MHz – 5725 MHz	
<b>Power Type</b>	From host system	
<b>Channel Bandwidth</b>	20 MHz operating channel bandwidth	
<b>Operating Mode</b>	<input type="checkbox"/> Master	
	<input type="checkbox"/> Client with radar detection	
	<input checked="" type="checkbox"/> Client without radar detection	
<b>Communication Mode</b>	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
<b>TPC Function</b>	<input checked="" type="checkbox"/> With TPC	<input type="checkbox"/> Without TPC
<b>Weather Band (5600~5650MHz)</b>	<input checked="" type="checkbox"/> With 5600~5650MHz	<input type="checkbox"/> Without 5600~5650MHz
<b>Zero-Wait Function</b>	<input type="checkbox"/> Support	<input checked="" type="checkbox"/> Not Support
<b>Channel Puncturing Function</b>	<input type="checkbox"/> Supported Static Puncturing	
	<input type="checkbox"/> Supported Dynamic Puncturing (Reduce BW)	
	<input checked="" type="checkbox"/> Unsupported	
<b>Power-on cycle</b>	NA (No Channel Availability Check Function)	
<b>Firmware Number</b>	SDIW610---18.99.5.p43-MM6X18525-(FP99)	
<ul style="list-style-type: none"> <li>11a, HT20 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.</li> <li>VHT20 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.</li> <li>HEW20 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.</li> <li>EUT employ a TPC mechanism and TPC have the capability to operate at least 6 dB below highest RF output power.</li> </ul>		

Note: The above information was declared by manufacturer.

### TPC Power Result

Mode	Min Power (dBm)	Max Power (dBm)	Min EIRP (dBm)	Max EIRP (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-
5.25-5.35GHz	16.32	22.32	21.32	27.32
5.47-5.725GHz	15.28	21.28	20.28	26.28
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-
5.25-5.35GHz	16.19	22.19	21.19	27.19
5.47-5.725GHz	15.18	21.18	20.18	26.18

Note: The manufacturer declared that TPC is applied to this equipment. The test result of TPC is equal to RF output power minus 6dBm which is recorded as a reference for the manufacturer.



### 1.1.2 Antenna Information

Ant.	Port	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	
						WLAN 2.4GHz, Bluetooth and Thread	WLAN 5GHz
1	1	ARISTOTLE	RFA-27-JP326MHF4C198	PIFA Antenna	I-PEX	3.5	5

Note 1: The above information was declared by manufacturer.

Note 2: **For 2.4GHz function:**

**For IEEE 802.11 b/g/n/VHT/ax (1TX/1RX):**

Only Port 1 can be used as transmitting/receiving antenna.

**For 5GHz function:**

**For IEEE 802.11a/n/ac/ax (1TX/1RX):**

Only Port 1 can be used as transmitting/receiving antenna.

**For Bluetooth/Thread function (1TX/1RX):**

Only Port 1 can be used as transmitting/receiving antenna.

### 1.1.3 DFS Band Carrier Frequencies

There is one bandwidth system.

For 20MHz bandwidth systems, use Channel 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136,

140.

Frequency Band	Channel No.	Frequency
5250~5350 MHz Band 2	50	5250 MHz
	56	5280 MHz
	60	5300 MHz
	64	5320 MHz
5470~5725 MHz Band 3	100	5500 MHz
	104	5520 MHz
	108	5540 MHz
	112	5560 MHz
	116	5580 MHz
	120	5600 MHz
	124	5620 MHz
	128	5640 MHz
	132	5660 MHz
	136	5680 MHz
	140	5700 MHz



### 1.1.4 Table for Multiple Listing

The difference for each model is shown as below:

EUT	Model Name	WLAN 2.4G	WLAN 5G	Bluetooth	802.15.4	Interface
1	AW-XM646G-SUR	V	V	V	V	SUR
2	AW-XM646G-USB	V	V	V	V	USB
-	AW-XM646F-SUR	V	V	V	X	SUR
-	AW-XM646F-USB	V	V	V	X	USB
-	AW-XM646C-SUR	V	X	V	V	SUR
-	AW-XM646C-USB	V	X	V	V	USB
-	AW-XM646B-SUR	V	X	V	X	SUR
-	AW-XM646B-USB	V	X	V	X	USB
<b>Description</b>						
In addition to the differences mentioned above, there are differences in marketing strategy.						

Note 1: From the above EUT, EUT 1 is selected as representative model for the test and its data was recorded in this report.

Note 2: The above information was declared by manufacturer.

## 1.2 Accessories

N/A

## 1.3 Support Equipment

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	Notebook	DELL	E4300	N/A
C	Wifi/Bluetooth Fixture	AzureWave	2460-i6	N/A
D	WLAN AP	ASUS	RT-AX88U	MSQ-RTAXHP00
E	EUT Fixture	AzureWave	2646-i4	N/A

**For Spot Check:**

<b>Support Equipment</b>				
<b>No.</b>	<b>Equipment</b>	<b>Brand Name</b>	<b>Model Name</b>	<b>FCC ID</b>
A	Notebook	DELL	E4300	N/A
B	Notebook	DELL	E4300	N/A
C	EUT Fixture	AzureWave	2646-i4	N/A
D	Wifi/Bluetooth Fixture	AzureWave	2460-i6	N/A
E	WLAN AP	ASUS	RT-AX88U	MSQ-RTAXHP00



## 1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.407
- ♦ FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

## 1.5 Testing Location Information

Testing Location Information				
Test Lab. : Sporton International Inc. Hsinchu Laboratory				
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)	TEL: 886-3-656-9065	FAX: 886-3-656-9085	
			Test site Designation No. TW3787 with FCC.	
			Conformity Assessment Body Identifier (CABID) TW3787 with ISED.	

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
DFS	DF02-CB	Kevin Huang	22.1~23.3 / 58~62	Mar. 05, 2025~ Mar. 07, 2025

### For Spot Check:

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
DFS	DF02-CB	Kevin Huang	21.2~22 / 61~62	May 27, 2025



## 2 Test Configuration of EUT

### 2.1 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
IEEE Std.	Test Channel Freq. (MHz)
802.11ax (HEW20)	5300 MHz

### 2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	Dynamic Frequency Selection (DFS)
Test Condition	Conducted measurement at transmit chains The EUT shall be configured to operate at the highest transmitter output power setting. If more than one antenna assembly is intended for this power setting, the gain of the antenna assembly with the lowest gain shall be used.
Modulation Mode	802.11ax (HEW20)
1	EUT 1



### 3 Dynamic Frequency Selection (DFS) Test Result

#### 3.1 General DFS Information

##### 3.1.1 DFS Parameters

Table D.1: DFS requirement values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds (Note 1).
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second periods. (Notes 1 and 2).
U-NII Detection Bandwidth	Minimum 100% of the 99% power bandwidth (Note 3).

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate Channel changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

Table D.2: Interference threshold values

Maximum Transmit Power	Value (see note)
EIRP $\geq$ 200 mW	-64 dBm
EIRP < 200 mW and PSD < 10dBm/MHz	-62 dBm
EIRP < 200 mW and PSD $\geq$ 10dBm/MHz	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911D01.



### 3.1.2 Applicability of DFS Requirements Prior to Use of a Channel

Requirement	DFS Operational mode		
	Master	Client without radar detection	Client with radar detection
<i>Non-Occupancy Period</i>	Yes	Not required	Yes
<i>DFS Detection Threshold</i>	Yes	Not required	Yes
<i>Channel Availability Check Time</i>	Yes	Not required	Not required
<i>U-NII Detection Bandwidth</i>	Yes	Not required	Yes

### 3.1.3 Applicability of DFS Requirements during Normal Operation

Requirement	DFS Operational mode		
	Master	Client without radar detection	Client with radar detection
<i>DFS Detection Threshold</i>	Yes	Not required	Yes
<i>Channel Closing Transmission Time</i>	Yes	Yes	Yes
<i>Channel Move Time</i>	Yes	Yes	Yes
<i>U-NII Detection Bandwidth</i>	Yes	Not required	Yes


Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
<b>Note:</b> Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		



### 3.1.4 Channel Loading/Data Streaming

<input type="checkbox"/>	The data file (MPEG-4) has been transmitting in a streaming mode.
<input checked="" type="checkbox"/>	Software to ping the client is permitted to simulate data transfer with random ping intervals.
<input checked="" type="checkbox"/>	Minimum channel loading of approximately 17%.
<input type="checkbox"/>	Unicast protocol has been used.

Parent Device / FCC ID: TLZ-XM646

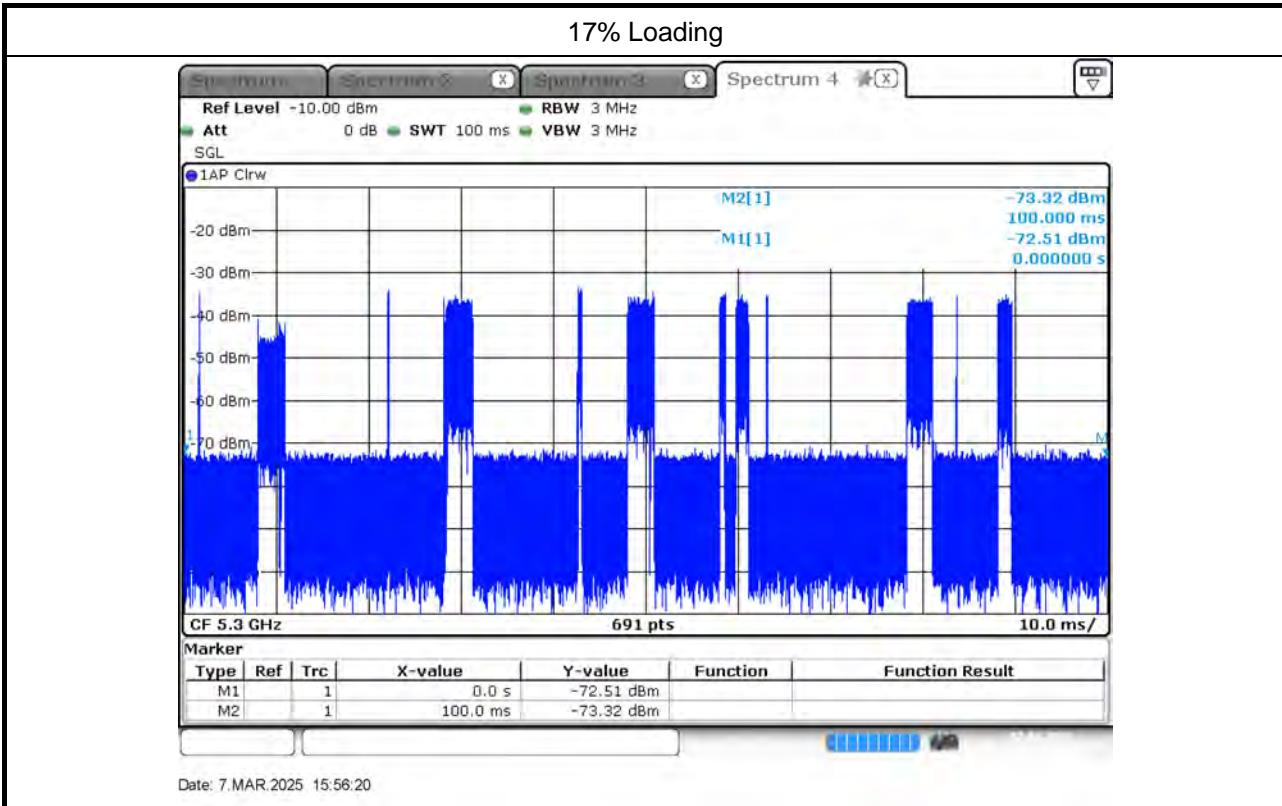



## 3.2 Radar Test Waveform Calibration

### 3.2.1 Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	See Note 1	See Note 1
1A	1	15 unique PRI in KDB 905462 D02 Table 5a	$Roundup\left\{\left(\frac{1}{360}\right) \times \left(\frac{19 \times 10^6}{PRI}\right)\right\}$	60%	15
1B	1	15 unique PRI within 518-3066, Excluding 1A PRI		60%	15
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

**Note 1:** Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.

A minimum of 30 unique waveforms are required for each of the short pulse radar types 1 through 4. If more than 30 waveforms are used for short pulse radar types 1 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

### 3.2.2 Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Each waveform is defined as follows:

- The transmission period for the Long Pulse Radar test signal is 12 seconds.
- There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst Count.
- Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- Each pulse has a linear FM chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a transmission period will have the same chirp width. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and



ends at 5310 MHz.

- If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst Count. Each interval is of length  $(12,000,000 / \text{Burst Count})$  microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and  $[(12,000,000 / \text{Burst Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$  microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

### 3.2.3 Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	0.333	300	70%	30

For the Frequency Hopping Radar Type, the same Burst parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group.


### 3.2.4 DFS Threshold Level

Parent Device / FCC ID: TLZ-XM646

DFS Threshold Level		
DFS Threshold level: -63 dBm	<input checked="" type="checkbox"/> at the antenna connector	
	<input type="checkbox"/> in front of the antenna	

The Interference Radar Detection Threshold Level is  $-64 \text{ dBm} + 0 \text{ [dBi]} + 1 \text{ dB} = -63 \text{ dBm}$ . That had been taken into account the output power range and antenna gain.

### 3.2.5 Calibration Setup

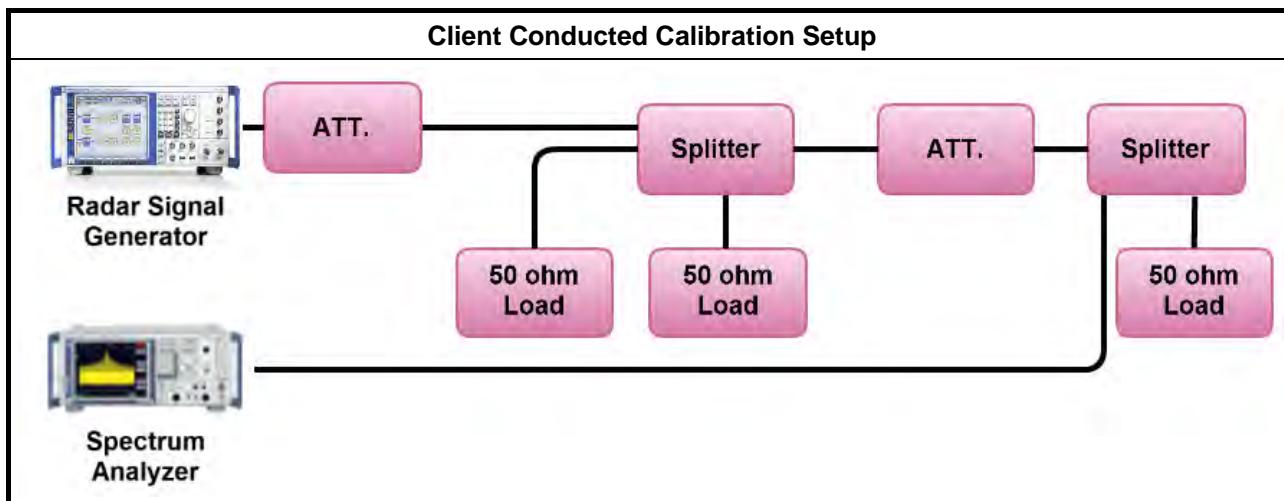


### 3.2.6 Radar Waveform calibration Plot

Parent Device / FCC ID: TLZ-XM646

Test Frequency: 5300 MHz


Radar #0 DFS detection threshold level

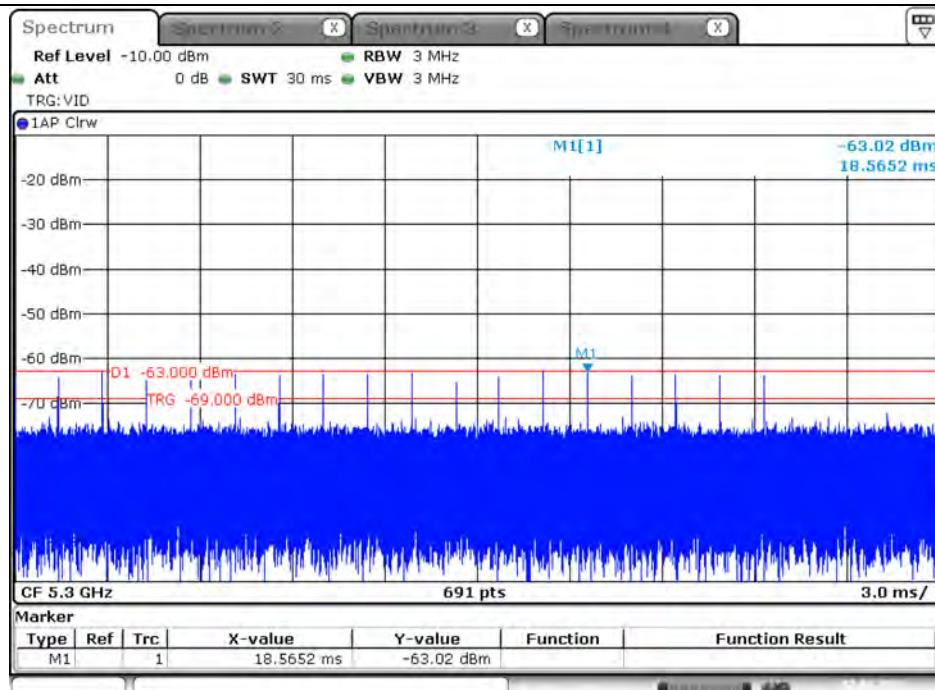

### 3.2.7 Test Setup

A spectrum analyzer is used as a monitor to verify that the EUT has vacated the Channel within the (Channel Closing Transmission Time and Channel Move Time, and does not transmit on a Channel during the Non-Occupancy Period after the detection and Channel move.


Client without Radar Detect Conducted Measurement

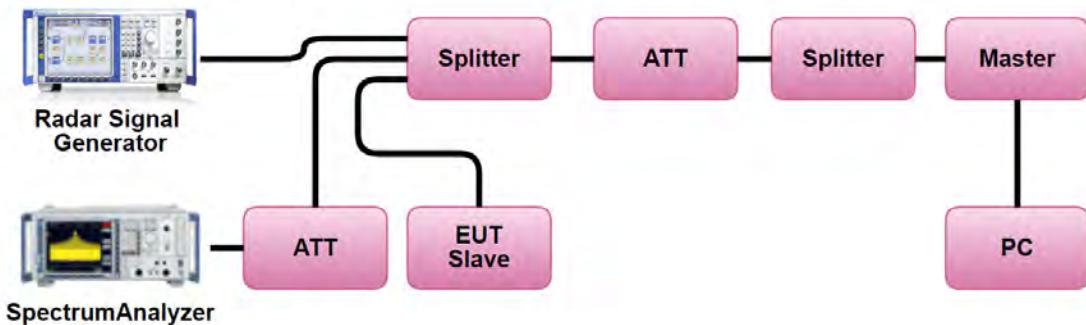




### 3.2.8 Data traffic Plot

Parent Device / FCC ID: TLZ-XM646

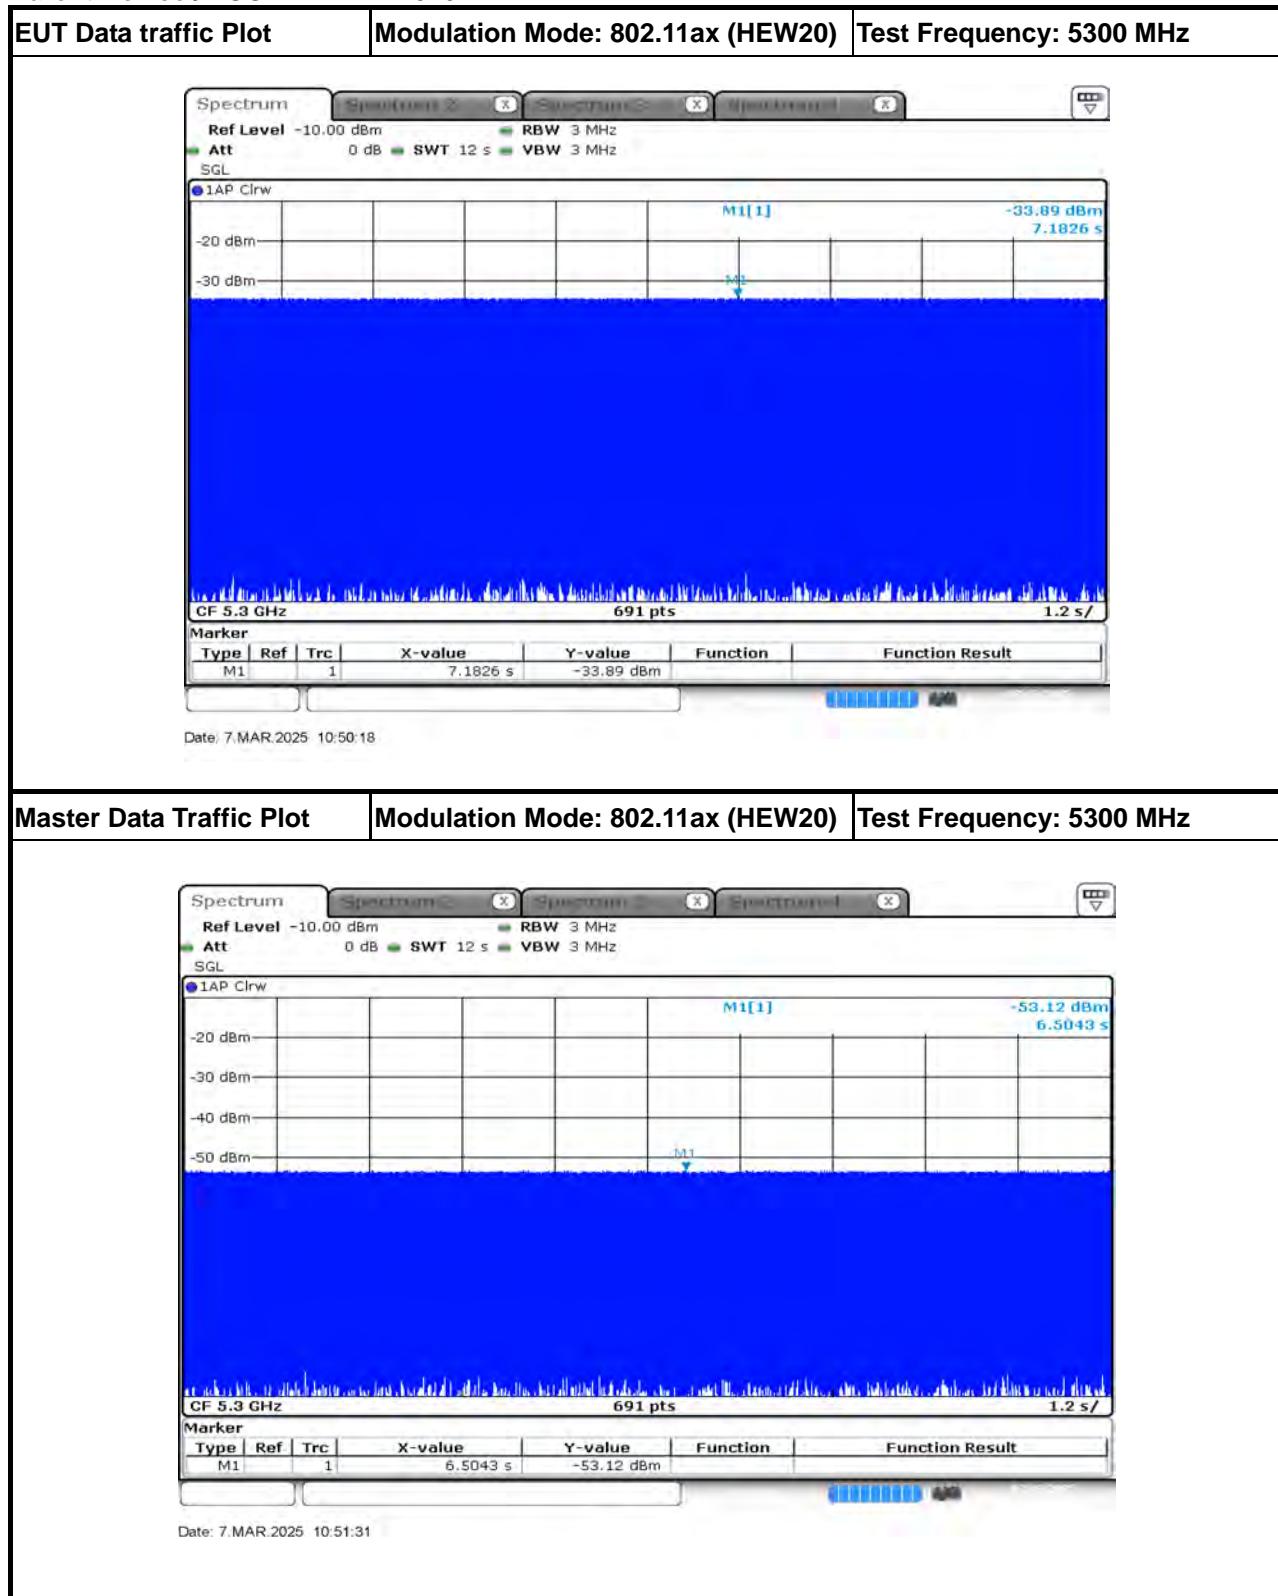

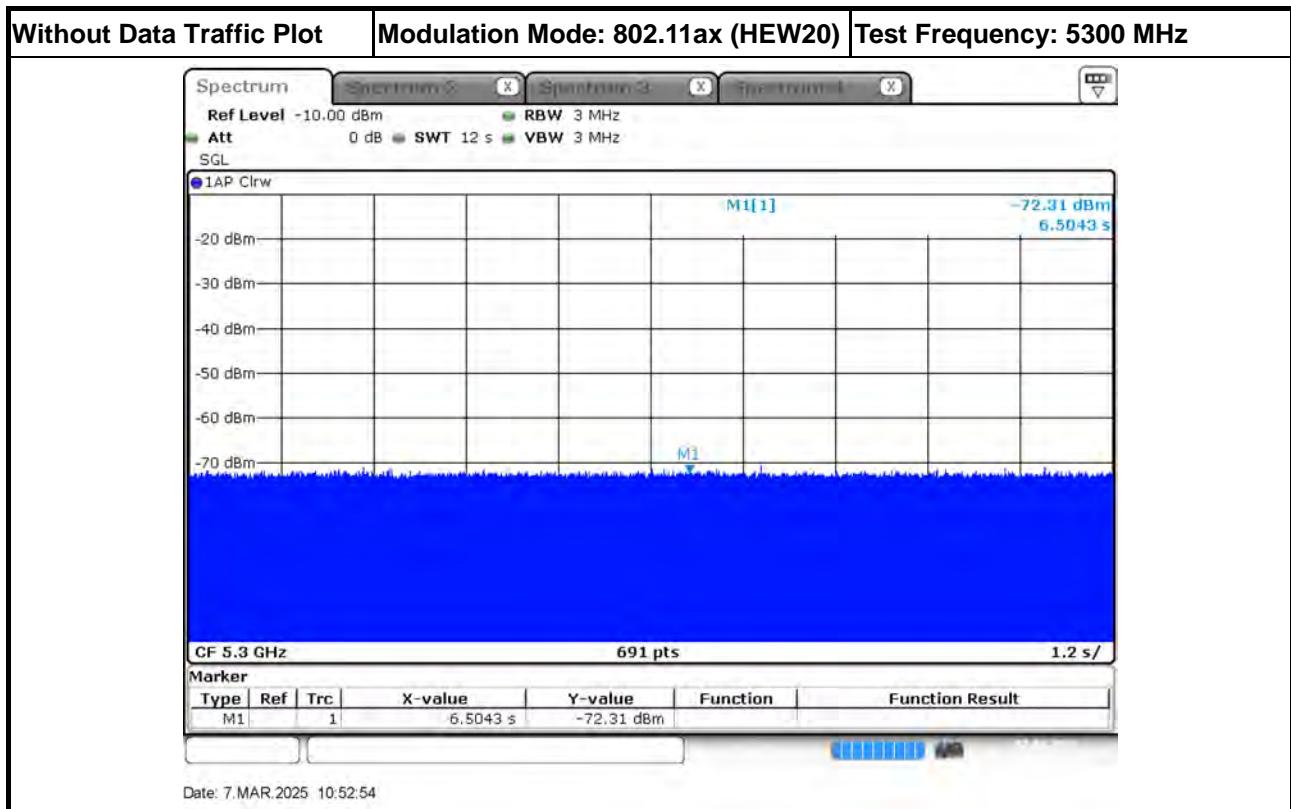



### 3.3 In-service Monitoring

#### 3.3.1 In-service Monitoring Limit

In-service Monitoring Limit	
Channel Move Time	10 sec
Channel Closing Transmission Time	200 ms + an aggregate of 60 ms over remaining 10 sec periods.
Non-occupancy period	Minimum 30 minutes

#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.3.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Verified during In-Service Monitoring; Channel Closing Transmission Time, Channel Move Time. Client Device will associate with the EUT. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Channel Move Time). Compare the Channel Move Time and Channel Closing Transmission Time limits.
<input checked="" type="checkbox"/> Verified during In-Service Monitoring; Channel Closing Transmission Time, Channel Move Time. One 12 sec plot needs to be reported for the Short Pulse Radar Types 0. And zoom-in a 60 ms plot verified channel closing time for the aggregate transmission time starting from 200ms after the end of the radar signal to the completion of the channel move.
<input checked="" type="checkbox"/> Verified during In-Service Monitoring; Non-Occupancy Period. Client Device will associate with the EUT. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Non-Occupancy Period). Compare the Non-Occupancy Period limits.




### 3.3.4 Test Result of Channel Move Time

Parent Device / FCC ID: TLZ-XM646

Modulation Mode: 802.11ax (HEW20)

Parameter	Test Result	Limit
	Type 0	
Test Channel (MHz)	5300 MHz	-
Channel Move Time (sec.)	0.852	< 10s

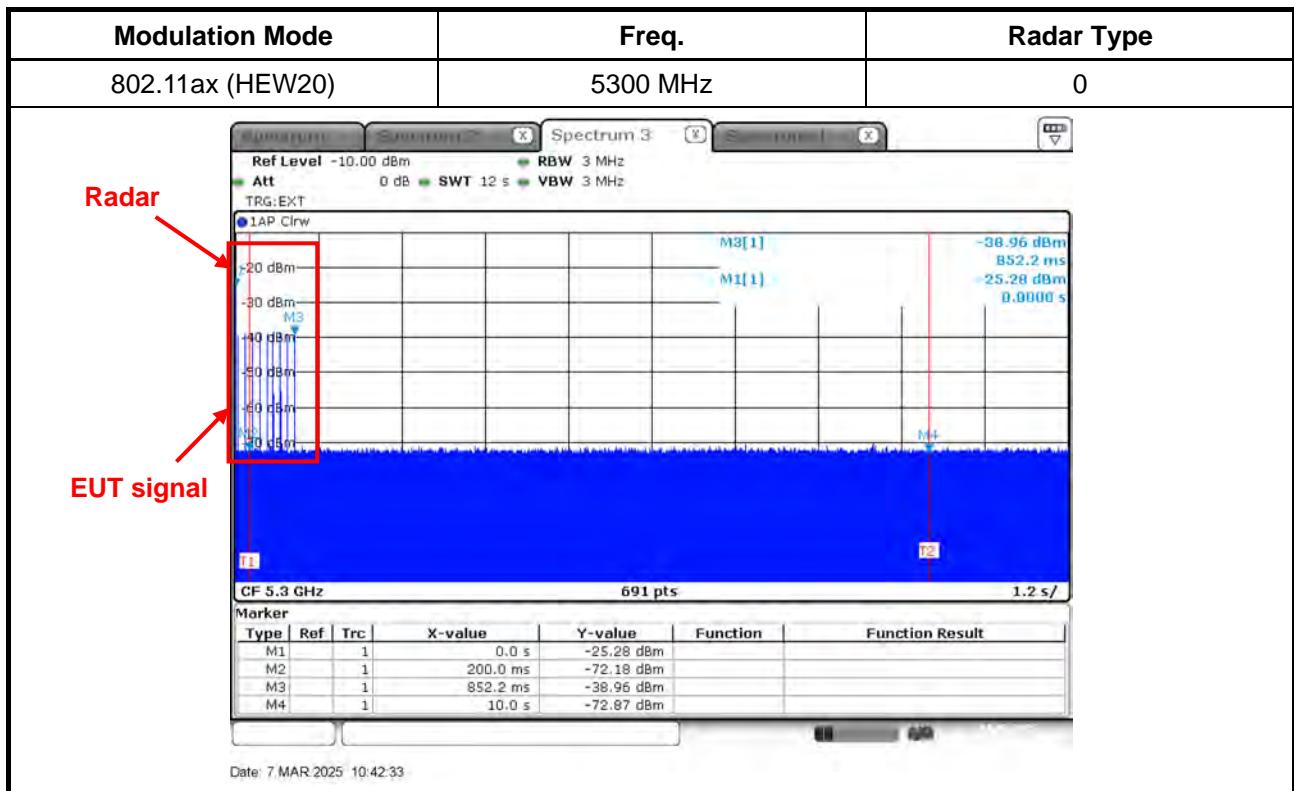



### 3.3.5 Test Result of Channel Closing Transmission Time


Parent Device / FCC ID: TLZ-XM646

Modulation Mode: 802.11ax (HEW20)

Parameter	Test Result	Limit
	Type 0	
Test Channel (MHz)	5300 MHz	-
Channel Closing Transmission Time (ms) (Note)	23.19	< 60ms

Modulation Mode	Freq.	Radar Type
802.11ax (HEW20)	5300 MHz	0

Channel Closing Transmission Time is comprised of 200 ms starting at the beginning of the Channel Move Time plus 60ms additional intermittent control signals

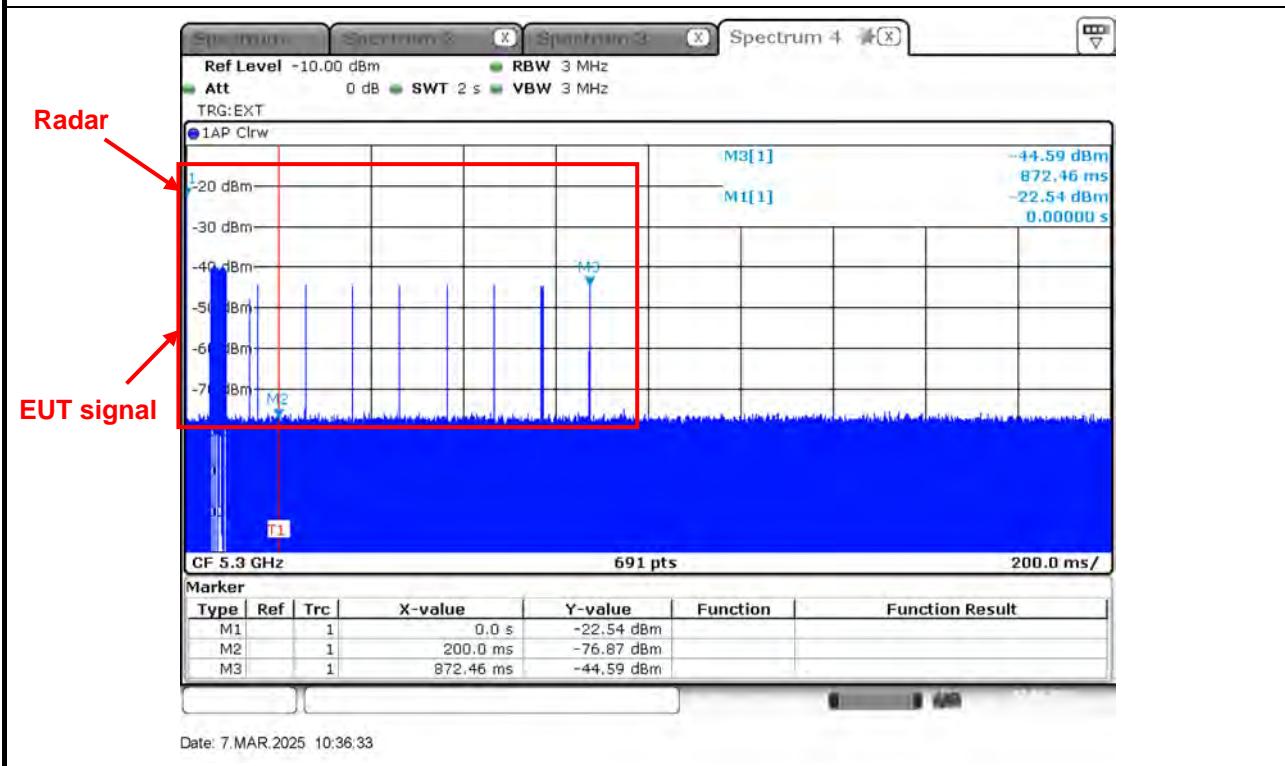

Dwell is the dwell time per spectrum analyzer sampling bin.

S is the sweep time

B is the number of spectrum analyzer sampling bins

C is the intermittent control signals of Channel Closing Transmission Time

N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission

Dwell (2.899 ms) = S (2000 ms) / B (690)

C (23.19 ms) = N (8) X Dwell (2.899 ms)



### 3.3.6 Test Result of Non-Occupancy Period

Parent Device / FCC ID: TLZ-XM646


Modulation Mode: 802.11ax (HEW20)

Parameter	Test Result	Limit
	Type 0	
Test Channel (MHz)	5300 MHz	-
Non-Occupancy Period (min.)	≥30	≥ 30 min

Modulation Mode	Freq.
802.11ax (HEW20)	5300 MHz

#### Non-Occupancy Period


During the 30 minutes observation time, UUT did not make any transmissions on a channel after a radar signal was detected on that channel by either the Channel Availability Check or the In-Service Monitoring.

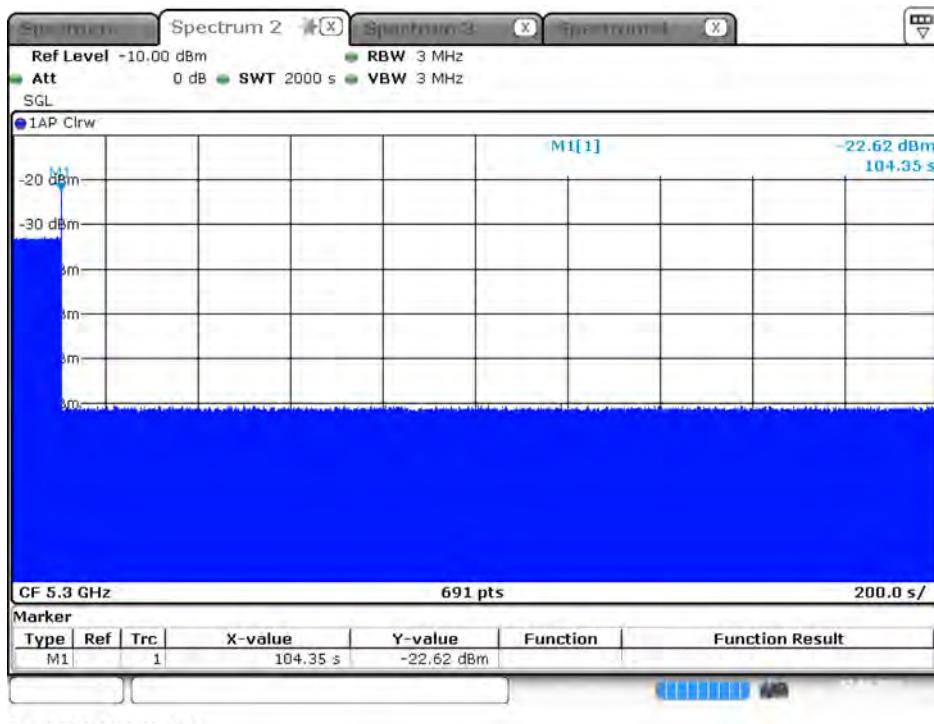

**Non-associated test**

Master was off.

During the 30 minutes observation time, The UUT did not make any transmissions in the DFS band after UUT power up.

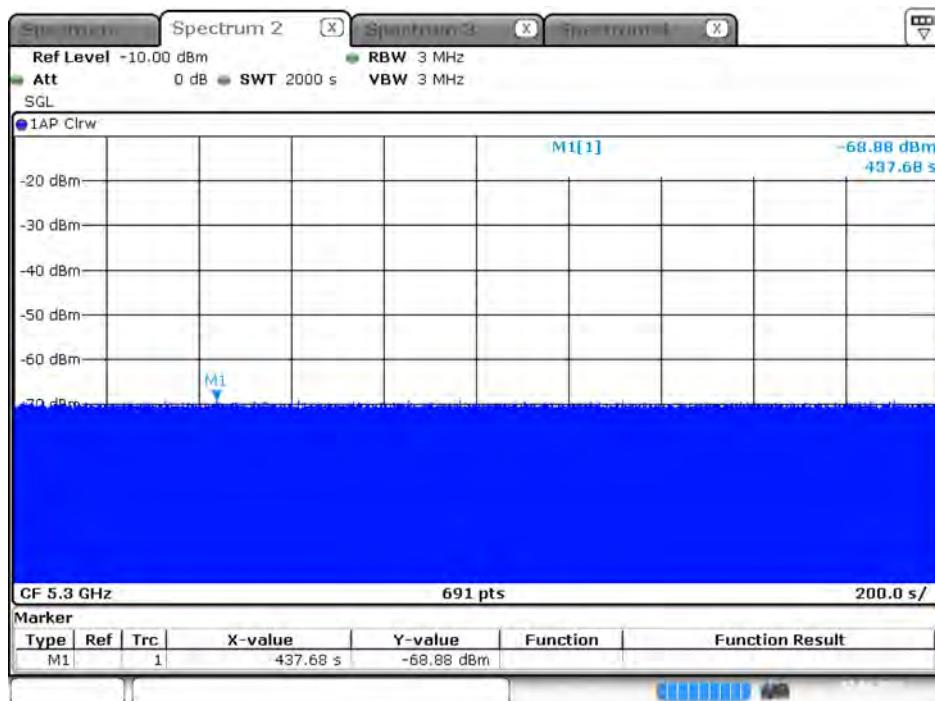

Date: 7.MAR.2025 01:46:42



## 4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101025	9kHz ~ 40GHz	Nov. 08, 2024	Nov. 07, 2025	Conducted (DF02-CB)
Vector Signal generator	R&S	SMU200A	105352	25MHz-6GHz	Aug. 23, 2024	Aug. 22, 2025	Conducted (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -05	1 ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -06	1 ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -07	1 ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -08	1 ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (DF02-CB)
RF Cable-high	Woken	RG402	Cable-60	1~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (DF02-CB)
RF Cable-high	Woken	RG402	Cable-61	1~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (DF02-CB)
RF Cable-high	Woken	RG402	Cable-63	1~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (DF02-CB)
Test Software	SPORTON	DFS Test	V1.01	5.25GHz-5.725GHz	N.C.R.	N.C.R.	Conducted (DF02-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R means Non-Calibration required.




## 5 Measurement Uncertainty

Test Items	Uncertainty	Remark
Conducted Emission	3.1 dB	Confidence levels of 95%

**For WLAN 5GHz: 47 CFR FCC Part 15, Subpart E (Section 15.407) - UNII 2A~2C**
**Channel Loading/Data Streaming**
**Variant Device / FCC ID: TLZ-XM666**

<input type="checkbox"/>	The data file (MPEG-4) has been transmitting in a streaming mode.
<input checked="" type="checkbox"/>	Software to ping the client is permitted to simulate data transfer with random ping intervals.
<input checked="" type="checkbox"/>	Minimum channel loading of approximately 17%.
<input type="checkbox"/>	Unicast protocol has been used.

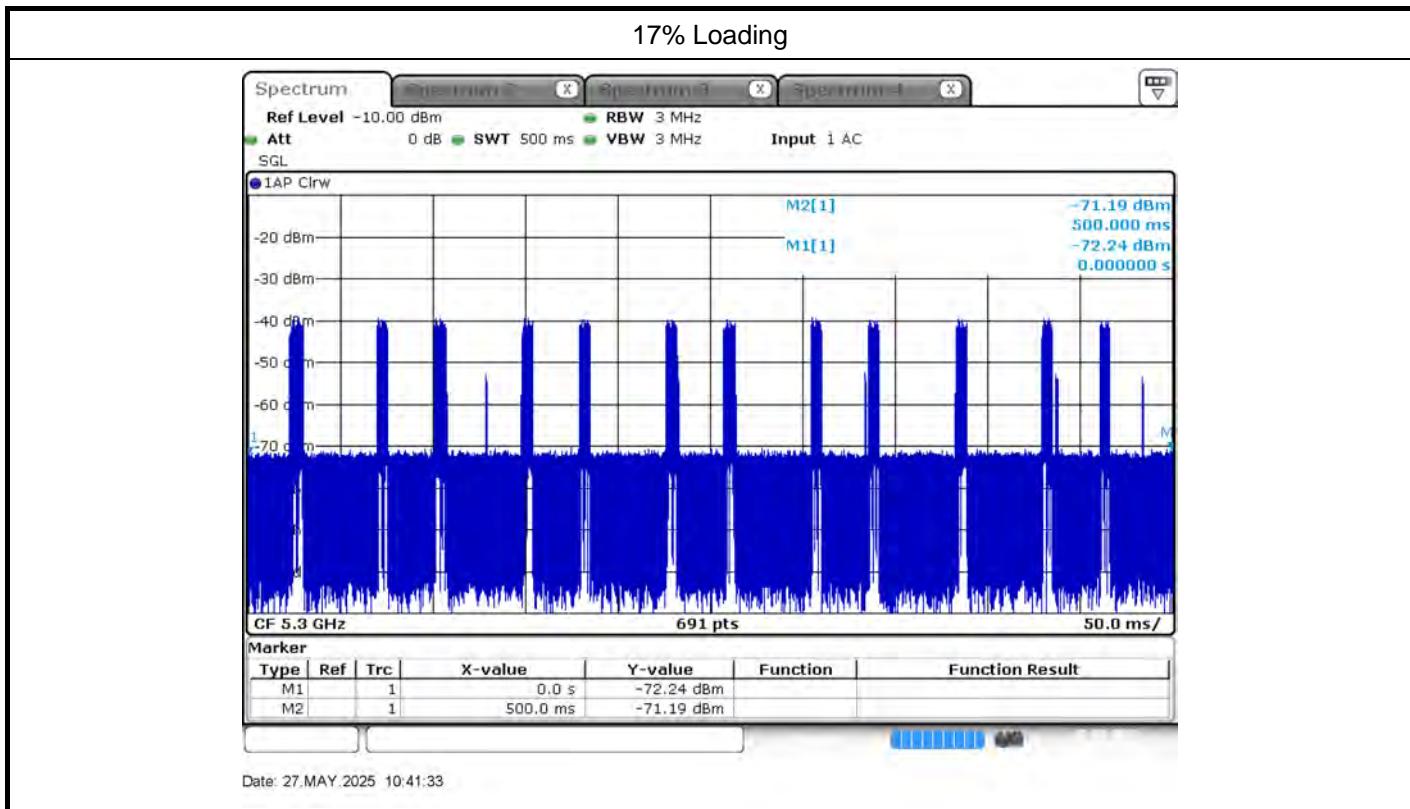
**DFS Threshold Level**
**Variant Device / FCC ID: TLZ-XM666**

<b>DFS Threshold Level</b>		
DFS Threshold level:	-63	dBm
	<input checked="" type="checkbox"/>	at the antenna connector
	<input type="checkbox"/>	in front of the antenna


The Interference Radar Detection Threshold Level is  $-64 \text{ dBm} + 0 \text{ [dBj]} + 1 \text{ dB} = -63 \text{ dBm}$ . That had been taken into account the output power range and antenna gain.

**Radar Waveform calibration Plot**


**Variant Device / FCC ID: TLZ-XM666**


**Test Frequency: 5300 MHz**

**Radar #0 DFS detection threshold level**

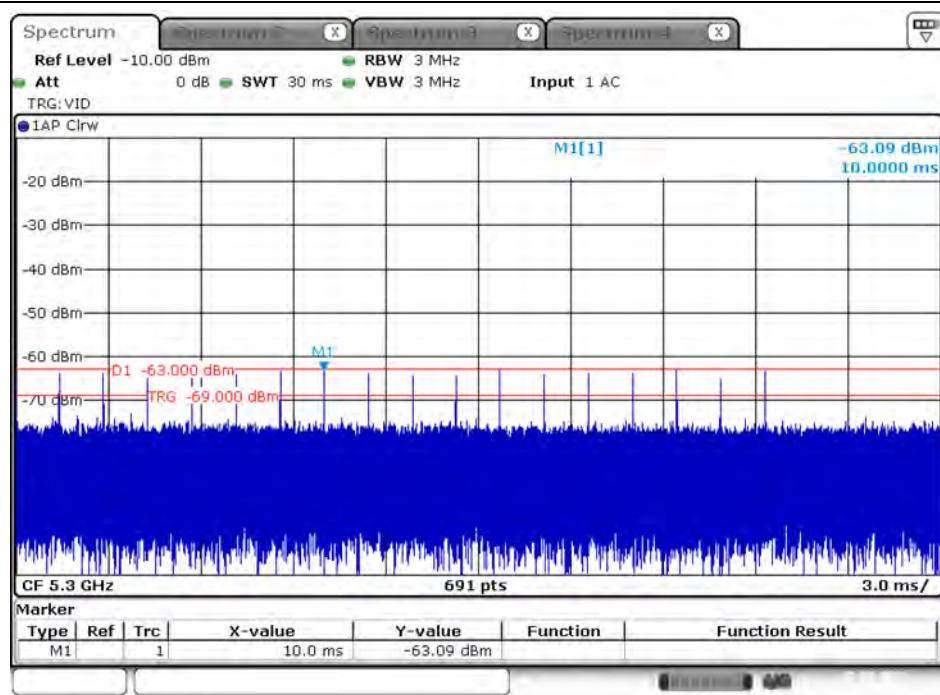


Date: 27.MAY.2025 11:13:59

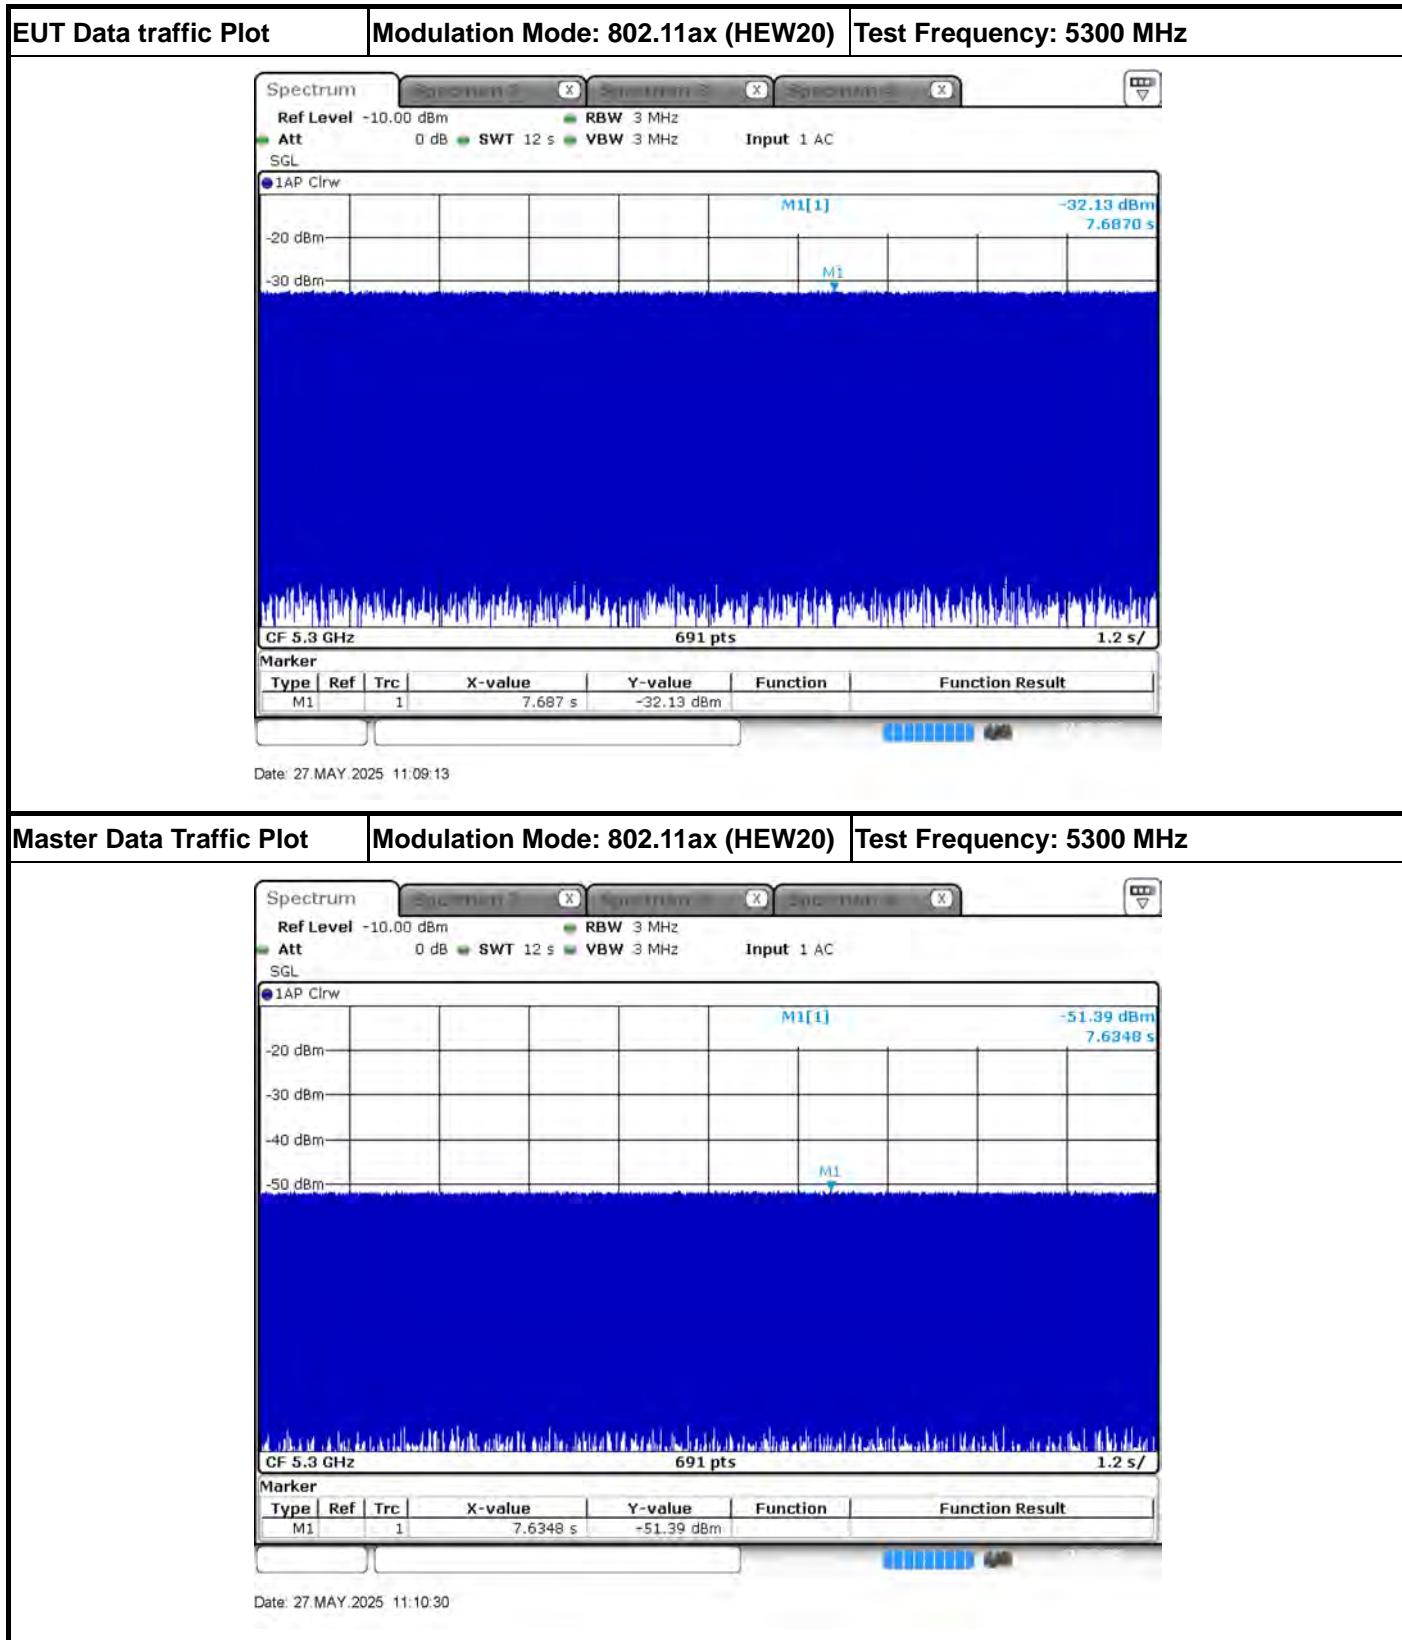**Data traffic Plot**
**Variant Device / FCC ID: TLZ-XM666**

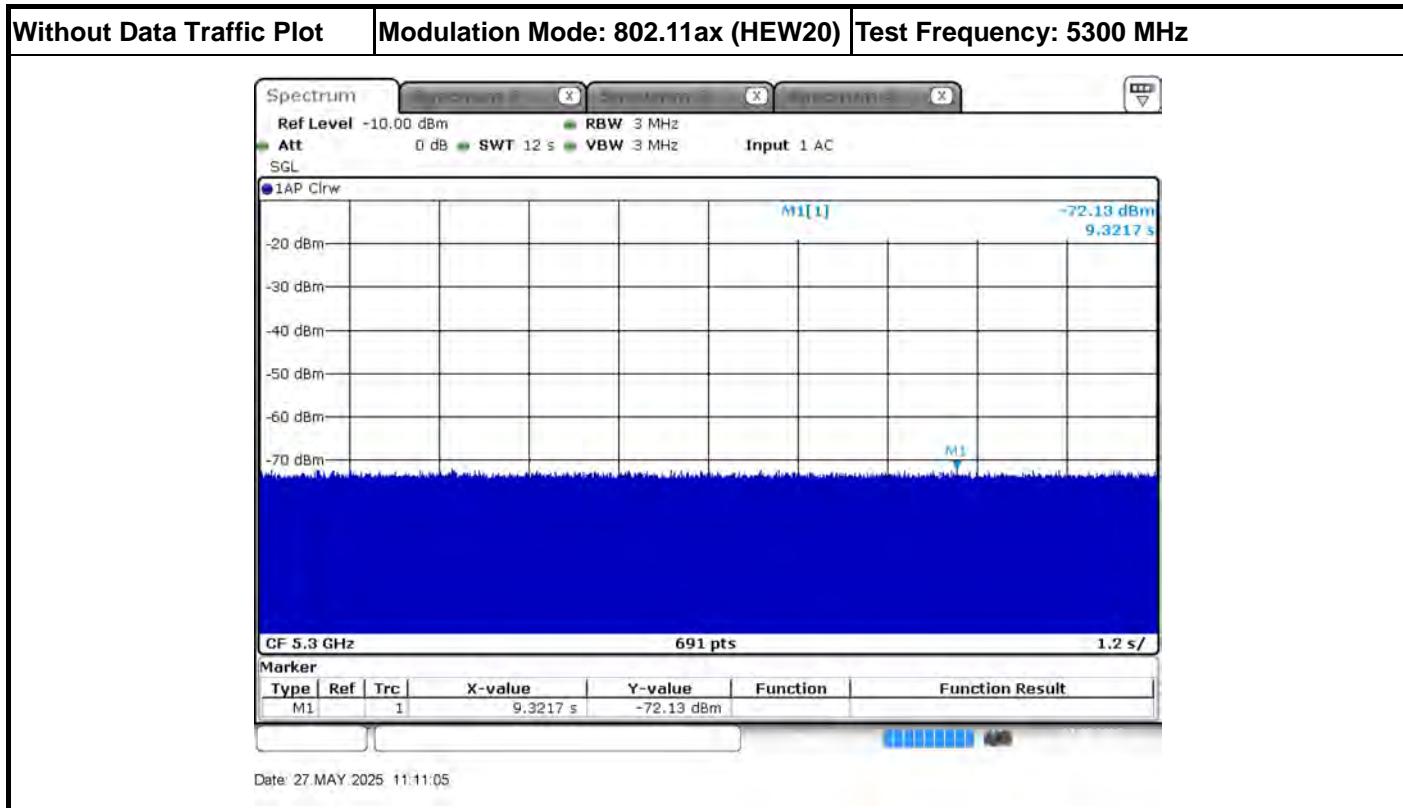


**In-Service Monitoring for Channel Move Time (CMT)**
**Variant Device / FCC ID: TLZ-XM666**
**Modulation Mode: 802.11ax (HEW20)**

Parameter	Test Result	Limit
	Type 0	
Test Channel (MHz)	5300 MHz	-
Channel Move Time (sec.)	0.887	< 10s

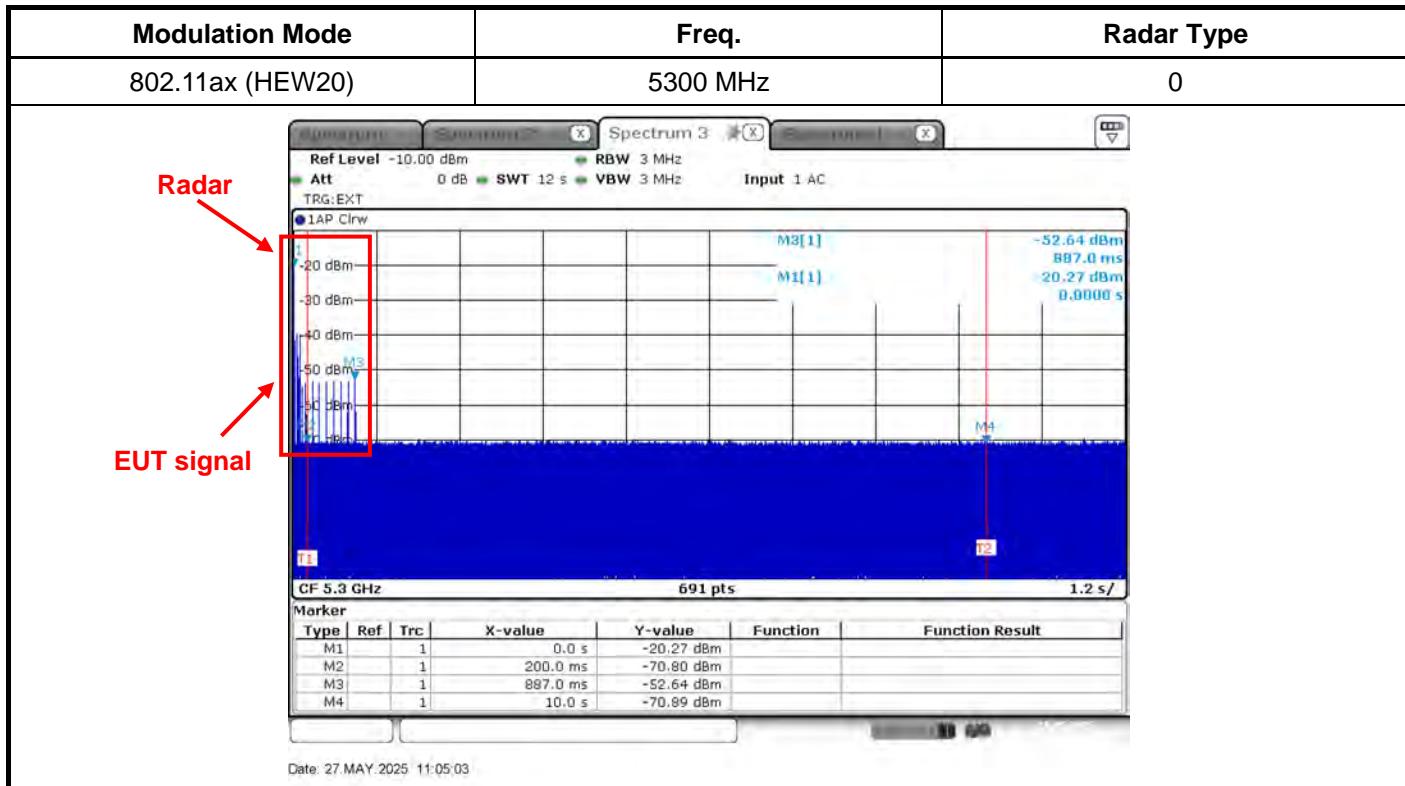


**In-Service Monitoring for Channel Closing Transmission Time (CCTT)**
**Variant Device / FCC ID: TLZ-XM666**
**Modulation Mode: 802.11ax (HEW20)**

Parameter	Test Result		Limit
	Type 0		
Test Channel (MHz)	5300 MHz		-
Channel Closing Transmission Time (ms) (Note)	26.090		< 60ms

Modulation Mode	Freq.	Radar Type
802.11ax (HEW20)	5300 MHz	0

Channel Closing Transmission Time is comprised of 200 ms starting at the beginning of the Channel Move Time plus 60ms additional intermittent control signals

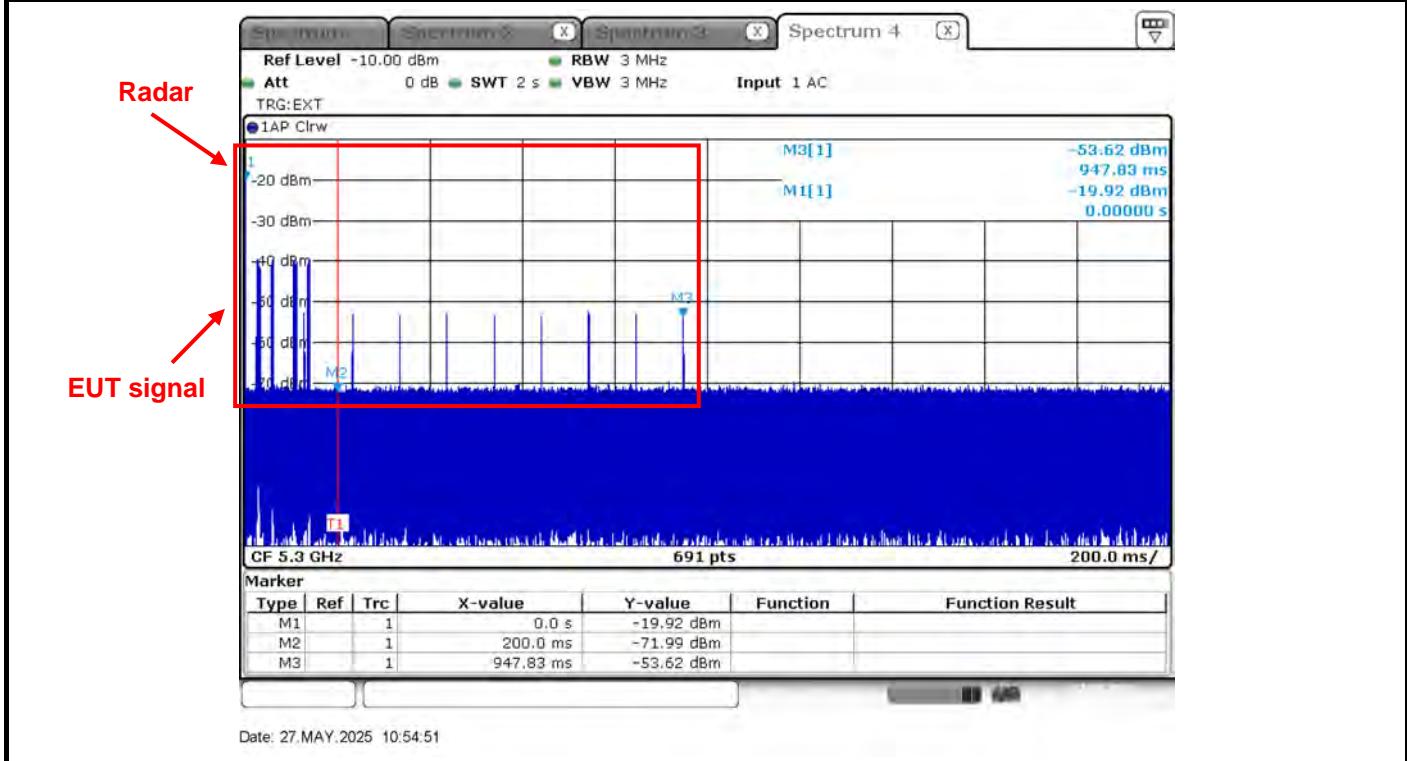
**Dwell** is the dwell time per spectrum analyzer sampling bin.

**S** is the sweep time

**B** is the number of spectrum analyzer sampling bins

**C** is the intermittent control signals of Channel Closing Transmission Time

**N** is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission

**Dwell (2.899 ms)= S (2000 ms) / B (690)**
**C (26.090 ms) = N (9) X Dwell (2.900 ms)**