



RADIO TEST REPORT

FCC ID : TLZ-XMA06
Equipment : IEEE 802.11 2X2 a/b/g/n/ac/ax WiFi 6/6E Wireless LAN + Bluetooth 5.3 LGA Module
Brand Name : AzureWave
Model Name : AW-XMA06-T
Applicant : AzureWave Technologies, Inc.
8F., No.94, Baozhong Rd. , Xindian Dist., New Taipei City , Taiwan 231
Manufacturer : AzureWave Technologies, Inc.
8F., No.94, Baozhong Rd. , Xindian Dist., New Taipei City , Taiwan 231
Standard : 47 CFR FCC Part 15.407

The product was received on Apr. 01, 2025, and testing was started from Apr. 28, 2025 and completed on Aug. 18, 2025. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	9
1.3 Testing Location Information	9
1.4 Measurement Uncertainty	10
2 Test Configuration of EUT.....	11
2.1 Test Channel Mode	11
2.2 The Worst Case Measurement Configuration.....	13
2.3 EUT Operation during Test	14
2.4 Accessories	14
2.5 Support Equipment.....	15
2.6 Test Setup Diagram	16
3 Transmitter Test Result	18
3.1 AC Power-line Conducted Emissions	18
3.2 Emission Bandwidth	20
3.3 Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)	21
3.4 Peak Power Spectral Density (E.I.R.P.)	24
3.5 Unwanted Emissions.....	27
3.6 Contention Based Protocol.....	32
4 Test Equipment and Calibration Data	33
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of Emission Bandwidth	
Appendix C. Test Results of Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)	
Appendix D. Test Results of Peak Power Spectral Density (E.I.R.P.)	
Appendix E. Test Results of Unwanted Emissions	
Appendix F. Test Results of Contention-Based Protocol	
Appendix G. Test Results of Radiated Emission Co-location	
Appendix H. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A12_5 Ver2.0



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)	PASS	-
-	15.407(a)	Proper Power Adjustment	N/A	Non-Dual Client Device or non-Standard Client Device w/o test
-	15.407(a)	Transmit Power Control	N/A	Non-Very Low Power Device w/o test
3.4	15.407(a)	Peak Power Spectral Density (E.I.R.P.)	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-
3.6	15.407(d)	Contention-Based Protocol	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen**Report Producer: Vicky Huang**



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5925-7125	ax (HEW20)	5955-7115	1-233 [59]
5925-7125	ax (HEW40)	5965-7085	3-227 [29]
5925-7125	ax (HEW80)	5985-7025	7-215 [14]

Band	Mode	BWch (MHz)	Nant
UNII 5-8	ax (HEW20)	20	2TX
UNII 5-8	ax (HEW20)-BF	20	2TX
UNII 5-8	ax (HEW40)	40	2TX
UNII 5-8	ax (HEW40)-BF	40	2TX
UNII 5-8	ax (HEW80)	80	2TX
UNII 5-8	ax (HEW80)-BF	80	2TX

Note:

- HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- BWch is the nominal channel bandwidth.

**1.1.2 Antenna Information**

Set	Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	1~3	ARISTOTLE	RFA-27-JP326MHF4C198	PIFA	I-PEX	Note 1
2	1~3	ARISTOTLE	RFA-27-JP326-C198	PIFA	I-PEX	

Note 1:

Set	Ant.	Port	Gain (dBi)		
			WLAN 2.4GHz	Bluetooth	WLAN 5GHz / WLAN 6GHz
1	1	1	3.5	-	5
	2	2	3.5	-	5
	3	1	-	3.5	-
2	1	1	3.5	-	5
	2	2	3.5	-	5
	3	1	-	3.5	-

Note 2: The above information was declared by manufacturer.

Note 3: The EUT has two sets of antennas, each with three antennas. Because antenna sets 1 and 2 are the same type and gain, only antenna set 1 was tested.

Note 4:

For 2.4GHz function:**For IEEE 802.11 b/g/n/VHT/ax (2TX/2RX):**

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For 5GHz function:**For IEEE 802.11a/n/ac/ax (2TX/2RX):**

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For 6GHz function:**For IEEE 802.11ax (2TX/2RX):**

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For Bluetooth function (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

Note 5: Directional gain information

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left(\sum_{k=1}^{N_{ANT}} \varepsilon_{j,k} \right)^2}{N_{ANT}} \right]$
BF	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left(\sum_{k=1}^{N_{ANT}} \varepsilon_{j,k} \right)^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left(\sum_{k=1}^{N_{ANT}} \varepsilon_{j,k} \right)^2}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left(\sum_{k=1}^{N_{ANT}} \varepsilon_{j,k} \right)^2}{N_{ANT}} \right]$$

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ; NSS1(g1,3) = 10^{G3/20} ; NSS1(g1,4) = 10^{G4/20}$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2 / N_{ANT}] \Rightarrow 10$$

$$\log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20} + 10^{G4/20})^2 / N_{ANT}]$$

Where ;

2.4G G1= 3.5 dBi ; G2= 3.5 dBi ;DG= 6.51dBi

5G UNII-1 G1= 5 dBi ; G2= 5 dBi ;DG= 8.01dBi

5G UNII-2A G1= 5 dBi ; G2= 5 dBi ;DG= 8.01dBi

5G UNII-2C G1= 5 dBi ; G2= 5 dBi ;DG= 8.01dBi

5G UNII-3 G1= 5 dBi ; G2= 5 dBi ;DG= 8.01dBi

5G UNII-4 G1= 5 dBi ; G2= 5 dBi ;DG= 8.01dBi

6G UNII-5 G1= 5 dBi ; G2= 5 dBi ;DG= 8.01dBi

6G UNII-6 G1= 5 dBi ; G2= 5 dBi ;DG= 8.01dBi

6G UNII-7 G1= 5 dBi ; G2= 5 dBi ;DG= 8.01dBi

6G UNII-8 G1= 5 dBi ; G2= 5 dBi ;DG= 8.01dBi

**1.1.3 Mode Test Duty Cycle**

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11ax HEW20_Nss 1,(M0)	0.992	0.03	1.048m	10Hz (DC>=0.98)
802.11ax HEW40_Nss 1,(M0)	0.987	0.06	555u	10Hz (DC>=0.98)
802.11ax HEW80_Nss 1,(M0)	0.978	0.1	297.5u	5k
802.11ax HEW20-BF_Nss 1,(M0)	0.992	0.03	1.048m	10Hz (DC>=0.98)
802.11ax HEW40-BF_Nss 1,(M0)	0.987	0.06	555u	10Hz (DC>=0.98)
802.11ax HEW80-BF_Nss 1,(M0)	0.978	0.1	297.5u	5k

Note:

- ◆ DC is Duty Cycle.
- ◆ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From host system		
Beamforming Function	☒ With beamforming	☐ Without beamforming	
	The product has beamforming function for n/VHT/ax in 2.4GHz, n/ac/ax in 5GHz and ax in 6GHz.		
Device Type	☐ Indoor Access Point	☐ Subordinate	
	☒ Indoor Client	☐ Standard Power Access Point	
	☐ Dual Client	☐ Standard Client	
	☐ Fixed Client	☐ Very Low Power	
Condition of EUT	☒ Indoor	☐ Outdoor	
Channel Puncturing Function	☐ Supported Static Puncturing		
	☐ Supported Dynamic Puncturing (Reduce BW)		
	☒ Unsupported		
	Note: The EUT doesn't support puncturing for CBP		
Support RU	☒ Full RU	☐ Partial RU	
Test Software Version	DutApiMimoApApp_LABTOOL_UNIFIED [ver 2.0.0.24]		
Software / Firmware Version for CBP	PCIEAW693-18.99.2.p145.31-MM6X18530.p21-(FP92)		

Note: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.407
- ♦ ANSI C63.10-2020
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 987594 D02 v03
- ♦ FCC KDB 662911 D01 v02r01
- ♦ FCC KDB 412172 D01 v01r01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)
(TAF: 3787)	TEL: 886-3-656-9065 FAX: 886-3-656-9085
	Test site Designation No. TW3787 with FCC.
	Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH03-CB	Brian Sun	21~22.6 / 61~61	May 09, 2025~ Jul. 02, 2025
Radiated (Below 1GHz)	03CH01-CB	Nyle Chang	21.3~22.3 / 58~61	Jul. 24, 2025~ Jul. 25, 2025
Radiated (Above 1GHz)	03CH01-CB	Nyle Chang	21.3~22.3 / 58~61	Apr. 28, 2025~ May 21, 2025
Radiated (Co-location)	03CH01-CB	Nyle Chang	21.3~22.3 / 58~61	Jul. 24, 2025~ Jul. 25, 2025
AC Conduction	CO01-CB	Gray Lee	22~23 / 58~60	Jun. 13, 2025
RF Conducted (Contention-Based Protocol test)	DF01-CB	KJ Chang	21.9~22.7 / 58~63	Aug. 12, 2025~ Aug. 18, 2025



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Date: Before May 28, 2025

Test Items	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	4.2 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.0 dB	Confidence levels of 95%
Conducted Emission	3.1 dB	Confidence levels of 95%
Output Power Measurement	0.8 dB	Confidence levels of 95%
Power Density Measurement	3.1 dB	Confidence levels of 95%
Bandwidth Measurement	2.1 %	Confidence levels of 95%

Test Date: After May 27, 2025

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.7 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%
Conducted Emission	2.5 dB	Confidence levels of 95%
Output Power Measurement	1.3 dB	Confidence levels of 95%
Power Density Measurement	2.0 dB	Confidence levels of 95%
Bandwidth Measurement	1.0 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode
802.11ax HEW20_Nss1,(MCS0)_2TX
5955MHz
6195MHz
6415MHz
6435MHz
6475MHz
6515MHz
6535MHz
6695MHz
6875MHz
6895MHz
6995MHz
7095MHz
7115MHz
802.11ax HEW40_Nss1,(MCS0)_2TX
5965MHz
6205MHz
6405MHz
6445MHz
6485MHz
6525MHz
6565MHz
6685MHz
6885MHz
6925MHz
7005MHz
7085MHz
802.11ax HEW80_Nss1,(MCS0)_2TX
5985MHz
6225MHz
6385MHz
6465MHz
6545MHz
6625MHz
6705MHz
6785MHz
6865MHz
6945MHz
7025MHz
802.11ax HEW20-BF_Nss1,(MCS0)_2TX
5955MHz
6195MHz



6415MHz
6435MHz
6475MHz
6515MHz
6535MHz
6695MHz
6875MHz
6895MHz
6995MHz
7095MHz
7115MHz
802.11ax HEW40-BF_Nss1,(MCS0)_2TX
5965MHz
6205MHz
6405MHz
6445MHz
6485MHz
6525MHz
6565MHz
6685MHz
6885MHz
6925MHz
7005MHz
7085MHz
802.11ax HEW80-BF_Nss1,(MCS0)_2TX
5985MHz
6225MHz
6385MHz
6465MHz
6545MHz
6625MHz
6705MHz
6785MHz
6865MHz
6945MHz
7025MHz

Note:

- ♦ The EUT supports non-beamforming and beamforming modes, after evaluating, the non-beamforming mode has been evaluated to be the worst case, so it was selected to test. The beamforming mode evaluates the output power only.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Normal Link
1	EUT+WLAN 2.4GHz+Antenna set 1
2	EUT+Bluetooth+Antenna set 1
3	EUT+WLAN 5GHz+Antenna set 1
4	EUT+WLAN 6GHz+Antenna set 1
For operating mode 1 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Equivalent Isotopically Radiated Power (E.I.R.P.) Peak Power Spectral Density (E.I.R.P.) Contention Based Protocol
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	CTX After evaluating, the worst case axis was found as below from the Radiated emission above 1GHz. So the measurement will follow this same test configuration.
1	EUT in Z axis+WLAN 2.4GHz+Antenna set 1
2	EUT in Z axis+Bluetooth+Antenna set 1
3	EUT in X axis+WLAN 5GHz+Antenna set 1
4	EUT in X axis+WLAN 6GHz+Antenna set 1
For operating mode 2 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX After evaluating, the worst case axis was found as below. So the measurement will follow this same test configuration.
1	EUT in X axis+Antenna set 1



The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission MASK
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Radiated Emission Co-location
Test Condition	Radiated measurement
Operating Mode	Normal Link
	After evaluating, the worst case axis was found as below from the Radiated emission above 1GHz. So the measurement will follow this same test configuration.
1	EUT in X axis+Bluetooth+WLAN 2.4GHz+Antenna set 1
2	EUT in X axis+Bluetooth+WLAN 5GHz+Antenna set 1
3	EUT in X axis+Bluetooth+WLAN 6GHz+Antenna set 1
For operating mode 1 is the worst case and it was record in this test report.	
Refer to Appendix I for Radiated Emission Co-location.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	EUT+Bluetooth+WLAN 2.4GHz+Antenna set 1
2	EUT+Bluetooth+WLAN 5GHz+Antenna set 1
3	EUT+Bluetooth+WLAN 6GHz+Antenna set 1
Refer to Sporton Test Report No.: FA521125 for Co-location RF Exposure Evaluation.	

2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link Mode:

During the test, the EUT operation to normal function.

2.4 Accessories

N/A



2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	Lenovo	X260	N/A
B	Earphone	SHYARO CHI	MIC-04	N/A
C	Mouse	Logitech	M-U0026	N/A
D	Fixture	Azurewave	2460-i11	N/A
E	Fixture	Azurewave	2A06-I3	N/A

For Radiated:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Fixture	Azurewave	2460-i11	N/A
B	Fixture	Azurewave	2A06-I3	N/A
C	NB	DELL	E4300	N/A

For RF Conducted (Other tests):


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
B	Fixture	Azurewave	2A06-I3	N/A
C	Fixture	Azurewave	2460-i11	N/A

For RF Conducted (Contention Based Protocol test):


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E6230	N/A
B	NB	Lenovo	L440	N/A
C	WLAN AP	ASUS	GT-AXE11000	N/A
D	Fixture	AzureWave	2460-i11	N/A
E	Fixture	Azurewave	2A06-I3	N/A

2.6 Test Setup Diagram

Test Setup Diagram – AC Line Conducted Emission Test

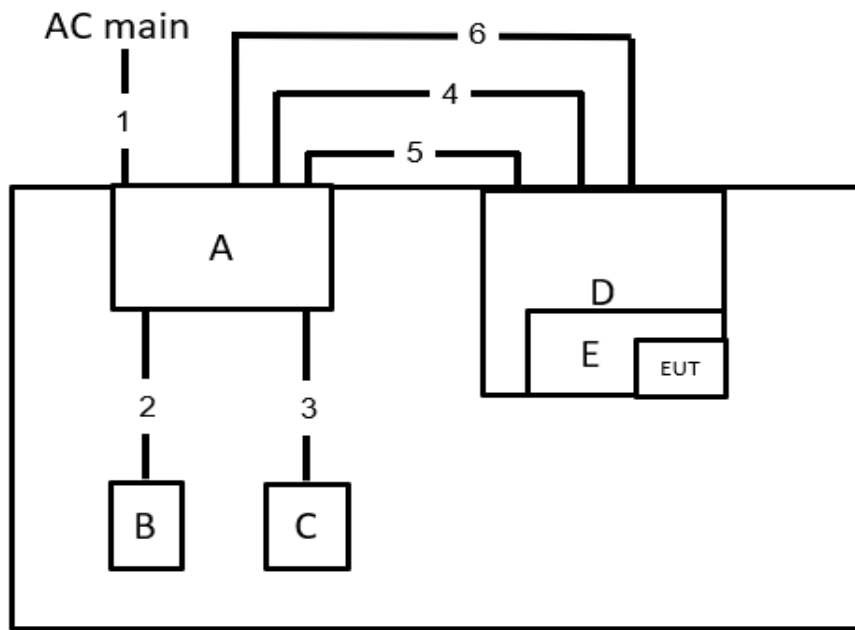

Item	Connection	Shielded	Length
1	Power cable	No	1.8m
2	Audio cable	No	1.2m
3	USB cable	Yes	1.8m
4	Type C USB cable	Yes	1.8m
5	Micro USB cable	Yes	1.5m
6	RJ-45 cable	No	1.5m

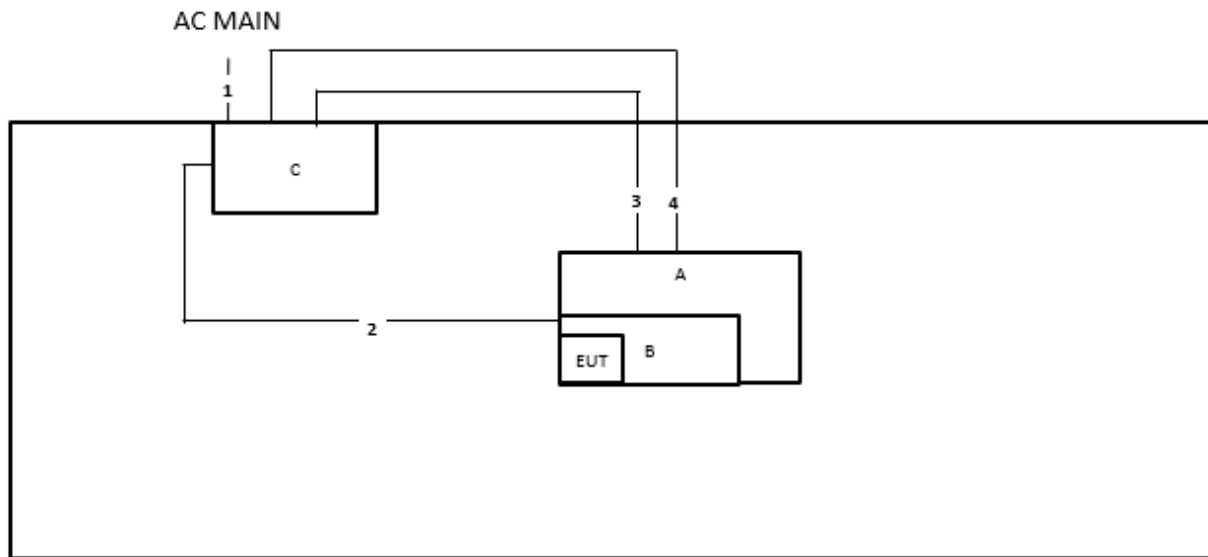Test Setup Diagram - Radiated Test


Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	USB to Type C cable	Yes	0.3m
3	USB to Micro cable	Yes	0.7m
4	RJ-45 cable	No	1.5m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2020, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

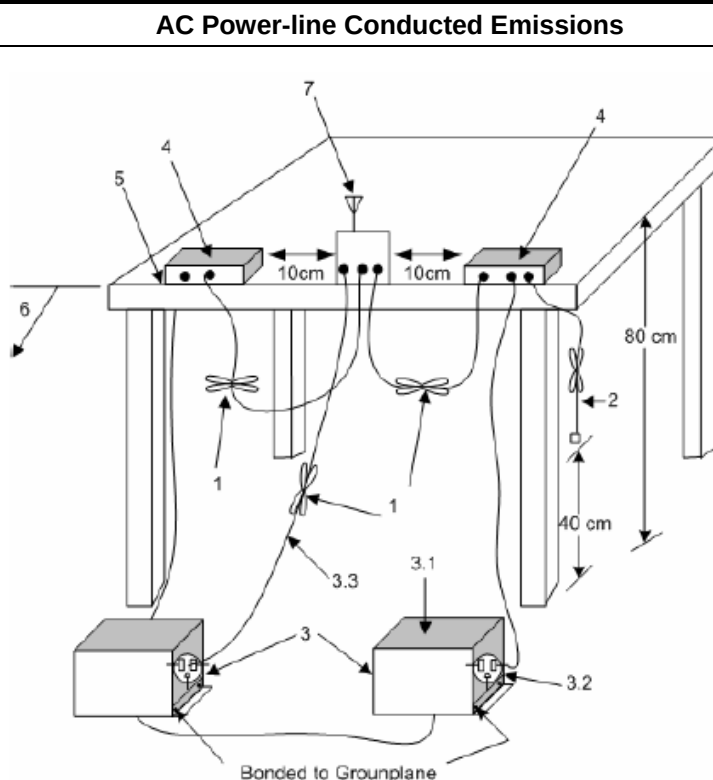

1—Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long.

2—The I/O cables that are not connected to an accessory shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

3—EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. LISN may be placed on top of, or immediately beneath, reference ground plane.

3.1—All other equipment powered from additional LISN(s).

3.2—A multiple-outlet strip may be used for multiple power cords of non-EUT equipment.

3.3—LISN at least 80 cm from nearest part of EUT chassis.

4—Non-EUT components of EUT system being tested.

5—Rear of EUT, including peripherals, shall all be aligned and flush with edge of tabletop.

6—Edge of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

7—Antenna can be integral or detachable. If detachable, then the antenna shall be attached for this test.

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- Corrected Reading (dBUV) = LISN Factor + Cable Loss + Read Level = Level
- Margin = - Limit + (Read Level + LISN Factor + Cable Loss)

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5925-6425 GHz band, need less than 320 MHz bandwidth.
☒	For the 6425-6525 GHz band, need less than 320 MHz bandwidth.
☒	For the 6525-6875 GHz band, need less than 320 MHz bandwidth.
☒	For the 6875-7125 GHz band, need less than 320 MHz bandwidth.
RLAN Devices	
☐	For the 5925-6425 GHz band, need less than 320 MHz bandwidth.
☐	For the 6425-6525 GHz band, need less than 320 MHz bandwidth.
☐	For the 6525-6875 GHz band, need less than 320 MHz bandwidth.
☐	For the 6875-7125 GHz band, need less than 320 MHz bandwidth.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
For the emission bandwidth shall be measured using one of the options below:	
☒	According to FCC KDB 987594 D02 clause II.C, measurement procedure shall refer to FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

3.2.4 Test Setup

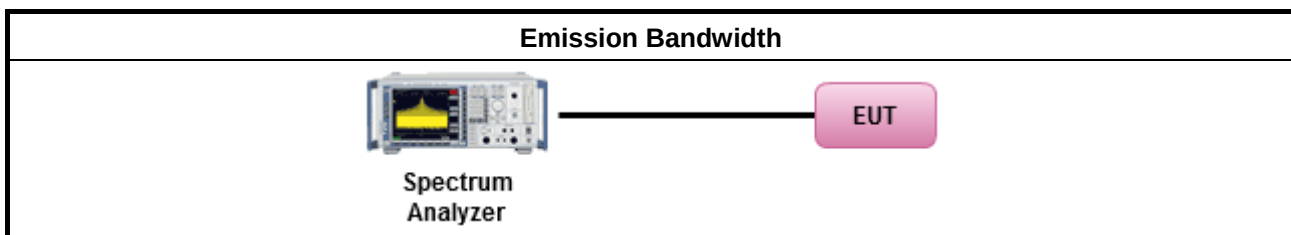

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

Note:

The 99% OBW of BW320 should be less than 320 MHz of limit, and the other BWs less than 320 MHz of limit are 26 dB EBW.



3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)

3.3.1 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit

Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
RLAN Devices	
☐ For the 5.925 ~ 7.125 GHz band:	
	■ For low-power indoor access-points & indoor subordinate devices < 30 dBm .
	■ For low-power client devices < 24 dBm.
	■ For very low-power devices < 14 dBm.
☐ For the 5.925 ~ 6.875 GHz band:	

- For standard-power access points & fixed client devices < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
- For standard client devices < 30 dBm.


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
▪ According to FCC KDB 987594 D02 clause II.E, the test measurement procedure shall refer to KDB 789033.	
Average over on/off periods with duty factor	
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging). Spectrum analyzer setting: RBW/VBW : 1/3MHz ; Detector : RMS ; Trace mode : Average ; Sweep Count 100.
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
Wideband RF power meter and average over on/off periods with duty factor	
☒	Refer as FCC KDB 789033 D02, clause E Method PM-G (using an RF average power meter).
☒ For conducted measurement.	
▪ If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
▪ If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	
☐ For radiated measurement.	
▪ Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" ▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. ▪ Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.	

3.3.4 Test Setup

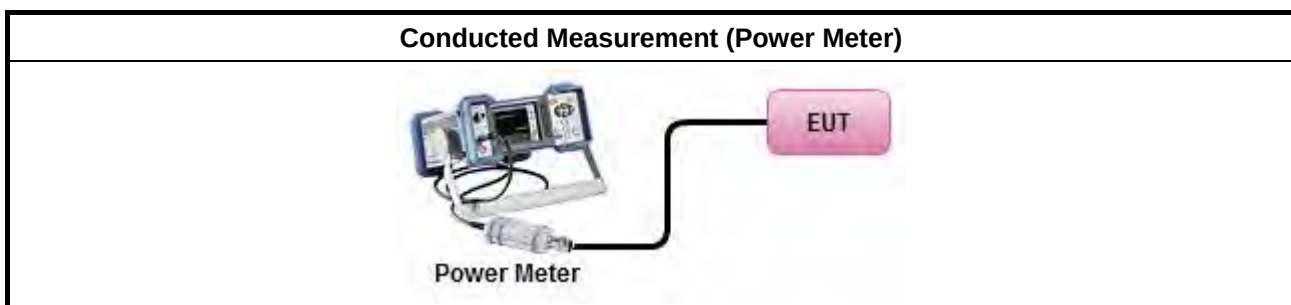



3.3.5 Test Result of Maximum Equivalent Isotopically Radiated Power (E.I.R.P)

Refer as Appendix C



3.4 Peak Power Spectral Density (E.I.R.P.)

3.4.1 Peak Power Spectral Density (E.I.R.P.) Limit

Peak Power Spectral Density (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☒ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☒ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
RLAN Devices	
☐ For the 5.925 ~ 7.125 GHz band:	
	■ For low-power indoor access-points & indoor subordinate devices < 5 dBm / MHz.
	■ For low-power client devices < -1 dBm / MHz.
	■ For very low-power devices < -5 dBm / MHz.
☐ For the 5.925 ~ 6.875 GHz band:	
	■ For standard-power access points & fixed client devices < 23 dBm / MHz.
	■ For standard client devices < 17 dBm / MHz.



3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
According to FCC KDB 987594 D02 clause II.F, the measurement procedure shall refer to KDB 789033. Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐	Refer as FCC KDB 789033 D02, F5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
[duty cycle ≥ 98% or external video / power trigger]	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☒ For conducted measurement.	
If the EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	

☐	For radiated measurement.
	- Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. - Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.4.4 Test Setup

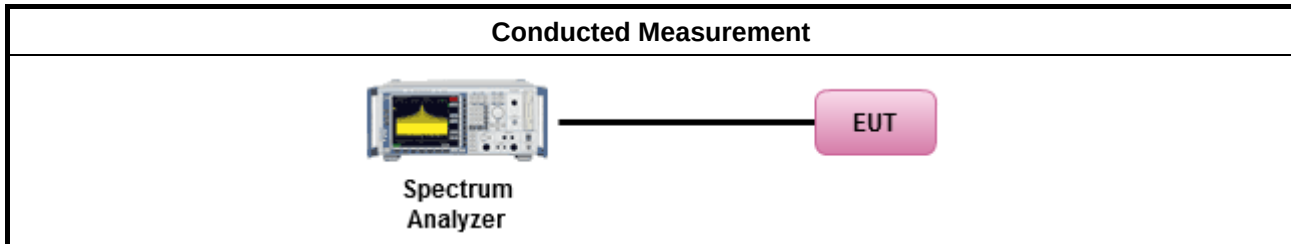

3.4.5 Test Result of Peak Power Spectral Density (E.I.R.P.)

Refer as Appendix D



3.5 Unwanted Emissions

3.5.1 Transmitter Unwanted Emissions Limit


Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$).
EX. Above 18GHz emission limit calculation (3m to 1m) = $54\text{dBuV/m at 3m} + 9.54\text{dB} = 63.54\text{ dBuV/m at 1m}$.

Un-restricted band emissions above 1GHz Limit	
Frequency	Limit
Any outside the 5.925 – 7.125 GHz emission	e.i.r.p. -27 dBm [68.2 dBuV/m@3m] Note 1: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$). EX. Above 18GHz emission limit calculation (3m to 1m) = $68.2\text{dBuV/m at 3m} + 9.54\text{dB} = 77.74\text{ dBuV/m at 1m}$. Note 2:-27 dBm EIRP OOBE is measured RMS which is a deviation from the current 15E rules for 5 GHz bands. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

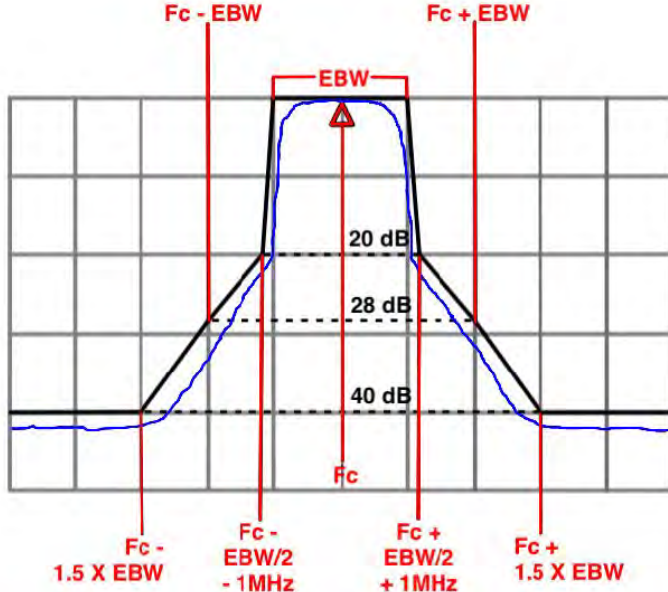Frequency	Emission MASK Limit
5.925 – 7.125 GHz	Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB. 




3.5.2 Measuring Instruments



Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
According to FCC KDB 987594 D02 II.G. the unwanted emission measurement procedure shall refer to KDB 789300(except emission MASK). Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.
	☒ Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging). (For unrestricted band measurement)
	☐ Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).
	☒ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.(For restricted band average measurement)
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.
	☐ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
Refer as FCC KDB 789033 D02, clause G)3)d)ii) for Band edge Integration measurements.	
For emission MASK shall be measured using following options below:	
	☒ Refer as FCC KDB 987594 D02, J) In-Band Emissions
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	

3.5.4 Test Setup

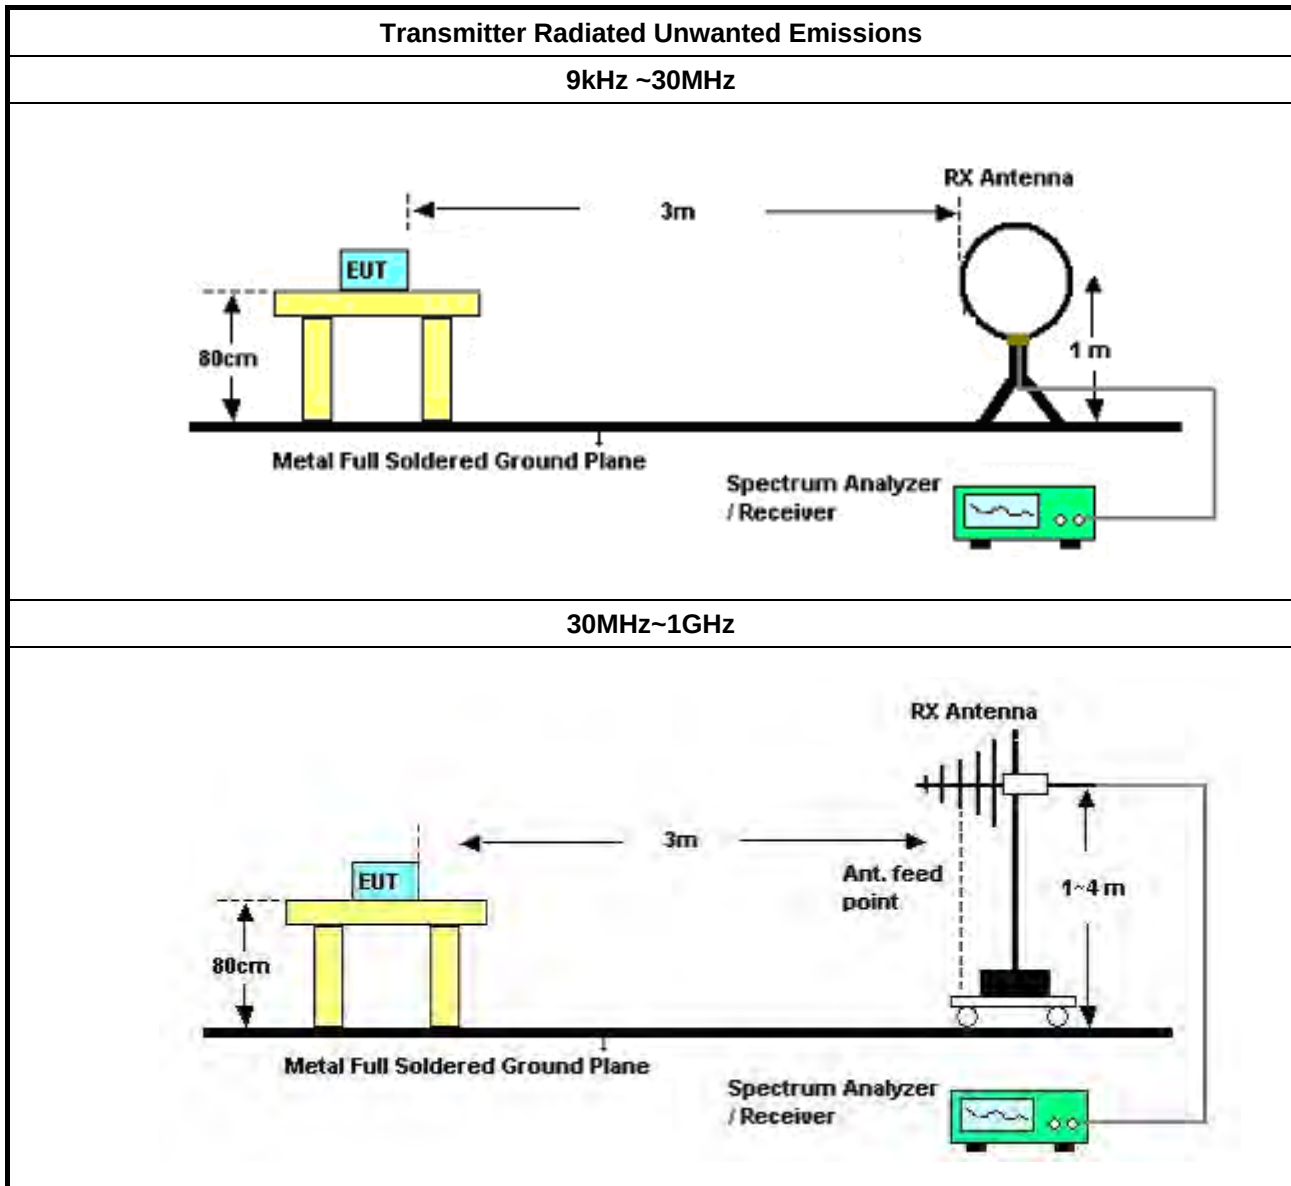

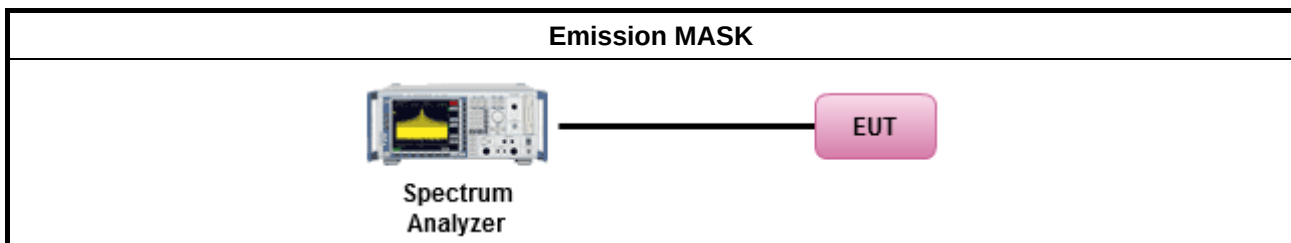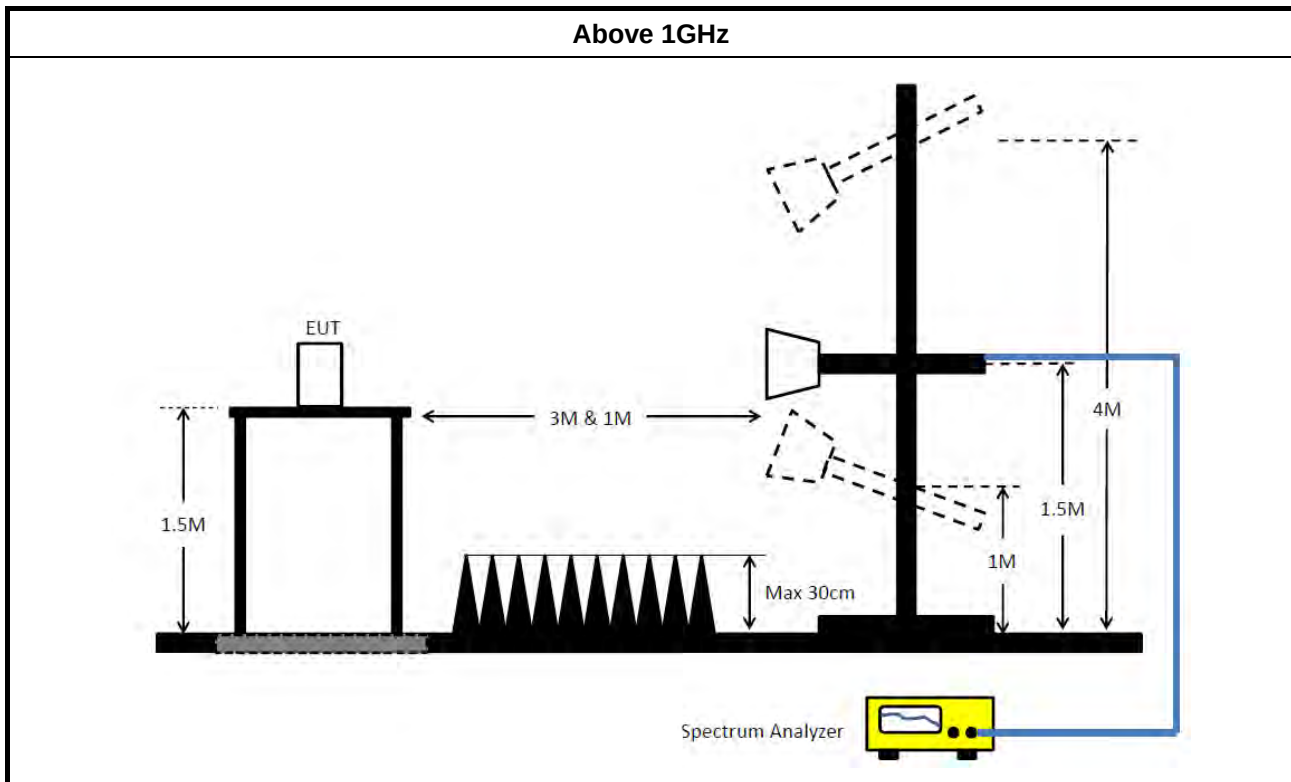

3.5.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable)
= Level

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E

3.6 Contention Based Protocol

3.6.1 Contention Based Protocol Limit

EUT can detect an AWGN signal with 90% (or better) level of certainty.


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
■	For Contention Based Protocol shall be measured using following options below:
☒	Refer as FCC KDB 987594 D02, I) Contention Based Protocol.

3.6.4 Test Setup

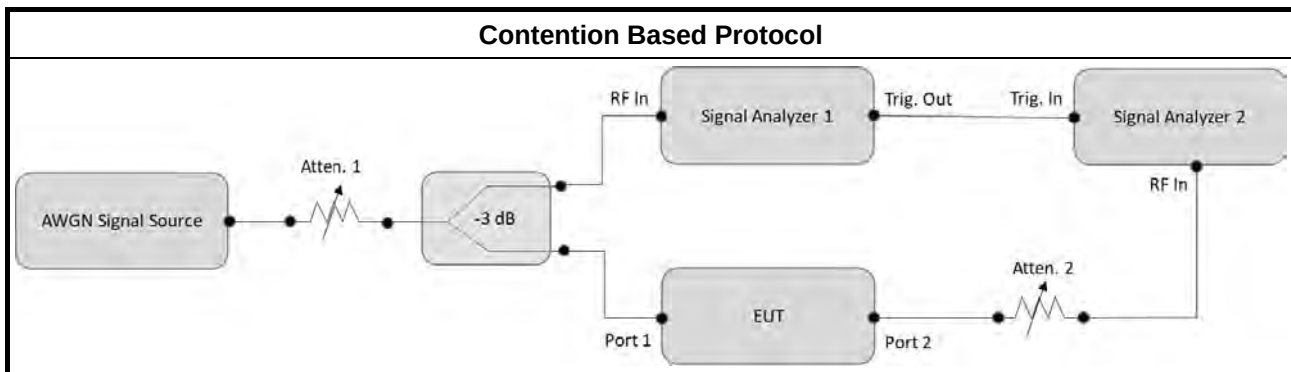

3.6.5 Test Result of Contention Based Protocol

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Mar. 06, 2025	Mar. 05, 2026	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Feb. 18, 2025	Feb. 17, 2026	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	May 10, 2025	May 09, 2026	Conduction (CO01-CB)
Pulse Limiter	Rohde& Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Oct. 16, 2024	Oct. 15, 2025	Conduction (CO01-CB)
COND Cable	Woken	Cable	CO01	9kHz ~ 30MHz	Oct. 16, 2024	Oct. 15, 2025	Conduction (CO01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	150kHz-30MHz	N.C.R.	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30MHz	Oct. 17, 2024	Oct. 16, 2025	Radiation (03CH01-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH01-CB	30 MHz ~ 1 GHz	Jan. 16, 2025	Jan. 15, 2026	Radiation (03CH01-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH01-CB	1GHz ~18GHz 3m	May 04, 2024	May 03, 2025	Radiation (03CH01-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH01-CB	1GHz ~18GHz 3m	May 03, 2025	May 02, 2026	Radiation (03CH01-CB)
Horn Antenna	ETS-Lindgren	3115	00143147	750MHz~18GHz	Oct. 18, 2024	Oct. 17, 2025	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Sep. 23, 2024	Sep. 22, 2025	Radiation (03CH01-CB)
Amplifier	Agilent	8447D	2944A10259	30M~1GHz	Jan. 07, 2025	Jan. 06, 2026	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02121	1GHz ~ 26.5GHz	May 17, 2024	May 16, 2025	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02121	1GHz ~ 26.5GHz	May 16, 2025	May 15, 2026	Radiation (03CH01-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 25, 2024	Nov. 24, 2025	Radiation (03CH01-CB)
Signal Analyzer	R&S	FSV3044	101437	10kHz ~ 44GHz	Dec. 12, 2024	Dec. 11, 2025	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESR7	102172	9kHz ~ 7GHz	Oct. 21, 2024	Oct. 20, 2025	Radiation (03CH01-CB)
RF Cable-low	Woken	RG402	Low Cable-31+32	30 MHz ~ 1 GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH01-CB)



RF Cable-high	Woken	RG402	High Cable-16	1 GHz ~ 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-16+17	1 GHz ~ 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH01-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11.8	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (03CH01-CB)
Test Software	SPORTON	SENSE-15407 _NII	V5.11. 25	5.15GHz- 7.115GHz	N.C.R.	N.C.R.	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	101028	9kHz~40GHz	Jan. 02, 2025	Jan. 01, 2026	Conducted (TH03-CB)
Power Sensor	Anritsu	MA2411B	1726195	300MHz~ 40GHz	Sep. 06, 2024	Sep. 05, 2025	Conducted (TH03-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~ 40GHz	Sep. 06, 2024	Sep. 05, 2025	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-11	30MHz ~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-12	30MHz ~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-13	30MHz ~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-14	1 GHz ~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-15	1 GHz ~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH03-CB)
Switch	SPTCB	SP-SWI	SWI-03	1~18GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (TH03-CB)
Test Software	SPORTON	SENSE-15407 _NII	V5.11. 25	5.15GHz- 7.115GHz	N.C.R.	N.C.R.	Conducted (TH03-CB)
Signal generator	R&S	SMB100A	177785	1MHz-40GHz	Sep. 23, 2024	Sep. 22, 2025	Conducted (DF01-CB)
Vector Signal generator	R&S	SMU200A	102782	100kHz-6GHz	Sep. 16, 2024	Sep. 15, 2025	Conducted (DF01-CB)
Vector Signal generator	R&S	SMW200A	109426	100kHz- 7.5GHz	Jan. 14, 2025	Jan. 13, 2026	Conducted (DF01-CB)
RF Power Divider	MTJ	4 Way	DF01-DV01	1GHz ~ 6GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (DF01-CB)
RF Power Divider	Titan	2 Way	DV-8G -09	2GHz ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (DF01-CB)
RF Power Divider	Titan	2 Way	DV-8G -10	2GHz ~ 8GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (DF01-CB)
RF Cable-high	Woken	RG402	High Cable-52	1 GHz ~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (DF01-CB)
RF Cable-high	Woken	RG402	High Cable-53	1 GHz ~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (DF01-CB)



RADIO TEST REPORT

Report No. : FR521125AF

RF Cable-high	Woken	RG402	High Cable-54	1 GHz –18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (DF01-CB)
RF Cable-high	Woken	RG402	High Cable-56	1 GHz –18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (DF01-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.




Conducted Emissions at Powerline

Appendix A

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	159k	51.67	65.52	-13.85	Line

Mode 1

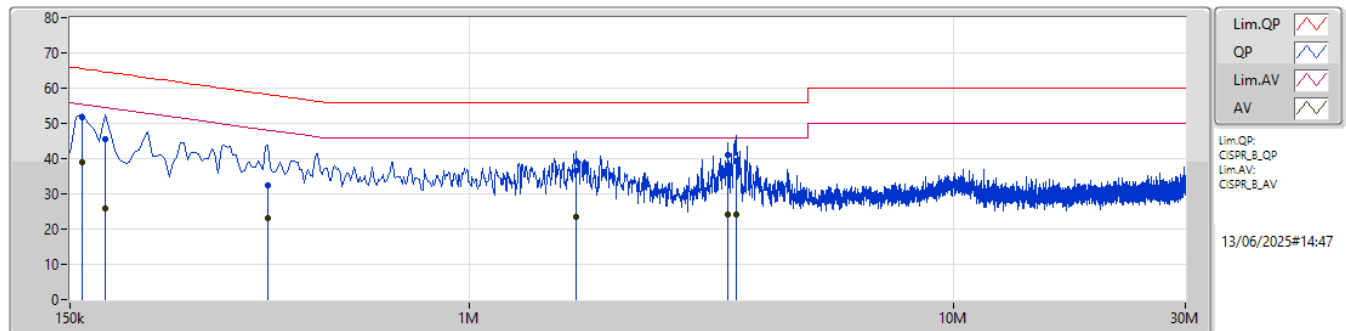

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	159k	51.67	65.52	-13.85	10.05	Line	"Worst"	41.62	0.05	0.08	9.92						
AV	159k	38.89	55.52	-16.63	10.05	Line	-	28.84	0.05	0.08	9.92						
QP	177k	45.57	64.62	-19.05	10.06	Line	-	35.51	0.06	0.07	9.93						
AV	177k	25.81	54.62	-28.81	10.06	Line	-	15.75	0.06	0.07	9.93						
QP	384k	32.45	58.20	-25.75	10.20	Line	-	22.25	0.05	0.10	10.05						
AV	384k	23.21	48.20	-24.99	10.20	Line	-	13.01	0.05	0.10	10.05						
QP	1.662M	36.71	56.00	-19.29	10.23	Line	-	26.48	0.09	0.13	10.01						
AV	1.662M	23.57	46.00	-22.43	10.23	Line	-	13.34	0.09	0.13	10.01						
QP	3.413M	40.88	56.00	-15.12	10.18	Line	-	30.70	0.12	0.15	9.91						
AV	3.413M	24.12	46.00	-21.88	10.18	Line	-	13.94	0.12	0.15	9.91						
QP	3.552M	39.45	56.00	-16.55	10.18	Line	-	29.27	0.12	0.15	9.91						
AV	3.552M	24.11	46.00	-21.89	10.18	Line	-	13.93	0.12	0.15	9.91						

Mode 1

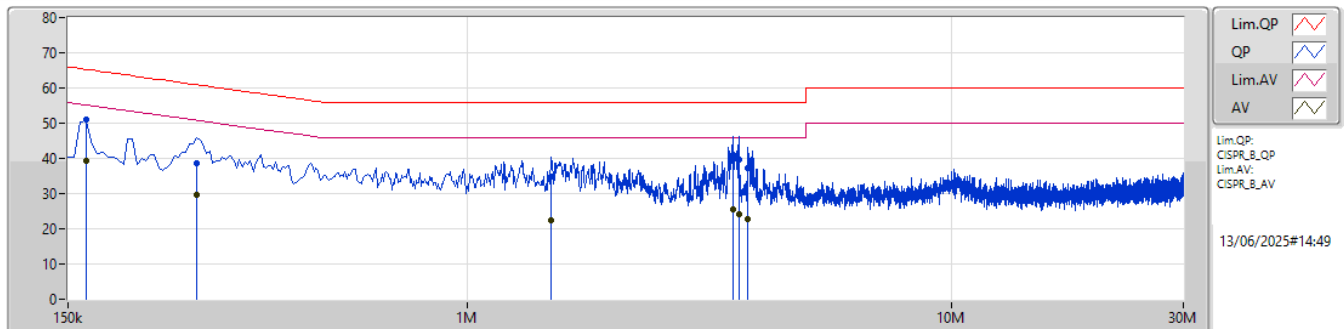

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	163.5k	51.08	65.27	-14.19	10.08	Neutral	"Worst"	41.00	0.08	0.08	9.92						
AV	163.5k	39.35	55.27	-15.92	10.08	Neutral	-	29.27	0.08	0.08	9.92						
QP	276k	38.67	60.93	-22.26	10.16	Neutral	-	28.51	0.08	0.08	10.00						
AV	276k	29.77	50.93	-21.16	10.16	Neutral	-	19.61	0.08	0.08	10.00						
QP	1.487M	35.00	56.00	-21.00	10.26	Neutral	-	24.74	0.10	0.12	10.04						
AV	1.487M	22.51	46.00	-23.49	10.26	Neutral	-	12.25	0.10	0.12	10.04						
QP	3.53M	40.89	56.00	-15.11	10.21	Neutral	-	30.68	0.15	0.15	9.91						
AV	3.53M	25.65	46.00	-20.35	10.21	Neutral	-	15.44	0.15	0.15	9.91						
QP	3.633M	39.60	56.00	-16.40	10.21	Neutral	-	29.39	0.15	0.15	9.91						
AV	3.633M	24.09	46.00	-21.91	10.21	Neutral	-	13.88	0.15	0.15	9.91						
QP	3.786M	37.24	56.00	-18.76	10.21	Neutral	-	27.03	0.16	0.15	9.90						
AV	3.786M	22.83	46.00	-23.17	10.21	Neutral	-	12.62	0.16	0.15	9.90						

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	20.46M	18.782M	18M8D1D	20.24M	18.768M
802.11ax HEW40_Nss1,(MCS0)_2TX	40.81M	37.576M	37M6D1D	40.15M	37.513M
802.11ax HEW80_Nss1,(MCS0)_2TX	80.74M	77.617M	77M6D1D	80.74M	77.528M
6.425-6.525GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	20.515M	18.799M	18M8D1D	20.24M	18.767M
802.11ax HEW40_Nss1,(MCS0)_2TX	40.81M	37.583M	37M6D1D	40.37M	37.5M
802.11ax HEW80_Nss1,(MCS0)_2TX	80.96M	77.628M	77M6D1D	80.52M	77.549M
6.525-6.875GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	20.625M	18.797M	18M8D1D	20.185M	18.768M
802.11ax HEW40_Nss1,(MCS0)_2TX	40.7M	37.879M	37M9D1D	40.37M	37.496M
802.11ax HEW80_Nss1,(MCS0)_2TX	80.96M	77.635M	77M6D1D	80.52M	77.489M
6.875-7.125GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	20.515M	18.799M	18M8D1D	20.13M	18.753M
802.11ax HEW40_Nss1,(MCS0)_2TX	40.92M	37.607M	37M6D1D	40.04M	37.496M
802.11ax HEW80_Nss1,(MCS0)_2TX	80.96M	77.633M	77M6D1D	80.74M	77.566M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5955MHz	Pass	320MHz	20.24M	18.776M	20.24M	18.775M
6195MHz	Pass	320MHz	20.35M	18.768M	20.24M	18.775M
6415MHz	Pass	320MHz	20.46M	18.78M	20.35M	18.782M
6435MHz	Pass	320MHz	20.295M	18.769M	20.515M	18.767M
6475MHz	Pass	320MHz	20.515M	18.787M	20.295M	18.768M
6515MHz	Pass	320MHz	20.35M	18.782M	20.24M	18.799M
6535MHz	Pass	320MHz	20.46M	18.782M	20.35M	18.782M
6695MHz	Pass	320MHz	20.185M	18.786M	20.625M	18.768M
6875MHz	Pass	320MHz	20.35M	18.797M	20.35M	18.77M
6895MHz	Pass	320MHz	20.515M	18.777M	20.295M	18.789M
6995MHz	Pass	320MHz	20.24M	18.773M	20.13M	18.774M
7095MHz	Pass	320MHz	20.405M	18.753M	20.24M	18.767M
7115MHz	Pass	320MHz	20.405M	18.799M	20.46M	18.778M
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5965MHz	Pass	320MHz	40.48M	37.534M	40.81M	37.576M
6205MHz	Pass	320MHz	40.37M	37.56M	40.15M	37.528M
6405MHz	Pass	320MHz	40.7M	37.552M	40.48M	37.513M
6445MHz	Pass	320MHz	40.37M	37.553M	40.81M	37.561M
6485MHz	Pass	320MHz	40.7M	37.544M	40.48M	37.5M
6525MHz	Pass	320MHz	40.7M	37.583M	40.37M	37.564M
6565MHz	Pass	320MHz	40.7M	37.566M	40.59M	37.558M
6685MHz	Pass	320MHz	40.37M	37.496M	40.48M	37.879M
6885MHz	Pass	320MHz	40.37M	37.53M	40.59M	37.572M
6925MHz	Pass	320MHz	40.7M	37.547M	40.59M	37.572M
7005MHz	Pass	320MHz	40.92M	37.569M	40.04M	37.607M
7085MHz	Pass	320MHz	40.92M	37.496M	40.59M	37.503M
802.11ax HEW80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5985MHz	Pass	320MHz	80.74M	77.599M	80.74M	77.617M
6225MHz	Pass	320MHz	80.74M	77.528M	80.74M	77.538M
6385MHz	Pass	320MHz	80.74M	77.544M	80.74M	77.595M
6465MHz	Pass	320MHz	80.96M	77.57M	80.74M	77.56M
6545MHz	Pass	320MHz	80.74M	77.549M	80.52M	77.628M
6625MHz	Pass	320MHz	80.52M	77.624M	80.74M	77.606M
6705MHz	Pass	320MHz	80.74M	77.604M	80.74M	77.616M
6785MHz	Pass	320MHz	80.74M	77.596M	80.74M	77.635M
6865MHz	Pass	320MHz	80.96M	77.594M	80.96M	77.489M
6945MHz	Pass	320MHz	80.96M	77.585M	80.74M	77.566M
7025MHz	Pass	320MHz	80.74M	77.583M	80.74M	77.633M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

5955MHz

09/05/2025

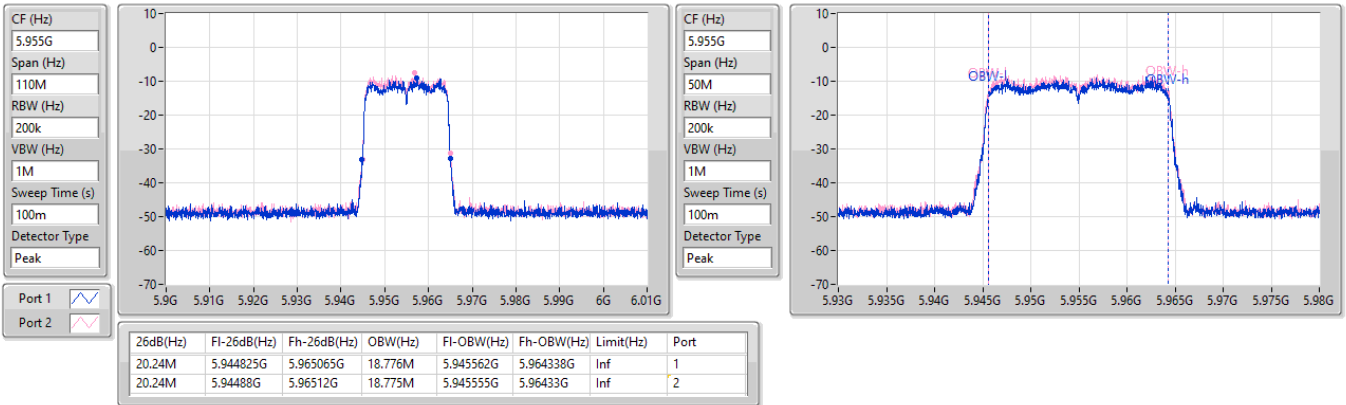


5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

6195MHz

09/05/2025

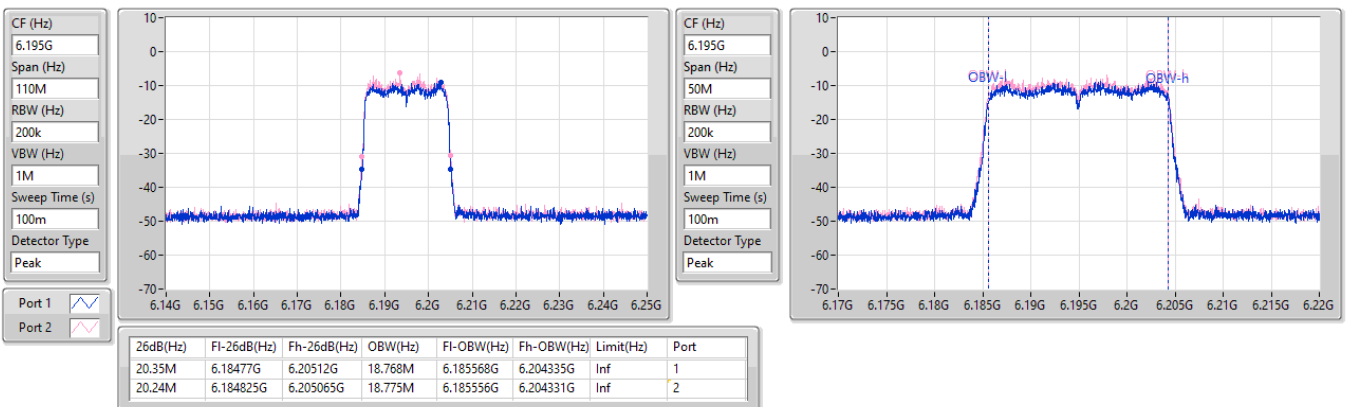


5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

6415MHz

09/05/2025

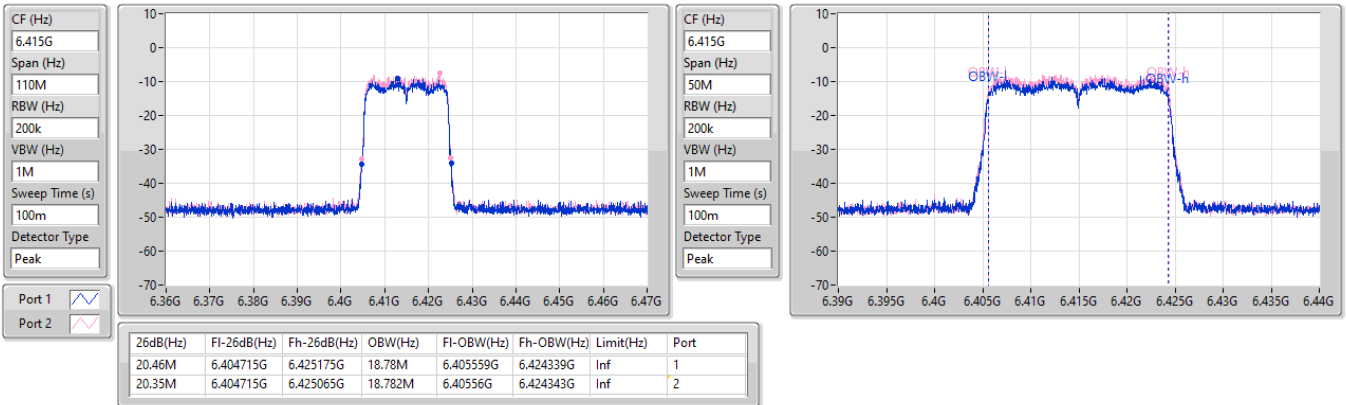


6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

EBW



6435MHz

09/05/2025


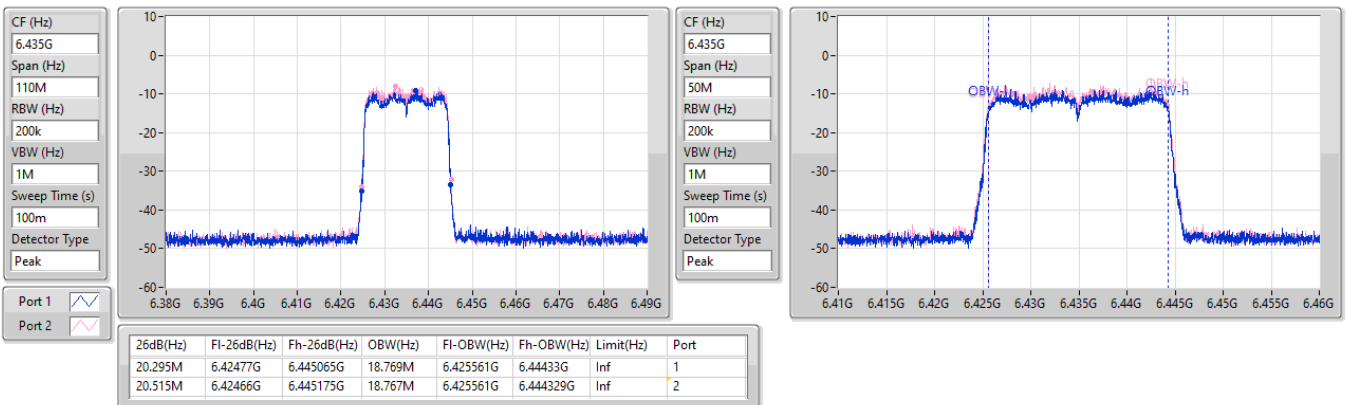


6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_2TX
EBW
6475MHz

09/05/2025

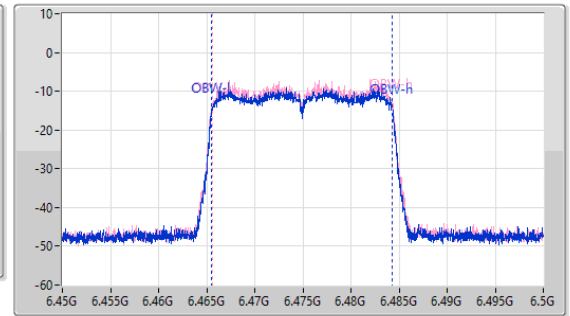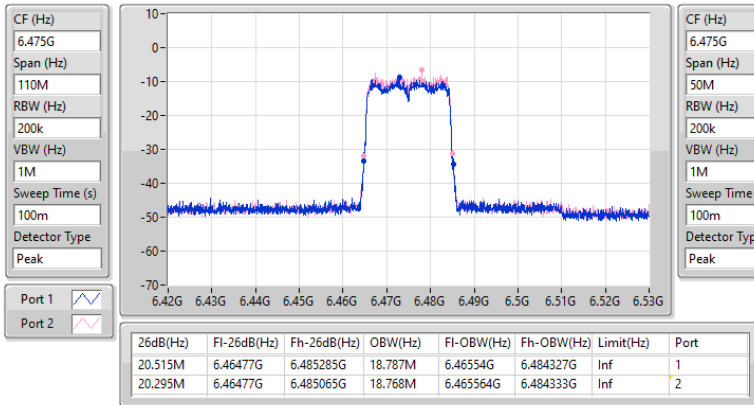
6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_2TX
EBW
6515MHz

09/05/2025

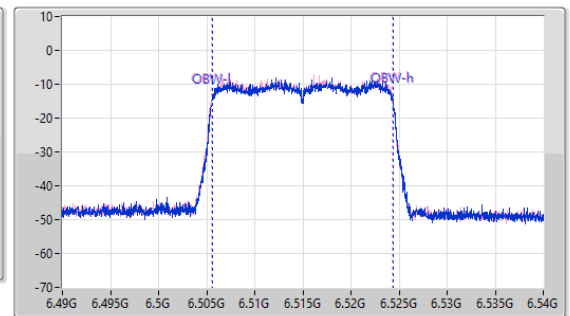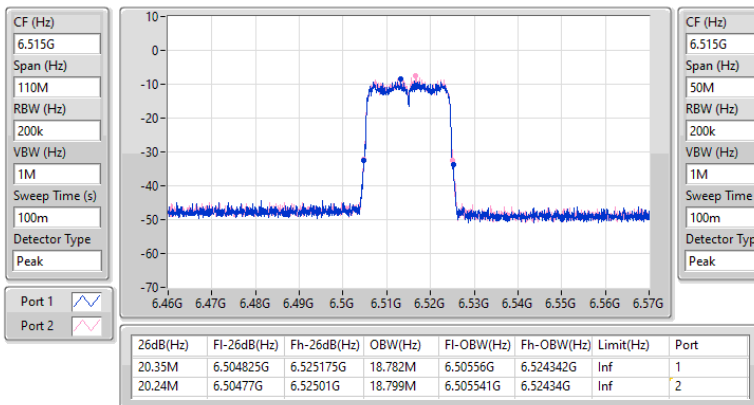


6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

6535MHz

09/05/2025

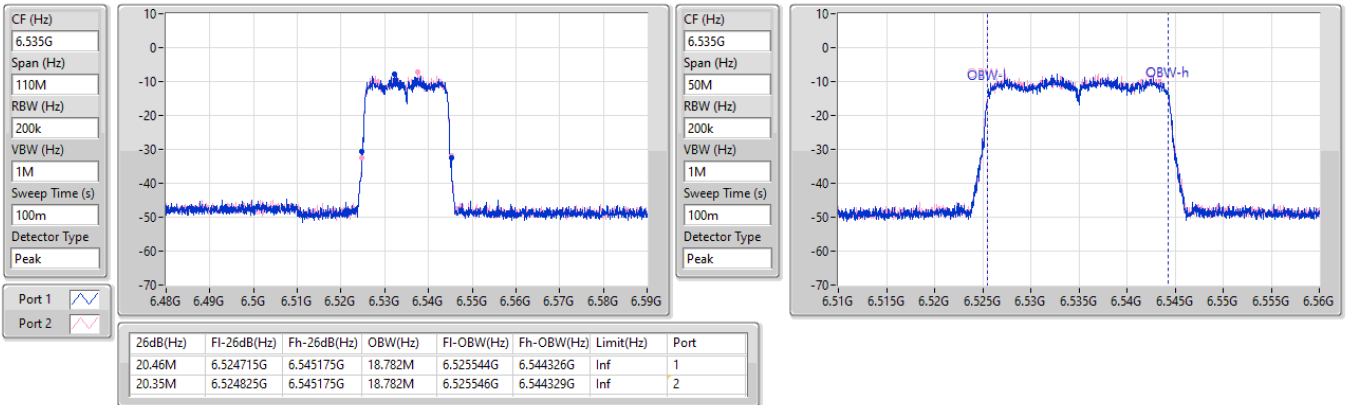


6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

6695MHz

09/05/2025

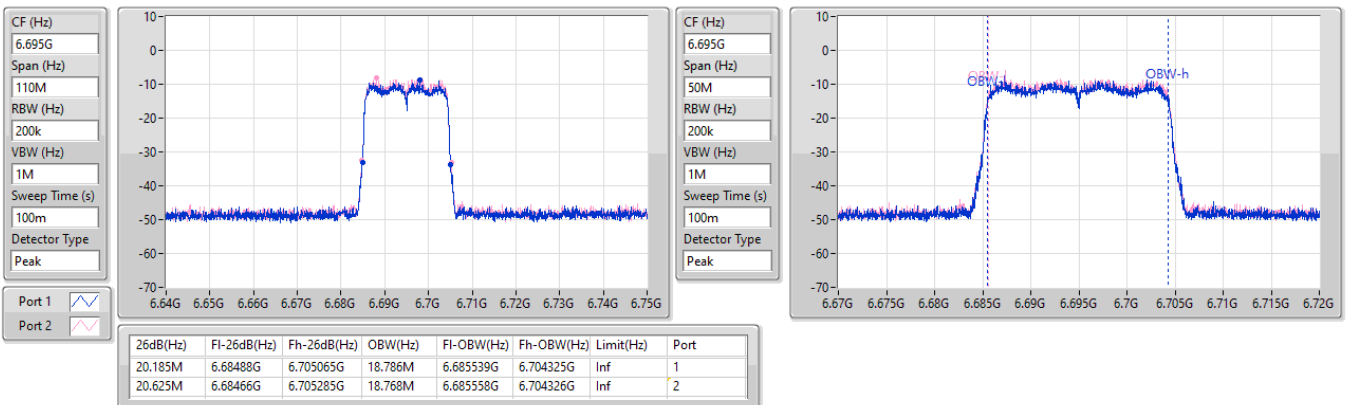


6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

6875MHz

09/05/2025

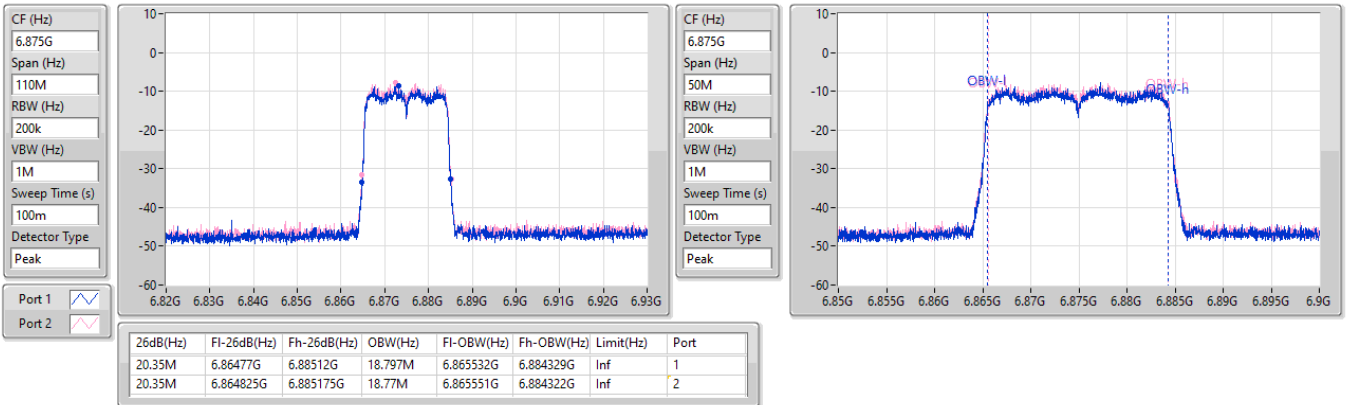


6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

6895MHz

09/05/2025

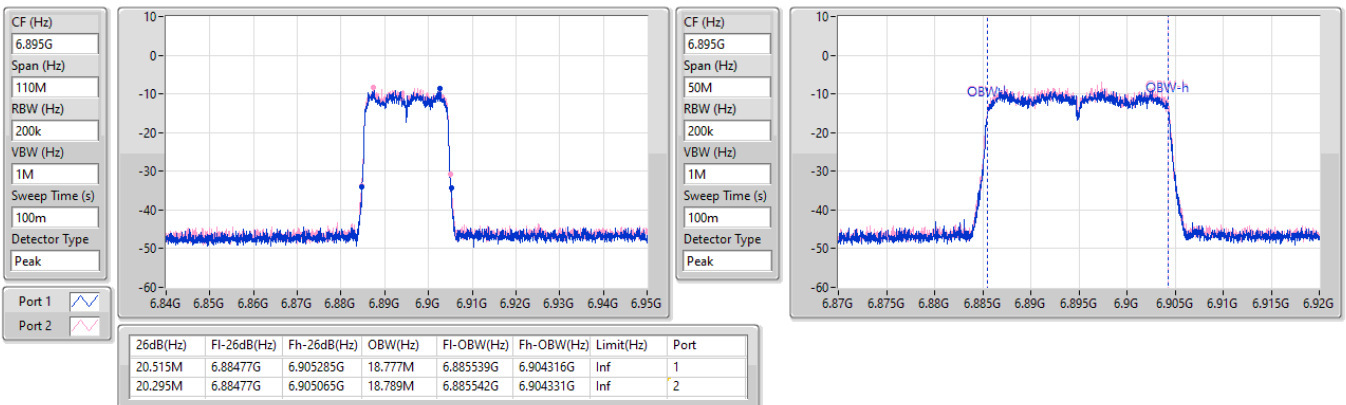


6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

6995MHz

09/05/2025

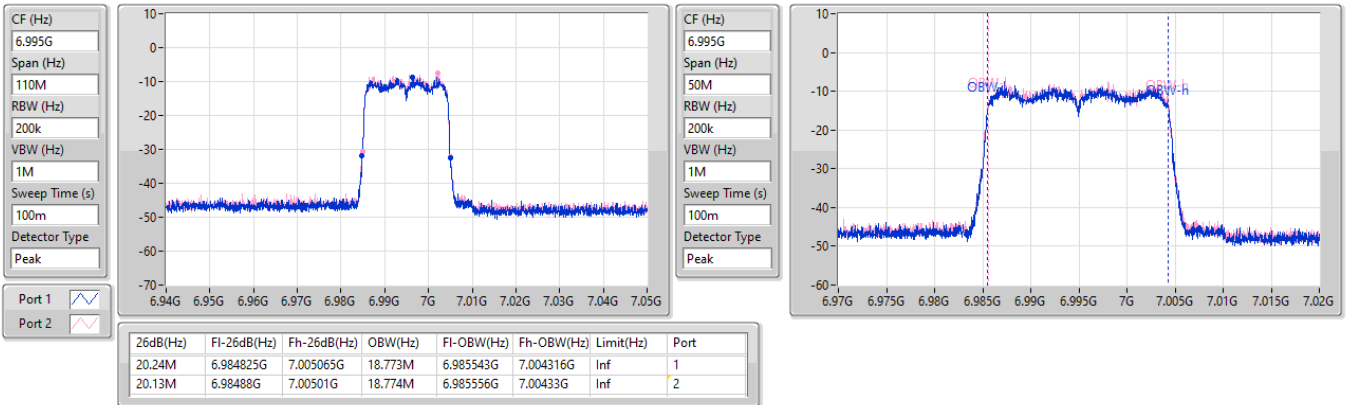


6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

7095MHz

09/05/2025

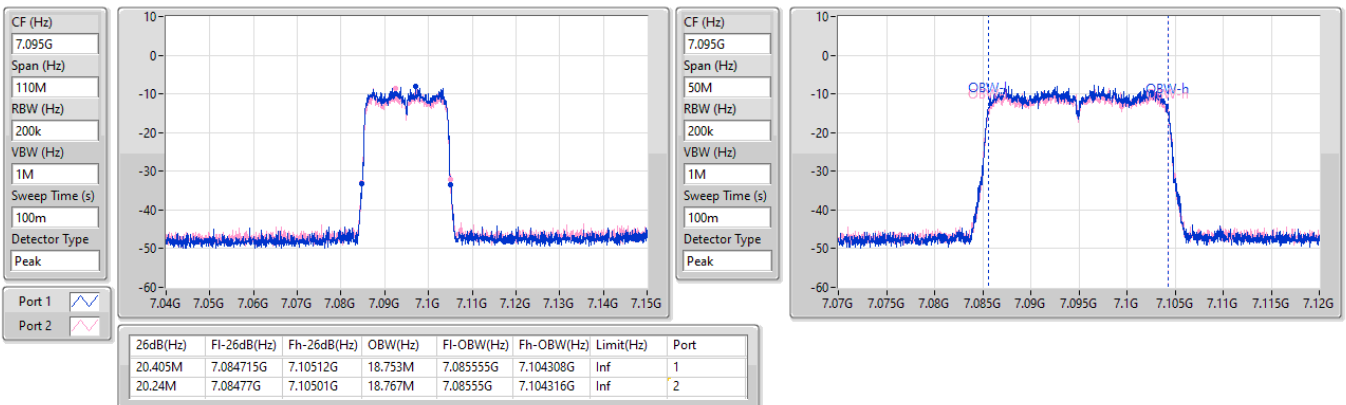


6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

7115MHz

09/05/2025

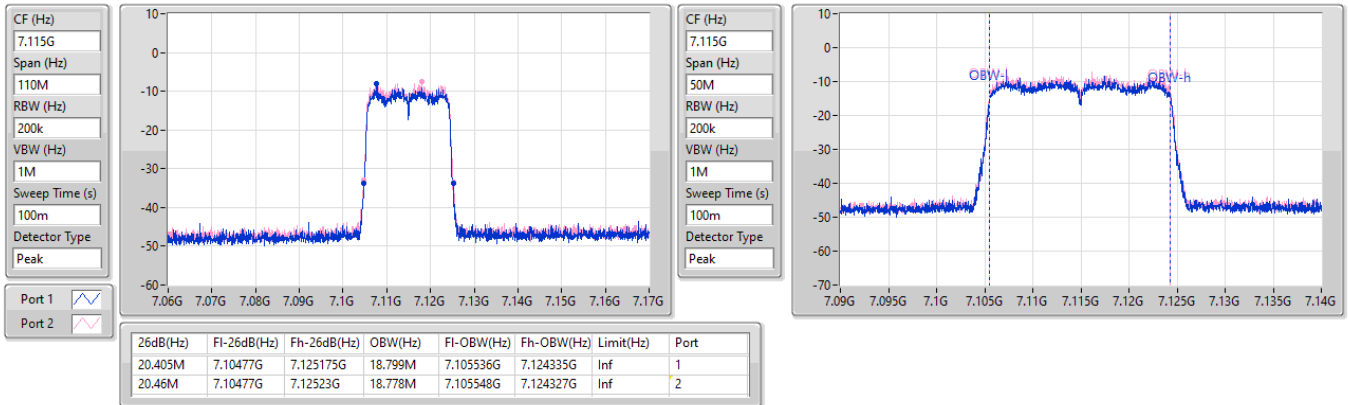


5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

5965MHz

09/05/2025

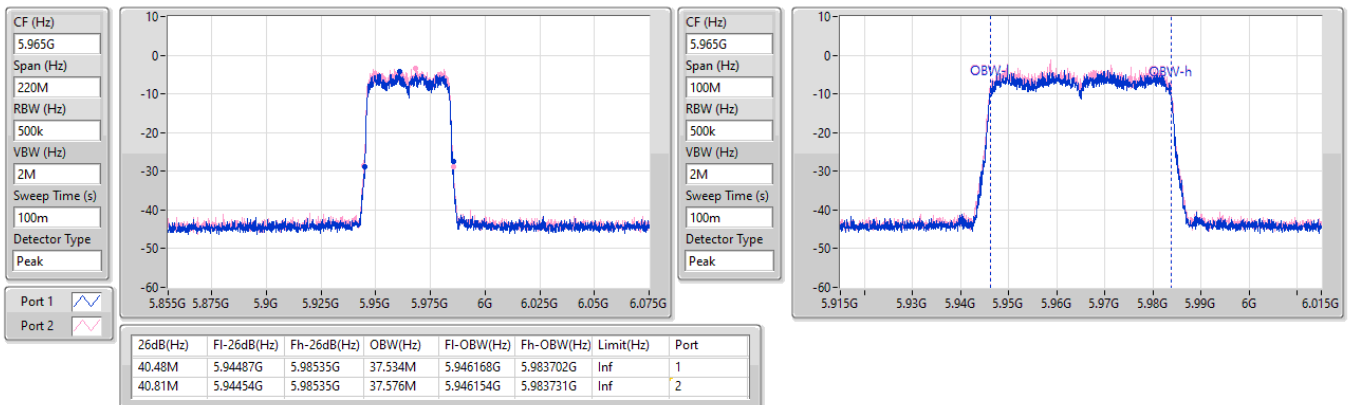


5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6205MHz

09/05/2025

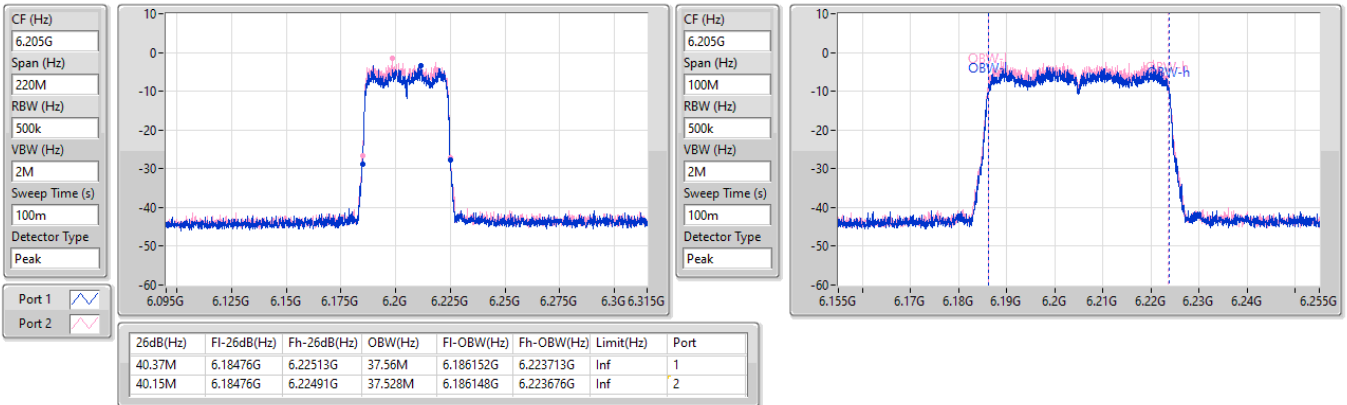


5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6405MHz

09/05/2025

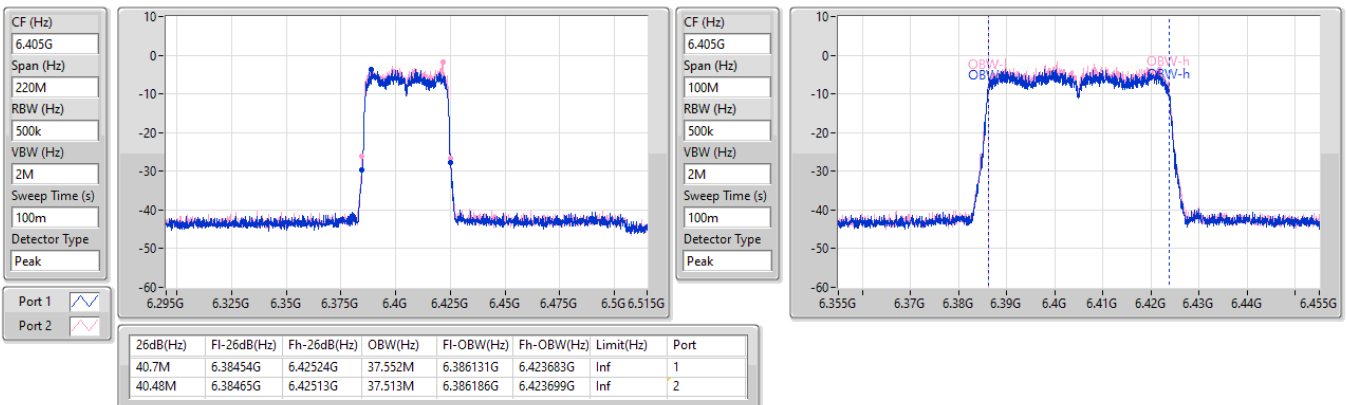


6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6445MHz

09/05/2025

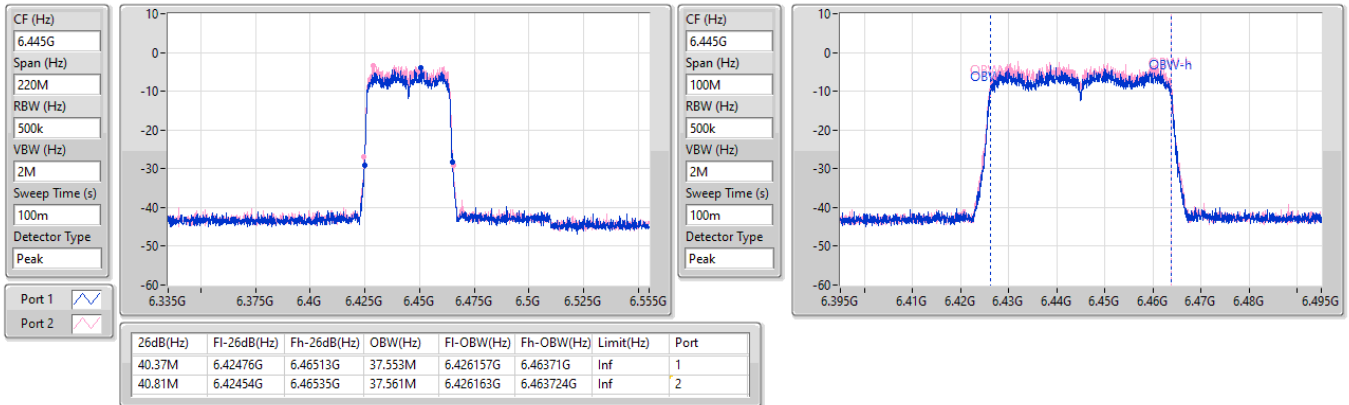


6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

EBW


6485MHz

09/05/2025

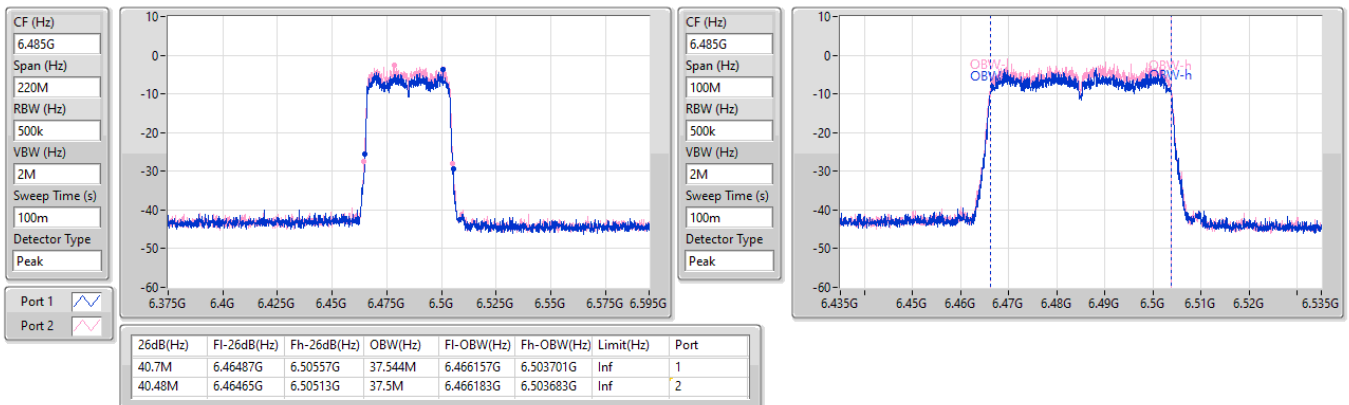


6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_2TX
EBW
6525MHz

09/05/2025

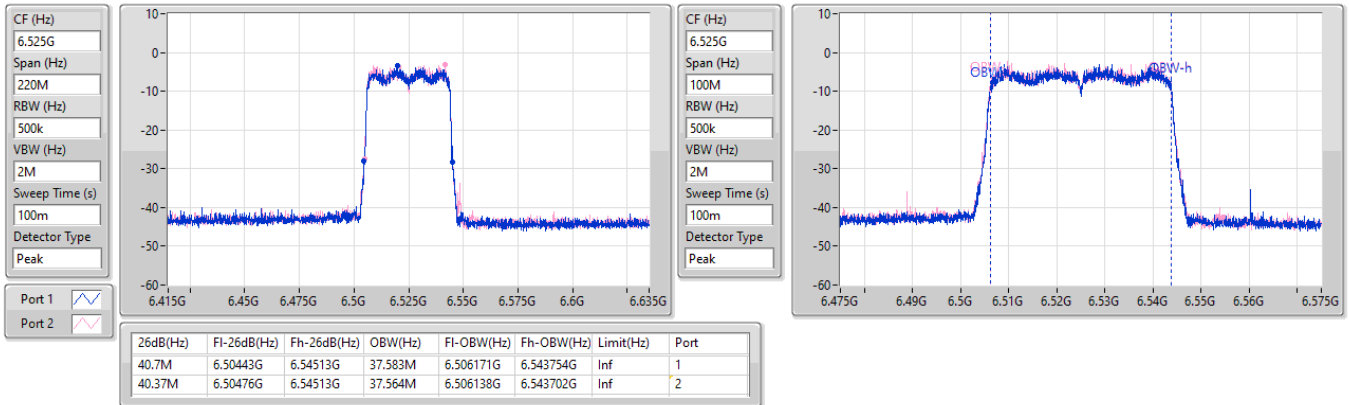
6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_2TX
EBW
6565MHz

09/05/2025

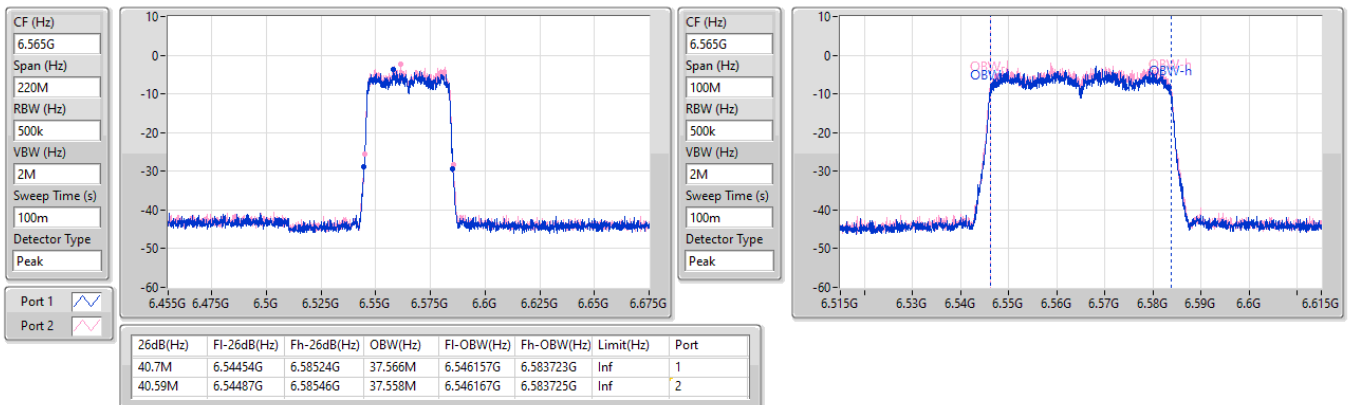


6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6685MHz

09/05/2025

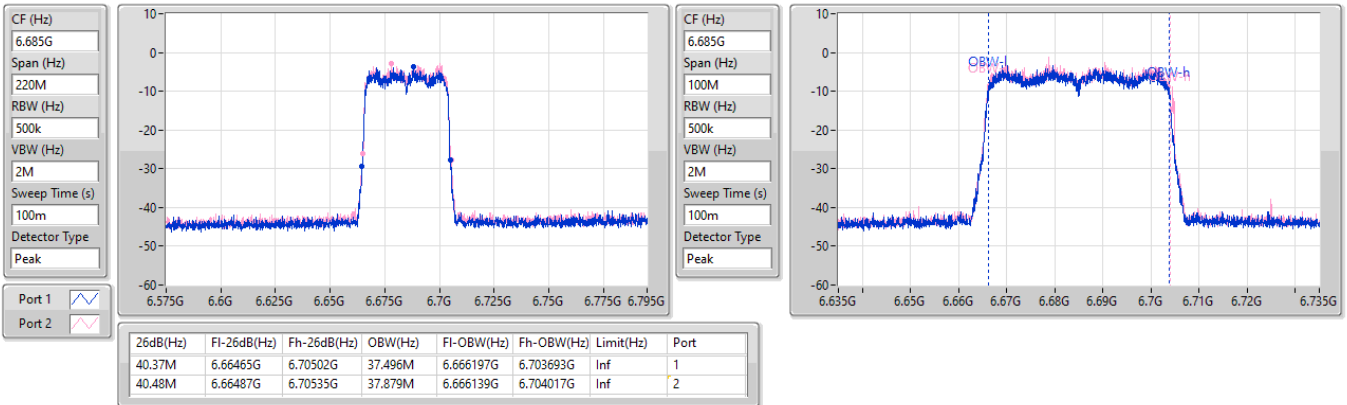


6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6885MHz

09/05/2025


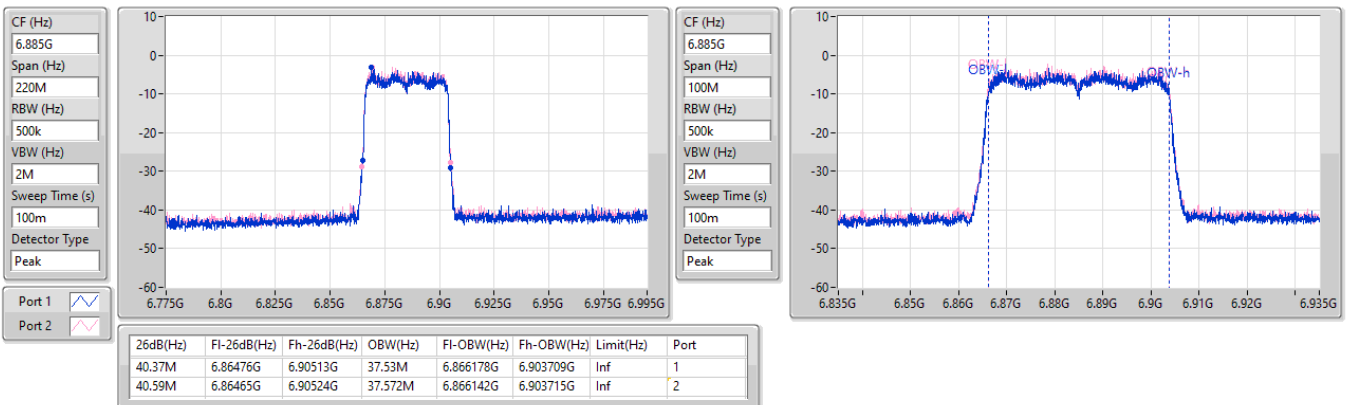


6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6925MHz

09/05/2025

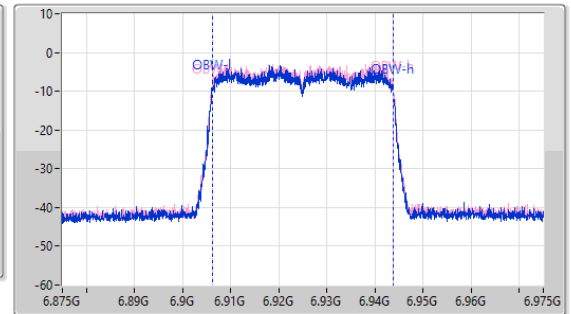
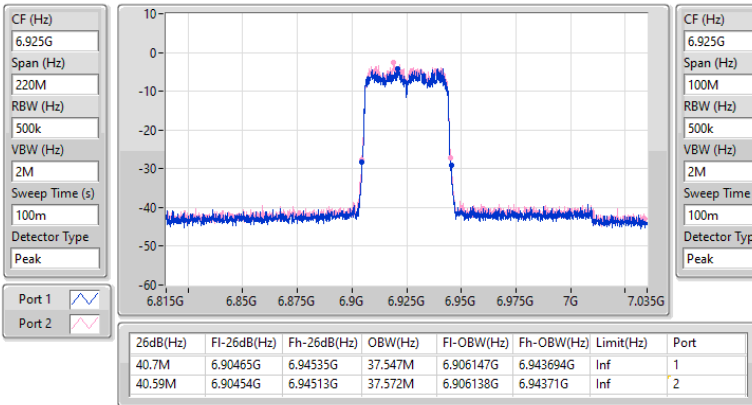


6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

EBW



7005MHz

09/05/2025

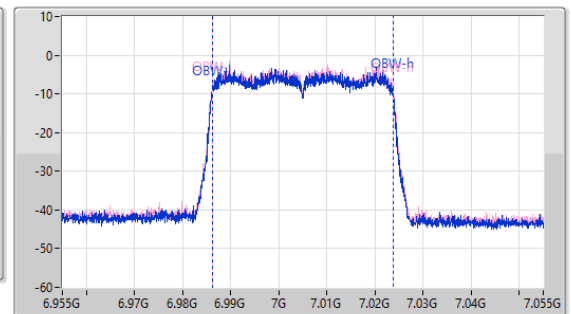
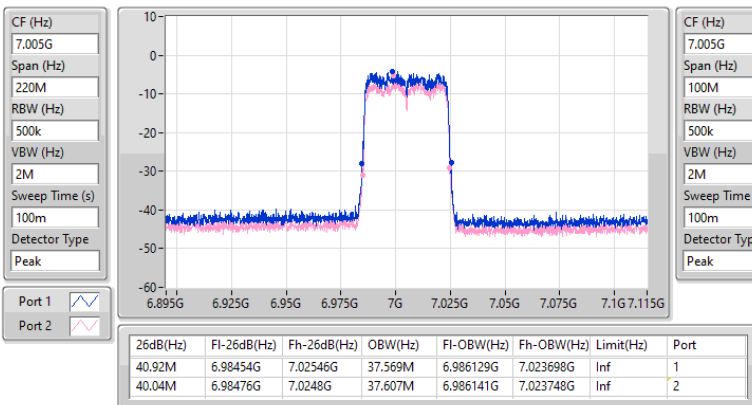


6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_2TX
EBW
7085MHz

09/05/2025

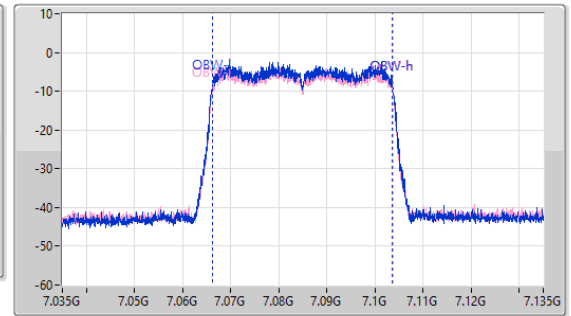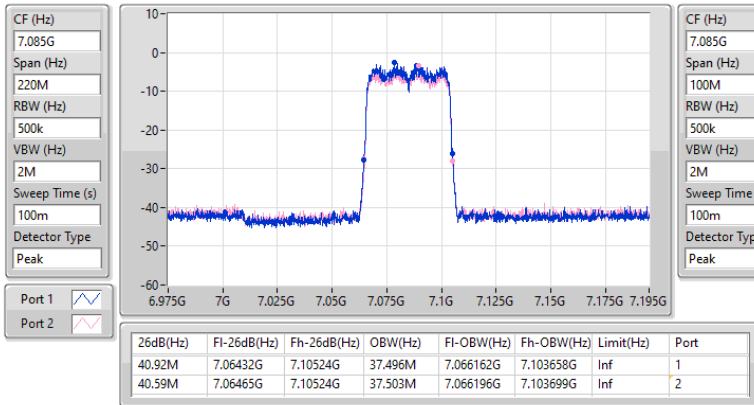
5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_2TX
EBW
5985MHz

09/05/2025

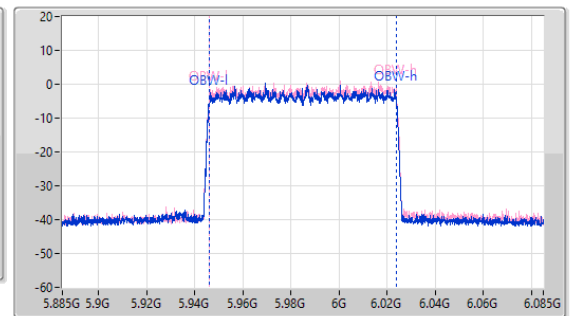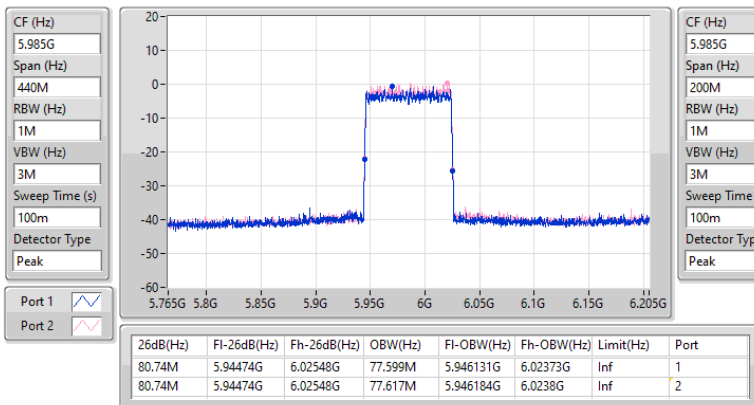


5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

6225MHz

09/05/2025

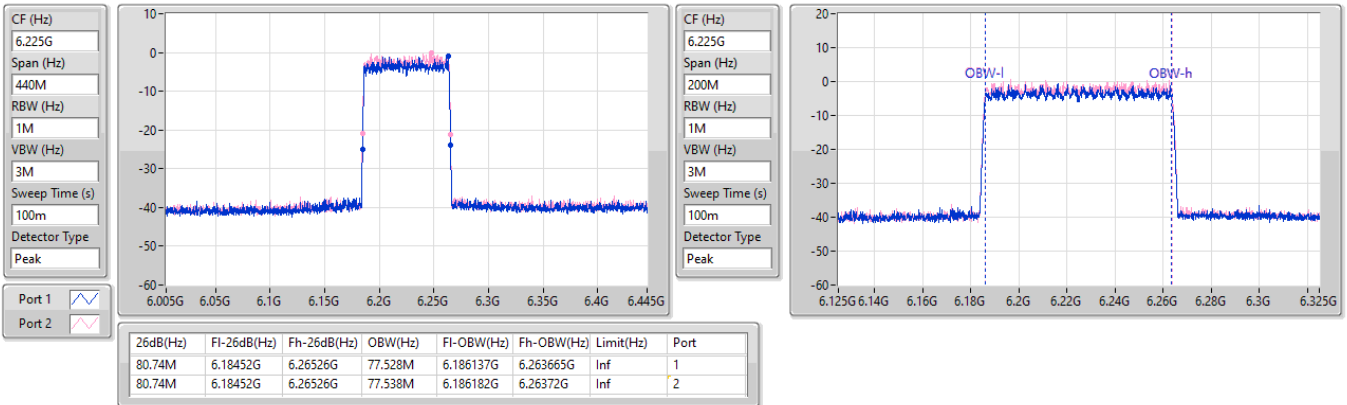


5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

EBW


6385MHz

09/05/2025

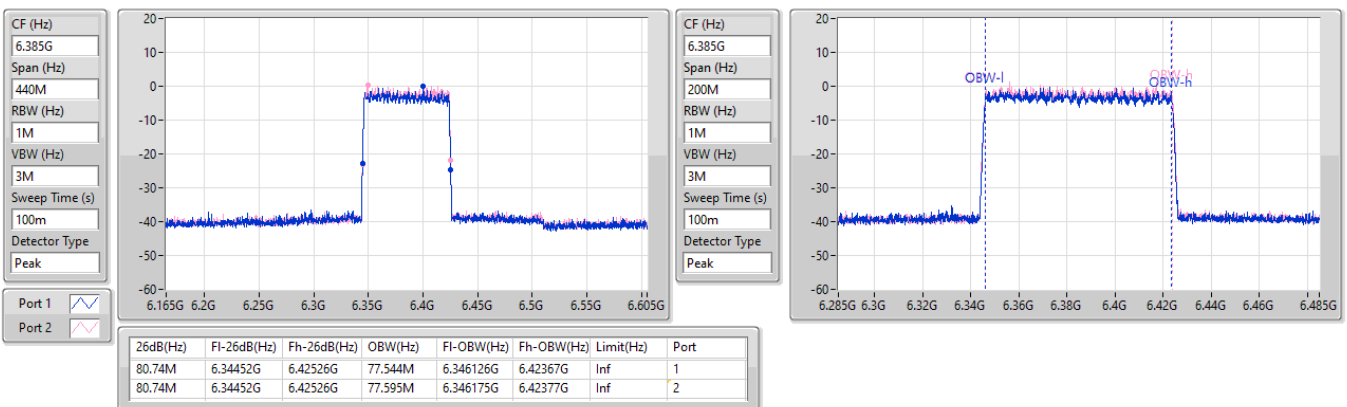


6.425-6.525GHz_802.11ax HEW80_Nss1,(MCS0)_2TX
EBW
6465MHz

09/05/2025


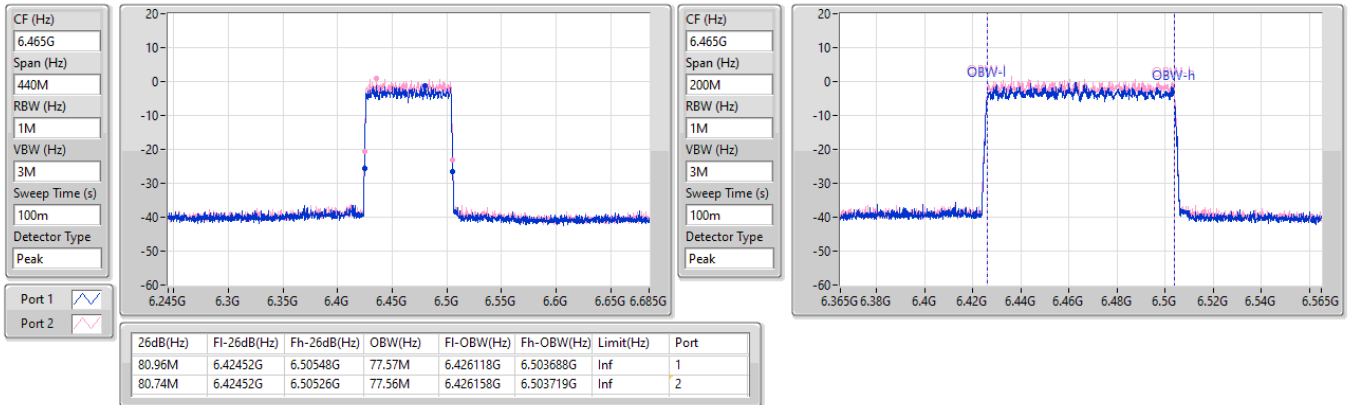

6.425-6.525GHz_802.11ax HEW80_Nss1,(MCS0)_2TX
EBW
6545MHz

09/05/2025


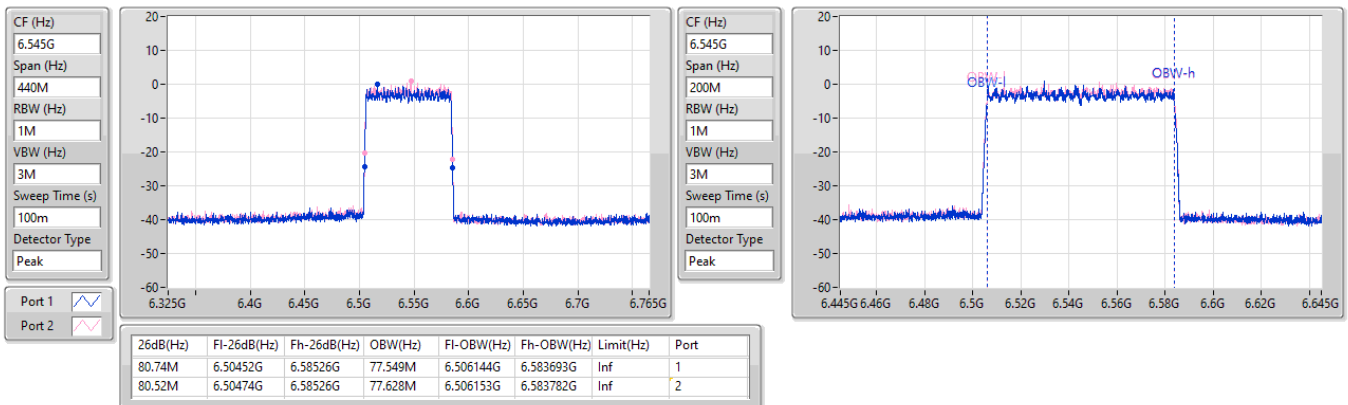


6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_2TX
EBW
6625MHz

09/05/2025

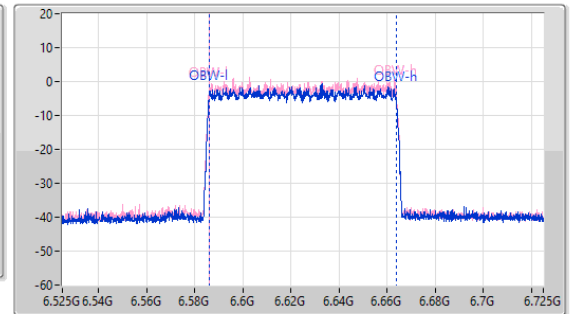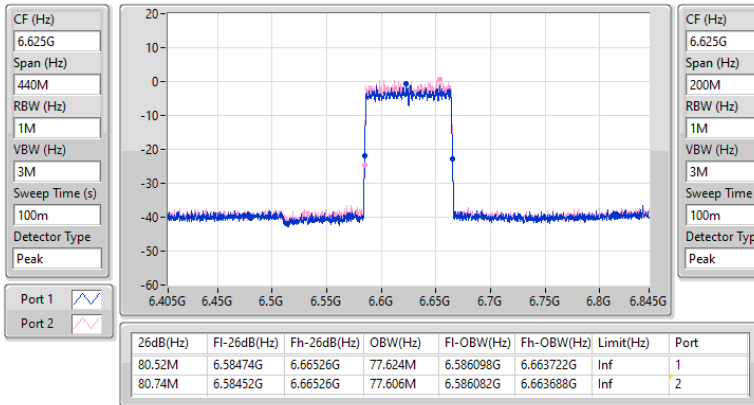
6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_2TX
EBW
6705MHz

09/05/2025

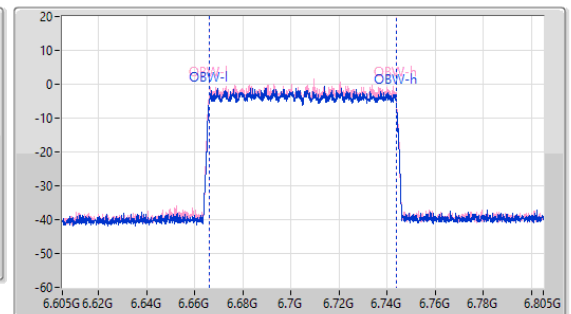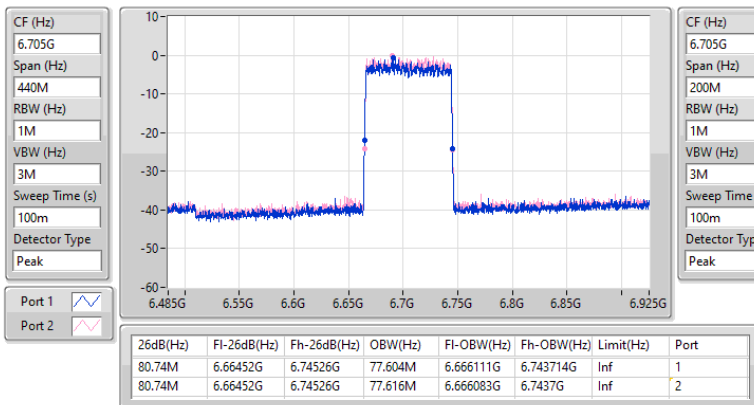


6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

6785MHz

09/05/2025

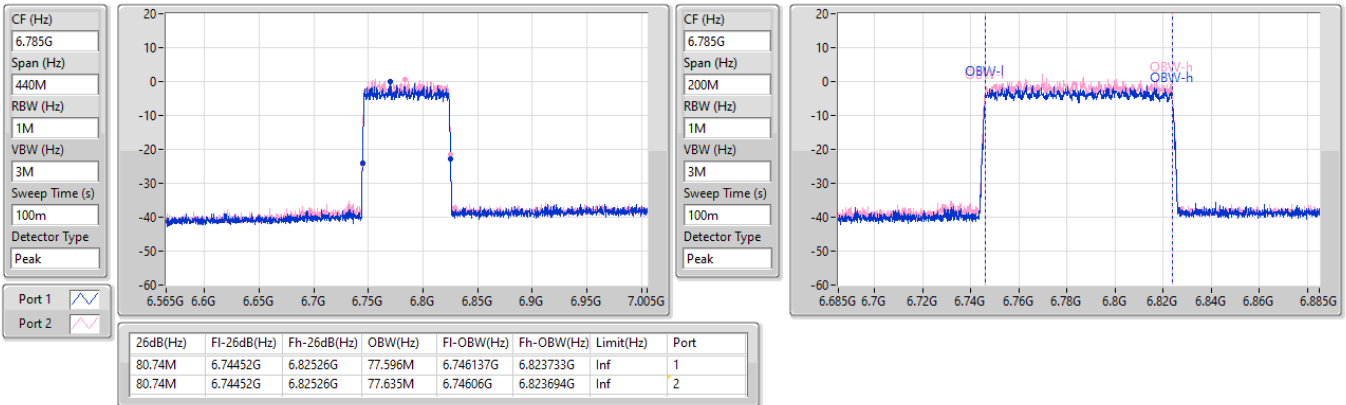


6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

6865MHz

09/05/2025

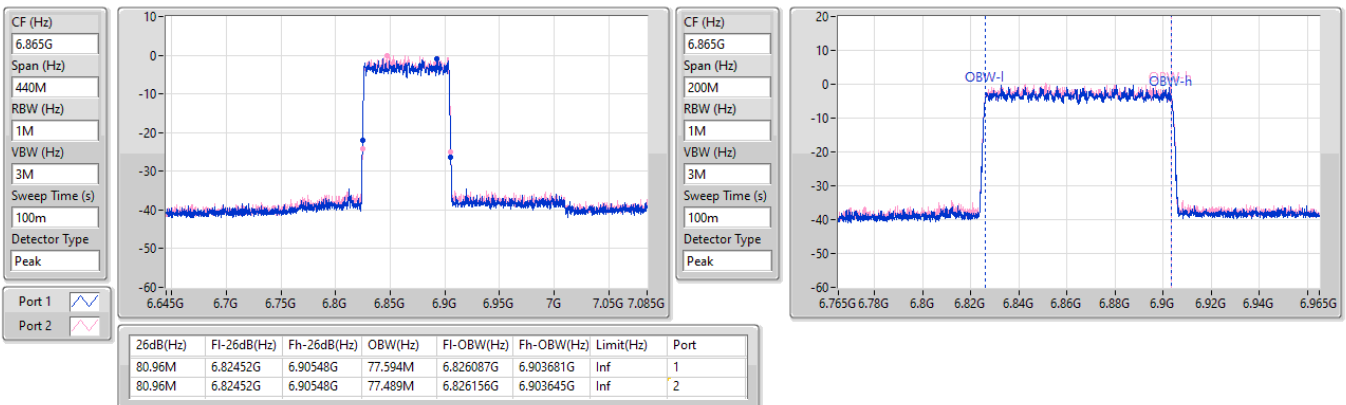


6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

6945MHz

09/05/2025

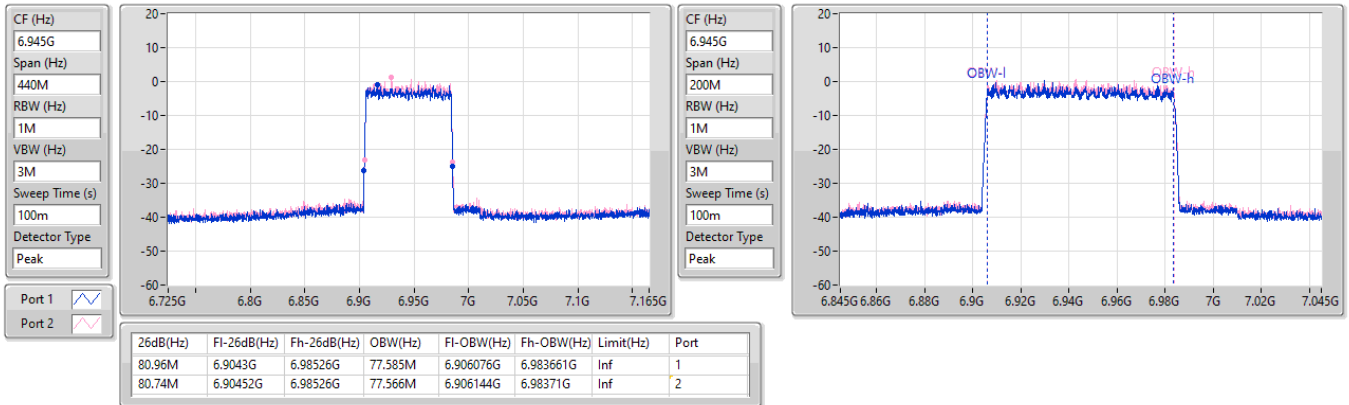


6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

7025MHz

09/05/2025

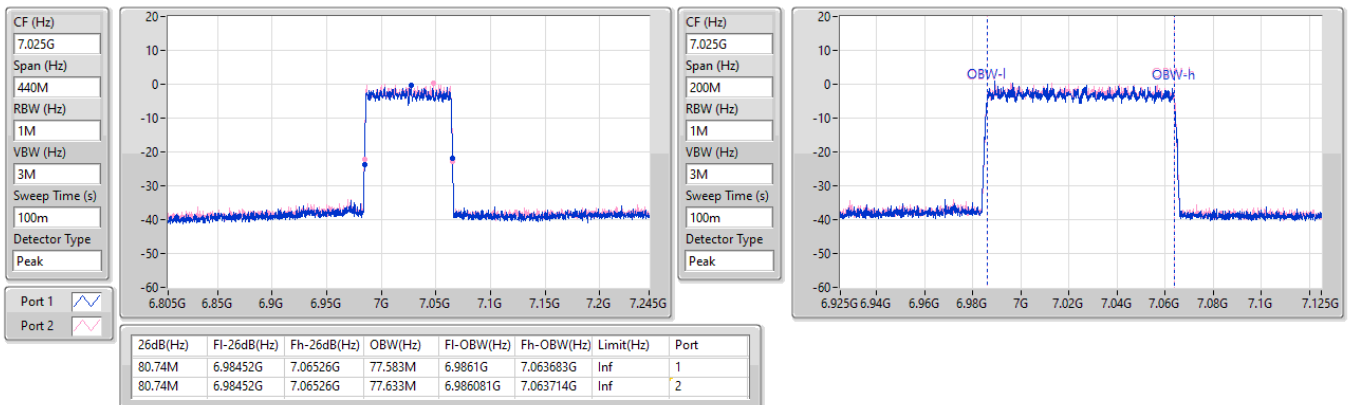

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	4.40	0.00275	9.40	0.00871
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	4.40	0.00275	12.41	0.01742
802.11ax HEW40_Nss1,(MCS0)_2TX	7.43	0.00553	12.43	0.01750
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	7.43	0.00553	15.44	0.03499
802.11ax HEW80_Nss1,(MCS0)_2TX	10.34	0.01081	15.34	0.03420
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	10.34	0.01081	18.35	0.06839
6.425-6.525GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	4.46	0.00279	9.46	0.00883
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	4.46	0.00279	12.47	0.01766
802.11ax HEW40_Nss1,(MCS0)_2TX	7.46	0.00557	12.46	0.01762
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	7.46	0.00557	15.47	0.03524
802.11ax HEW80_Nss1,(MCS0)_2TX	10.68	0.01169	15.68	0.03698
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	10.68	0.01169	18.69	0.07396
6.525-6.875GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	4.38	0.00274	9.38	0.00867
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	4.38	0.00274	12.39	0.01734
802.11ax HEW40_Nss1,(MCS0)_2TX	7.49	0.00561	12.49	0.01774
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	7.49	0.00561	15.50	0.03548
802.11ax HEW80_Nss1,(MCS0)_2TX	10.37	0.01089	15.37	0.03443
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	10.37	0.01089	18.38	0.06887
6.875-7.125GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	4.28	0.00268	9.28	0.00847
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	4.28	0.00268	12.29	0.01694
802.11ax HEW40_Nss1,(MCS0)_2TX	7.57	0.00571	12.57	0.01807
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	7.57	0.00571	15.58	0.03614
802.11ax HEW80_Nss1,(MCS0)_2TX	10.41	0.01099	15.41	0.03475
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	10.41	0.01099	18.42	0.06950

**Result**

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5955MHz	Pass	5.00	0.38	1.56	4.02	9.02	24.00
6195MHz	Pass	5.00	0.66	2.02	4.40	9.40	24.00
6415MHz	Pass	5.00	0.47	1.98	4.30	9.30	24.00
6435MHz	Pass	5.00	0.61	2.06	4.41	9.41	24.00
6475MHz	Pass	5.00	0.72	2.07	4.46	9.46	24.00
6515MHz	Pass	5.00	1.04	1.51	4.29	9.29	24.00
6535MHz	Pass	5.00	1.11	1.48	4.31	9.31	24.00
6695MHz	Pass	5.00	0.63	1.57	4.14	9.14	24.00
6875MHz	Pass	5.00	0.96	1.74	4.38	9.38	24.00
6895MHz	Pass	5.00	0.76	1.62	4.22	9.22	24.00
6995MHz	Pass	5.00	1.01	1.52	4.28	9.28	24.00
7095MHz	Pass	5.00	1.53	0.68	4.14	9.14	24.00
7115MHz	Pass	5.00	0.63	1.70	4.21	9.21	24.00
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5965MHz	Pass	5.00	3.56	4.52	7.08	12.08	24.00
6205MHz	Pass	5.00	3.76	4.90	7.38	12.38	24.00
6405MHz	Pass	5.00	3.89	4.89	7.43	12.43	24.00
6445MHz	Pass	5.00	3.18	4.70	7.02	12.02	24.00
6485MHz	Pass	5.00	3.48	5.21	7.44	12.44	24.00
6525MHz	Pass	5.00	4.38	4.52	7.46	12.46	24.00
6565MHz	Pass	5.00	4.02	4.89	7.49	12.49	24.00
6685MHz	Pass	5.00	3.87	4.59	7.26	12.26	24.00
6885MHz	Pass	5.00	4.04	4.57	7.32	12.32	24.00
6925MHz	Pass	5.00	4.01	5.03	7.56	12.56	24.00
7005MHz	Pass	5.00	4.02	4.54	7.30	12.30	24.00
7085MHz	Pass	5.00	5.04	4.03	7.57	12.57	24.00
802.11ax HEW80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5985MHz	Pass	5.00	6.66	7.87	10.32	15.32	24.00
6225MHz	Pass	5.00	6.57	7.81	10.24	15.24	24.00
6385MHz	Pass	5.00	6.87	7.75	10.34	15.34	24.00
6465MHz	Pass	5.00	6.79	8.40	10.68	15.68	24.00
6545MHz	Pass	5.00	7.01	7.64	10.35	15.35	24.00
6625MHz	Pass	5.00	6.46	7.91	10.26	15.26	24.00
6705MHz	Pass	5.00	6.69	7.68	10.22	15.22	24.00
6785MHz	Pass	5.00	6.54	8.05	10.37	15.37	24.00
6865MHz	Pass	5.00	6.96	7.57	10.29	15.29	24.00
6945MHz	Pass	5.00	6.78	7.71	10.28	15.28	24.00
7025MHz	Pass	5.00	7.16	7.62	10.41	15.41	24.00
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5955MHz	Pass	8.01	0.38	1.56	4.02	12.03	24.00
6195MHz	Pass	8.01	0.66	2.02	4.40	12.41	24.00
6415MHz	Pass	8.01	0.47	1.98	4.30	12.31	24.00
6435MHz	Pass	8.01	0.61	2.06	4.41	12.42	24.00
6475MHz	Pass	8.01	0.72	2.07	4.46	12.47	24.00
6515MHz	Pass	8.01	1.04	1.51	4.29	12.30	24.00
6535MHz	Pass	8.01	1.11	1.48	4.31	12.32	24.00
6695MHz	Pass	8.01	0.63	1.57	4.14	12.15	24.00
6875MHz	Pass	8.01	0.96	1.74	4.38	12.39	24.00
6895MHz	Pass	8.01	0.76	1.62	4.22	12.23	24.00
6995MHz	Pass	8.01	1.01	1.52	4.28	12.29	24.00
7095MHz	Pass	8.01	1.53	0.68	4.14	12.15	24.00
7115MHz	Pass	8.01	0.63	1.70	4.21	12.22	24.00
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5965MHz	Pass	8.01	3.56	4.52	7.08	15.09	24.00

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6205MHz	Pass	8.01	3.76	4.90	7.38	15.39	24.00
6405MHz	Pass	8.01	3.89	4.89	7.43	15.44	24.00
6445MHz	Pass	8.01	3.18	4.70	7.02	15.03	24.00
6485MHz	Pass	8.01	3.48	5.21	7.44	15.45	24.00
6525MHz	Pass	8.01	4.38	4.52	7.46	15.47	24.00
6565MHz	Pass	8.01	4.02	4.89	7.49	15.50	24.00
6685MHz	Pass	8.01	3.87	4.59	7.26	15.27	24.00
6885MHz	Pass	8.01	4.04	4.57	7.32	15.33	24.00
6925MHz	Pass	8.01	4.01	5.03	7.56	15.57	24.00
7005MHz	Pass	8.01	4.02	4.54	7.30	15.31	24.00
7085MHz	Pass	8.01	5.04	4.03	7.57	15.58	24.00
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5985MHz	Pass	8.01	6.66	7.87	10.32	18.33	24.00
6225MHz	Pass	8.01	6.57	7.81	10.24	18.25	24.00
6385MHz	Pass	8.01	6.87	7.75	10.34	18.35	24.00
6465MHz	Pass	8.01	6.79	8.40	10.68	18.69	24.00
6545MHz	Pass	8.01	7.01	7.64	10.35	18.36	24.00
6625MHz	Pass	8.01	6.46	7.91	10.26	18.27	24.00
6705MHz	Pass	8.01	6.69	7.68	10.22	18.23	24.00
6785MHz	Pass	8.01	6.54	8.05	10.37	18.38	24.00
6865MHz	Pass	8.01	6.96	7.57	10.29	18.30	24.00
6945MHz	Pass	8.01	6.78	7.71	10.28	18.29	24.00
7025MHz	Pass	8.01	7.16	7.62	10.41	18.42	24.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	-9.06	-1.05
802.11ax HEW40_Nss1,(MCS0)_2TX	-9.04	-1.03
802.11ax HEW80_Nss1,(MCS0)_2TX	-9.11	-1.10
6.425-6.525GHz	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	-9.03	-1.02
802.11ax HEW40_Nss1,(MCS0)_2TX	-9.06	-1.05
802.11ax HEW80_Nss1,(MCS0)_2TX	-9.14	-1.13
6.525-6.875GHz	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	-9.14	-1.13
802.11ax HEW40_Nss1,(MCS0)_2TX	-9.11	-1.10
802.11ax HEW80_Nss1,(MCS0)_2TX	-9.23	-1.22
6.875-7.125GHz	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	-9.15	-1.14
802.11ax HEW40_Nss1,(MCS0)_2TX	-9.02	-1.01
802.11ax HEW80_Nss1,(MCS0)_2TX	-9.09	-1.08

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5955MHz	Pass	8.01	-13.00	-11.85	-9.43	-1.42	-1.00
6195MHz	Pass	8.01	-12.76	-11.40	-9.06	-1.05	-1.00
6415MHz	Pass	8.01	-12.91	-11.33	-9.10	-1.09	-1.00
6435MHz	Pass	8.01	-12.69	-11.33	-9.03	-1.02	-1.00
6475MHz	Pass	8.01	-12.81	-11.48	-9.13	-1.12	-1.00
6515MHz	Pass	8.01	-12.31	-11.89	-9.15	-1.14	-1.00
6535MHz	Pass	8.01	-12.29	-12.02	-9.18	-1.17	-1.00
6695MHz	Pass	8.01	-12.89	-11.87	-9.38	-1.37	-1.00
6875MHz	Pass	8.01	-12.56	-11.68	-9.14	-1.13	-1.00
6895MHz	Pass	8.01	-12.72	-11.83	-9.27	-1.26	-1.00
6995MHz	Pass	8.01	-12.37	-11.91	-9.15	-1.14	-1.00
7095MHz	Pass	8.01	-12.02	-12.89	-9.46	-1.45	-1.00
7115MHz	Pass	8.01	-12.98	-11.79	-9.36	-1.35	-1.00
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5965MHz	Pass	8.01	-12.90	-12.01	-9.46	-1.45	-1.00
6205MHz	Pass	8.01	-12.68	-11.65	-9.20	-1.19	-1.00
6405MHz	Pass	8.01	-12.45	-11.53	-9.04	-1.03	-1.00
6445MHz	Pass	8.01	-13.17	-11.78	-9.46	-1.45	-1.00
6485MHz	Pass	8.01	-13.04	-11.24	-9.12	-1.11	-1.00
6525MHz	Pass	8.01	-12.13	-11.91	-9.06	-1.05	-1.00
6565MHz	Pass	8.01	-12.57	-11.52	-9.11	-1.10	-1.00
6685MHz	Pass	8.01	-12.82	-12.06	-9.42	-1.41	-1.00
6885MHz	Pass	8.01	-12.53	-12.04	-9.35	-1.34	-1.00
6925MHz	Pass	8.01	-12.68	-11.76	-9.25	-1.24	-1.00
7005MHz	Pass	8.01	-12.66	-12.15	-9.45	-1.44	-1.00
7085MHz	Pass	8.01	-11.49	-12.54	-9.02	-1.01	-1.00
802.11ax HEW80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5985MHz	Pass	8.01	-12.87	-11.51	-9.14	-1.13	-1.00
6225MHz	Pass	8.01	-12.97	-11.61	-9.23	-1.22	-1.00
6385MHz	Pass	8.01	-12.48	-11.75	-9.11	-1.10	-1.00
6465MHz	Pass	8.01	-12.88	-11.43	-9.23	-1.22	-1.00
6545MHz	Pass	8.01	-12.44	-11.73	-9.14	-1.13	-1.00
6625MHz	Pass	8.01	-12.98	-11.60	-9.32	-1.31	-1.00
6705MHz	Pass	8.01	-12.76	-11.74	-9.32	-1.31	-1.00
6785MHz	Pass	8.01	-13.00	-11.58	-9.23	-1.22	-1.00
6865MHz	Pass	8.01	-12.55	-11.97	-9.24	-1.23	-1.00
6945MHz	Pass	8.01	-12.63	-11.71	-9.23	-1.22	-1.00
7025MHz	Pass	8.01	-12.23	-11.84	-9.09	-1.08	-1.00


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.925-6.425GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

5955MHz

09/05/2025

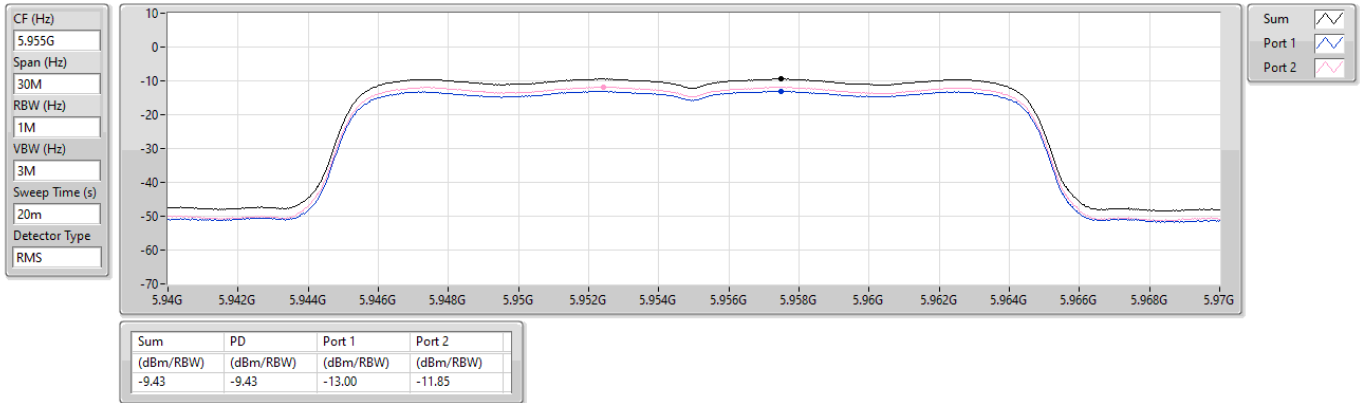


5.925-6.425GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

6195MHz

09/05/2025

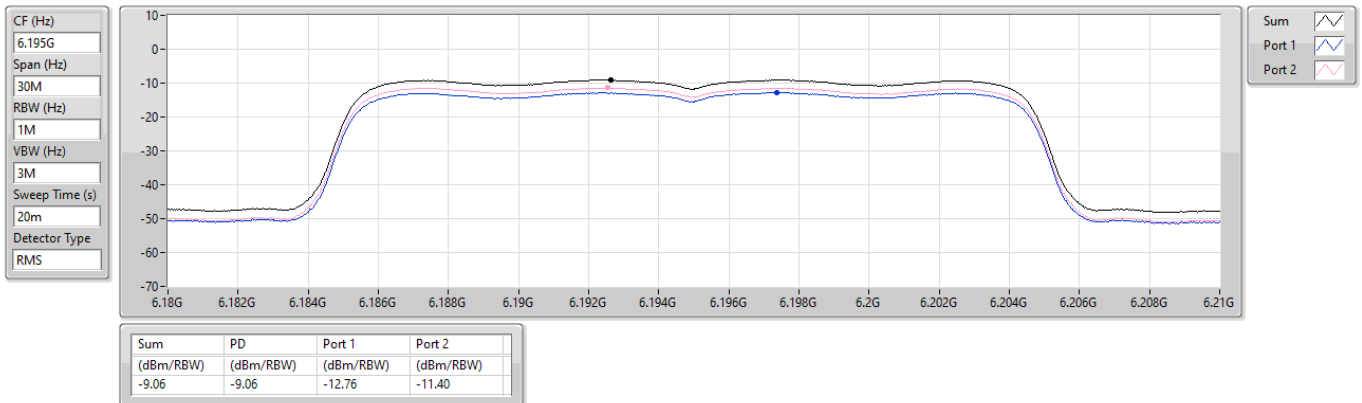


5.925-6.425GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

6415MHz

09/05/2025

CF (Hz)
6.415G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

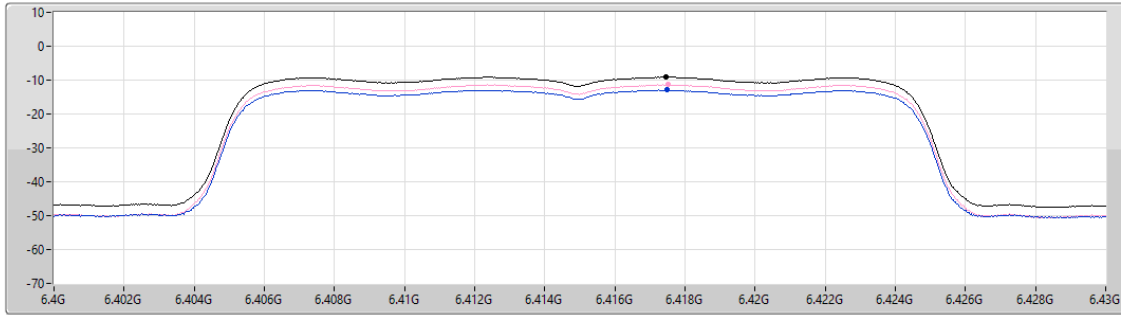

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-9.10	-9.10	-12.91	-11.33


6.425-6.525GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

6435MHz

09/05/2025

CF (Hz)
6.435G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

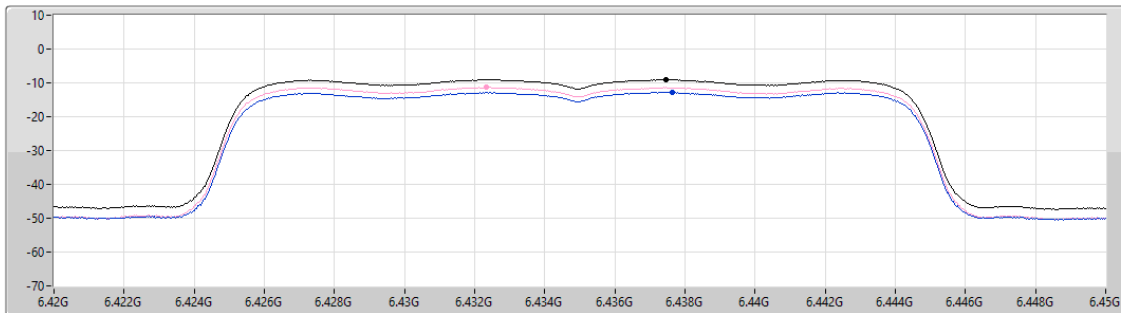

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-9.03	-9.03	-12.69	-11.33

6.425-6.525GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

6475MHz

09/05/2025

CF (Hz)
6.475G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

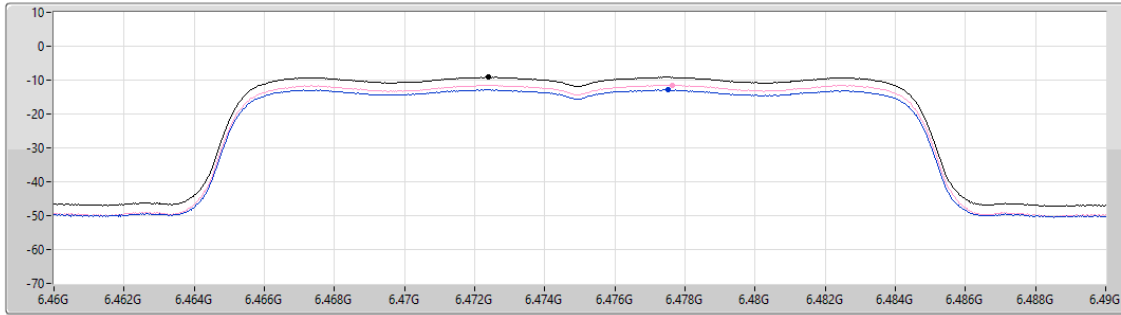

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-9.13	-9.13	-12.81	-11.48

6.425-6.525GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

6515MHz

09/05/2025

CF (Hz)
6.515G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

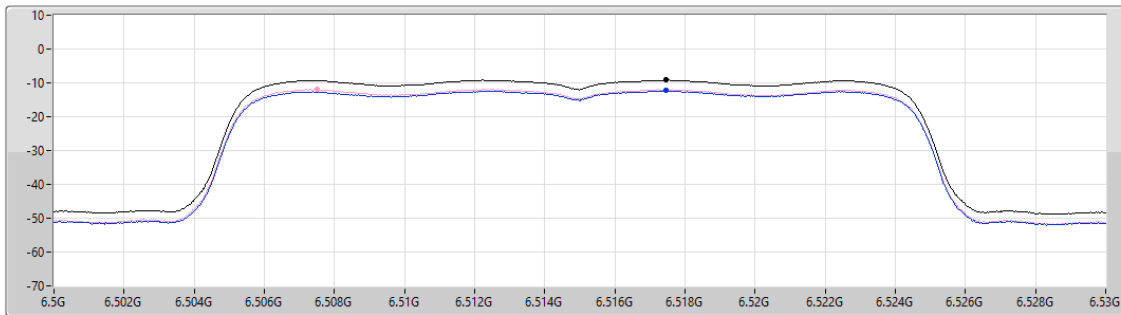

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-9.15	-9.15	-12.31	-11.89


6.525-6.875GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

6535MHz

09/05/2025

CF (Hz)
6.535G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

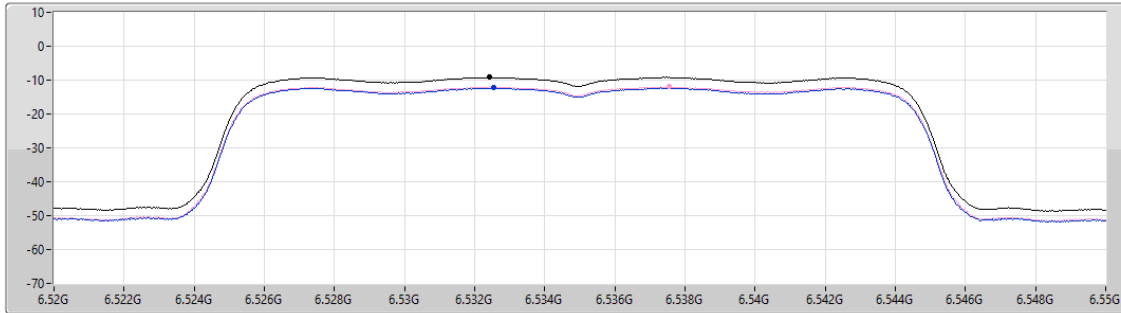

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-9.18	-9.18	-12.29	-12.02

Sum
Port 1
Port 2


6.525-6.875GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

6695MHz

09/05/2025

CF (Hz)
6.695G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

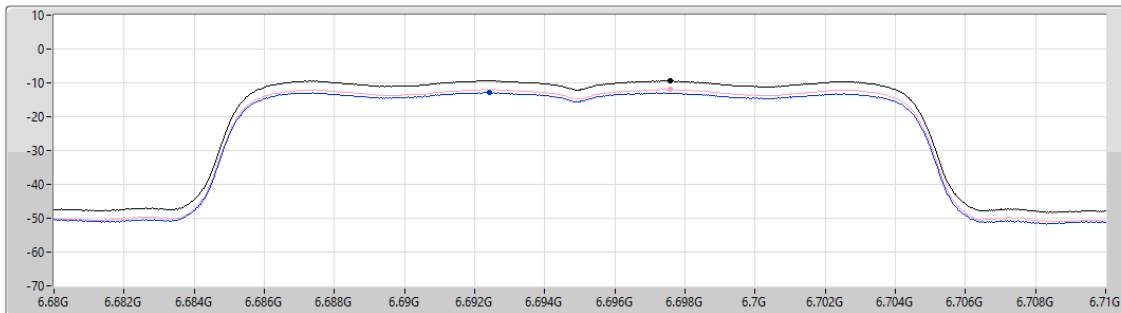

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-9.38	-9.38	-12.89	-11.87

Sum
Port 1
Port 2


6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

PSD

6875MHz

09/05/2025

CF (Hz)
6.875G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

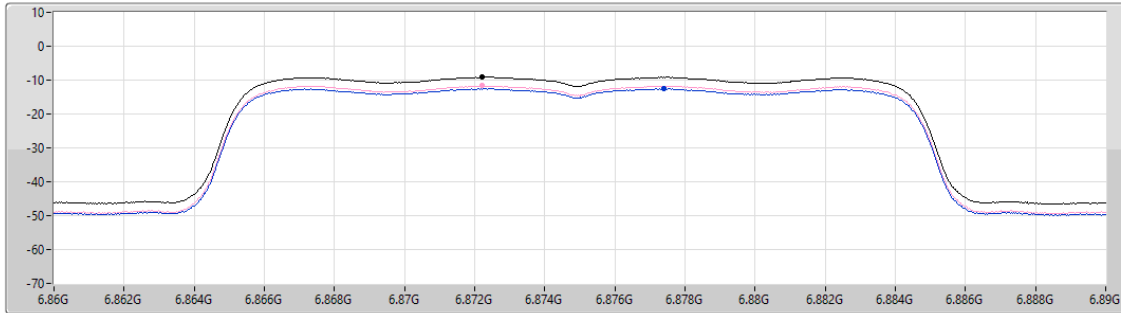

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-9.14	-9.14	-12.56	-11.68

Sum
Port 1
Port 2


6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

PSD

6895MHz

09/05/2025

CF (Hz)
6.895G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

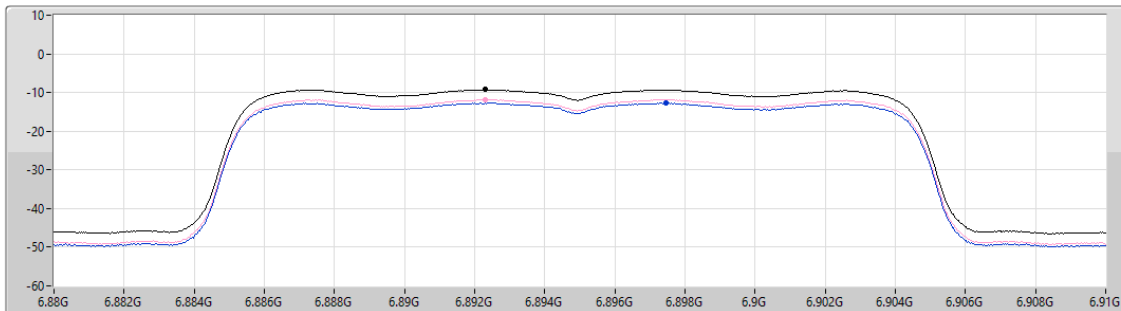

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-9.27	-9.27	-12.72	-11.83


Sum
Port 1
Port 2

6.875-7.125GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

6995MHz

09/05/2025

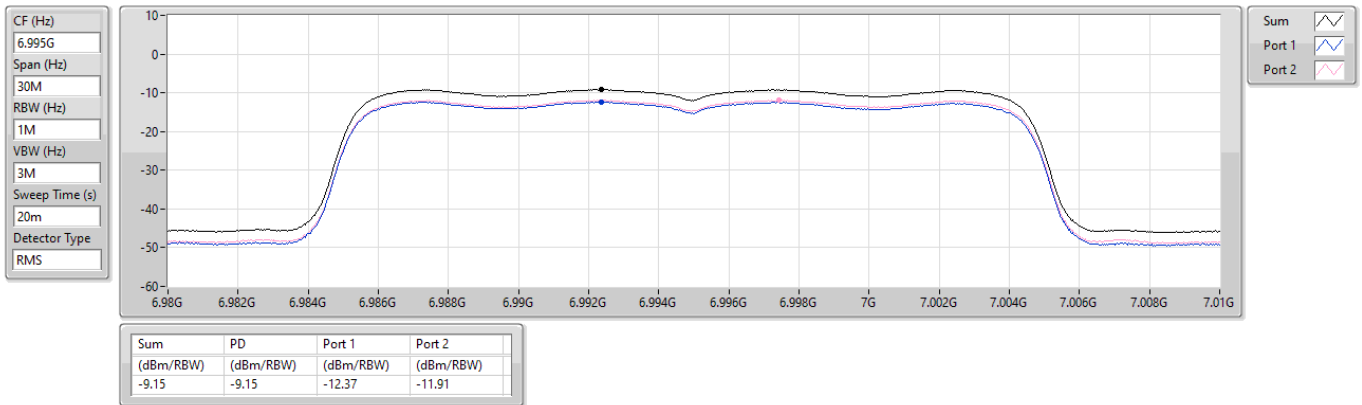


6.875-7.125GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

7095MHz

09/05/2025

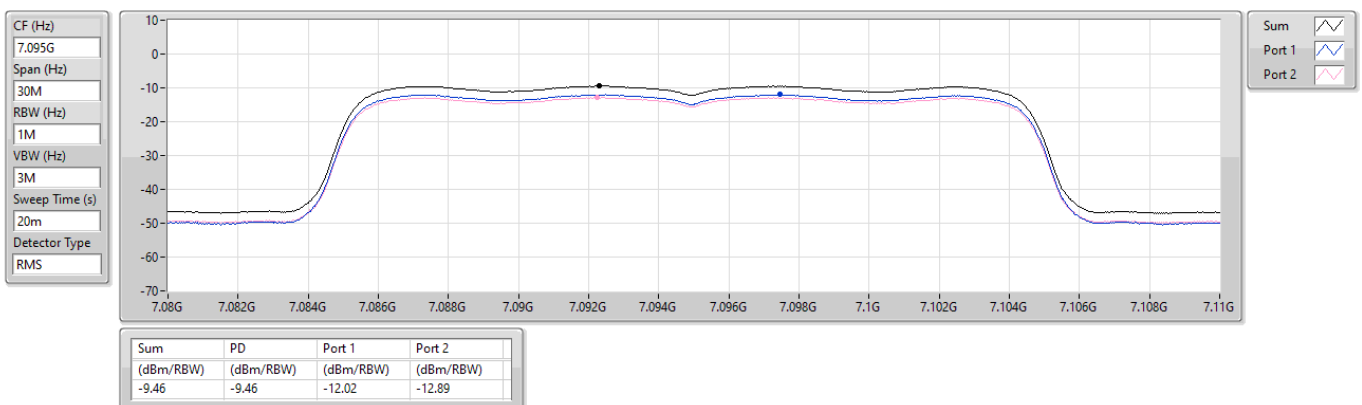


6.875-7.125GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

7115MHz

09/05/2025

CF (Hz)
7.115G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

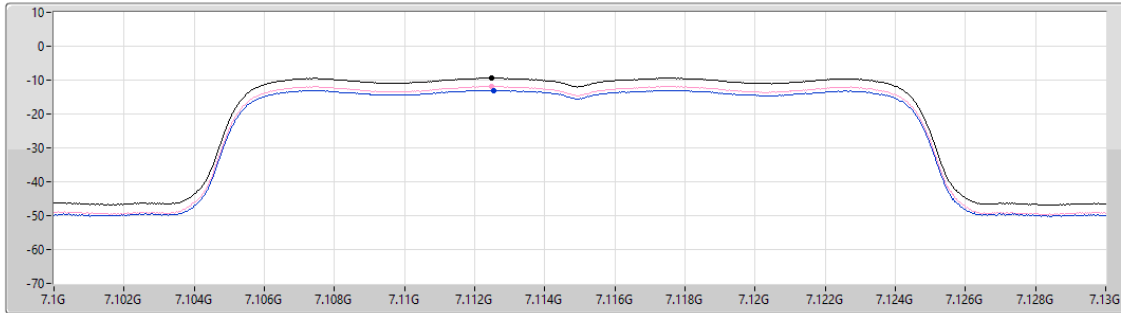

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-9.36	-9.36	-12.98	-11.79

Sum
Port 1
Port 2


5.925-6.425GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

PSD

5965MHz

09/05/2025

CF (Hz)
5.965G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

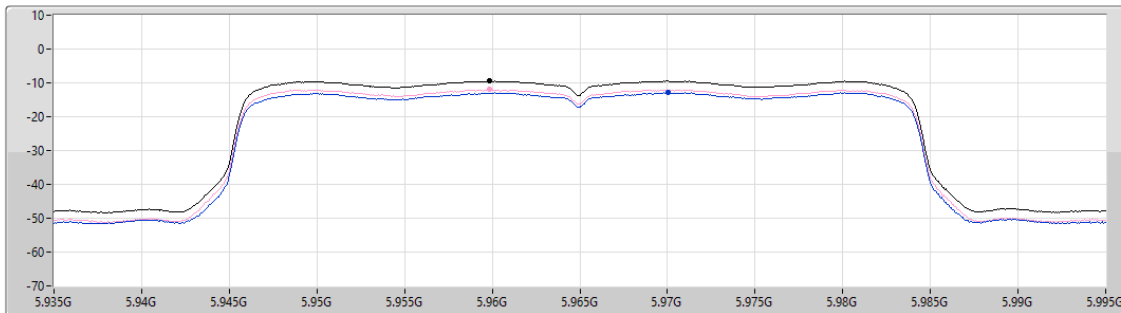

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-9.46	-9.46	-12.90	-12.01

Sum
Port 1
Port 2


5.925-6.425GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

PSD

6205MHz

09/05/2025

CF (Hz)
6.205G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

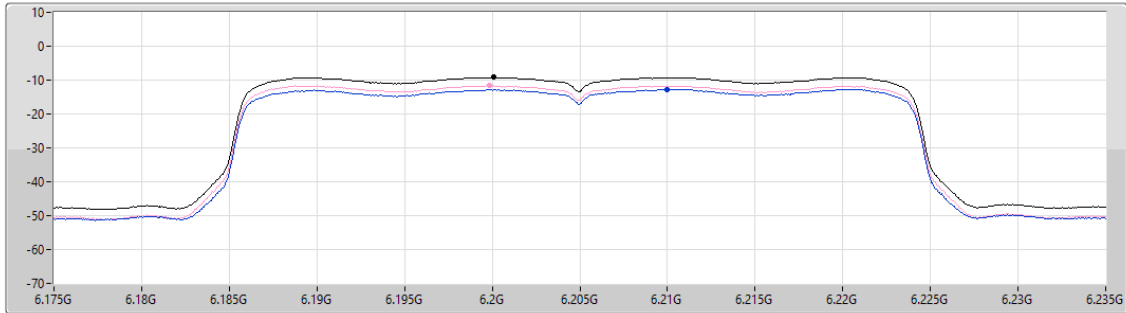

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-9.20	-9.20	-12.68	-11.65

Sum
Port 1
Port 2


5.925-6.425GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

PSD

6405MHz

09/05/2025

CF (Hz)
6.405G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

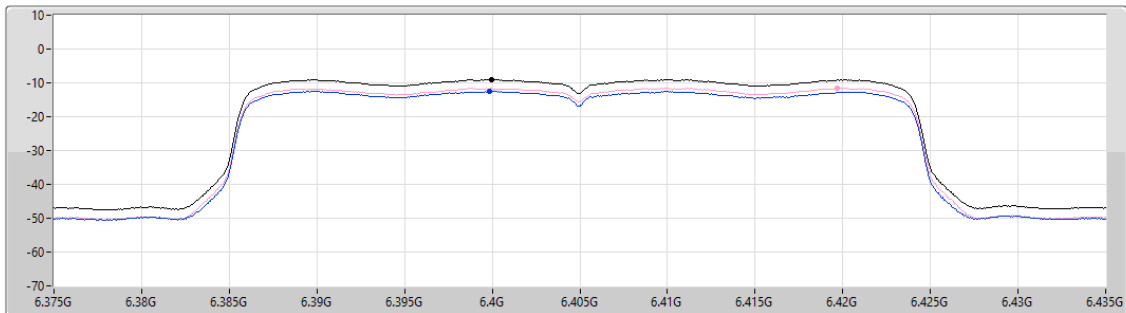

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-9.04	-9.04	-12.45	-11.53

Sum
Port 1
Port 2


6.425-6.525GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

PSD

6445MHz

09/05/2025

CF (Hz)
6.445G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

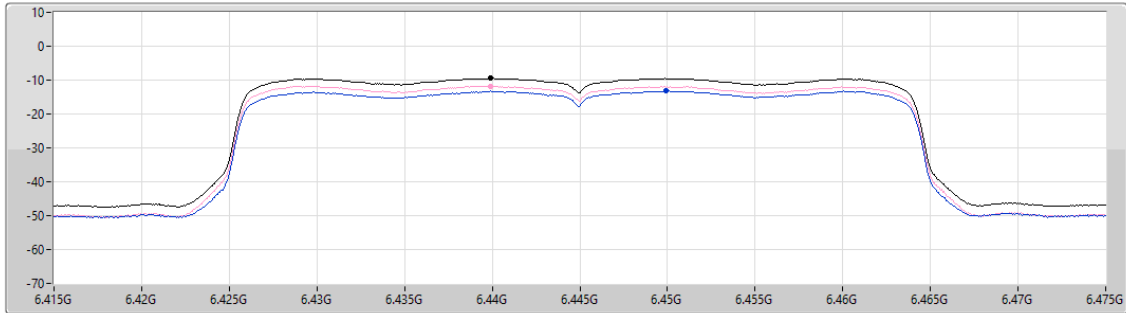

Sum
Port 1
Port 2


6.425-6.525GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

PSD

6485MHz

09/05/2025

CF (Hz)
6.485G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

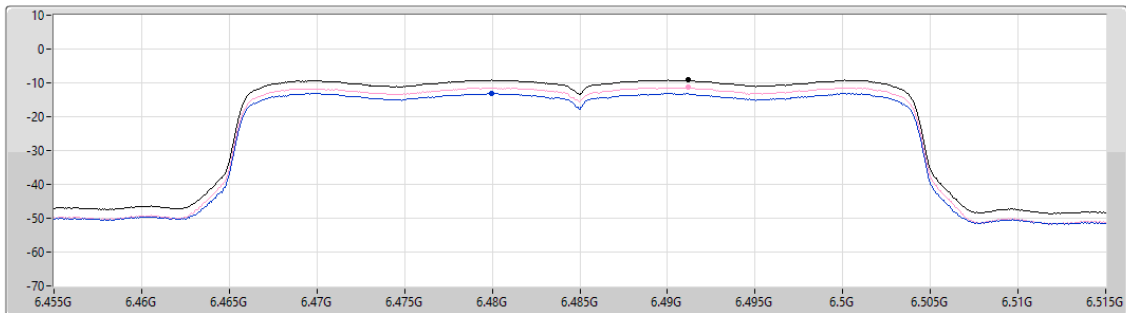

Sum
Port 1
Port 2


6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

PSD

6525MHz

09/05/2025

CF (Hz)
6.525G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

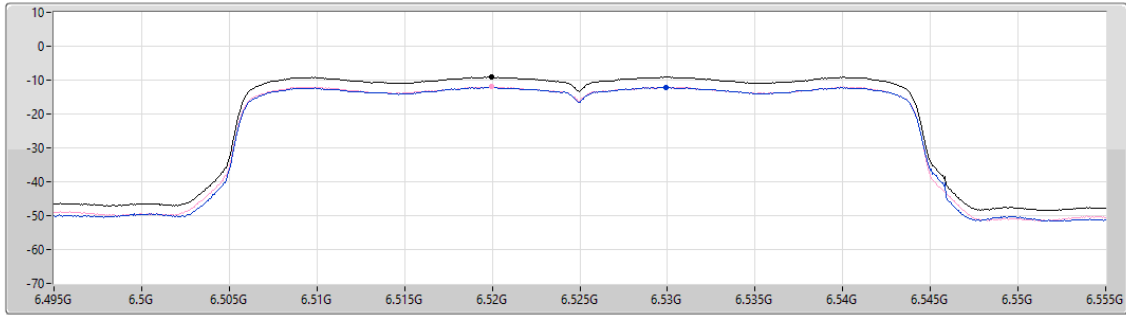

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-9.06	-9.06	-12.13	-11.91


6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

PSD

6565MHz

09/05/2025

CF (Hz)
6.565G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

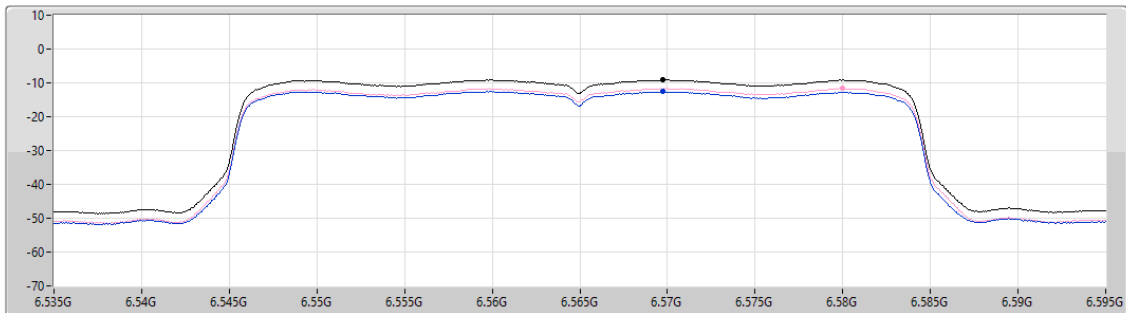

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-9.11	-9.11	-12.57	-11.52

6.525-6.875GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

PSD

6685MHz

09/05/2025

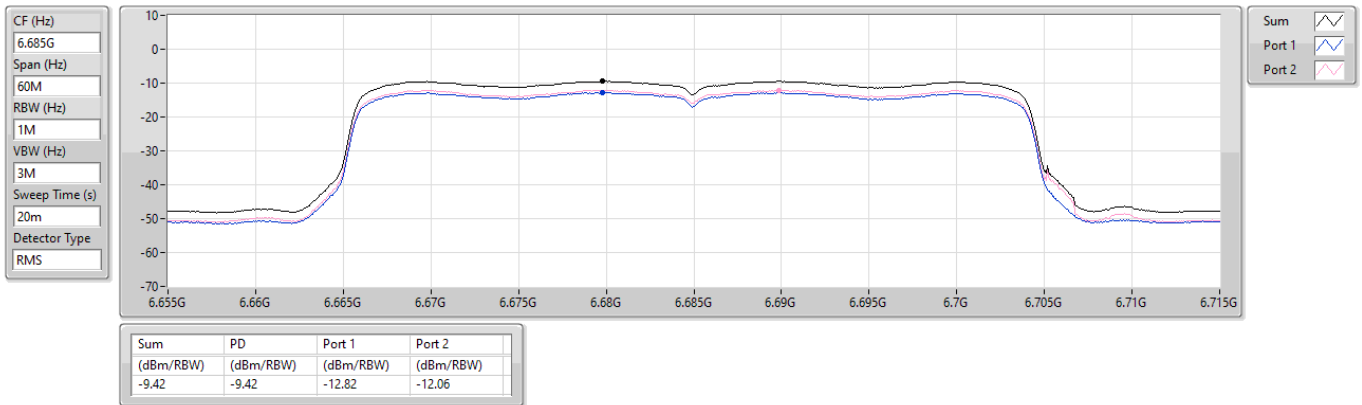


6.525-6.875GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

PSD

6885MHz

09/05/2025

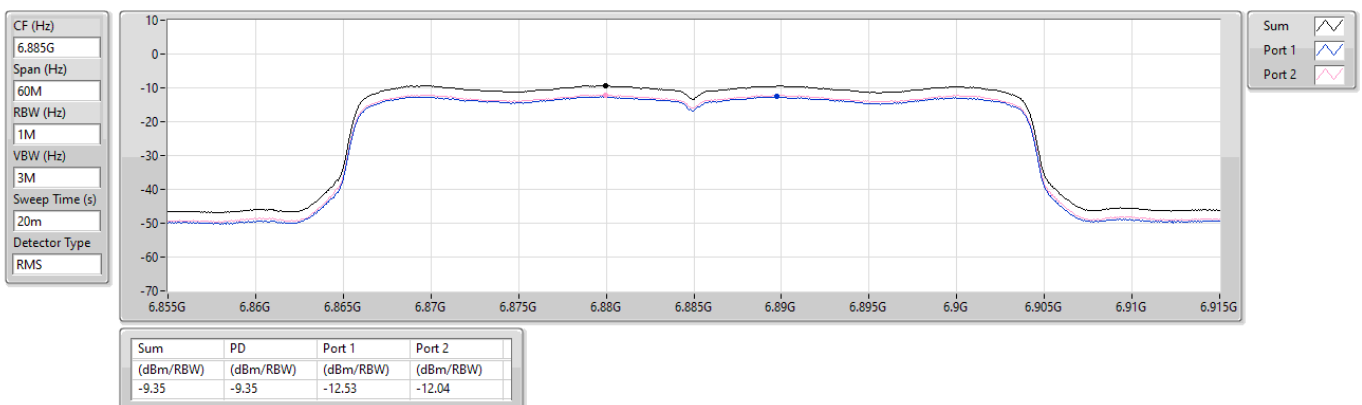


6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

PSD

6925MHz

09/05/2025

CF (Hz)
6.925G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

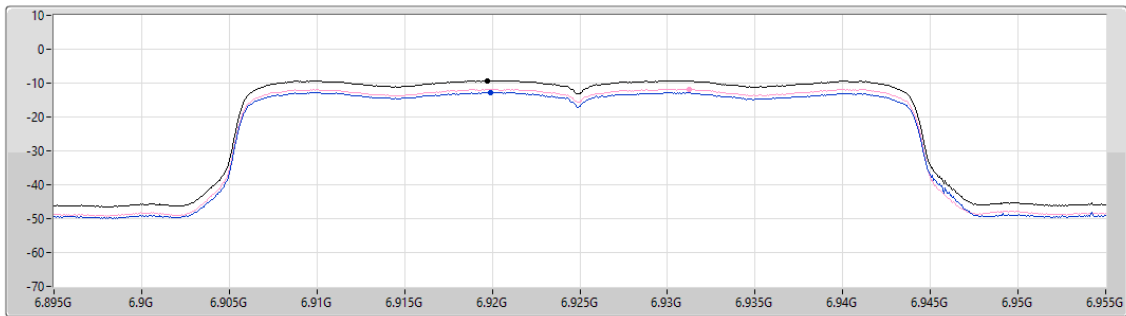

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-9.25	-9.25	-12.68	-11.76


6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

PSD

7005MHz

09/05/2025

CF (Hz)
7.005G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

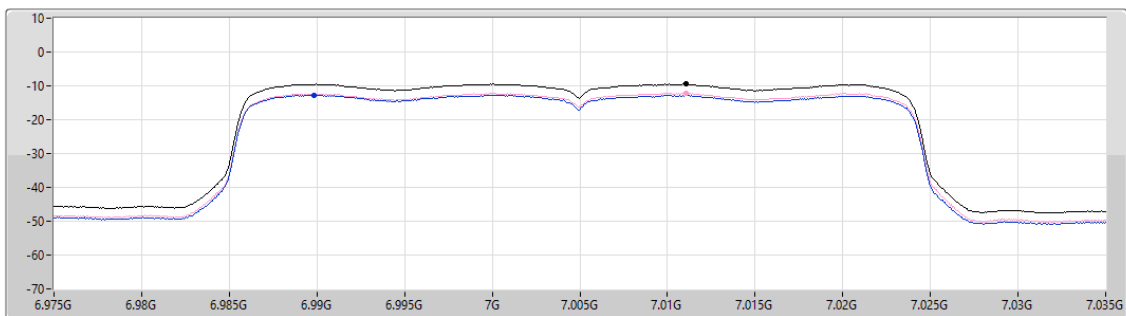

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-9.45	-9.45	-12.66	-12.15

6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

PSD

7085MHz

09/05/2025

CF (Hz)
7.085G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

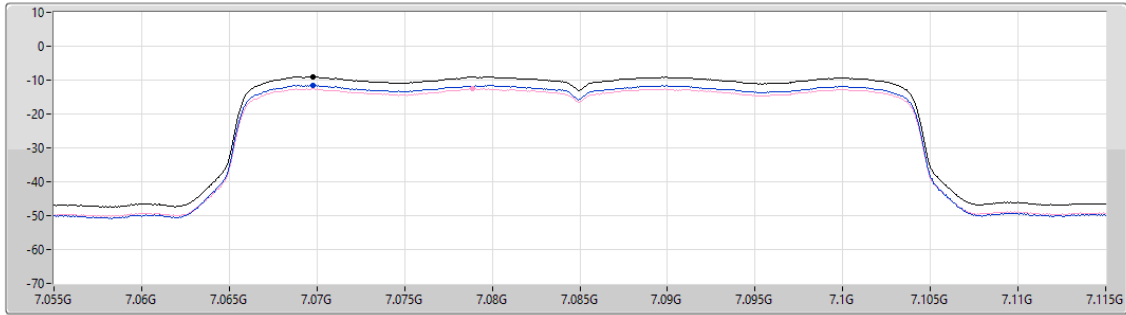

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-9.02	-9.02	-11.49	-12.54

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

PSD

5985MHz

09/05/2025

CF (Hz)
5.985G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

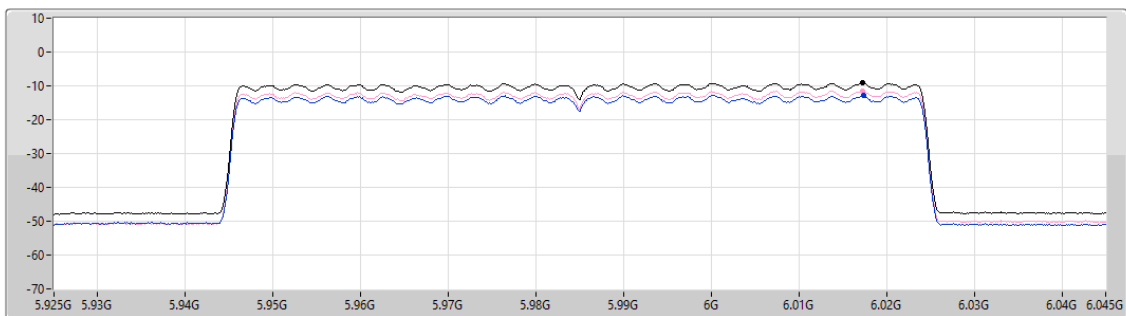

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-9.14	-9.14	-12.87	-11.51


5.925-6.425GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX

PSD

6225MHz

09/05/2025

CF (Hz)
6.225G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

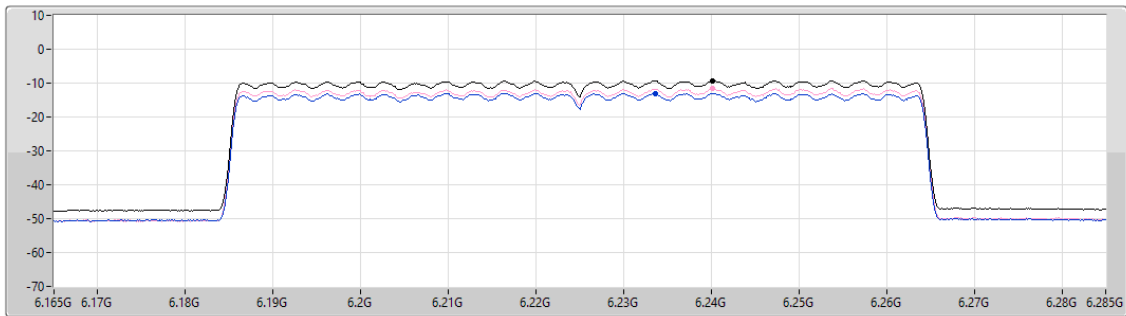

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-9.23	-9.23	-12.97	-11.61

Sum
Port 1
Port 2


5.925-6.425GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX

PSD

6385MHz

09/05/2025

CF (Hz)
6.385G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

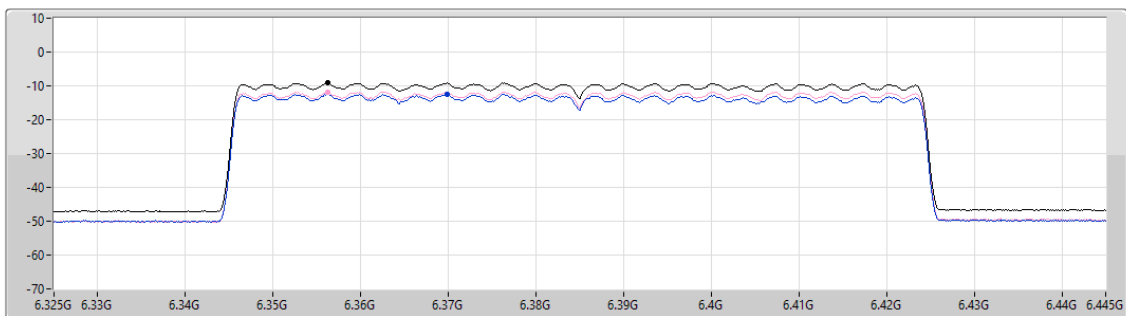

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-9.11	-9.11	-12.48	-11.75

Sum
Port 1
Port 2


6.425-6.525GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

PSD

6465MHz

09/05/2025

CF (Hz)
6.465G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

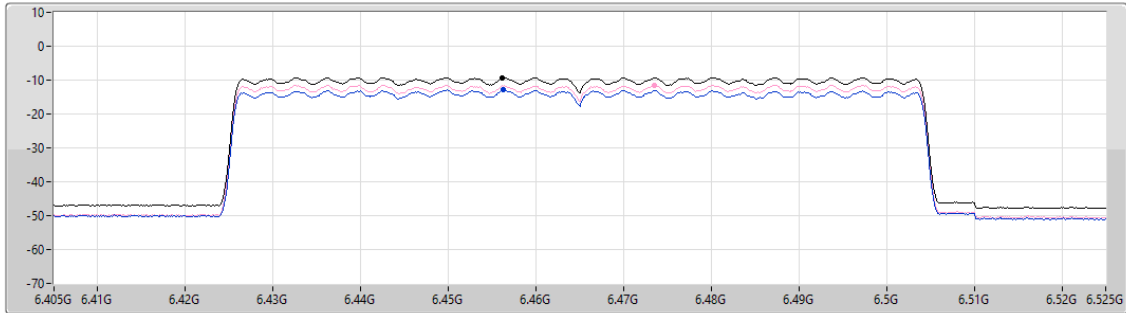

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-9.23	-9.23	-12.88	-11.43


6.425-6.525GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

PSD

6545MHz

09/05/2025

CF (Hz)
6.545G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

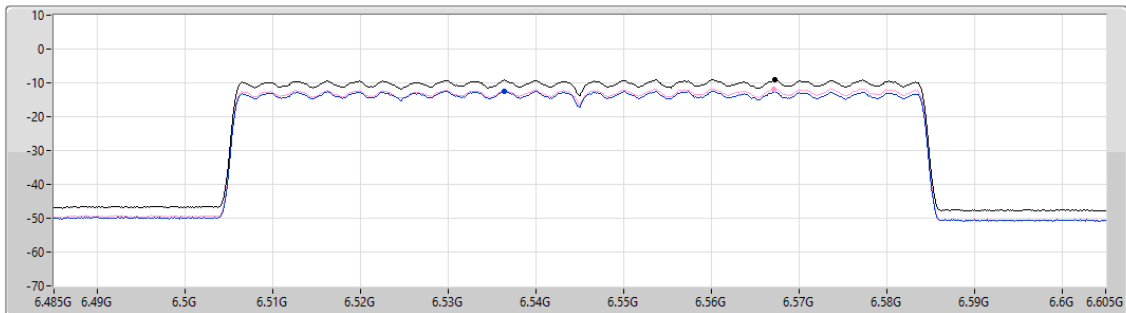

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-9.14	-9.14	-12.44	-11.73

6.525-6.875GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX

PSD

6625MHz

09/05/2025

CF (Hz)
6.625G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

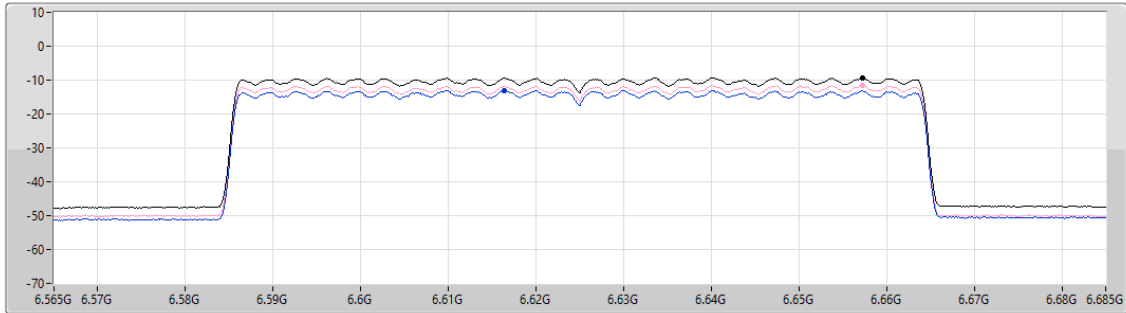

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-9.32	-9.32	-12.98	-11.60

6.525-6.875GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX

PSD

6705MHz

09/05/2025

CF (Hz)
6.705G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

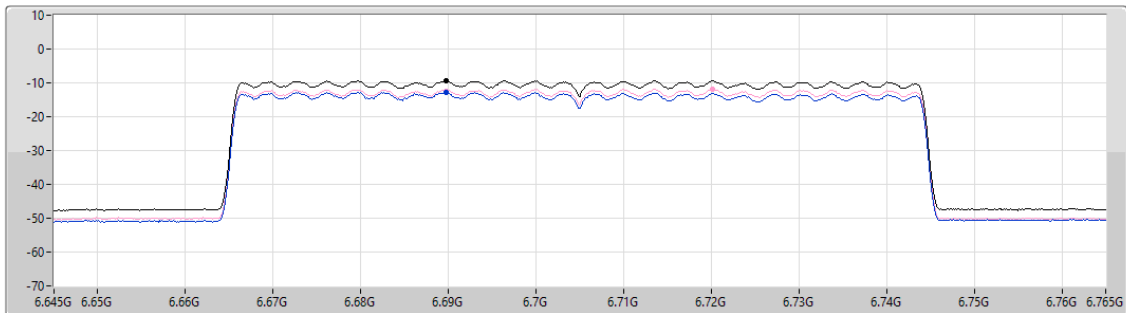

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-9.32	-9.32	-12.76	-11.74


6.525-6.875GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX

PSD

6785MHz

09/05/2025

CF (Hz)
6.785G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

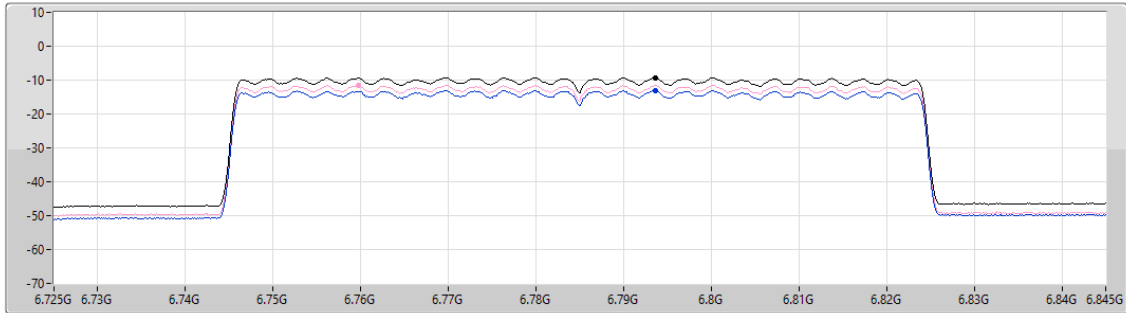

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-9.23	-9.23	-13.00	-11.58

Sum
Port 1
Port 2


6.525-6.875GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX

PSD

6865MHz

09/05/2025

CF (Hz)
6.865G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

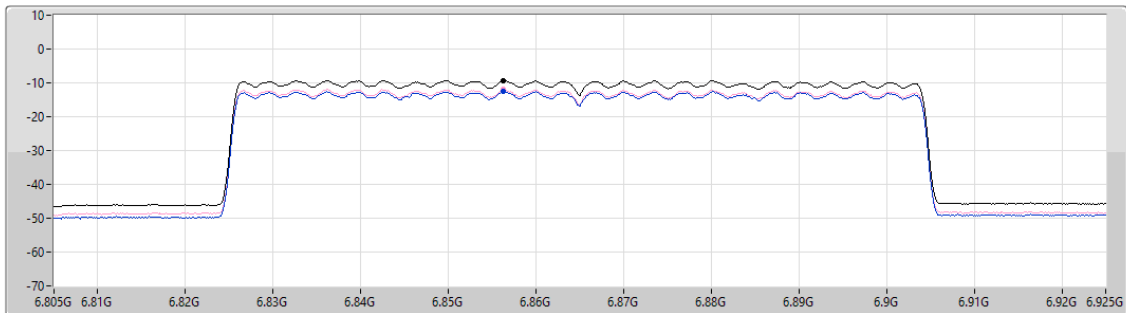

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-9.24	-9.24	-12.55	-11.97


Sum
Port 1
Port 2

6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

PSD

6945MHz

09/05/2025

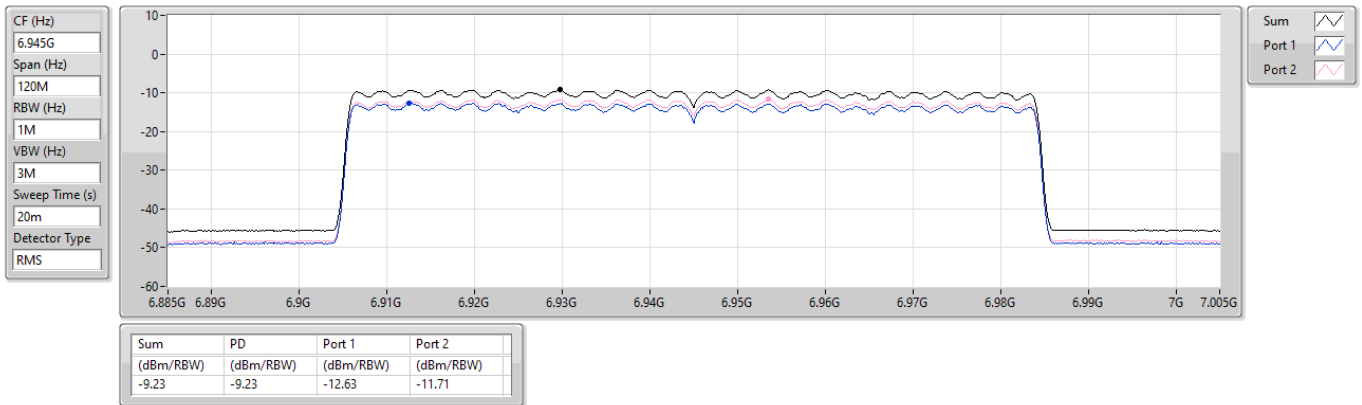


6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

PSD

7025MHz

09/05/2025

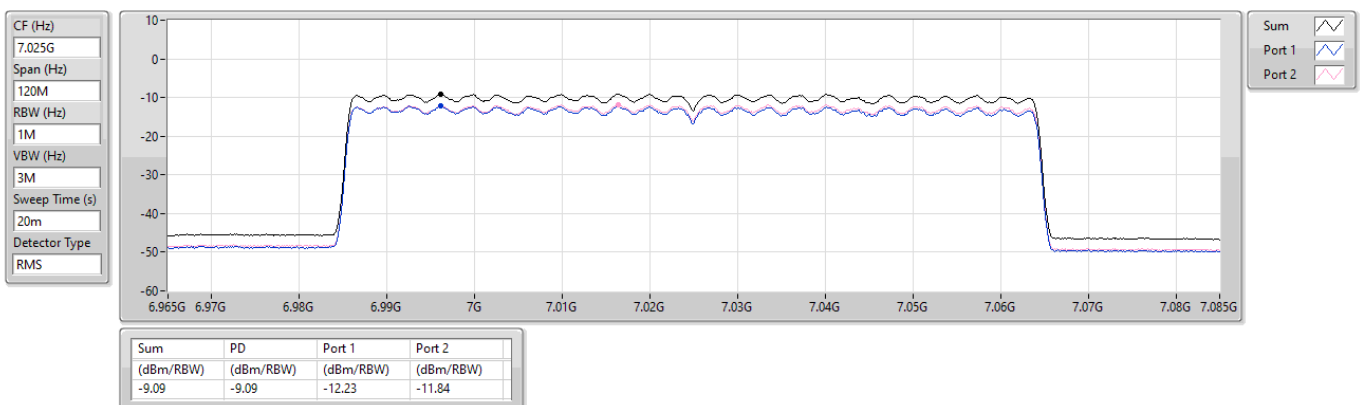




Radiated Emissions below 1GHz

Appendix E.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 2	Pass	QP	30M	38.93	40.00	-1.07	Vertical

Mode 2

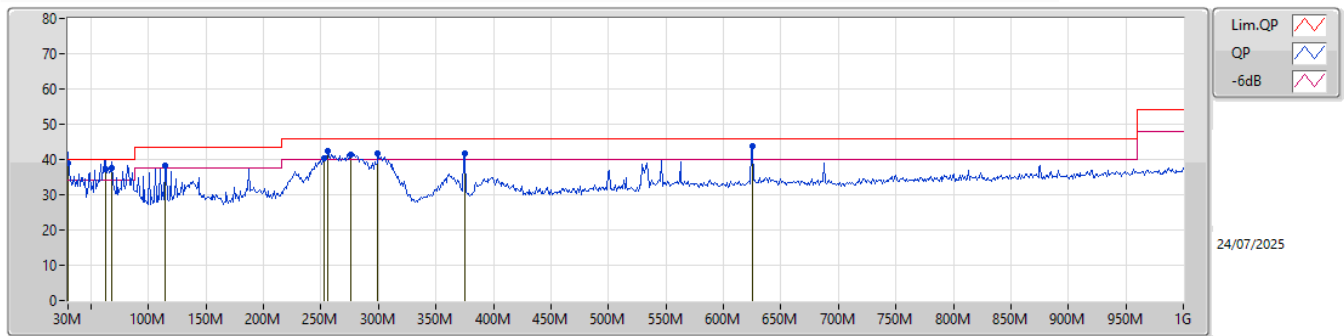

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
QP	30M	38.93	40.00	-1.07	-19.19	3	Vertical	154	1.00	"Worst"	58.12	24.35	0.89	44.43		
QP	62.98M	37.29	40.00	-2.71	-31.03	3	Vertical	36	2.00	-	68.32	12.36	1.28	44.67		
QP	67.83M	37.45	40.00	-2.55	-31.10	3	Vertical	202	2.00	-	68.55	12.28	1.28	44.66		
PK	114.39M	38.12	43.50	-5.38	-25.10	3	Vertical	24	1.00	-	63.22	17.83	1.73	44.66		
PK	253.1M	40.32	46.00	-5.68	-23.04	3	Vertical	229	2.00	-	63.36	18.72	2.63	44.39		
PK	256.01M	42.49	46.00	-3.51	-22.61	3	Vertical	237	1.50	-	65.10	19.13	2.64	44.38		
PK	275.41M	41.51	46.00	-4.49	-22.84	3	Vertical	200	2.00	-	64.35	18.77	2.75	44.36		
PK	299.66M	41.80	46.00	-4.20	-22.29	3	Vertical	183	1.25	-	64.09	19.16	2.88	44.33		
PK	375.32M	41.68	46.00	-4.32	-20.20	3	Vertical	123	1.25	-	61.88	20.78	3.22	44.20		
QP	625.58M	43.66	46.00	-2.34	-14.29	3	Vertical	120	1.50	-	57.95	25.22	4.35	43.86		

Mode 2

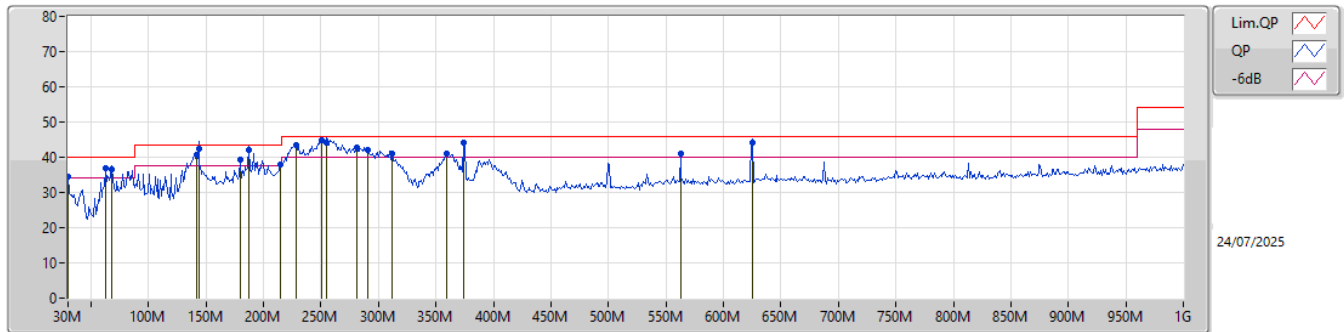

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	30M	34.58	40.00	-5.42	-19.19	3	Horizontal	0	1.00	-	53.77	24.35	0.89	44.43		
PK	62.98M	36.79	40.00	-3.21	-31.03	3	Horizontal	121	2.00	-	67.82	12.36	1.28	44.67		
QP	67.83M	36.42	40.00	-3.58	-31.10	3	Horizontal	107	3.00	-	67.52	12.28	1.28	44.66		
QP	141.55M	40.82	43.50	-2.68	-25.77	3	Horizontal	252	2.00	-	66.59	17.02	1.90	44.69		
QP	143.49M	42.43	43.50	-1.07	-25.89	3	Horizontal	252	2.00	"Worst"	68.32	16.87	1.92	44.68		
PK	179.38M	39.31	43.50	-4.19	-27.08	3	Horizontal	107	1.50	-	66.39	15.19	2.20	44.47		
QP	187.14M	42.07	43.50	-1.43	-27.26	3	Horizontal	103	1.25	-	69.33	14.97	2.26	44.49		
PK	214.3M	38.08	43.50	-5.42	-27.11	3	Horizontal	113	1.50	-	65.19	14.95	2.42	44.48		
QP	228.85M	43.45	46.00	-2.55	-25.98	3	Horizontal	118	1.00	-	69.43	15.96	2.50	44.44		
QP	250.19M	44.91	46.00	-1.09	-23.41	3	Horizontal	107	1.25	-	68.32	18.37	2.61	44.39		
QP	255.04M	44.24	46.00	-1.76	-22.74	3	Horizontal	101	1.25	-	66.98	19.00	2.64	44.38		
PK	281.23M	42.84	46.00	-3.16	-22.72	3	Horizontal	153	1.25	-	65.56	18.85	2.78	44.35		
PK	290.93M	42.02	46.00	-3.98	-22.51	3	Horizontal	164	1.00	-	64.53	19.00	2.83	44.34		
PK	312.27M	40.89	46.00	-5.11	-22.03	3	Horizontal	174	1.00	-	62.92	19.37	2.93	44.33		
PK	358.83M	40.87	46.00	-5.13	-20.64	3	Horizontal	68	1.00	-	61.51	20.51	3.13	44.28		
QP	374.35M	44.00	46.00	-2.00	-20.24	3	Horizontal	156	1.00	-	64.24	20.76	3.21	44.21		
PK	562.53M	41.01	46.00	-4.99	-15.06	3	Horizontal	356	3.00	-	56.07	24.99	3.93	43.98		
QP	625.58M	44.03	46.00	-1.97	-14.29	3	Horizontal	51	1.50	-	58.32	25.22	4.35	43.86		




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW40_Nss1,(MCS0)_2TX	Pass	RMS	5.925G	67.19	68.20	-1.01	3	Vertical	267	1.80	-

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5955MHz_TX

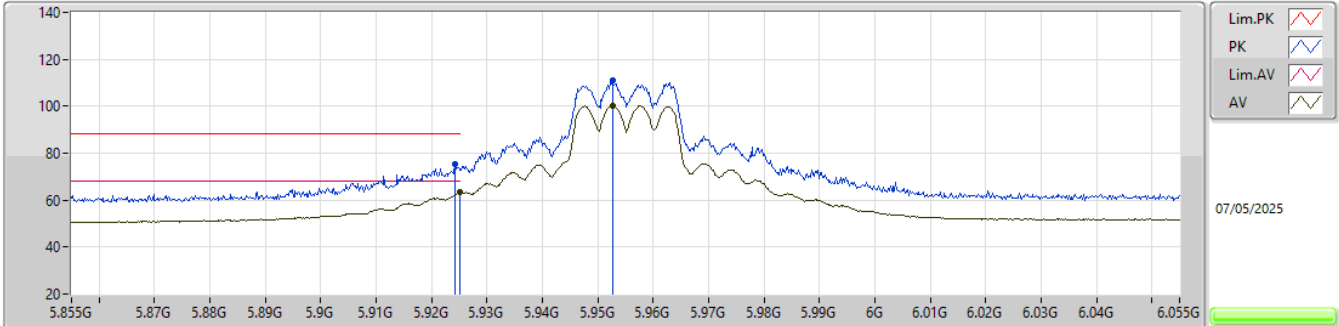


EUT X_2TX
Setting 21
01-U-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.9242G	75.09	88.20	-13.11	65.14	3	Vertical	188	1.80	-	34.95	7.44	32.44				
RMS	5.925G	63.33	68.20	-4.87	53.38	3	Vertical	188	1.80	-	34.95	7.44	32.44				
PK	5.9526G	111.04	Inf	-Inf	100.91	3	Vertical	188	1.80	-	35.11	7.46	32.44				
RMS	5.9526G	100.33	Inf	-Inf	90.20	3	Vertical	188	1.80	-	35.11	7.46	32.44				

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5955MHz_TX

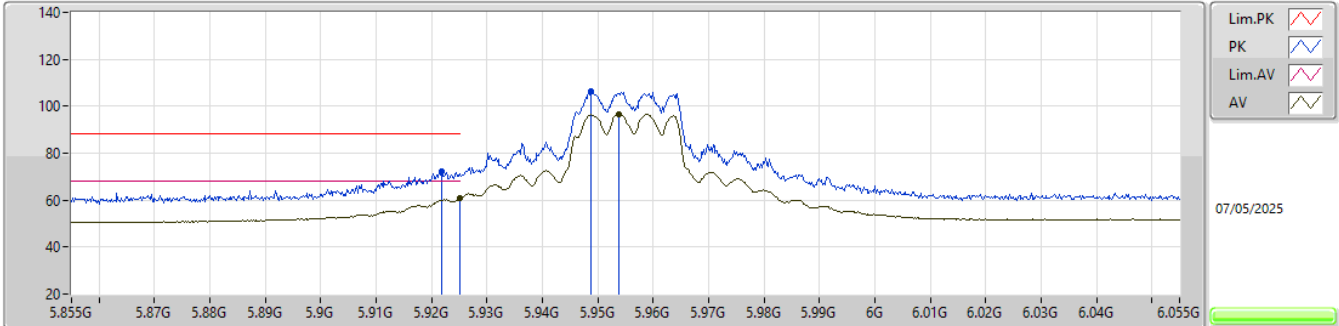


EUT_X_2TX
Setting 21
01-U-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9218G	72.09	88.20	-16.11	62.16	3	Horizontal	280	1.80	-	34.93	7.44	32.44			
RMS	5.925G	60.67	68.20	-7.53	50.72	3	Horizontal	280	1.80	-	34.95	7.44	32.44			
PK	5.9488G	106.30	Inf	-Inf	96.19	3	Horizontal	280	1.80	-	35.09	7.46	32.44			
RMS	5.9538G	96.78	Inf	-Inf	86.63	3	Horizontal	280	1.80	-	35.12	7.47	32.44			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


5955MHz_TX

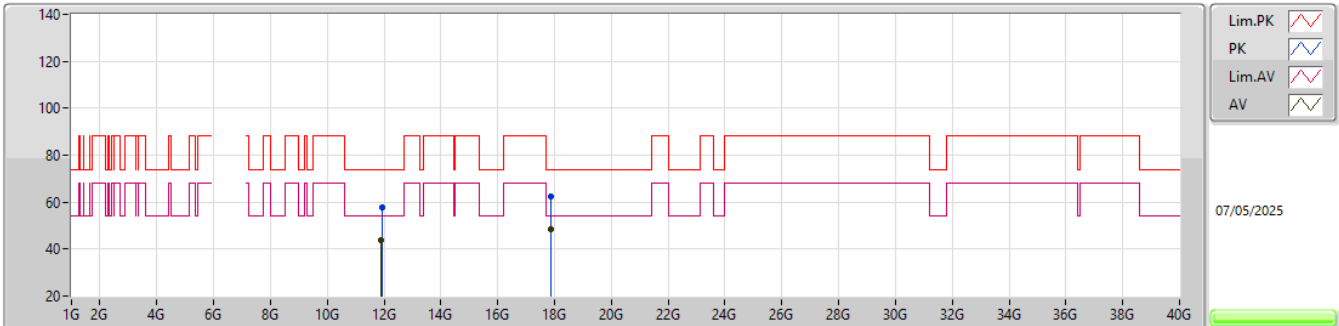EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.92185G	57.77	74.00	-16.23	52.07	3	Vertical	8	1.80	-	38.76	12.28	45.34			
AV	11.9124G	43.95	54.00	-10.05	38.24	3	Vertical	8	1.80	-	38.78	12.27	45.34			
PK	17.87523G	62.32	74.00	-11.68	51.25	3	Vertical	305	1.80	-	41.20	14.19	44.32			
AV	17.86893G	48.29	54.00	-5.71	37.24	3	Vertical	305	1.80	-	41.18	14.19	44.32			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


5955MHz_TX

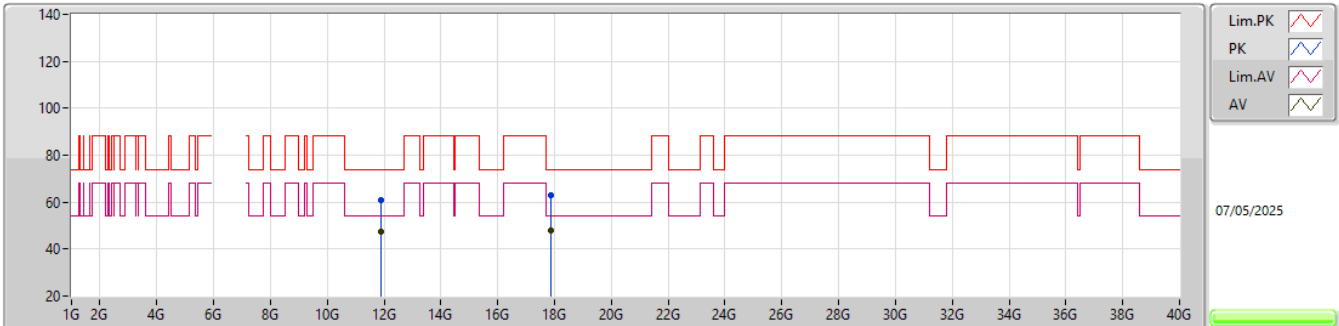EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.90694G	61.12	74.00	-12.88	55.40	3	Horizontal	322	1.80	-	38.79	12.27	45.34				
AV	11.91207G	47.23	54.00	-6.77	41.52	3	Horizontal	322	1.80	-	38.78	12.27	45.34				
PK	17.86218G	62.87	74.00	-11.13	51.86	3	Horizontal	129	1.80	-	41.15	14.19	44.33				
AV	17.86695G	48.14	54.00	-5.86	37.10	3	Horizontal	129	1.80	-	41.17	14.19	44.32				

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


5955MHz_TX

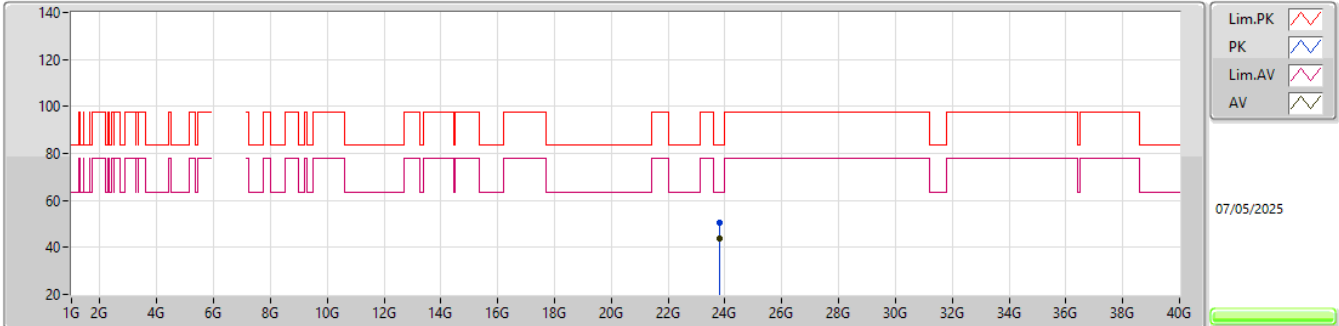EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.82008G	50.44	83.54	-33.10	40.59	1	Vertical	17	1.61	-	38.86	18.13	47.14			
AV	23.82024G	43.60	63.54	-19.94	33.75	1	Vertical	17	1.61	-	38.86	18.13	47.14			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


5955MHz_TX

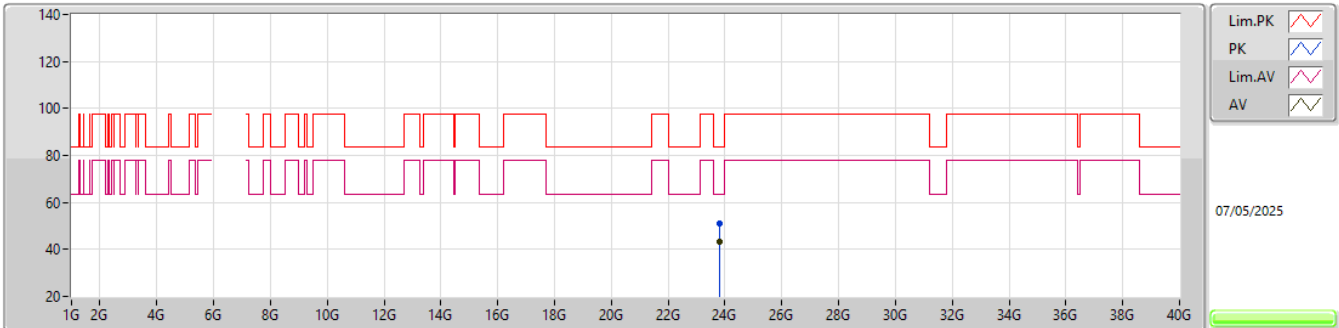EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.82016G	51.07	83.54	-32.47	41.22	1	Horizontal	25	1.87	-	38.86	18.13	47.14			
AV	23.8204G	43.47	63.54	-20.07	33.62	1	Horizontal	25	1.87	-	38.86	18.13	47.14			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

6195MHz_TX

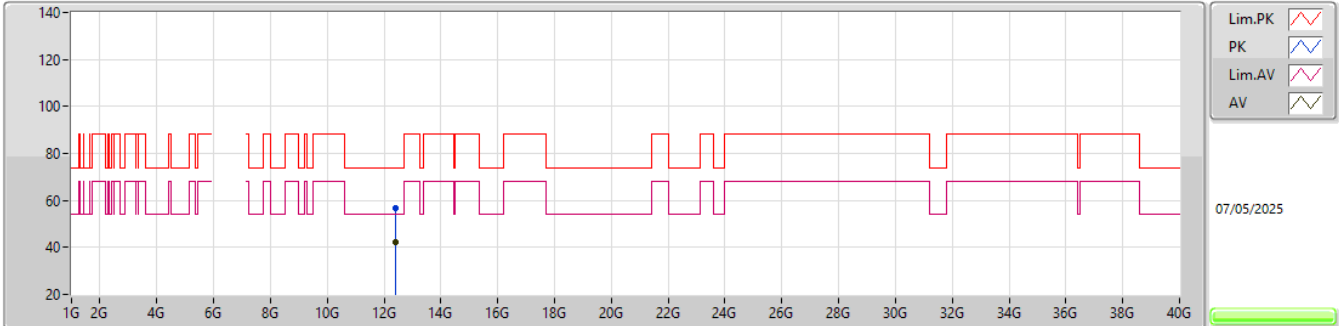


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.39975G	56.54	74.00	-17.46	50.94	3	Vertical	110	1.53	-	38.60	12.58	45.58			
AV	12.39492G	42.50	54.00	-11.50	36.90	3	Vertical	110	1.53	-	38.59	12.58	45.57			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

6195MHz_TX

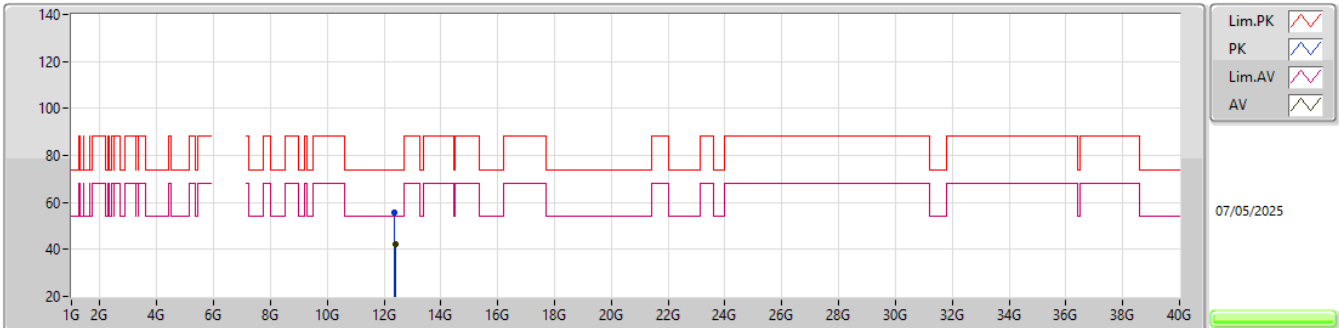


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.38358G	55.76	74.00	-18.24	50.19	3	Horizontal	223	1.91	-	38.57	12.57	45.57			
AV	12.38472G	42.50	54.00	-11.50	36.93	3	Horizontal	223	1.91	-	38.57	12.57	45.57			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

6195MHz_TX

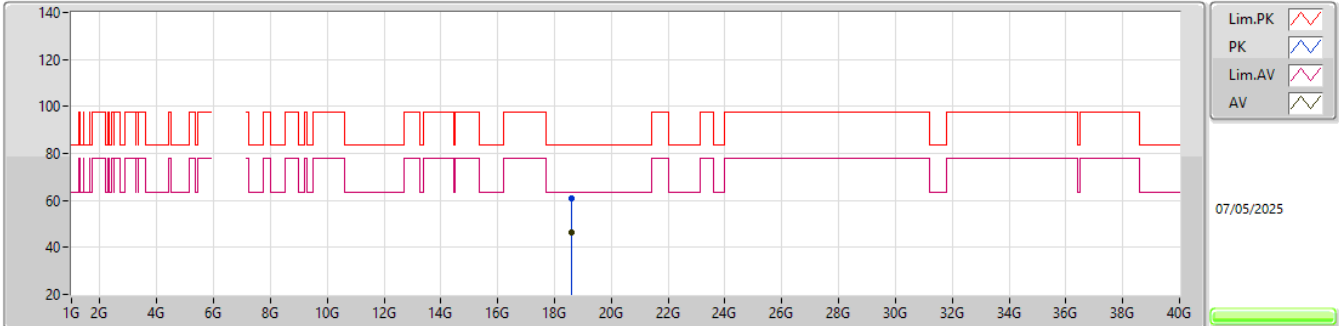


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.5916G	61.02	83.54	-22.52	57.07	1	Vertical	18	1.80	-	37.88	15.71	49.64			
AV	18.58224G	46.48	63.54	-17.06	42.56	1	Vertical	18	1.80	-	37.86	15.71	49.65			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

6195MHz_TX

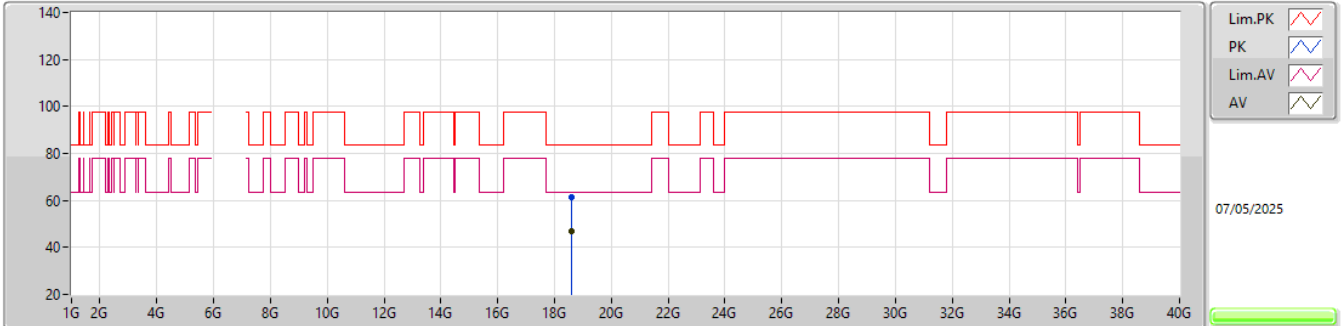


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.58464G	61.60	83.54	-21.94	57.67	1	Horizontal	38	1.80	-	37.87	15.71	49.65			
AV	18.58464G	47.08	63.54	-16.46	43.15	1	Horizontal	38	1.80	-	37.87	15.71	49.65			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


6415MHz_TX

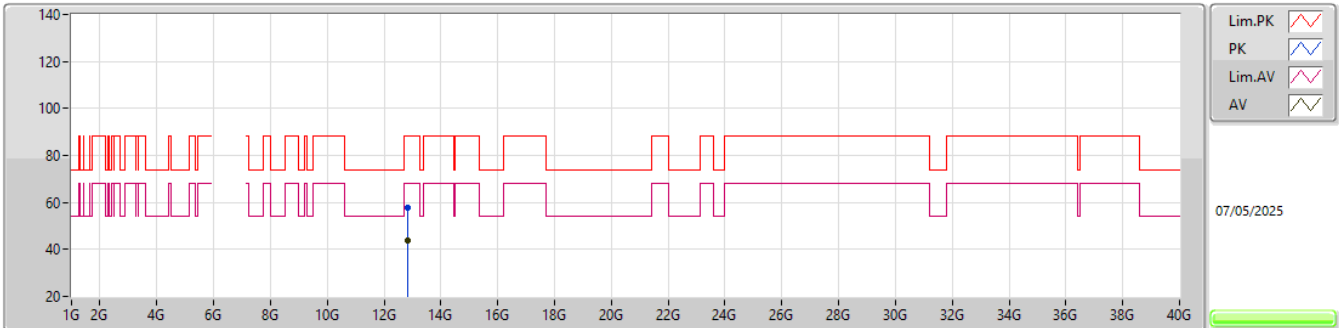EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.83711G	57.68	88.20	-30.52	50.76	3	Vertical	243	1.68	-	39.35	12.82	45.25			
RMS	12.84491G	43.83	68.20	-24.37	36.87	3	Vertical	243	1.68	-	39.38	12.82	45.24			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


6415MHz_TX

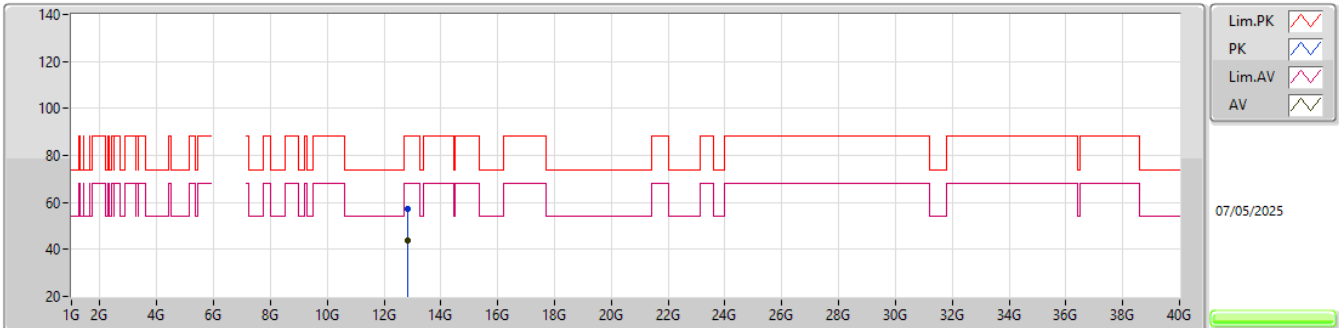EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.8297G	57.39	88.20	-30.81	50.52	3	Horizontal	166	1.98	-	39.32	12.81	45.26			
RMS	12.84113G	43.74	68.20	-24.46	36.81	3	Horizontal	166	1.98	-	39.36	12.82	45.25			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


6415MHz_TX

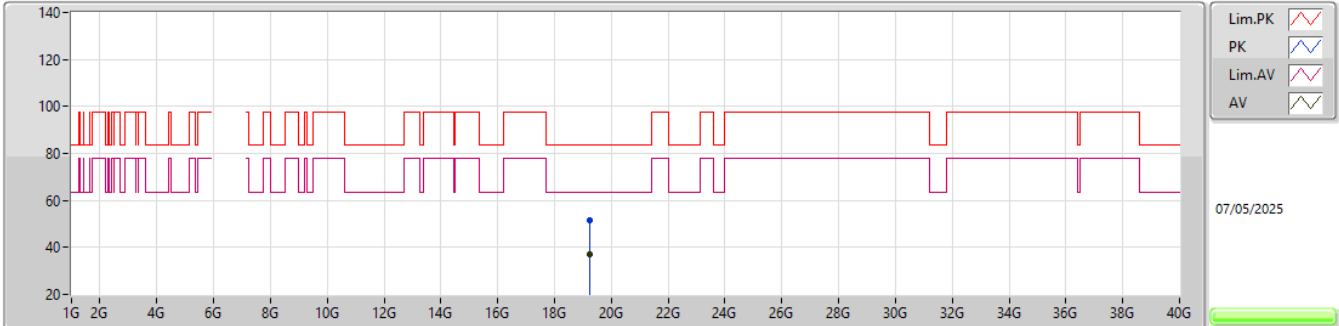EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.24856G	51.66	83.54	-31.88	47.20	1	Vertical	92	1.69	-	37.90	16.01	49.45			
AV	19.24324G	37.11	63.54	-26.43	32.65	1	Vertical	92	1.69	-	37.90	16.01	49.45			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


6415MHz_TX

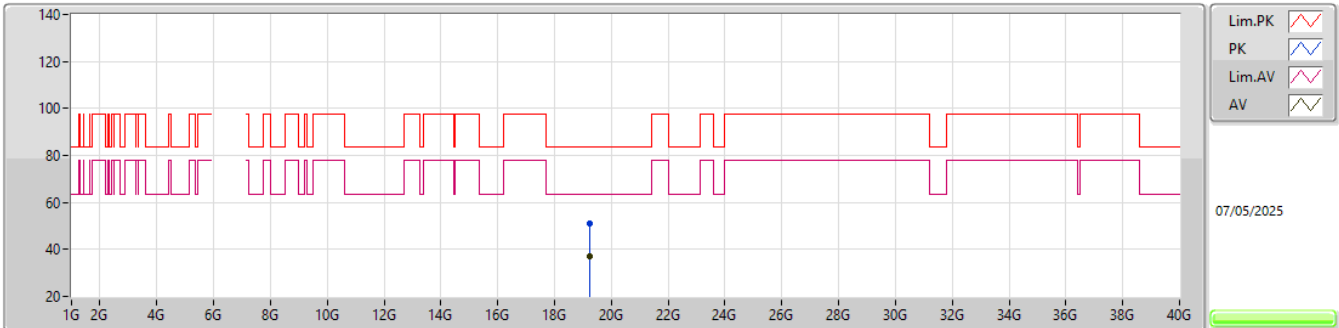EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.25024G	50.81	83.54	-32.73	46.36	1	Horizontal	208	1.81	-	37.90	16.01	49.46			
AV	19.24516G	37.02	63.54	-26.52	32.56	1	Horizontal	208	1.81	-	37.90	16.01	49.45			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5965MHz_TX

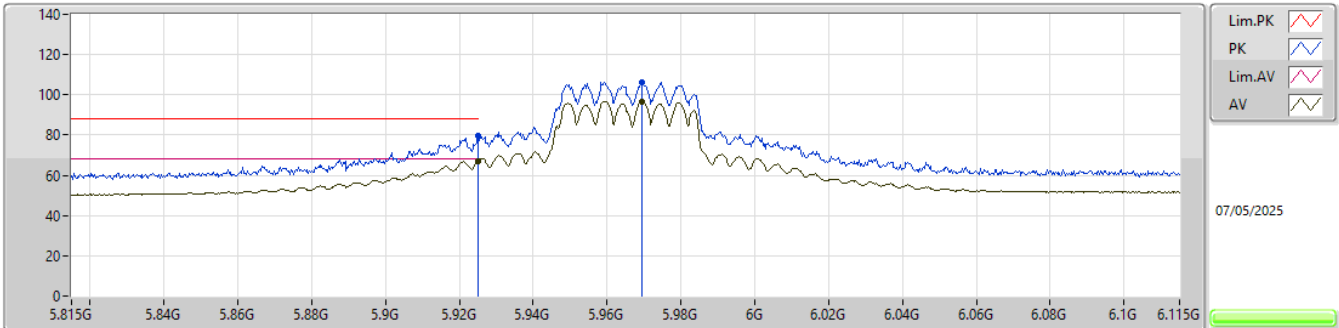


EUT_X_2TX
Setting 21
01-U-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.925G	79.42	88.20	-8.78	69.47	3	Vertical	267	1.80	-	34.95	7.44	32.44			
RMS	5.925G	67.19	68.20	-1.01	57.24	3	Vertical	267	1.80	-	34.95	7.44	32.44			
PK	5.9695G	106.50	Inf	-Inf	96.28	3	Vertical	267	1.80	-	35.18	7.48	32.44			
RMS	5.9695G	96.79	Inf	-Inf	86.57	3	Vertical	267	1.80	-	35.18	7.48	32.44			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5965MHz_TX

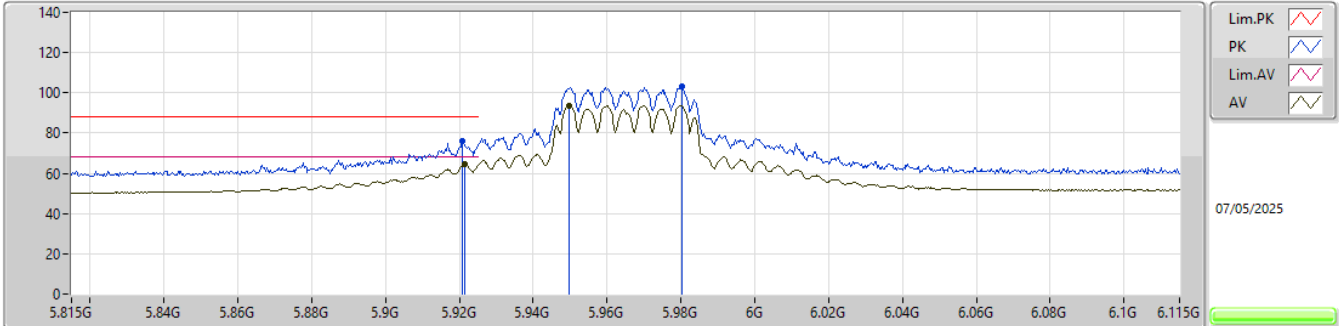


EUT_X_2TX
Setting 21
01-U-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9209G	76.04	88.20	-12.16	66.11	3	Horizontal	118	1.80	-	34.93	7.44	32.44			
RMS	5.9215G	64.30	68.20	-3.90	54.37	3	Horizontal	118	1.80	-	34.93	7.44	32.44			
PK	5.9803G	103.25	Inf	-Inf	92.98	3	Horizontal	118	1.80	-	35.22	7.49	32.44			
RMS	5.9497G	93.64	Inf	-Inf	83.52	3	Horizontal	118	1.80	-	35.10	7.46	32.44			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5965MHz_TX

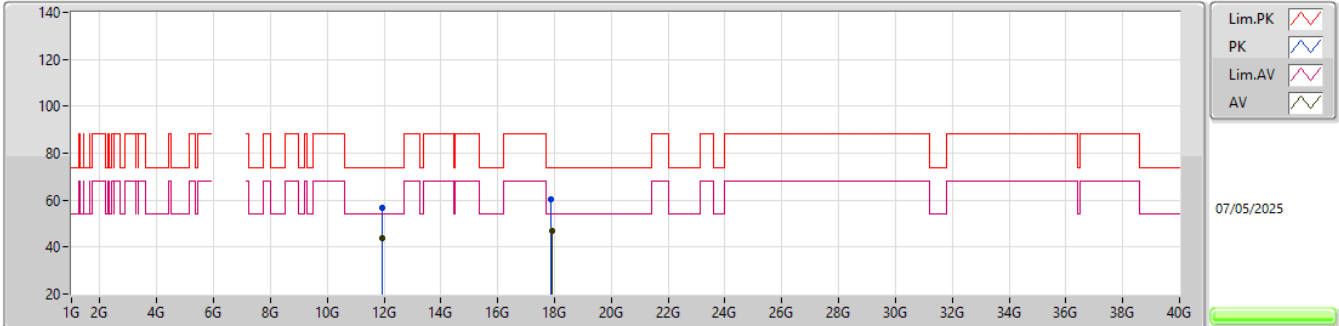


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.92276G	56.71	74.00	-17.29	51.02	3	Vertical	11	1.80	-	38.75	12.28	45.34			
AV	11.9275G	43.55	54.00	-10.45	37.86	3	Vertical	11	1.80	-	38.74	12.29	45.34			
PK	17.89332G	60.35	74.00	-13.65	49.19	3	Vertical	165	1.79	-	41.27	14.20	44.31			
AV	17.90432G	46.95	54.00	-7.05	35.75	3	Vertical	165	1.79	-	41.31	14.20	44.31			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5965MHz_TX

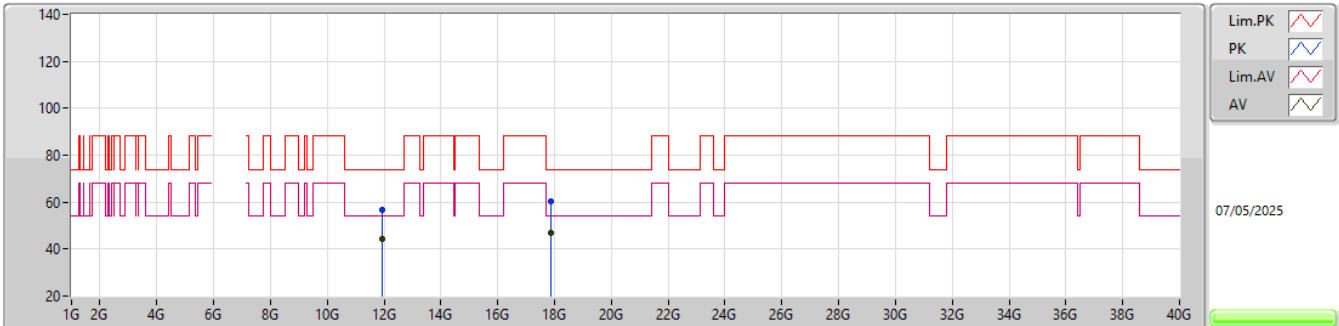EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.93848G	56.96	74.00	-17.04	51.29	3	Horizontal	49	1.64	-	38.72	12.30	45.35				
AV	11.92766G	44.55	54.00	-9.45	38.86	3	Horizontal	49	1.64	-	38.74	12.29	45.34				
PK	17.89334G	60.21	74.00	-13.79	49.05	3	Horizontal	213	1.87	-	41.27	14.20	44.31				
AV	17.88772G	46.98	54.00	-7.02	35.84	3	Horizontal	213	1.87	-	41.25	14.20	44.31				

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5965MHz_TX

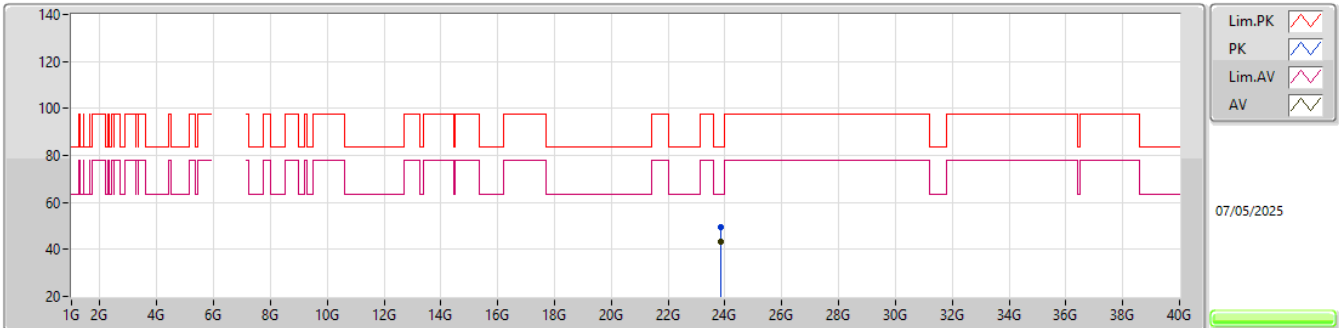EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.86068G	49.40	83.54	-34.14	39.57	1	Vertical	17	1.61	-	38.82	18.13	47.12			
AV	23.86048G	43.50	63.54	-20.04	33.67	1	Vertical	17	1.61	-	38.82	18.13	47.12			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5965MHz_TX

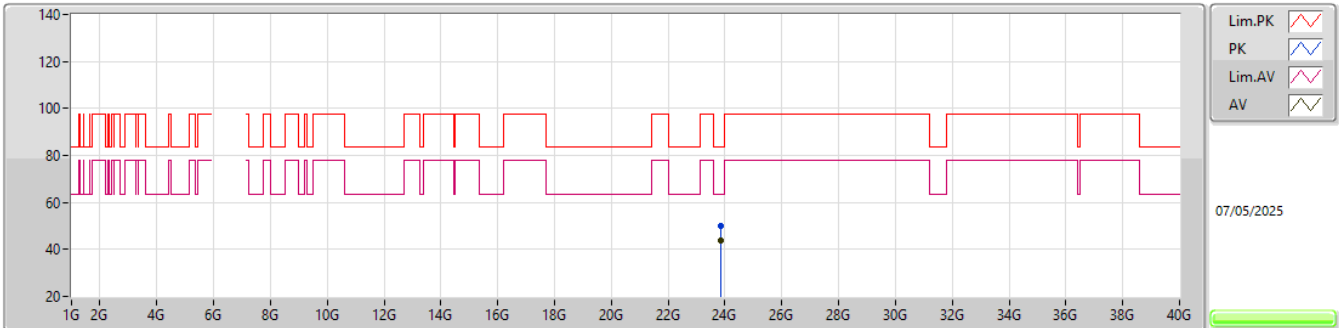


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.8606G	50.07	83.54	-33.47	40.24	1	Horizontal	42	2.00	-	38.82	18.13	47.12			
AV	23.86056G	43.75	63.54	-19.79	33.92	1	Horizontal	42	2.00	-	38.82	18.13	47.12			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

6205MHz_TX

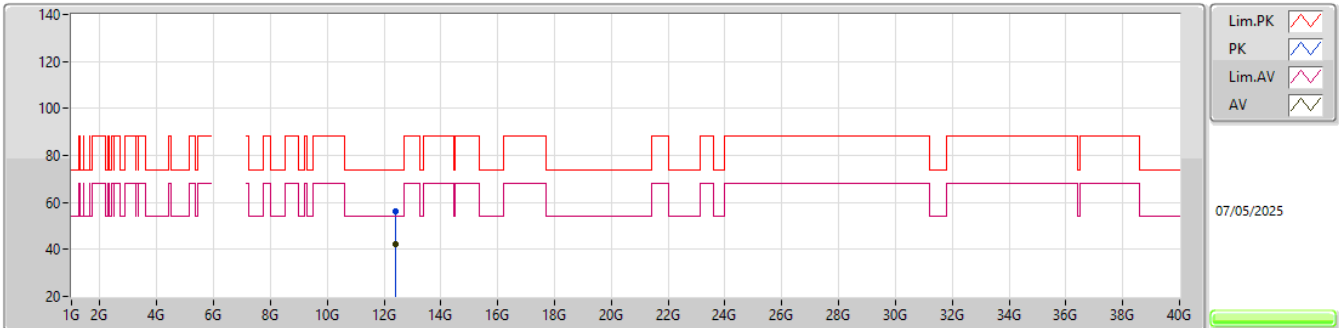


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.41588G	56.21	74.00	-17.79	50.57	3	Vertical	24	1.55	-	38.63	12.59	45.58			
AV	12.4041G	42.46	54.00	-11.54	36.85	3	Vertical	24	1.55	-	38.61	12.58	45.58			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

6205MHz_TX

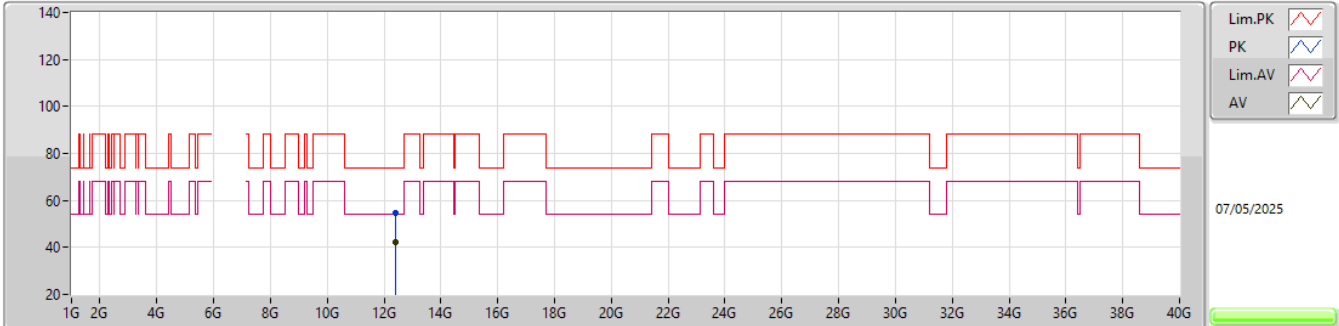


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.41818G	54.84	74.00	-19.16	49.20	3	Horizontal	350	1.41	-	38.64	12.59	45.59			
AV	12.40518G	42.49	54.00	-11.51	36.88	3	Horizontal	350	1.41	-	38.61	12.58	45.58			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


6205MHz_TX

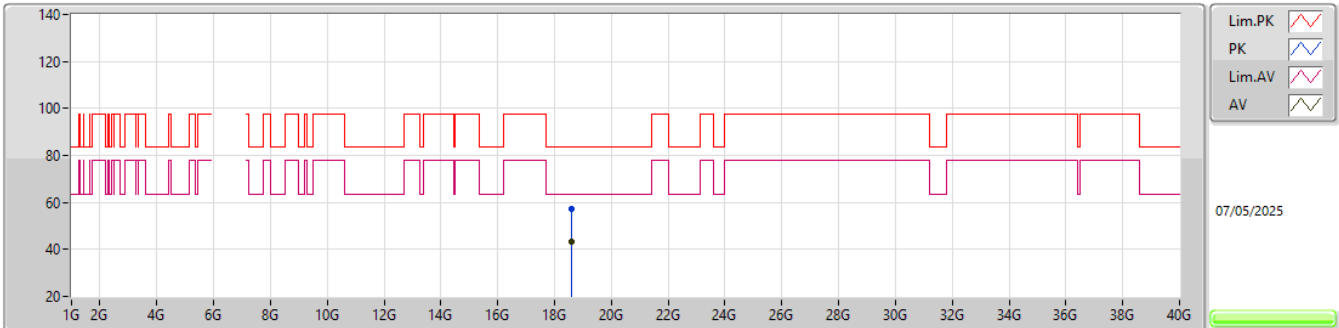EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.60932G	57.43	83.54	-26.11	53.41	1	Vertical	18	1.80	-	37.92	15.73	49.63			
AV	18.60956G	43.33	63.54	-20.21	39.31	1	Vertical	18	1.80	-	37.92	15.73	49.63			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


6205MHz_TX

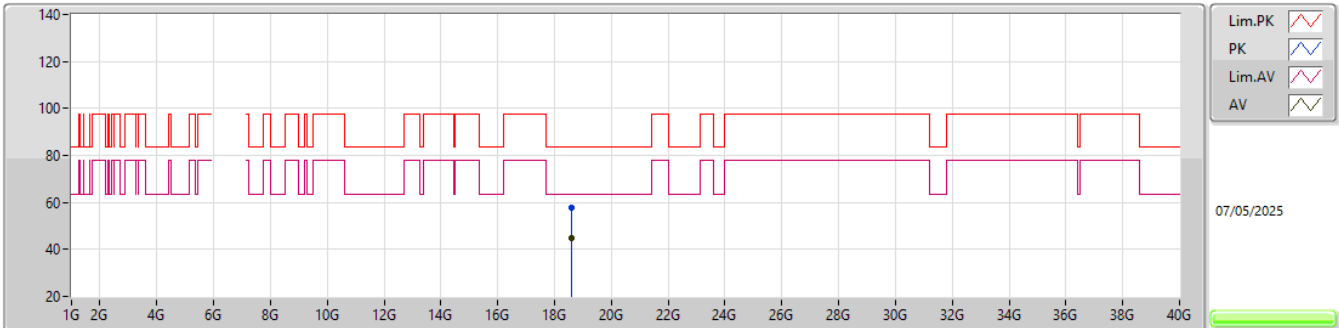EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.61284G	57.71	83.54	-25.83	53.68	1	Horizontal	37	1.80	-	37.93	15.73	49.63			
AV	18.61204G	44.91	63.54	-18.63	40.89	1	Horizontal	37	1.80	-	37.92	15.73	49.63			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


6405MHz_TX

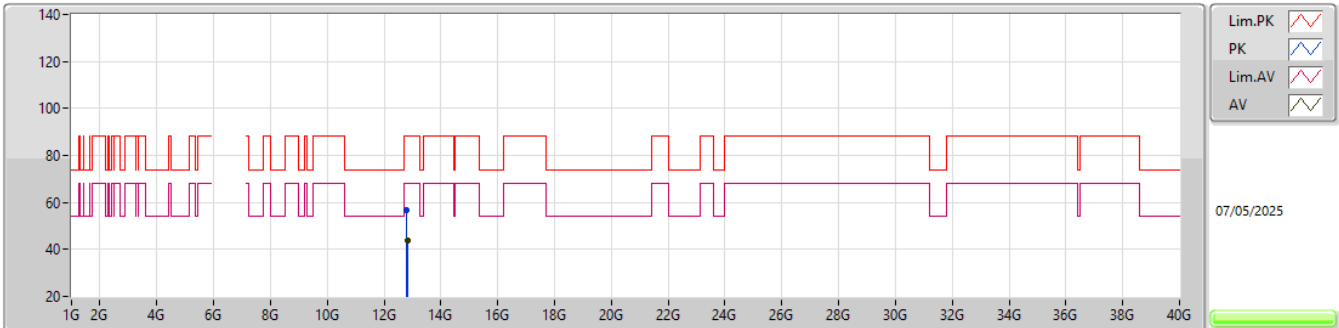EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.8086G	56.95	88.20	-31.25	50.20	3	Vertical	317	1.97	-	39.23	12.80	45.28			
RMS	12.81736G	43.75	68.20	-24.45	36.94	3	Vertical	317	1.97	-	39.27	12.81	45.27			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

6405MHz_TX

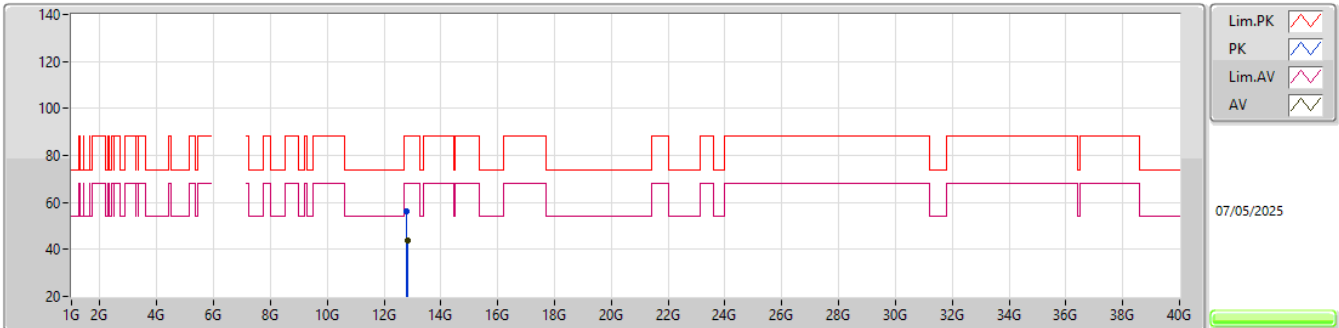


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.80392G	56.38	88.20	-31.82	49.65	3	Horizontal	161	1.46	-	39.22	12.80	45.29			
RMS	12.8171G	43.56	68.20	-24.64	36.75	3	Horizontal	161	1.46	-	39.27	12.81	45.27			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


6405MHz_TX

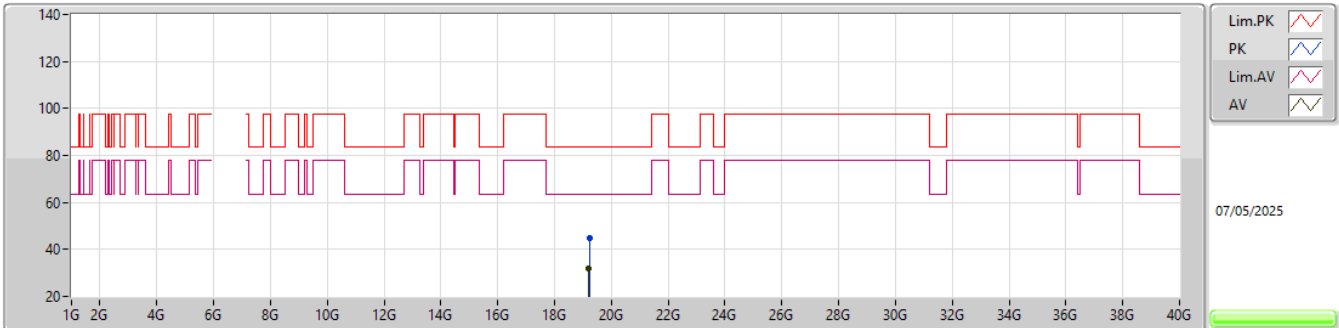EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.2186G	44.96	83.54	-38.58	40.50	1	Vertical	313	1.46	-	37.90	16.00	49.44			
AV	19.20616G	32.09	63.54	-31.45	27.62	1	Vertical	313	1.46	-	37.90	16.00	49.43			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


6405MHz_TX

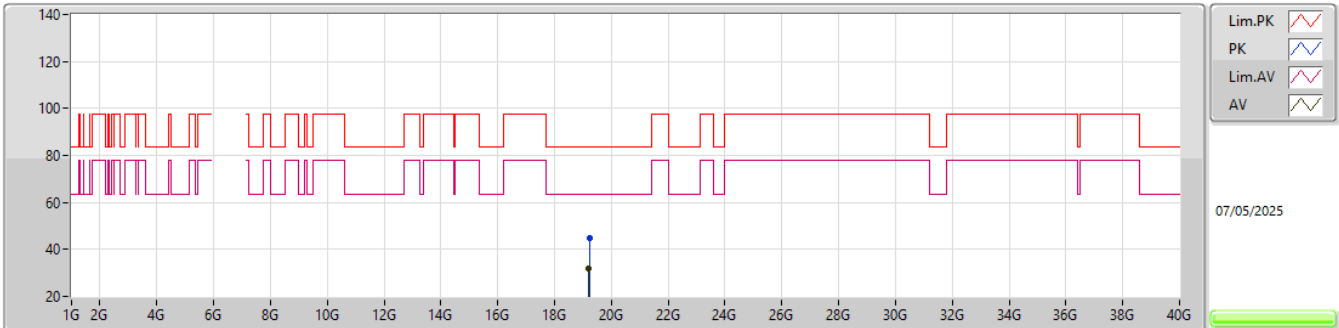EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.22356G	44.92	83.54	-38.62	40.46	1	Horizontal	137	1.53	-	37.90	16.00	49.44			
AV	19.21056G	32.11	63.54	-31.43	27.64	1	Horizontal	137	1.53	-	37.90	16.00	49.43			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5985MHz_TX

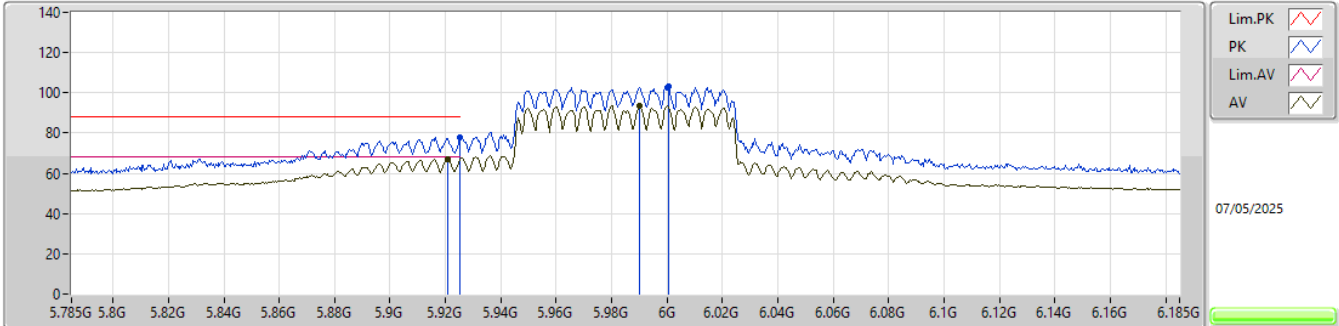


EUT_X_2TX
Setting 20
01-U-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.925G	77.92	88.20	-10.28	67.97	3	Vertical	21	1.80	-	34.95	7.44	32.44			
RMS	5.921G	67.15	68.20	-1.05	57.22	3	Vertical	21	1.80	-	34.93	7.44	32.44			
PK	6.0006G	103.07	Inf	-Inf	92.71	3	Vertical	21	1.80	-	35.30	7.50	32.44			
RMS	5.9902G	93.62	Inf	-Inf	83.31	3	Vertical	21	1.80	-	35.26	7.49	32.44			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5985MHz_TX

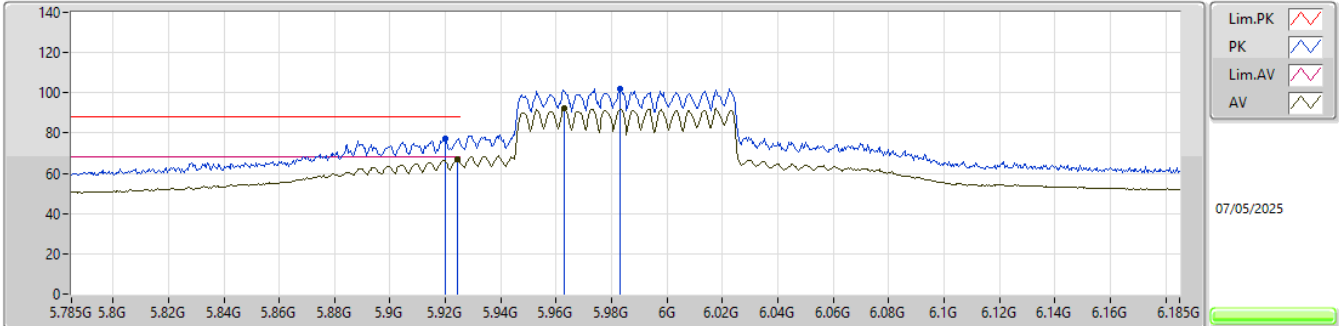


EUT_X_2TX
Setting 20
01-U-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.9198G	77.46	88.20	-10.74	67.54	3	Horizontal	126	3.00	-	34.92	7.44	32.44
RMS	5.9242G	66.74	68.20	-1.46	56.79	3	Horizontal	126	3.00	-	34.95	7.44	32.44
PK	5.983G	101.87	Inf	-Inf	91.59	3	Horizontal	126	3.00	-	35.23	7.49	32.44
RMS	5.963G	92.15	Inf	-Inf	81.97	3	Horizontal	126	3.00	-	35.15	7.47	32.44

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5985MHz_TX

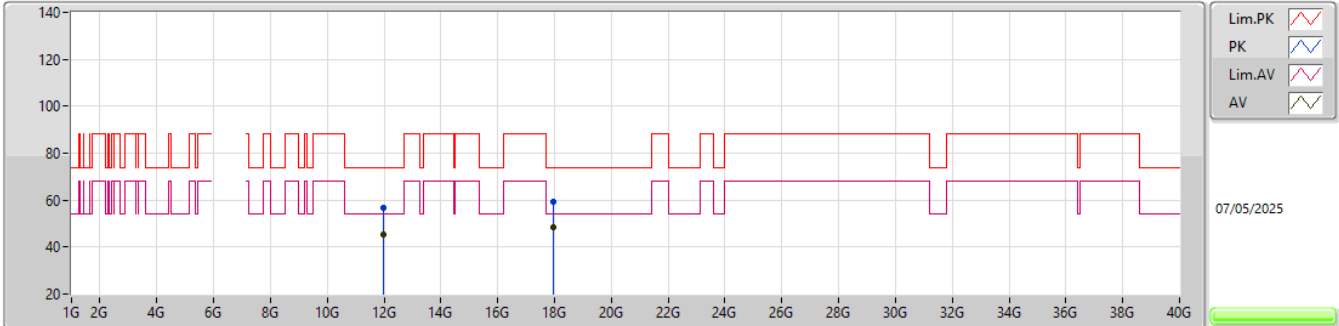


EUT_X_2TX
Setting 20
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.96961G	56.92	74.00	-17.08	51.24	3	Vertical	163	1.58	-	38.70	12.33	45.35				
AV	11.97036G	45.41	54.00	-8.59	39.73	3	Vertical	163	1.58	-	38.70	12.33	45.35				
PK	17.95528G	59.50	74.00	-14.50	48.16	3	Vertical	222	1.82	-	41.41	14.22	44.29				
AV	17.95476G	48.43	54.00	-5.57	37.09	3	Vertical	222	1.82	-	41.41	14.22	44.29				

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5985MHz_TX

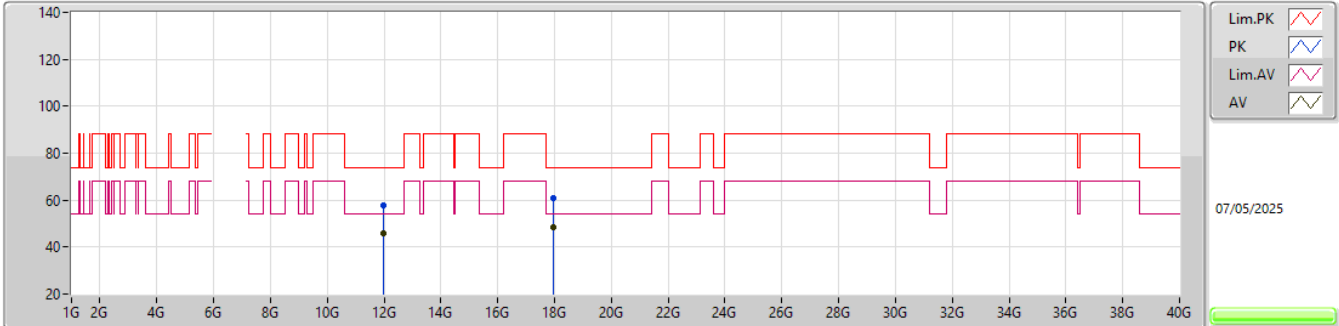


EUT_X_2TX
Setting 20
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.97042G	57.82	74.00	-16.18	52.14	3	Horizontal	133	1.63	-	38.70	12.33	45.35
AV	11.97012G	45.89	54.00	-8.11	40.21	3	Horizontal	133	1.63	-	38.70	12.33	45.35
PK	17.95538G	60.67	74.00	-13.33	49.33	3	Horizontal	343	1.35	-	41.41	14.22	44.29
AV	17.9552G	48.53	54.00	-5.47	37.19	3	Horizontal	343	1.35	-	41.41	14.22	44.29

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5985MHz_TX

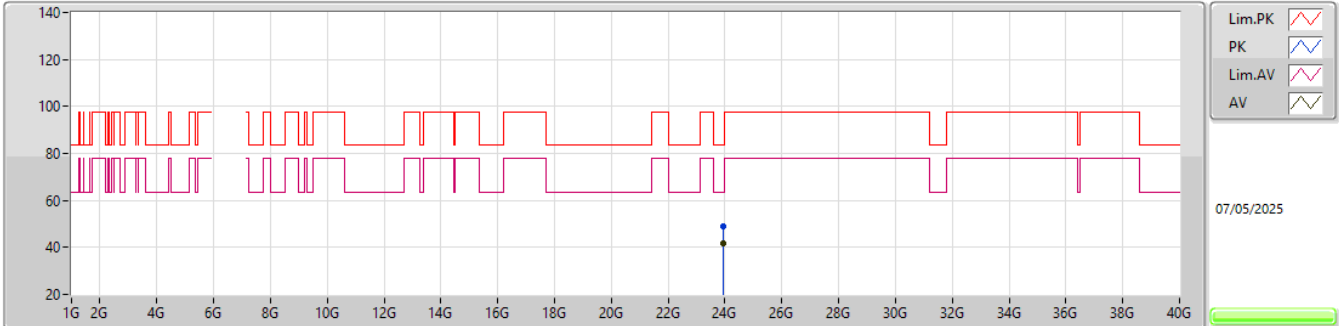EUT_X_2TX
Setting 20
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.9406G	48.75	83.54	-34.79	38.71	1	Vertical	5	2.00	-	38.98	18.15	47.09			
AV	23.94056G	41.79	63.54	-21.75	31.75	1	Vertical	5	2.00	-	38.98	18.15	47.09			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5985MHz_TX

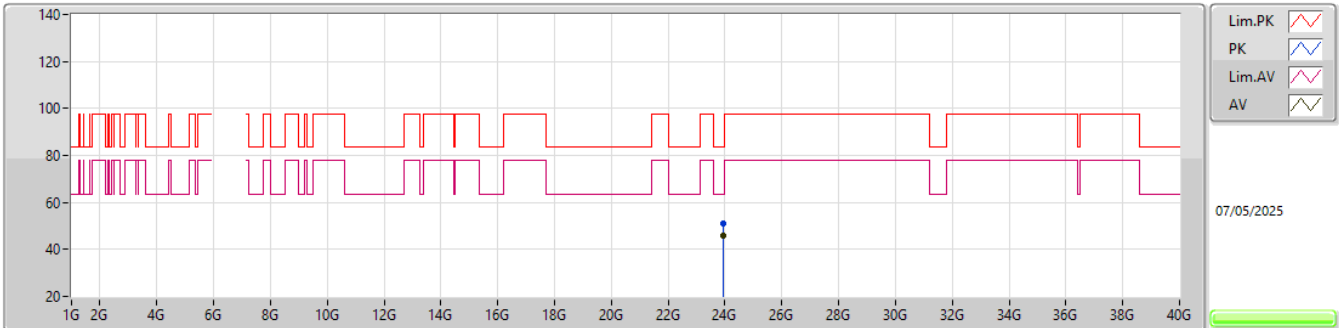EUT_X_2TX
Setting 20
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.94056G	51.17	83.54	-32.37	41.13	1	Horizontal	41	2.00	-	38.98	18.15	47.09			
AV	23.94072G	45.86	63.54	-17.68	35.82	1	Horizontal	41	2.00	-	38.98	18.15	47.09			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


6225MHz_TX

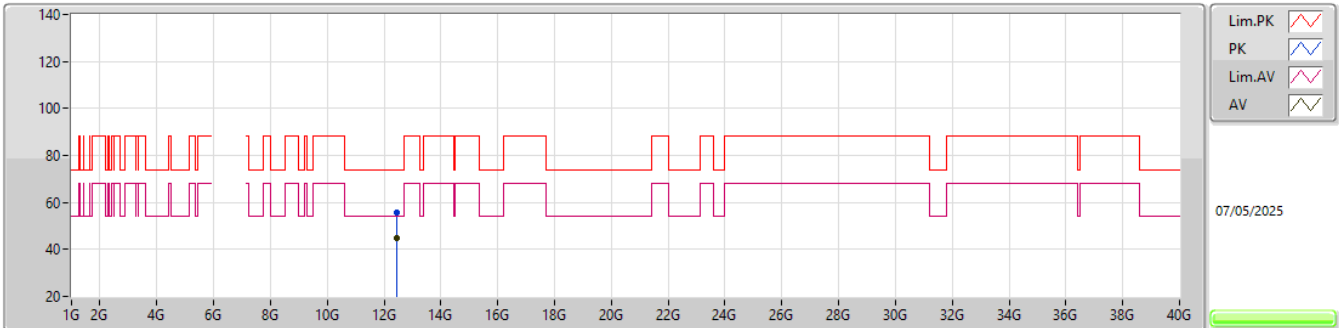EUT_X_2TX
Setting 21
01-U-S-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.44964G	55.57	74.00	-18.43	49.86	3	Vertical	175	1.90	-	38.70	12.61	45.60			
AV	12.44969G	44.59	54.00	-9.41	38.88	3	Vertical	175	1.90	-	38.70	12.61	45.60			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


6225MHz_TX

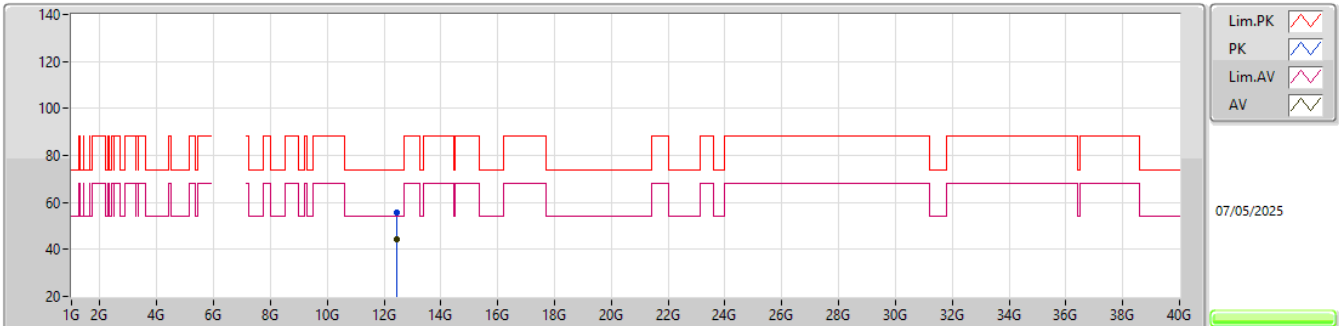EUT_X_2TX
Setting 21
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.45015G	55.60	74.00	-18.40	49.89	3	Horizontal	241	1.72	-	38.70	12.61	45.60			
AV	12.45025G	44.42	54.00	-9.58	38.71	3	Horizontal	241	1.72	-	38.70	12.61	45.60			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


6225MHz_TX

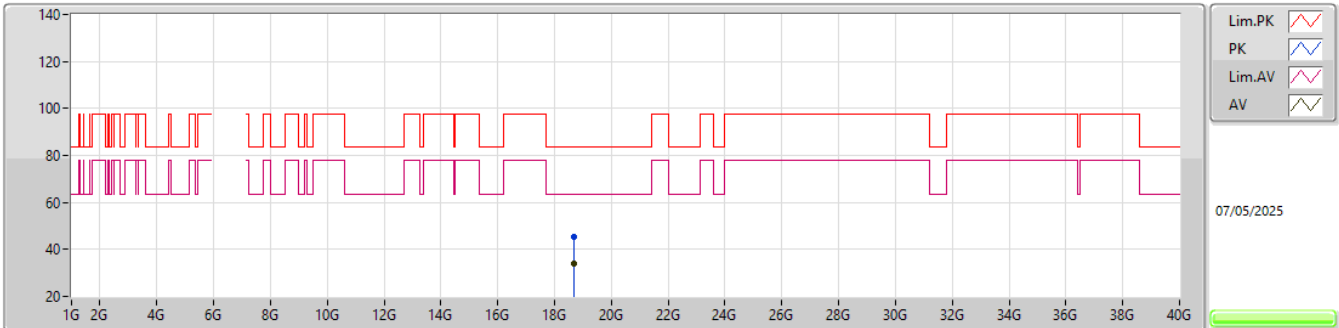EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.67648G	45.29	83.54	-38.25	41.21	1	Vertical	109	1.36	-	37.89	15.77	49.58			
AV	18.67232G	33.90	63.54	-29.64	29.81	1	Vertical	109	1.36	-	37.91	15.76	49.58			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


6225MHz_TX

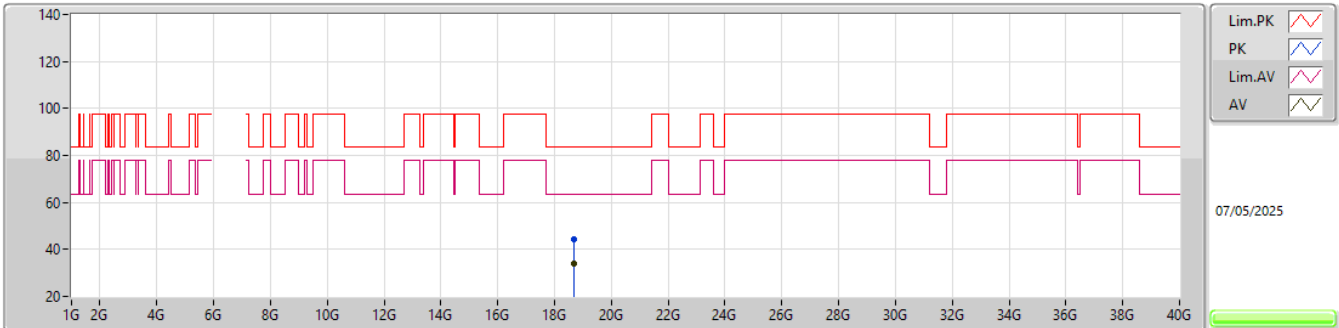EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.66524G	44.42	83.54	-39.12	40.30	1	Horizontal	276	1.52	-	37.94	15.76	49.58			
AV	18.68488G	33.78	63.54	-29.76	29.72	1	Horizontal	276	1.52	-	37.86	15.77	49.57			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


6385MHz_TX

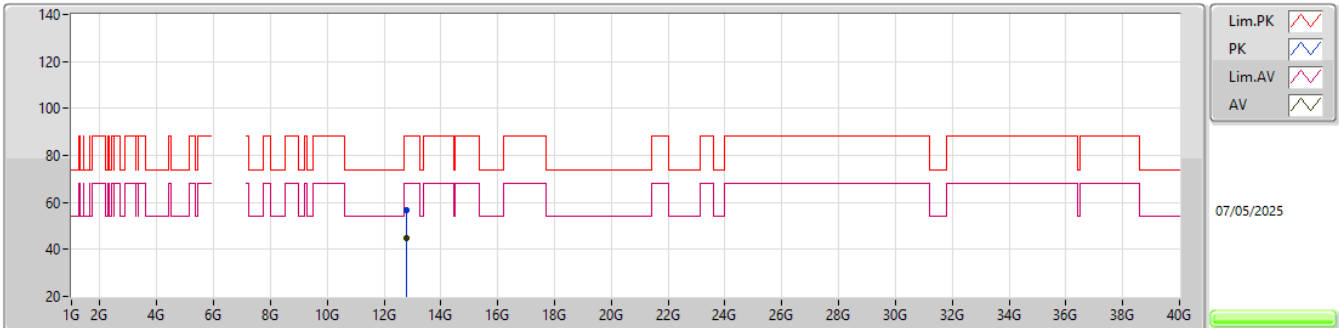EUT_X_2TX
Setting 21
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.76971G	56.73	88.20	-31.47	50.14	3	Vertical	295	1.86	-	39.14	12.78	45.33			
RMS	12.76981G	44.89	68.20	-23.31	38.30	3	Vertical	295	1.86	-	39.14	12.78	45.33			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


6385MHz_TX

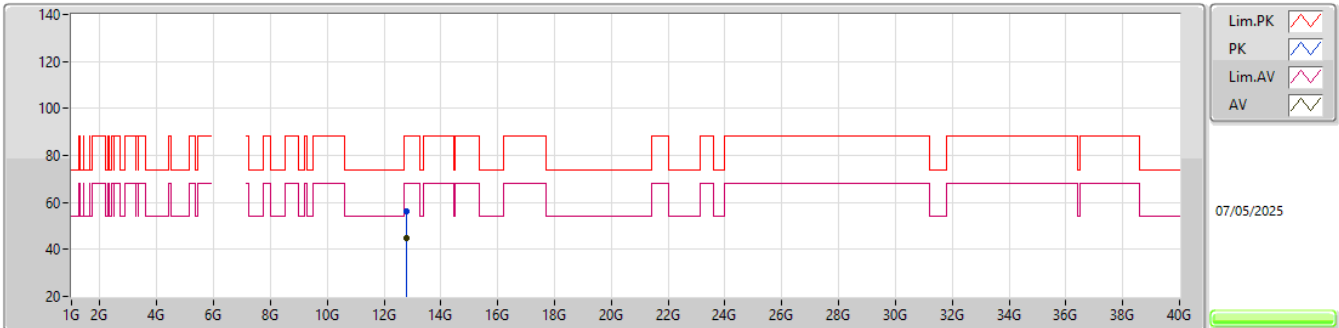EUT_X_2TX
Setting 21
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.76968G	56.15	88.20	-32.05	49.56	3	Horizontal	174	1.78	-	39.14	12.78	45.33			
RMS	12.77043G	44.91	68.20	-23.29	38.32	3	Horizontal	174	1.78	-	39.14	12.78	45.33			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

6385MHz_TX

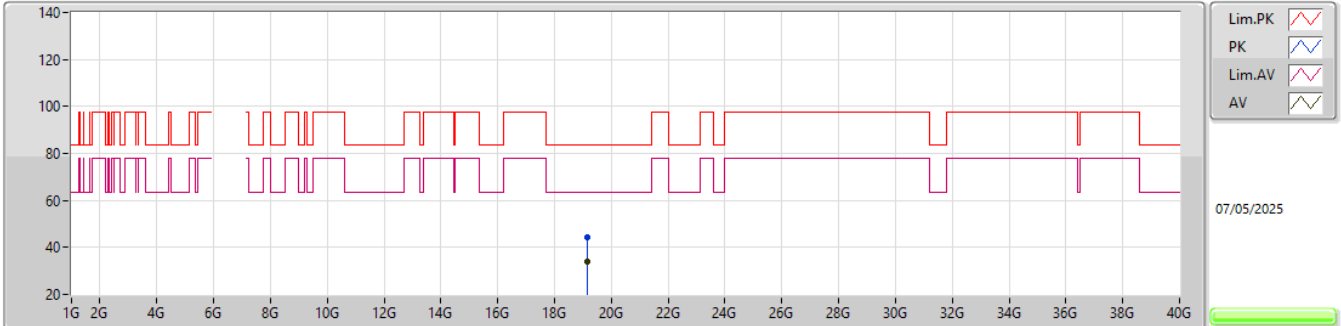


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.163G	44.49	83.54	-39.05	40.00	1	Vertical	4	1.37	-	37.90	15.99	49.40			
AV	19.1636G	34.18	63.54	-29.36	29.69	1	Vertical	4	1.37	-	37.90	15.99	49.40			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


6385MHz_TX

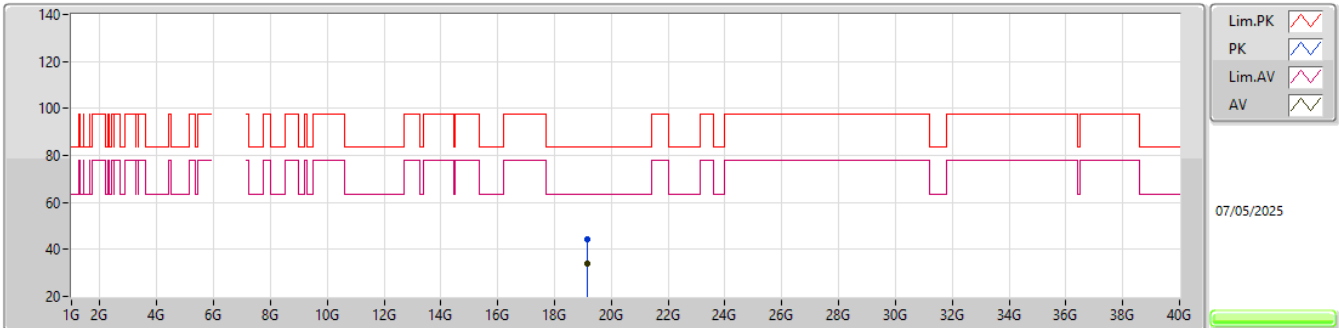EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.15428G	44.36	83.54	-39.18	39.87	1	Horizontal	134	1.55	-	37.90	15.99	49.40			
AV	19.15476G	34.22	63.54	-29.32	29.73	1	Horizontal	134	1.55	-	37.90	15.99	49.40			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

6435MHz_TX

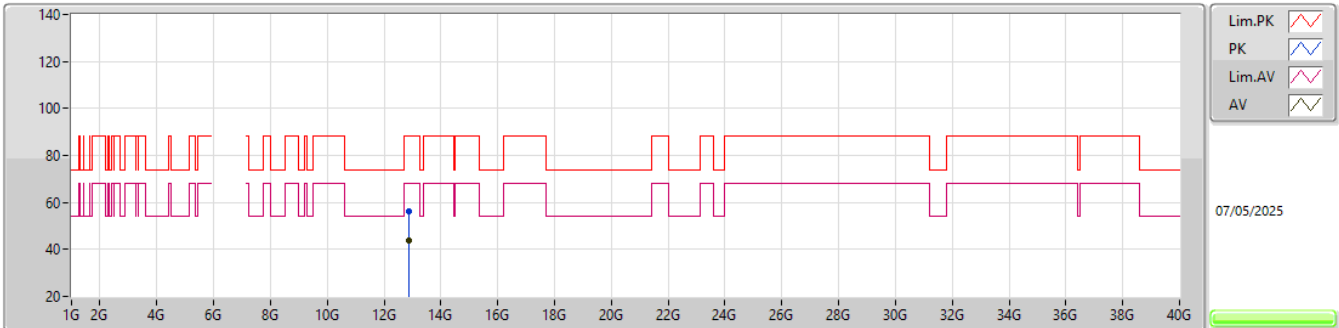


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.87744G	56.36	88.20	-31.84	49.33	3	Vertical	210	1.80	-	39.40	12.84	45.21			
RMS	12.87513G	43.88	68.20	-24.32	36.85	3	Vertical	210	1.80	-	39.40	12.84	45.21			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


6435MHz_TX

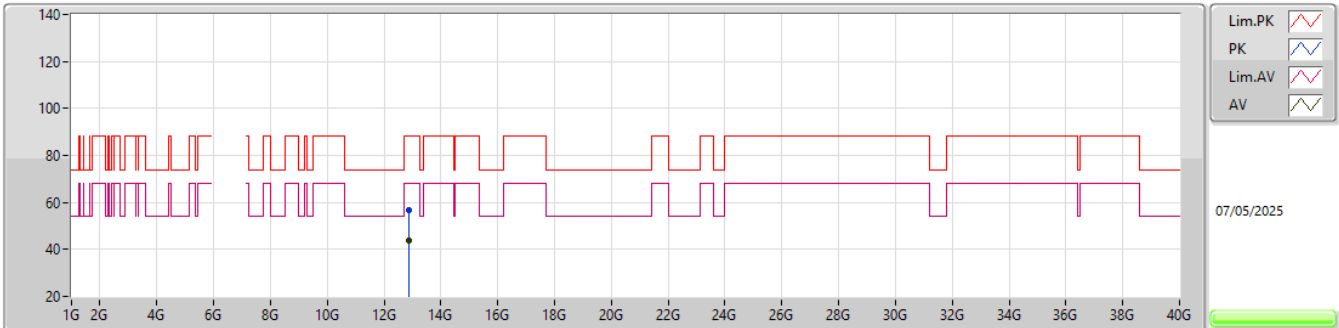EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.86418G	56.55	88.20	-31.65	49.54	3	Horizontal	222	1.81	-	39.40	12.83	45.22			
RMS	12.87288G	43.85	68.20	-24.35	36.82	3	Horizontal	222	1.81	-	39.40	12.84	45.21			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

6435MHz_TX

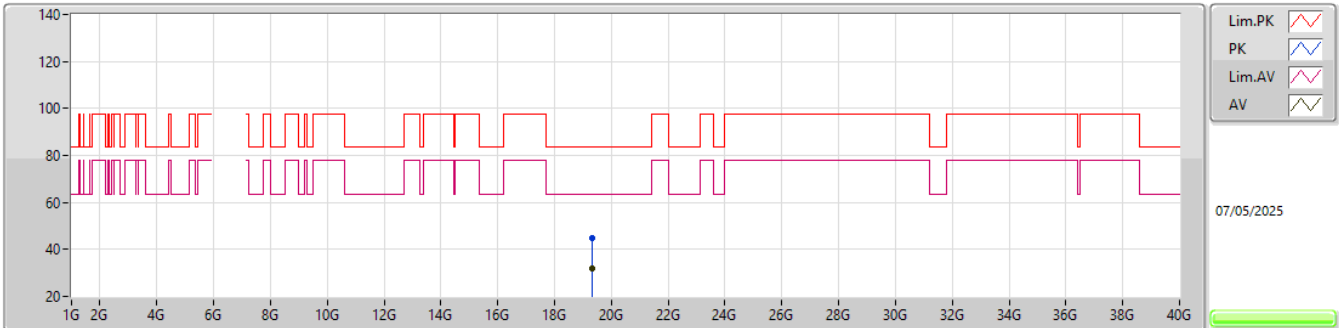


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.30952G	44.98	83.54	-38.56	40.55	1	Vertical	88	1.52	-	37.90	16.02	49.49			
AV	19.31232G	32.04	63.54	-31.50	27.61	1	Vertical	88	1.52	-	37.90	16.02	49.49			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


6435MHz_TX

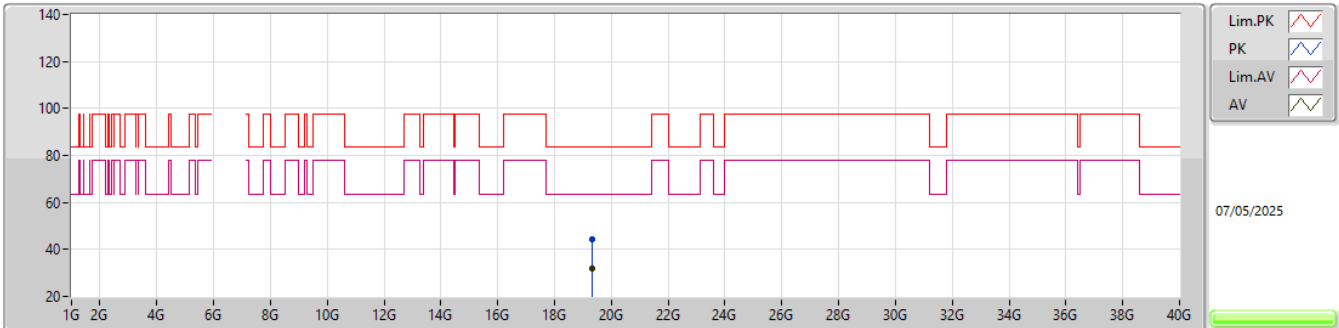EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.31148G	44.52	83.54	-39.02	40.09	1	Horizontal	292	1.80	-	37.90	16.02	49.49			
AV	19.30612G	32.06	63.54	-31.48	27.63	1	Horizontal	292	1.80	-	37.90	16.02	49.49			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

6475MHz_TX

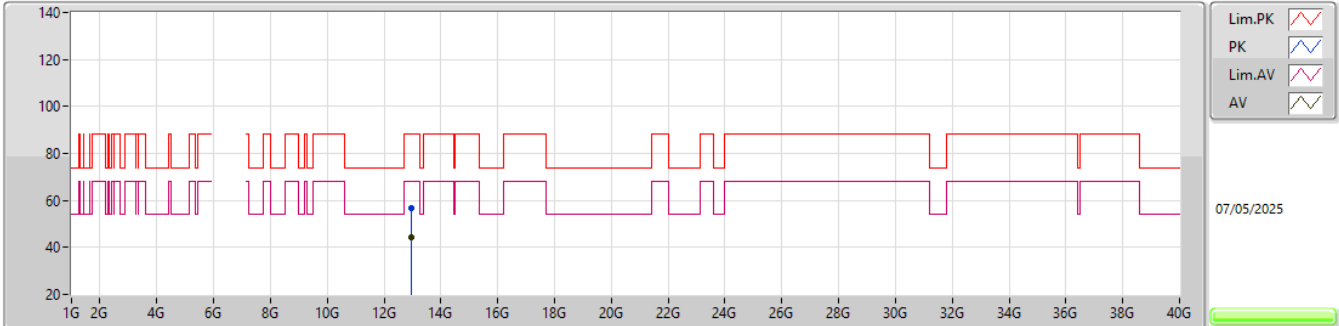


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.96032G	56.50	88.20	-31.70	49.21	3	Vertical	152	1.94	-	39.52	12.88	45.11			
RMS	12.94244G	44.26	68.20	-23.94	37.04	3	Vertical	152	1.94	-	39.48	12.87	45.13			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

6475MHz_TX

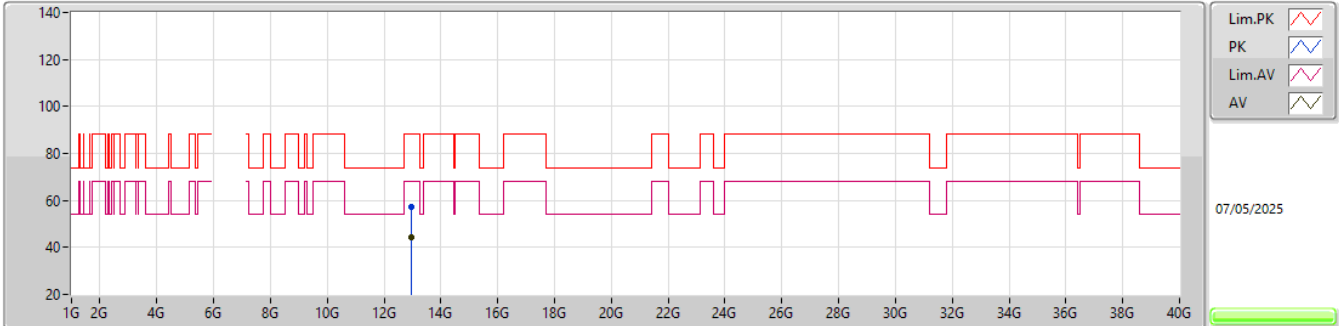


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.962G	57.35	88.20	-30.85	50.06	3	Horizontal	212	1.59	-	39.52	12.88	45.11			
RMS	12.96434G	44.31	68.20	-23.89	37.00	3	Horizontal	212	1.59	-	39.53	12.89	45.11			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

6475MHz_TX

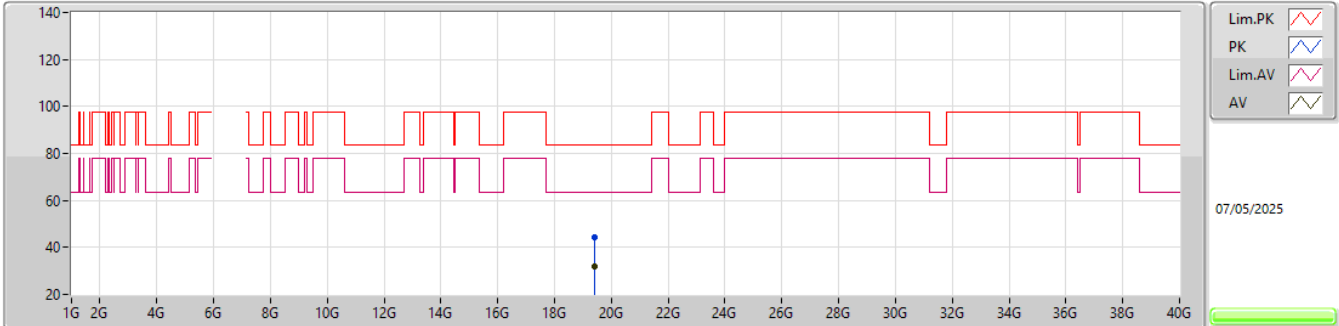


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.4194G	44.56	83.54	-38.98	40.23	1	Vertical	348	1.93	-	37.84	16.04	49.55			
AV	19.41508G	32.13	63.54	-31.41	27.81	1	Vertical	348	1.93	-	37.83	16.04	49.55			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

6475MHz_TX

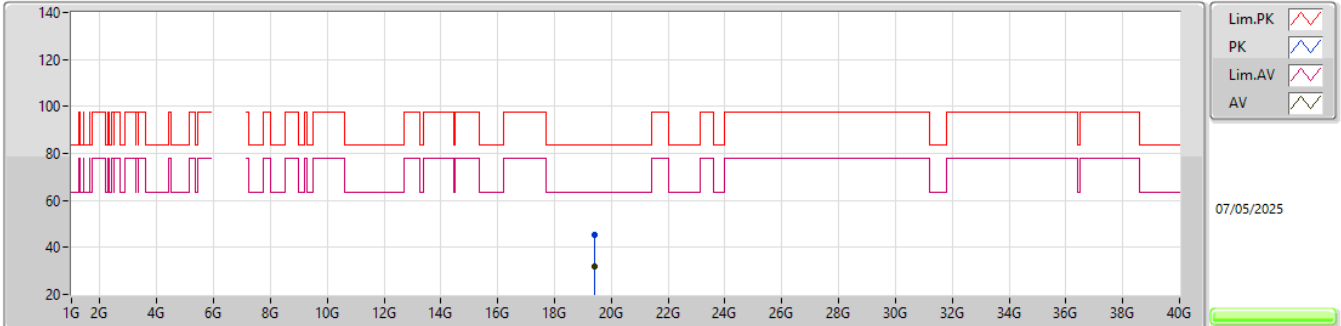


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.43196G	45.47	83.54	-38.07	41.12	1	Horizontal	54	1.86	-	37.86	16.05	49.56			
AV	19.41592G	32.04	63.54	-31.50	27.72	1	Horizontal	54	1.86	-	37.83	16.04	49.55			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


6515MHz_TX

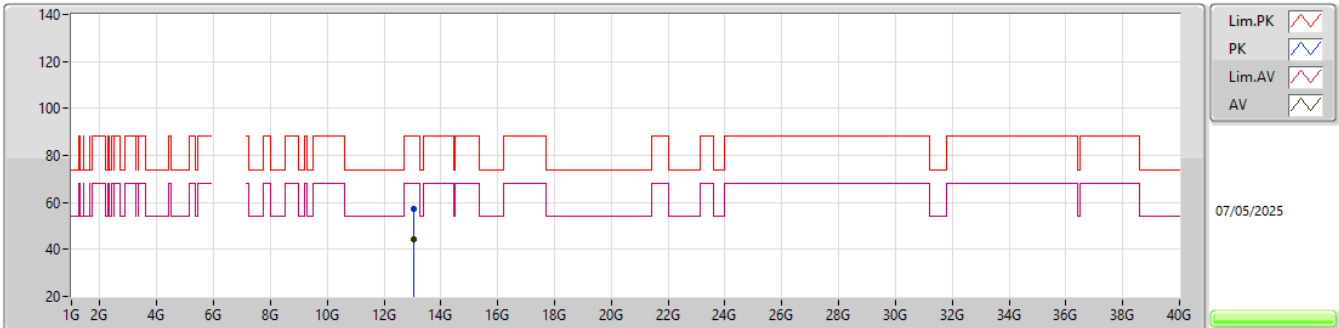EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.03306G	57.11	88.20	-31.09	49.63	3	Vertical	297	1.71	-	39.60	12.92	45.04			
RMS	13.02466G	44.46	68.20	-23.74	36.99	3	Vertical	297	1.71	-	39.60	12.92	45.05			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

6515MHz_TX

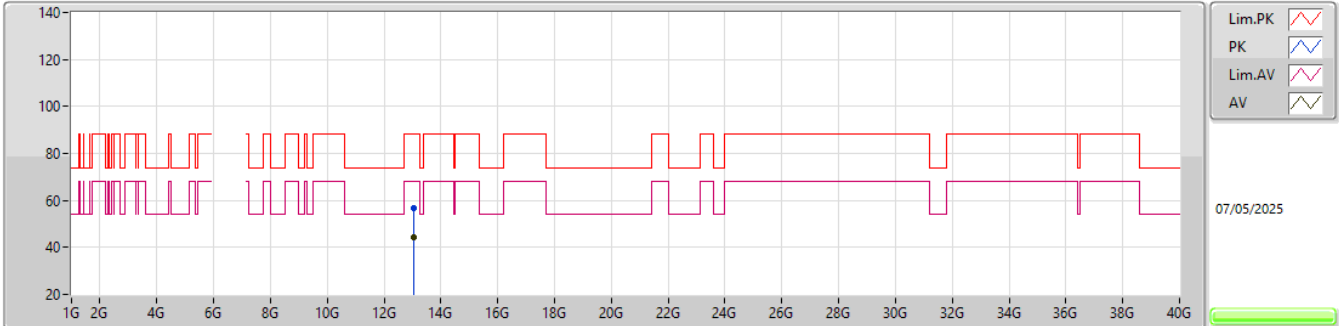


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.04041G	56.91	88.20	-31.29	49.42	3	Horizontal	316	1.91	-	39.60	12.93	45.04			
RMS	13.04281G	44.53	68.20	-23.67	37.03	3	Horizontal	316	1.91	-	39.60	12.93	45.03			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


6515MHz_TX

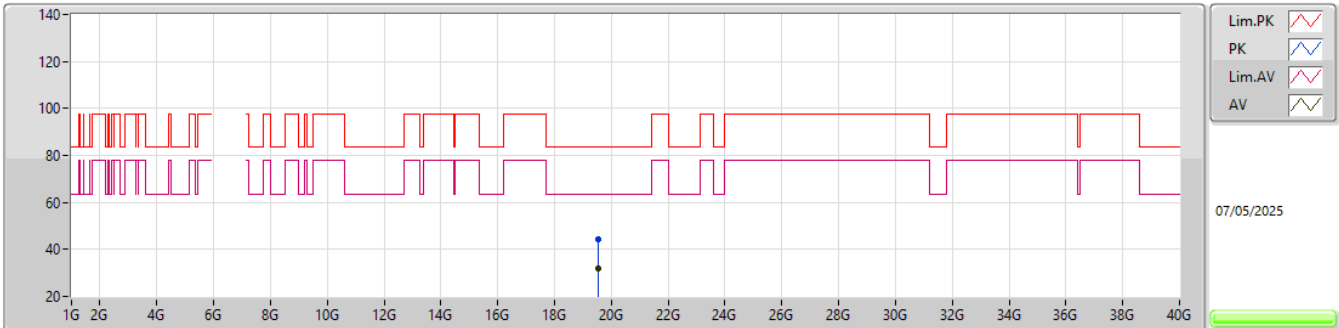EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.54868G	44.44	83.54	-39.10	40.13	1	Vertical	283	1.55	-	37.80	16.08	49.57			
AV	19.54184G	32.13	63.54	-31.41	27.83	1	Vertical	283	1.55	-	37.80	16.07	49.57			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

6515MHz_TX

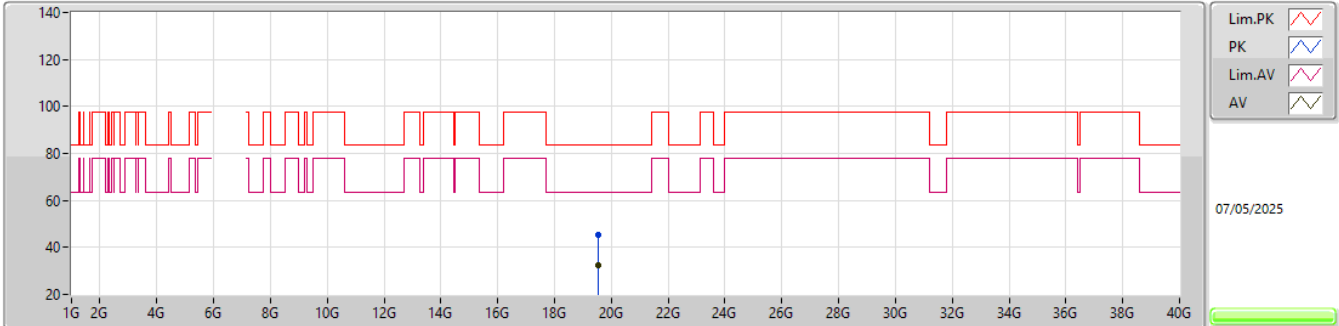


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.53688G	45.21	83.54	-38.33	40.91	1	Horizontal	132	1.72	-	37.80	16.07	49.57			
AV	19.53568G	32.16	63.54	-31.38	27.87	1	Horizontal	132	1.72	-	37.80	16.07	49.58			

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


6445MHz_TX

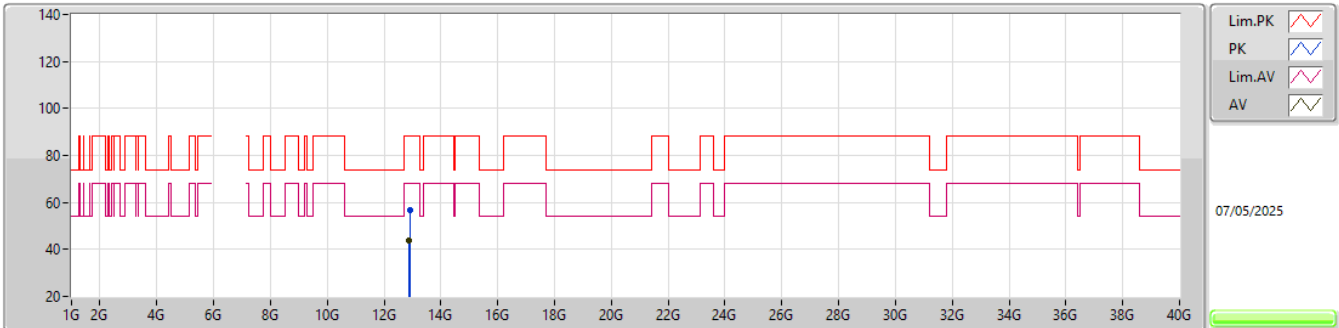
EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.89972G	56.71	88.20	-31.49	49.64	3	Vertical	306	1.75	-	39.40	12.85	45.18			
RMS	12.8906G	43.94	68.20	-24.26	36.88	3	Vertical	306	1.75	-	39.40	12.85	45.19			

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

6445MHz_TX

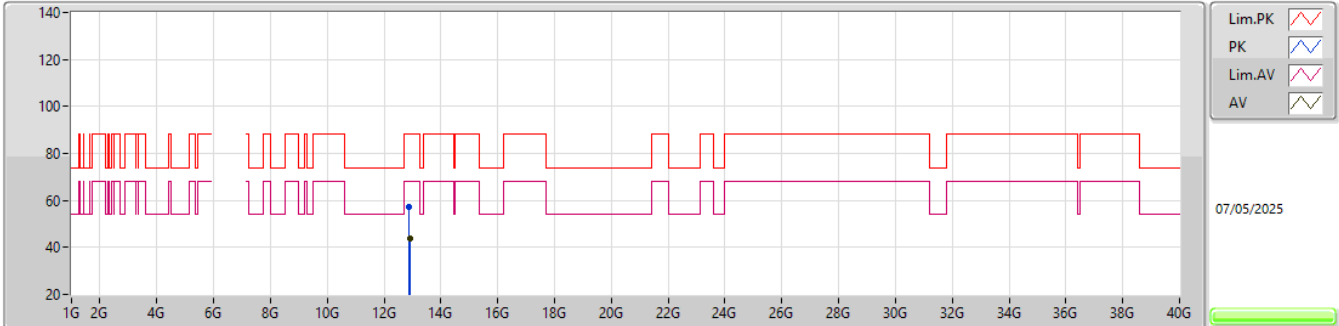


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.88032G	57.25	88.20	-30.95	50.21	3	Horizontal	223	1.61	-	39.40	12.84	45.20			
RMS	12.89806G	43.90	68.20	-24.30	36.83	3	Horizontal	223	1.61	-	39.40	12.85	45.18			

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


6445MHz_TX

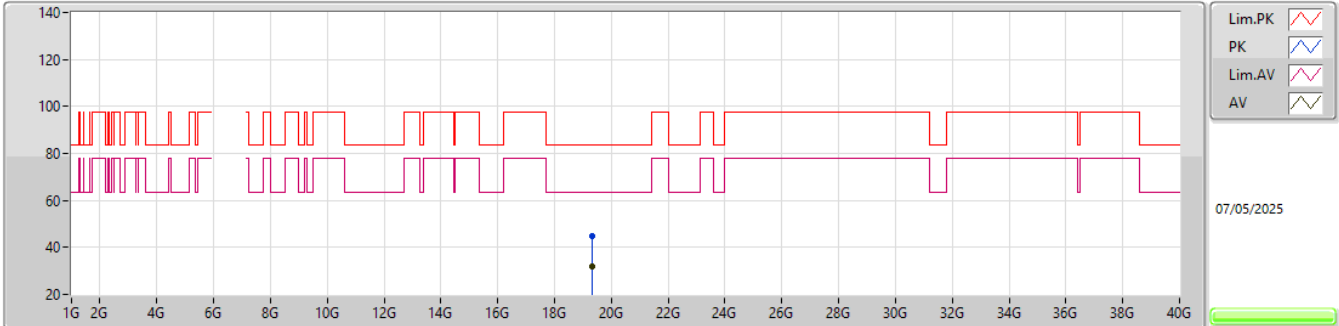EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.33612G	45.05	83.54	-38.49	40.62	1	Vertical	265	1.53	-	37.90	16.03	49.50			
AV	19.32688G	32.02	63.54	-31.52	27.59	1	Vertical	265	1.53	-	37.90	16.03	49.50			

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

6445MHz_TX

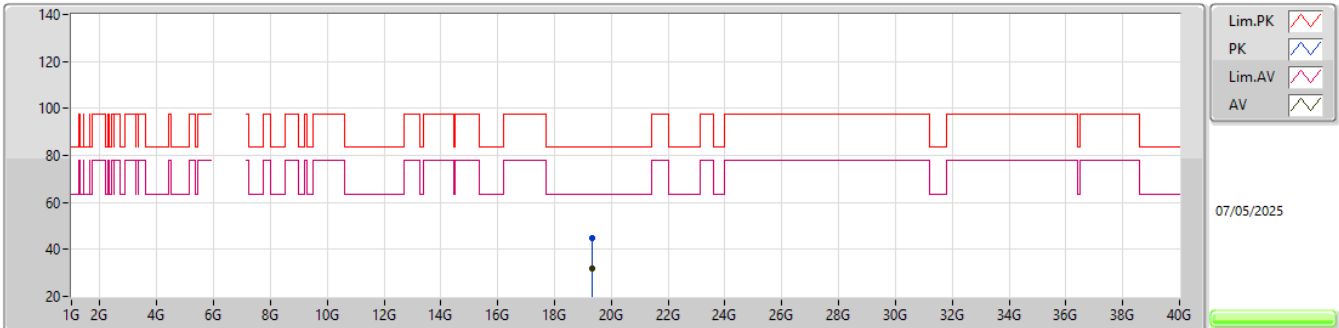


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.33908G	44.65	83.54	-38.89	40.23	1	Horizontal	294	2.00	-	37.90	16.03	49.51			
AV	19.32508G	32.00	63.54	-31.54	27.57	1	Horizontal	294	2.00	-	37.90	16.03	49.50			

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

6485MHz_TX

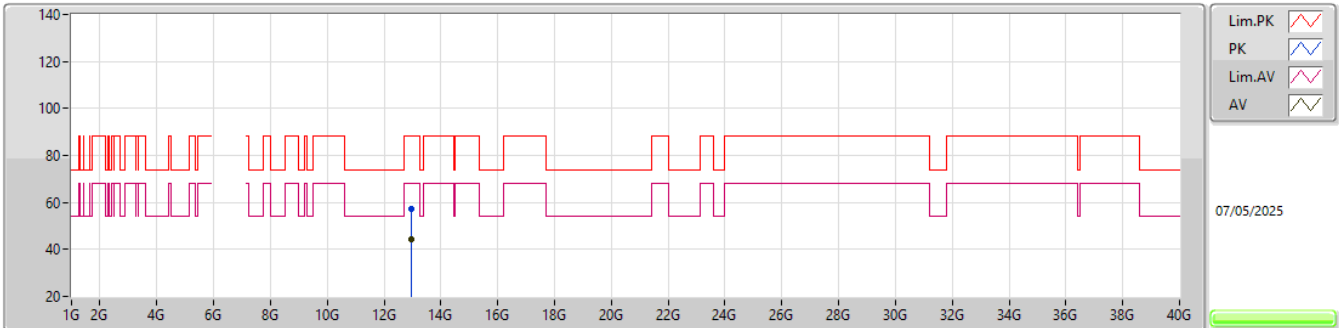


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.96098G	57.22	88.20	-30.98	49.93	3	Vertical	330	1.70	-	39.52	12.88	45.11			
RMS	12.97228G	44.50	68.20	-23.70	37.17	3	Vertical	330	1.70	-	39.54	12.89	45.10			

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

6485MHz_TX

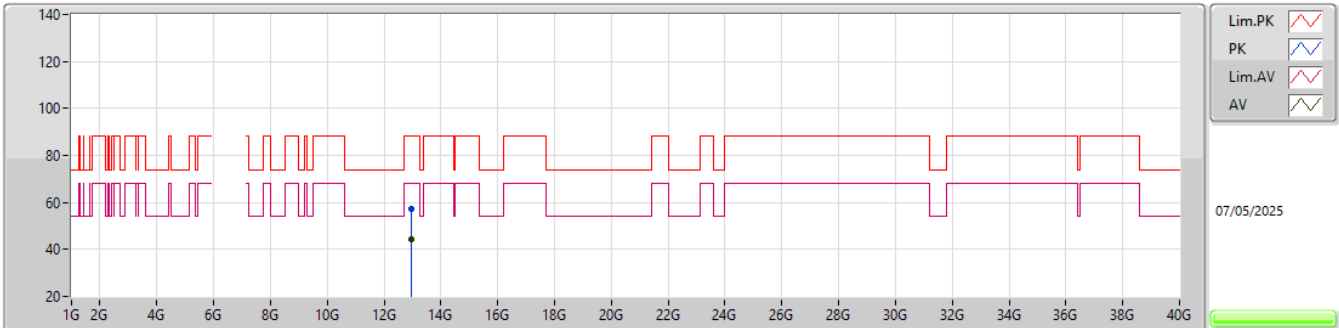


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.9712G	57.38	88.20	-30.82	50.05	3	Horizontal	25	1.73	-	39.54	12.89	45.10			
RMS	12.97376G	44.44	68.20	-23.76	37.10	3	Horizontal	25	1.73	-	39.55	12.89	45.10			

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


6485MHz_TX

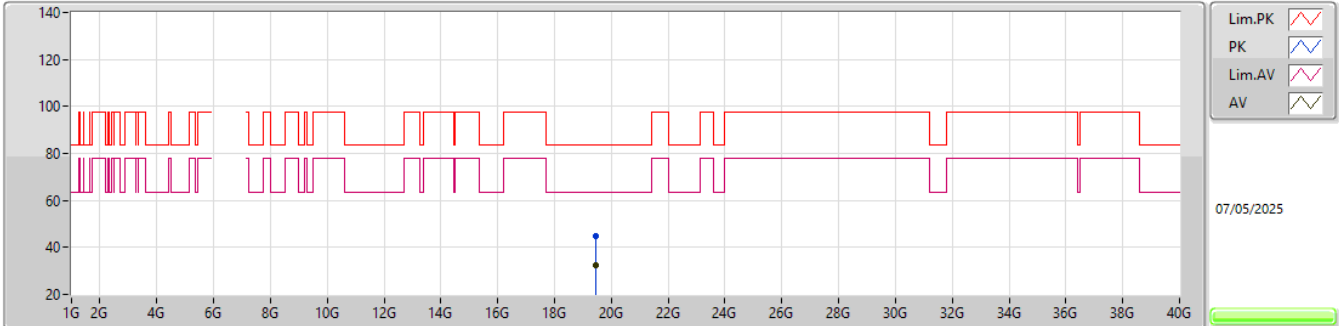EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.45492G	44.70	83.54	-38.84	40.33	1	Vertical	19	1.88	-	37.89	16.05	49.57			
AV	19.44876G	32.20	63.54	-31.34	27.82	1	Vertical	19	1.88	-	37.90	16.05	49.57			

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


6485MHz_TX

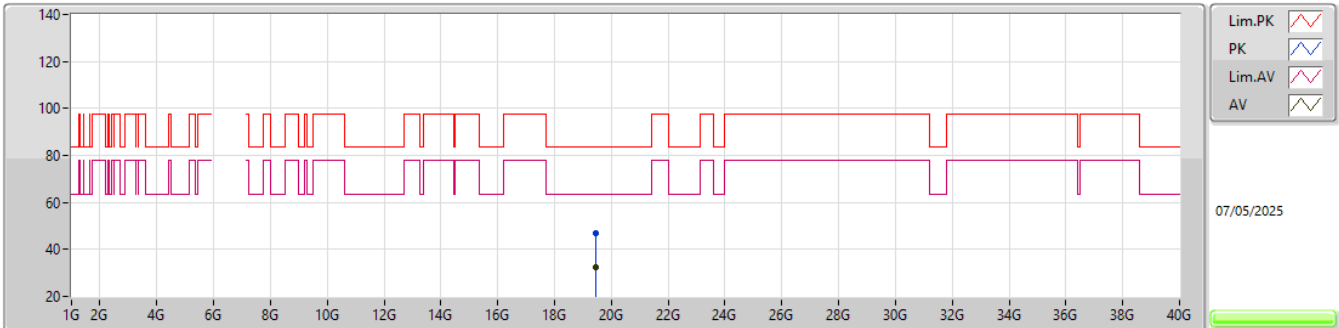EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.45084G	46.99	83.54	-36.55	42.61	1	Horizontal	113	1.72	-	37.90	16.05	49.57			
AV	19.44508G	32.16	63.54	-31.38	27.79	1	Horizontal	113	1.72	-	37.89	16.05	49.57			

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

6525MHz_TX

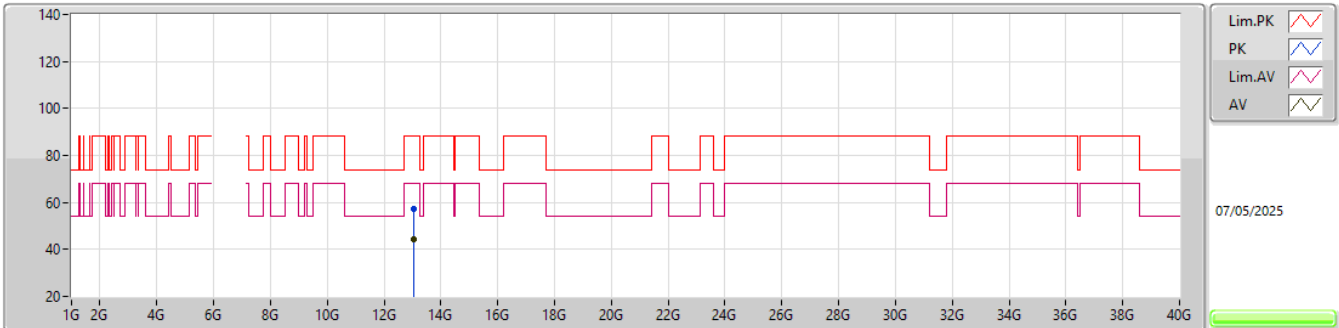


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.05148G	57.05	88.20	-31.15	49.55	3	Vertical	68	1.41	-	39.60	12.93	45.03			
RMS	13.05186G	44.49	68.20	-23.71	36.99	3	Vertical	68	1.41	-	39.60	12.93	45.03			

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

6525MHz_TX

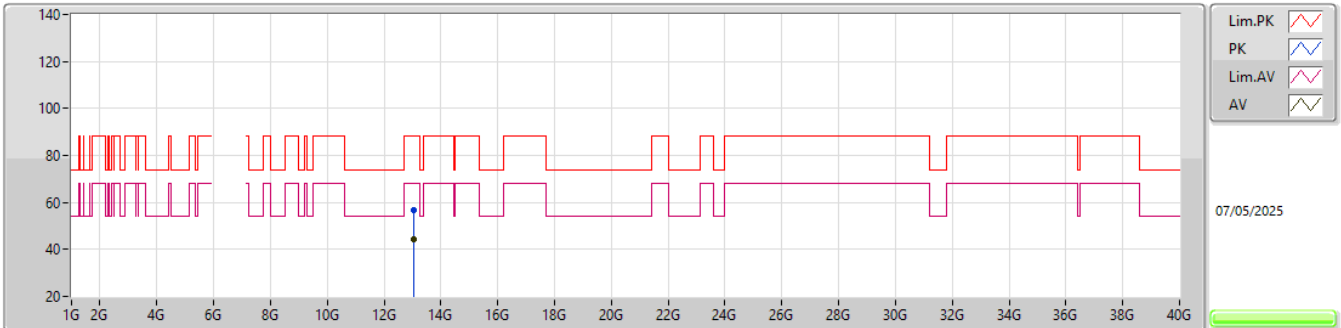


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.04278G	56.53	88.20	-31.67	49.03	3	Horizontal	123	1.80	-	39.60	12.93	45.03			
RMS	13.05856G	44.45	68.20	-23.75	36.91	3	Horizontal	123	1.80	-	39.62	12.94	45.02			

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


6525MHz_TX

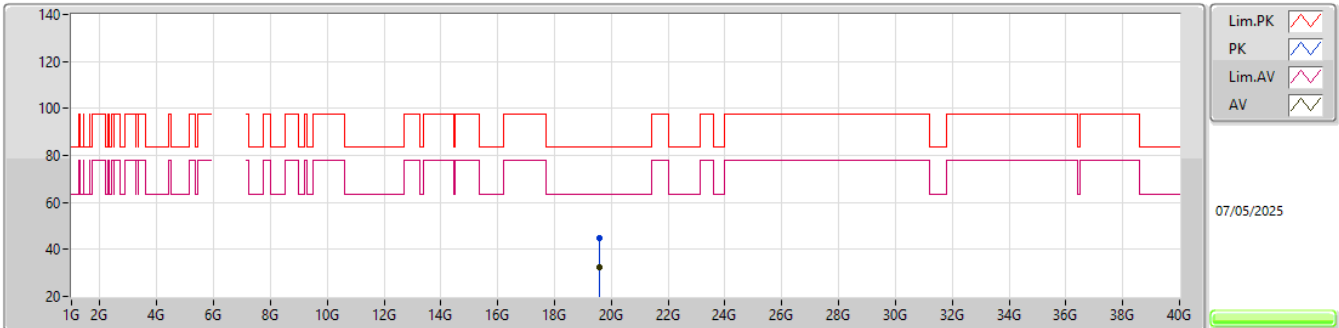EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.56612G	44.75	83.54	-38.79	40.40	1	Vertical	32	1.87	-	37.83	16.08	49.56			
AV	19.58256G	32.27	63.54	-31.27	27.85	1	Vertical	32	1.87	-	37.87	16.09	49.54			

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


6525MHz_TX

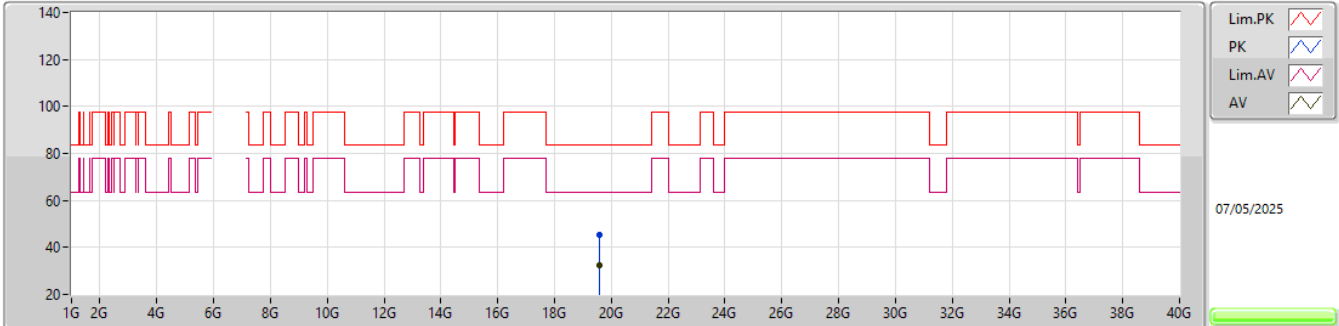EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.5704G	45.52	83.54	-38.02	41.15	1	Horizontal	298	1.66	-	37.84	16.08	49.55			
AV	19.57224G	32.24	63.54	-31.30	27.87	1	Horizontal	298	1.66	-	37.84	16.08	49.55			

6.425-6.525GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


6465MHz_TX

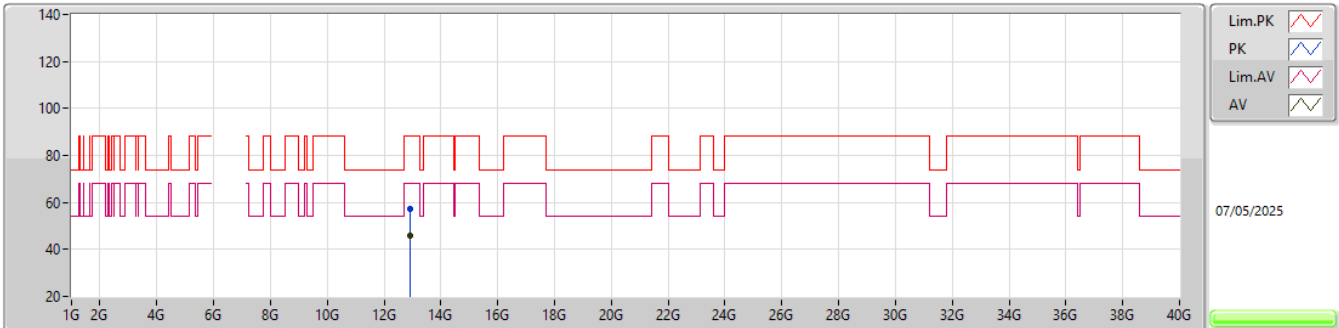EUT_X_2TX
Setting 21
01-U-S-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.92967G	57.05	88.20	-31.15	49.87	3	Vertical	176	1.37	-	39.46	12.87	45.15			
RMS	12.92982G	45.75	68.20	-22.45	38.57	3	Vertical	176	1.37	-	39.46	12.87	45.15			

6.425-6.525GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

6465MHz_TX

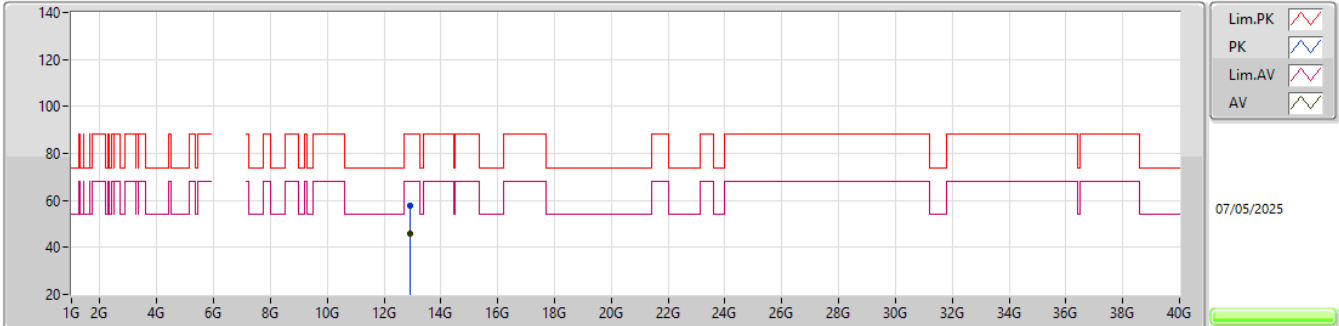


EUT_X_2TX
Setting 21
01-U-S-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.9302G	57.58	88.20	-30.62	50.40	3	Horizontal	205	1.76	-	39.46	12.87	45.15			
RMS	12.9301G	45.61	68.20	-22.59	38.43	3	Horizontal	205	1.76	-	39.46	12.87	45.15			

6.425-6.525GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


6465MHz_TX

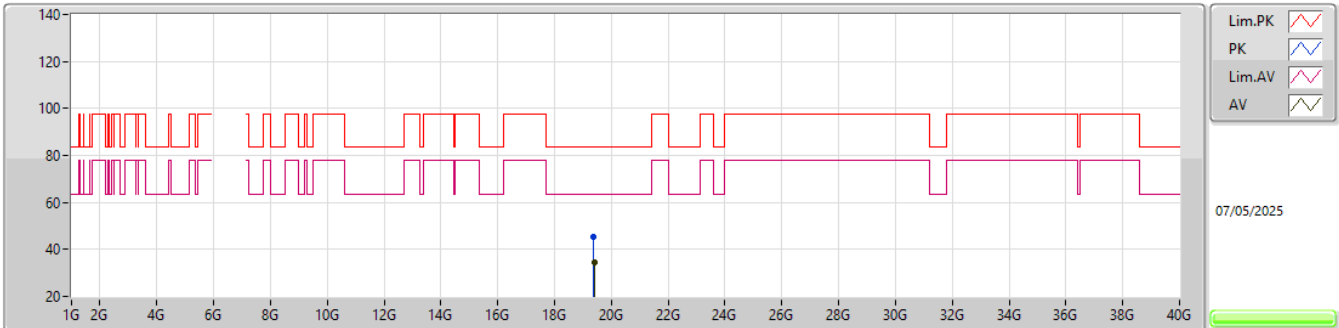EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.38596G	45.16	83.54	-38.38	40.82	1	Vertical	19	1.86	-	37.83	16.04	49.53			
AV	19.39052G	34.31	63.54	-29.23	29.99	1	Vertical	19	1.86	-	37.82	16.04	49.54			

6.425-6.525GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


6465MHz_TX

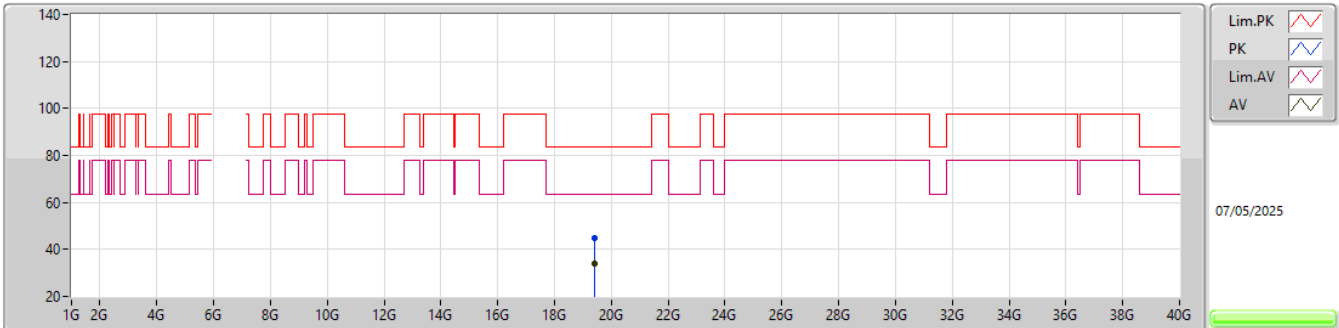EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.39536G	45.00	83.54	-38.54	40.69	1	Horizontal	95	1.91	-	37.81	16.04	49.54			
AV	19.38968G	34.14	63.54	-29.40	29.82	1	Horizontal	95	1.91	-	37.82	16.04	49.54			

6.425-6.525GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

6545MHz_TX

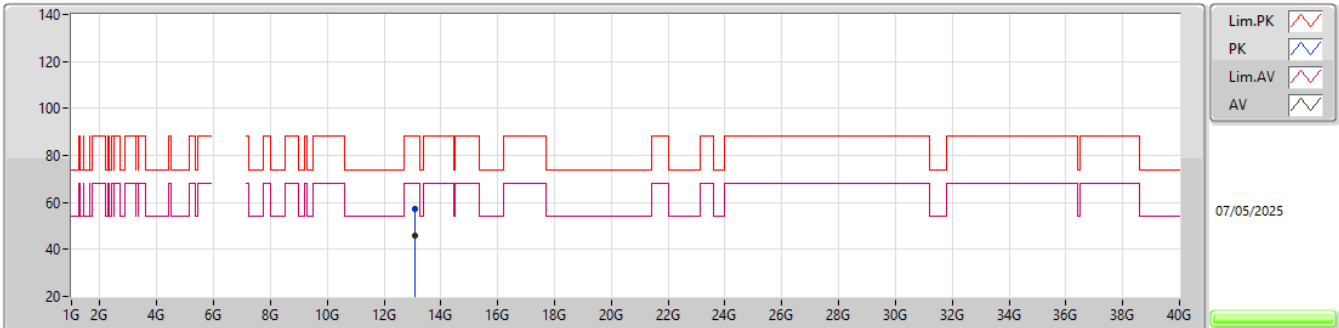


EUT_X_2TX
Setting 21
01-U-S-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.09029G	57.43	88.20	-30.77	49.80	3	Vertical	165	1.51	-	39.68	12.95	45.00			
RMS	13.09012G	46.00	68.20	-22.20	38.37	3	Vertical	165	1.51	-	39.68	12.95	45.00			

6.425-6.525GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


6545MHz_TX

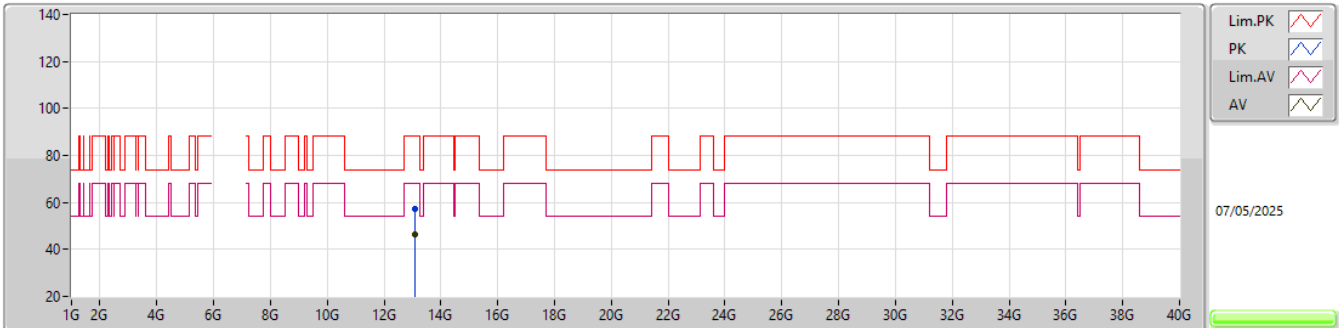EUT_X_2TX
Setting 21
01-U-S-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.09013G	57.42	88.20	-30.78	49.79	3	Horizontal	15	1.75	-	39.68	12.95	45.00			
RMS	13.08974G	46.32	68.20	-21.88	38.69	3	Horizontal	15	1.75	-	39.68	12.95	45.00			

6.425-6.525GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

6545MHz_TX

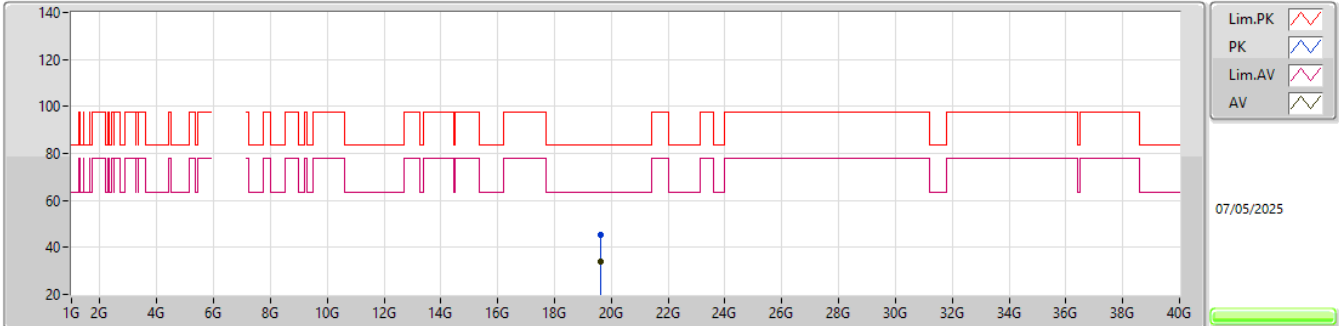


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.62772G	45.32	83.54	-38.22	40.89	1	Vertical	108	1.78	-	37.84	16.10	49.51			
AV	19.6368G	34.20	63.54	-29.34	29.77	1	Vertical	108	1.78	-	37.83	16.11	49.51			

6.425-6.525GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

6545MHz_TX

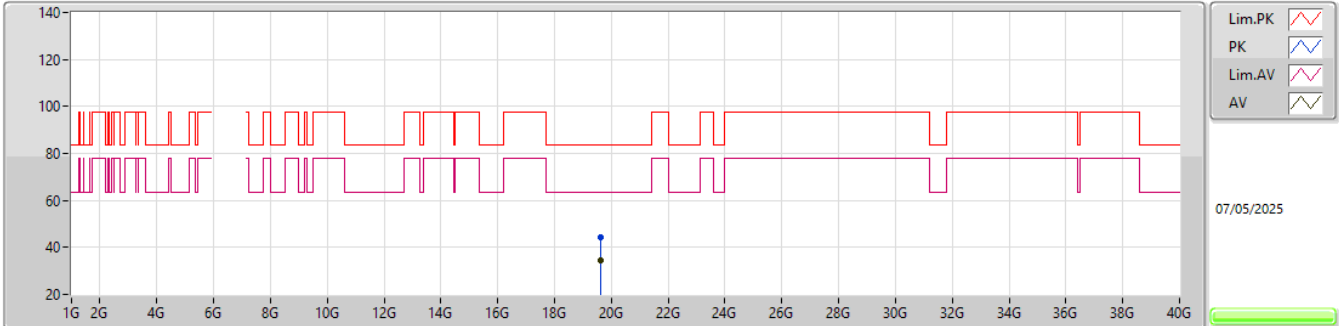


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.6374G	44.43	83.54	-39.11	40.00	1	Horizontal	45	1.93	-	37.83	16.11	49.51			
AV	19.63176G	34.40	63.54	-29.14	29.97	1	Horizontal	45	1.93	-	37.84	16.10	49.51			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

6535MHz_TX

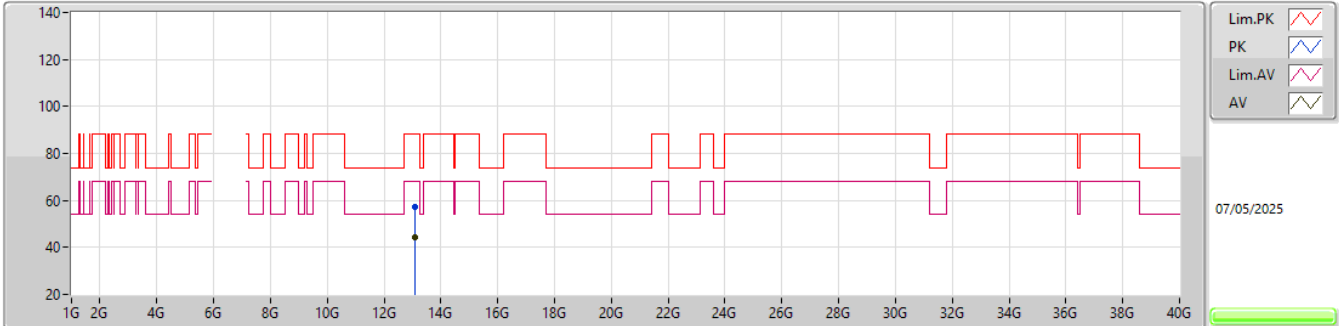


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.07672G	57.40	88.20	-30.80	49.81	3	Vertical	62	1.78	-	39.65	12.95	45.01			
RMS	13.07354G	44.52	68.20	-23.68	36.93	3	Vertical	62	1.78	-	39.65	12.95	45.01			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

6535MHz_TX

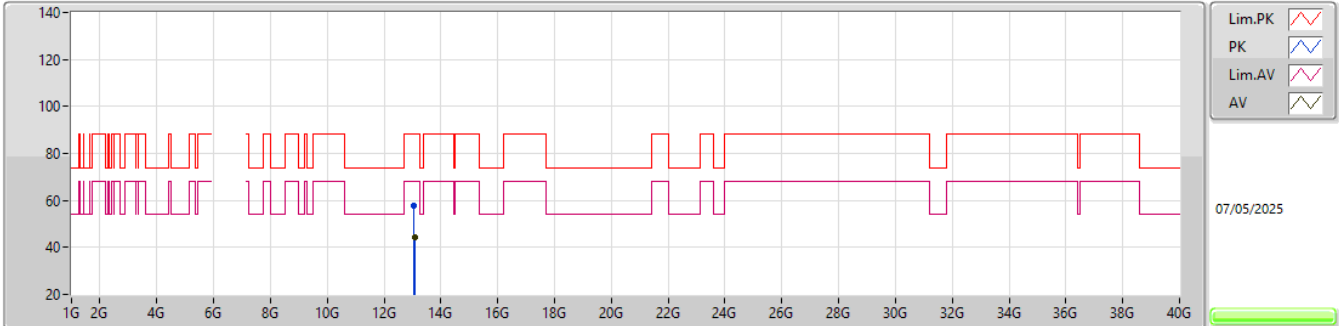


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.06163G	57.83	88.20	-30.37	50.29	3	Horizontal	161	1.47	-	39.62	12.94	45.02			
RMS	13.06844G	44.52	68.20	-23.68	36.95	3	Horizontal	161	1.47	-	39.64	12.94	45.01			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

6535MHz_TX

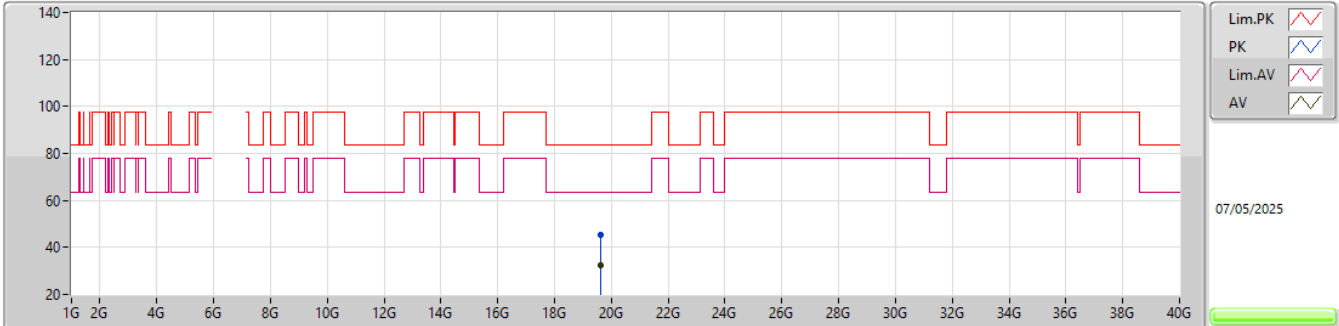


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.60632G	45.39	83.54	-38.15	40.93	1	Vertical	262	1.43	-	37.89	16.10	49.53			
AV	19.61212G	32.40	63.54	-31.14	27.94	1	Vertical	262	1.43	-	37.88	16.10	49.52			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


6535MHz_TX

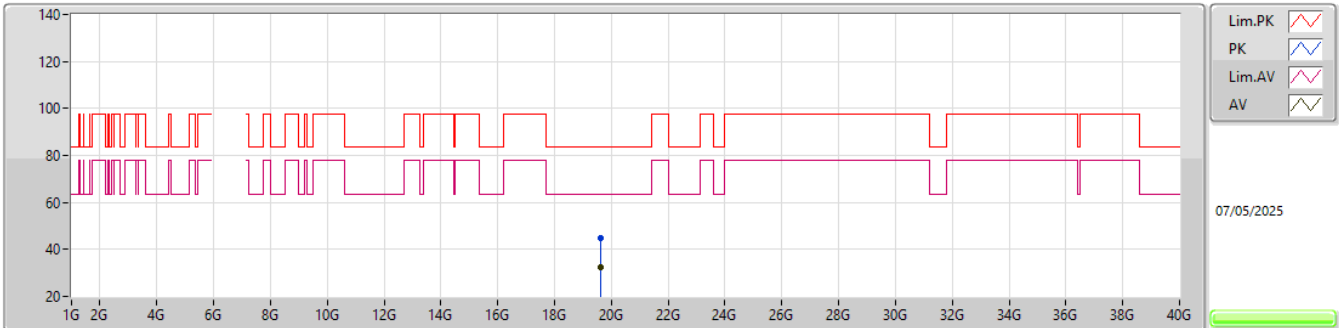EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.60824G	44.85	83.54	-38.69	40.40	1	Horizontal	84	1.71	-	37.88	16.10	49.53			
AV	19.60512G	32.40	63.54	-31.14	27.94	1	Horizontal	84	1.71	-	37.89	16.10	49.53			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

6695MHz_TX

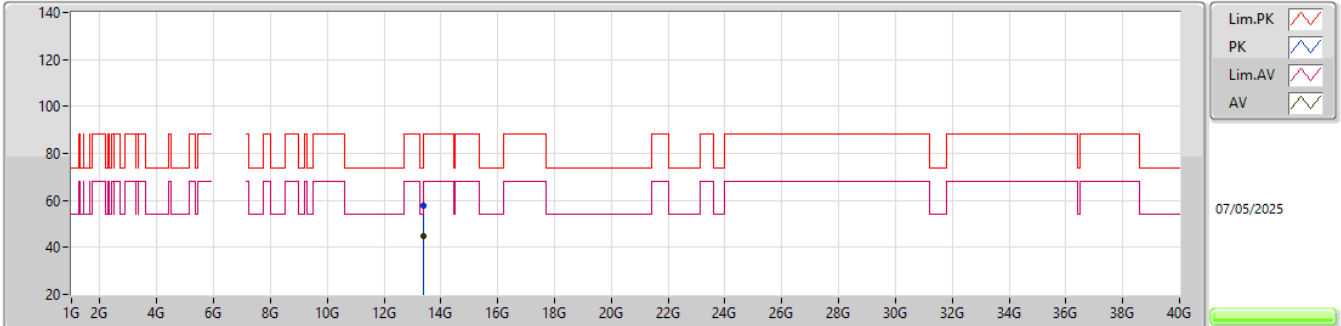


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.39344G	57.78	74.00	-16.22	49.21	3	Vertical	5	1.82	-	40.20	13.12	44.75			
AV	13.3805G	45.07	54.00	-8.93	36.52	3	Vertical	5	1.82	-	40.20	13.11	44.76			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


6695MHz_TX

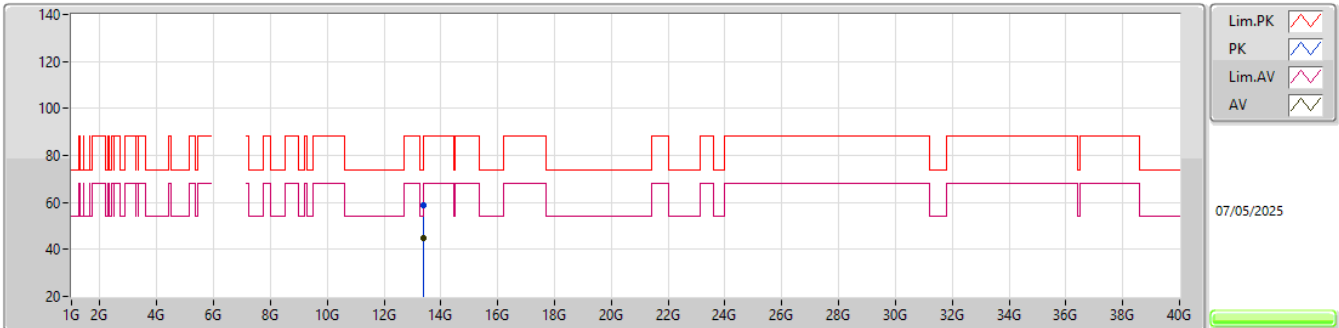EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.3851G	58.62	74.00	-15.38	50.06	3	Horizontal	207	1.78	-	40.20	13.11	44.75			
AV	13.38058G	45.03	54.00	-8.97	36.48	3	Horizontal	207	1.78	-	40.20	13.11	44.76			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


6695MHz_TX

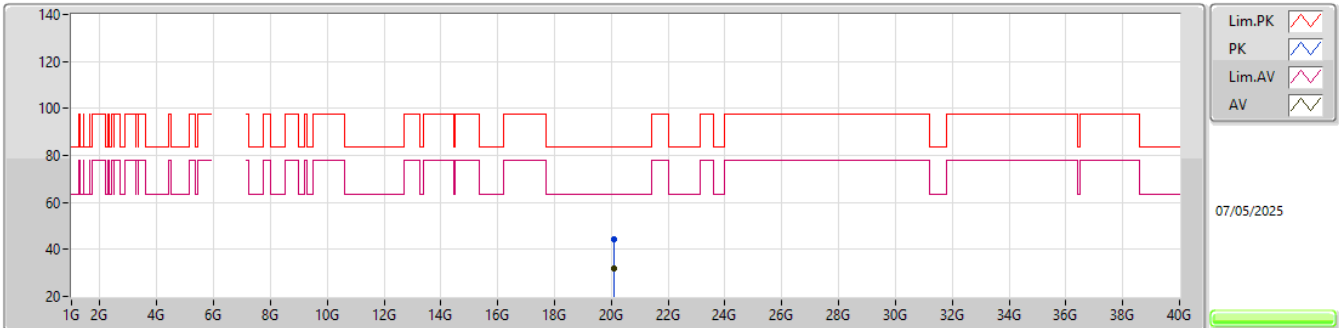EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.08112G	44.40	83.54	-39.14	39.53	1	Vertical	123	1.53	-	37.86	16.27	49.26			
AV	20.09244G	31.86	63.54	-31.68	26.95	1	Vertical	123	1.53	-	37.88	16.28	49.25			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


6695MHz_TX

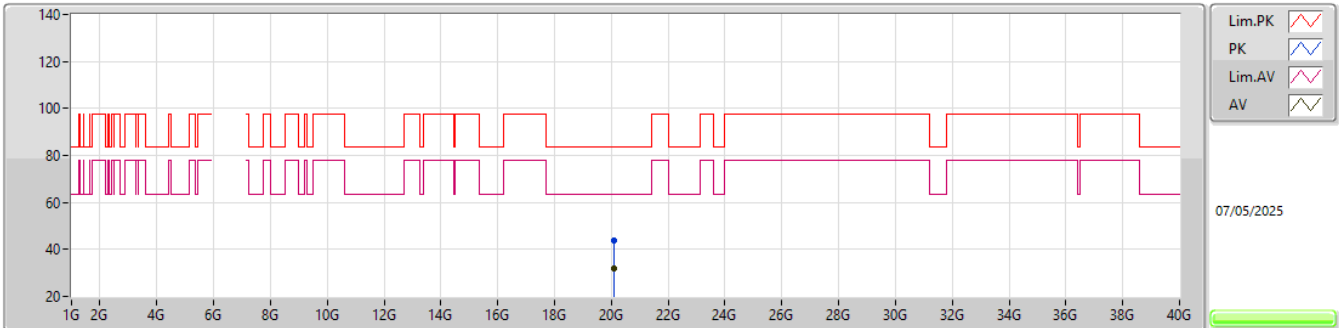EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.07944G	43.90	83.54	-39.64	39.03	1	Horizontal	92	1.91	-	37.86	16.27	49.26			
AV	20.07548G	31.92	63.54	-31.62	27.06	1	Horizontal	92	1.91	-	37.85	16.27	49.26			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

6875MHz_TX

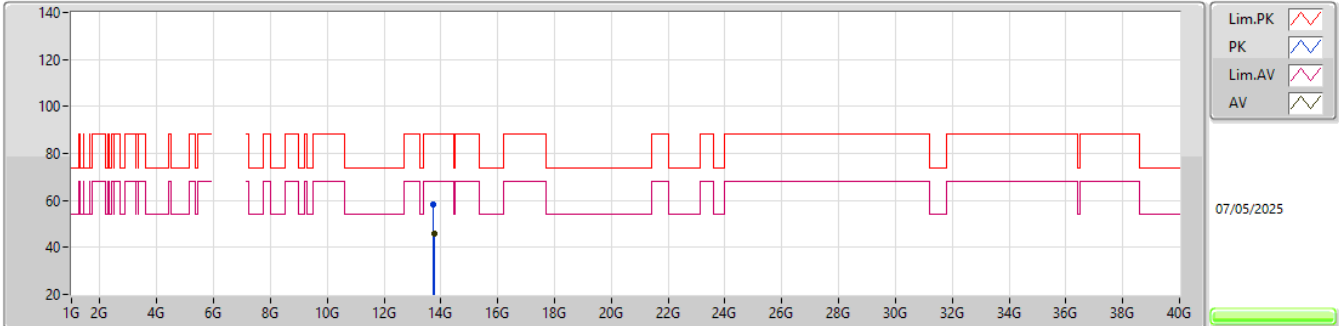


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.74596G	58.04	88.20	-30.16	48.73	3	Vertical	112	1.46	-	40.49	13.31	44.49			
RMS	13.75972G	45.61	68.20	-22.59	36.23	3	Vertical	112	1.46	-	40.54	13.32	44.48			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

6875MHz_TX

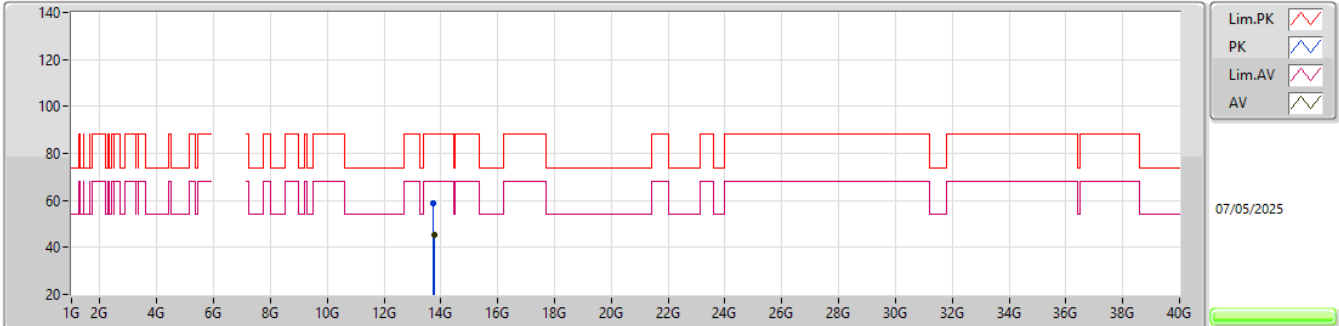


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.74384G	58.67	88.20	-29.53	49.36	3	Horizontal	152	2.00	-	40.49	13.31	44.49			
RMS	13.75986G	45.59	68.20	-22.61	36.21	3	Horizontal	152	2.00	-	40.54	13.32	44.48			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


6875MHz_TX

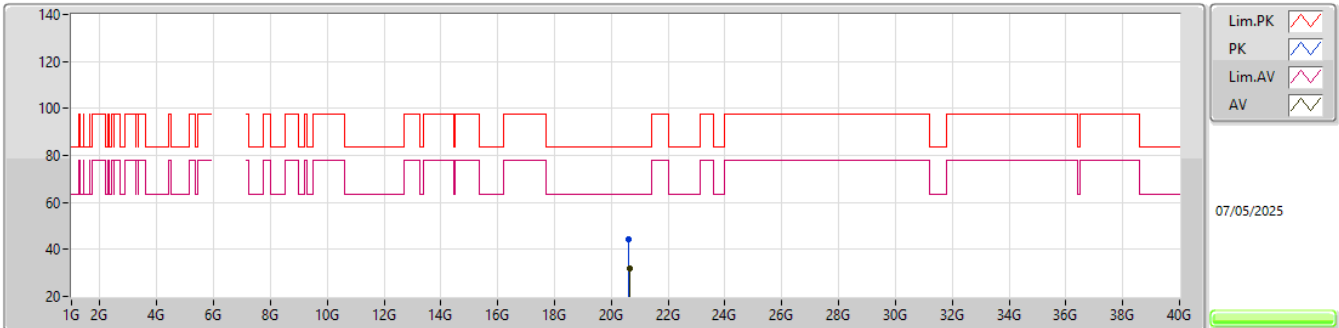EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.62248G	44.34	83.54	-39.20	39.04	1	Vertical	336	1.48	-	38.00	16.47	49.17			
AV	20.63044G	31.82	63.54	-31.72	26.51	1	Vertical	336	1.48	-	38.00	16.47	49.16			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


6875MHz_TX

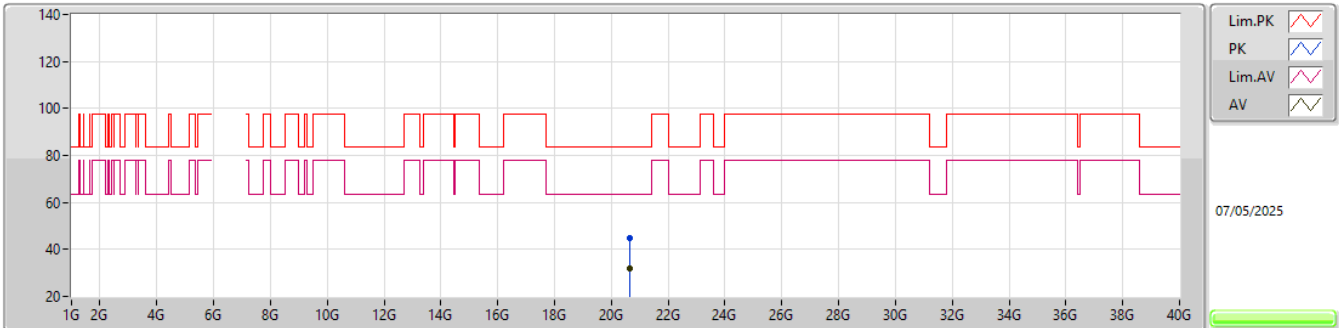EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.63432G	44.87	83.54	-38.67	39.56	1	Horizontal	278	1.88	-	38.00	16.47	49.16			
AV	20.63052G	31.88	63.54	-31.66	26.57	1	Horizontal	278	1.88	-	38.00	16.47	49.16			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

6565MHz_TX

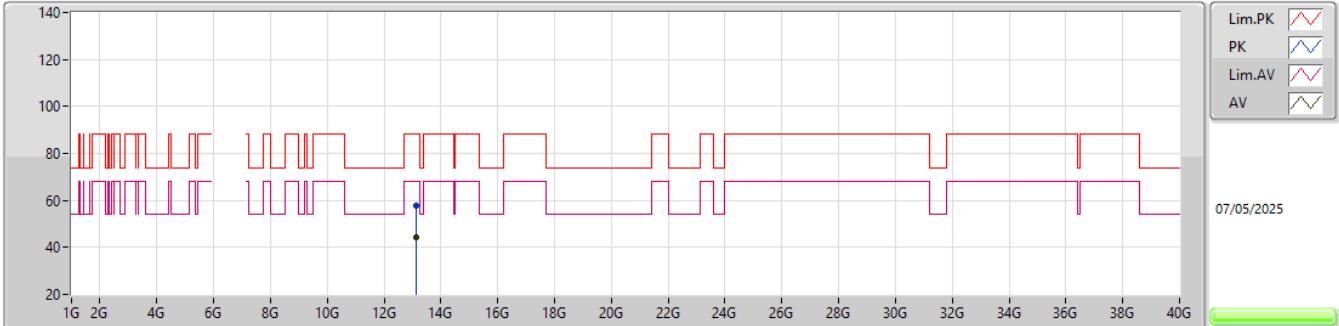


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.13962G	57.96	88.20	-30.24	50.16	3	Vertical	339	1.53	-	39.78	12.98	44.96			
RMS	13.13082G	44.53	68.20	-23.67	36.75	3	Vertical	339	1.53	-	39.76	12.98	44.96			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

6565MHz_TX

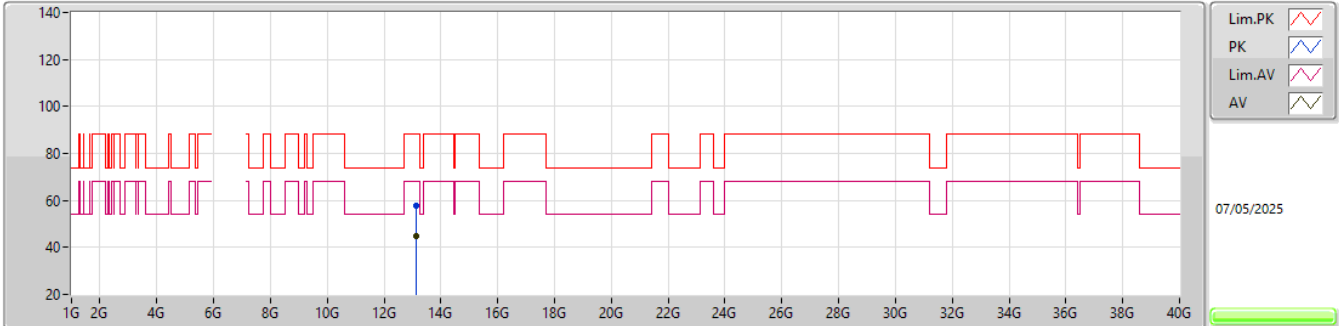


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.13536G	57.54	88.20	-30.66	49.75	3	Horizontal	313	1.68	-	39.77	12.98	44.96			
RMS	13.12798G	44.61	68.20	-23.59	36.85	3	Horizontal	313	1.68	-	39.76	12.97	44.97			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

6565MHz_TX

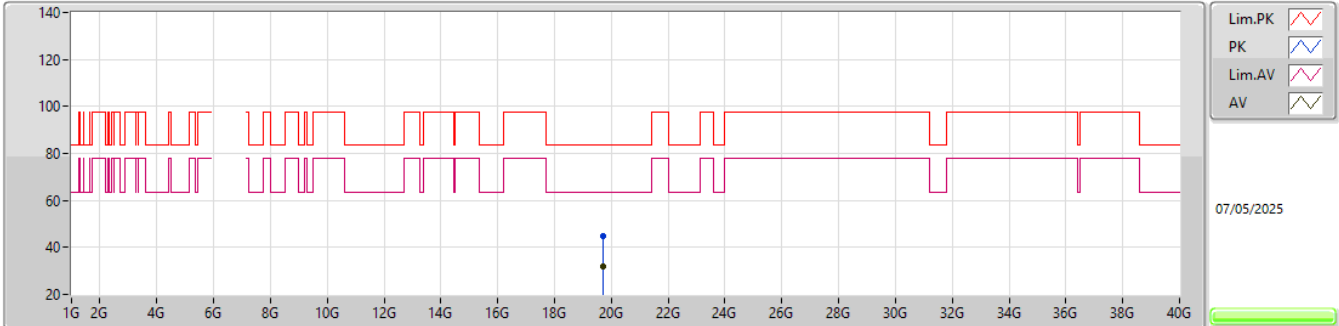


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.69072G	44.69	83.54	-38.85	40.24	1	Vertical	126	1.41	-	37.80	16.12	49.47			
AV	19.69612G	32.02	63.54	-31.52	27.56	1	Vertical	126	1.41	-	37.80	16.13	49.47			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


6565MHz_TX

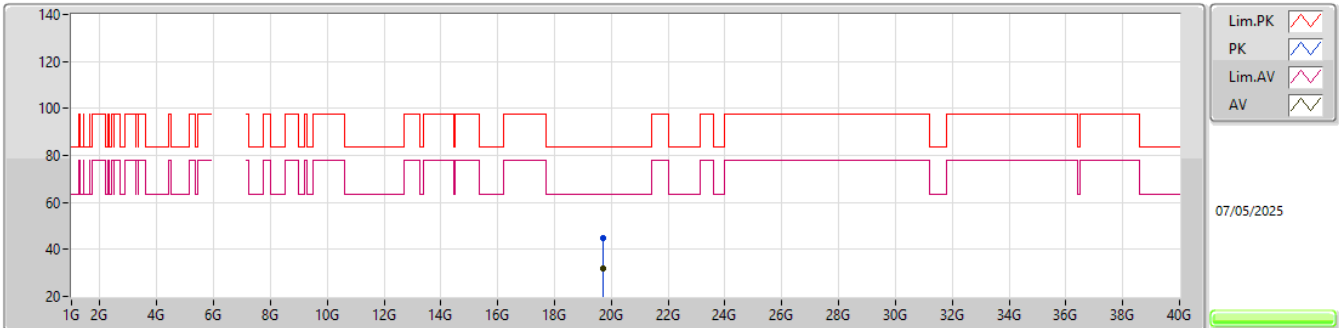EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.69188G	44.68	83.54	-38.86	40.22	1	Horizontal	286	1.64	-	37.80	16.13	49.47			
AV	19.69804G	32.02	63.54	-31.52	27.56	1	Horizontal	286	1.64	-	37.80	16.13	49.47			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

6685MHz_TX

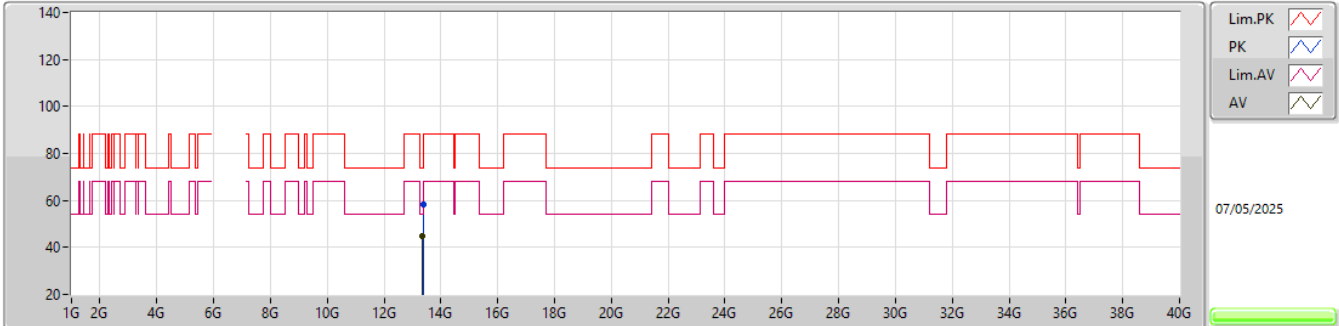


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.37866G	58.46	74.00	-15.54	49.91	3	Vertical	311	1.36	-	40.20	13.11	44.76			
AV	13.36068G	44.95	54.00	-9.05	36.42	3	Vertical	311	1.36	-	40.20	13.10	44.77			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

6685MHz_TX

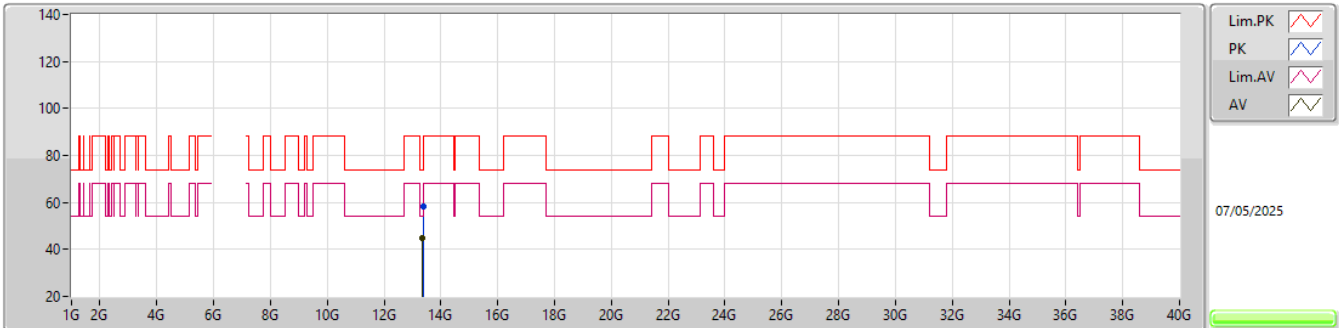


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.37214G	58.06	74.00	-15.94	49.51	3	Horizontal	257	1.62	-	40.20	13.11	44.76			
AV	13.36016G	44.92	54.00	-9.08	36.39	3	Horizontal	257	1.62	-	40.20	13.10	44.77			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

6685MHz_TX

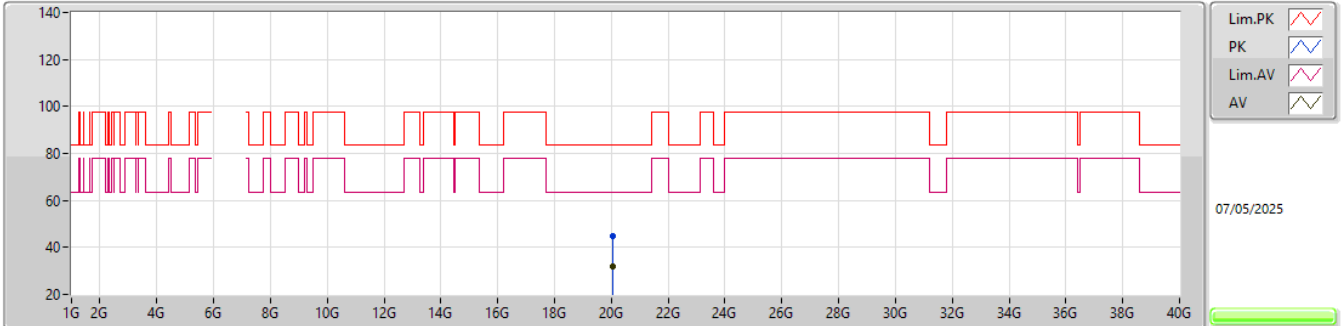


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.04916G	44.77	83.54	-38.77	39.97	1	Vertical	72	1.43	-	37.80	16.26	49.26			
AV	20.06212G	31.85	63.54	-31.69	27.03	1	Vertical	72	1.43	-	37.82	16.26	49.26			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


6685MHz_TX

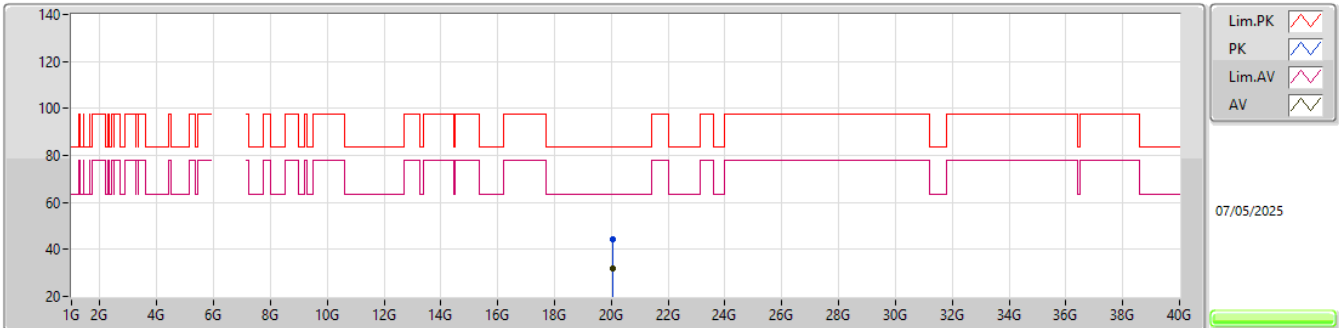EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.0526G	44.47	83.54	-39.07	39.66	1	Horizontal	312	1.95	-	37.81	16.26	49.26			
AV	20.06052G	31.89	63.54	-31.65	27.07	1	Horizontal	312	1.95	-	37.82	16.26	49.26			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

6885MHz_TX

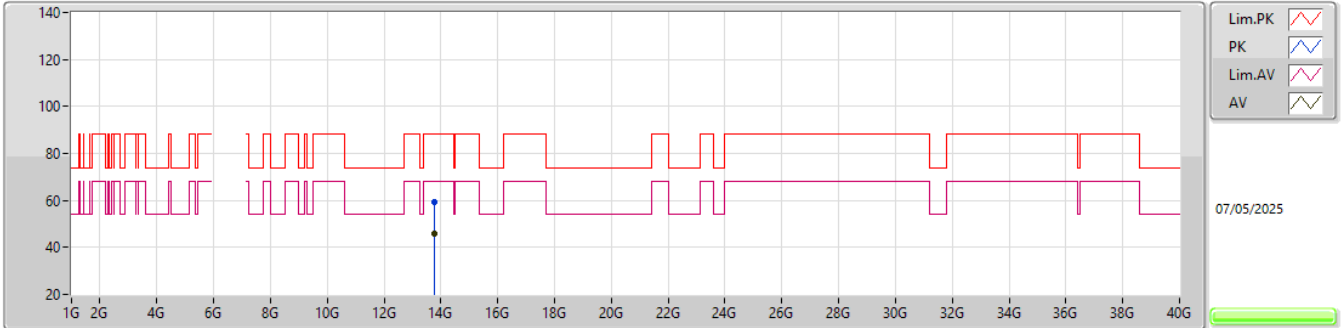


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.77106G	59.34	88.20	-28.86	49.90	3	Vertical	195	1.97	-	40.58	13.33	44.47			
RMS	13.76766G	45.91	68.20	-22.29	36.49	3	Vertical	195	1.97	-	40.57	13.32	44.47			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


6885MHz_TX

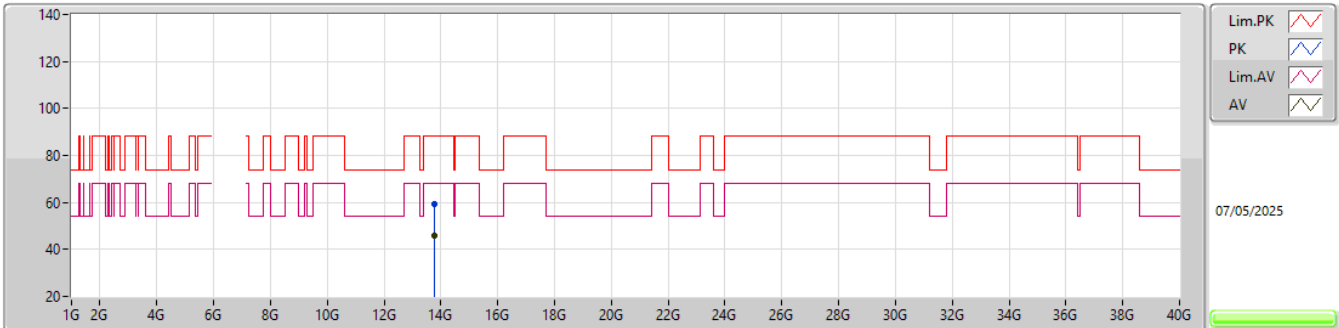EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.7762G	59.54	88.20	-28.66	50.08	3	Horizontal	188	1.72	-	40.60	13.33	44.47			
RMS	13.76784G	45.87	68.20	-22.33	36.45	3	Horizontal	188	1.72	-	40.57	13.32	44.47			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


6885MHz_TX

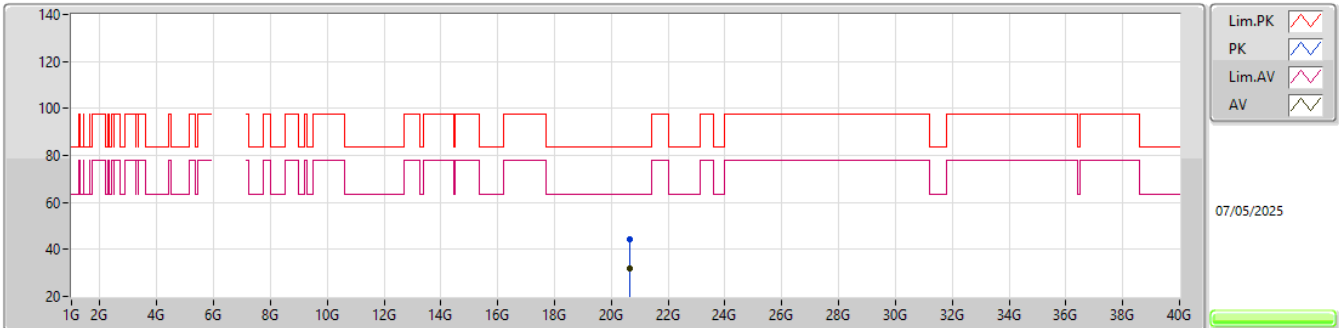EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.65168G	44.28	83.54	-39.26	38.96	1	Vertical	313	1.44	-	38.00	16.47	49.15			
AV	20.6488G	32.00	63.54	-31.54	26.68	1	Vertical	313	1.44	-	38.00	16.47	49.15			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


6885MHz_TX

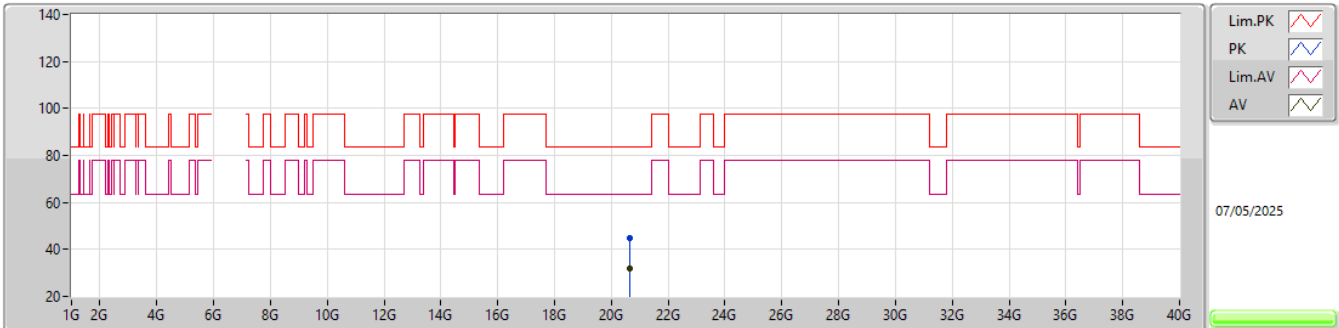EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.65316G	44.65	83.54	-38.89	39.34	1	Horizontal	236	1.87	-	37.99	16.47	49.15			
AV	20.64728G	31.95	63.54	-31.59	26.63	1	Horizontal	236	1.87	-	38.00	16.47	49.15			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


6625MHz_TX

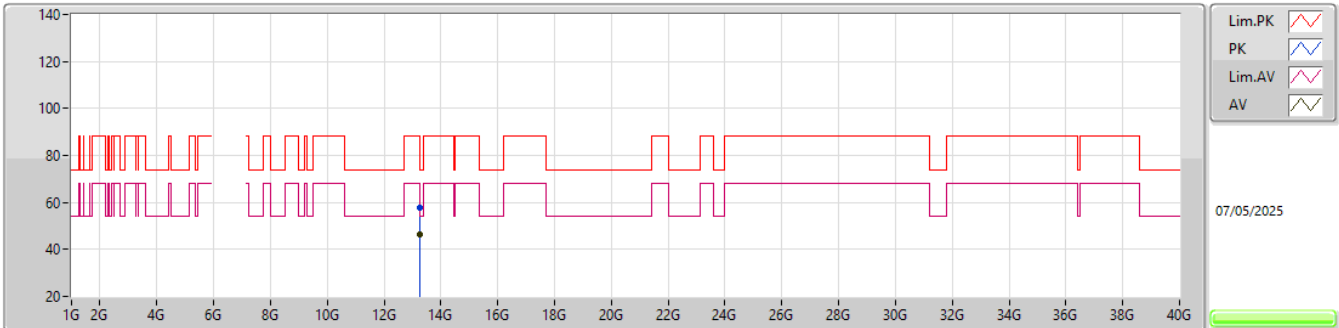EUT_X_2TX
Setting 21
01-U-S-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.25027G	57.60	74.00	-16.40	49.42	3	Vertical	203	1.47	-	40.00	13.04	44.86			
AV	13.2506G	46.37	54.00	-7.63	38.19	3	Vertical	203	1.47	-	40.00	13.04	44.86			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


6625MHz_TX

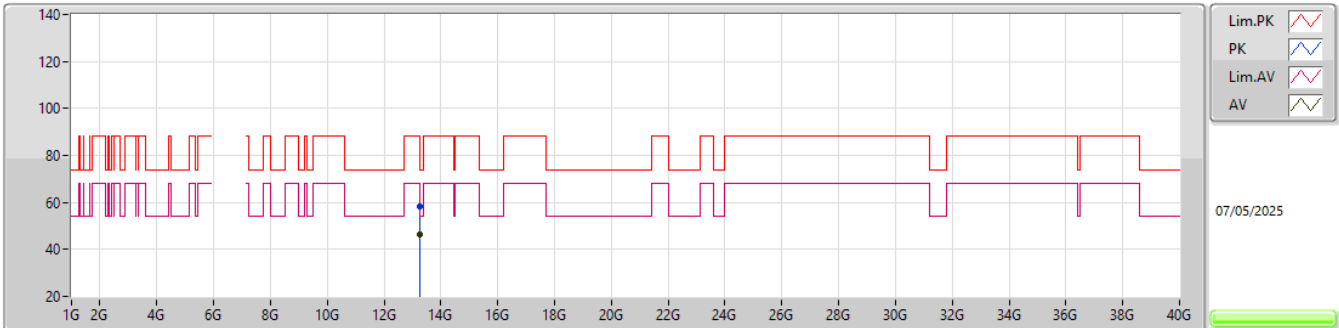EUT_X_2TX
Setting 21
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.25045G	58.51	74.00	-15.49	50.33	3	Horizontal	14	1.91	-	40.00	13.04	44.86			
AV	13.25026G	46.22	54.00	-7.78	38.04	3	Horizontal	14	1.91	-	40.00	13.04	44.86			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

6625MHz_TX

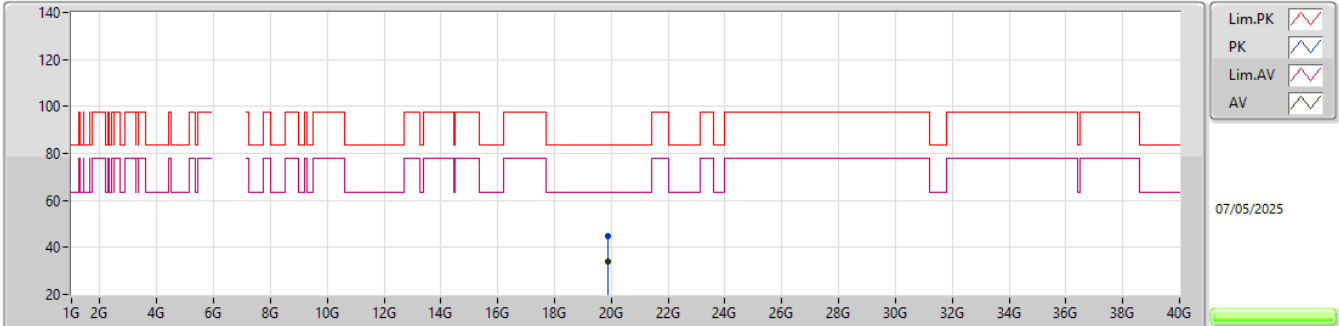


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.86956G	44.63	83.54	-38.91	39.89	1	Vertical	21	1.99	-	37.90	16.19	49.35			
AV	19.87384G	33.71	63.54	-29.83	28.97	1	Vertical	21	1.99	-	37.90	16.19	49.35			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

6625MHz_TX

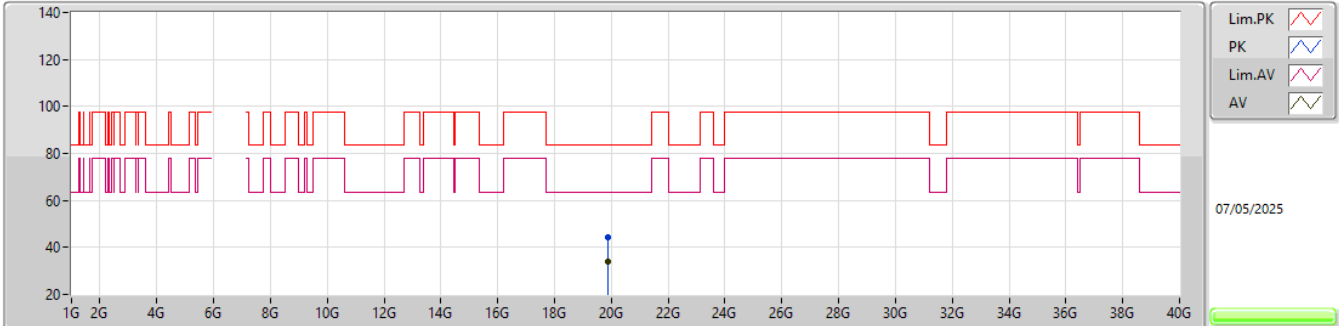


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.86936G	44.19	83.54	-39.35	39.45	1	Horizontal	80	1.77	-	37.90	16.19	49.35			
AV	19.8826G	33.80	63.54	-29.74	29.05	1	Horizontal	80	1.77	-	37.90	16.19	49.34			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


6705MHz_TX

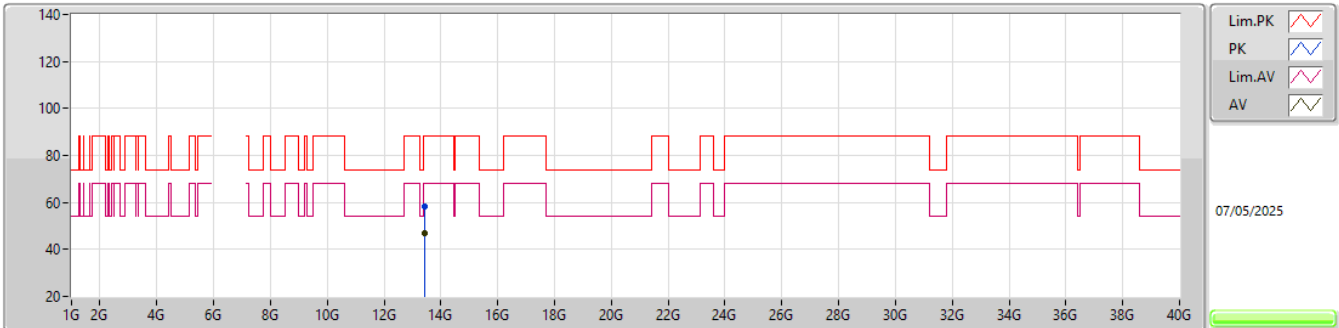EUT_X_2TX
Setting 21
01-U-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.40976G	58.22	88.20	-29.98	49.62	3	Vertical	151	1.40	-	40.20	13.13	44.73			
RMS	13.40972G	46.80	68.20	-21.40	38.20	3	Vertical	151	1.40	-	40.20	13.13	44.73			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


6705MHz_TX

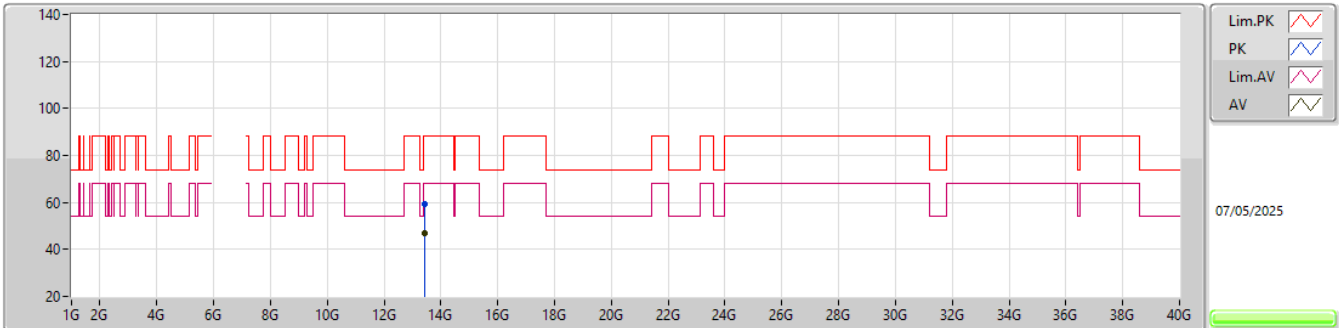EUT_X_2TX
Setting 21
01-U-S-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.41029G	59.20	88.20	-29.00	50.60	3	Horizontal	11	1.94	-	40.20	13.13	44.73			
RMS	13.41029G	46.74	68.20	-21.46	38.14	3	Horizontal	11	1.94	-	40.20	13.13	44.73			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

6705MHz_TX

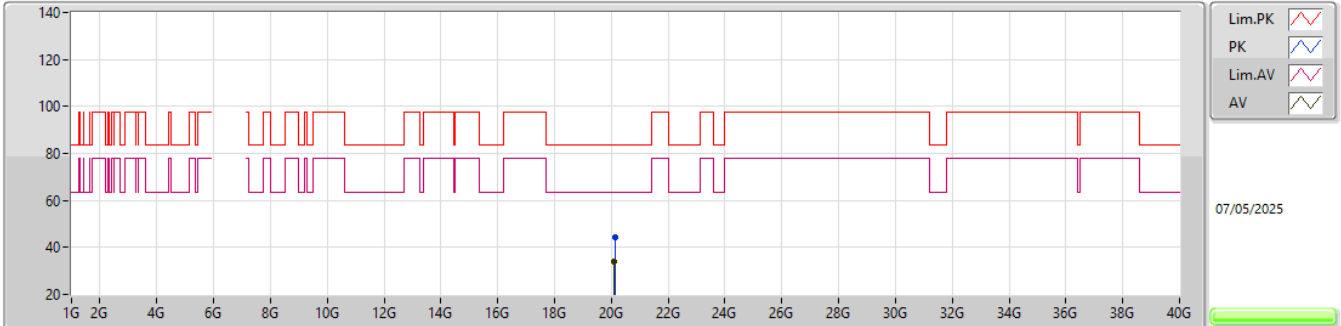


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.11624G	44.30	83.54	-39.24	39.36	1	Vertical	255	1.96	-	37.90	16.29	49.25			
AV	20.11444G	33.89	63.54	-29.65	28.95	1	Vertical	255	1.96	-	37.90	16.29	49.25			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


6705MHz_TX

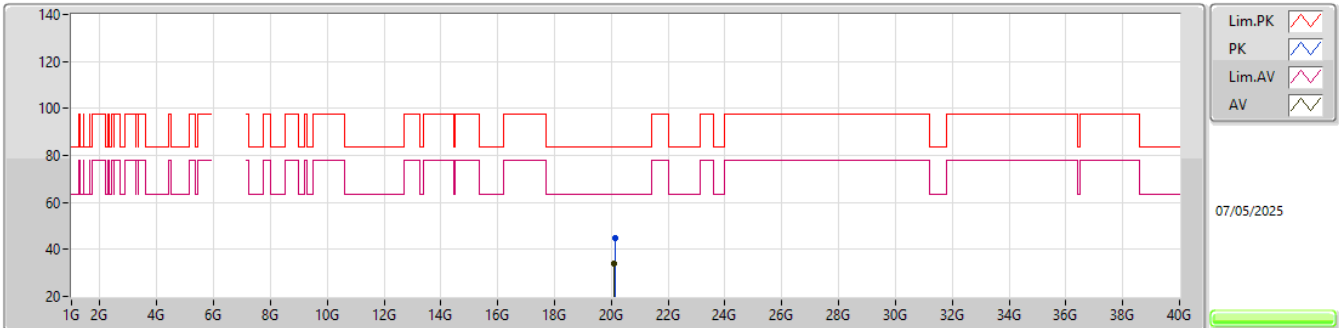EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.12128G	44.75	83.54	-38.79	39.81	1	Horizontal	194	1.65	-	37.90	16.29	49.25			
AV	20.10828G	34.21	63.54	-29.33	29.27	1	Horizontal	194	1.65	-	37.90	16.29	49.25			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

6785MHz_TX

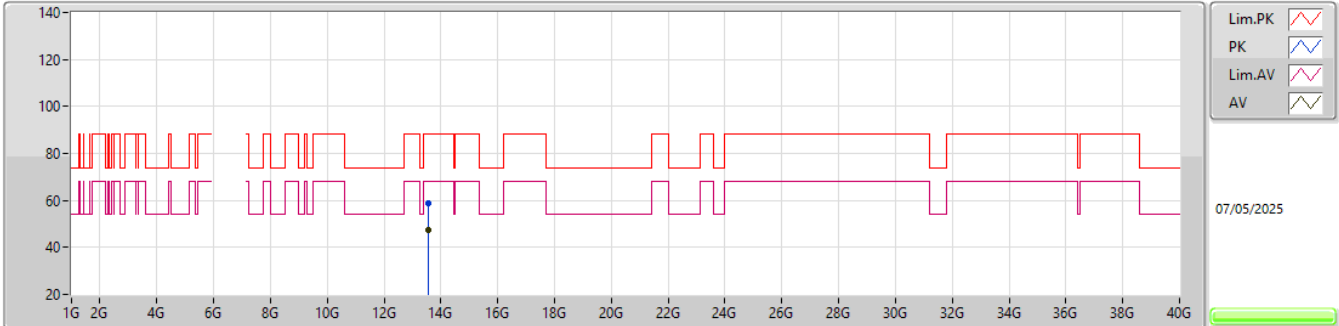


EUT_X_2TX
Setting 21
01-U-S-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.57014G	58.77	88.20	-29.43	49.80	3	Vertical	355	1.70	-	40.36	13.22	44.61			
RMS	13.56992G	47.66	68.20	-20.54	38.69	3	Vertical	355	1.70	-	40.36	13.22	44.61			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

6785MHz_TX

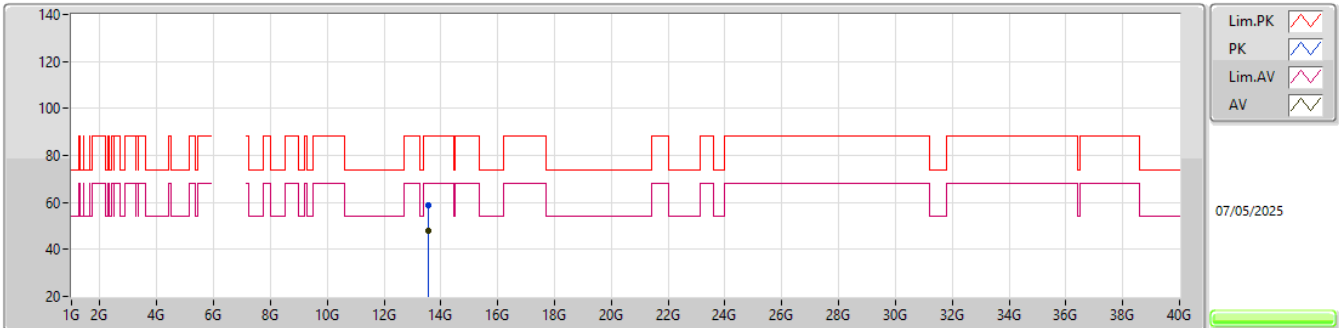


EUT_X_2TX
Setting 21
01-U-S-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.56998G	58.61	88.20	-29.59	49.64	3	Horizontal	140	1.53	-	40.36	13.22	44.61			
RMS	13.57035G	47.71	68.20	-20.49	38.74	3	Horizontal	140	1.53	-	40.36	13.22	44.61			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

6785MHz_TX

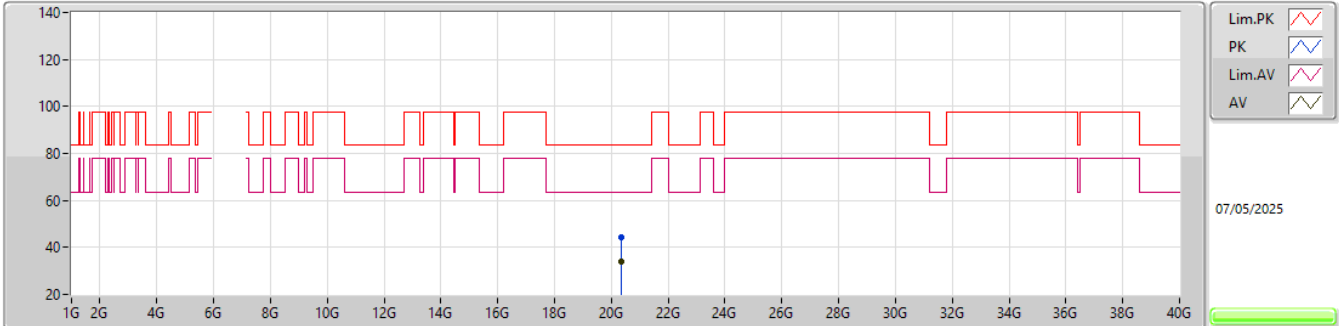


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.35444G	44.52	83.54	-39.02	39.35	1	Vertical	335	1.38	-	38.00	16.41	49.24			
AV	20.35288G	33.84	63.54	-29.70	28.67	1	Vertical	335	1.38	-	38.00	16.41	49.24			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


6785MHz_TX

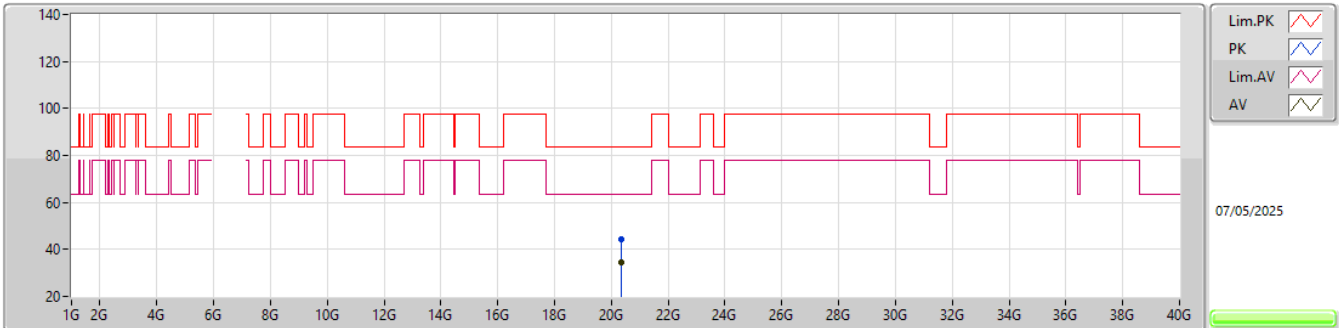EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.36212G	44.25	83.54	-39.29	39.07	1	Horizontal	164	1.56	-	38.00	16.42	49.24			
AV	20.34964G	34.31	63.54	-29.23	29.14	1	Horizontal	164	1.56	-	38.00	16.41	49.24			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

6865MHz_TX

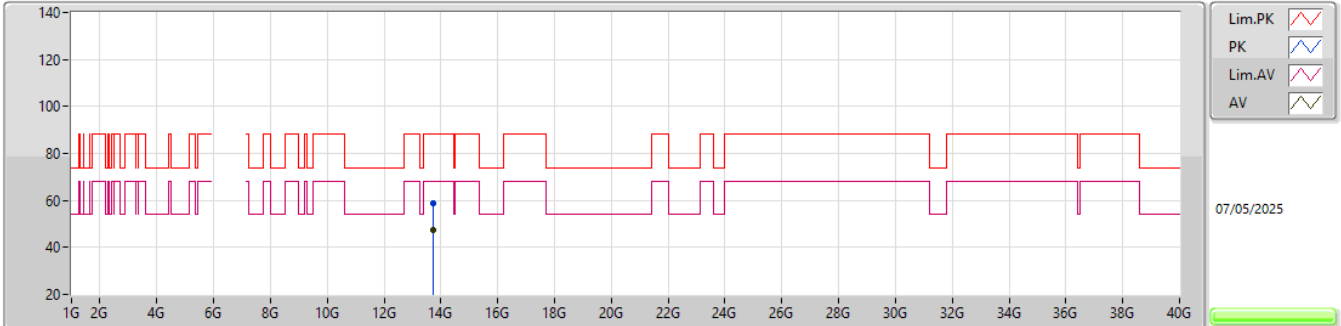


EUT_X_2TX
Setting 21
01-U-S-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.7299G	58.83	88.20	-29.37	49.57	3	Vertical	295	1.51	-	40.46	13.30	44.50			
RMS	13.72982G	47.58	68.20	-20.62	38.32	3	Vertical	295	1.51	-	40.46	13.30	44.50			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

6865MHz_TX

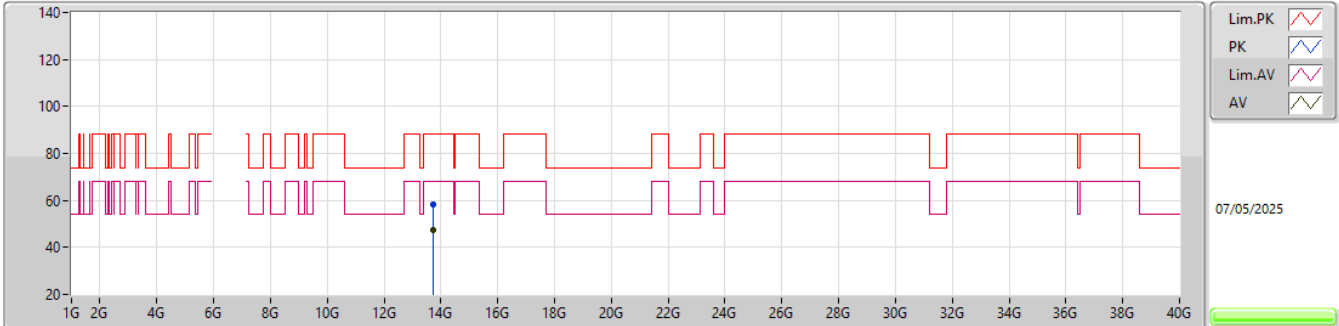


EUT_X_2TX
Setting 21
01-U-S-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.72952G	58.43	88.20	-29.77	49.17	3	Horizontal	18	1.99	-	40.46	13.30	44.50			
RMS	13.72995G	47.29	68.20	-20.91	38.03	3	Horizontal	18	1.99	-	40.46	13.30	44.50			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


6865MHz_TX

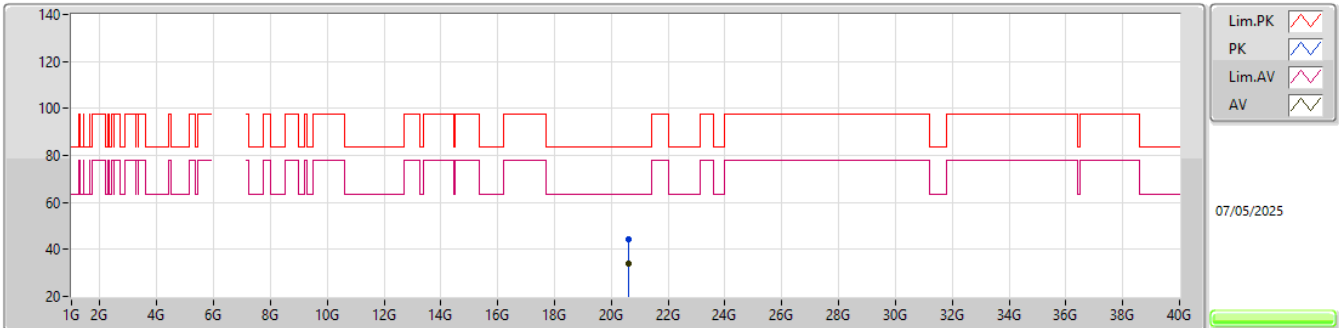EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.59592G	44.07	83.54	-39.47	38.78	1	Vertical	284	1.70	-	37.99	16.48	49.18			
AV	20.58928G	33.80	63.54	-29.74	28.52	1	Vertical	284	1.70	-	37.98	16.48	49.18			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


6865MHz_TX

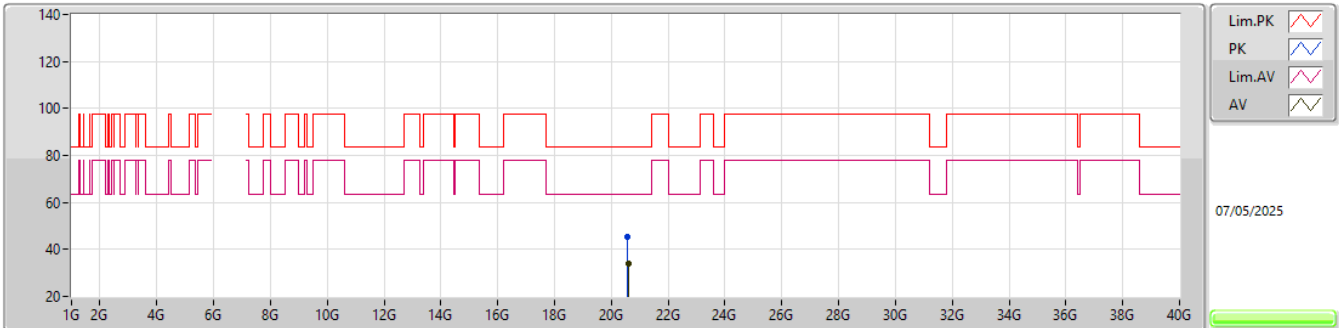EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.58516G	45.48	83.54	-38.06	40.22	1	Horizontal	78	1.77	-	37.97	16.48	49.19			
AV	20.6046G	34.08	63.54	-29.46	28.78	1	Horizontal	78	1.77	-	38.00	16.48	49.18			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


6895MHz_TX

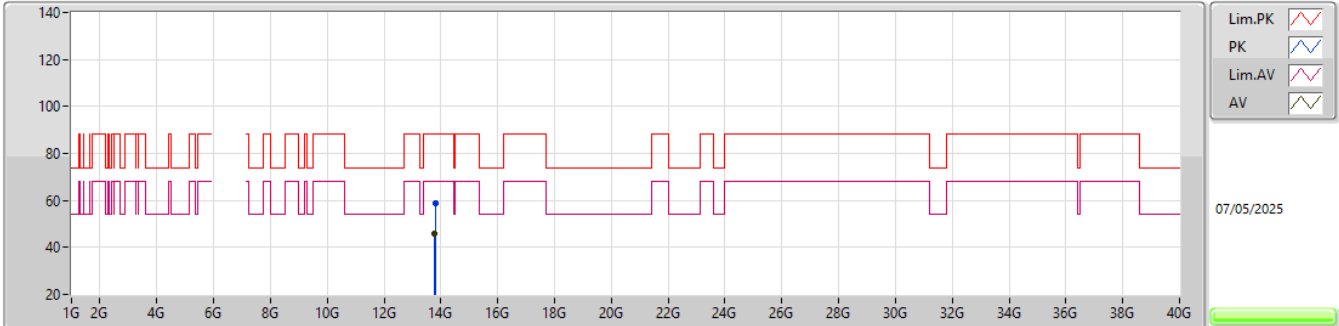EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.79398G	58.92	88.20	-29.28	49.35	3	Vertical	72	1.83	-	40.68	13.34	44.45			
RMS	13.78714G	45.78	68.20	-22.42	36.26	3	Vertical	72	1.83	-	40.65	13.33	44.46			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

6895MHz_TX

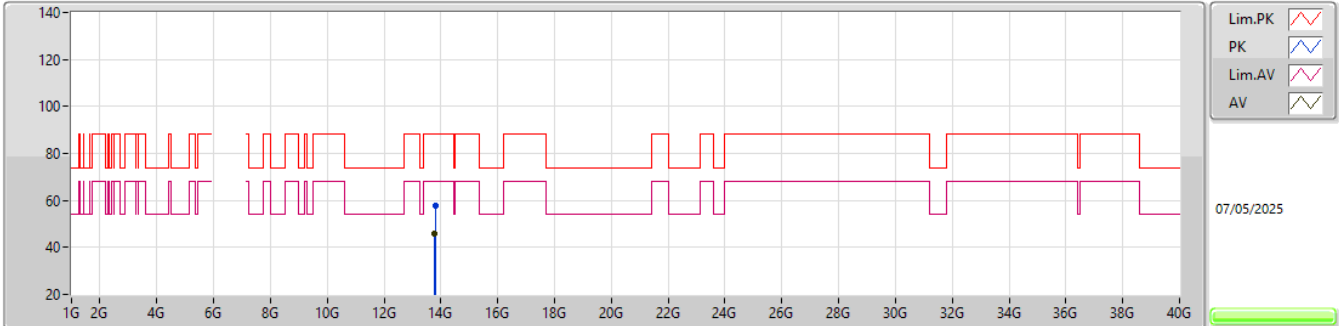


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.79402G	57.91	88.20	-30.29	48.34	3	Horizontal	221	1.57	-	40.68	13.34	44.45			
RMS	13.78988G	45.79	68.20	-22.41	36.25	3	Horizontal	221	1.57	-	40.66	13.34	44.46			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


6895MHz_TX

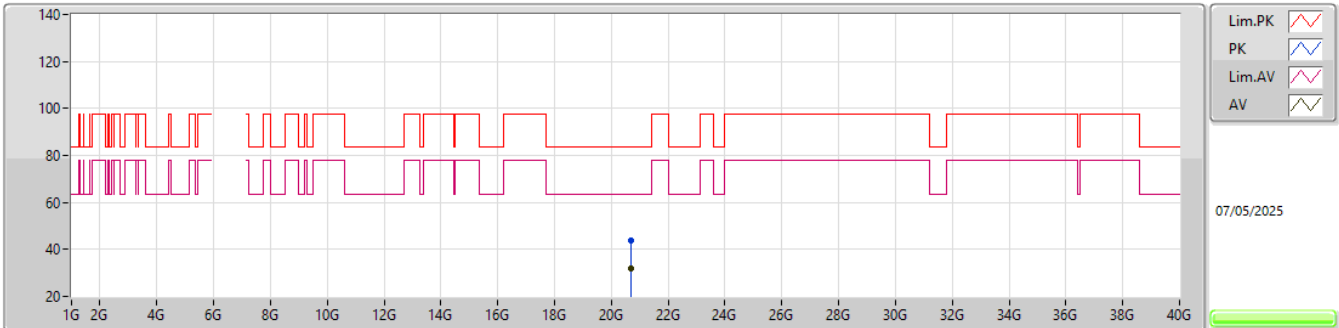EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.67716G	43.85	83.54	-39.69	38.57	1	Vertical	231	1.81	-	37.95	16.47	49.14			
AV	20.68696G	31.89	63.54	-31.65	26.63	1	Vertical	231	1.81	-	37.93	16.46	49.13			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


6895MHz_TX

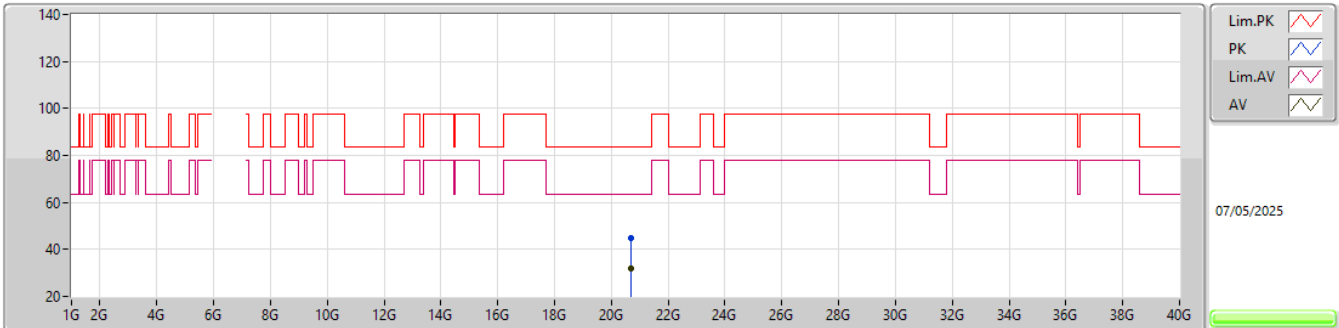EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.68748G	45.06	83.54	-38.48	39.80	1	Horizontal	233	1.85	-	37.93	16.46	49.13			
AV	20.68616G	31.88	63.54	-31.66	26.62	1	Horizontal	233	1.85	-	37.93	16.46	49.13			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

6995MHz_TX

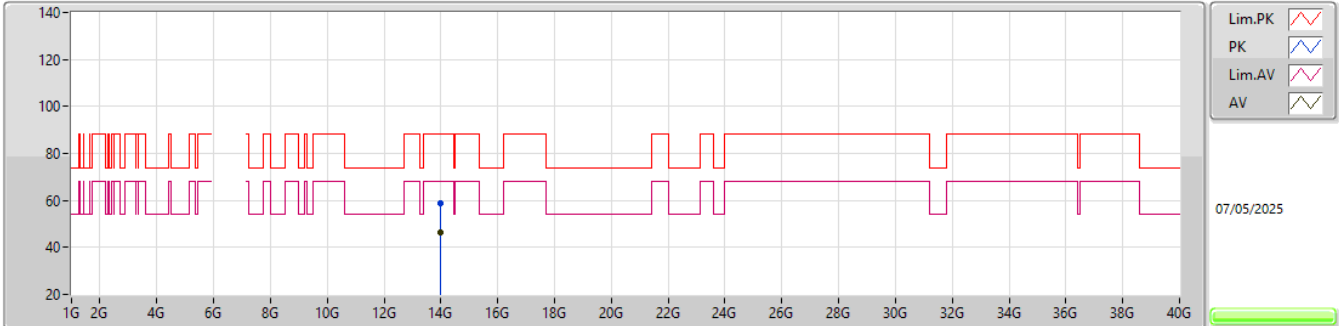


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.98098G	58.74	88.20	-29.46	48.72	3	Vertical	204	1.82	-	40.90	13.44	44.32			
RMS	13.99966G	46.30	68.20	-21.90	36.26	3	Vertical	204	1.82	-	40.90	13.45	44.31			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


6995MHz_TX

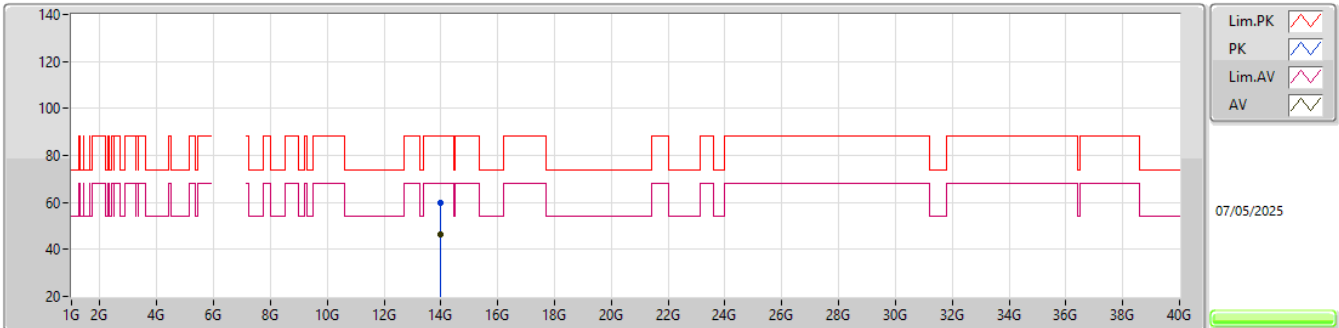EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.9846G	59.84	88.20	-28.36	49.82	3	Horizontal	356	1.43	-	40.90	13.44	44.32			
RMS	13.99958G	46.35	68.20	-21.85	36.31	3	Horizontal	356	1.43	-	40.90	13.45	44.31			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


6995MHz_TX

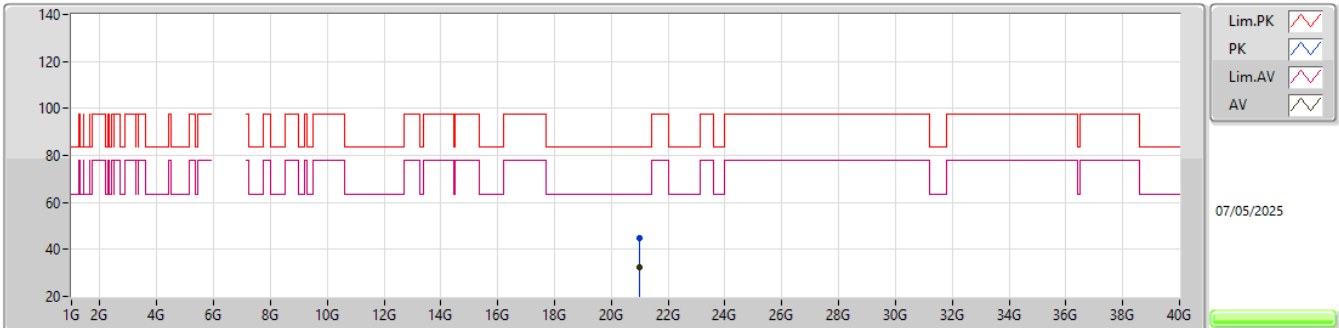EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.97744G	44.83	83.54	-38.71	39.38	1	Vertical	327	1.98	-	38.01	16.42	48.98			
AV	20.99184G	32.18	63.54	-31.36	26.66	1	Vertical	327	1.98	-	38.07	16.42	48.97			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


6995MHz_TX

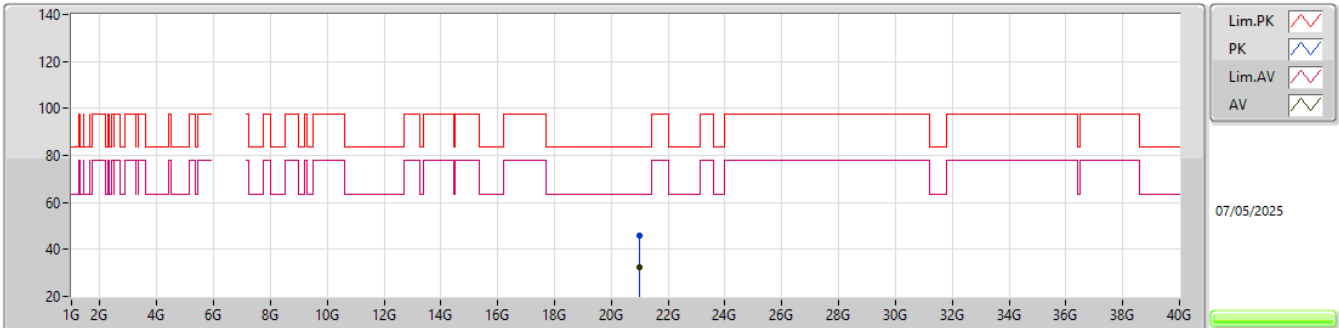EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.98348G	45.85	83.54	-37.69	40.38	1	Horizontal	183	1.56	-	38.03	16.42	48.98			
AV	20.99204G	32.18	63.54	-31.36	26.66	1	Horizontal	183	1.56	-	38.07	16.42	48.97			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

7095MHz_TX

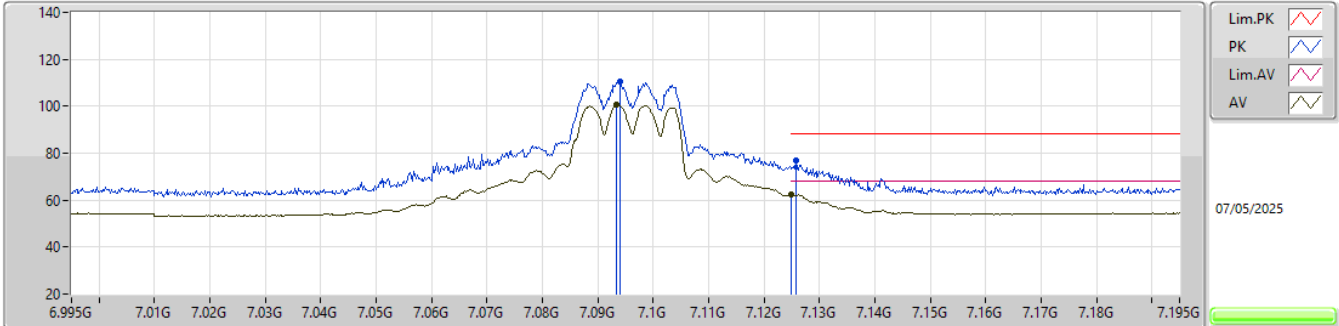


EUT_X_2TX
Setting 21
01-U-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.094G	110.58	Inf	-Inf	98.55	3	Vertical	335	2.21	-	36.79	7.95	32.71			
RMS	7.0934G	100.53	Inf	-Inf	88.50	3	Vertical	335	2.21	-	36.79	7.95	32.71			
PK	7.1258G	76.85	88.20	-11.35	64.75	3	Vertical	335	2.21	-	36.85	7.95	32.70			
RMS	7.125G	62.21	68.20	-5.99	50.11	3	Vertical	335	2.21	-	36.85	7.95	32.70			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


7095MHz_TX

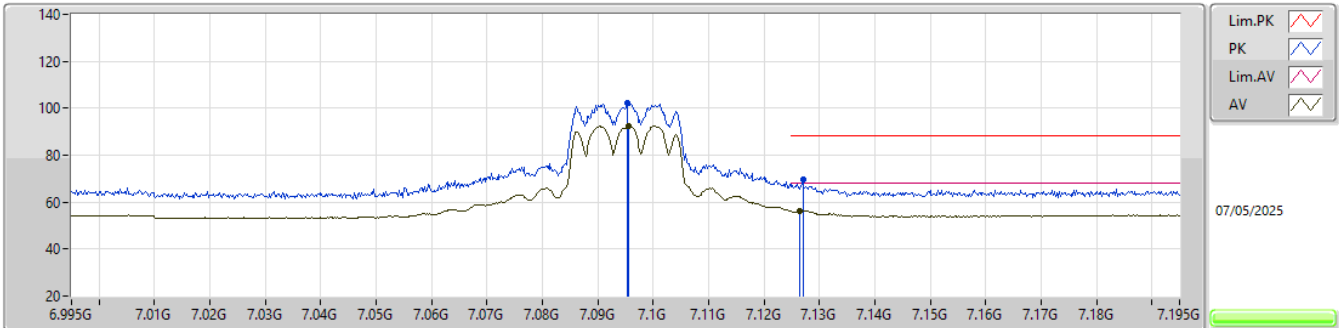EUT_X_2TX
Setting 21
01-U-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.0954G	102.25	Inf	-Inf	90.22	3	Horizontal	288	1.80	-	36.79	7.95	32.71			
RMS	7.0956G	92.33	Inf	-Inf	80.30	3	Horizontal	288	1.80	-	36.79	7.95	32.71			
PK	7.127G	69.81	88.20	-18.39	57.71	3	Horizontal	288	1.80	-	36.85	7.95	32.70			
RMS	7.1264G	56.38	68.20	-11.82	44.28	3	Horizontal	288	1.80	-	36.85	7.95	32.70			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

7095MHz_TX

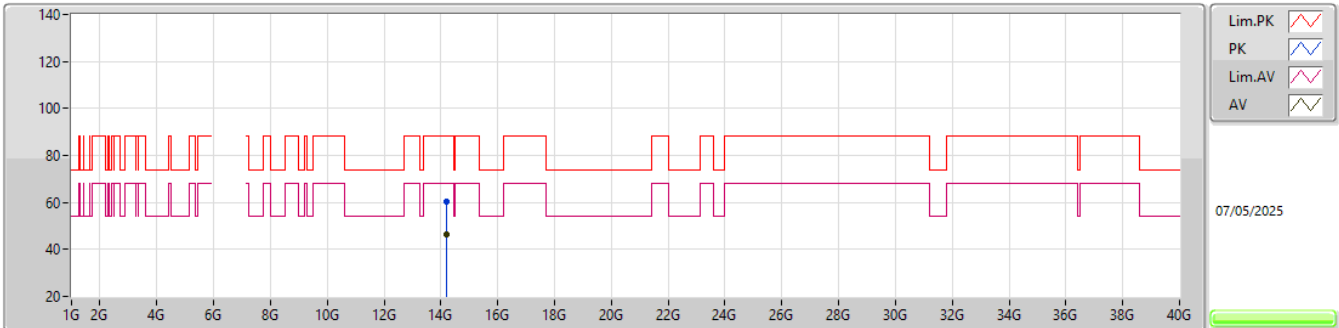


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.1991G	60.19	88.20	-28.01	50.40	3	Vertical	96	1.88	-	40.90	13.47	44.58			
RMS	14.19104G	46.49	68.20	-21.71	36.69	3	Vertical	96	1.88	-	40.90	13.47	44.57			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

7095MHz_TX

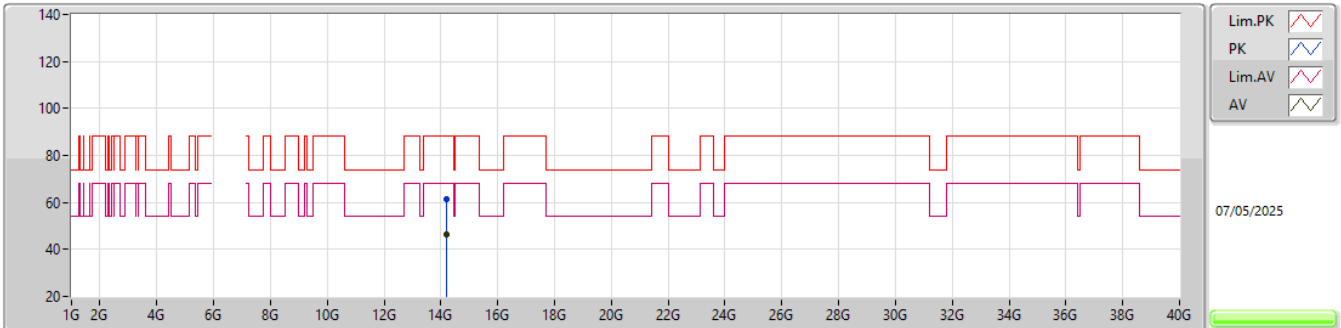


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.19306G	61.16	88.20	-27.04	51.36	3	Horizontal	276	1.42	-	40.90	13.47	44.57			
RMS	14.18152G	46.47	68.20	-21.73	36.66	3	Horizontal	276	1.42	-	40.90	13.47	44.56			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

7095MHz_TX

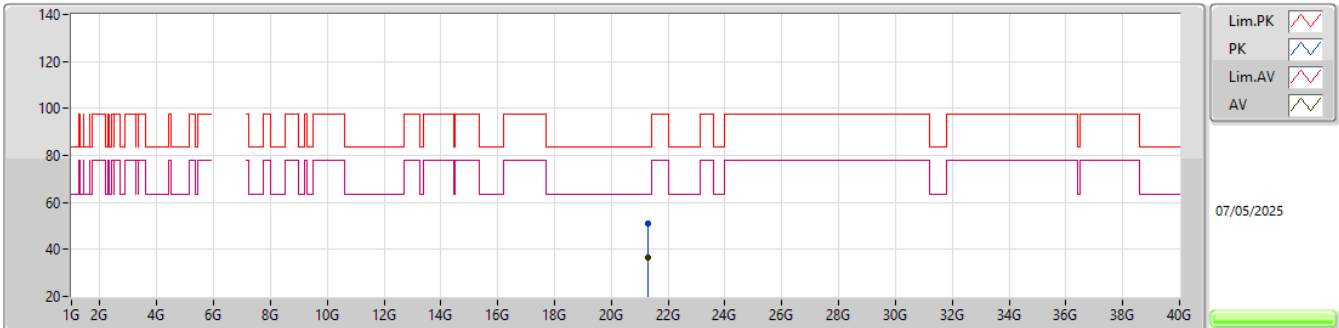


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	21.28384G	50.88	83.54	-32.66	44.91	1	Vertical	354	1.78	-	38.10	16.72	48.85			
AV	21.28404G	36.40	63.54	-27.14	30.43	1	Vertical	354	1.78	-	38.10	16.72	48.85			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


7095MHz_TX

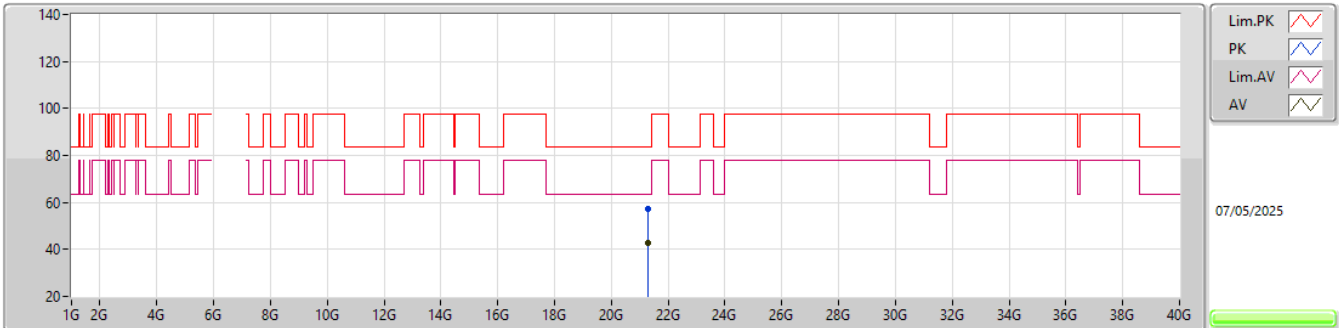EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.2858G	57.47	83.54	-26.07	51.49	1	Horizontal	30	1.71	-	38.10	16.72	48.84			
AV	21.28608G	42.67	63.54	-20.87	36.69	1	Horizontal	30	1.71	-	38.10	16.72	48.84			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

7115MHz_TX

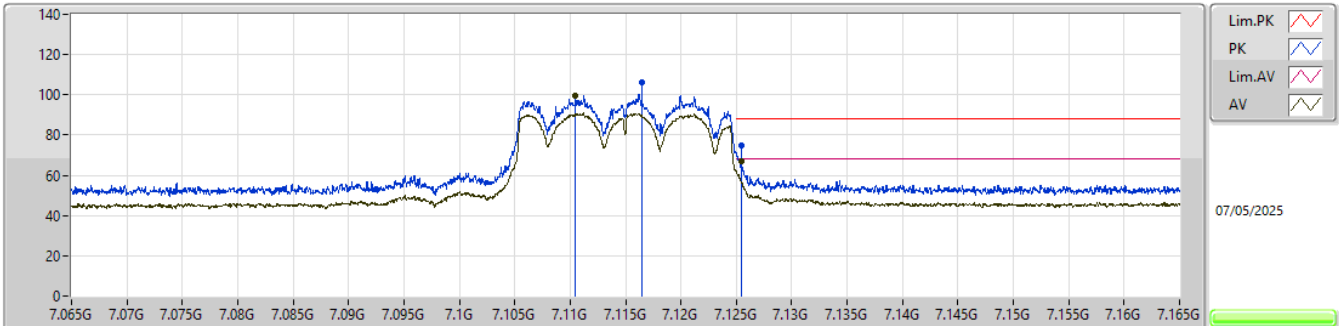


EUT_X_2TX
Setting 17
01-U-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	7.1165G	105.93	Inf	-Inf	93.86	3	Vertical	19	1.80	15_BP 1M	36.83	7.95	32.71				
RMS	7.1105G	99.72	Inf	-Inf	87.66	3	Vertical	19	1.80	15_BP 1M	36.82	7.95	32.71				
PK	7.1255G	75.05	88.20	-13.15	62.95	3	Vertical	19	1.80	15_BP 1M	36.85	7.95	32.70				
RMS	7.1255G	67.14	68.20	-1.06	55.04	3	Vertical	19	1.80	15_BP 1M	36.85	7.95	32.70				

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


7115MHz_TX

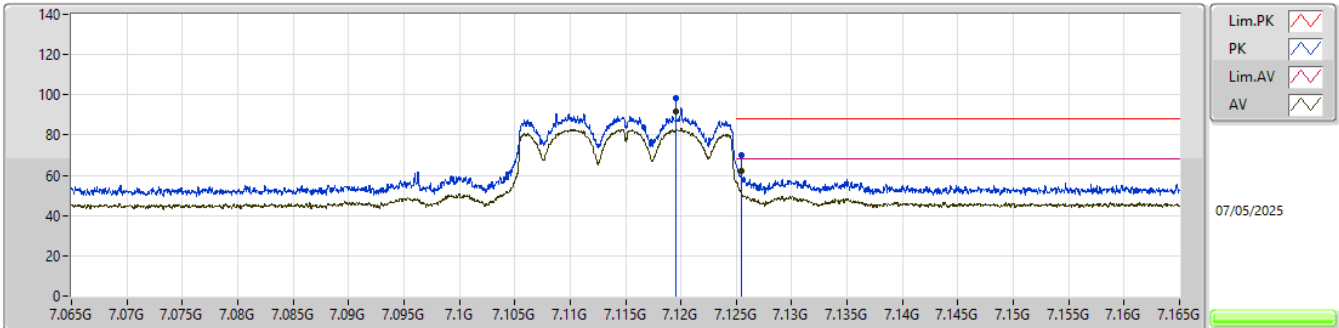EUT_X_2TX
Setting 17
01-U-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.1195G	98.10	Inf	-Inf	86.01	3	Horizontal	289	1.80	15_BP 1M	36.84	7.95	32.70			
RMS	7.1195G	91.89	Inf	-Inf	79.80	3	Horizontal	289	1.80	15_BP 1M	36.84	7.95	32.70			
PK	7.1255G	69.97	88.20	-18.23	57.87	3	Horizontal	289	1.80	15_BP 1M	36.85	7.95	32.70			
RMS	7.1255G	61.93	68.20	-6.27	49.83	3	Horizontal	289	1.80	15_BP 1M	36.85	7.95	32.70			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


7115MHz_TX

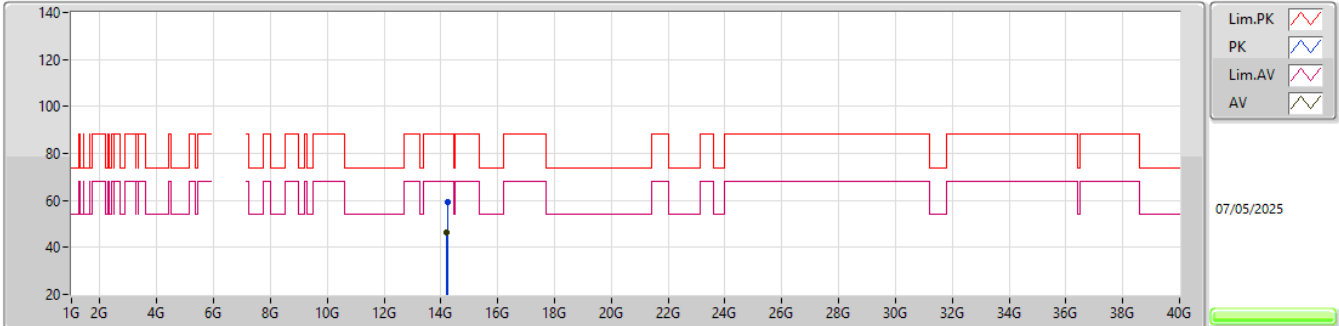EUT_X_2TX
Setting 17
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.22274G	59.22	88.20	-28.98	49.55	3	Vertical	64	1.50	-	40.81	13.47	44.61			
RMS	14.22028G	46.26	68.20	-21.94	36.58	3	Vertical	64	1.50	-	40.82	13.47	44.61			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

7115MHz_TX

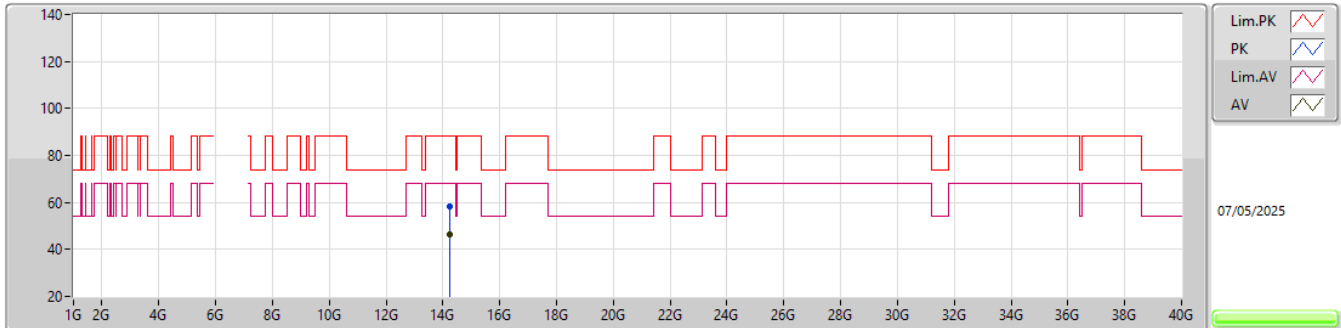


EUT X_2TX
Setting 17
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.23232G	58.36	88.20	-29.84	48.75	3	Horizontal	86	1.72	-	40.77	13.47	44.63			
RMS	14.22172G	46.21	68.20	-21.99	36.54	3	Horizontal	86	1.72	-	40.81	13.47	44.61			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

7115MHz_TX

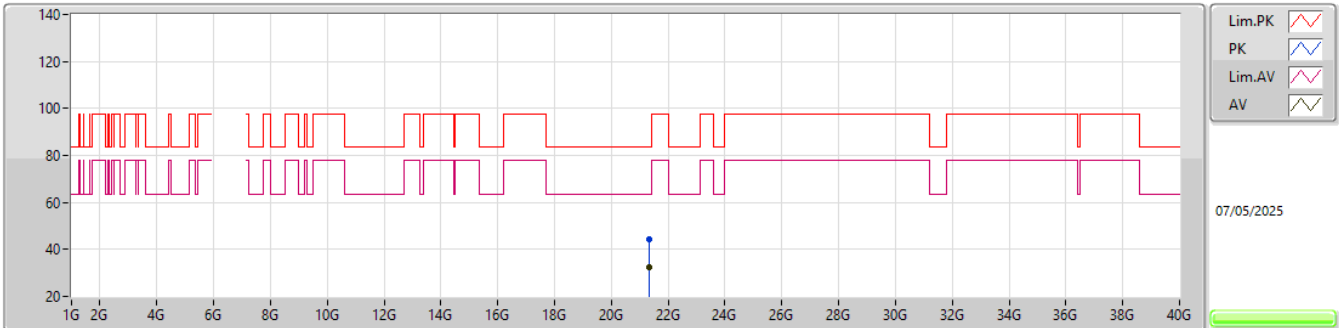


EUT_X_2TX
Setting 17
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	21.34116G	44.30	83.54	-39.24	38.24	1	Vertical	304	1.61	-	38.10	16.78	48.82			
AV	21.35128G	32.31	63.54	-31.23	26.24	1	Vertical	304	1.61	-	38.10	16.79	48.82			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


7115MHz_TX

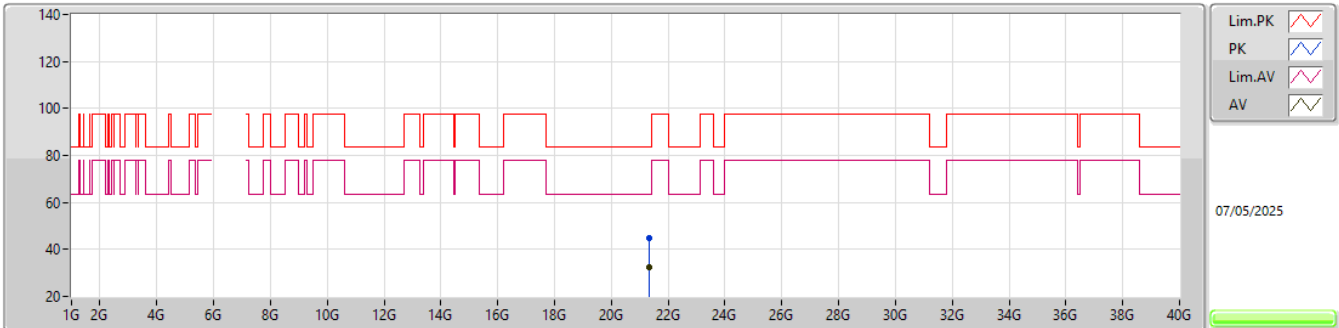EUT_X_2TX
Setting 17
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.34044G	45.01	83.54	-38.53	38.95	1	Horizontal	231	1.60	-	38.10	16.78	48.82			
AV	21.34832G	32.31	63.54	-31.23	26.24	1	Horizontal	231	1.60	-	38.10	16.79	48.82			

6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

6925MHz_TX

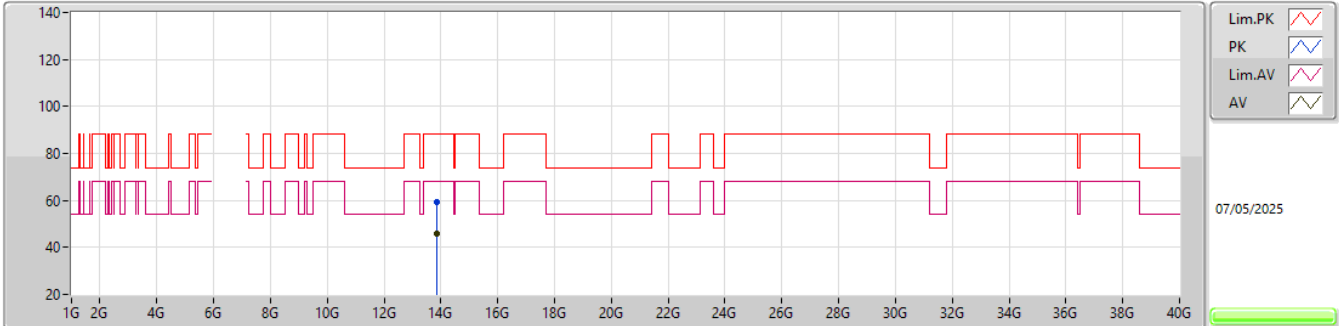


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.84262G	59.28	88.20	-28.92	49.55	3	Vertical	0	1.46	-	40.79	13.36	44.42			
RMS	13.84078G	45.89	68.20	-22.31	36.17	3	Vertical	0	1.46	-	40.78	13.36	44.42			

6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


6925MHz_TX

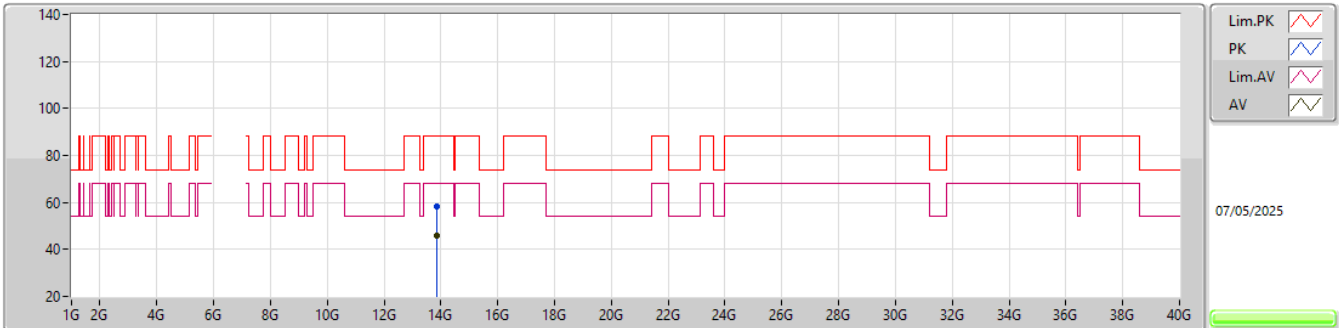EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.85004G	58.36	88.20	-29.84	48.60	3	Horizontal	234	1.77	-	40.80	13.37	44.41			
RMS	13.85776G	45.92	68.20	-22.28	36.14	3	Horizontal	234	1.77	-	40.82	13.37	44.41			

6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


6925MHz_TX

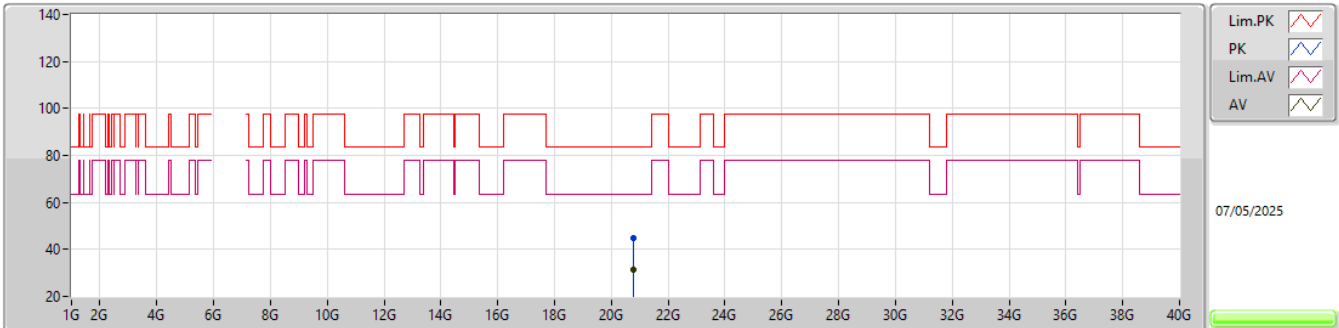EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.76616G	44.75	83.54	-38.79	39.35	1	Vertical	77	1.49	-	38.04	16.45	49.09			
AV	20.76628G	31.58	63.54	-31.96	26.19	1	Vertical	77	1.49	-	38.03	16.45	49.09			

6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


6925MHz_TX

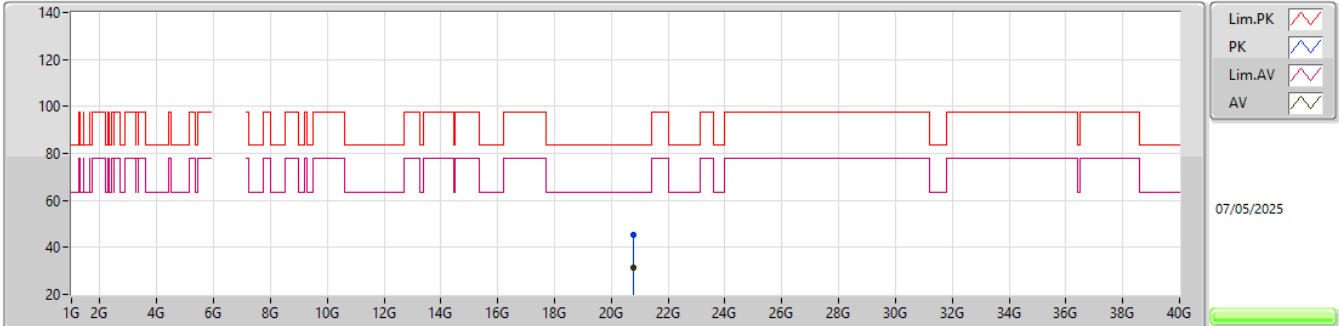EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.78404G	45.33	83.54	-38.21	40.00	1	Horizontal	301	1.76	-	37.96	16.45	49.08			
AV	20.768G	31.58	63.54	-31.96	26.19	1	Horizontal	301	1.76	-	38.03	16.45	49.09			

6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


7005MHz_TX

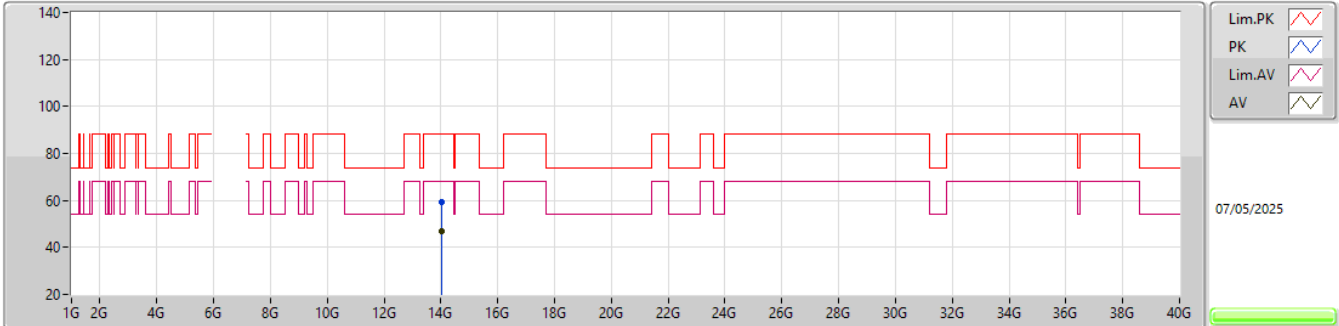EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.01456G	59.33	88.20	-28.87	49.28	3	Vertical	106	1.62	-	40.93	13.45	44.33			
RMS	14.01412G	46.71	68.20	-21.49	36.66	3	Vertical	106	1.62	-	40.93	13.45	44.33			

6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


7005MHz_TX

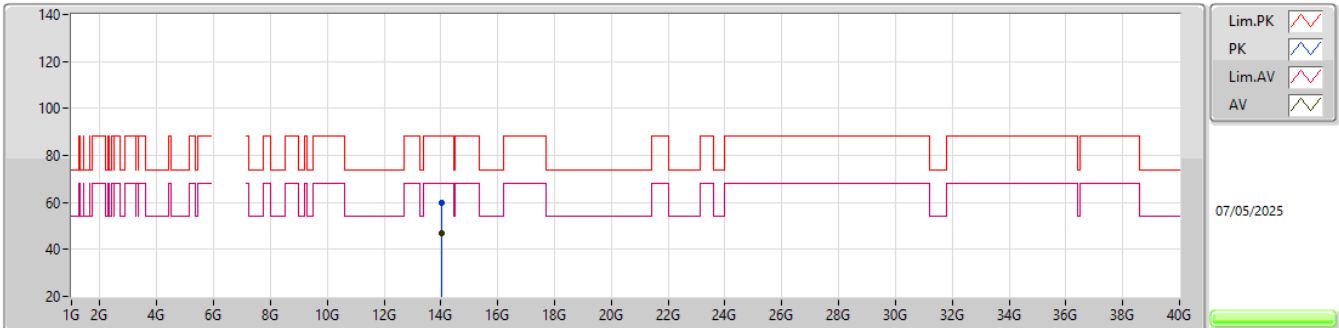EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.00916G	59.64	88.20	-28.56	49.59	3	Horizontal	248	1.79	-	40.92	13.45	44.32			
RMS	14.01494G	46.69	68.20	-21.51	36.64	3	Horizontal	248	1.79	-	40.93	13.45	44.33			

6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


7005MHz_TX

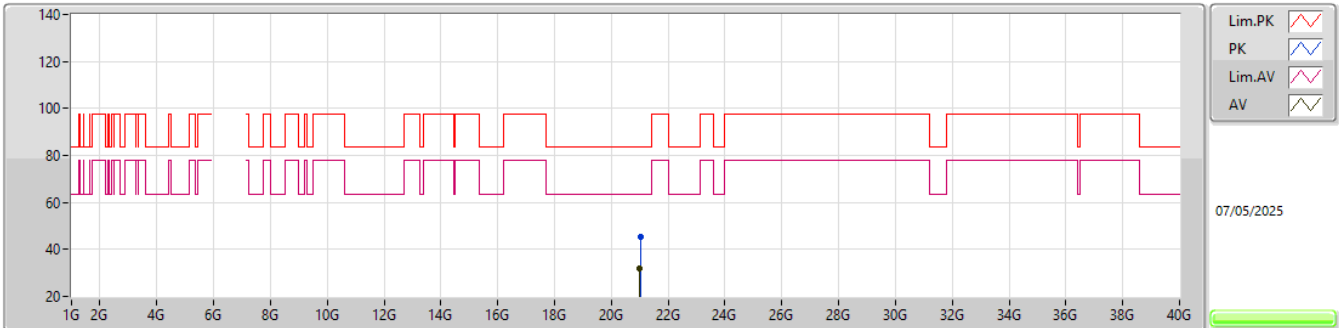EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	21.01736G	45.49	83.54	-38.05	39.94	1	Vertical	312	1.86	-	38.07	16.44	48.96			
AV	21.00636G	32.13	63.54	-31.41	26.58	1	Vertical	312	1.86	-	38.09	16.43	48.97			

6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

7005MHz_TX

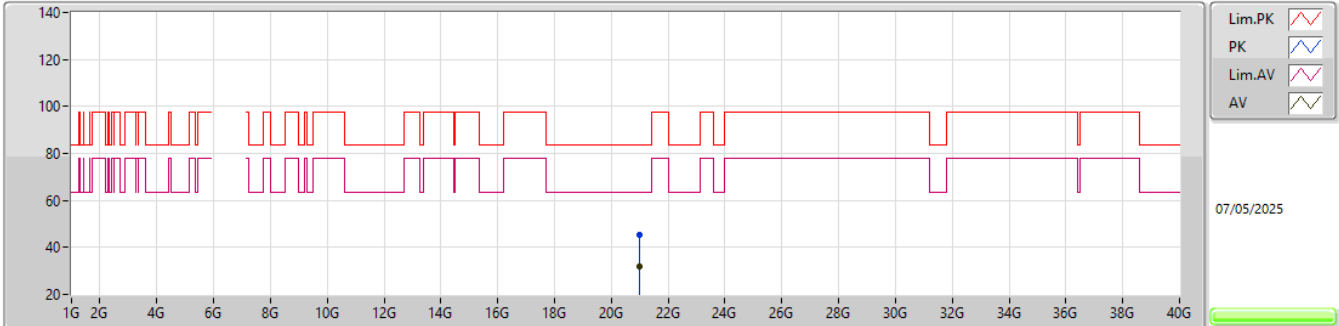


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	21.00964G	45.10	83.54	-38.44	39.56	1	Horizontal	86	1.94	-	38.08	16.43	48.97			
AV	21.0104G	32.13	63.54	-31.41	26.59	1	Horizontal	86	1.94	-	38.08	16.43	48.97			

6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

7085MHz_TX

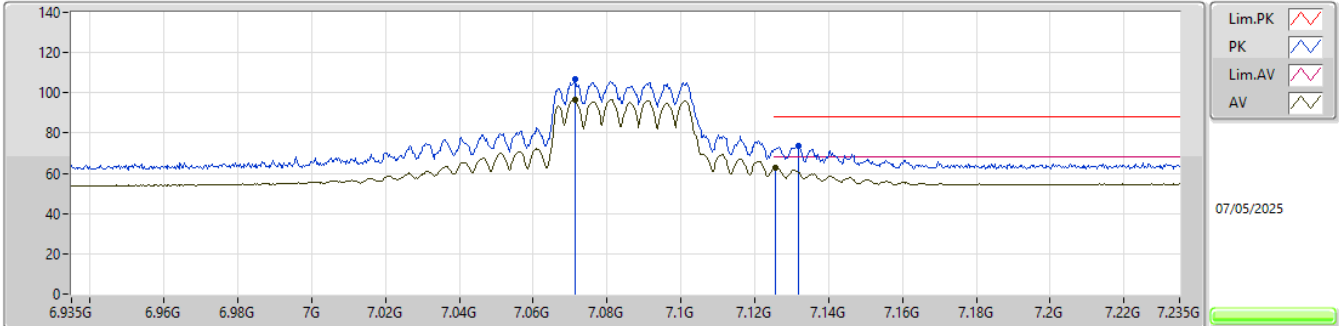


EUT_X_2TX
Setting 21
01-U-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.0715G	106.59	Inf	-Inf	94.62	3	Vertical	20	1.80	-	36.74	7.95	32.72			
RMS	7.0712G	96.64	Inf	-Inf	84.67	3	Vertical	20	1.80	-	36.74	7.95	32.72			
PK	7.1318G	73.86	88.20	-14.34	61.75	3	Vertical	20	1.80	-	36.86	7.95	32.70			
RMS	7.1255G	63.04	68.20	-5.16	50.94	3	Vertical	20	1.80	-	36.85	7.95	32.70			

6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


7085MHz_TX

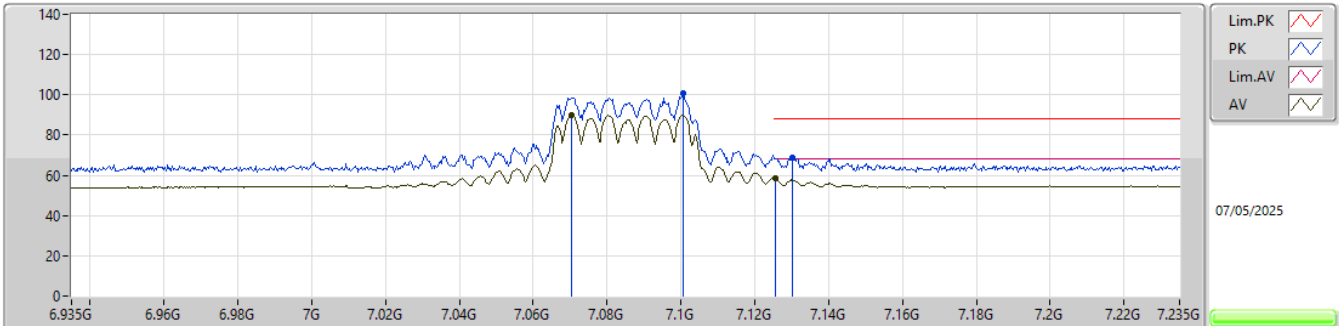EUT_X_2TX
Setting 21
01-U-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.1006G	100.50	Inf	-Inf	88.46	3	Horizontal	290	1.80	-	36.80	7.95	32.71			
RMS	7.0703G	89.84	Inf	-Inf	77.87	3	Horizontal	290	1.80	-	36.74	7.95	32.72			
PK	7.1303G	68.70	88.20	-19.50	56.59	3	Horizontal	290	1.80	-	36.86	7.95	32.70			
RMS	7.1255G	58.79	68.20	-9.41	46.69	3	Horizontal	290	1.80	-	36.85	7.95	32.70			

6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

7085MHz_TX

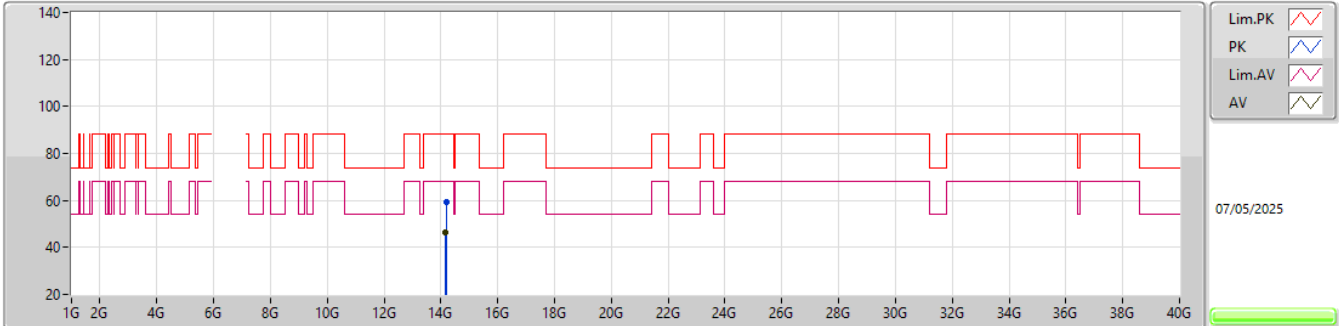


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.1787G	59.35	88.20	-28.85	49.53	3	Vertical	61	1.97	-	40.90	13.47	44.55			
RMS	14.1653G	46.50	68.20	-21.70	36.66	3	Vertical	61	1.97	-	40.90	13.47	44.53			

6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


7085MHz_TX

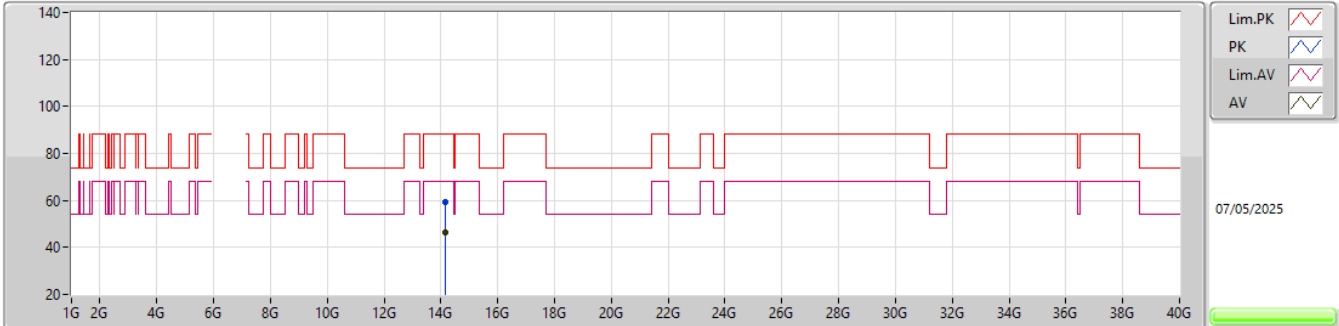EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.16862G	59.42	88.20	-28.78	49.59	3	Horizontal	126	1.64	-	40.90	13.47	44.54			
RMS	14.16848G	46.52	68.20	-21.68	36.69	3	Horizontal	126	1.64	-	40.90	13.47	44.54			

6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


7085MHz_TX

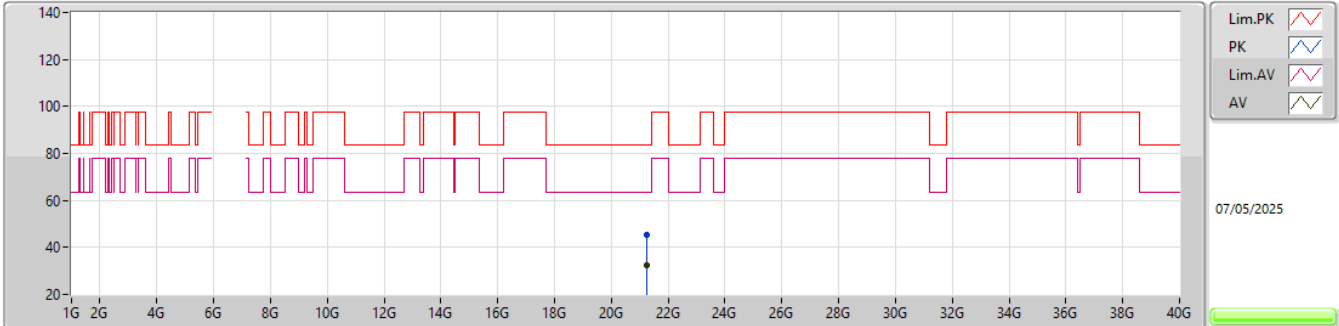EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	21.26128G	45.49	83.54	-38.05	39.55	1	Vertical	311	1.64	-	38.10	16.70	48.86			
AV	21.25236G	32.24	63.54	-31.30	26.31	1	Vertical	311	1.64	-	38.10	16.69	48.86			

6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

7085MHz_TX

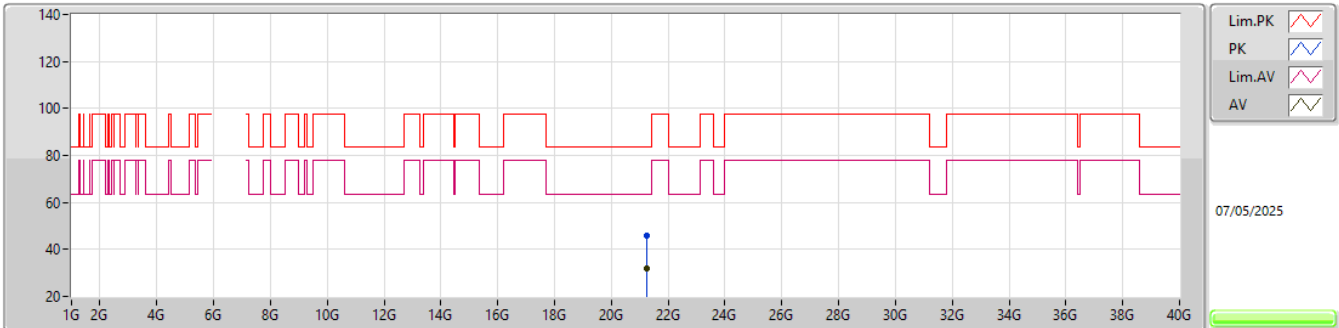


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.2542G	45.71	83.54	-37.83	39.78	1	Horizontal	326	1.91	-	38.10	16.69	48.86			
AV	21.2506G	32.14	63.54	-31.40	26.21	1	Horizontal	326	1.91	-	38.10	16.69	48.86			

6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


6945MHz_TX

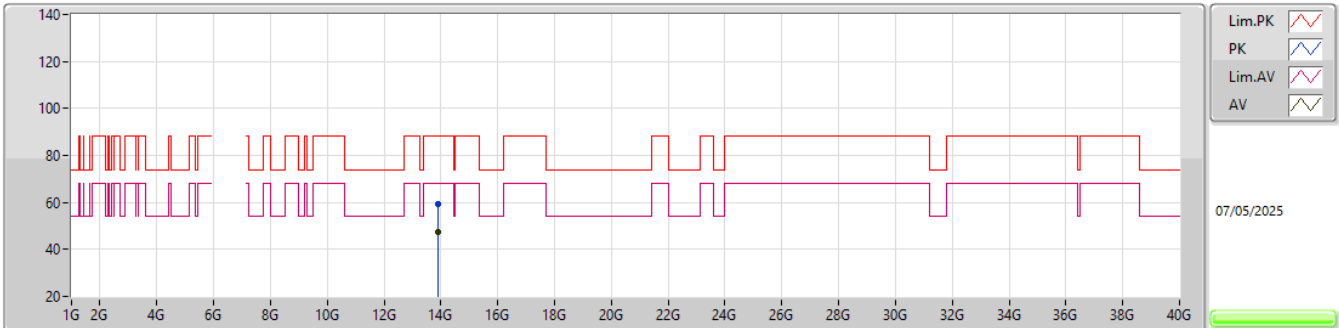EUT_X_2TX
Setting 21
01-U-S-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.88992G	59.26	88.20	-28.94	49.38	3	Vertical	219	1.63	-	40.88	13.39	44.39			
RMS	13.89008G	47.31	68.20	-20.89	37.43	3	Vertical	219	1.63	-	40.88	13.39	44.39			

6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


6945MHz_TX

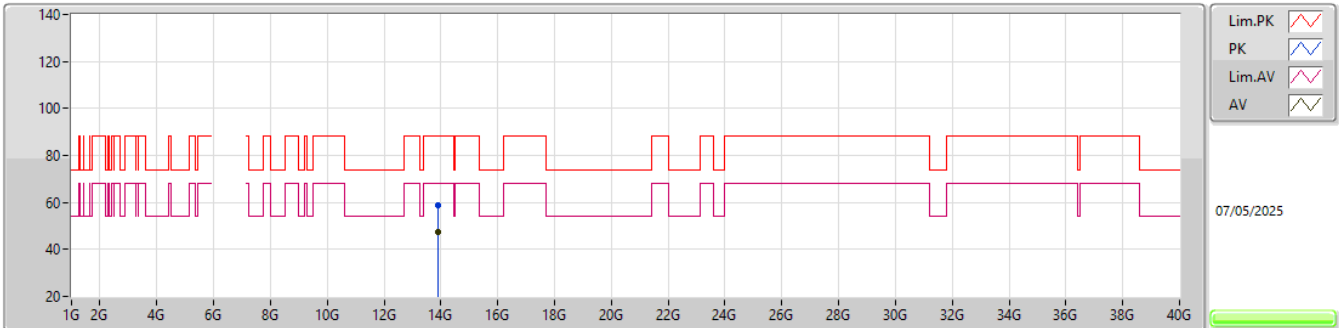EUT_X_2TX
Setting 21
01-U-S-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.88985G	59.02	88.20	-29.18	49.14	3	Horizontal	8	1.92	-	40.88	13.39	44.39			
RMS	13.89035G	47.57	68.20	-20.63	37.69	3	Horizontal	8	1.92	-	40.88	13.39	44.39			

6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

6945MHz_TX

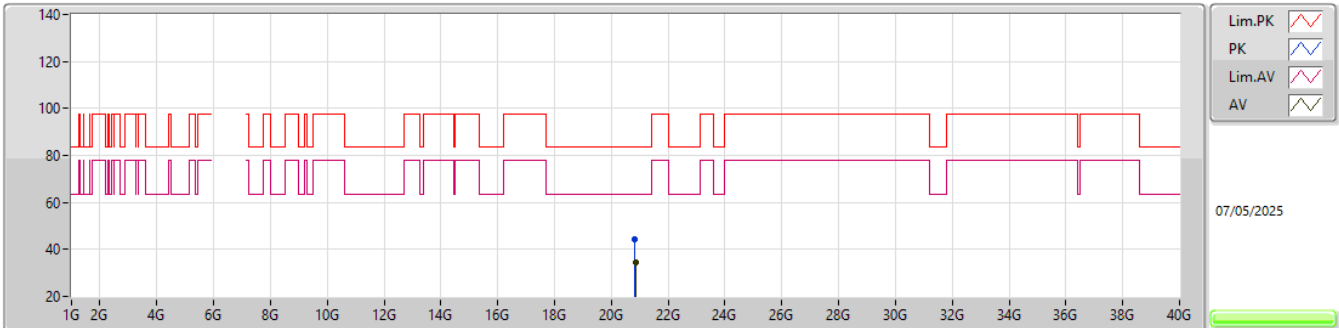


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.83396G	44.32	83.54	-39.22	38.97	1	Vertical	148	1.97	-	37.97	16.44	49.06			
AV	20.84384G	34.37	63.54	-29.17	28.99	1	Vertical	148	1.97	-	37.99	16.44	49.05			

6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


6945MHz_TX

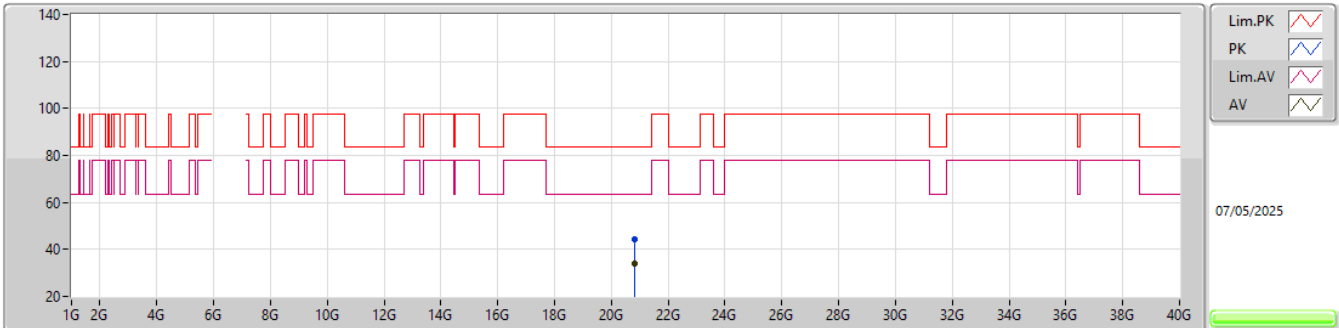EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.82948G	44.49	83.54	-39.05	39.15	1	Horizontal	313	1.72	-	37.96	16.44	49.06			
AV	20.82508G	34.15	63.54	-29.39	28.82	1	Horizontal	313	1.72	-	37.95	16.44	49.06			

6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

7025MHz_TX

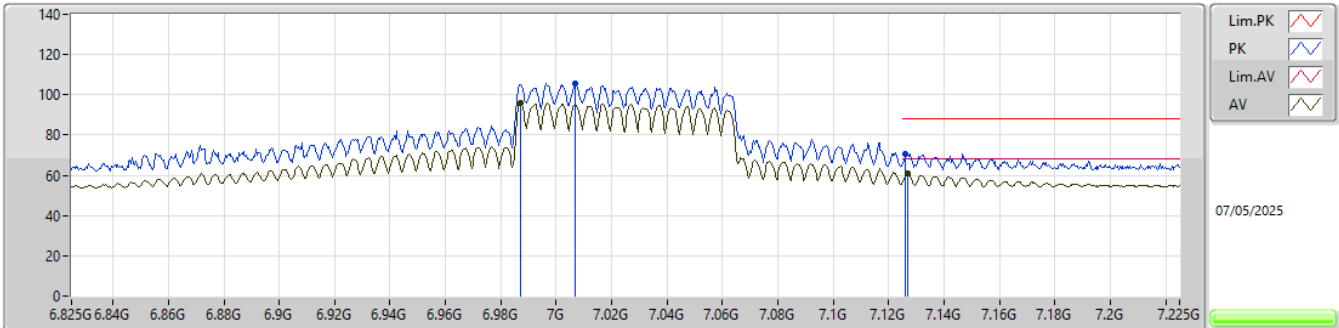


EUT_X_2TX
Setting 21
01-U-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.0066G	105.73	Inf	-Inf	93.73	3	Vertical	344	1.80	-	36.79	7.96	32.75			
RMS	6.987G	96.00	Inf	-Inf	84.03	3	Vertical	344	1.80	-	36.75	7.96	32.74			
PK	7.1262G	70.61	88.20	-17.59	58.51	3	Vertical	344	1.80	-	36.85	7.95	32.70			
RMS	7.127G	60.75	68.20	-7.45	48.65	3	Vertical	344	1.80	-	36.85	7.95	32.70			

6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


7025MHz_TX

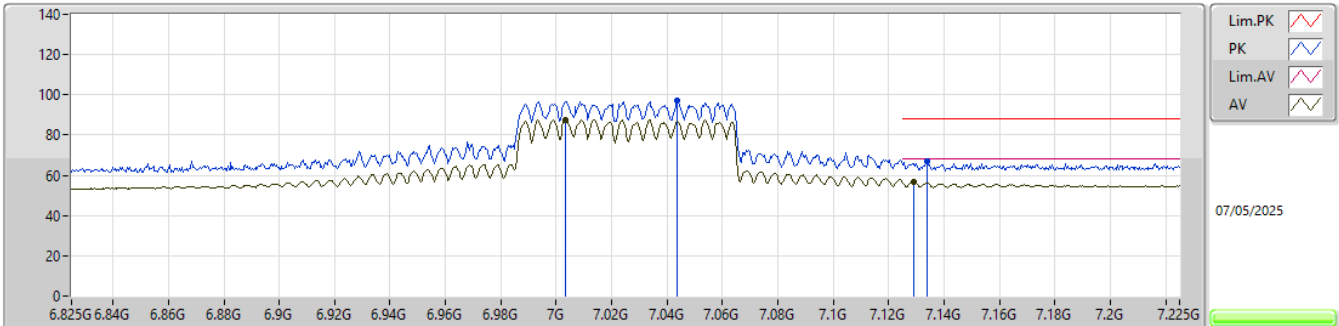EUT_X_2TX
Setting 21
01-U-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.0438G	97.36	Inf	-Inf	85.42	3	Horizontal	277	1.80	-	36.71	7.96	32.73			
RMS	7.0034G	87.78	Inf	-Inf	75.78	3	Horizontal	277	1.80	-	36.79	7.96	32.75			
PK	7.1338G	66.74	88.20	-21.46	54.62	3	Horizontal	277	1.80	-	36.87	7.95	32.70			
RMS	7.129G	56.72	68.20	-11.48	44.61	3	Horizontal	277	1.80	-	36.86	7.95	32.70			

6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


7025MHz_TX

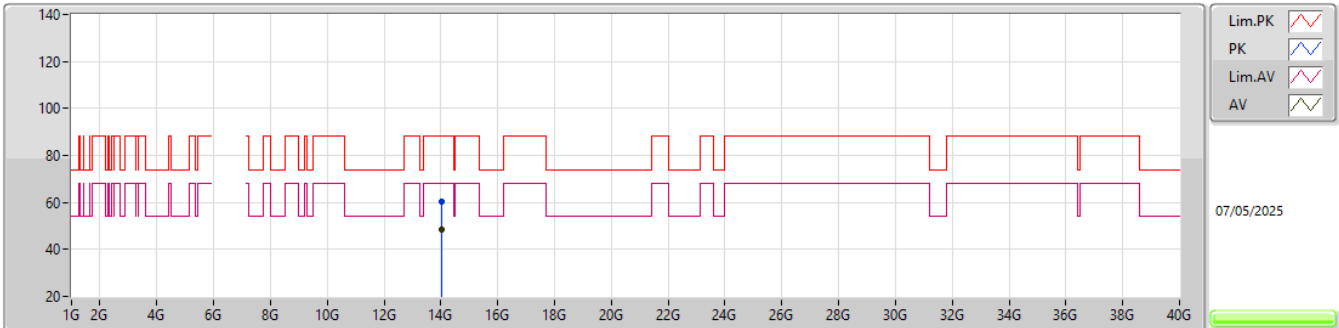EUT_X_2TX
Setting 21
01-U-S-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.04974G	60.40	88.20	-27.80	50.33	3	Vertical	174	1.82	-	41.00	13.45	44.38			
RMS	14.04981G	48.35	68.20	-19.85	38.28	3	Vertical	174	1.82	-	41.00	13.45	44.38			

6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

7025MHz_TX

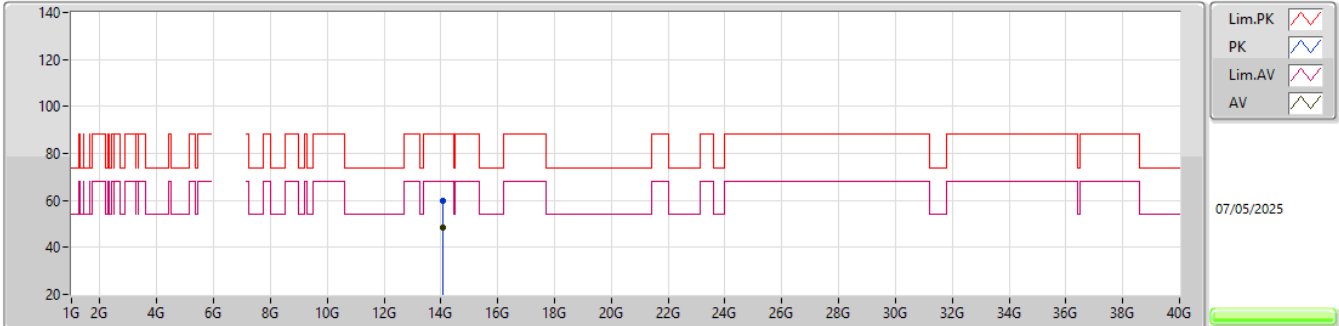


EUT_X_2TX
Setting 21
01-U-S-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.0503G	59.83	88.20	-28.37	49.75	3	Horizontal	150	1.35	-	41.00	13.46	44.38			
RMS	14.05044G	48.41	68.20	-19.79	38.33	3	Horizontal	150	1.35	-	41.00	13.46	44.38			

6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

7025MHz_TX

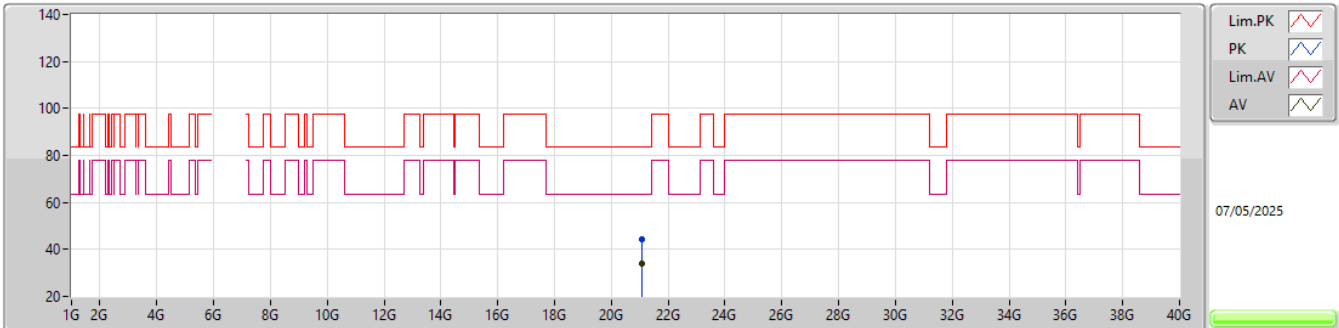


EUT_X_2TX
Setting 21
01-U-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.08432G	44.56	83.54	-38.98	38.98	1	Vertical	90	1.43	-	38.00	16.51	48.93			
AV	21.07168G	34.16	63.54	-29.38	28.60	1	Vertical	90	1.43	-	38.00	16.50	48.94			

6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

7025MHz_TX

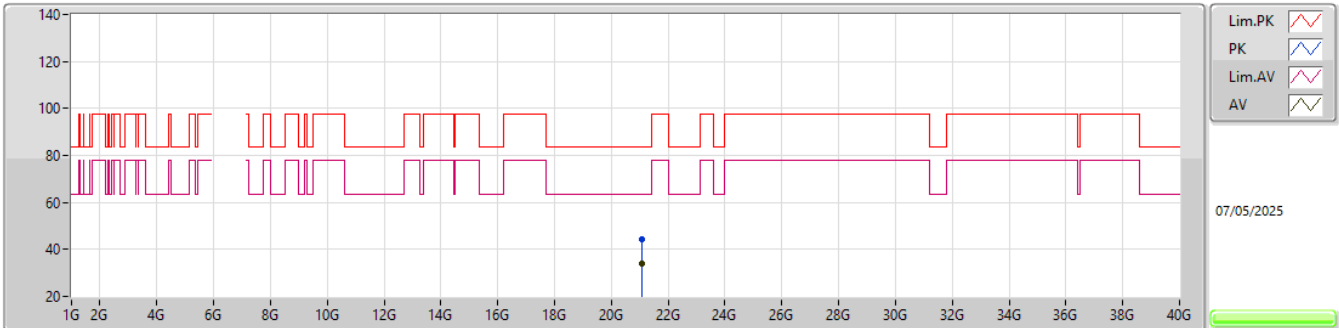EUT_X_2TX
Setting 21
01-U-G-5


Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.06532G	44.44	83.54	-39.10	38.89	1	Horizontal	90	1.84	-	38.00	16.49	48.94			
AV	21.084G	34.08	63.54	-29.46	28.50	1	Horizontal	90	1.84	-	38.00	16.51	48.93			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

5955MHz_TX

09/05/2025

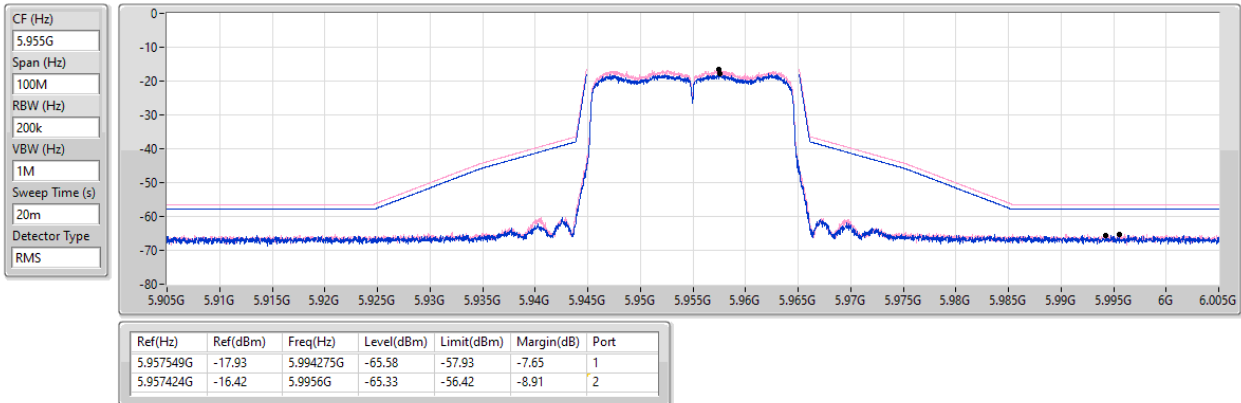


5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6195MHz_TX

09/05/2025

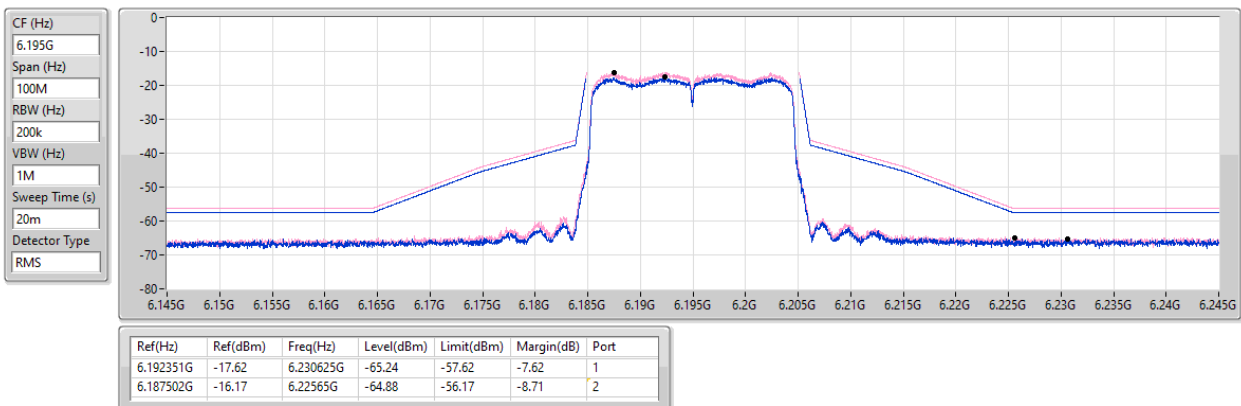


5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6415MHz_TX

09/05/2025

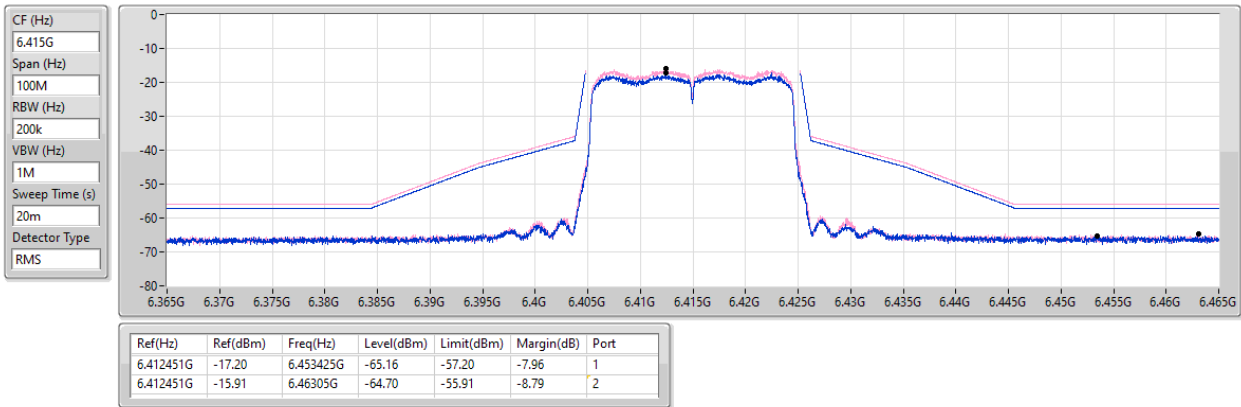


6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6435MHz_TX

09/05/2025

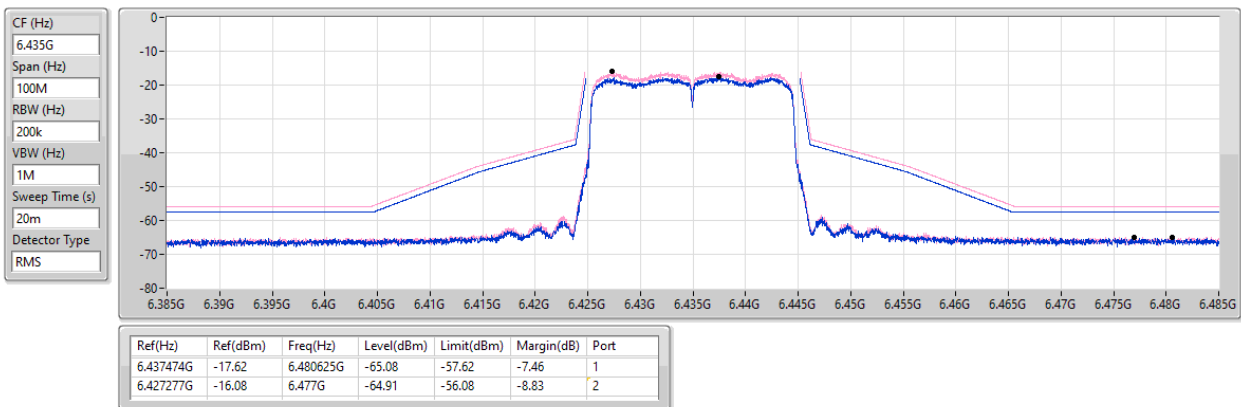


6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6475MHz_TX

09/05/2025

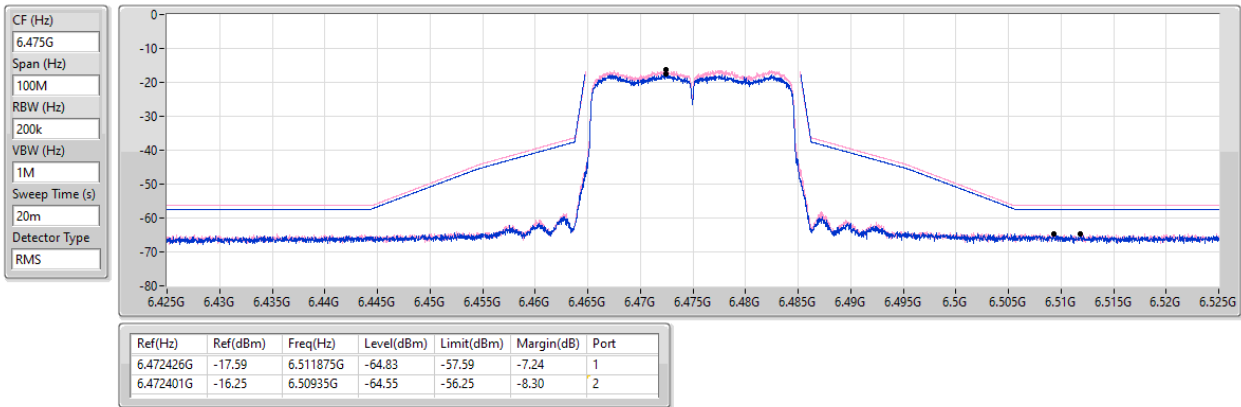


6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6515MHz_TX

09/05/2025

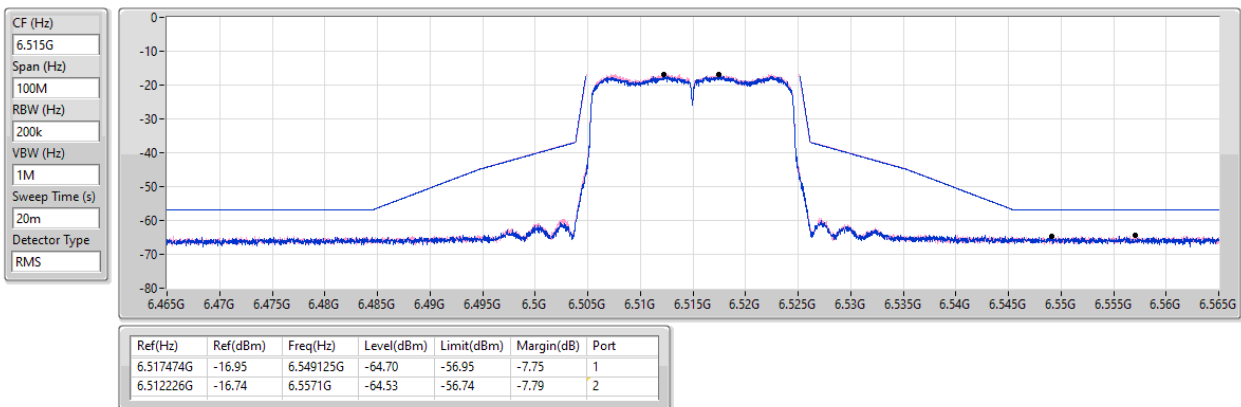


6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6535MHz_TX

09/05/2025

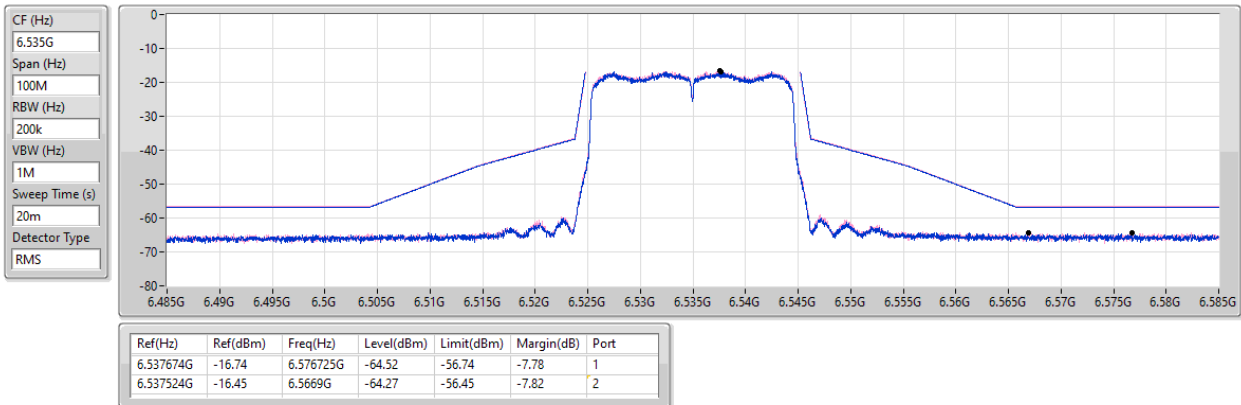


6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6695MHz_TX

09/05/2025

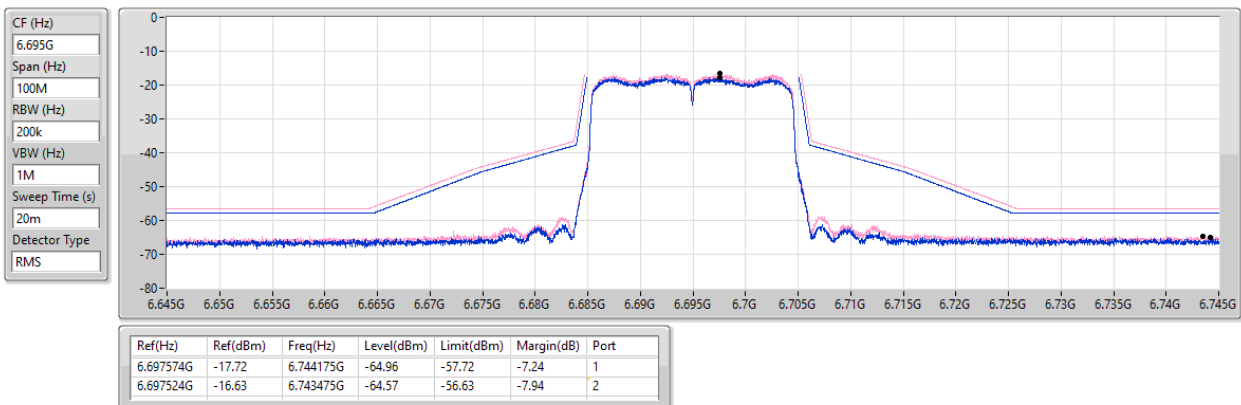


6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6875MHz_TX

09/05/2025

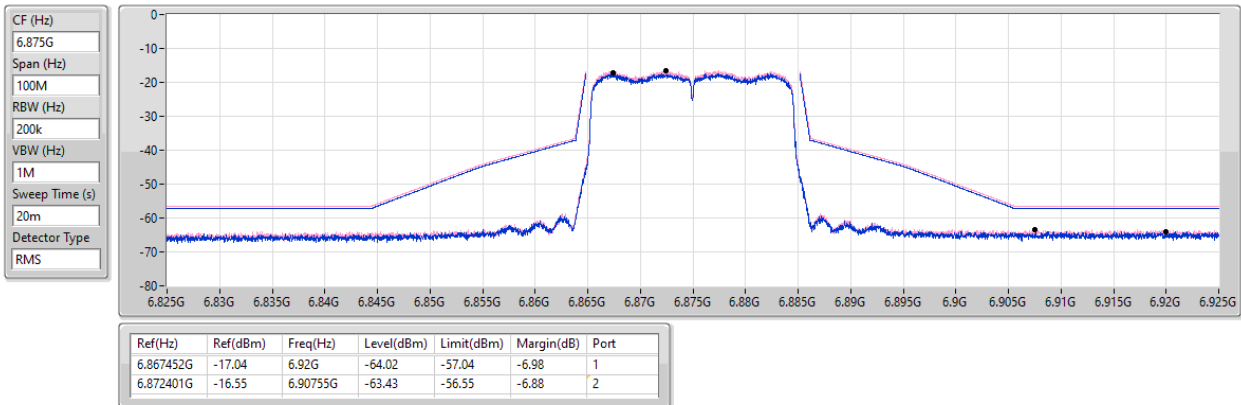


6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6895MHz_TX

09/05/2025

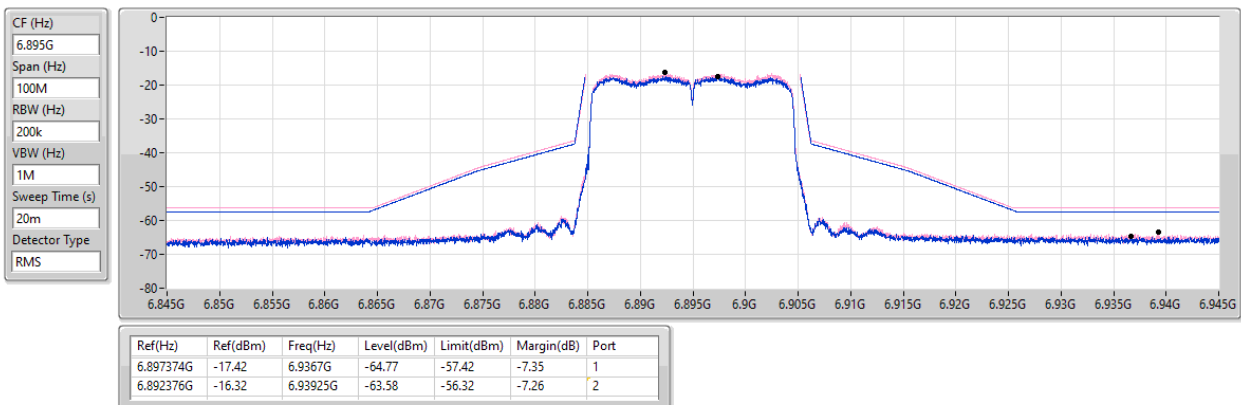


6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6995MHz_TX

09/05/2025

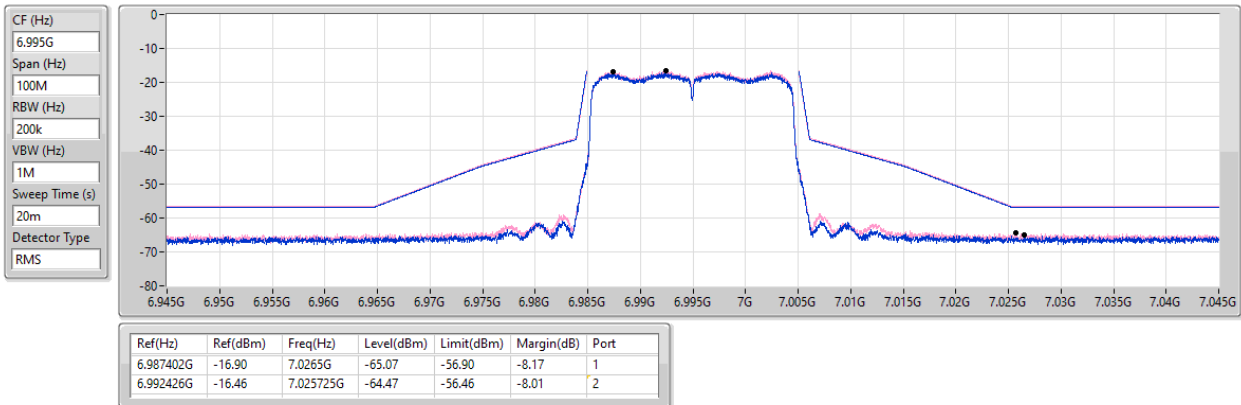


6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

7095MHz_TX

09/05/2025

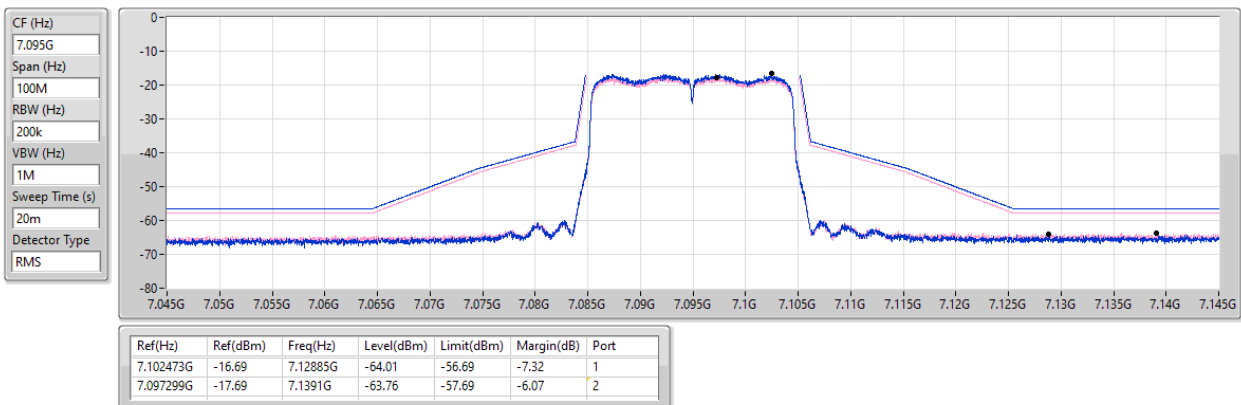


6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

7115MHz_TX

09/05/2025

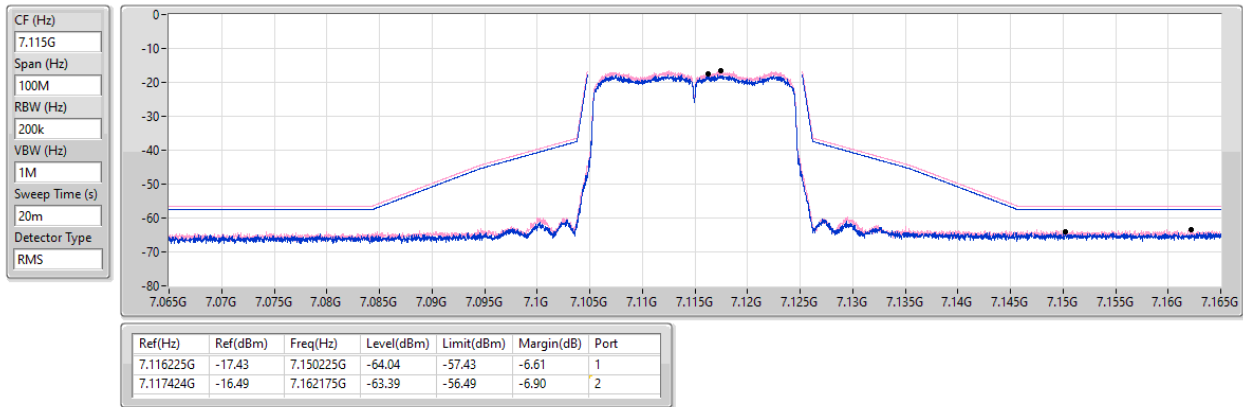


5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

MASK

5965MHz_TX

09/05/2025

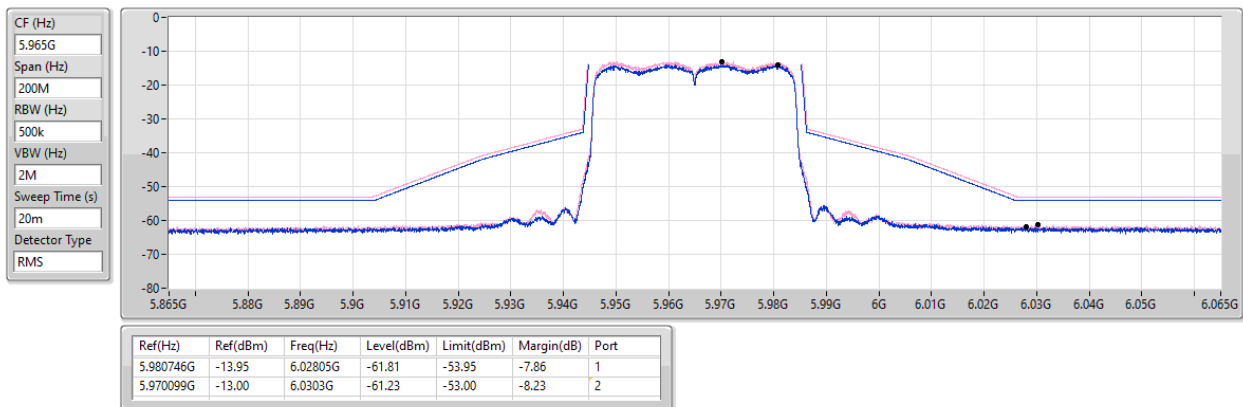


5.925-6.425GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

MASK

6205MHz_TX

09/05/2025

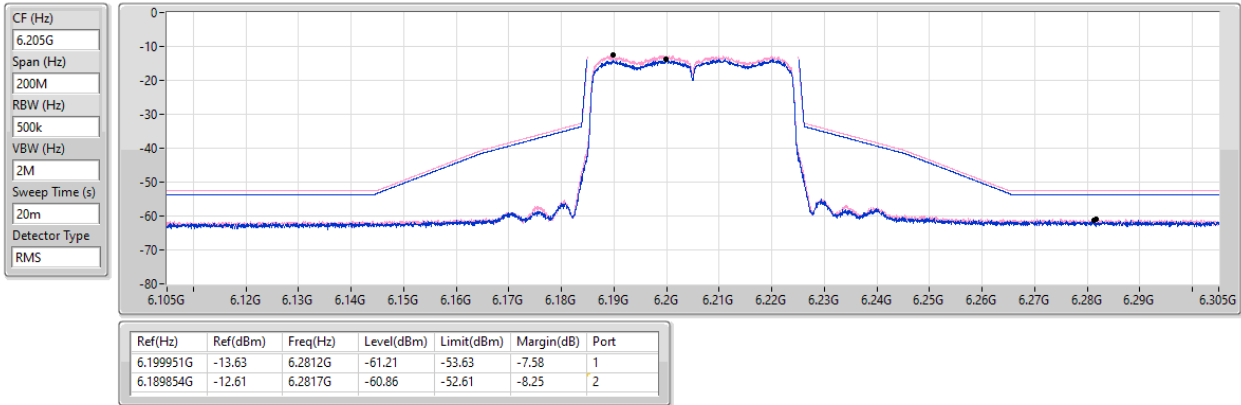


5.925-6.425GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

MASK

6405MHz_TX

09/05/2025

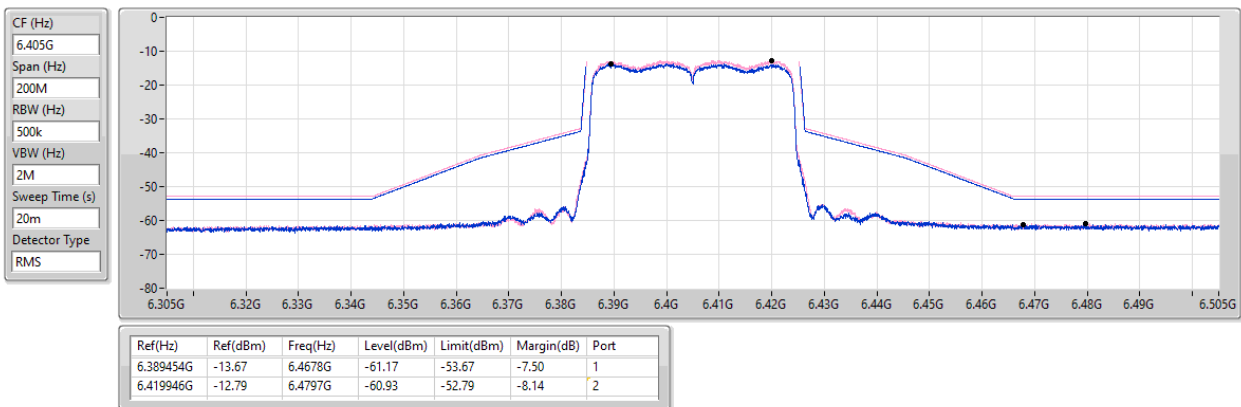


6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

MASK

6445MHz_TX

09/05/2025

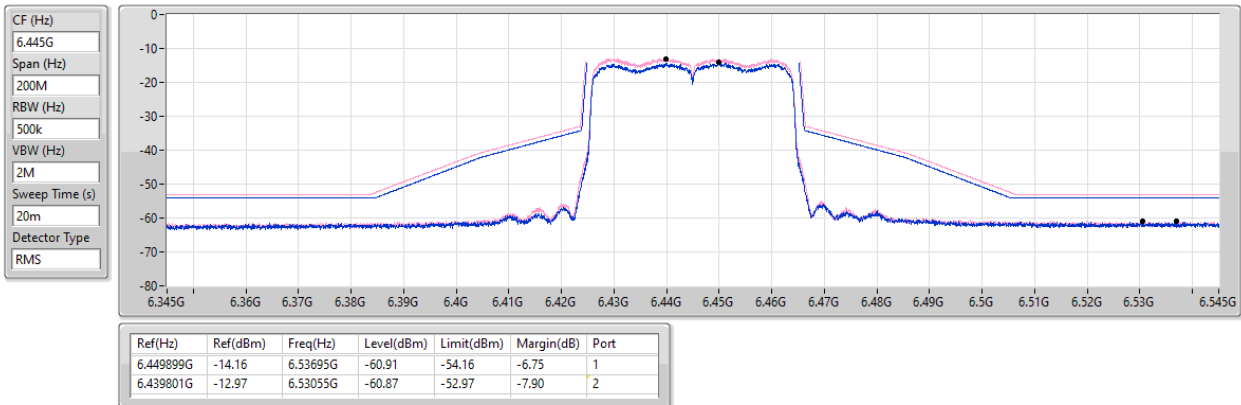

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

MASK

6485MHz_TX

09/05/2025

