



849 NW State Road 45
Newberry, FL 32669 USA
Ph: 888.472.2424 or 352.472.5500
Fax: 352.472.2030
Email: info@timcoengr.com
Website: www.timcoengr.com

FCC PART 15.249 AND IC RSS-210 (i8)
TEST REPORT
UNLICENSED INTENTIONAL RADIATOR

Applicant	ELK PRODUCTS, INC.	
Address	3266 HIGHWAY 70 WEST	
	HILDEBRAN NC 28637 USA	
FCC ID	TMAELK-6030X	
IC	4353A-6030X	
Model Number	ELK-6030, ELK-6030P	
Product Description	PIR SENSOR	
Date Sample Received	12/19/2012	
Date Tested	12/20/2012	
Tested By	JOHN DAY	
Approved By	MARIO R. DE ARANZETA	
Report Number	3020ZAUT12TestReport.doc	
Test Results	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



Testing Certificate #0955-01



TABLE OF CONTENT

GENERAL REMARKS.....	3
GENERAL INFORMATION	4
EMC EQUIPMENT LIST.....	5
TEST PROCEDURES.....	6
RADIATION INTERFERENCE	7
OCCUPIED BANDWIDTH	10
BAND EDGE COMPLIANCE	12
DUTY CYCLE.....	14
POWER LINE CONDUCTED INTERFERENCE	15

APPLICANT: ELK PRODUCTS, INC.

FCC ID: TMAELK-6030X

IC: 4353A-6030X

REPORT #: W:\E\ELK_TMA\3020ZAUT12\Extra3020ZAUT12\3020ZAUT12TestReportrev 1.doc

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

Summary

The device under test does:

fulfill the general approval requirements as identified in this test report
 not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.



Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669



Authorized Signatory Name:

John A. Day
Testing Tech./Project Manager

Date: 12/20/2012



Mario de Aranzeta, Engineer/ Lab Supervisor

APPLICANT: ELK PRODUCTS, INC.

FCC ID: TMAELK-6030X

IC: 4353A-6030X

REPORT #: W:\E\ELK_TMA\3020ZAUT12\Extra3020ZAUT12\3020ZAUT12TestReportrev 1.doc

GENERAL INFORMATION

DUT Specification

The test results relate only to the items tested.		
Applicable Standard	Part 15.249, RSS-210 (issue 8)	
DUT Description	PIR SENSOR	
FCC ID	TMAELK-6030	
IC	4353A-6030X	
Model Number	ELK-6030, ELK-6030P	
Operating Frequency	TX: 902 – 928 MHz	RX: Same
No. of Channels	25	
DUT Power Source	<input type="checkbox"/> 110–120Vac/50– 60Hz	
	<input checked="" type="checkbox"/> DC Power	
	<input type="checkbox"/> Battery Operated Exclusively	
Test Item	<input type="checkbox"/> Prototype	<input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Production
Type of Equipment	<input type="checkbox"/> Fixed	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable
Antenna Connector	FCC Rules require that the antenna connector be unique.	
Test Facility	Timco Engineering Inc. located at 849 NW State Road 45 Newberry, FL 32669 USA.	
Test Conditions	Temperature: 26°C Relative humidity: 50%	
Test Exercise	The DUT was placed in continuous transmit mode of operation.	
Modifications		

Test Supporting Equipment

Supporting Device	Manufacturer	Model / FCC ID	Serial Number
N/A			

APPLICANT: ELK PRODUCTS, INC.

FCC ID: TMAELK-6030X

IC: 4353A-6030X

REPORT #: W:\E\ELK_TMA\3020ZAUT12\Extra3020ZAUT12\3020ZAUT12TestReportrev 1.doc



EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	12/31/11	12/31/13
3-Meter OATS	TEI	N/A	N/A	12/31/11	12/31/13
Antenna: Passive Loop	EMC Test Systems	EMCO 6512	9706-1211	06/14/12	06/14/14
Frequency Counter	HP	5385A	2730A03025	08/17/11	08/17/13
Frequency Counter	HP	5352B	2632A00165	06/22/11	06/22/13
Digital Multimeter	Fluke	77	43850817	02/22/12	02/22/13
Antenna: Active Loop	ETS-Lindgren	6502	00062529	09/23/10	09/23/13
Antenna: Double-Ridged Horn	Electro-Metrics	RGA-180	2319	06/19/12	06/19/14
LISN	Electro-Metrics	ANS-25/2	2604	10/28/11	10/28/13
DC Power Supply	HP	6264B		03/21/11	03/21/13
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	12/31/11	12/31/13
Temperature Chamber	Tenney Engineering	TTRC	11717-7	07/03/12	07/03/14
Antenna: Biconnical	Electro-Metrics	BIA-25	1171	06/13/12	06/13/14
Antenna: Log-Periodic	Electro-Metrics	LPA-25	1122	05/04/11	05/04/13
Digital Multimeter	Fluke	77	35053830	09/09/11	09/09/13
Antenna: Biconnical	Eaton	94455-1	1096	05/04/11	05/04/13
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	11/21/09	10/28/13
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	11/22/09	10/28/13
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	11/21/09	10/28/13
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	11/24/09	10/28/13
Horn Antenna	ETS-Lindgren	3117	35923	12/20/11	12/20/13
Antenna: Log-Periodic	Eaton	96005	1243	05/31/11	05/31/13

APPLICANT: ELK PRODUCTS, INC.

FCC ID: TMAELK-6030X

IC: 4353A-6030X

REPORT #: W:\E\ELK_TMA\3020ZAUT12\Extra3020ZAUT12\3020ZAUT12TestReportrev 1.doc

TEST PROCEDURES

Radiation Interference: ANSI C63.4-2003 using a spectrum analyzer, a preselector, a quasi-peak adapter, and an appropriate antenna. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz with an appropriate sweep speed and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3 MHz above 1 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The spectrum was searched to at least the tenth (10) harmonic of the fundamental.

Formula Of Conversion Factors: The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB μ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

Example:

$$\begin{array}{llll}
 \text{Freq (MHz)} & \text{Meter Reading} & + \text{ACF} & + \text{CL} = \text{FS} \\
 33 & 20 \text{ dB}\mu\text{V} & + 10.36 \text{ dB} & + 0.5 = 30.86 \text{ dB}\mu\text{V/m} @ 3\text{m}
 \end{array}$$

Power Line Conducted Interference: The procedure used was ANSI C63.4-2003 using a 50uH LISN. Both lines were observed. The bandwidth of the spectrum analyzer was 10kHz with an appropriate sweep speed. The spectrum was scanned from 0.15 to 30 MHz.

Occupied Bandwidth: A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was printed. The vertical scale is set to -10 dBm per division.

ANSI C63.4-2003 10.1 Measurement Procedures: The DUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The DUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes. Emissions attenuated more than 20 dB below the permissible value are not reported.

Emissions were measured from the lowest frequency generated or 9 kHz to the tenth harmonic.

APPLICANT: ELK PRODUCTS, INC.

FCC ID: TMAELK-6030X

IC: 4353A-6030X

REPORT #: W:\E\ELK_TMA\3020ZAUT12\Extra3020ZAUT12\3020ZAUT12TestReportrev 1.doc

RADIATION INTERFERENCE

Rules Part No.: 15.249, 15.209

Requirements:

Frequency	Limits
Part 15.209	
9 to 490 kHz	2400/F (kHz) μ V/m @ 300 meters
490 to 1705 kHz	24000/F (kHz) μ V/m @ 30 meters
1705 kHz to 30 MHz	29.54 dB μ V/m @ 30 meters
30 – 88	40.0 dB μ V/m @ 3 meters
80 – 216	43.5 dB μ V/m @ 3 meters
216 – 960	46.0 dB μ V/m @ 3 meters
Above 960	54.0 dB μ V/m @ 3 meters
Part 15.249	
Fundamental 902 – 928 MHz	94.0 dB μ V/m @ 3 meters
Fundamental 2.4 – 2.4835 MHz	94.0 dB μ V/m @ 3 meters
Harmonics	54.0 dB μ V/m @ 3 meters

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB μ V	Ant. Polarity	Coax Loss dB	Correction Factor dB/m	Duty cycle CF dB	Field Strength dB μ V/m	Margin dB
903.0	903.00	71.0	H	1.95	23.80	17.4	79.35	14.65
903.0	903.00	74.3	V	1.95	23.80	17.4	82.65	11.35
903.0	1,806.00	19.1	V	2.74	30.47	17.4	34.91	19.09
903.0	1,806.00	22.1	H	2.74	30.47	17.4	37.91	16.09
903.0	2,709.00	19.7	V	3.40	32.77	17.4	38.47	15.53
903.0	2,709.00	22.6	H	3.40	32.77	17.4	41.37	12.63
903.0	3,612.00	27.0	H	4.15	33.21	17.4	46.96	7.04
903.0	3,612.00	27.5	V	4.15	33.21	17.4	47.46	6.54
903.0	4,515.00	16.8	H	4.76	34.21	17.4	38.37	15.63
903.0	4,515.00	21.9	V	4.76	34.21	17.4	43.47	10.53
903.0	5,418.00	14.0	V	5.13	34.75	17.4	36.48	17.52
903.0	5,418.00	15.7	H	5.13	34.75	17.4	38.18	15.82
903.0	6,321.00	12.2	V	5.40	35.79	17.4	35.99	18.01
903.0	6,321.00	14.3	H	5.40	35.79	17.4	38.09	15.91
903.0	7,224.00	12.1	V	5.73	36.16	17.4	36.59	17.41
903.0	7,224.00	14.4	H	5.73	36.16	17.4	38.89	15.11
903.0	8,128.00	11.4	V	6.25	36.10	17.4	36.35	17.65
903.0	8,128.00	12.2	H	6.25	36.10	17.4	37.15	16.85
903.0	9,030.00	8.7	H	6.61	36.22	17.4	34.13	19.87
903.0	9,030.00	9.3	V	6.61	36.22	17.4	34.73	19.27

APPLICANT: ELK PRODUCTS, INC.

FCC ID: TMAELK-6030X

IC: 4353A-6030X

REPORT #: W:\E\ELK_TMA\3020ZAUT12\Extra3020ZAUT12\3020ZAUT12TestReportrev 1.doc

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB μ V	Ant. Polarity	Coax Loss dB	Correction Factor dB/m	Duty cycle CF dB	Field Strength dB μ V/m	Margin dB
915.0	915.00	74.1	H	1.97	22.55	17.4	81.22	12.78
915.0	915.00	76.3	V	1.97	22.55	17.4	83.42	10.58
915.0	1,830.00	17.3	V	2.76	30.61	17.4	33.27	20.73
915.0	1,830.00	19.6	H	2.76	30.61	17.4	35.57	18.43
915.0	2,745.00	21.2	V	3.42	32.80	17.4	40.02	13.98
915.0	2,745.00	21.3	H	3.42	32.80	17.4	40.12	13.88
915.0	3,660.00	28.8	V	4.19	33.26	17.4	48.85	5.15
915.0	3,660.00	30.4	H	4.19	33.26	17.4	50.45	3.55
915.0	4,575.00	18.2	V	4.79	34.25	17.4	39.84	14.16
915.0	4,575.00	21.9	H	4.79	34.25	17.4	43.54	10.46
915.0	5,490.00	16.2	H	5.15	34.79	17.4	38.74	15.26
915.0	5,490.00	18.0	V	5.15	34.79	17.4	40.54	13.46
915.0	6,405.00	11.0	H	5.42	35.84	17.4	34.86	19.14
915.0	6,405.00	11.5	V	5.42	35.84	17.4	35.36	18.64
915.0	7,320.00	13.6	V	5.79	36.14	17.4	38.13	15.87
915.0	7,320.00	14.7	H	5.79	36.14	17.4	39.23	14.77
915.0	8,235.00	11.2	V	6.29	36.10	17.4	36.19	17.81
915.0	8,235.00	11.6	H	6.29	36.10	17.4	36.59	17.41
915.0	9,150.00	9.3	V	6.65	36.32	17.4	34.87	19.13
915.0	9,150.00	9.6	H	6.65	36.32	17.4	35.17	18.83

APPLICANT: ELK PRODUCTS, INC.

FCC ID: TMAELK-6030X

IC: 4353A-6030X

REPORT #: W:\E\ELK_TMA\3020ZAUT12\Extra3020ZAUT12\3020ZAUT12TestReportrev 1.doc

**Test Data:**

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity	Coax Loss dB	Correction Factor dB/m	Duty cycle correction factor	Field Strength dB μ V/m	Margin
927	927	72.2	H	1.99	23.94	17.4	80.73	13.27
927	927	76.2	V	1.99	23.94	17.4	84.73	9.27
927	1,854.00	8.6	V	2.78	30.75	17.4	24.73	29.27
927	1,854.00	11.6	H	2.78	30.75	17.4	27.73	26.27
927	2,781.00	13.1	V	3.45	32.82	17.4	31.97	22.03
927	2,781.00	14.8	H	3.45	32.82	17.4	33.67	20.33
927	3,708.00	26.2	V	4.24	33.31	17.4	46.35	7.65
927	3,708.00	29.4	H	4.24	33.31	17.4	49.55	4.45
927	4,635.00	14.3	V	4.82	34.28	17.4	36	18.00
927	4,635.00	18.4	H	4.82	34.28	17.4	40.1	13.90
927	5,562.00	11.3	V	5.17	34.9	17.4	33.97	20.03
927	5,562.00	17	H	5.17	34.9	17.4	39.67	14.33
927	6,489.00	9.5	V	5.45	35.89	17.4	33.44	20.56
927	6,489.00	11.1	H	5.45	35.89	17.4	35.04	18.96
927	7,416.00	7.5	V	5.85	36.12	17.4	32.07	21.93
927	7,416.00	9.7	H	5.85	36.12	17.4	34.27	19.73
927	8,343.00	9.1	H	6.34	36.1	17.4	34.14	19.86
927	8,343.00	9.9	V	6.34	36.1	17.4	34.94	19.06
927	9,270.00	8.2	V	6.68	36.42	17.4	33.9	20.10
927	9,270.00	8.3	H	6.68	36.42	17.4	34	20.00

APPLICANT: ELK PRODUCTS, INC.

FCC ID: TMAELK-6030X

IC: 4353A-6030X

REPORT #: W:\E\ELK_TMA\3020ZAUT12\Extra3020ZAUT12\3020ZAUT12TestReportrev 1.doc


OCCUPIED BANDWIDTH

Rules Part No.: 15.249 (d)

Requirements: The field strength of any emissions appearing outside the bandedges and up to 10 kHz above and below the band edges shall be attenuated at least 50 dB below the level of the carrier or to the general limits of 15.249.

Test Data:

Occupied Bandwidth 6 dB

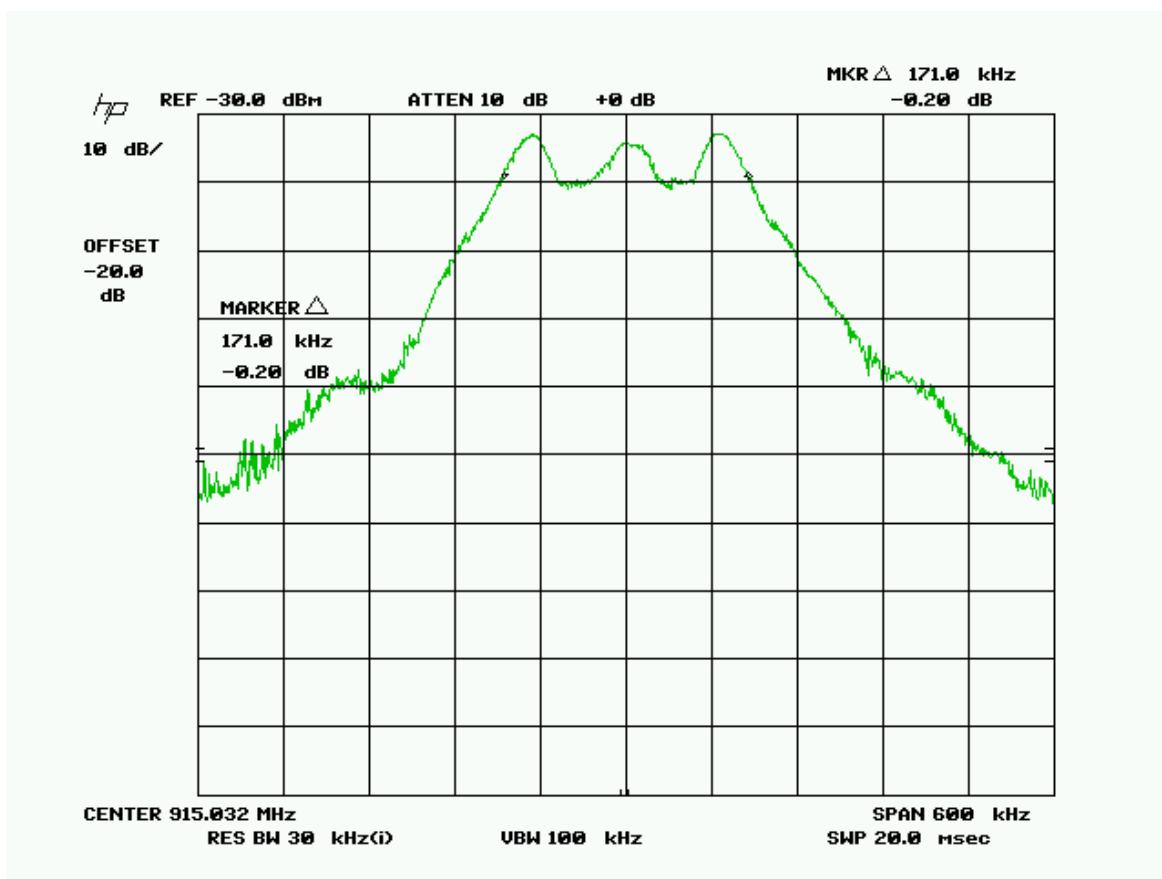


APPLICANT: ELK PRODUCTS, INC.

FCC ID: TMAELK-6030X

IC: 4353A-6030X

REPORT #: W:\E\ELK_TMA\3020ZAUT12\Extra3020ZAUT12\3020ZAUT12TestReportrev 1.doc

Occupied Bandwidth 20 dB

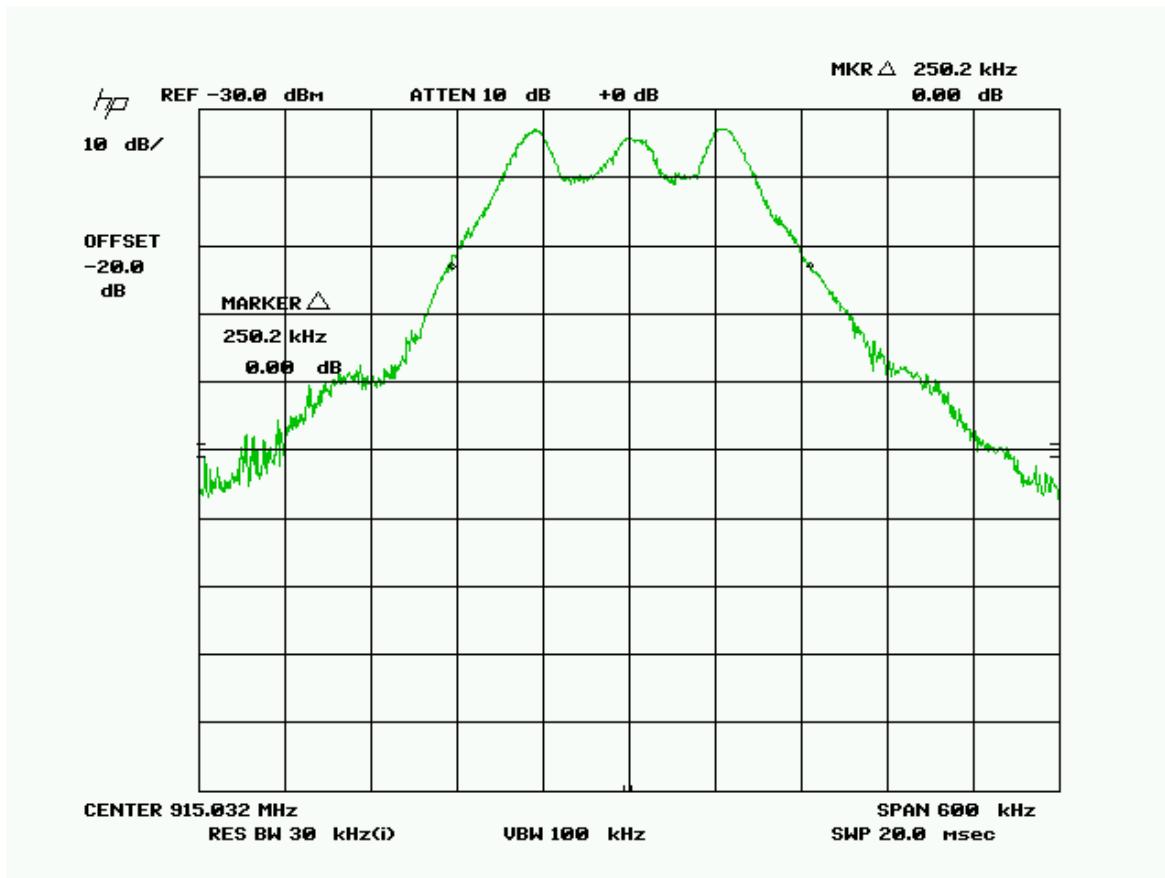

APPLICANT: ELK PRODUCTS, INC.

FCC ID: TMAELK-6030X

IC: 4353A-6030X

REPORT #: W:\E\ELK_TMA\3020ZAUT12\Extra3020ZAUT12\3020ZAUT12TestReportrev 1.doc


BAND EDGE COMPLIANCE

Rules Part No.: 15.249 (d)

Requirements: 50 dBc or radiated limits of 15.209 whichever is the lesser.

Test Data:

Lower bandedge

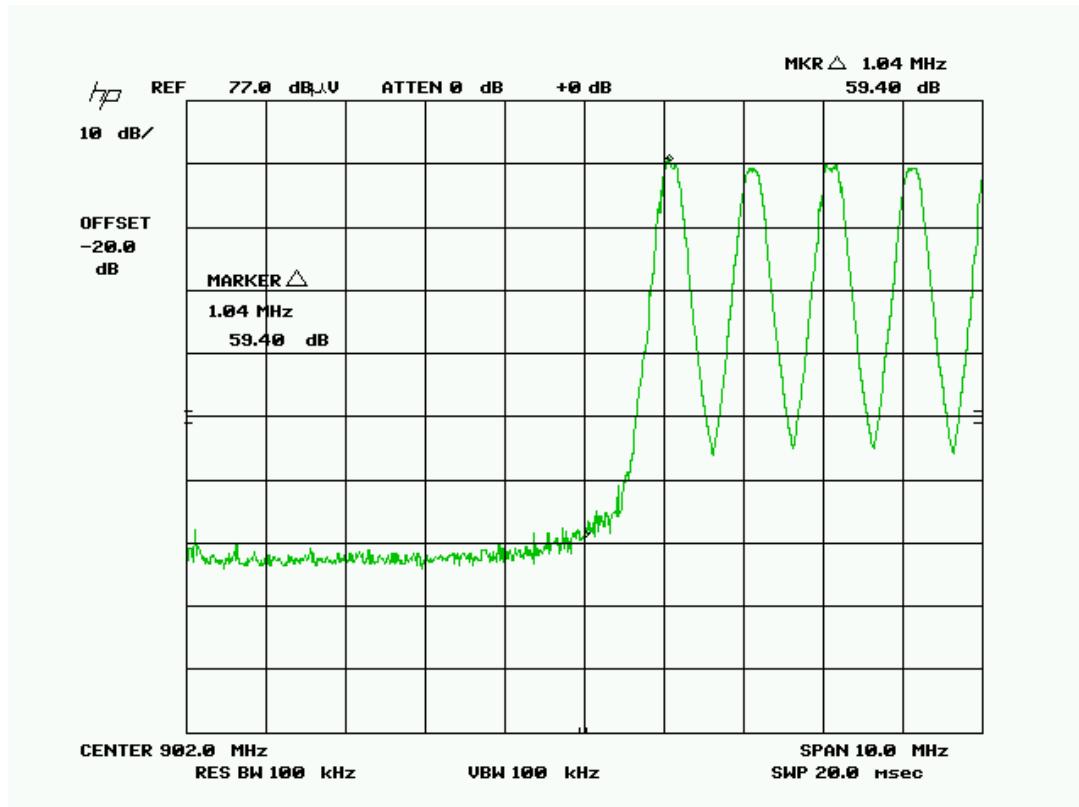

Peak Plot


APPLICANT: ELK PRODUCTS, INC.

FCC ID: TMAELK-6030X

IC: 4353A-6030X

REPORT #: W:\E\ELK_TMA\3020ZAUT12\Extra3020ZAUT12\3020ZAUT12TestReportrev 1.doc

Upper bandedge

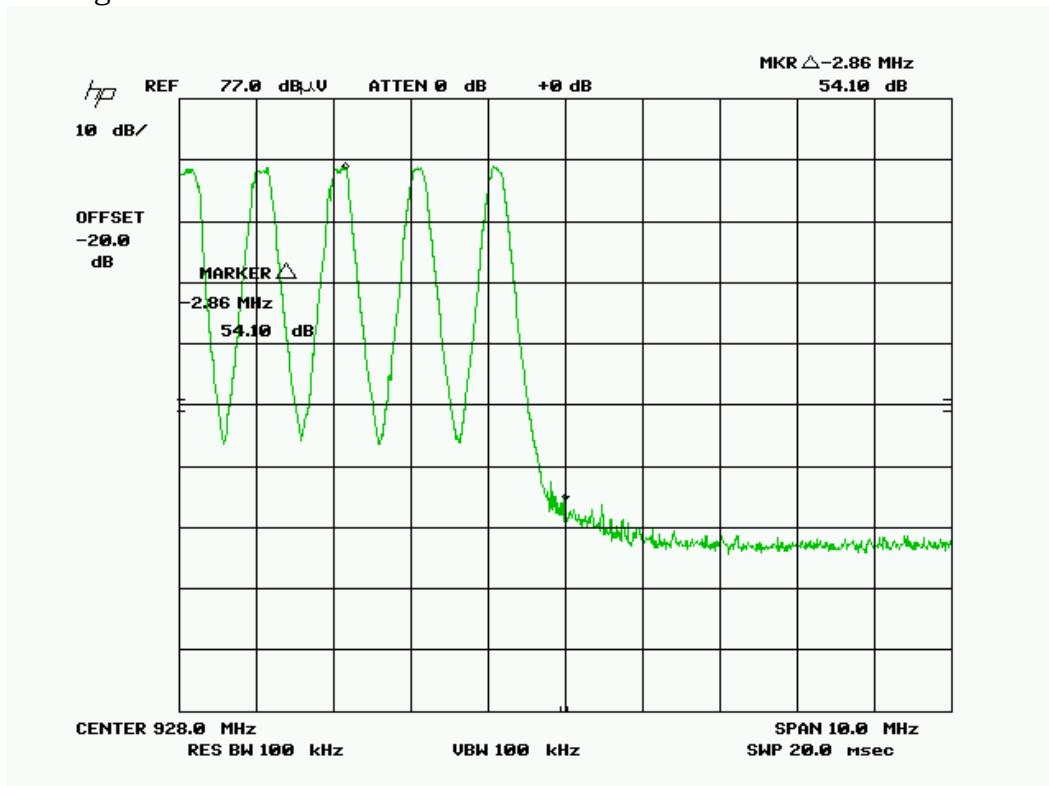

Peak Plot

APPLICANT: ELK PRODUCTS, INC.

FCC ID: TMAELK-6030X

IC: 4353A-6030X

REPORT #: W:\E\ELK_TMA\3020ZAUT12\Extra3020ZAUT12\3020ZAUT12TestReportrev 1.doc



DUTY CYCLE

Total # of pulses: 1 in 250 ms, according to manufacturer.

Duration of pulse: 13.5 ms maximum duration of pulse, according to manufacturer.

$$20 \log ((1 \cdot 13.5) / 100) = 20 \log (0.135) = 17.4 \text{ dB}$$

APPLICANT: ELK PRODUCTS, INC.

FCC ID: TMAELK-6030X

IC: 4353A-6030X

REPORT #: W:\E\ELK_TMA\3020ZAUT12\Extra3020ZAUT12\3020ZAUT12TestReportrev 1.doc



POWER LINE CONDUCTED INTERFERENCE

Rules Part No.: 15.207

Requirements:

Frequency (MHz)	Quasi Peak Limits (dB μ V)	Average Limits (dB μ V)
0.15 – 0.5	66 – 56	56 – 46
0.5 – 5.0	56	46
5.0 – 30	60	50

Test Data: The attached graphs represent the emissions read for power line conducted for this device. Both lines were observed.

N/A
Battery powered DUT.

APPLICANT: ELK PRODUCTS, INC.

FCC ID: TMAELK-6030X

IC: 4353A-6030X

REPORT #: W:\E\ELK_TMA\3020ZAUT12\Extra3020ZAUT12\3020ZAUT12TestReportrev 1.doc