

# TUV SUD Canada

## RF Test Report

As per

**RSS 247 Issue 2**


&

**FCC Part 15 Subpart C**

**Unlicensed Intentional Radiators**

on the

**Open Smart Device Interface (OSDI)  
SecureMesh Module**



Scott Drysdale, NCT

EMC Lab Manager

TUV SUD Canada Laval

2972 Joseph-A-Bombardier

Laval, QC, H7P 6E3 CANADA

Ph: (450) 687- 4976

Testing produced for



See Appendix A for full customer & EUT details.



REGISTRATION #6844B-1



FCC REGISTRATION  
#382292



Testing Laboratory  
Certificate #2955.02

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

## Table of Contents

Table of Contents .....	2
Report Scope .....	3
Summary .....	4
Test Results Summary .....	5
Justifications, Descriptions, or Deviations .....	7
Applicable Standards, Specifications and Methods .....	9
Sample calculation(s) .....	10
Document Revision Status .....	10
Definitions and Acronyms .....	11
Testing Facility .....	12
Calibrations and Accreditations .....	12
Testing Environmental Conditions and Dates .....	13
Detailed Test Results Section .....	14
Radiated Emissions .....	22
6dB Bandwidth of Digitally Modulated Systems .....	40
Maximum conducted output power .....	49
Spurious Conducted Emissions .....	55
Power Spectral Density - DM .....	64
Appendix A – EUT Summary .....	69
Appendix B – EUT and Test Setup Photographs .....	71

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

## Report Scope

This report addresses the EMC verification testing and test results of the Open Smart Device Interface (OSDI) SecureMesh Module Unit, herein referred to as EUT (Equipment Under Test) performed at TUV SUD Canada Labs.

The EUT was tested for compliance against the following standards:

RSS 247 Issue 2/ FCC Part 15 Subpart C 15:2016

Test procedures, results, justifications, and engineering considerations, if any, follow later in this report.

The results contained in this report relate only to the item(s) tested.

This report does not imply product endorsement by A2LA or any other accreditation agency, any government, or TUV SUD Canada

Opinions/interpretations expressed in this report, if any, are outside the scope of TUV SUD Canada Inc accreditation. Any opinions expressed do not necessarily reflect the opinions of TUV SUD Canada Inc, unless otherwise stated.

Client	Trilliant Networks Canada Inc.
Product	Open Smart Device Interface (OSDI) SecureMesh Module
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15



## Summary

The results contained in this report relate only to the item(s) tested.

EUT FCC Certification #, FCC ID:	TMB-OSDI4W1
EUT Industry Canada Certification #, IC:	6028A-OSDI4W1
HVIN	CL-R0353A-6.2
EUT Passed all tests performed.	Yes (see test results summary)
Tests conducted by	Scott Drysdale

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

## Test Results Summary

Standard/Method	Description	Class/Limit	Result
FCC 15.203	Antenna Requirement	Unique	Pass See Justification
FCC 15.205 RSS-GEN	Restricted Bands for intentional operation	N/A	Pass
FCC 15.207 RSS-GEN	Power line conducted emissions	QuasiPeak Average	Pass
FCC 15.209 RSS-247 5.5	Spurious Radiated emissions	QuasiPeak Average	Pass
FCC 15.247(a)2 RSS-247 5.2.1	6 dB Bandwidth	> 500 kHz	Pass
FCC 15.247(b)2 RSS-247 5.4.4	Max output power	< 1 Watt	Pass
FCC 15.247(b)(4) RSS-247 5.4.5	Antenna Gain	< 6 dBi	Pass See Justifications
FCC 15.247(d) RSS-247 5.5	Antenna conducted spurious	< 20 dBc	Pass
FCC 15.247(e) RSS-247 5.2.2	Spectral Density	< 8 dBm (3 kHz BW)	Pass
FCC 15.247(i) IC Safety code 6	Maximum Permissible Exposure	> 20 cm separation.	Pass See justification and calculations
<b>Overall Result</b>			<b>Pass</b>

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

All tests were performed by Scott Drysdale.

If the product as tested or otherwise complies with the specification, the EUT is deemed to comply with the requirement and is deemed a 'PASS' grade. If not 'FAIL' grade will be issued. Note that 'PASS' / 'FAIL' grade is independent of any measurement uncertainties. A 'PASS' / 'FAIL' grade within measurement uncertainty is marked with a '\*'.

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

### ***Justifications, Descriptions, or Deviations***

The following justifications for tests not performed descriptions, or deviations from the above listed specifications apply:

The duty cycle of the EUT during measurement was greater than or equal to 98%. Note that this duty cycle is performed in this special mode for test purposes only.

For the Antenna requirement specified in FCC 15.203 (RSS 247), this device can be configured with the following antenna(s), and the antenna connector type(s), and antenna gain.

The changes under this application is to

1. Add OFDM modulation
2. Add the following antenna to both the original filing using OQPSK, and this filing using OFDM of with its trace design in the single-modular approval:
- 3.

Manufacturer	Type	Part Number	Gain	Connector
Molex	Omnidirectional	1461530100	3.0 @ 2.4 GHz	U.FL

For all radiated measurements with OFDM, all antennas previously approved were investigated for spurious emissions, and the worst case/representative results are presented in this test report.

The original modulation type of OQPSK was tested against spurious emissions for the above antenna, and all emissions were found to be equal or better than the previous 3 dBi omnidirectional antenna.

For the Restricted Bands of operation, the EUT is designed to only operate between 2.4 GHz and 2.4835 GHz.

For the power line conducted emissions requirements, the EUT is DC powered, however AC power line conducted emissions with powered via an AC-DC power source is included in this test report.

For the scope of this test report, radiated testing of the EUT host was pre-scanned in three orthogonal axis to maximize emissions. Additionally the antenna was scanned in each axis.

For maximum permissible exposure, this device operates at less than 1 Watt at 2.4GHz to 2.4835 GHz MHz and is designed to operate greater than 20 cm from personnel during normal operation. No testing is required, however worst case calculated exposure compliance is presented as separate exhibit.

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

A later revision of the standard may have been substituted in place of the previous dated referenced revision. The year of the specification used are listed under applicable standards. Using the later revision accomplishes the goal of ensuring compliance to the intent of the previous specification, while allowing the laboratory to incorporate the extensions and clarifications made available by a later revision.

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

## ***Applicable Standards, Specifications and Methods***

ANSI C63.4:2014 - Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

ANSI C63.10:2013 - American national standard for testing unlicensed wireless devices

CFR 47 FCC 15 - Code of Federal Regulations – Radio Frequency Devices

CISPR 22:2008 - Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement

ICES-003:2012 - Digital Apparatus - Spectrum Management and Telecommunications Policy Interference-Causing Equipment Standard

ISO 17025:2005 - General Requirements for the competence of testing and calibration laboratories

RSS 247:2017 - Issue 2: Spectrum Management and Telecommunications Policy. Radio Standards Specification Low Power Licence-Exempt Radiocommunication Devices

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

## ***Sample calculation(s)***

Margin = limit – (received signal + antenna factor + cable loss – pre-amp gain)

Margin = 50.5dBuV/m – (50dBuV + 10dB + 2.5dB – 20dB)

Margin = 8.5 dB

## ***Document Revision Status***

Revision 000 - July 5, 2017

Revision 001 - July 17, 2017 – Minor revisions. Added power line conducted emissions.

Client	Trilliant Networks Canada Inc.
Product	Open Smart Device Interface (OSDI) SecureMesh Module
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15



## Definitions and Acronyms

The following definitions and acronyms are applicable in this report.  
See also ANSI C63.14.

**AE** – Auxiliary Equipment.

**BW** – Bandwidth. Unless otherwise stated, this is refers to the 6 dB bandwidth.

**EMC** – Electro-Magnetic Compatibility

**EMI** – Electro-Magnetic Immunity

**EUT** – Equipment Under Test

**ITE** – Information Technology Equipment with a primary function(s) of entry, storage, display, retrieval, transmission, processing, switching, or control, of data.

**LISN** – Line impedance stabilization network

**NCR** – No Calibration Required

**RF** – Radio Frequency

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

## Testing Facility

Testing for EMC on the EUT was carried out at TUV SUD Canada labs in Montréal, Québec, Canada. The testing lab consists of a 3m semi-anechoic chamber calibrated to be able to allow measurements on an EUT with a maximum width or length of up to 2m and height up to 3m. The chamber is equipped with a turn table that is capable of testing devices up to 3300lb in weight. This facility is capable of testing products that are rated for 120 Vac and 240Vac single phase, or 208 Vac 3 phase input. DC capability is also available. The chamber is equipped with an antenna mast that controls polarization and height from the control room adjoining the shielded chamber. Radiated emissions measurements are performed using a Bilog, and Horn antenna where applicable. Conducted emissions, unless otherwise stated, are performed using a LISN.

## ***Calibrations and Accreditations***

The measurement site used is registered with Federal Communications Commission (FCC) and Industry Canada (IC). This site is calibrated for Normalized Site Attenuation (NSA) using test procedures outlined in ANSI C63.4 “Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz”. The semi-anechoic chamber is lined with ferrite tiles and absorption cones to minimize any undesired reflections. All measuring equipment is calibrated on an annual or bi-annual basis as listed for each respective test. Testing was performed under accreditation by A2LA with a scope of accreditation listed under certificate number 2955.02

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

## ***Testing Environmental Conditions and Dates***

Following were the environmental conditions in the facility during time of testing –

Date	Test	Init.	Temperature (°C)	Humidity (%)	Pressure (kPa)
May 4-20 <sup>th</sup> , 2017	Radiated	SD	20°C	30-45%	98 -103kPa
May 4-20 <sup>th</sup> , 2017	Antenna Conducted	SD	23°C	30-55%	98 -103kPa
July 14, 2017	Powerline conducted emissions	SD	23°C	30-55%	98 -103kPa

Client	Trilliant Networks Canada Inc.
Product	Open Smart Device Interface (OSDI) SecureMesh Module
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15



## Detailed Test Results Section

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

## Power Line Conducted Emissions

### Purpose

The purpose of this test is to ensure that the RF energy unintentionally emitted from the EUT's power line does not exceed the limits listed below as defined in the applicable test standard, as measured from a LISN. This helps protect lower frequency radio services such as AM radio, shortwave radio, amateur radio operators, maritime radio, CB radio, and so on, from unwanted interference.

### Limits & Method

The limits are as defined in 47 CFR FCC Part 15 Section 15.207

Method is as defined in ANSI C63.4.

Average Limits		QuasiPeak Limits	
150 kHz – 500 kHz	56 to 46 dBuV	150 kHz – 500 kHz	66 to 56 dBuV
500 kHz – 5 MHz	46 dBuV	500 kHz – 5 MHz	56 dBuV
5 MHz – 30 MHz	50 dBuV	500 kHz – 30 MHz	60 dBuV

The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.


Note: If the Peak or Quasi Peak detector measurements do not exceed the Average limits, then the EUT is deemed to have passed the requirements.

Both limits are applicable, and each is specified as being measured with a 9 kHz measurement bandwidth .

Client	Trilliant Networks Canada Inc.
Product	Open Smart Device Interface (OSDI) SecureMesh Module
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15



### Typical Setup Diagram

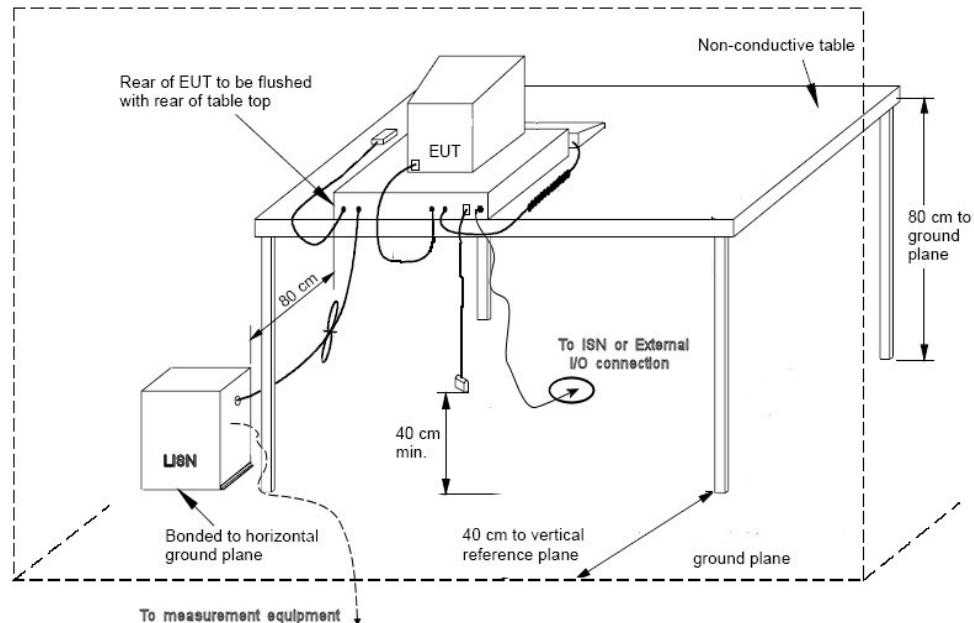

Note: The vertical reference plane is optional as per ANSI C63.4 section 5.2.2

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	


## Measurement Uncertainty

The expanded measurement uncertainty is calculated in accordance with CISPR 16-4-2 and is +/-3.6 dB with a 'k=2' coverage factor and a 95% confidence level.


## Preliminary Graphs

Note the graphs shown below are for graphical illustration only. For final measurements with the appropriate detector where applicable, please refer to the table. The graph shown below is a peak measurement graph, measured with a resolution bandwidth greater than or equal to the final required detector. These graphs are performed as a worst case measurement to enable the detection of frequencies of concern and for considerable time savings.

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

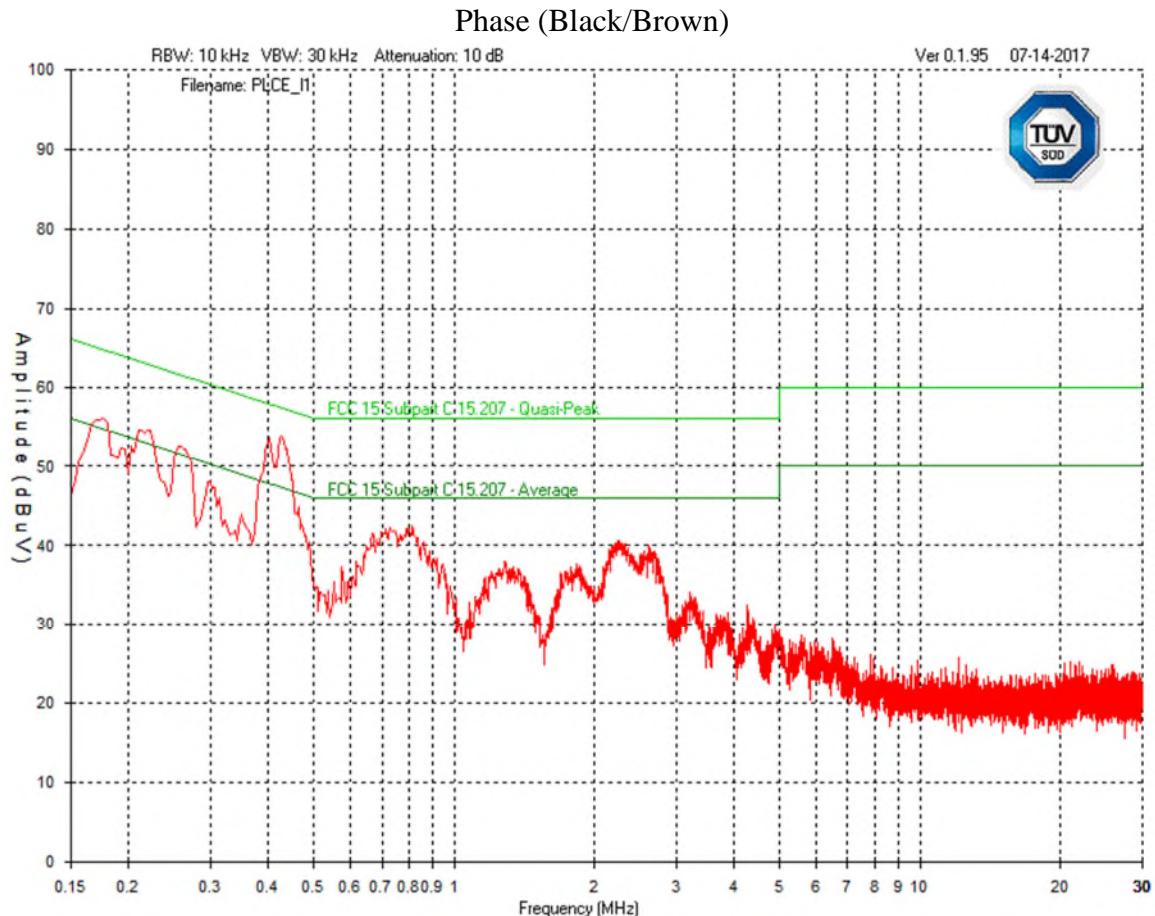

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

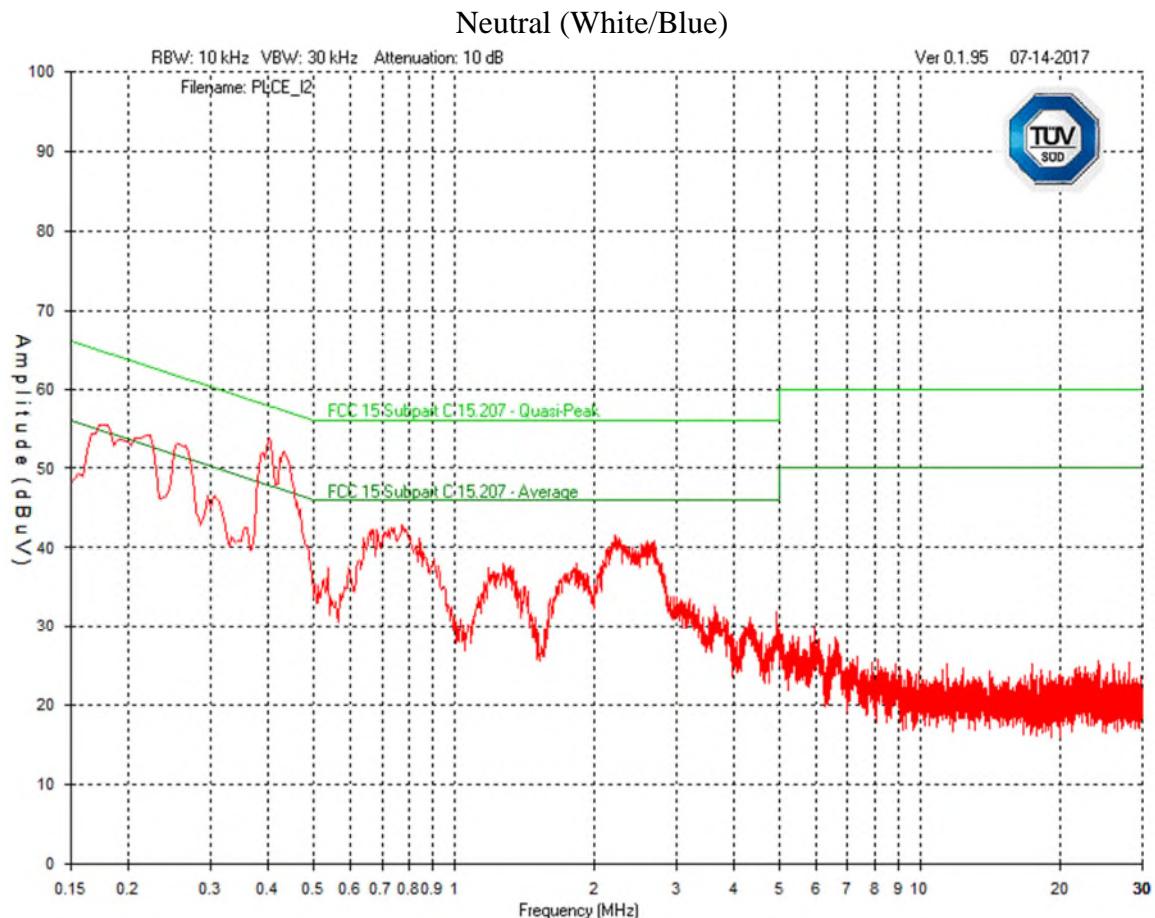

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

## Final Measurements

Average Emissions reading table – Line 1

Frequency (MHz)	Raw (dBuV)	Atten Factor (dB)	LISN Factor (dB)	Cable (dB)	Level (dBuV)	Limit (dB)	Margin (dB)	Pass/Fail
0.4256	35.5	10	0	0.2	45.7	47.3	1.6	Pass
0.1766	36.7	10	0	1.2	47.9	54.6	6.7	Pass
0.2596	33.8	10	0	0.7	44.5	51.4	6.9	Pass
0.814	24.2	10	0	0.2	34.4	46	11.6	Pass
2.2482	22.4	10	0.1	0.2	32.7	46	13.3	Pass
1.2854	19.9	10	0.1	0.2	30.2	46	15.8	Pass

Average Emissions reading table – Line 2

Frequency (MHz)	Raw (dBuV)	Atten Factor (dB)	LISN Factor (dB)	Cable (dB)	Level (dBuV)	Limit (dB)	Margin (dB)	Pass/Fail
0.4023	35.6	10	0	0.2	45.8	47.8	2	Pass
0.2562	34.4	10	0	0.7	45.1	51.6	6.5	Pass
0.1766	36.3	10	0	1.2	47.5	54.6	7.1	Pass
0.7742	24.7	10	0	0.2	34.9	46	11.1	Pass
2.2184	23.2	10	0.1	0.2	33.5	46	12.5	Pass
1.2788	19.8	10	0.1	0.2	30.1	46	15.9	Pass

Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up for the highest line conducted emission

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

## Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset#
Spectrum Analyzer	ESU-40	Rohde & Schwarz	1/28/16	1/28/2018	4092
LISN	FCC-LISN-50/250-16-2-01	FCC	Feb. 1, 2017	Feb. 1, 2019	GEMC 65
RF Cable 7m	LMR-400-7M-50Ω-MN-MN	LexTec	Feb 1, 2017	Feb 1, 2018	GEMC 4025
RF Cable 10m	LMR-400-10M-50Ω-MN-MN	LexTec	Feb 1, 2017	Feb 1, 2018	GEMC 4026
Emissions Software	0.1.94	Global EMC	NCR	NCR	GEMC 58

1: For cables and attenuators, verification dates apply.

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

## ***Radiated Emissions***

### **Purpose**

The purpose of this test is to ensure that the RF energy unintentionally emitted from the EUT does not exceed the limits listed below as defined in the applicable test standard, as measured from a receiving antenna. This helps protect broadcast radio services such as television, FM radio, pagers, cellular telephones, emergency services, and so on, from unwanted interference.

### **Limit(s) and Method**

The method is as defined in ANSI C63.4.

The limits are as defined in FCC Part 15, Section 15.209:

0.009 MHz – 0.490 MHz, 2400/F(kHz) uV/m at 300 m<sup>1</sup>  
 0.490 MHz – 1.705 MHz, 24000/F(kHz) uV/m at 30 m<sup>1</sup>  
 1.705 MHz – 30 MHz, 30 uV/m at 30 m<sup>1</sup>  
 30 MHz – 88 MHz, 100 uV/m (40.0 dBuV/m<sup>1</sup>) at 3 m  
 88 MHz – 216 MHz, 150 uV/m (43.5 dBuV/m<sup>1</sup>) at 3 m  
 216 MHz – 960 MHz, 200 uV/m (46.0 dBuV/m<sup>1</sup>) at 3 m  
 Above 960 MHz, 500 uV/m (54.0 dBuV/m<sup>1</sup>) at 3 m  
 Above 1000 MHz, 500 uV/m (54 dBuV/m<sup>2</sup>) at 3m  
 Above 1000 MHz, 5000 uV/m (74 dBuV/m<sup>3</sup>) at 3m

<sup>1</sup>Limit is with Quasi Peak detector with bandwidths as defined in CISPR-16-1-1


<sup>2</sup>Limit is with 1 MHz measurement bandwidth and using an Average detector

<sup>3</sup>Limit is with 1 MHz measurement bandwidth and using a Peak detector

Client	Trilliant Networks Canada Inc.
Product	Open Smart Device Interface (OSDI) SecureMesh Module
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15



### Typical Radiated Emissions Setup

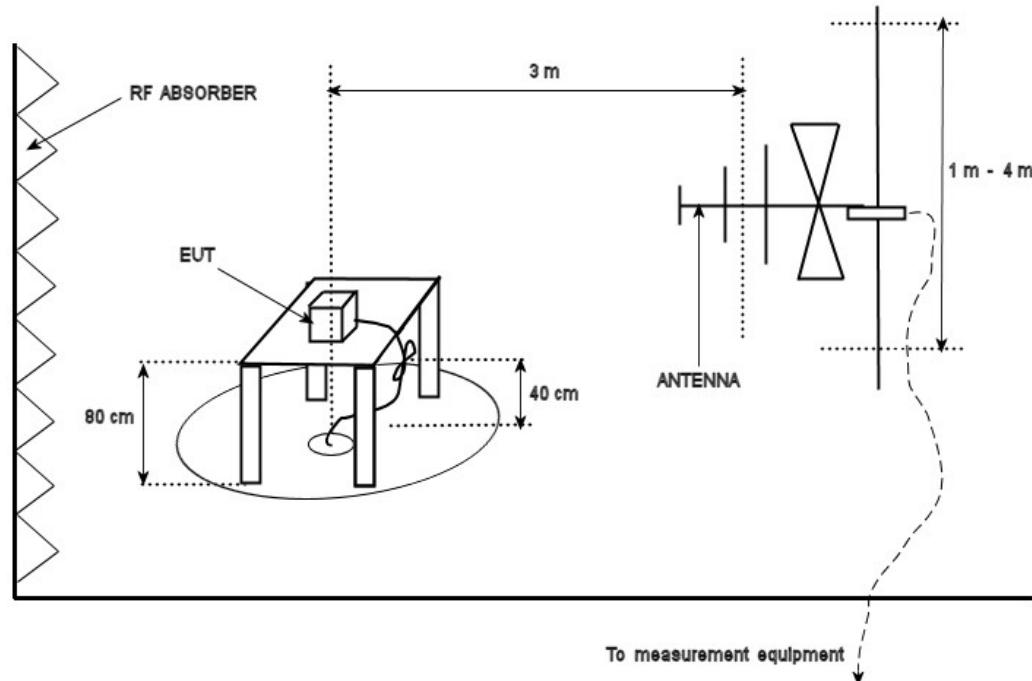

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

## Measurement Uncertainty

The expanded measurement uncertainty is calculated in accordance with CISPR 16-4-2 and is +/-4.4 dB with a 'k=2' coverage factor and a 95% confidence level.

## Preliminary Graphs


Note the graphs shown below are for graphical illustration only. For final measurements with the appropriate detector, please refer to the final measurement table where applicable. The graph shown below is a maximized peak measurement graph, measured with a resolution bandwidth greater than the final required detector and over a full 0-360 rotation. This peaking process is done as a worst case measurement. This process enables the detection of frequencies of concern for final measurement, and provides considerable time savings.

In accordance with FCC Part 15, Subpart A, Section 15.33, the device was scanned to the 10<sup>th</sup> harmonic ( a minimum of a 25 GHz).

Devices scanned may be scanned at alternate test distances, and in accordance with FCC Part 15, Subpart A, Section 15.31, an extrapolation factor of 20 dB/decade was used above 30 MHz and 40 dB/decade below 30 MHz. For example for 1 meter measurements, an extrapolation factor 9.5 dB from 20 Log (1m / 3m) is applied.


Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

Peak emissions graph - 9 kHz to 150 KHz

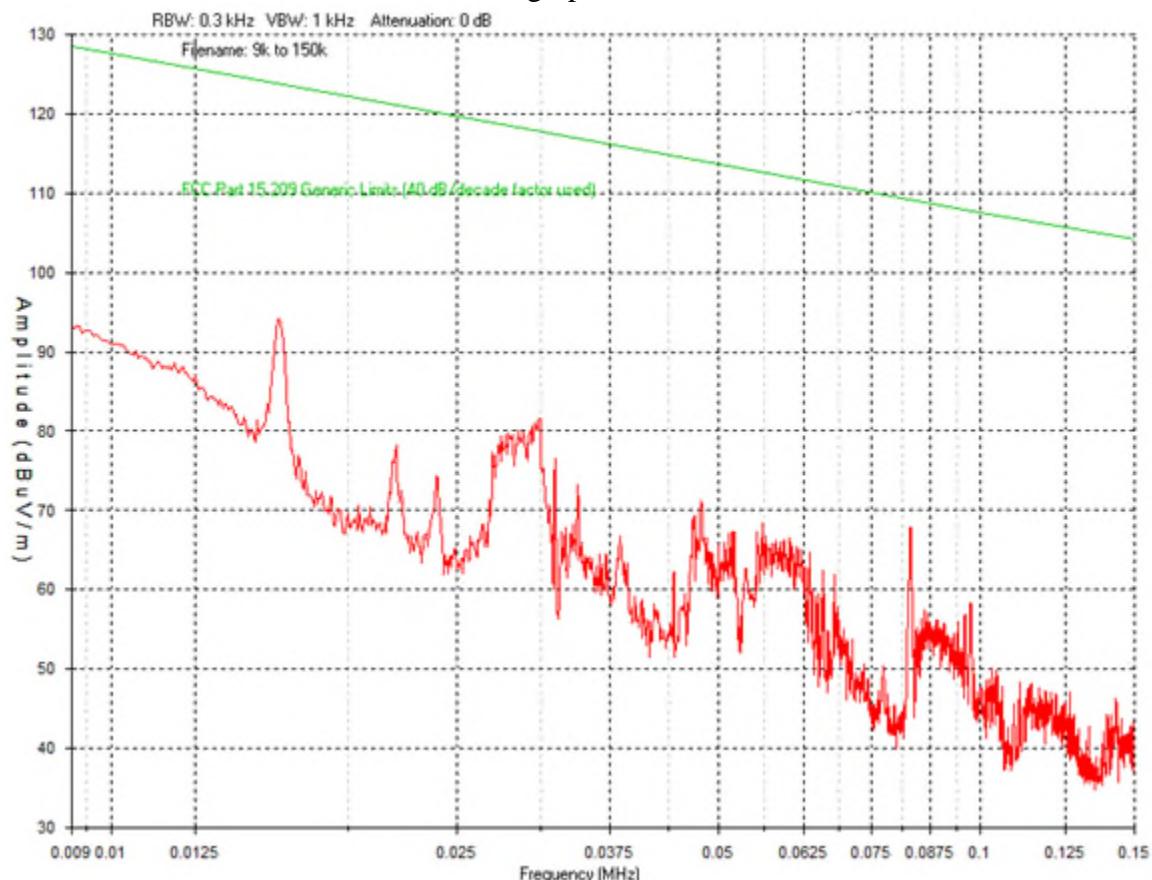


Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

Peak emissions graph - 150 kHz to 30 MHz

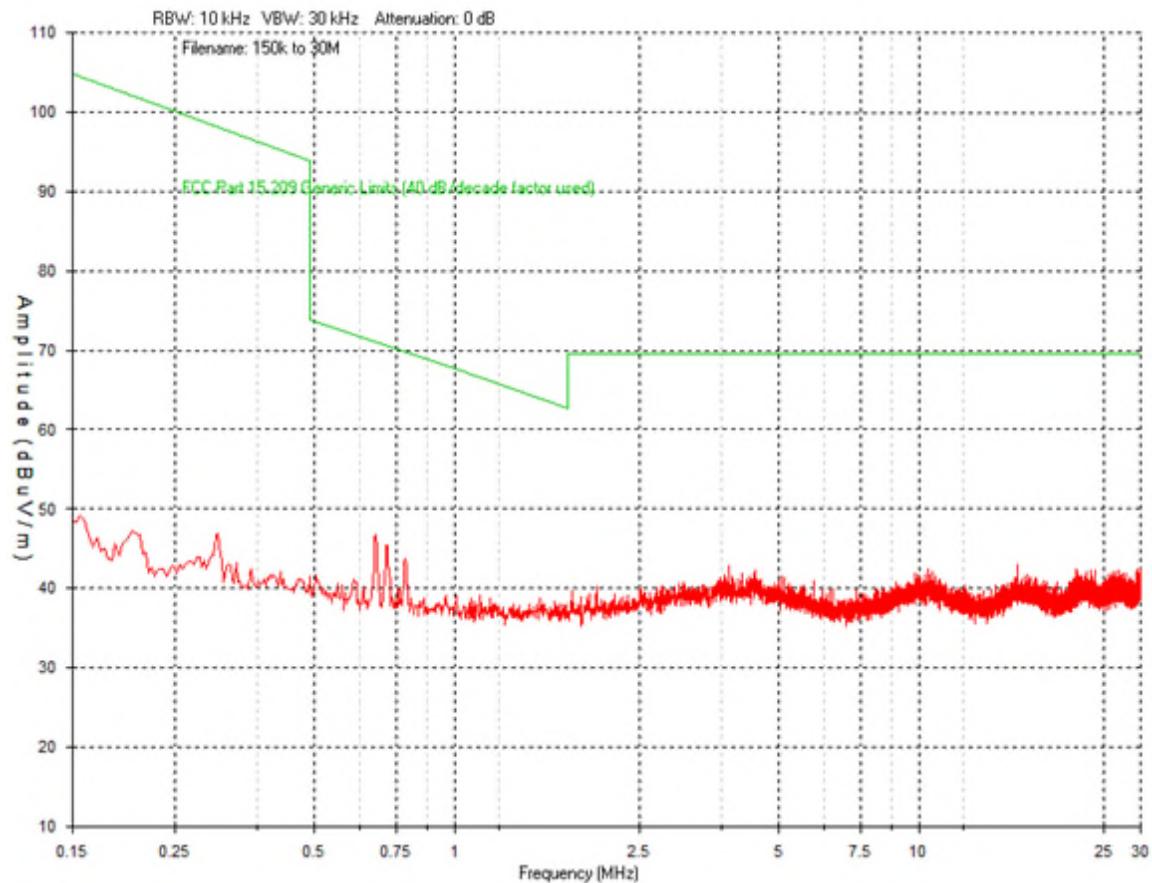


Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

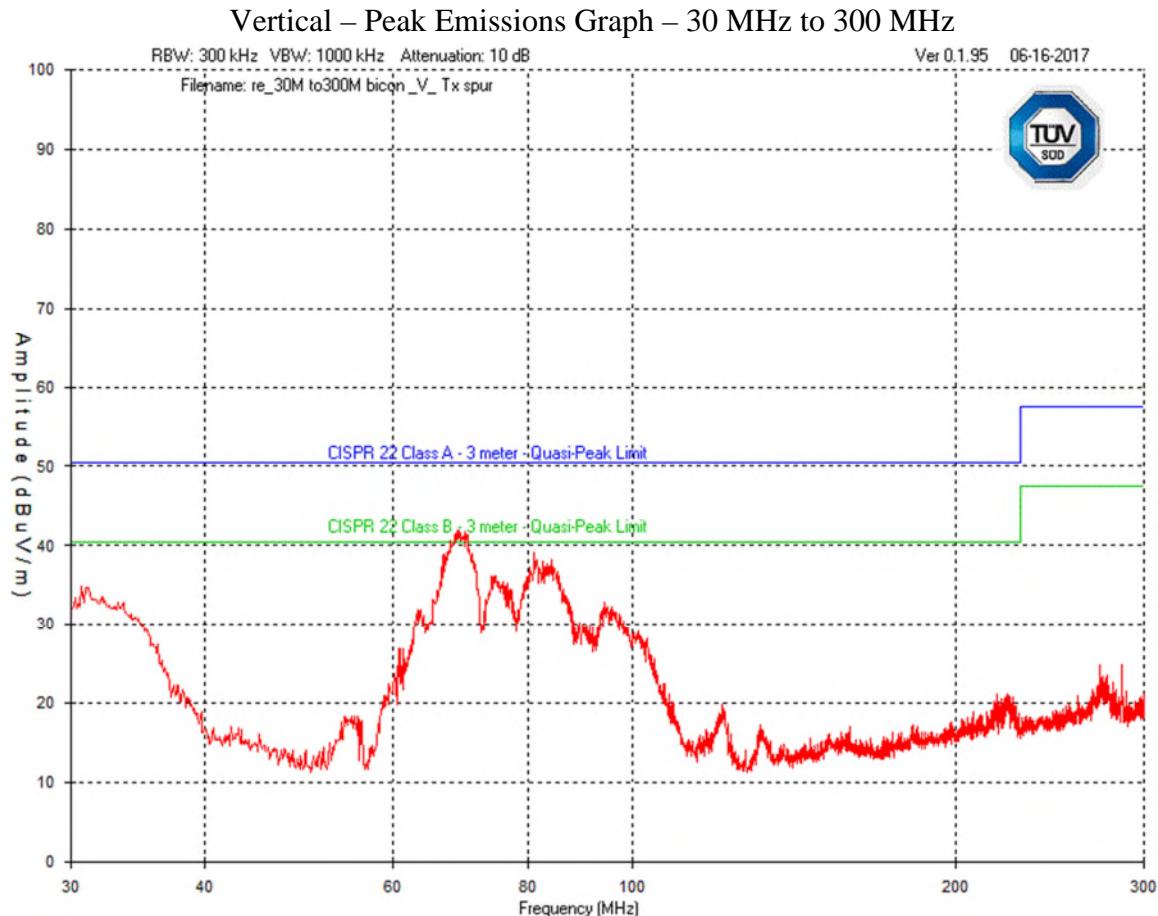

Note: CISPR 22 limits shown in preliminary peak reading above, final readings in table show FCC Limits.

Low, Mid and High scanned, worst case or representative shown above.

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

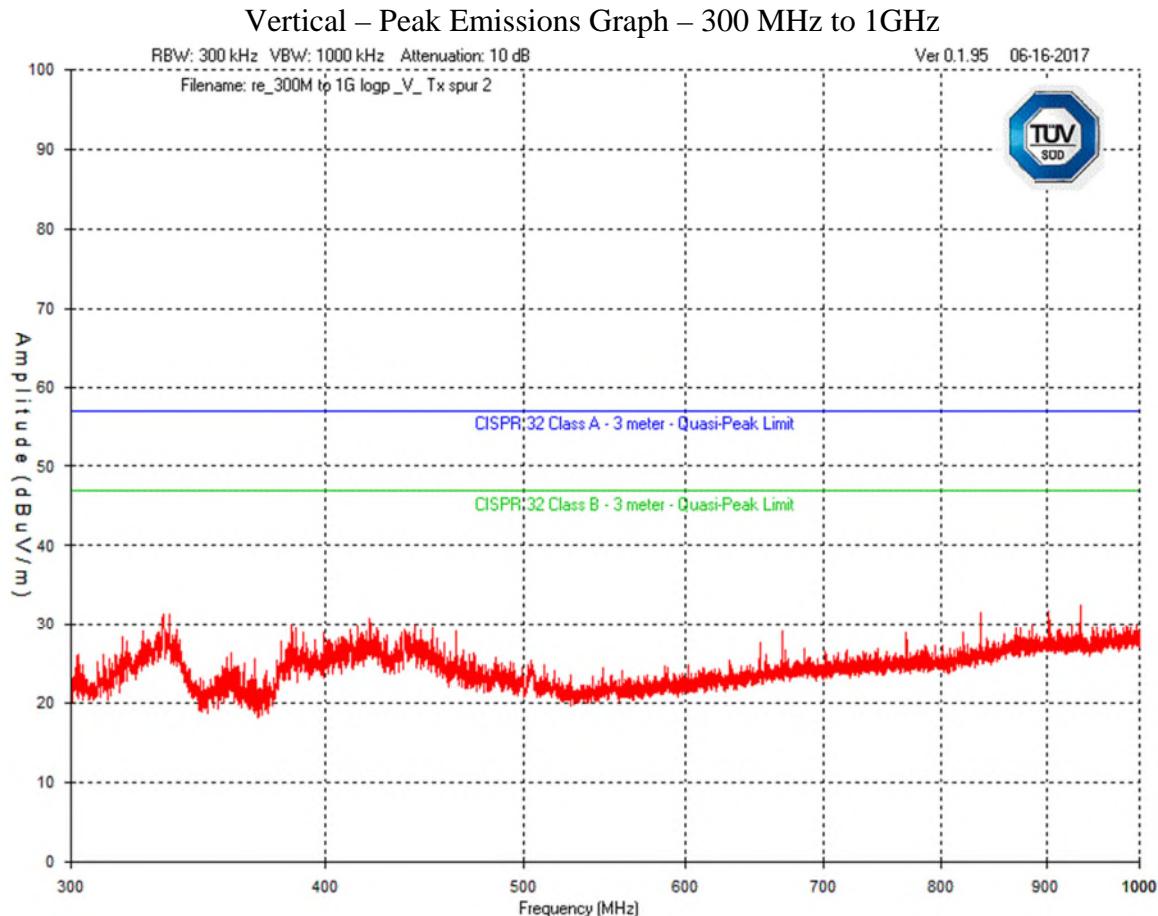


Note: CISPR 22 limits shown in preliminary peak reading above, final readings in table show FCC Limits.

Low, Mid and High scanned, worst case or representative shown above.


Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

### Vertical – Peak emissions Graph – Above 1 GHz - Peak

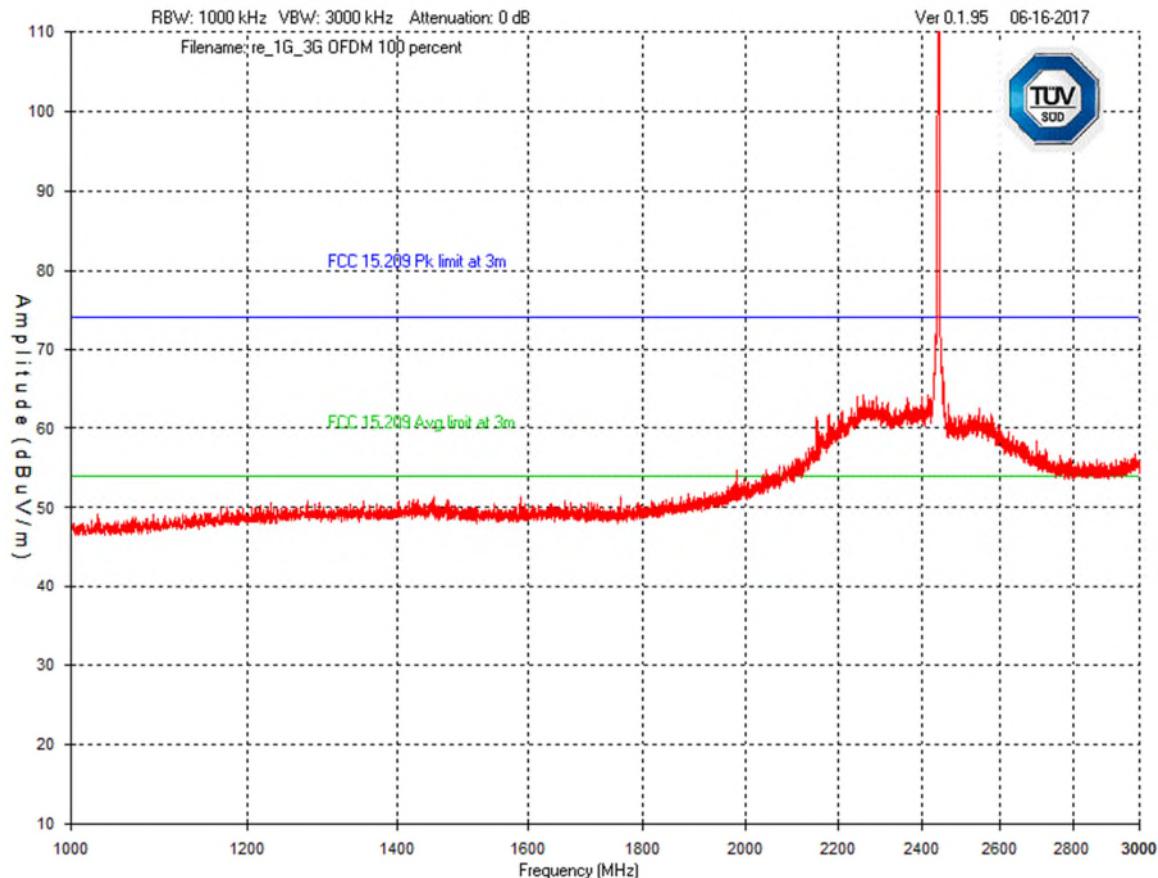


Mid-channel shown as worst case. See table for details.

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

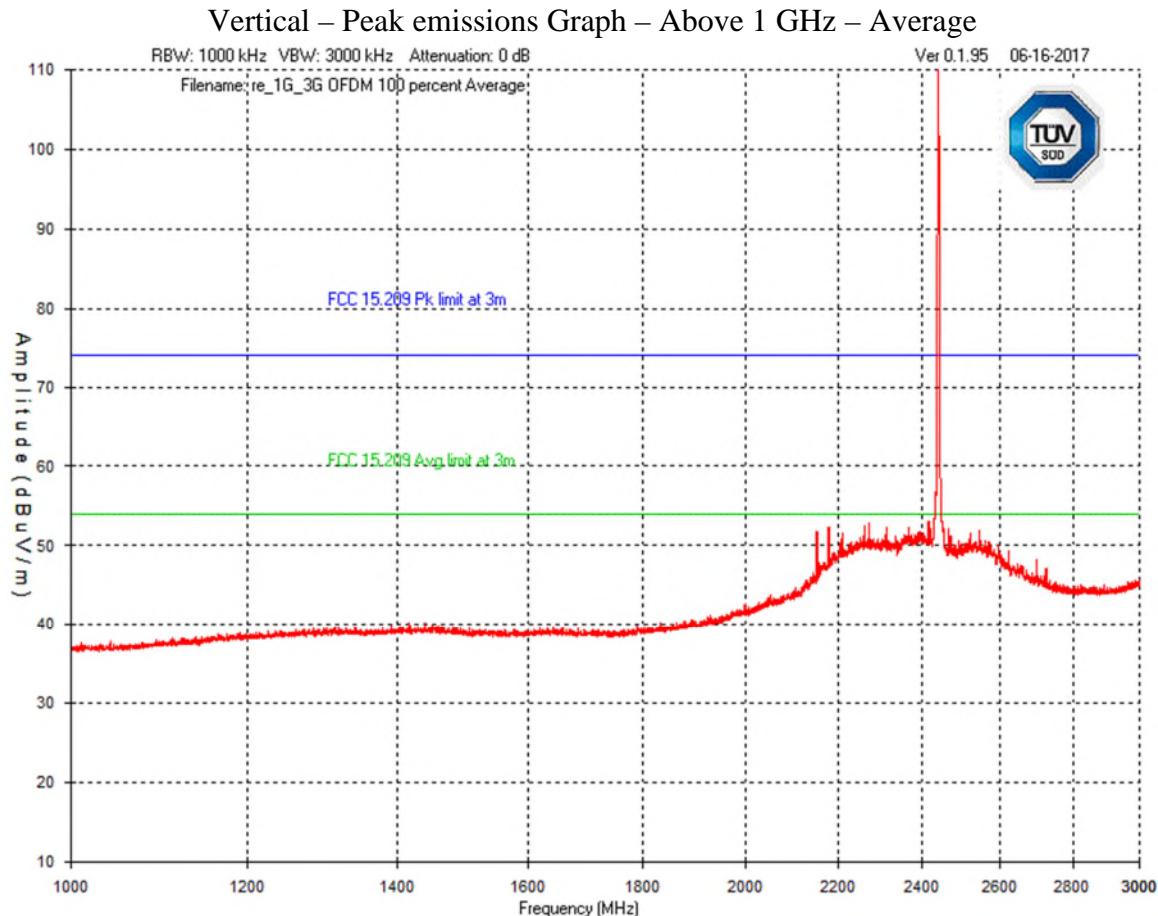

Mid-channel shown as worst case. See table for details.


Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

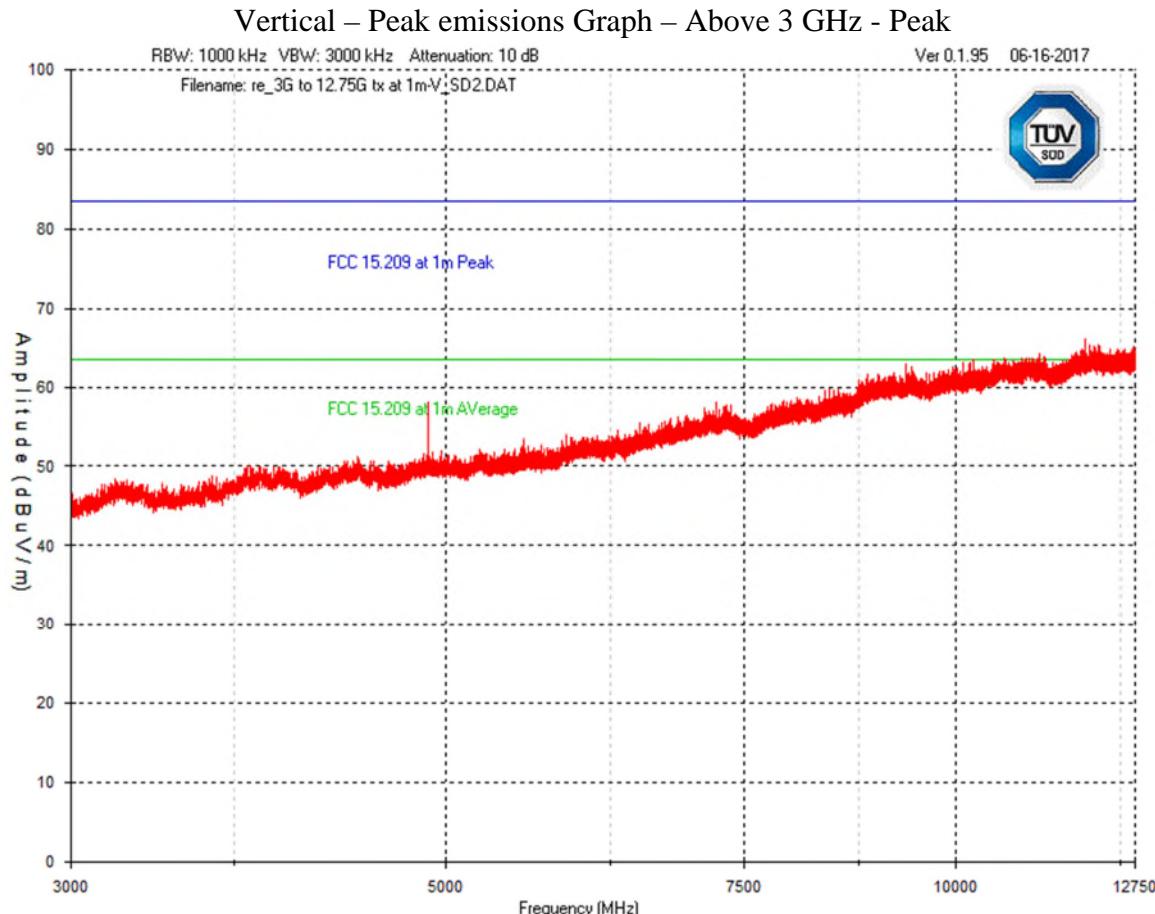

Mid-channel shown as worst case. See table for details. Emissions were scanned to 25 GHz. No emissions were detected above the limit, and the limit was below the noise floor.

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

### Horizontal – Peak Emissions Graph – 30 MHz to 300 MHz

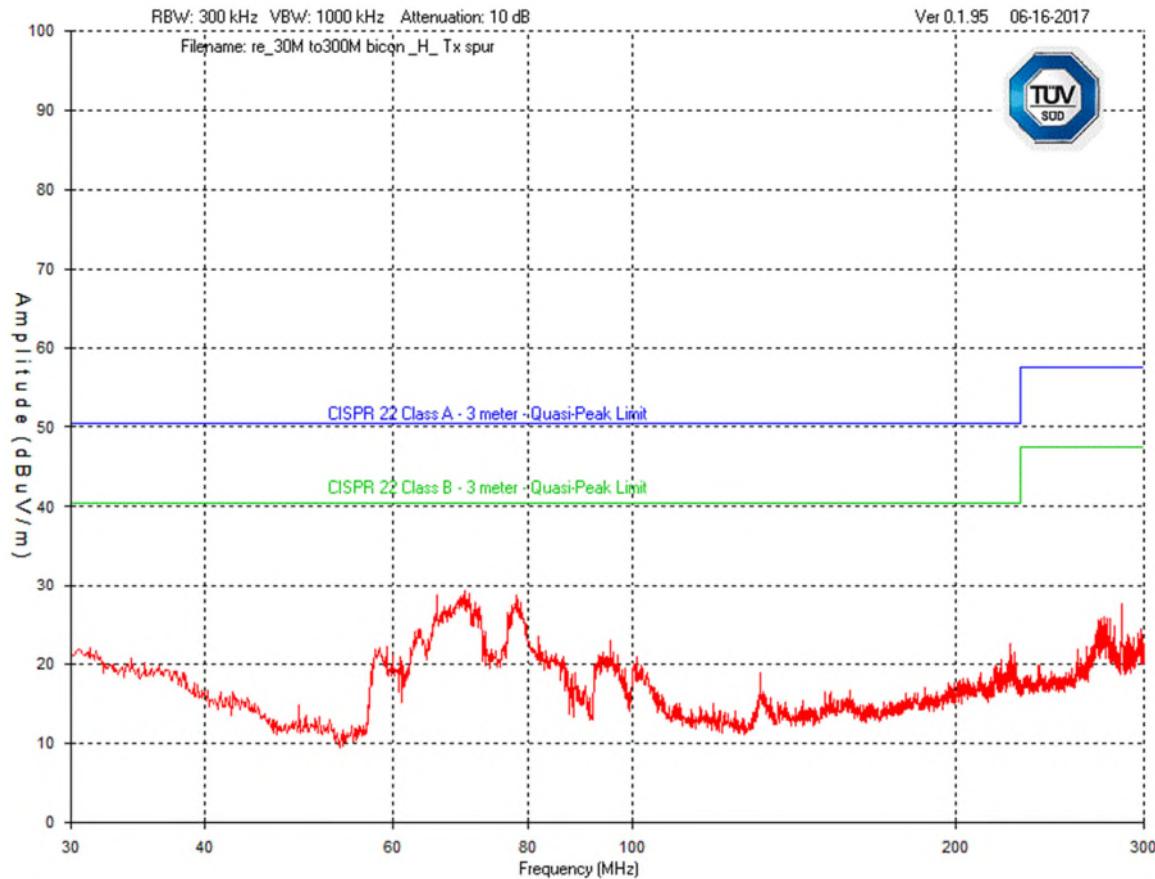


Note: CISPR 22 limits shown in preliminary peak reading above, final readings in table show FCC Limits.

Low, Mid and High scanned, worst case or representative shown above.

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

### Horizontal – Peak Emissions Graph – 300 MHz to 1 GHz

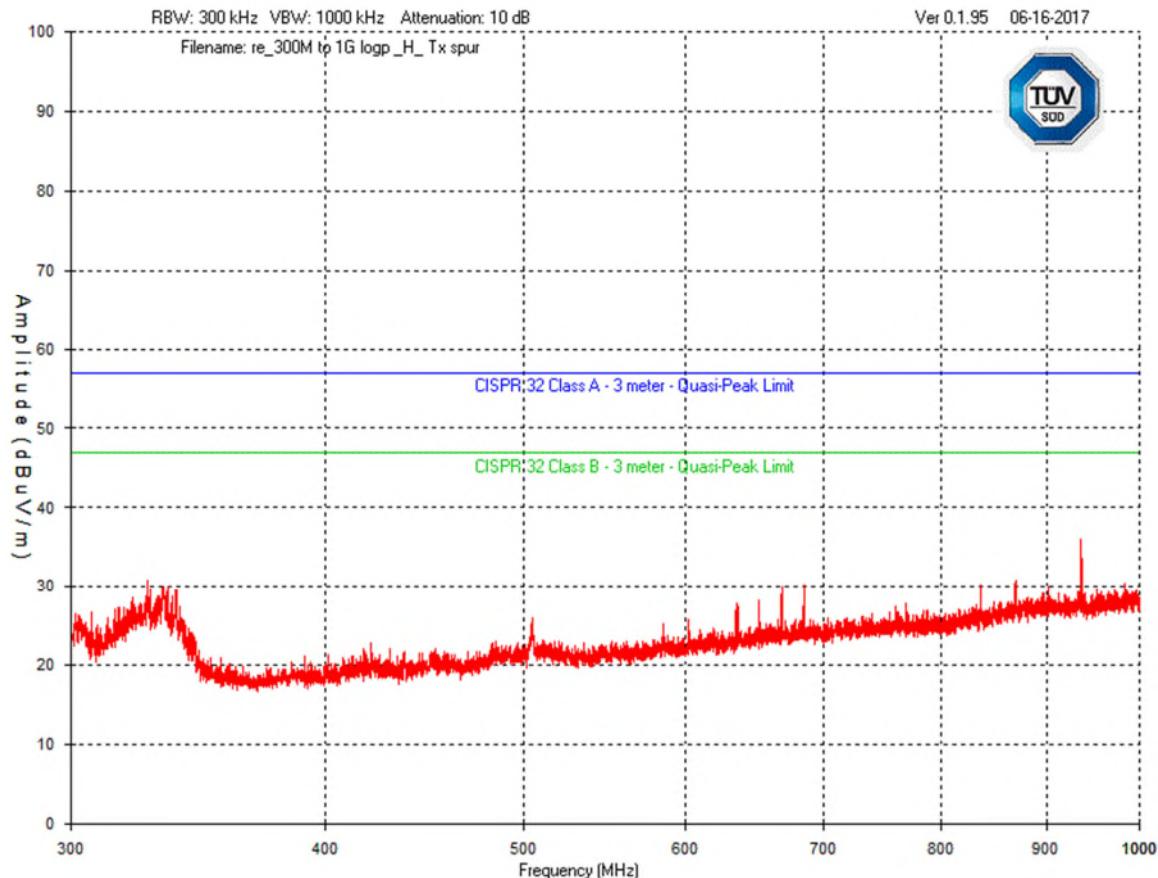


Note: CISPR 22 limits shown in preliminary peak reading above, final readings in table show FCC Limits.

Low, Mid and High scanned, worst case or representative shown above.


Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

### Horizontal – Peak Emissions Peak Graph – Above 1 GHz

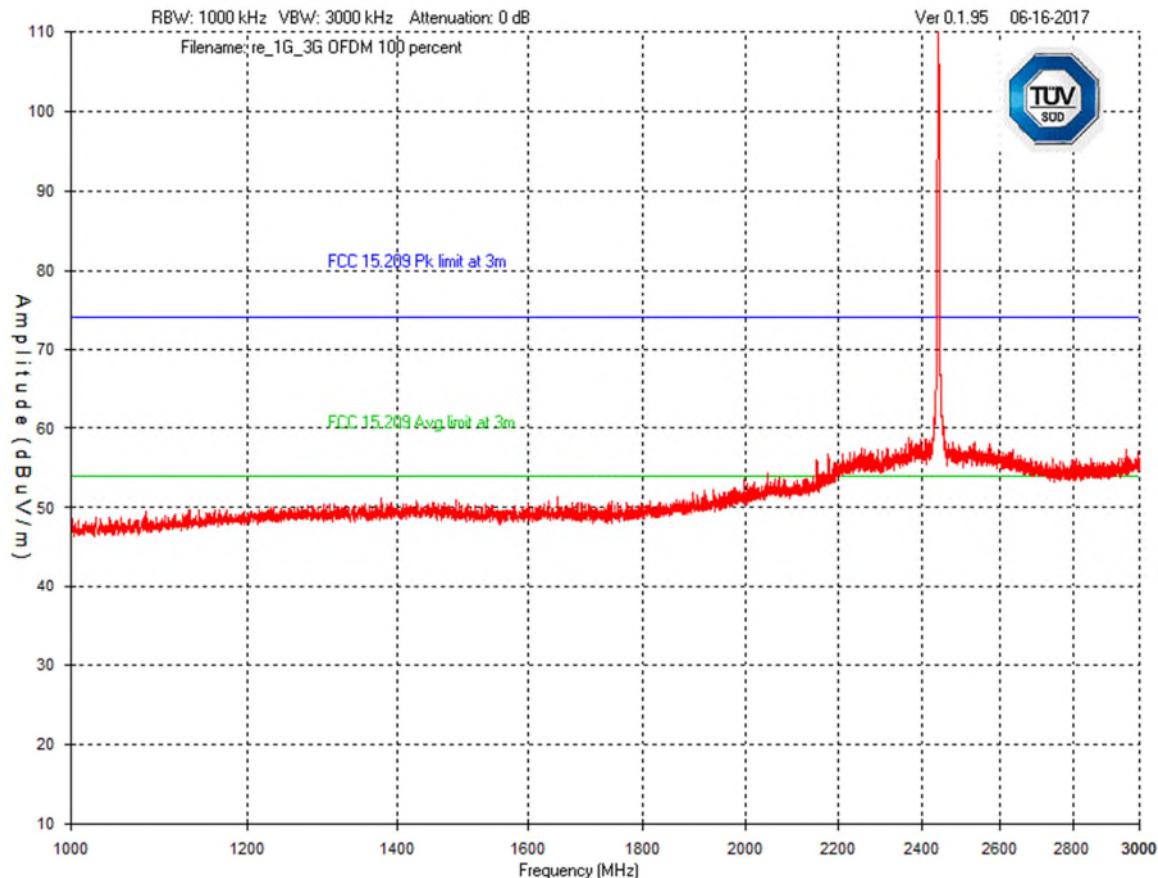


Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

### Horizontal – Peak Emissions Average Graph – Above 1 GHz

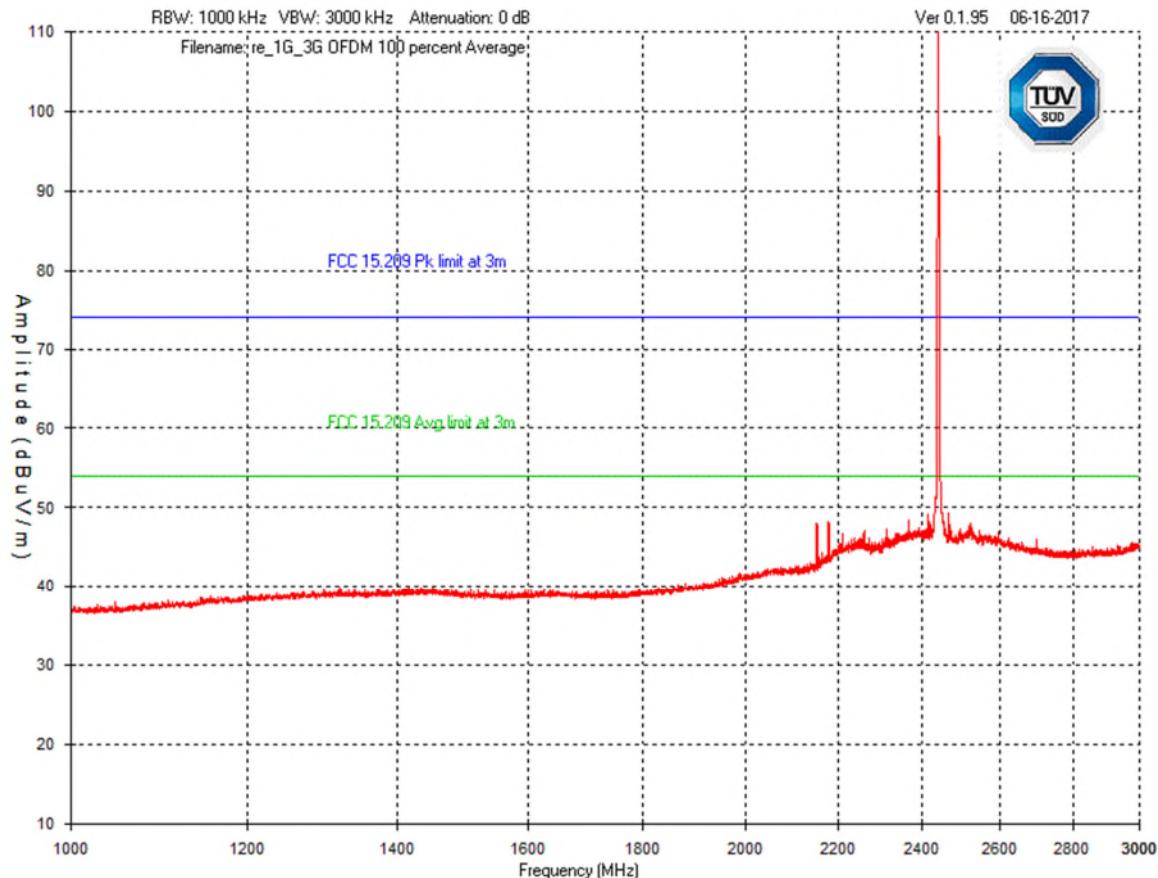

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

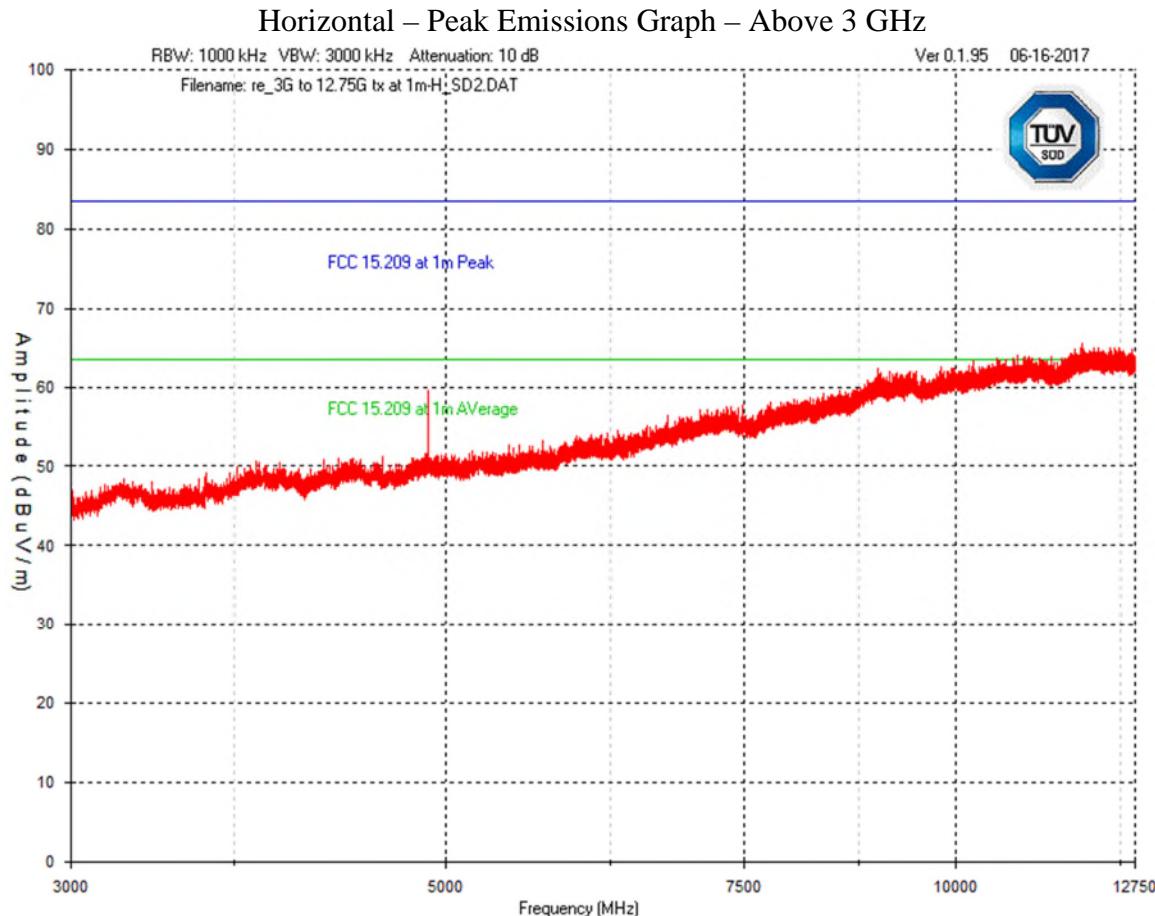

Note: Emissions were scanned to 25 GHz, and no emissions were detected above 12.75-GHz and the system noise floor did not exceed the average limit

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

## Final Measurements

Note: In accordance with 15.247(d), only frequencies exceeding the 15.209 limit that occur within the bands listed in 15.205, need to be verified with a final detector.

For information purposes, the fundamental was measured at 3 meters.

Peak readings were obtained using a resolution bandwidth of 1 MHz and video bandwidth of 3 MHz.

Harmonic emissions were measured at 1 m. Only the highest harmonic is recorded.

According to the operation description, the maximum duty cycle is 10%. Therefore, as per FCC 15.35(c), the relaxation factor allowance is calculated to be 20 dB.

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

Test Frequency (MHz)	Detection mode (Q-Peak)	Antenna polarity (Horz/Vert)	Raw signal dB(µV)	Antenna factor dB	Cable loss dB + Preselector	Attenuator dB	Pre-Amp Gain dB	Received signal dB(µV/m)	Emission limit dB(µV/m)	Margin dB(µV)	Result
Low Channel											
2405	Peak	Horz	93.9	30.6	5.2	10.0	33.0	106.7			PASS
2405	Peak	Vert	114.8	30.6	5.2	10.0	33.0	127.6			PASS
2390	Peak	Horz	43.0	30.6	5.2	10.0	33.0	55.8	74.0	18.2	PASS
2390	Avg	Horz	23.0	30.6	5.2	10.0	33.0	34.6	54.0	18.2	PASS
2390	Peak	Vert	55.1	30.6	5.2	10.0	33.0	67.9	74.0	6.1	PASS
2390	Avg	Vert	35.1	30.6	5.2	10.0	33.0	46.7	54.0	6.1	PASS
2400	Peak	Horz	47.2	30.6	5.2	10.0	33.0	60.0	74.0	14.0	PASS
2400	Avg	Horz	27.2	30.6	5.2	10.0	33.0	38.8	54.0	14.0	PASS
2400	Peak	Vert	59.6	30.6	5.2	10.0	33.0	72.4	74.0	1.6	PASS
2400	Peak	Vert	39.6	30.6	5.2	10.0	33.0	52.4	54.0	1.6	PASS
Mid channel											
2445	Peak	Horz	94.2	30.6	5.2	10.0	33.0	107.0			PASS
2445	Avg	Horz	73.0	30.6	5.2	10.0	33.0	85.8			PASS
2445	Peak	Vert	115.3	30.6	5.2	10.0	33.0	128.1			PASS
2445	Avg	Vert	94.1	30.6	5.2	10.0	33.0	106.9			PASS
High channel 25											
2475	Peak	Horz	92.5	30.6	5.2	10.0	33.0	105.3			PASS
2475	Peak	Vert	104.9	30.6	5.2	20.0	33.0	127.7			PASS
2483.5	Peak	Horz	34.5	30.6	5.2	20.0	33.0	57.3	74.0	16.7	PASS
2483.5	Avg	Horz	14.5	30.6	5.2	20.0	33.0	36.1	54.0	16.7	PASS
2483.5	Peak	Vert	46.6	30.6	5.2	20.0	33.0	69.4	74.0	4.6	PASS
2483.5	Avg	Vert	26.6	30.6	5.2	20.0	33.0	48.2	54.0	4.6	PASS
2485.5	Peak	Vert	48.6	30.6	5.2	20.0	33.0	71.4	74.0	2.6	PASS
2485.5	Avg	Vert	28.6	30.6	5.2	20.0	33.0	50.2	54.0	2.6	PASS

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

## Test Equipment List

Equipment	Model No.	Manufacturer	Last Calibration Date	Next Calibration Date	Asset #
Spectrum Analyzer	ESU-40	Rohde & Schwarz	1/28/16	1/28/2018	4092
Horn Antenna 2 – 18 GHz	WBH218HN	Q-par	Feb 12, 2016	Feb 12, 2018	GEMC 6375
Pre-Amp 1 – 26.5 GHz	HP 8449B	HP	Oct 12, 2016	Oct 12, 2018	GEMC 6351
Horn Antenna 18 – 26.5 GHz	SAS-572	A.H. Systems	Oct 11, 2016	Oct 11, 2018	GEMC 6371
Loop Antenna	EM 6871	Electro-Metrics	Feb 13, 2017	Feb 13, 2019	GEMC 70
Loop Antenna	EM 6872	Electro-Metrics	Feb 13, 2017	Feb 13, 2019	GEMC 71
BiLog Antenna	3142-C	ETS	Oct 5, 2016	Oct 5, 2018	GEMC 8
2.4GHz-2.5GHz Notch Filter	BRM50702	Micro-Tronics	July 11, 2016	July 11, 2018	GEMC 230
RF Cable 7m	LMR-400-7M-50Ω-MN-MN	LexTec	Feb 1, 2017	Feb 1, 2018	GEMC 4025
RF Cable 10m	LMR-400-10M-50Ω-MN-MN	LexTec	Feb 1, 2017	Feb 1, 2018	GEMC 4026
RF Cable 0.5m	LMR-400-0.5M-50Ω-MN-MN	LexTec	Feb 1, 2017	Feb 1, 2018	GEMC 4029
Emissions Software	0.1.94	Global EMC	NCR	NCR	GEMC 58

1: For cables pre-amp and attenuators, verification dates apply.

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

## ***6dB Bandwidth of Digitally Modulated Systems***

### **Purpose**

The purpose of this test is to ensure that the bandwidth occupied exceeds a stated minimum. This helps ensure the utilization of the frequency allocation is sufficiently wide. This also helps prevent corruption of data by ensuring adequate data separation to distinguish the reception of the intended information.

### **Limits**

The Limit is as specified in FCC Part 15 and RSS 247.

Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### **Method**

The DTS bandwidth method is as per FCC KDB 558074 Section 8.1 for the 6 dB BW. For the 20 dB BW, FCC KDB 558074, Section 2.0 references ANSI C63.10 for occupied bandwidth. ANSI C63.10 Section 6.9.1 was used for occupied bandwidth.

### **Results**

The EUT passed. The minimum 6 dB BW measured was 538.9 kHz. For information purposes, the 99% occupied BW was measured to be 558.9 kHz


Client	Trilliant Networks Canada Inc.
Product	Open Smart Device Interface (OSDI) SecureMesh Module
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15




## Graph(s)

The graphs shown below shows the channel spacing during the operation of the device. This is measured by a max hold on the spectrum analyzer and the highest resolution bandwidth that is sufficiently low to exhibit the 6 dB bandwidth of a channel during operation of the EUT. This measurement is a peak measurement. Max hold is performed for a duration of not less than 1 minute.


Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

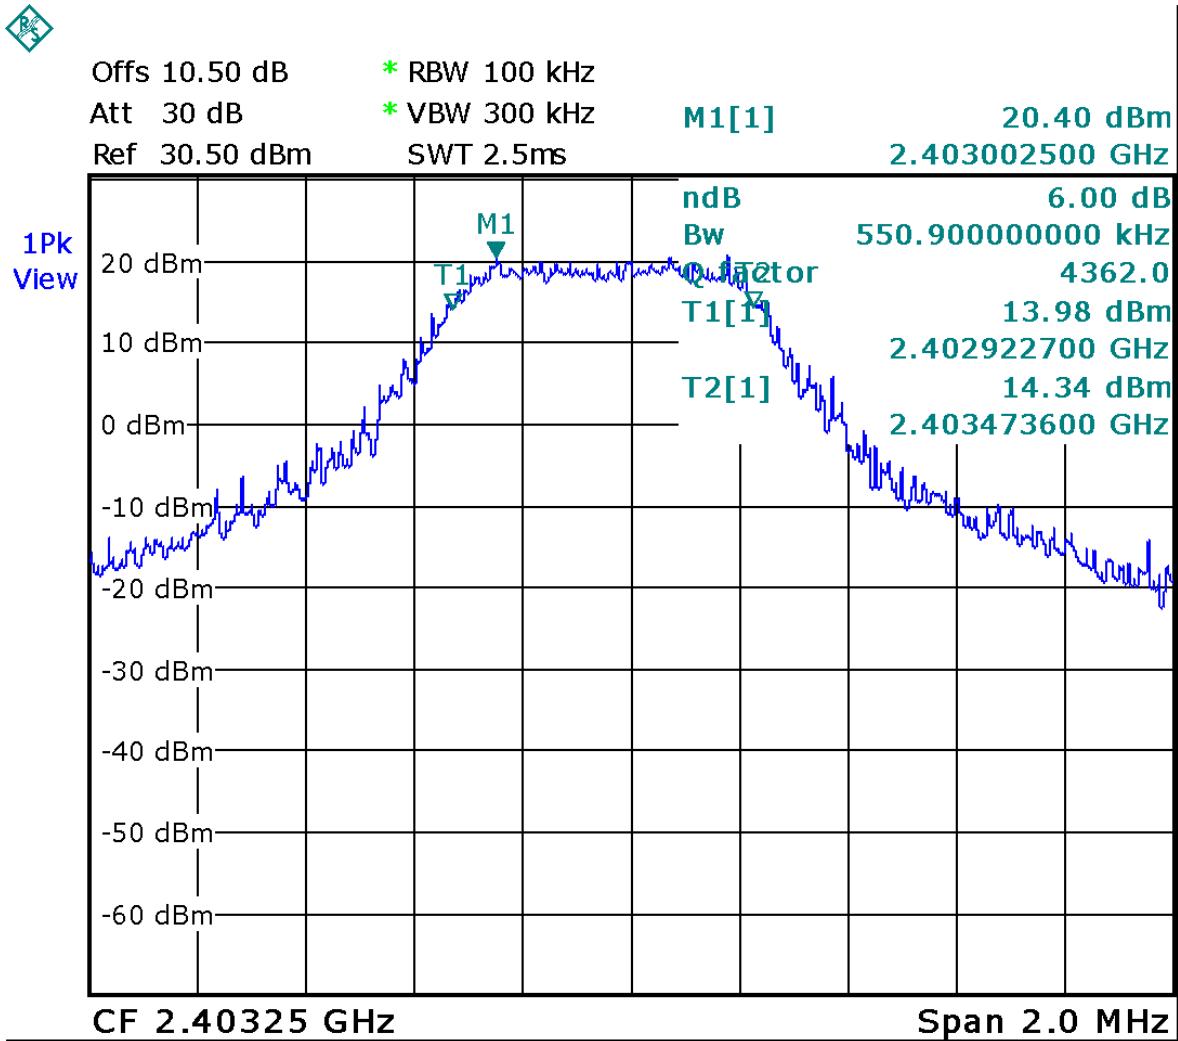

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

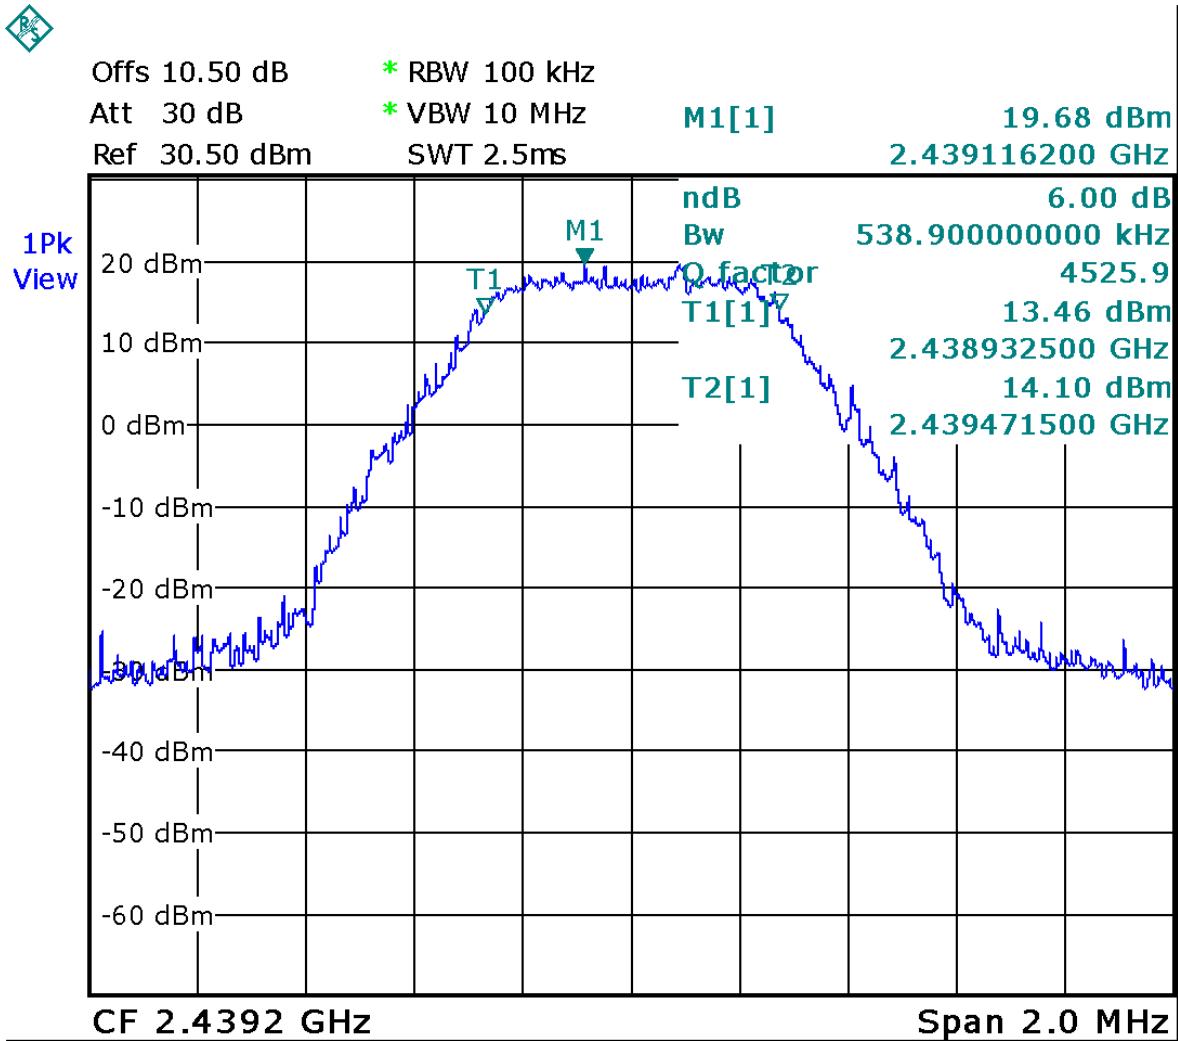

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

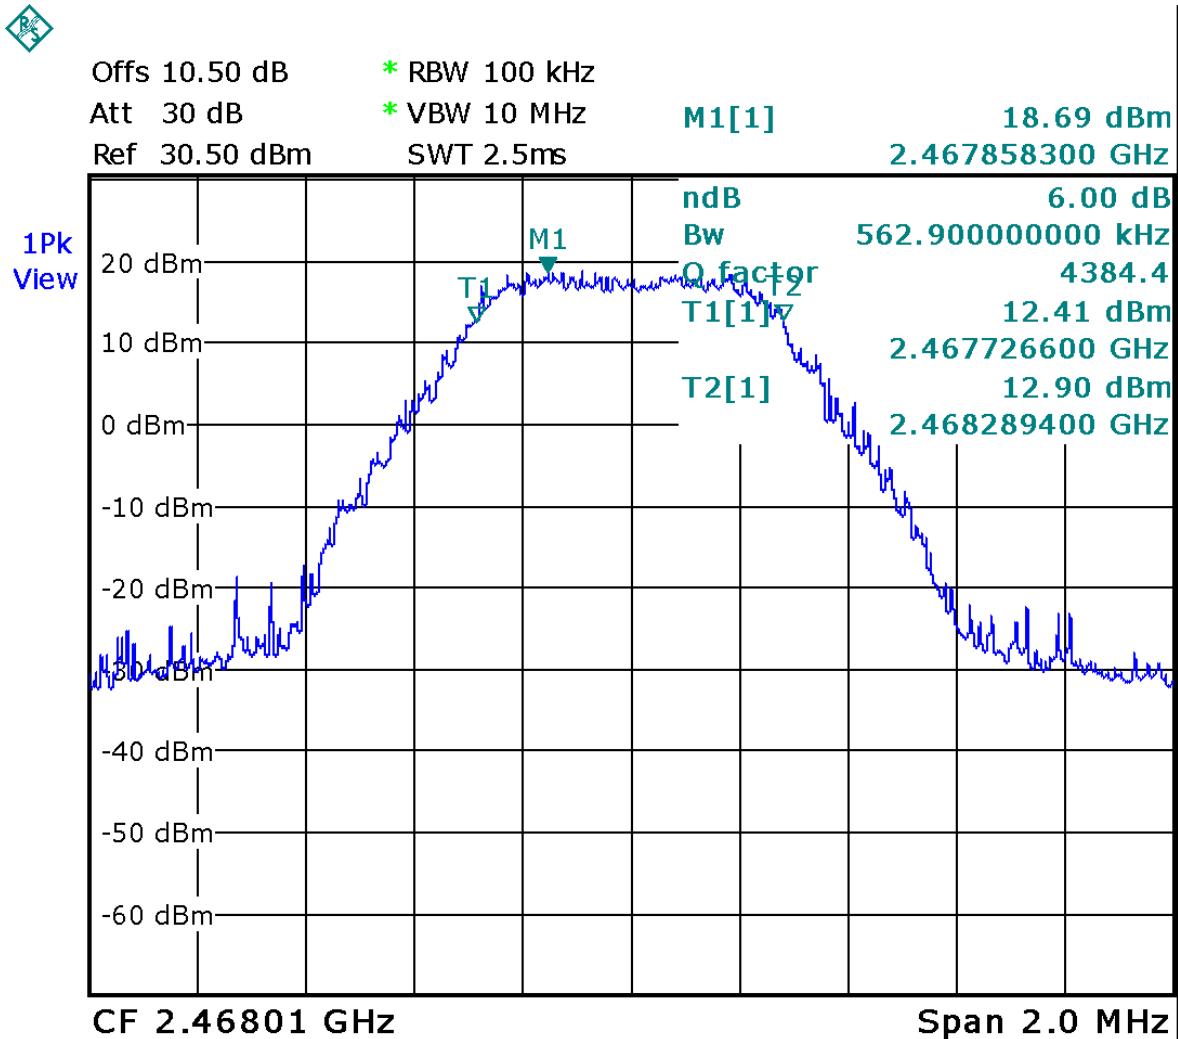


6 dB BW Low = 550.9 kHz


6 dB BW Mid = 538.9 kHz

6 dB BW High = 562.9 kHz


Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

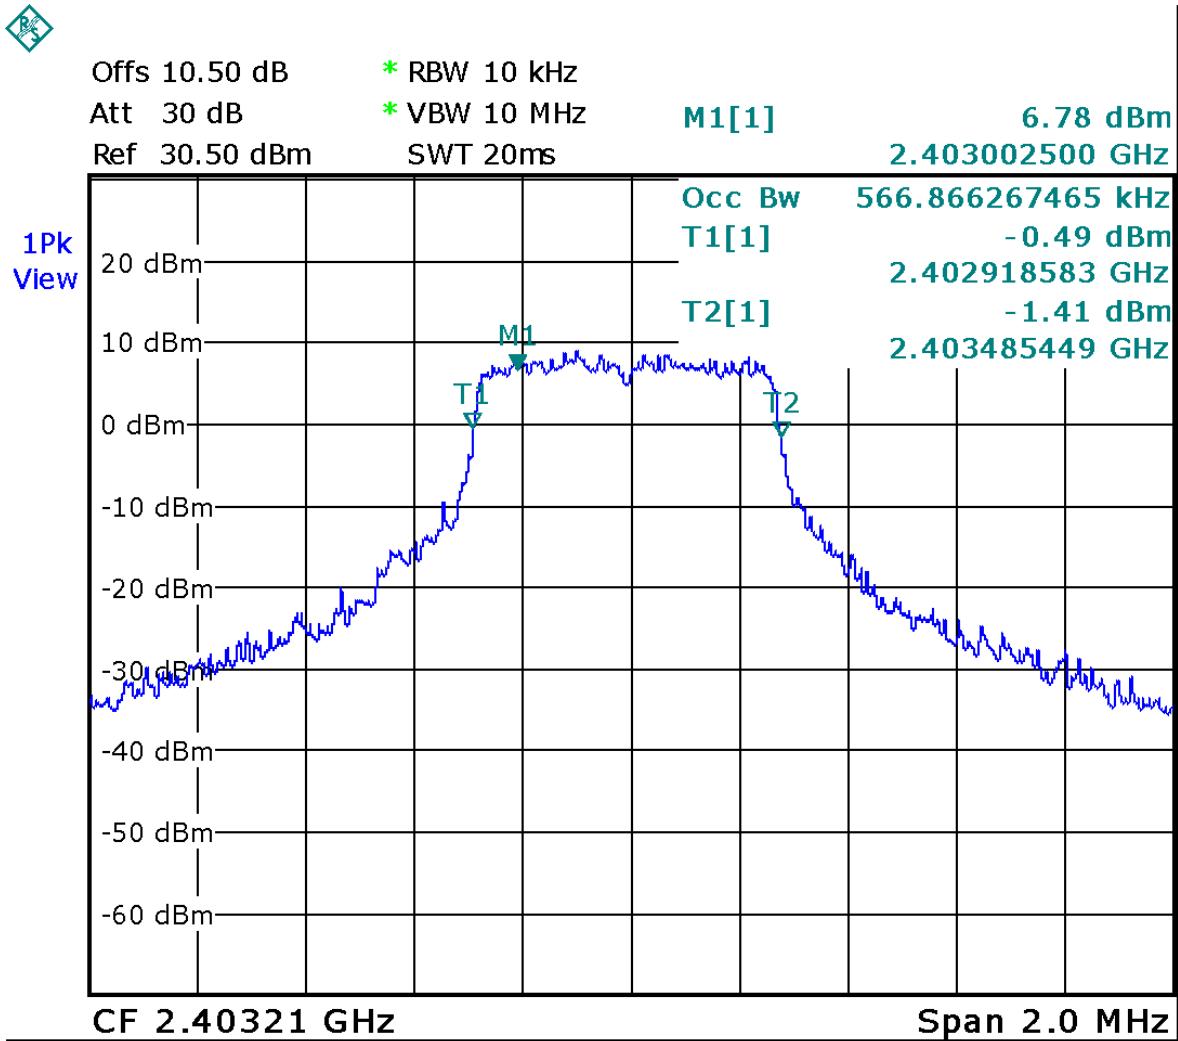

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

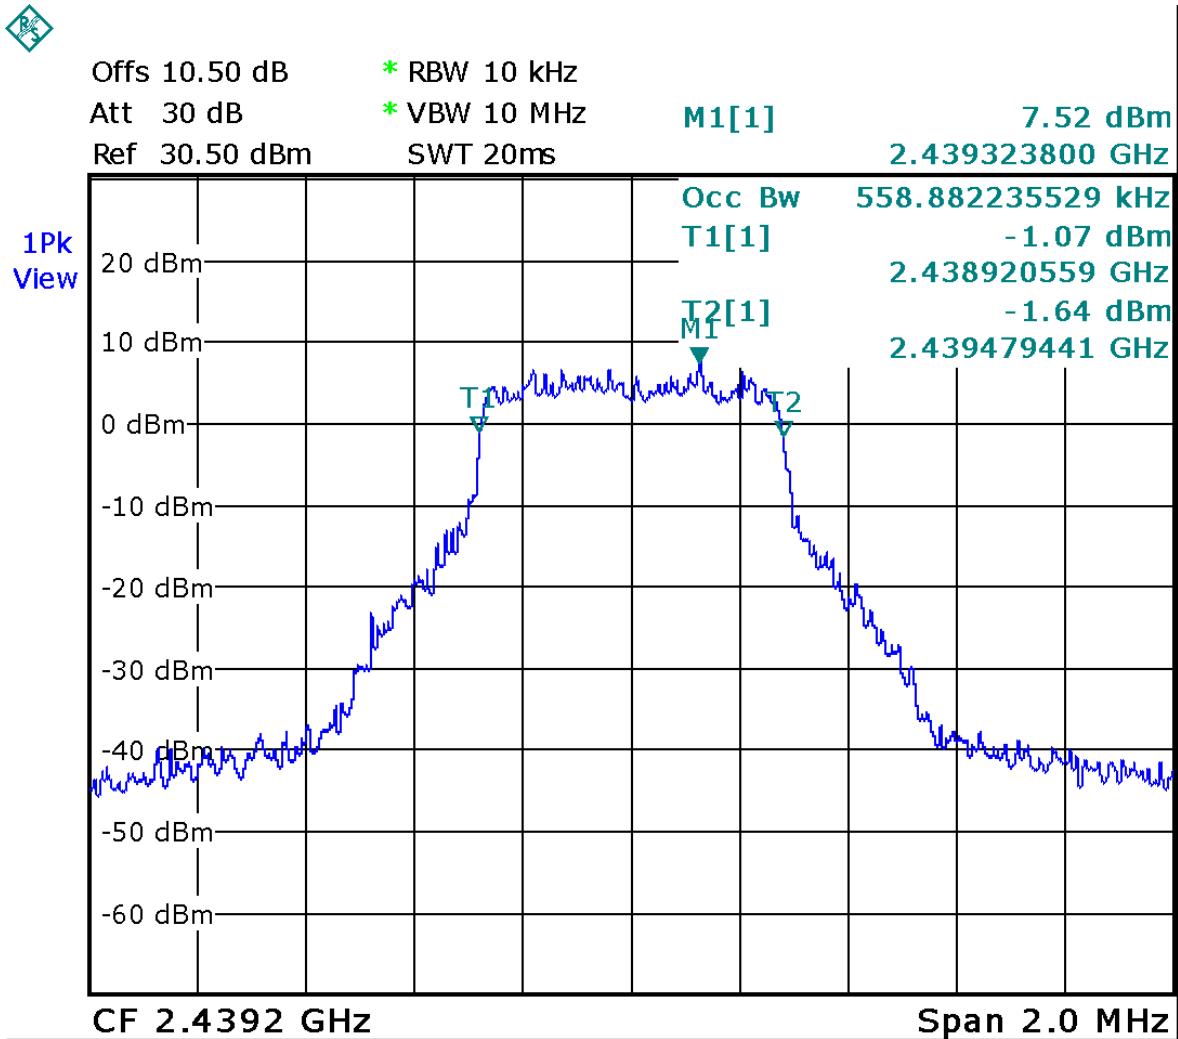

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

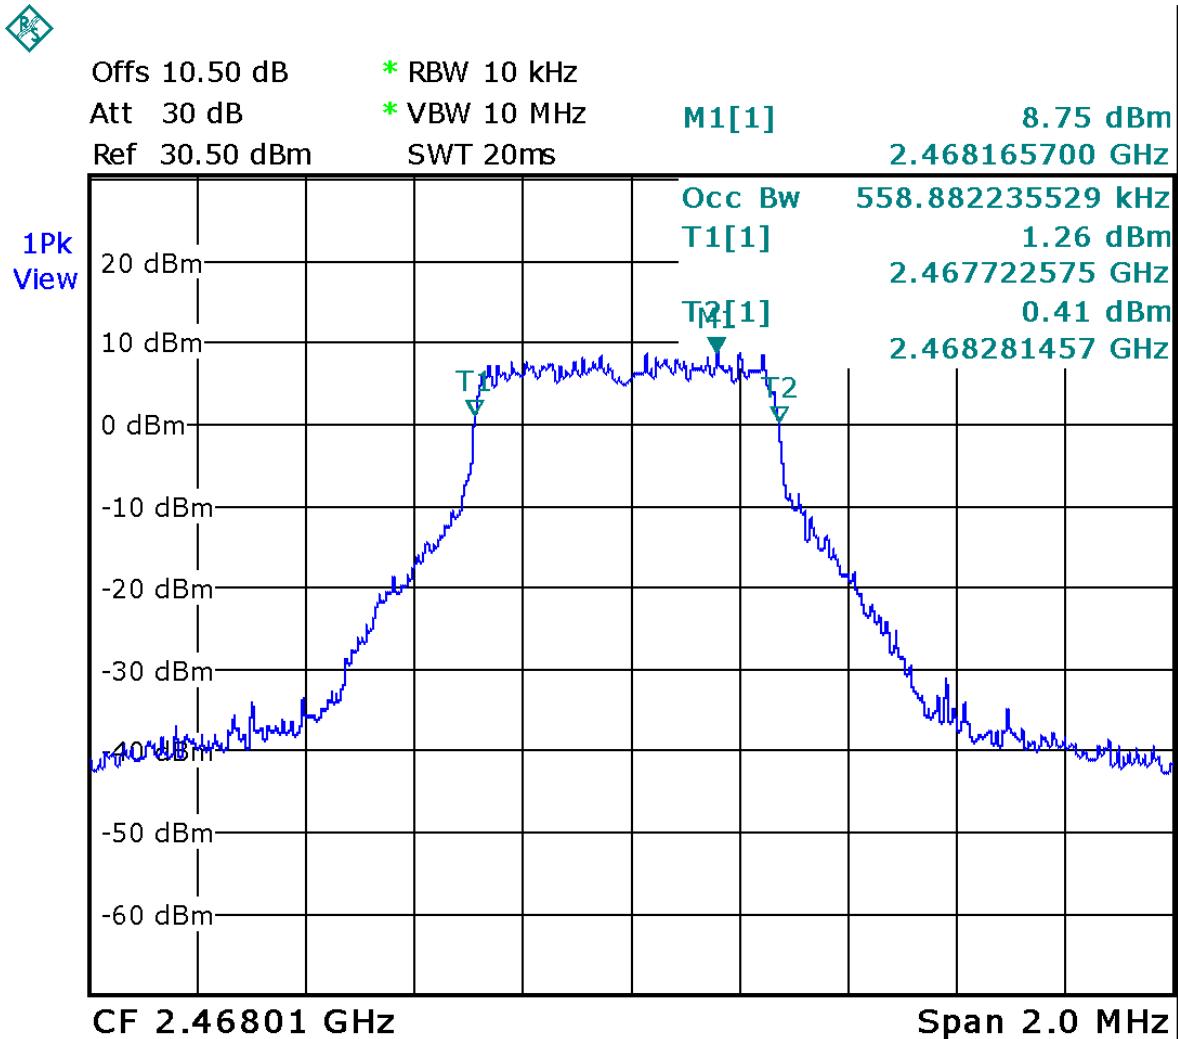

Occupied BW Low = 566.9 kHz  
 Occupied BW Mid = 558.9 kHz  
 Occupied BW High = 558.9 kHz

Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up.

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

## Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
Attenuator 20 dB	FP-50-20	Trilithic	1-28-16	1-28-18	4038
Spectrum Analyzer	FSL6	Rohde & Schwarz	Jan 8, 2016	Jan 8, 2018	4095

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B\_Rev1"

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

## ***Maximum conducted output power***

### **Purpose**

The purpose of this test is to ensure that the maximum power conducted to the radiating element does not exceed the limits specified. This ensures that if the end-user replaces the antenna, that the maximum power does not exceed an amount which may create an excessive power level.

### **Limits**

The limits are defined in FCC Part 15.247(b) and RSS 247.

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands, the peak limit is 1 watt.

### **Method**

Method was as per ANSI C63.10.

### **Results**

The EUT passed. The maximum conducted (peak) output power measured was 29.63 dBm (918.3 mW).

This meets the requirement of being less than 30 dBm.

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

## Table(s)


The tables shown below shows the Maximum conducted (peak) output power output of the device during the antenna conducted measurement during transmit operation of the EUT (OFDM)

Band	Channel	Frequency (GHz)	Maximum conducted (peak) output power (dBm)
Low	3	2.403	29.6
Medium	48	2.439	29.2
High	96*	2.478	29.2

Note (\*): Although 96 was used to show compliance with peak power channel 84 is the maximum channel used for other reasons.

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

### Low Channel – Maximum conducted peak output power

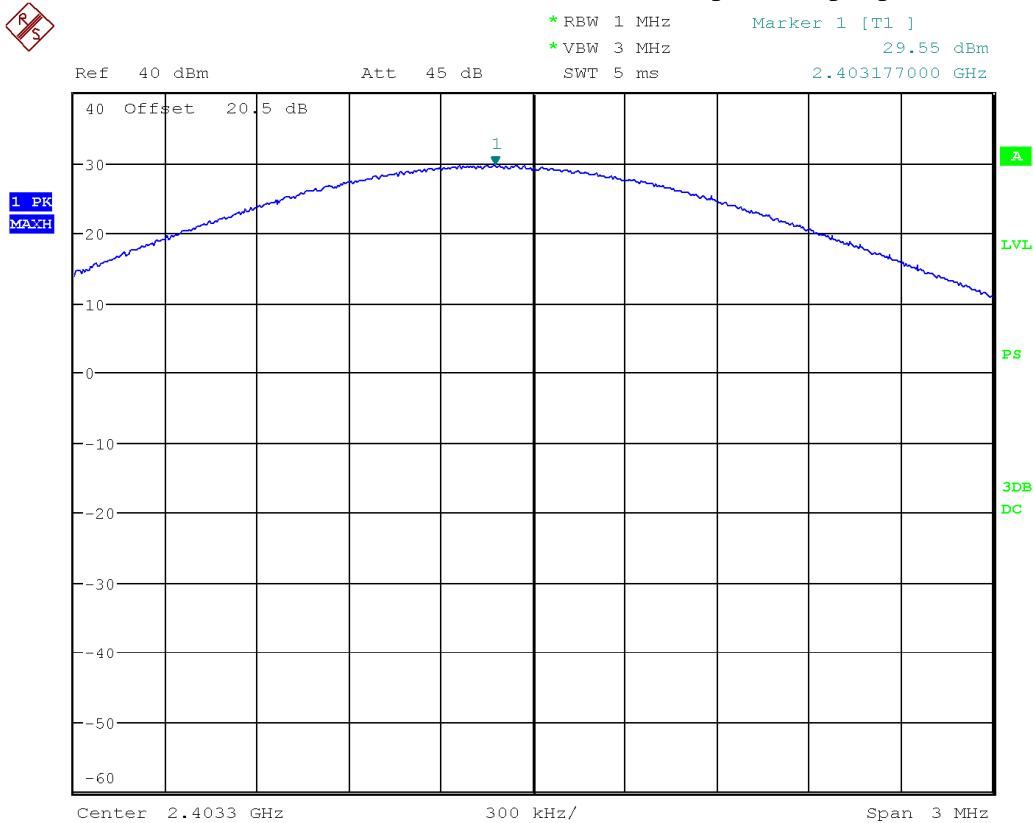


Date: 4.MAY.2017 16:48:21

Note: 20 dB external attenuator and 0.5 dB cable loss.

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	


### Mid Channel – Maximum conducted peak output power

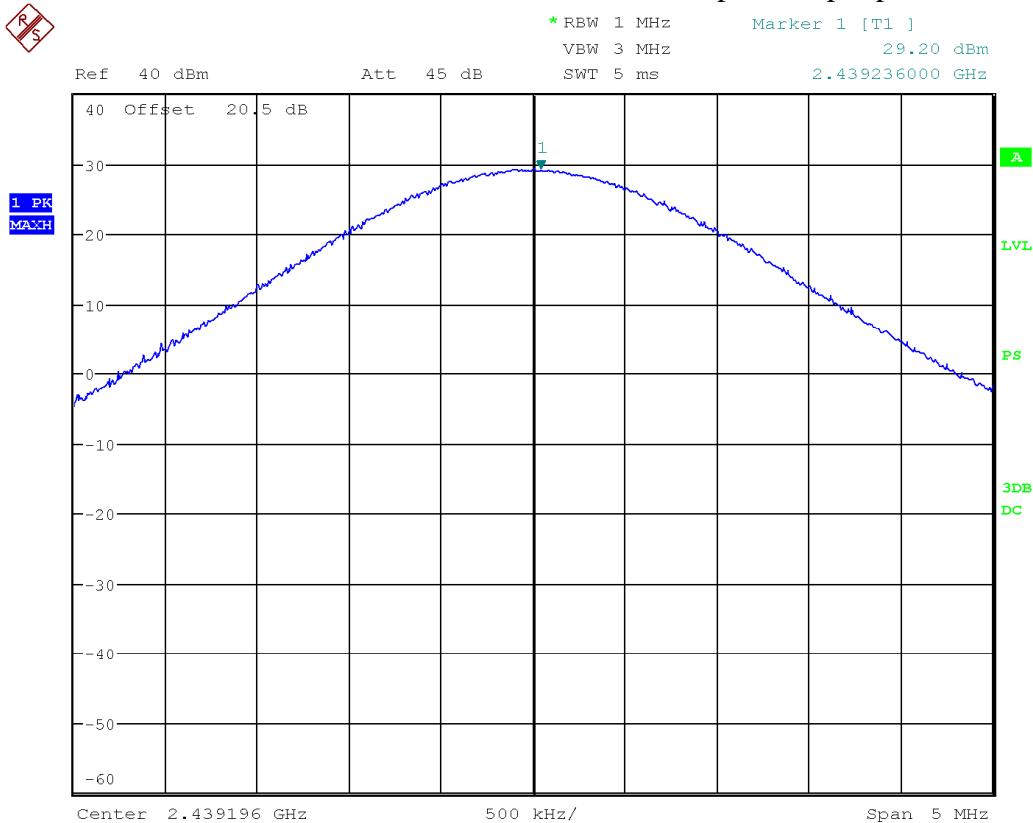

Date: 4.MAY.2017 18:32:31

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

### High Channel – Maximum conducted peak output power.

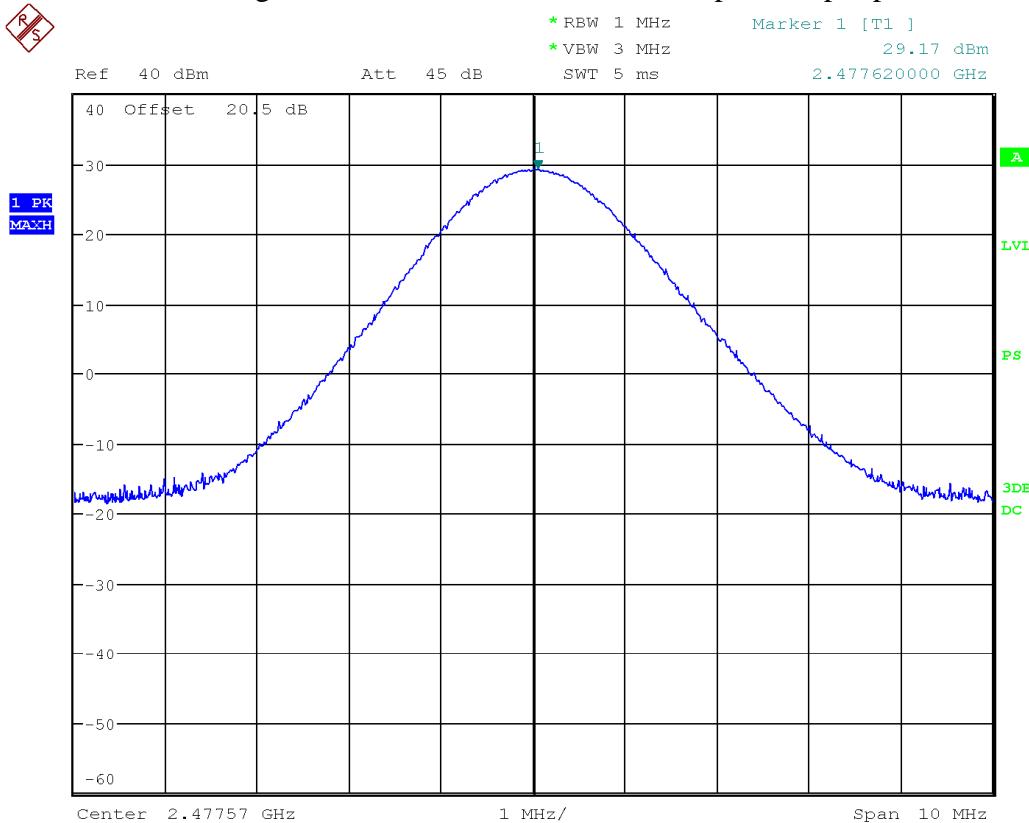

Date: 4.MAY.2017 16:58:08

Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up.

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

## Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
Attenuator 20 dB	FP-50-20	Trilithic	1-28-16	1-28-18	4038
Spectrum Analyzer	FSL6	Rohde & Schwarz	Jan 8, 2016	Jan 8, 2018	4095

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B\_Rev1"

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

## ***Spurious Conducted Emissions***

### **Purpose**

The purpose of this test is to ensure that the maximum power conducted to the radiating element at frequencies outside of the authorized spectrum does not exceed the limits specified. This ensures that the only the intended signal is delivered to the radiating element.

### **Limits**

The limits are defined in 15.247(d). As peak power was used, in any 100 kHz band, the peak spurious harmonics emissions must be at least 20 dB below the fundamental. Spurious Conducted emissions are to be evaluated up to the 10<sup>th</sup> harmonic. This -20 dBc requirement also applies at the 'band edge' or 2.4 GHz and 2.4835 GHz.

### **Method**

Method was as per ANSI C 63.10.


### **Results**

The EUT pass. Low, middle and high band was measured. The worst case for each mode is presented as a graph for the spectrum. The -20 dBc requirement is shown for the lower band edge at 2.4 GHz in the low band. The -20 dBc requirement is also shown for the higher band edge at 2.4835 GHz in the high band.


Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

## Graph(s)


The graphs shown below shows the peak power output of the device during the antenna conducted measurement during transmit operation of the EUT. Note there was 10 dB of external attenuation taken during this measurement.

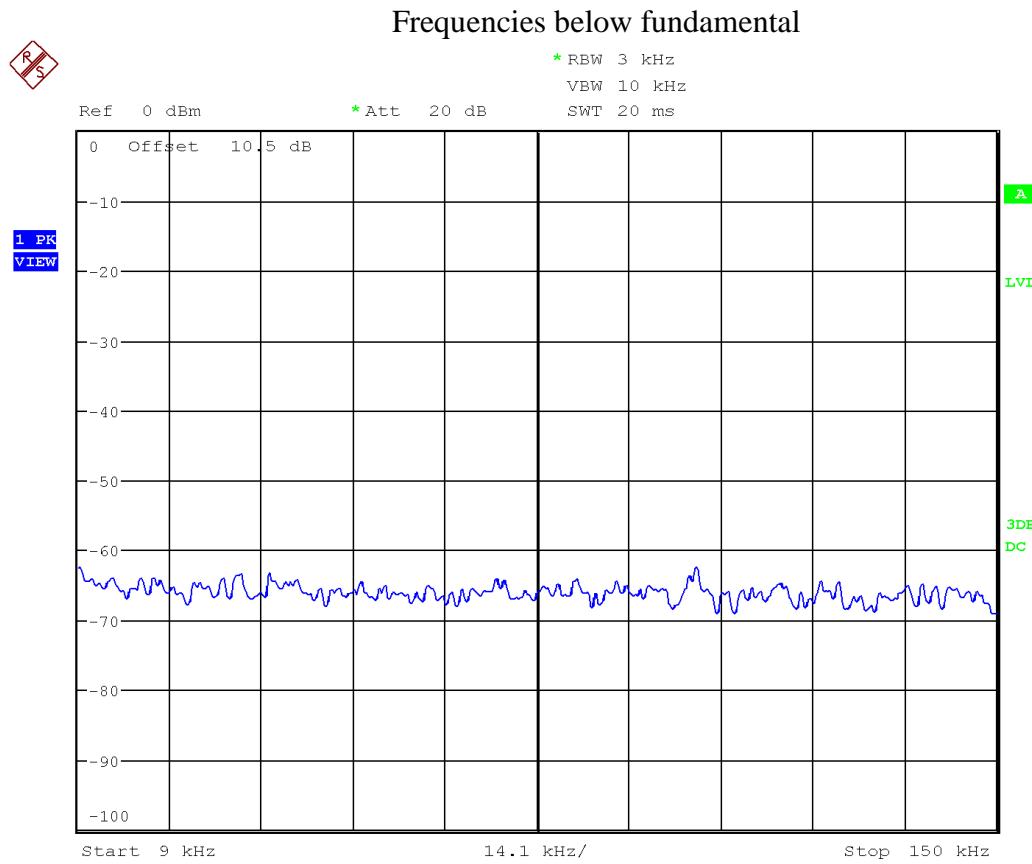

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

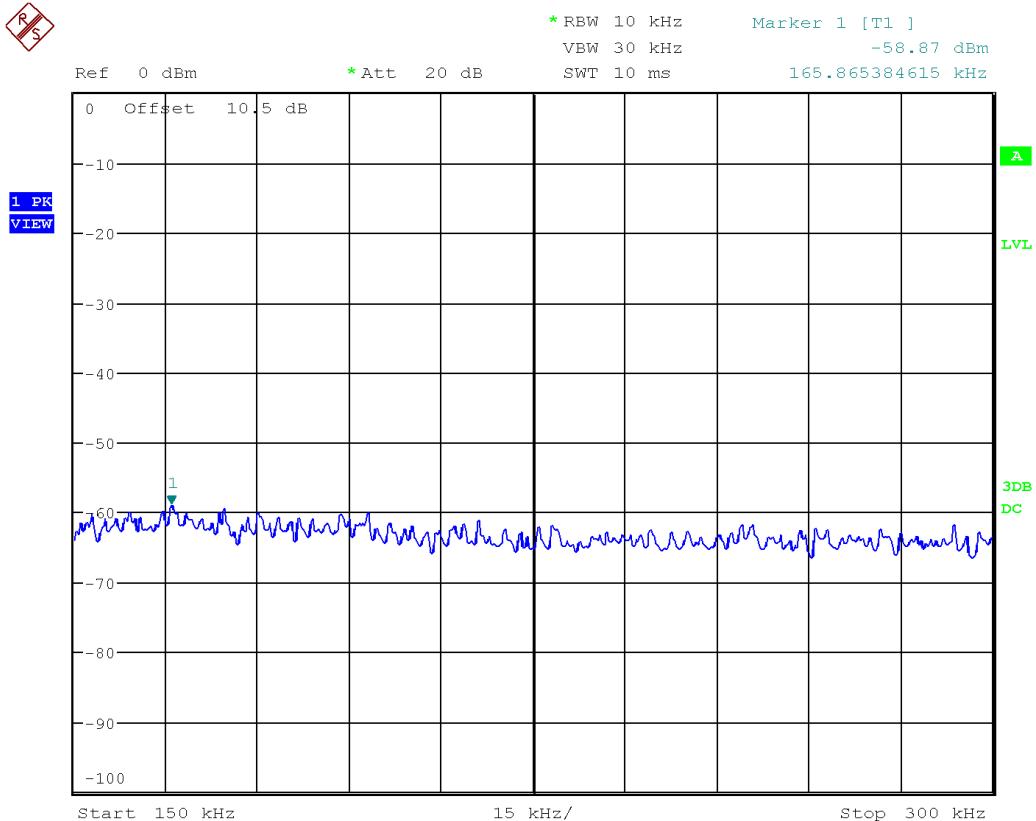


Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

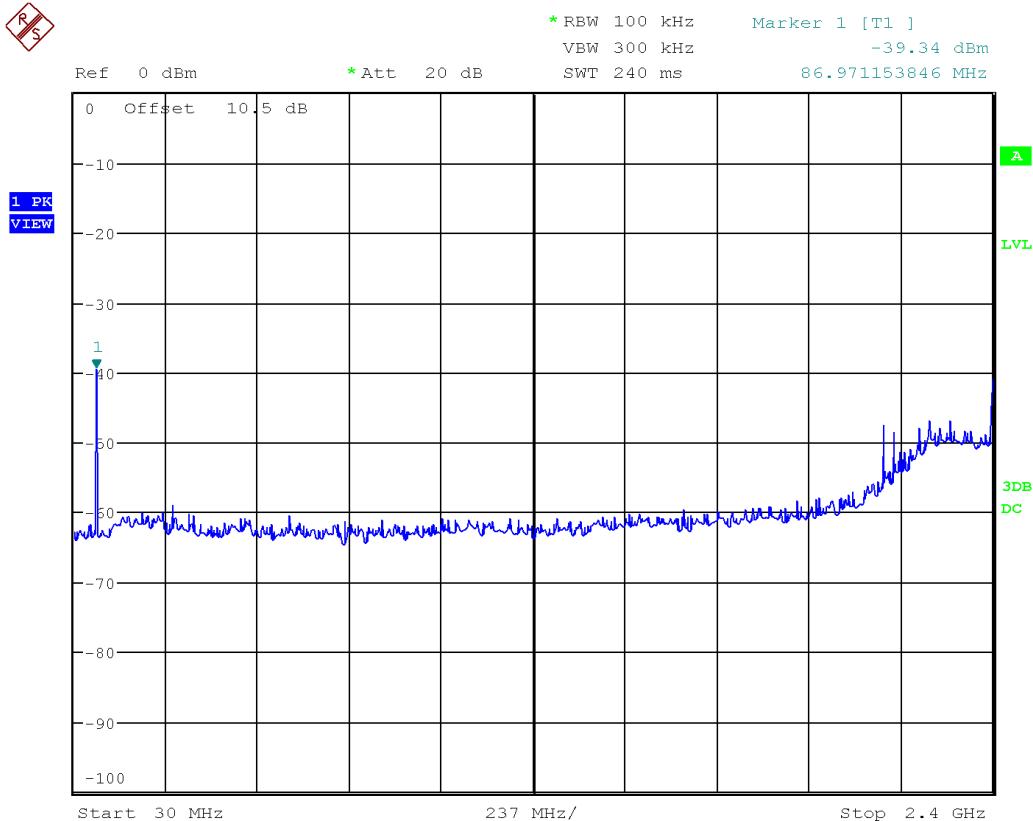

Note: Emissions shown at 87 MHz was approximately 60 dBc, which meets the 20 dBc requirement.


Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

Worst case shown with low channel setting.

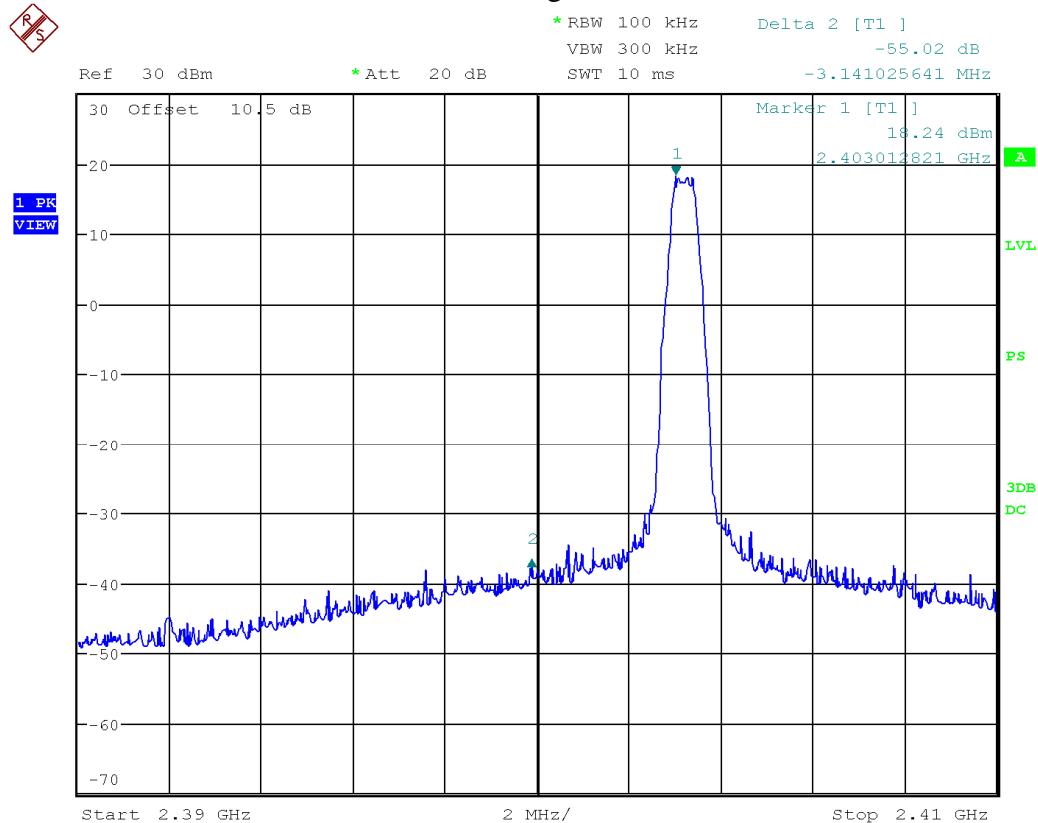

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

RS

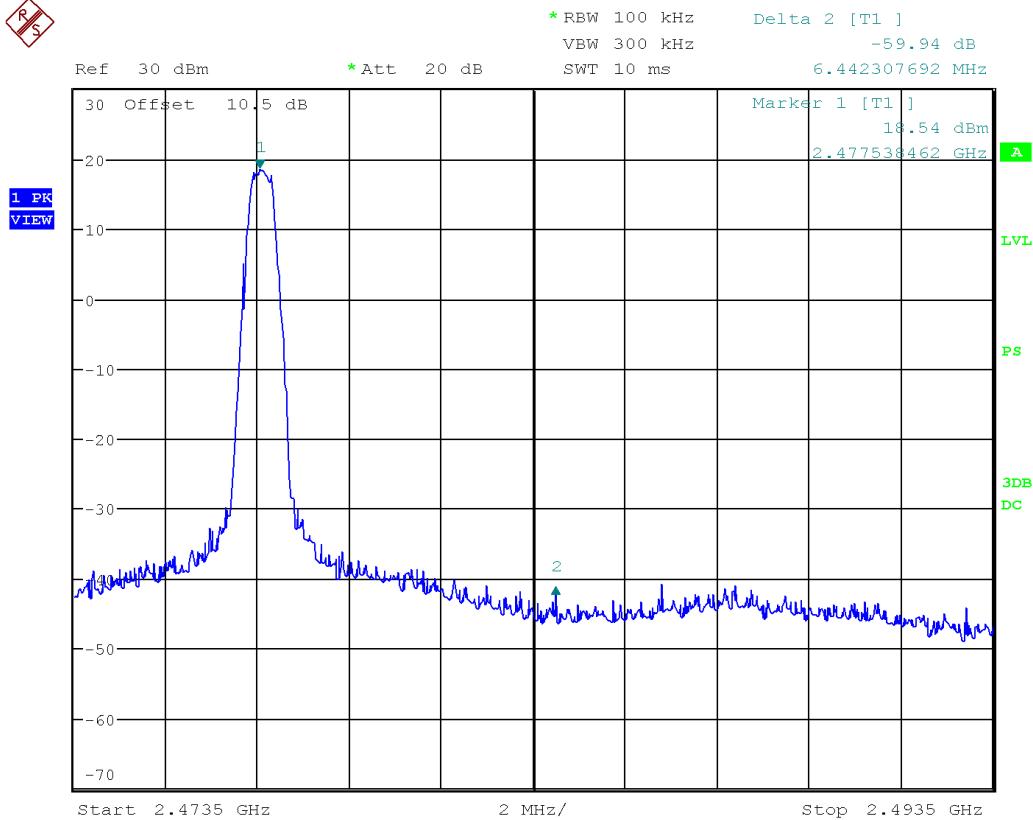


Worst case high channel shown above.

Client	Trilliant Networks Canada Inc.
Product	Open Smart Device Interface (OSDI) SecureMesh Module
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15



Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

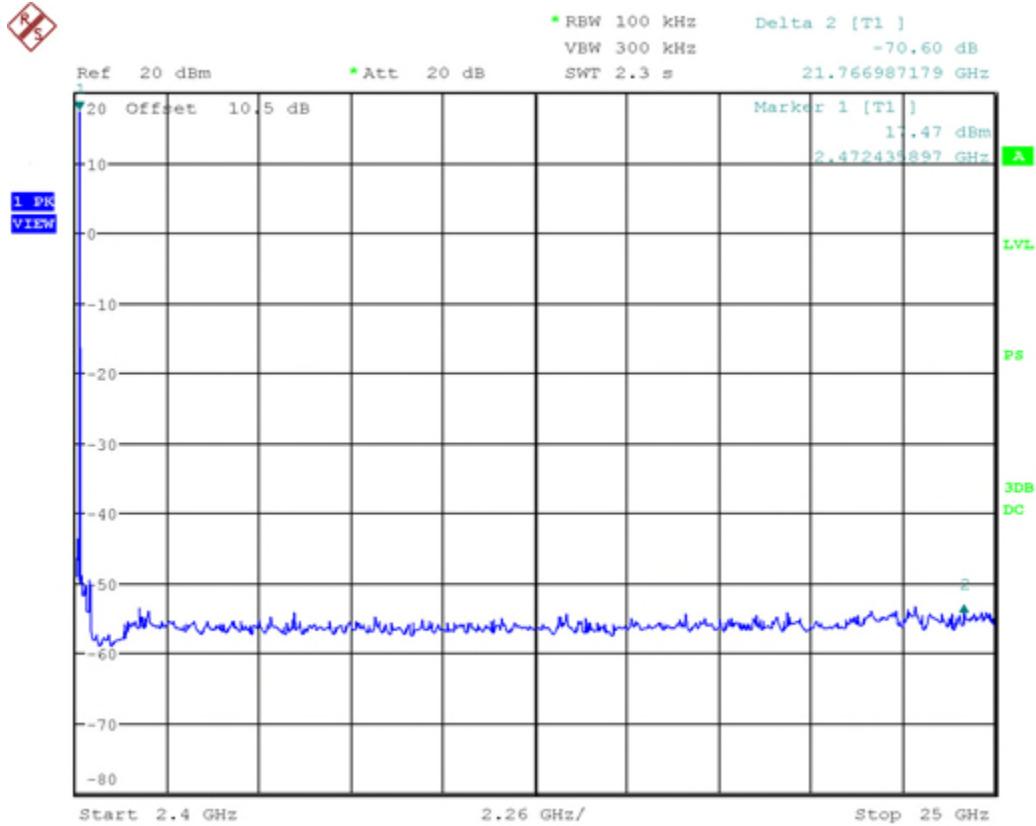

Note: The applicable relative limit would be -2 dBm in any 100 kHz band, no emissions were detected and the noise floor was below -22 dBm in any 100 kHz band.

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

## Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset#
Spectrum Analyzer	ESU-40	Rohde & Schwarz	1/28/16	1/28/2018	4092
LISN	FCC-LISN-50/250-16-2-01	FCC	Feb. 1, 2017	Feb. 1, 2019	GEMC 65
RF Cable 7m	LMR-400-7M-50Ω-MN-MN	LexTec	Feb 1, 2017	Feb 1, 2018	GEMC 4025
RF Cable 10m	LMR-400-10M-50Ω-MN-MN	LexTec	Feb 1, 2017	Feb 1, 2018	GEMC 4026
Emissions Software	0.1.94	Global EMC	NCR	NCR	GEMC 58

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

## ***Power Spectral Density - DM***

### **Purpose**

The purpose of this test is to ensure that the maximum power spectral density to the radiating element does not exceed the limits specified. This ensures that the modulation is significantly wide enough, or low enough in power that it will allow for co-operation of other wireless devices operating within this frequency allocation.

### **Limits**

The limits are defined in 15.247(e).

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### **Method**

Method was as per ANSI C63.10

### **Results**

The EUT passed. Each mode was tested at low, medium, and high band. The worst case value is 5.95 dBm as measured with a 3 kHz resolution bandwidth (maximum peak conducted PSD power).


Band	Channel	Frequency (GHz)	PSD
Low	3	2.403	7.18
Medium	48	2.439	7.14
High	96	2.478	7.54

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

## Graph(s)


The graphs shown below show the power spectral density of the device during the conducted measurement operation of the EUT. Low, middle, and high channel was investigated in each mode, with the worst case being presented.

Low channel

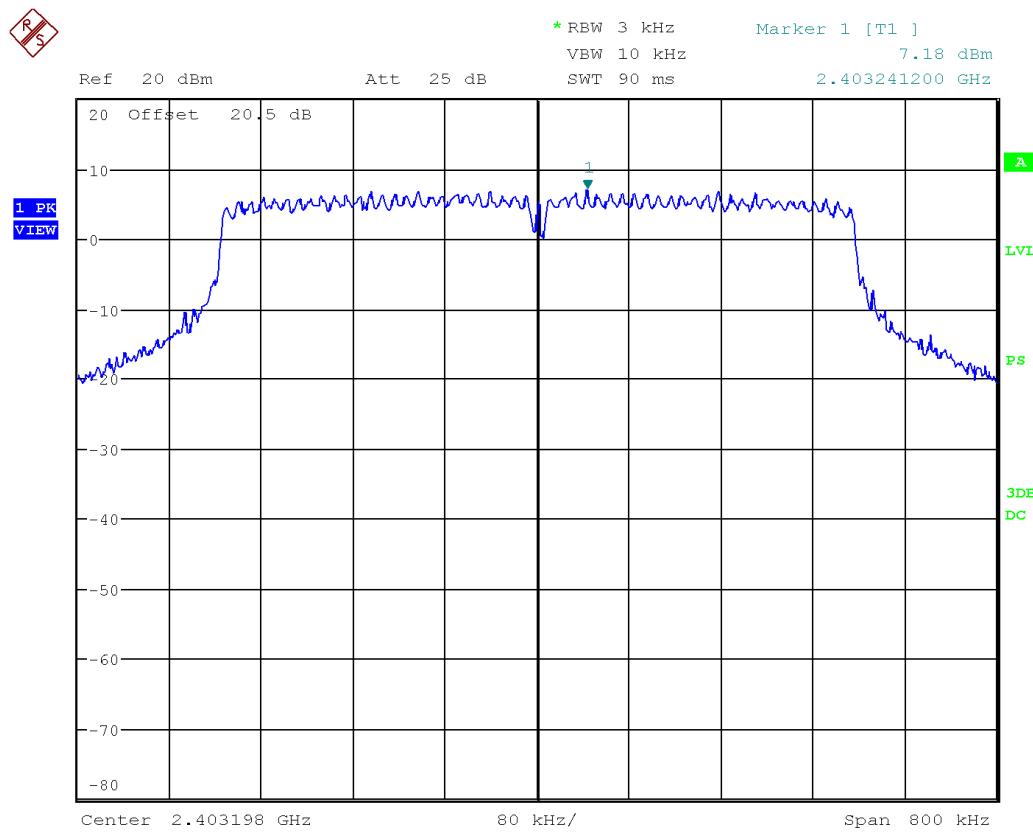


Date: 4.MAY.2017 18:38:17

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

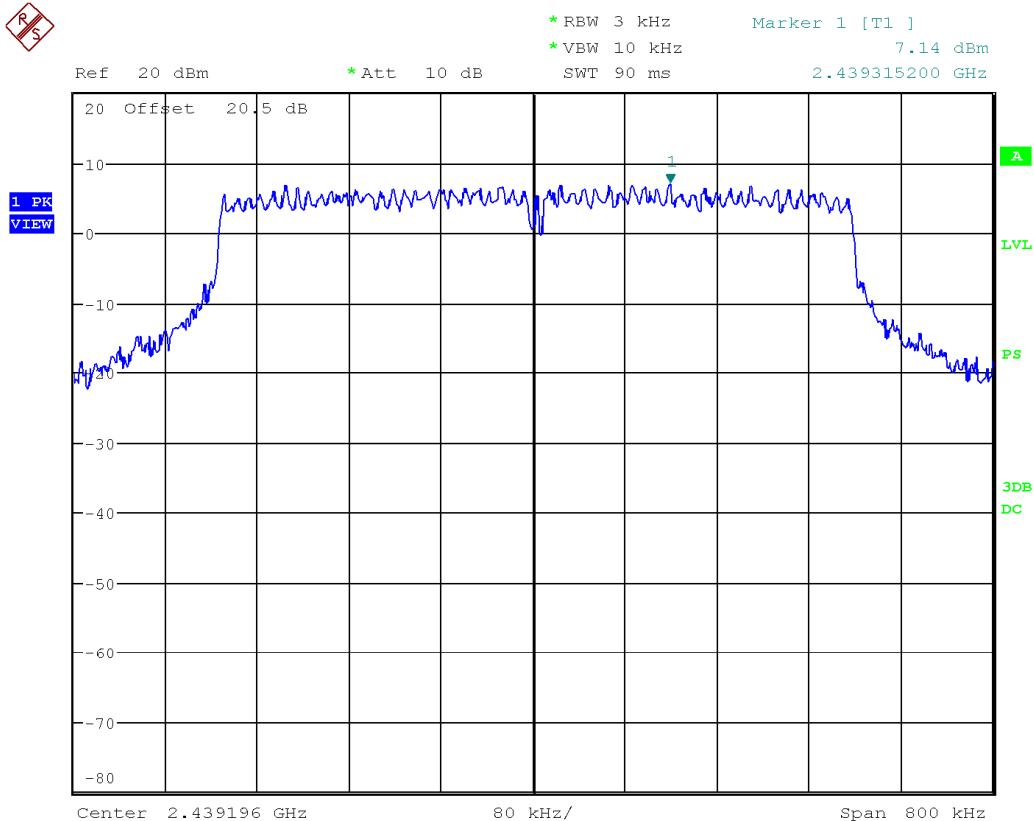

Date: 4.MAY.2017 18:30:02

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

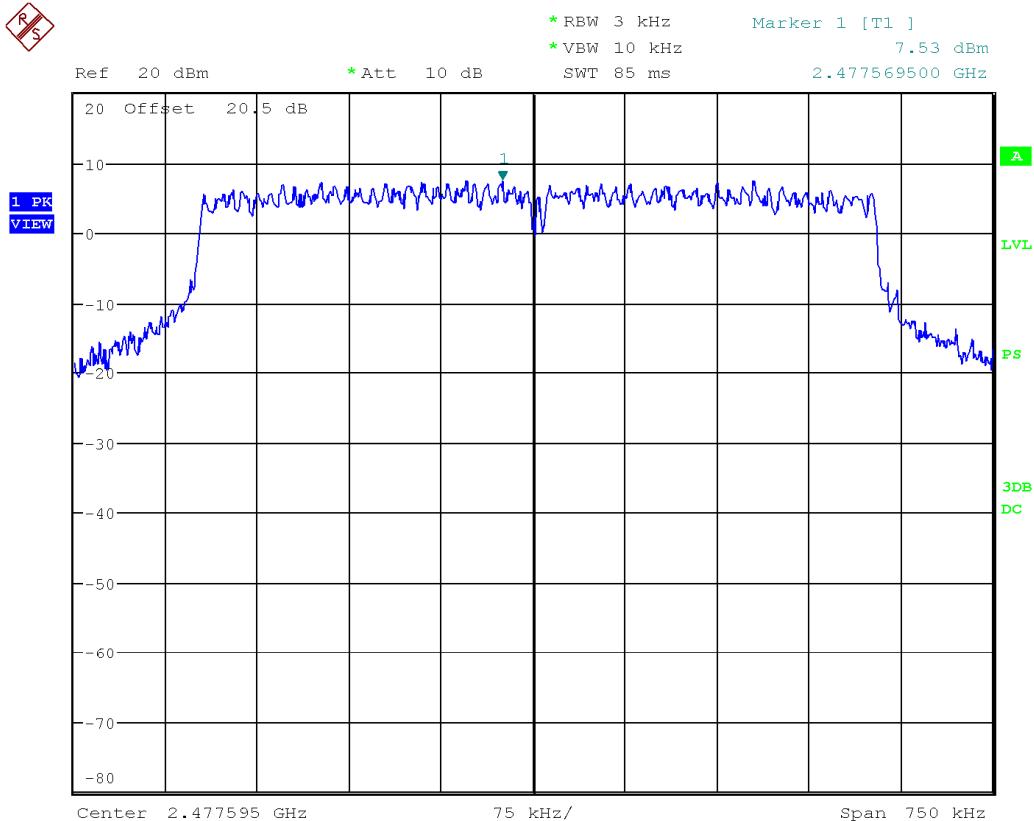

Date: 4.MAY.2017 18:26:35

Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up.

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

## Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset#
Spectrum Analyzer	ESU-40	Rohde & Schwarz	1/28/16	1/28/2018	4092
LISN	FCC-LISN-50/250-16-2-01	FCC	Feb. 1, 2017	Feb. 1, 2019	GEMC 65
RF Cable 7m	LMR-400-7M-50Ω-MN-MN	LexTec	Feb 1, 2017	Feb 1, 2018	GEMC 4025
RF Cable 10m	LMR-400-10M-50Ω-MN-MN	LexTec	Feb 1, 2017	Feb 1, 2018	GEMC 4026
Emissions Software	0.1.94	Global EMC	NCR	NCR	GEMC 58

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B\_Rev1"

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

## Appendix A – EUT Summary

For further details for filing purposes, refer to filing package.

<b>Manufacturer</b>	Trilliant Networks Canada Inc. 610 Du Luxembourg, Granby QC J2J 2V2 Canada
<b>EUT Name</b>	OSDI-4000-1D OSDI-4000-1A
<b>HVIN</b>	CL-R0353A-6.2
<b>EUT revision</b>	1.2
<b>Host used (not restricted)</b>	Streetlight SecureMesh Controller NodE SLCN-4000 / NEEF0005715
<b>Software version</b>	2.247
<b>Equipment category</b>	Network equipment
<b>EUT is powered using</b>	DC voltage
<b>Input voltage range(s) (V)</b>	12Vdc and 3Vdc
<b>Rated input current (A)</b>	60mA max. (in transmit)
<b>Frequency of all clocks present in EUT</b>	16 MHz, 2.4835 GHz (intentional)
<b>I/O cable description Specify length and type</b>	No
<b>Approximate Size (LxWxH)</b>	28mm X 35mm X 5mm
<b>Equipment Category (Commercial / Residential / Medical)</b>	Residential
<b>Peripherals required for test</b>	PC, Mesh Device
<b>Minimum Separation distance from operator</b>	See SAR test report
<b>Types and lengths of all I/O cables</b>	N/A
<b>Description</b>	The OSDI modules are low power 2.4GHz ISM band transceivers (IEEE 802.15.4).

Client	Trilliant Networks Canada Inc.
Product	Open Smart Device Interface (OSDI) SecureMesh Module
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15



Note the EUT is considered to have been received the date of the commencement of the first test, unless otherwise stated. For a close-up picture of the EUT, see 'Appendix B – EUT & Test Setup Photographs'.

Client	Trilliant Networks Canada Inc.
Product	Open Smart Device Interface (OSDI) SecureMesh Module
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15



## Appendix B – EUT and Test Setup Photographs

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

Note: These photos are for information purposes only. Also refer to PDF files that are separate from this test report.


#### Radiated Emissions Below 30 MHz



Client	Trilliant Networks Canada Inc.
Product	Open Smart Device Interface (OSDI) SecureMesh Module
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15




Radiated measurements below 1 GHz

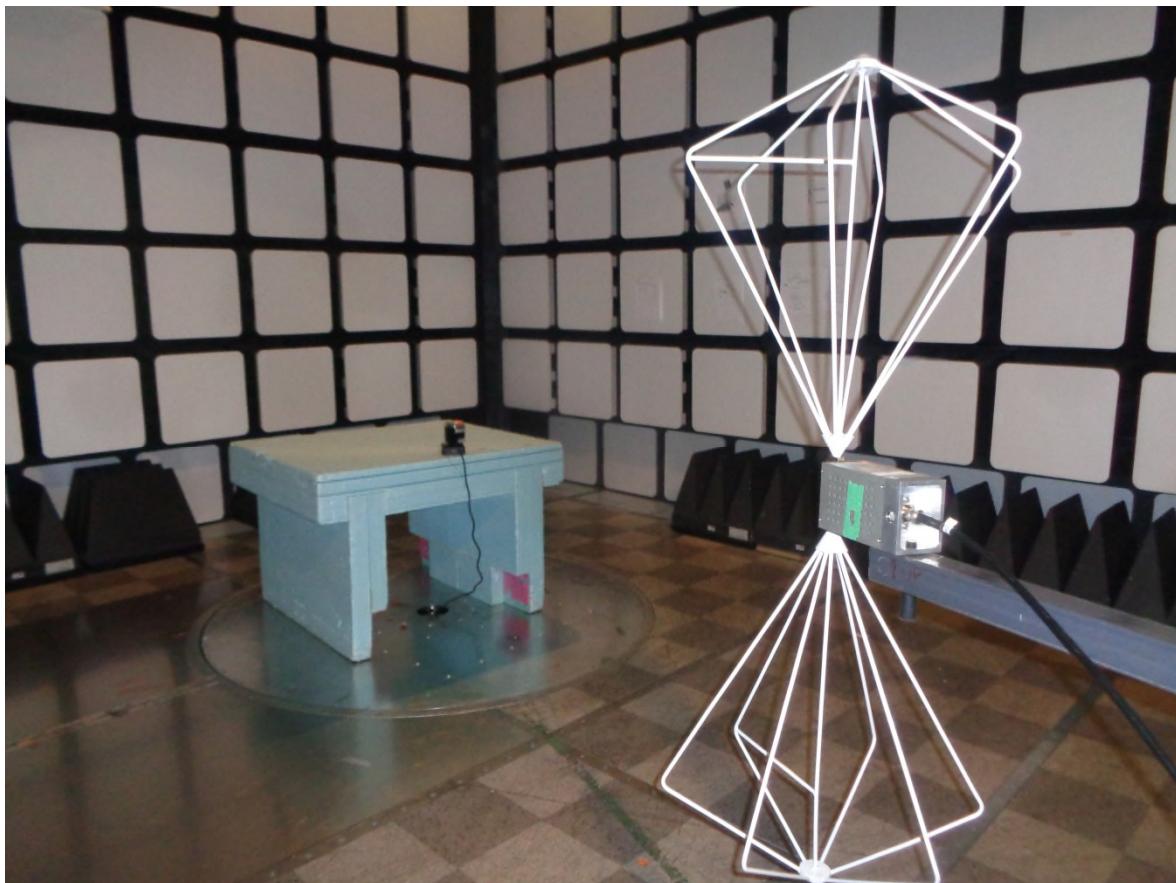

Client	Trilliant Networks Canada Inc.
Product	Open Smart Device Interface (OSDI) SecureMesh Module
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15



### Radiated Measurements above 1 GHz

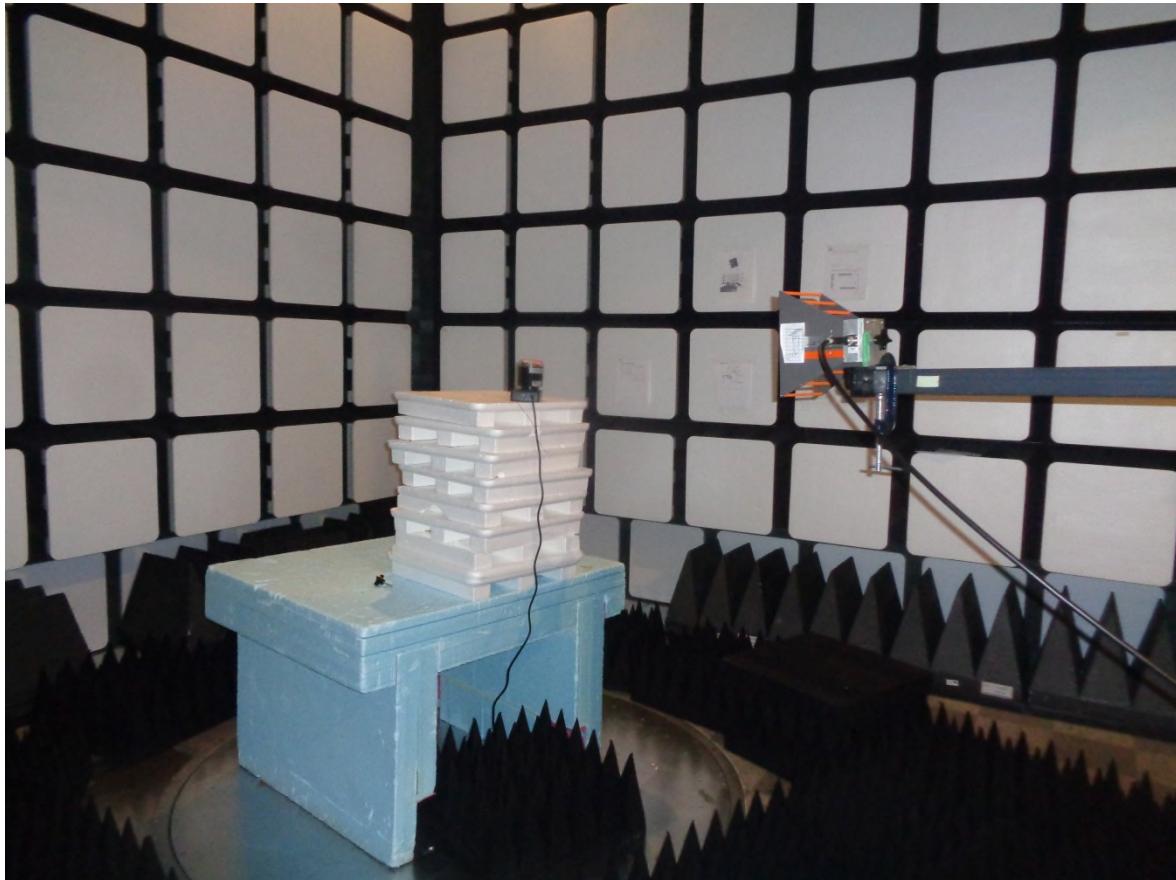

Client	Trilliant Networks Canada Inc.
Product	Open Smart Device Interface (OSDI) SecureMesh Module
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15



Radiated Emissions – close up



Client	Trilliant Networks Canada Inc.
Product	Open Smart Device Interface (OSDI) SecureMesh Module
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15



Antenna Conducted Measurements

Note: Conducted measurements shown with host used.

Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

### Power Line Conducted Emissions



Note: Power line conducted emissions shown with host used as representative.