

# FCC CERTIFICATION RADIO MEASUREMENT TECHNICAL REPORT

On Model Name: RF remote control handset

Model Number: ETX 6-1

Trademark: Elegine

FCC ID: TMF-ETX6-1-200509

Prepared for Elegine. Co., Ltd.

According to FCC Part 15 (2004), Subpart C

*Test Report #:*

*ELE-0509-5901-FCC*

*Prepared by:*

*Chris Huang*

*QC Manager:*

*Dream Cao*

*Test Report Released by:*

*Dream Cao*

*2005, Sep 8*

*Dream Cao*

*Date*

### **Test Location**

*Tests performed at EMC Compliance Management Group (China) in a Certified ANSI Semi-Anechoic Chamber and Shielded Room performed testing.*

**Test Site Location:**      *Audix Technology (Shanghai) Co., Ltd.  
3F 34 Bldg 680 Guiping Rd,  
Caohejing Hi-Tech Park,  
Shanghai, China 200233*

**Registration Number:**      *91789*

### **Accreditation Bodies**

*EMC Compliance Management Group is a fully accredited Test Laboratory for ITE, ISM and Telecommunications Products.*



*In compliance with the site registration requirements of Section 2.948 of the FCC Rules to perform EMI measurements for the general public.*



*Accredited by the National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code # 200068-0.*

# *Table of Contents*

---

<b>DISCLAIMER NOTICE</b>	<b>1</b>
<b>REPRODUCTION CLAUSE</b>	<b>1</b>
<b>ADMINISTRATIVE DATA</b>	<b>2</b>
<b>EUT DESCRIPTION</b>	<b>2</b>
<b>TEST SUMMARY</b>	<b>3</b>
<b>TEST MODE JUSTIFICATION</b>	<b>4</b>
<b>EUT EXERCISE SOFTWARE</b>	<b>4</b>
<b>EQUIPMENT MODIFICATION</b>	<b>4</b>
<b>TEST SYSTEM DETAILS</b>	<b>5</b>
<b>CONFIGURATION OF TESTED SYSTEM</b>	<b>6</b>
<b>EUT SAMPLE PHOTOS OF ETX 6-1</b>	<b>7</b>
<b>ATTACHMENT 1 - ANTENNA REQUIREMENT</b>	<b>10</b>
<b>ATTACHMENT 2 - RESTRICTED BAND OF OPERATION</b>	<b>13</b>
<b>ATTACHMENT 3 - OPERATION MODE</b>	<b>19</b>
<b>ATTACHMENT 4 -FIELD STRENGTH OF FUNDAMENTAL AND SPURIOUS EMISSIONS</b>	<b>21</b>
<b>ATTACHMENT 5 - BANDWIDTH</b>	<b>32-35</b>

### ***Disclaimer Notice***

*When government drawing, specification, or other data are used for any purpose other than in connection with a definitely related government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawing, specifications, or other data, is not to be regarded by implication or otherwise in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell patented invention that may in any way be related thereto. This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.*

### ***Reproduction Clause***

*Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from EMC Compliance Management Group, 670 National Ave., Mountain View, CA 94043.*

## **Administrative Data**

*Test Sample* : RF remote control handset

*Model Number* : ETX 6-1

*Models Tested* : ETX 6-1

*Trade Mark* : Elegine

*Date Tested* : 2005, Sep 5

*Applicant* : Elegine. Co., Ltd.  
Zhong Shan Science-Tec Industrial Park,  
Nanjing Yanjiang Development P.R. China

*Telephone* : 86-25-58379967

*Fax* : 86-25-58379967

*Manufacturer* : Elegine. Co., Ltd.  
Zhong Shan Science-Tec Industrial Park,  
Nanjing Yanjiang Development P.R. China

## **EUT Description**

*Elegine. Co., Ltd. Model number ETX 6-1 (referred to as the EUT in this test report) is an RF remote Control handset*

## Test Summary

The Electromagnetic Compatibility requirements on ETX 6-1 for this test are stated below. All results listed in this report relate exclusively to this above-mentioned model as the Equipment Under Test. This report confers no approval or endorsement upon any other component, host or subsystem used in the test set-up.

<b>EMC Test Item</b>			
Reference FCC Part 15 (2004), Subpart C			
<b>Specification</b>	<b>Description</b>	<b>Test Results</b>	<b>Remark</b>
FCC Part 15.203	Antenna Requirement	Compliance	Attachment 1
FCC Part 15.205	Restricted Band of Operation	Compliance	Attachment 2
FCC Part 15.207	Conducted Limits	Test is not applicable, because EUT only employ battery power for operation.	
FCC Part 15.209	Radiated Emission Limits	Compliance	Refer to Attachment 4
FCC Part 15.231	Periodic Operation in the Band 40.66-40.70MHz and above 70MHz	--	--
(a)	Operation Mode	Compliance	Attachment 3
(b)	Field Strength of Fundamental and Spurious Emissions	Compliance	Attachment 4
(c)	Bandwidth	Compliance	Attachment 5

### ***Test Mode Justification***

*The test modes (Lying, Side, Stand) were done for testing.*

*Note: Lying mode means let the EUT put flat*

*Side mode means let the EUT on the edge*

*Stand mode means let the EUT up right*

### ***EUT Exercise Software***

*The device is not programmable and does not use software.*

### ***Equipment Modification***


*Any modifications installed previous to testing by Elegine. Co., Ltd. will be incorporated in each production model sold or leased in United States.*

*There were no modifications installed by EMC Compliance Management Group (China) test personnel.*


## Test System Details

<b>EUT</b>	
<b>Model Number:</b>	<i>ETX 6-1</i>
<b>Model Tested:</b>	<i>ETX 6-1</i>
<b>Trademark::</b>	<i>Elegine</i>
<b>Serial Number:</b>	<i>001</i>
<b>Input Voltage:</b>	<i>1x12V DC Battery</i>
<b>Description:</b>	<i>RF remote control handset</i>
<b>Manufacturer:</b>	<i>Elegine. Co., Ltd.</i>
<b>Support Equipment</b>	
<i>None</i>	
<b>Cable Description</b>	
<i>None</i>	

## Configuration of Tested System

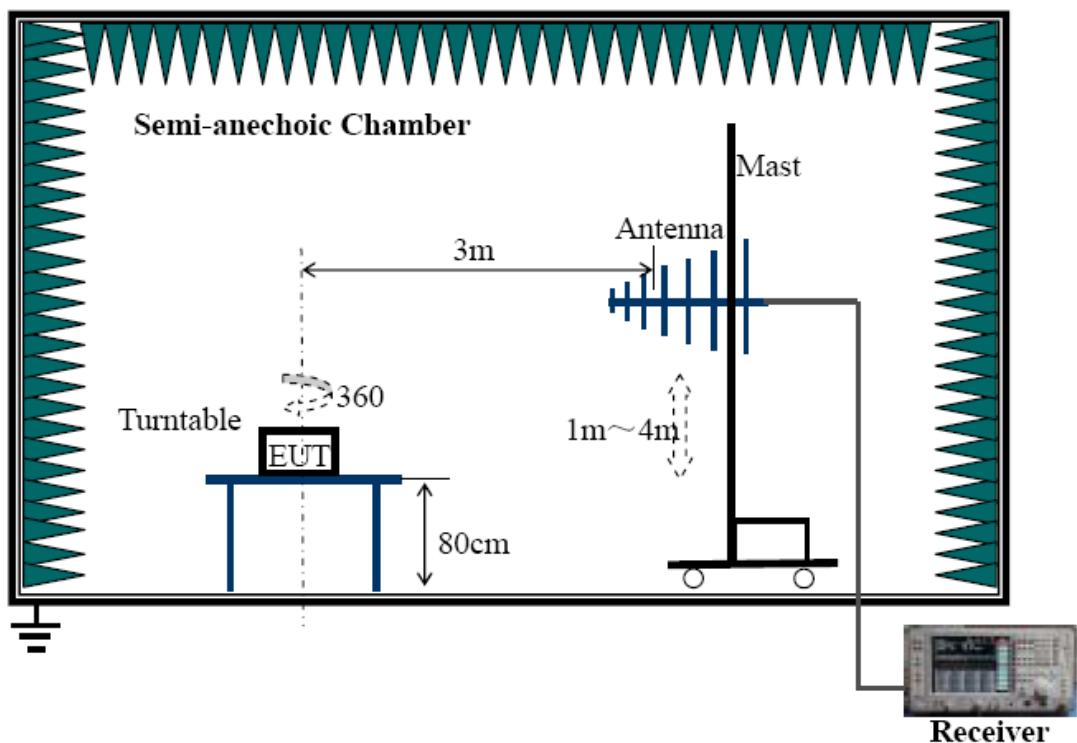

**EUT Sample Photos of ETX 6-1**

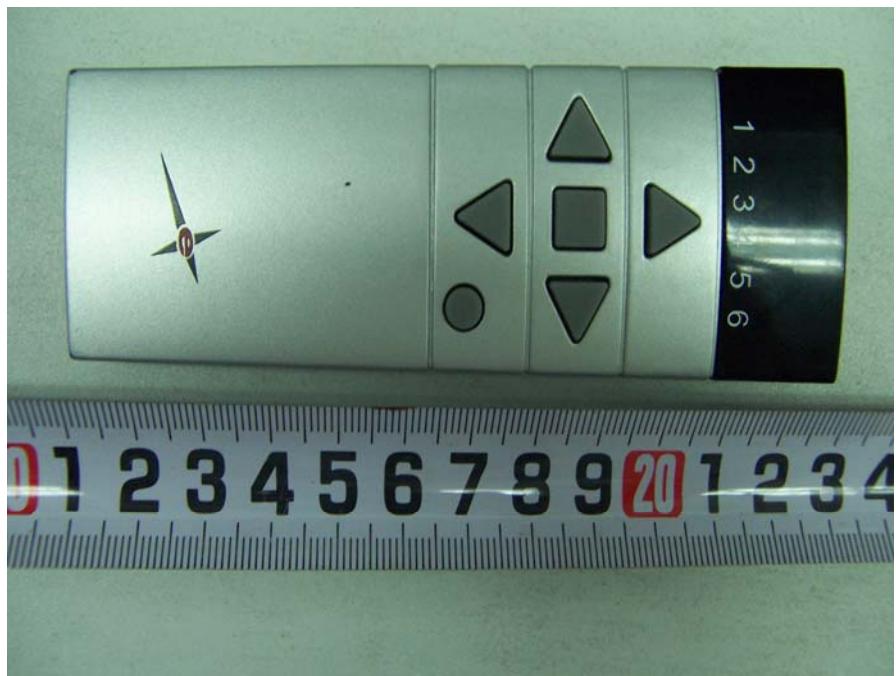


**Front View**




**Back View**



*Uncovered View*

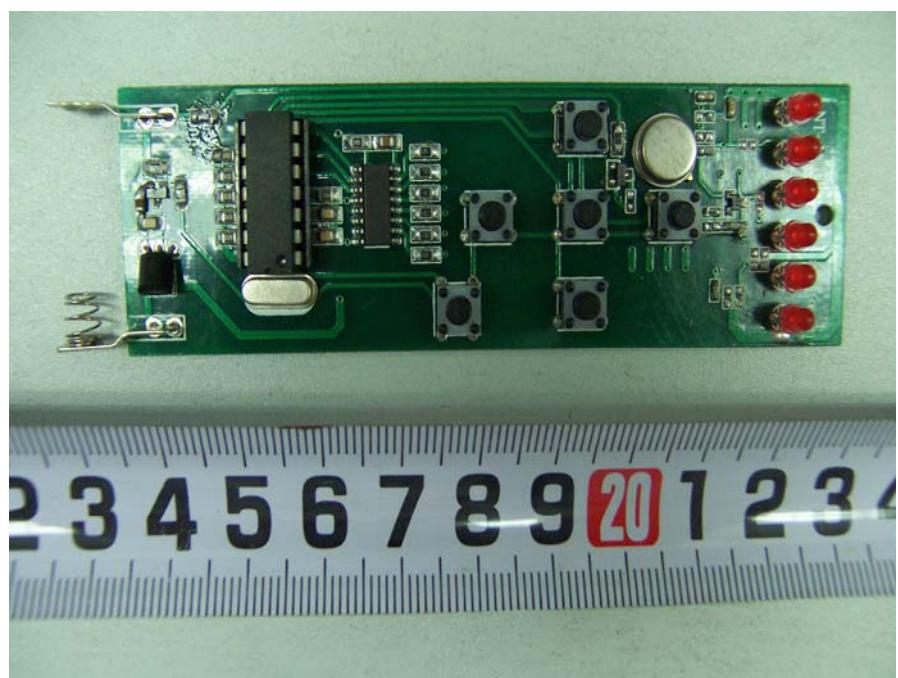

*Main Board Front View*

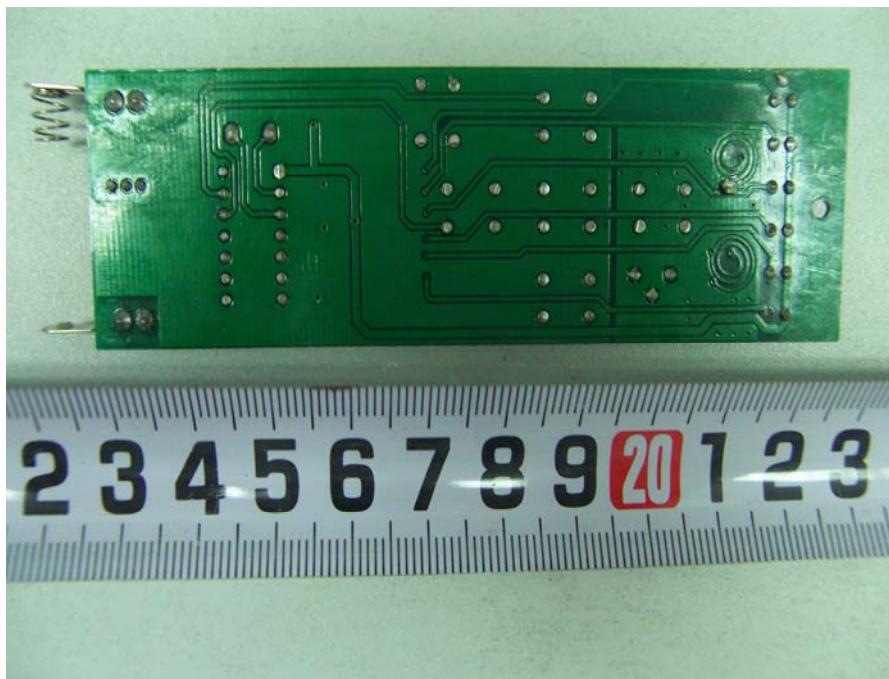


***Main Board Back View***

## ATTACHMENT 1 - ANTENNA REQUIREMENT

<b>CLIENT:</b>	Elegine. Co., Ltd.	<b>TEST STANDARD:</b>	FCC Part 15.203 (2004)
<b>MODEL TESTED:</b>	ETX 6-1	<b>PRODUCT:</b>	RF remote control handset
<b>SERIAL NO.:</b>	001	<b>EUT DESIGNATION:</b> RF Equipment	
<b>TEMPERATURE:</b>	25°C	<b>HUMIDITY:</b> 55%RH	
<b>ATM PRESSURE:</b>	101.8 kPa	<b>GROUNDING:</b> No Grounding	
<b>TESTED BY:</b>	Harry Zhao	<b>DATE OF TEST:</b>	2005, Sep 5
<b>SETUP METHOD:</b>	N/A		
<b>ANTENNA REQUIREMENT:</b>	An intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.		
<b>TEST VOLTAGE:</b>	1x12V DC Battery		
<b>TEST STATUS:</b>	Normal Operation As Usual		
<b>RESULTS:</b>	The EUT meets the Antenna requirement. The test results relate only to the equipment under test provided by client.		
<b>CHANGES OR MODIFICATIONS:</b>	There were no modifications installed by EMC Compliance Management Group (China) test personnel.		
<b>M. UNCERTAINTY:</b>	N/A		

FCC Section	FCC Rules	Conclusion
15.203	<p>Described how the EUT complies with the requirement that either its antenna is permanently attached, or that it employs a unique antenna connector, for every antenna proposed for use with the EUT.</p> <p>The exception is in those cases where EUT must be professionally installed. In order to demonstrate that professional installation is required, the following 3 points must be addressed:</p> <ul style="list-style-type: none"> <li>● <i>The application (or intended use) of the EUT</i></li> <li>● <i>The installation requirements of the EUT</i></li> <li>● <i>The method by which the EUT will be marketed</i></li> </ul>	The RF Device is used an integral antenna without connector

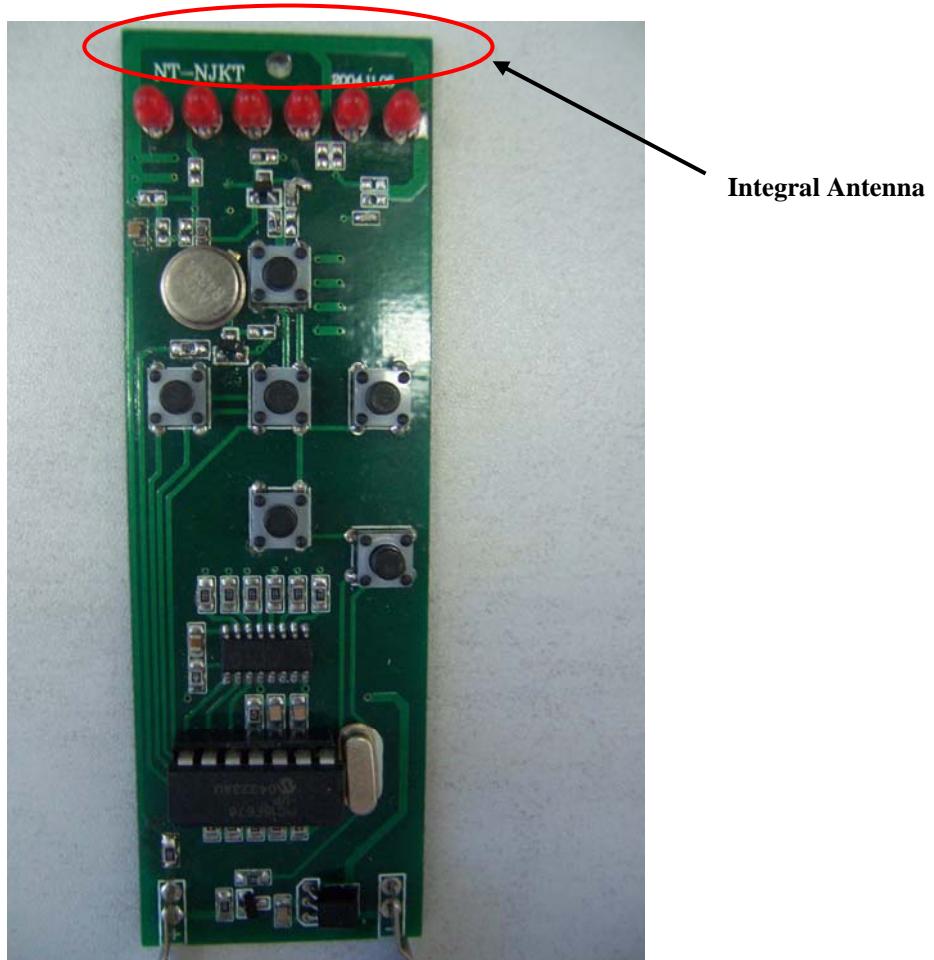

***Integral Antenna without Connector View***

**ATTACHMENT 2 – RESTRICTED BAND OF OPERATION**

<b>CLIENT:</b>	Elegine. Co., Ltd.	<b>TEST STANDARD:</b>	FCC Part 15.205 (2004)
<b>MODEL TESTED:</b>	ETX 6-1	<b>PRODUCT:</b>	RF remote control handset
<b>SERIAL NO.:</b>	001	<b>EUT DESIGNATION:</b>	RF Equipment
<b>TEMPERATURE:</b>	21°C	<b>HUMIDITY:</b>	53%RH
<b>ATM PRESSURE:</b>	101.6 kPa	<b>GROUNDING:</b>	No Grounding
<b>TESTED BY:</b>	Harry Zhao	<b>DATE OF TEST:</b>	2005, Sep 5
<b>SETUP METHOD:</b>	ANSI C63.4 - 2003		
<b>RESTRICTED BANDS OF OPERATION REQUIREMENT:</b>	The only spurious emissions are permitted in any of the frequency bands listed below table of next page.		
<b>TESTED RANGE:</b>	30MHz to 5000MHz		
<b>TEST VOLTAGE:</b>	1x12V DC Battery		
<b>TEST STATUS:</b>	Keep Tx in continuous transmission mode, modulated		
<b>RESULTS:</b>	The EUT meets the restricted bands of operation requirement. The test results relate only to the equipment under test provided by client.		
<b>CHANGES OR MODIFICATIONS:</b>	There were no modifications installed by EMC Compliance Management Group (China) test personnel.		
<b>M. UNCERTAINTY:</b>	Freq. $\pm 2 \times 10^{-7}$ x Center Freq., Amp $\pm 2.6$ dB		

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	<sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

### Test Data (Below 1GHz)




Site : Chamber 3  
Condition : 3m  
Project No. : ELE-0509-5901-FCC  
Applicant : Elegine Co., Ltd.  
EUT : RF Remote Control Handset  
M/N : ETX 6-1  
S/N : 001  
Power Supply : 1\*12V DC Battery  
Ambient : 21'C, 53%RH, 101.6kPa  
Test Mode : Continuous Transmission Mode, Modulated  
Test Engineer: HarryZhao  
Memo :

Page: 1

	Freq	Limit	Over	Read	Probe	Cable	Preamp
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB
1	434.490	57.83	-----	64.51	-6.68	17.85	4.03 28.56
2	866.140	48.00	-----	46.30	1.70	23.98	6.08 28.36

### ***Test Data (Above 1GHz)***

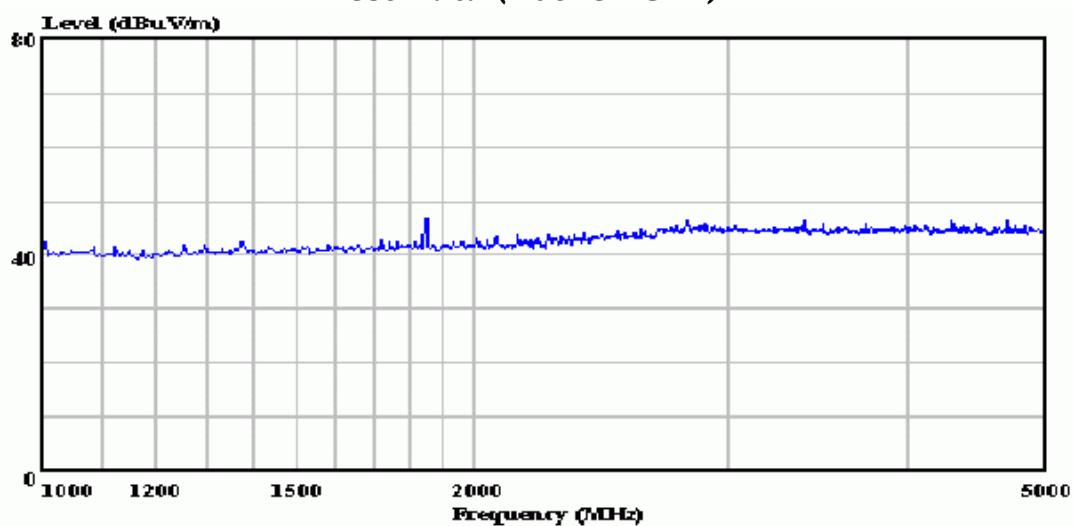

Site : Chamber 3  
Condition : 3m  
Project No. : Ele-0509-5901-FCC  
Applicant : Elegine Co., Ltd.  
EUT : RF Remote Control Handset  
M/N : ETX 6-1  
S/N : 001  
Power Supply : 1\*12V DC Battery  
Ambient : 21'C, 53%RH, 101.6kPa  
Test Mode : Continous Transmission Mode, Modulated  
Test Engineer: HarryZhao  
Memo :

Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	HP	8593EM	3628A00167	04/22/05	04/21/06
Test Receiver	R&S	ESVS10	844594/001	09/20/04	09/19/05
Preamplifier (30MHz-1000MHz)	HP	8447D	2944A06849	09/20/04	09/19/05
Preamplifier (1GHz-26.5GHz)	HP	8449B	3008A00864	04/20/05	04/19/06
Bilog Antenna	Chase	CBL611	1145	09/18/04	09/17/05
Horn Antenna	EMCO	3115	9607-4878	04/20/05	04/19/06
50ΩCoaxial Switch	Anritsu	MP59B	M73389	09/20/04	09/19/05
3m Semi-Anechoic Chamber	Audix	9*6*6	N/A	11/25/04	11/24/05
Note: All testing were performed using internationally recognized standards. All test instruments were calibrated.					

SIGNED BY: Hang zhu  
ENGINEER

REVIEWED BY: Dream Cao  
QC



***Radiated Emissions Test Set-up (Below 1GHz)***



***Radiated Emissions Test Set-up (Above 1GHz)***

### **ATTACHMENT 3 – OPERATION MODE**

<b>CLIENT:</b>	Elegine. Co., Ltd.	<b>TEST STANDARD:</b>	FCC Part 15.203 (2004)
<b>MODEL TESTED:</b>	ETX 6-1	<b>PRODUCT:</b>	RF remote control handset
<b>SERIAL NO.:</b>	001	<b>EUT DESIGNATION:</b>	RF Equipment
<b>TEMPERATURE:</b>	25°C	<b>HUMIDITY:</b>	55%RH
<b>ATM PRESSURE:</b>	101.8 kPa	<b>GROUNDING:</b>	No Grounding
<b>TESTED BY:</b>	Harry Zhao	<b>DATE OF TEST:</b>	2005, Sep 5
<b>SETUP METHOD:</b>	N/A		
<b>OPERATION MODE REQUIREMENT:</b>	(1) A manually operated transmitter shall employ a switch that will automatically the transmitter within not more than 5 seconds of being released. (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation. (3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used on security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour. (4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.		
<b>TEST VOLTAGE:</b>	1x12V DC Battery		
<b>TEST STATUS:</b>	Normal Operation As Usual		
<b>RESULTS:</b>	The EUT meets the operation mode requirement. The test results relate only to the equipment under test provided by client.		
<b>CHANGES OR MODIFICATIONS:</b>	There were no modifications installed by EMC Compliance Management Group (China) test personnel.		
<b>M. UNCERTAINTY:</b>	N/A		

FCC Section	FCC Rules	Conclusion
15.231 (a)	<p>The provisions of this Section are restricted to periodic operation within the band 40.66 - 40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of 15.231 Section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal. The following conditions shall be met to comply with the provisions for this periodic operation:</p> <p>(1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released</p> <p>(2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.</p> <p>(3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used on security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.</p> <p>(4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.</p>	<p>The transmitter operates manually and employs a switch that automatically deactivates the transmitter and ceases transmission within 5 seconds after deactivation.</p> <p>The transmitter does not perform periodic transmissions.</p>

**ATTACHMENT 4 -FIELD STRENGTH OF FUNDAMENTAL AND SPURIOUS EMISSIONS**

<b>CLIENT:</b>	Elegine. Co., Ltd.	<b>TEST STANDARD:</b>	FCC	Part	15.209
<b>MODEL TESTED:</b>	ETX 6-1	<b>PRODUCT:</b>	RF	remote	control handset
<b>SERIAL NO.:</b>	001	<b>EUT DESIGNATION:</b>	RF Equipment		
<b>TEMPERATURE:</b>	21°C	<b>HUMIDITY:</b>	53%RH		
<b>ATM PRESSURE:</b>	101.6 kPa	<b>GROUNDING:</b>	No Grounding		
<b>TESTED BY:</b>	Harry Zhao	<b>DATE OF TEST:</b>	2005, Sep 5		
<b>SETUP METHOD:</b>	ANSI C63.4 - 2003				
<b>TEST PROCEDURE:</b>	<p>a. The EUT was placed on a rotatable table with 0.8 meters above ground.</p> <p>b. The EUT was set 3 meters from the interference-receiving antenna, which was mounted on the top of a variable height antenna tower.</p> <p>c. The antenna was varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna were set to make measurement.</p> <p>d. For each suspected emission the EUT was arranged to its worst case and then change the antenna tower height (from 1m to 4m) and turn table (from 0 degree to 360 degree) to find the maximum reading.</p> <p>e. If the emission level of the EUT in peak mode was 20 dB lower than the specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be tested using the quasi-peak method in about six maximal points and the results will be reported.</p> <p>f. Broadband antenna (Calibrated antenna) was used as receiving antenna below 1000MHz. Horn antenna were used as receiving antenna above 1000MHz.</p> <p>g. The bandwidth is 120 kHz below 1000 MHz, and 1 MHz above 1000 MHz</p> <p>Explanation of the Correction Factor are given as follows:</p> <p>FS= RA + AF + CF - AG - DC</p> <p>Where: FS = Field Strength</p> <p>RA = Receiver Amplitude</p> <p>AF = Antenna Factor</p> <p>CF = Cable Attenuation Factor</p> <p>AG = Amplifier Gain</p> <p>DC = Duty Cycle Correction Factor</p>				

Continue on to next page...

<b>TESTED RANGE:</b>	30MHz to 5000MHz
<b>TEST VOLTAGE:</b>	1x12V battery
<b>TEST STATUS:</b>	Keep Tx in continuous transmission mode, modulated
<b>RESULTS:</b>	The EUT meets the requirements of field strength test. The test results relate only to the equipment under test provided by client.
<b>CHANGES OR MODIFICATIONS:</b>	There were no modifications installed by EMC Compliance Management Group (China) test personnel.
<b>M. UNCERTAINTY:</b>	Freq. $\pm 2 \times 10^{-7}$ x Center Freq., Amp $\pm 2.6$ dB

Direction	Polarization	Frequency Type	Frequency (MHz)	Field Strength dB(µV/m)	Limit dB(µV/m)	Over Limit dB(µV/m)	Read Level dB(µV)	Factor (dB)	Duty cycle Correction Factor (dB)
Lying	Horizontal	Fundamental	433.842	52.20	80.82	-28.62	66.51	-6.68	7.63
		Spurious	153.190	18.93	60.82	-41.89	40.69	-14.13	7.63
		Spurious	867.684	34.04	60.82	-26.78	47.60	1.70	7.63
		Spurious	1852.000	39.09	60.82	-21.73	45.80	0.92	7.63
	Vertical	Fundamental	433.842	50.20	80.82	-30.62	64.51	-6.68	7.63
		Spurious	153.190	22.34	60.82	-38.48	44.10	-14.13	7.63
		Spurious	867.684	40.37	60.82	-20.45	46.30	1.70	7.63
		Spurious	1852.000	36.57	60.82	-24.25	43.28	0.92	7.63
Side	Horizontal	Fundamental	433.840	43.88	80.82	-36.94	30.89	-6.68	7.63
		Spurious	153.190	14.97	60.82	-45.85	36.73	-14.13	7.63
		Spurious	867.684	39.94	60.82	-20.88	45.87	1.70	7.63
		Spurious	1852.000	33.47	60.82	-27.35	40.18	0.92	7.63
	Vertical	Fundamental	433.842	47.40	80.82	-33.42	61.71	-6.68	7.63
		Spurious	153.190	22.54	60.82	-38.28	44.30	-14.13	7.63
		Spurious	867.684	31.08	60.82	-29.74	37.01	1.70	7.63
		Spurious	1852.000	35.77	60.82	-25.05	42.48	0.92	7.63
Stand	Horizontal	Fundamental	433.842	42.66	80.82	-38.16	56.97	-6.87	7.63
		Spurious	153.190	18.01	60.82	-42.81	39.77	-14.13	7.63
		Spurious	867.684	27.80	60.82	-33.02	33.73	1.70	7.63
		Spurious	1852.000	33.07	60.82	-27.75	39.78	0.92	7.63
	Vertical	Fundamental	433.842	50.57	80.82	-30.25	64.88	-6.68	7.63
		Spurious	153.190	22.51	60.82	-38.31	44.27	-14.13	7.63
		Spurious	867.684	37.58	60.82	-23.24	43.51	1.70	7.63
		Spurious	1852.000	38.77	60.82	-22.05	45.48	0.92	7.63

Note:

1. Where  $F$  is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follow:

For fundamental frequency ( $F=433.842\text{MHz}$ )

$$\begin{aligned} \text{Field Strength of Fundamental (dBuV/m)} &= 20\log (41.6667 \times F - 7083.3333) \\ &= 20\log (41.6667 \times 433.842 - 7083.333) \\ &= 80.82 \text{ dBuV/m} \end{aligned}$$

$$\text{Field Strength of Spurious (dBuV/m)} = 80.82 - 20 = 60.82 \text{ dBuV/m}$$



2. Field Strength=Read Level + Fact – Duty Cycle Correction Fact



Fact = Antenna Factor + Cable Loss - Preamp Factor



Duty Cycle Correction Fact is calculated by averaging the sum of the pulse train. Correction factor is measured as follows:



Keep the EUT in continuous transmission mode (modulated), and set the spectrum to the fundamental frequency and set the span width to 0 Hz. Then connect a storage oscilloscope to the video output of the spectrum that is used to detect the pulse train. Adjust the oscilloscope settings to observe the pulse train and determine the number and width of the pulses, as well as the period of the train.



Duty Cycle Correction Factor =  $|20\log [(14.5*1+7.25*3)/87.25]| = 7.63 \text{ dB}$   
(please refer to the following test graph of next page)

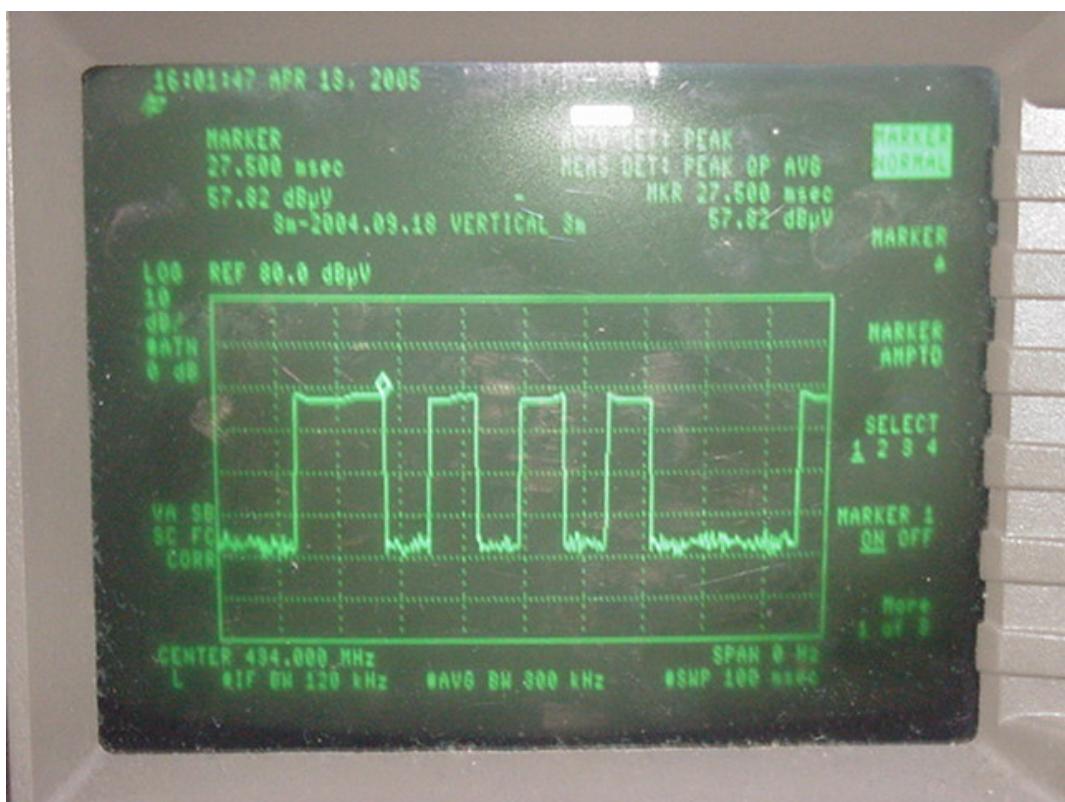
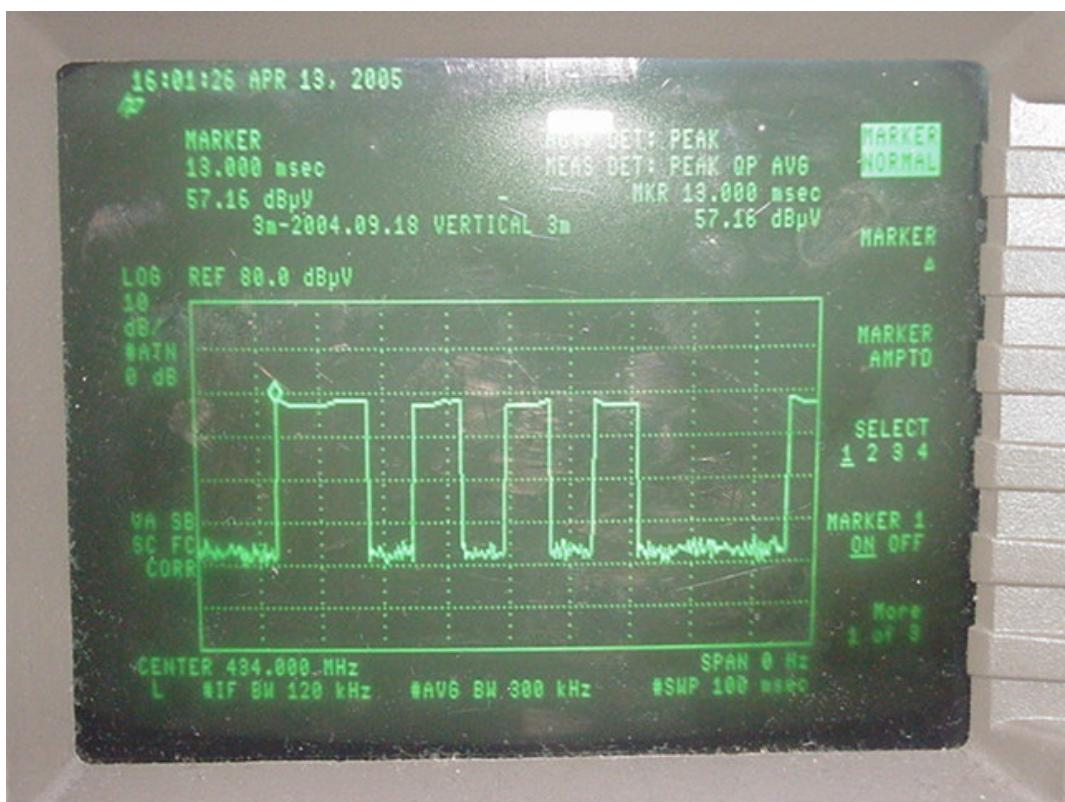


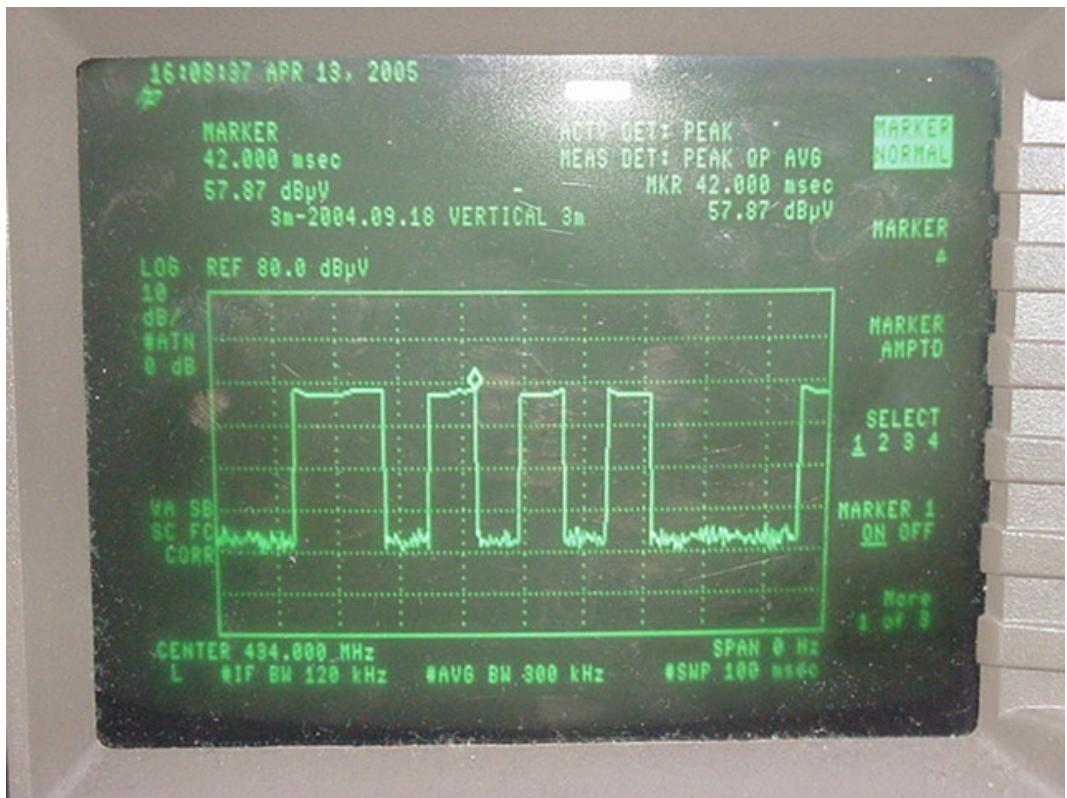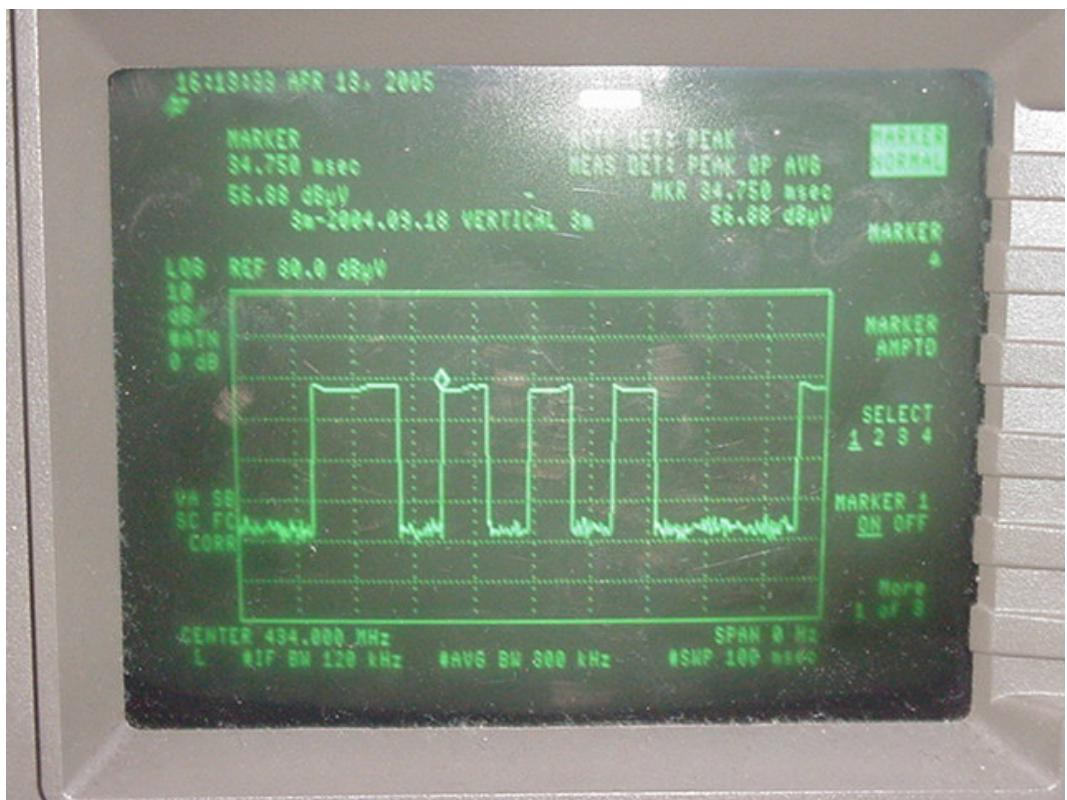

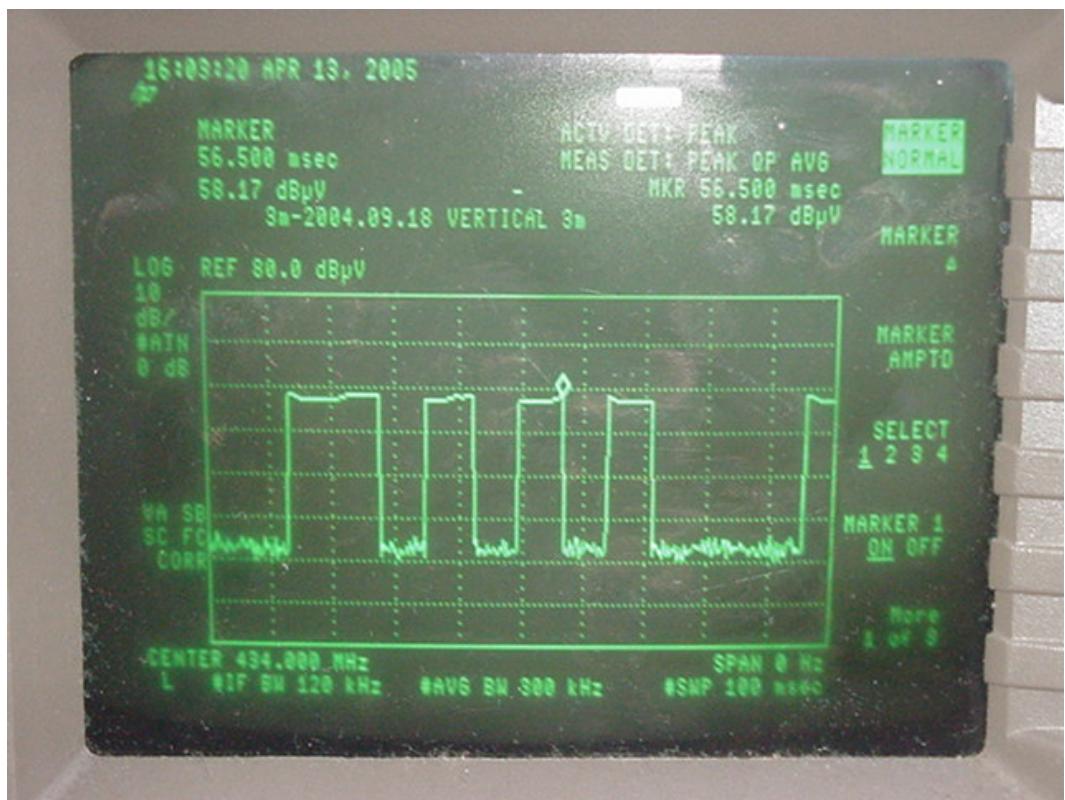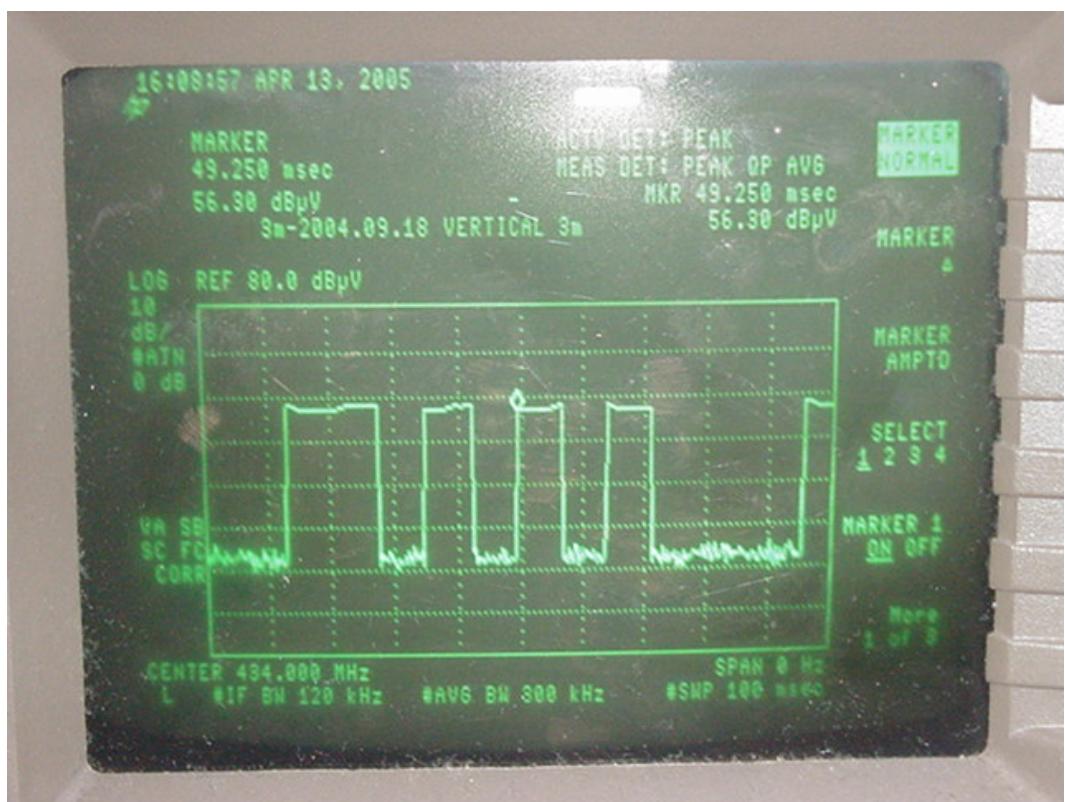

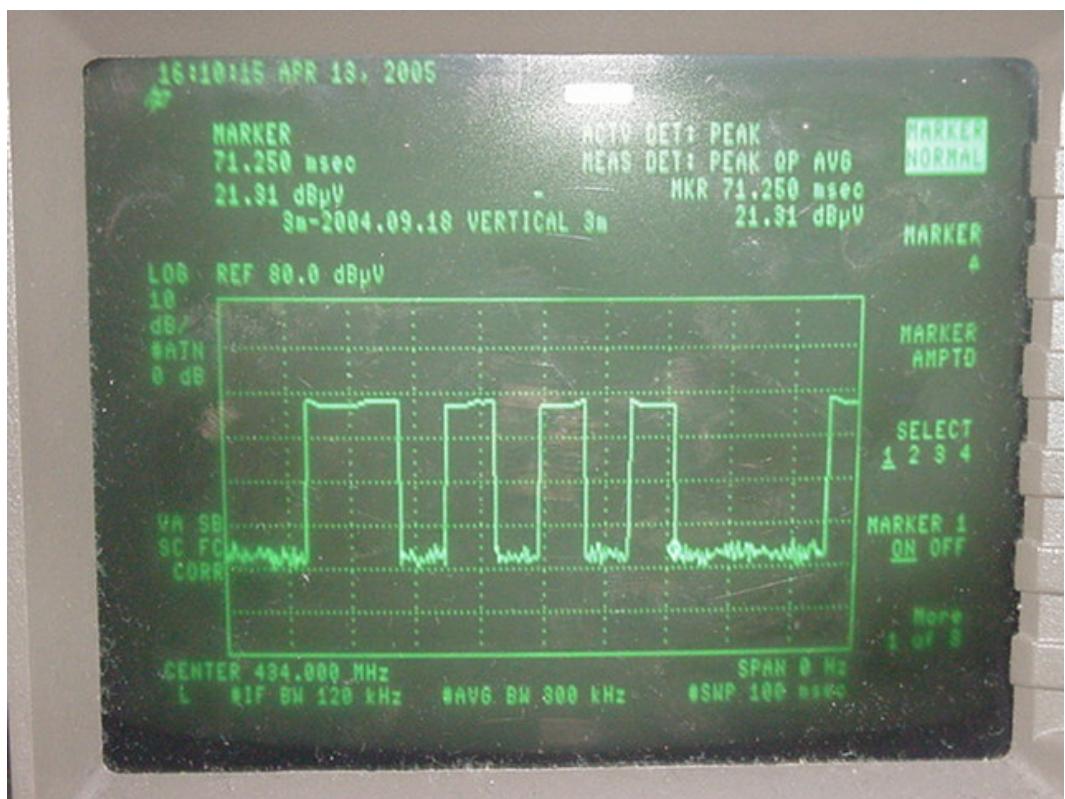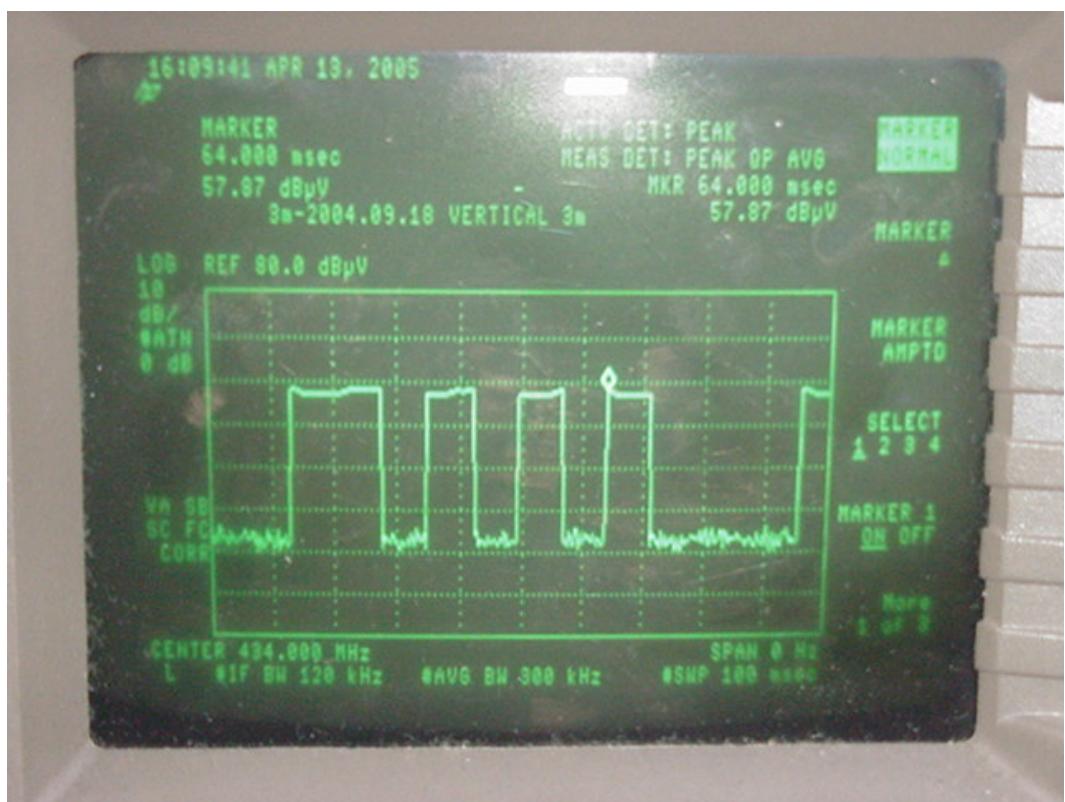

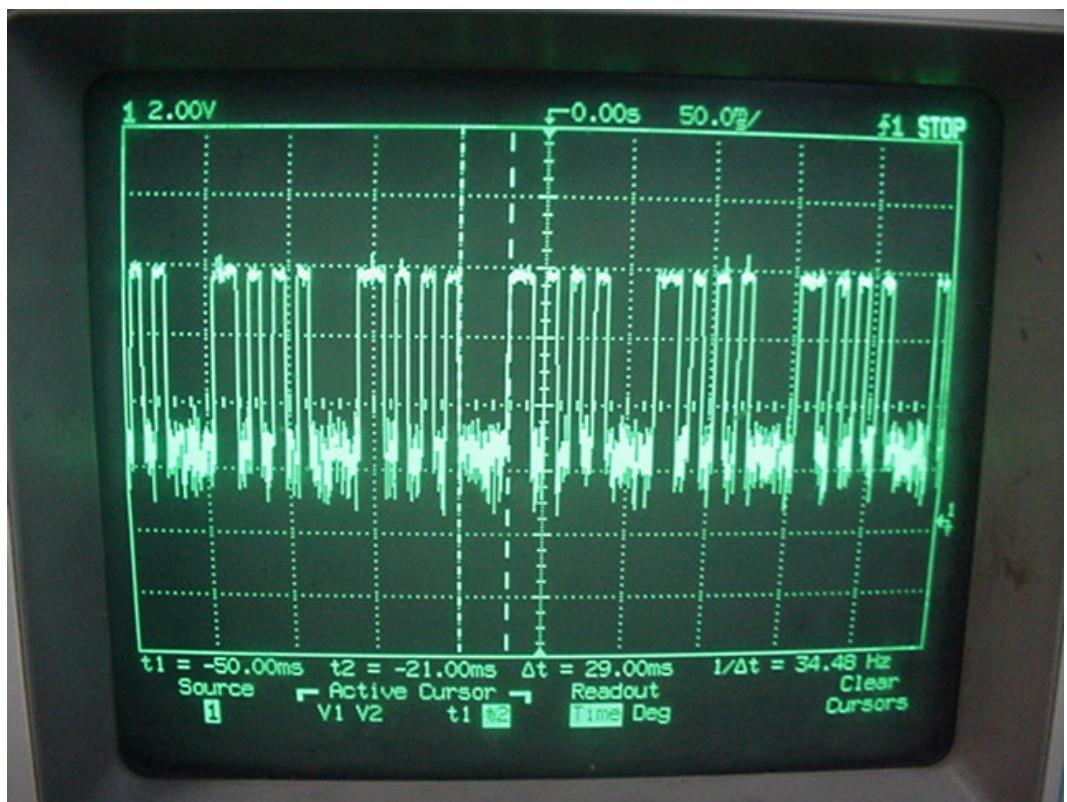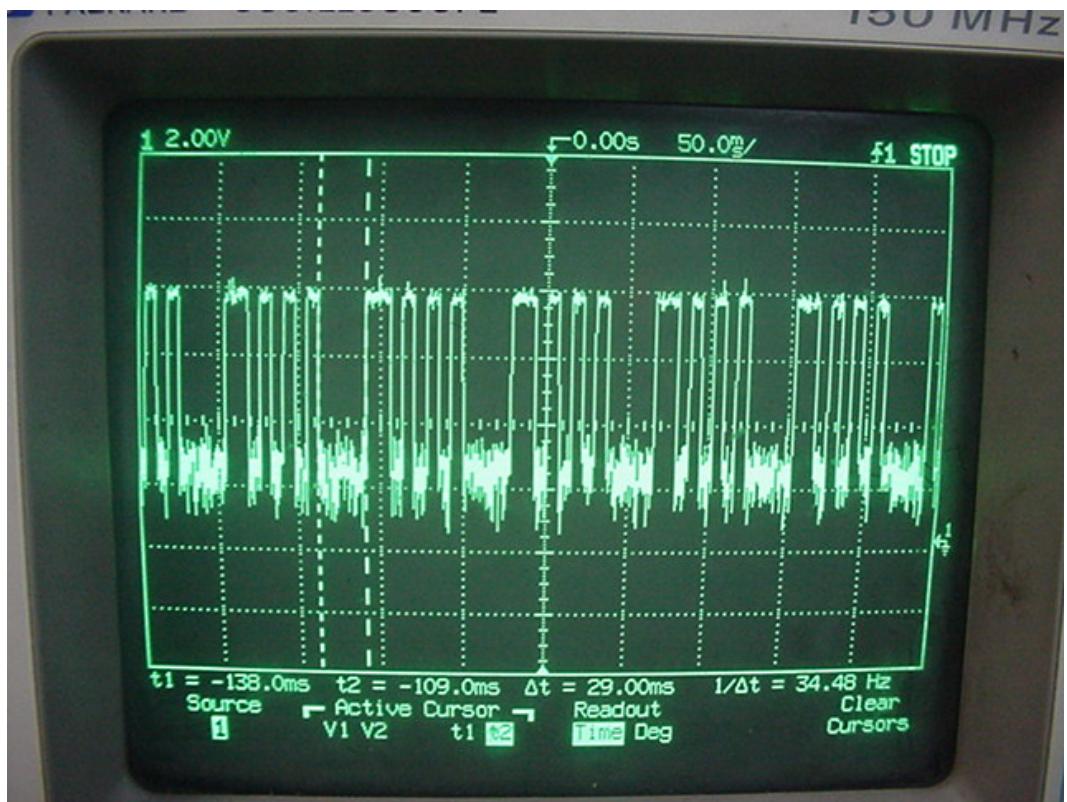

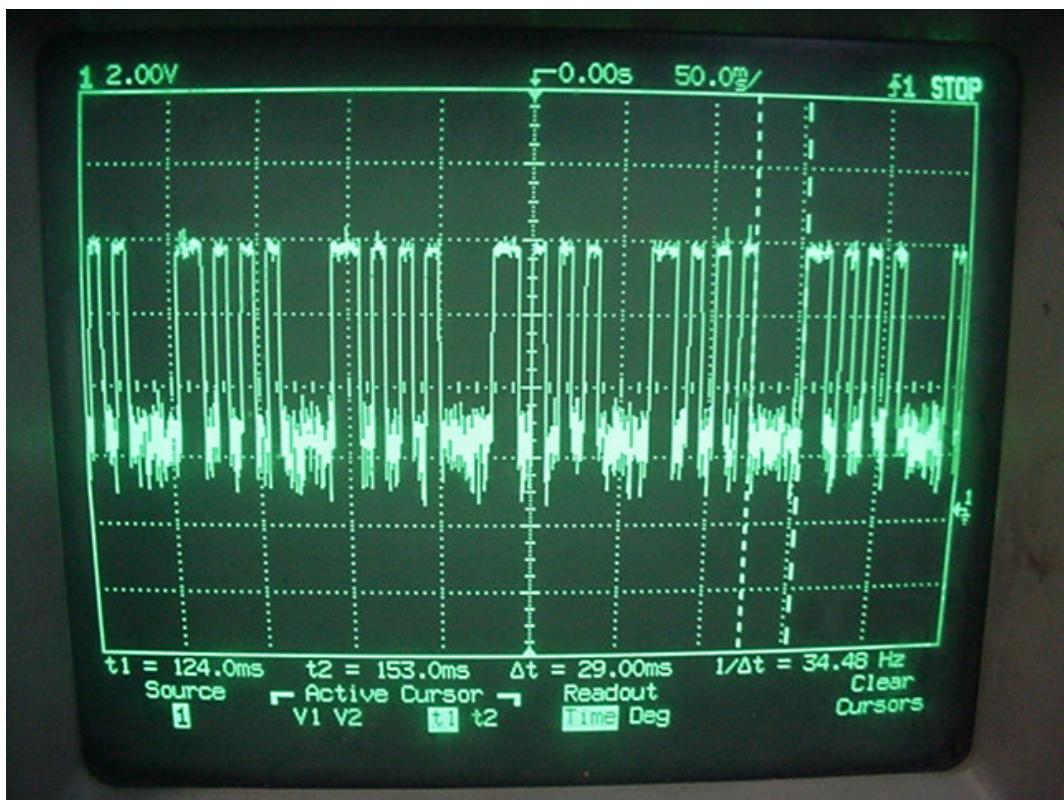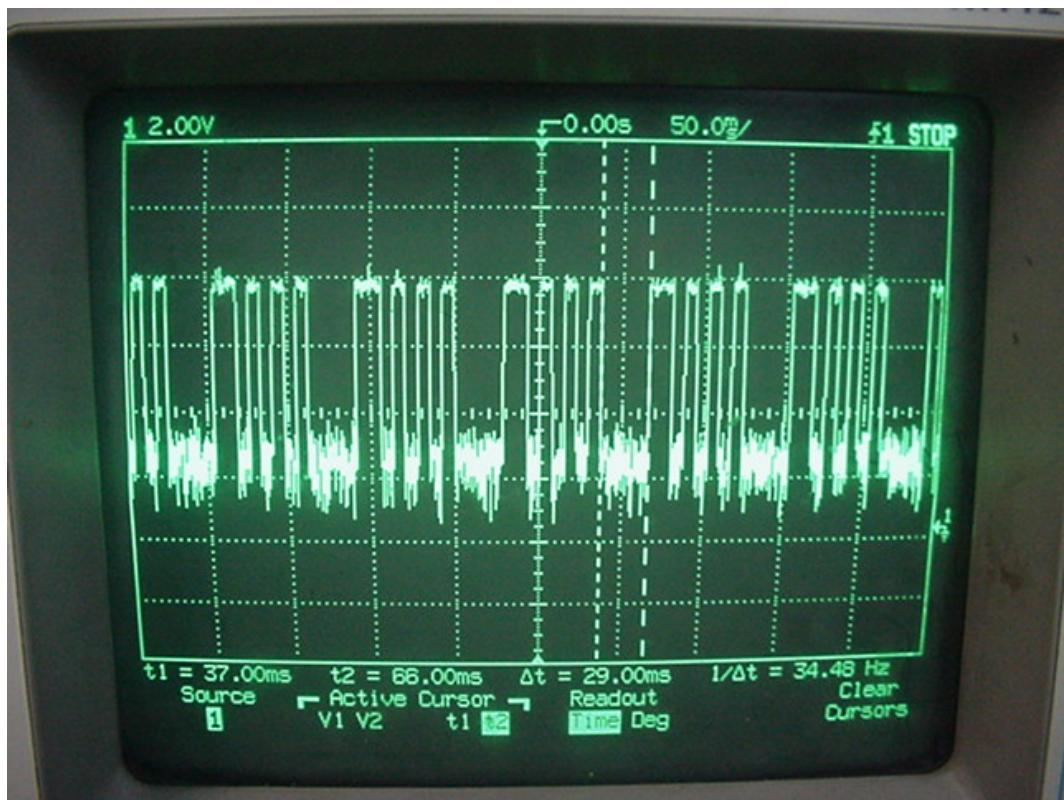

Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	HP	8593EM	3628A00167	04/22/05	04/21/06
Test Receiver	R&S	ESVS10	844594/001	09/20/04	09/19/05
Preamplifier (30MHz-1000MHz)	HP	8447D	2944A06849	09/20/04	09/19/05
Preamplifier (1GHz-26.5GHz)	HP	8449B	3008A00864	04/20/05	04/19/06
Bilog Antenna	Chase	CBL611	1145	09/18/04	09/17/05
Horn Antenna	EMCO	3115	9607-4878	04/20/05	04/19/06
50ΩCoaxial Switch	Anritsu	MP59B	M73389	09/20/04	09/19/05
Oscilloscope	HP	54602B	US36181094	03/20/05	03/19/06
3m Semi-Anechoic Chamber	Audix	9*6*6	N/A	11/25/04	11/24/05
Note: All testing were performed using internationally recognized standards. All test instruments were calibrated.					

SIGNED BY: Hangzhan  
ENGINEER

REVIEWED BY: Dream Cao  
QC



***Field Strength Emissions Test Set-up (Below 1GHz)***




***Field Strength Emissions Test Set-up (Above 1GHz)***

## **ATTACHMENT 5 – BANDWIDTH**

<b>CLIENT:</b>	Elegine. Co., Ltd.	<b>TEST STANDARD:</b>	FCC Part 15.231 (2004)
<b>MODEL TESTED:</b>	ETX 6-1	<b>PRODUCT:</b>	RF remote control handset
<b>SERIAL NO.:</b>	001	<b>EUT DESIGNATION:</b>	RF Equipment
<b>TEMPERATURE:</b>	21°C	<b>HUMIDITY:</b>	53%RH
<b>ATM PRESSURE:</b>	101.6 kPa	<b>GROUNDING:</b>	No Grounding
<b>TESTED BY:</b>	Harry Zhao	<b>DATE OF TEST:</b>	2005, Sep 5
<b>SETUP METHOD:</b>	ANSI C63.4 - 2003		
<b>BANDWIDTH REQUIREMENT:</b>	The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, The emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.		
<b>TEST VOLTAGE:</b>	1x12V DC Battery		
<b>TEST STATUS:</b>	Keep Tx in continuous transmission mode, modulated		
<b>RESULTS:</b>	The EUT meets the bandwidth requirement. The test results relate only to the equipment under test provided by client.		
<b>CHANGES OR MODIFICATIONS:</b>	There were no modifications installed by EMC Compliance Management Group (China) test personnel.		
<b>M. UNCERTAINTY:</b>	Freq. $\pm 2 \times 10^{-7}$ x Center Freq., Amp $\pm 2.6$ dB		

### Test Data (Fundamental Frequency)

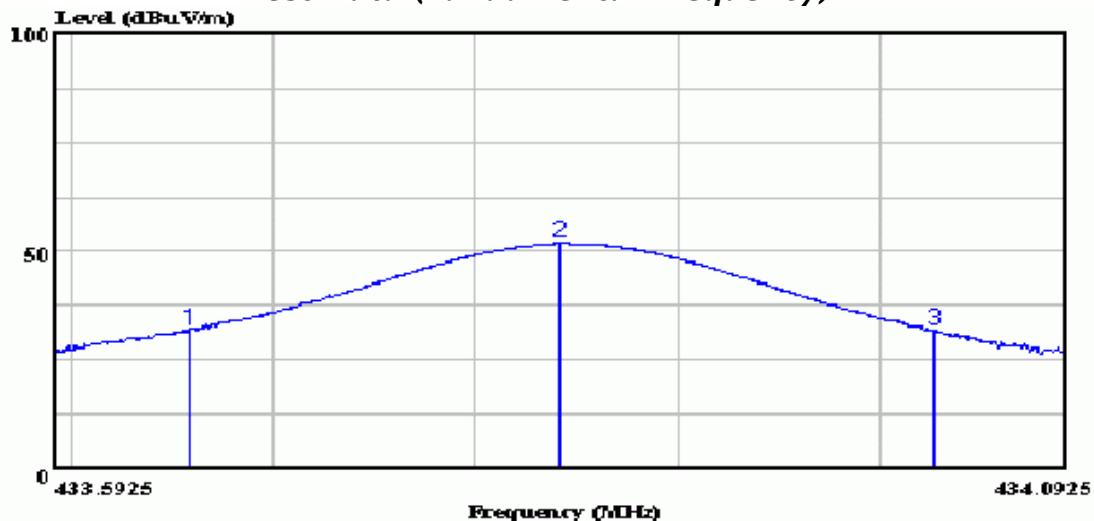

Site : Chamber 3  
 Condition : 3m  
 Project No. : Ele-0509-5901-FCC  
 Applicant : Elegine Co., Ltd.  
 EUT : RF Remote Control Handset  
 M/N : ETX 6-1  
 S/N : 001  
 Power Supply : 1\*12V DC Battery  
 Ambient : 21'C, 53%RH, 101.6kPa  
 Test Mode : Continous Transmission Mode, Modulated  
 Test Engineer: HarryZhao  
 Memo :

Page: 1

Freq	Level	Limit	Over	Read	Probe		Cable	Preamp
		Line	Limit	Level	Factor	Factor	Loss	Factor
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB	dB
1	433.659	31.97	-----	38.68	-6.71	17.85	4.00	28.56
2	433.842	51.99	-----	58.70	-6.71	17.85	4.00	28.56
3	434.027	31.97	-----	38.68	-6.71	17.85	4.00	28.56

Frequency (MHz)			Bandwidth Limit (MHz) (Fcute x 0.25%)	Test Result (MHz) (Fend-Fstart)	Conclusion
Start	Center	End			
433.659	433.842	434.027	1.084605	0.368	Compliance

Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	HP	8593EM	3628A00167	04/22/05	04/21/06
Test Receiver	R&S	ESVS10	844594/001	09/20/04	09/19/05
Preamplifier (30MHz-1000MHz)	HP	8447D	2944A06849	09/20/04	09/19/05
Bilog Antenna	Chase	CBL611	1145	09/18/04	09/17/05
50ΩCoaxial Switch	Anritsu	MP59B	M73389	09/20/04	09/19/05
3m Semi-Anechoic Chamber	Audix	9*6*6	N/A	11/25/04	11/24/05
Note: All testing were performed using internationally recognized standards. All test instruments were calibrated.					

SIGNED BY: \_\_\_\_\_



ENGINEER

REVIEWED BY: \_\_\_\_\_



QC



***Bandwidth Test Set-up***