

Test Report No.50155072 001

Appendix D: Radiated and Mains Spurious Emission Data


(File: 50155072AppendixD)

Contents


Spurious Emissions, Band Edges, 2.35-2.5G	2
Spurious Emissions, TX Mode, 9K-30M	6
Spurious Emissions, TX Mode, 30M-1G	8
Spurious Emissions, TX Mode, 1G-18G	10
Spurious Emissions, TX Mode, 18G-26.5G	16
Spurious Emissions, RX Mode, 9K-30M	22
Spurious Emissions, RX Mode, 30M-1G	24
Spurious Emissions, RX Mode, 1G-18G	26
Spurious Emissions, RX Mode, 18G-26.5G	28

Spurious Emissions, Band Edges, 2.35-2.5G

Low Channel (Hor)

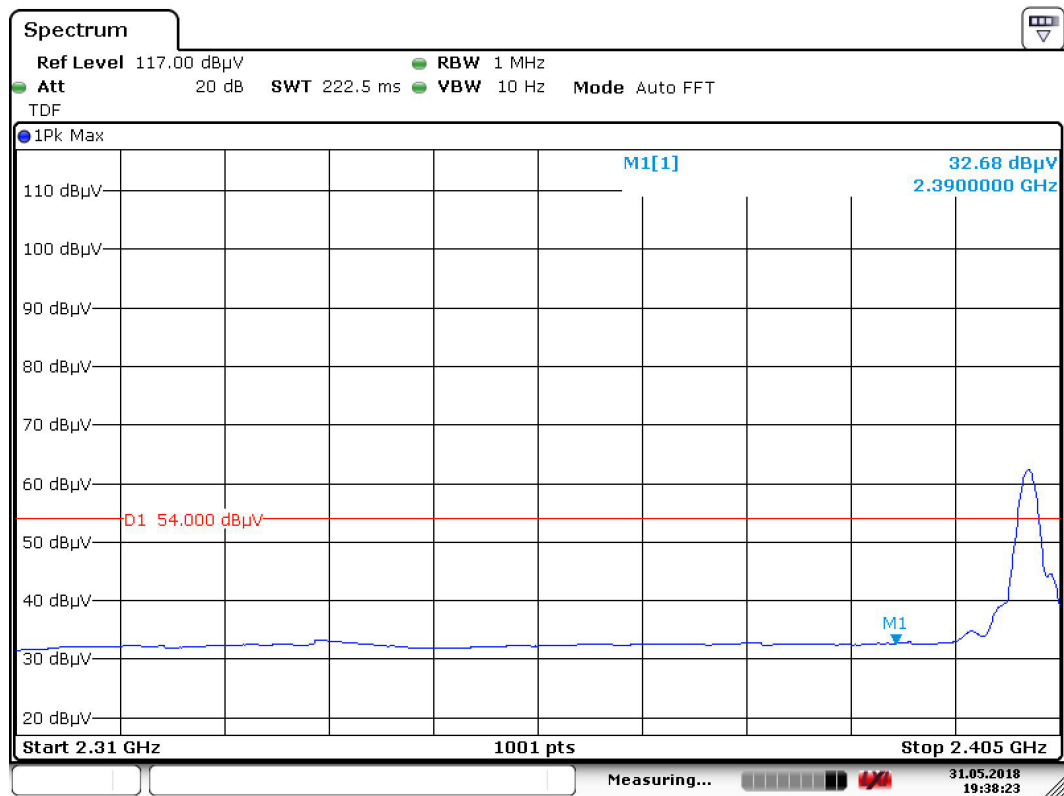


Date: 31.MAY.2018 19:38:22

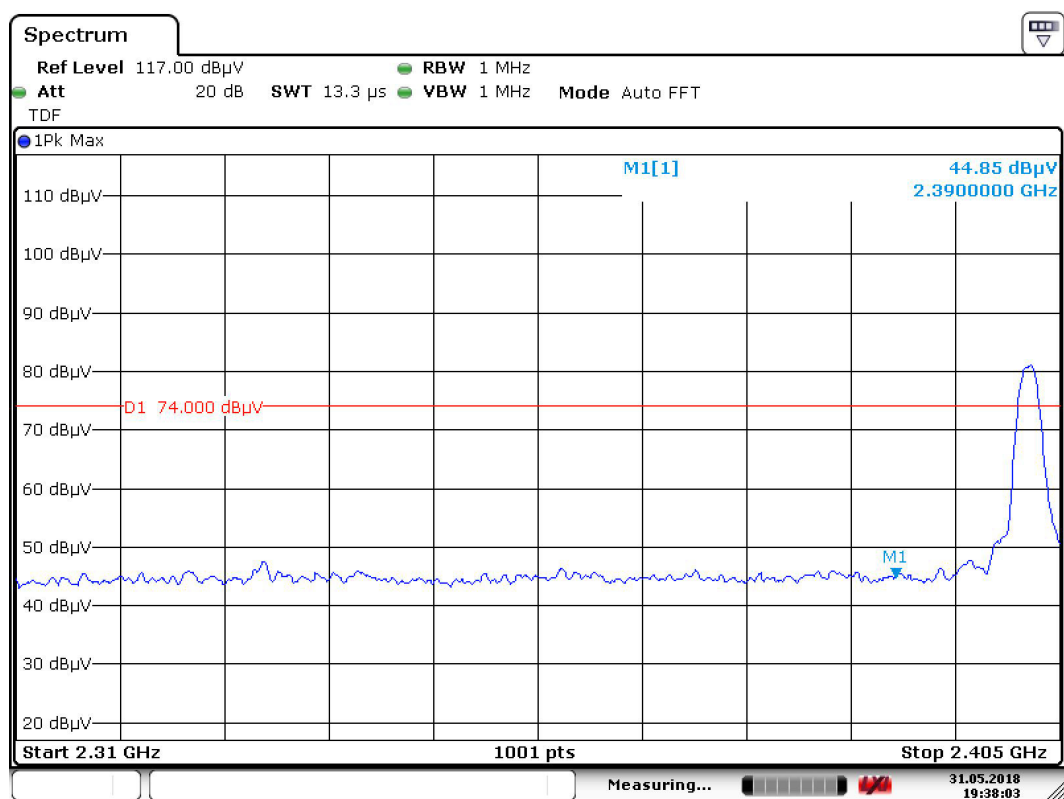


Date: 31.MAY.2018 19:38:02

Low Channel (Ver)

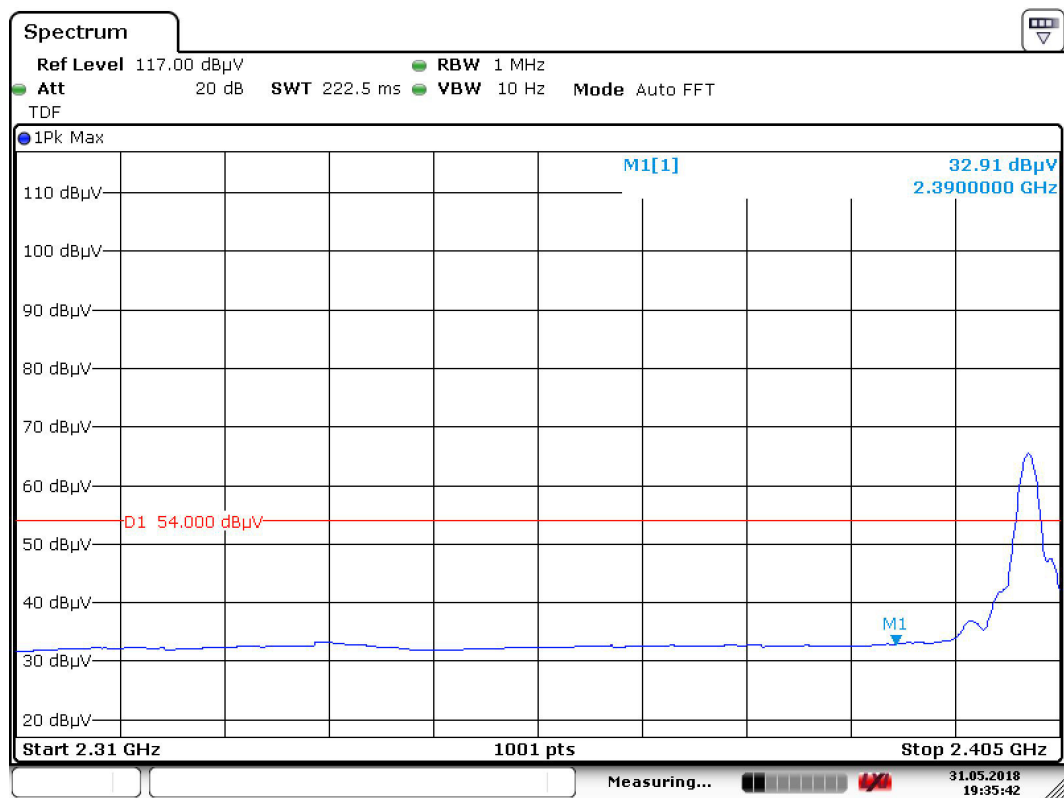


Date: 31.MAY.2018 19:35:42

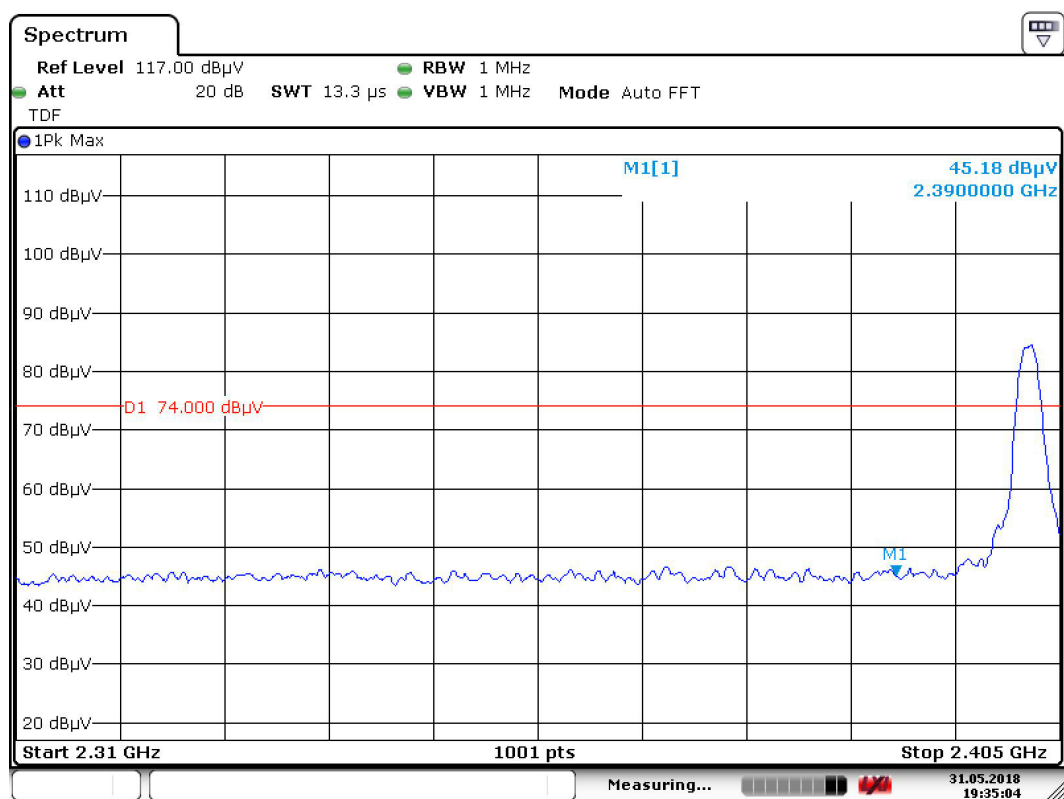


Date: 31.MAY.2018 19:35:04

High Channel (Hor)


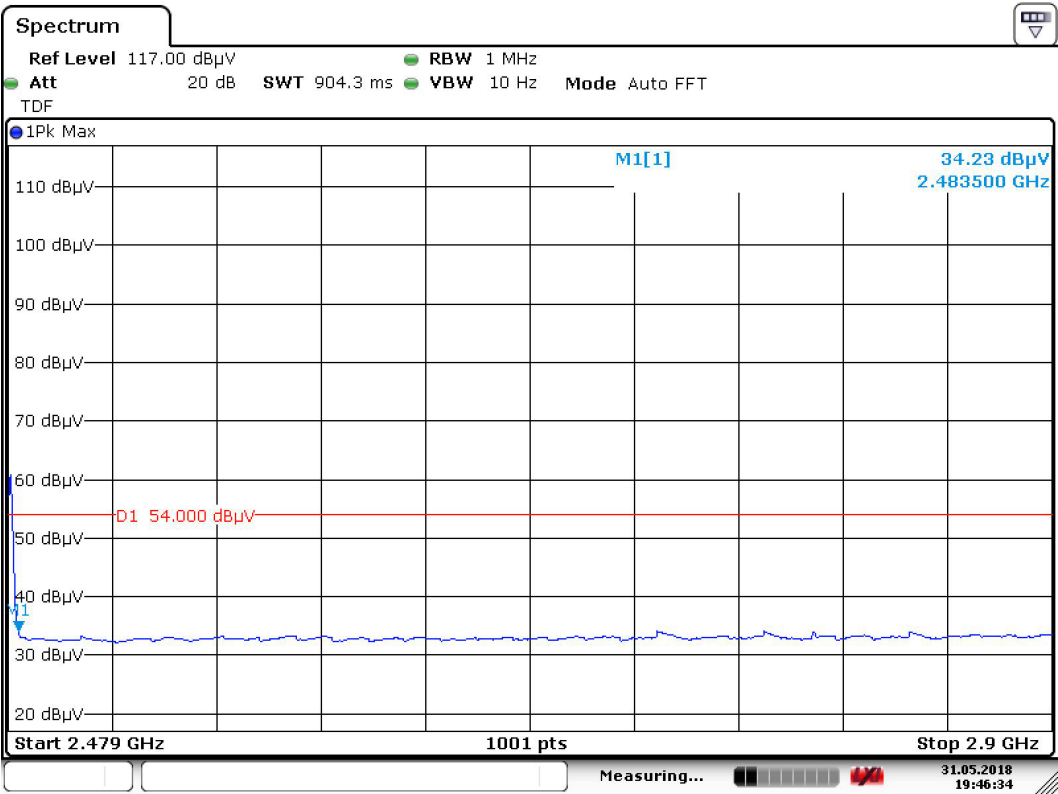


Date: 31.MAY.2018 19:46:33

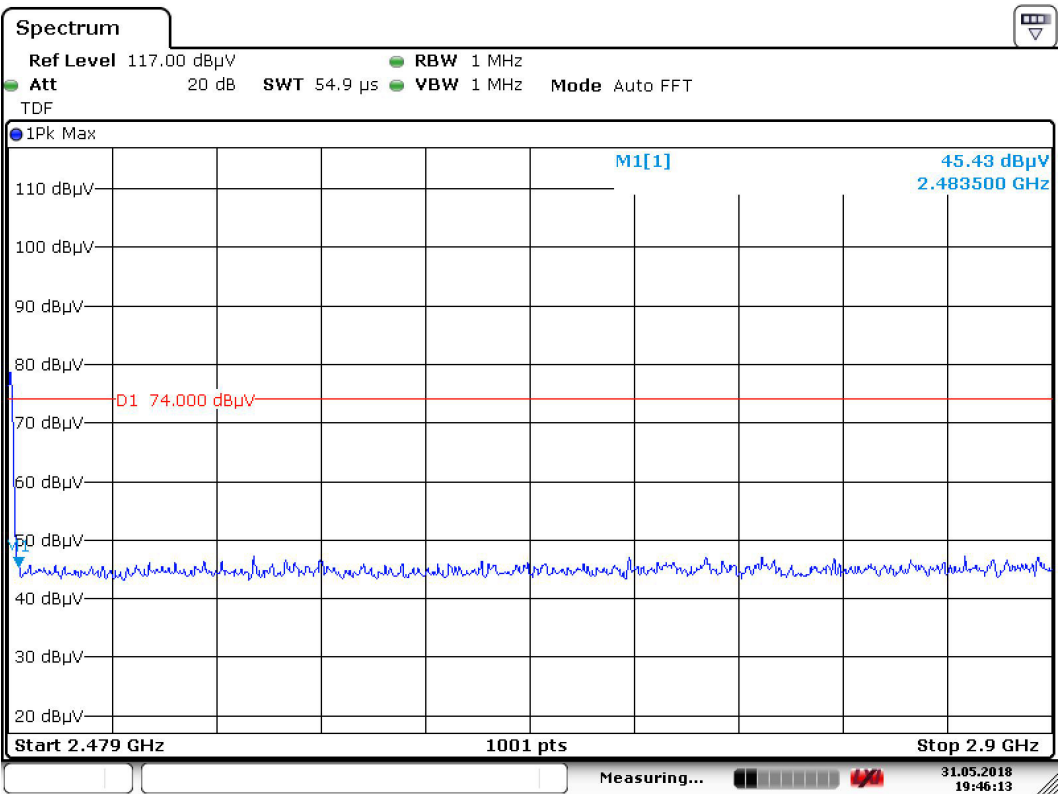

Date: 31.MAY.2018 19:46:13

High Channel (Ver)

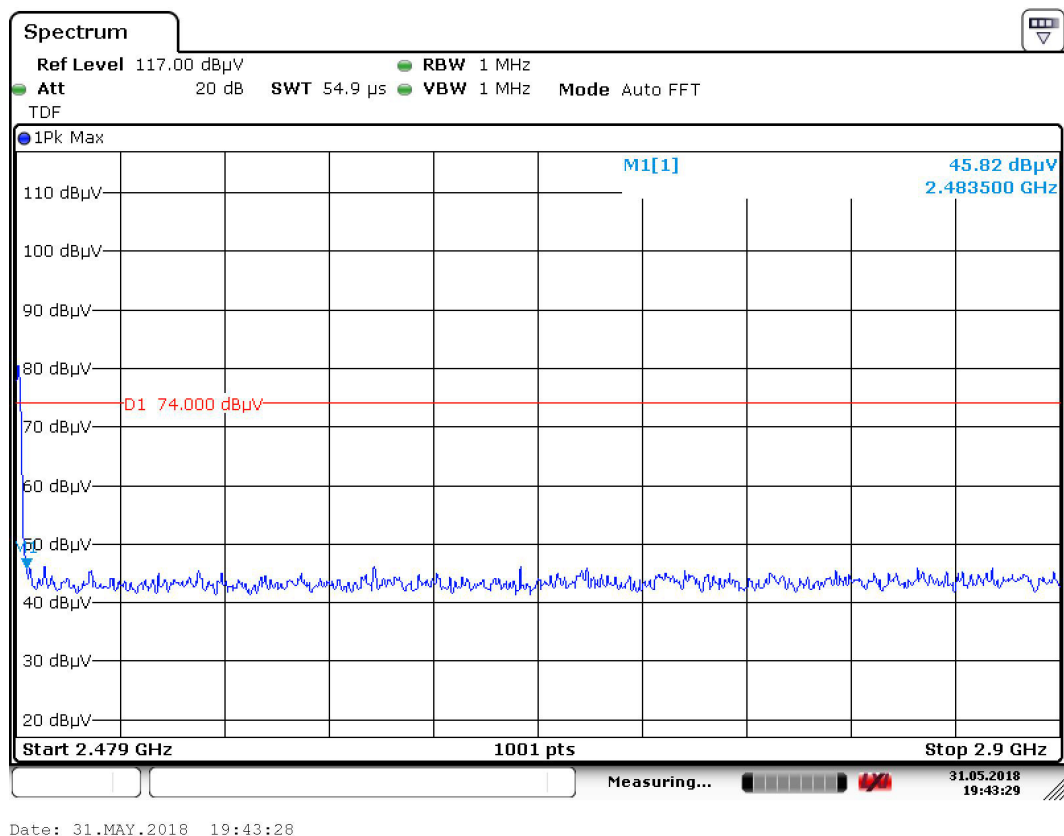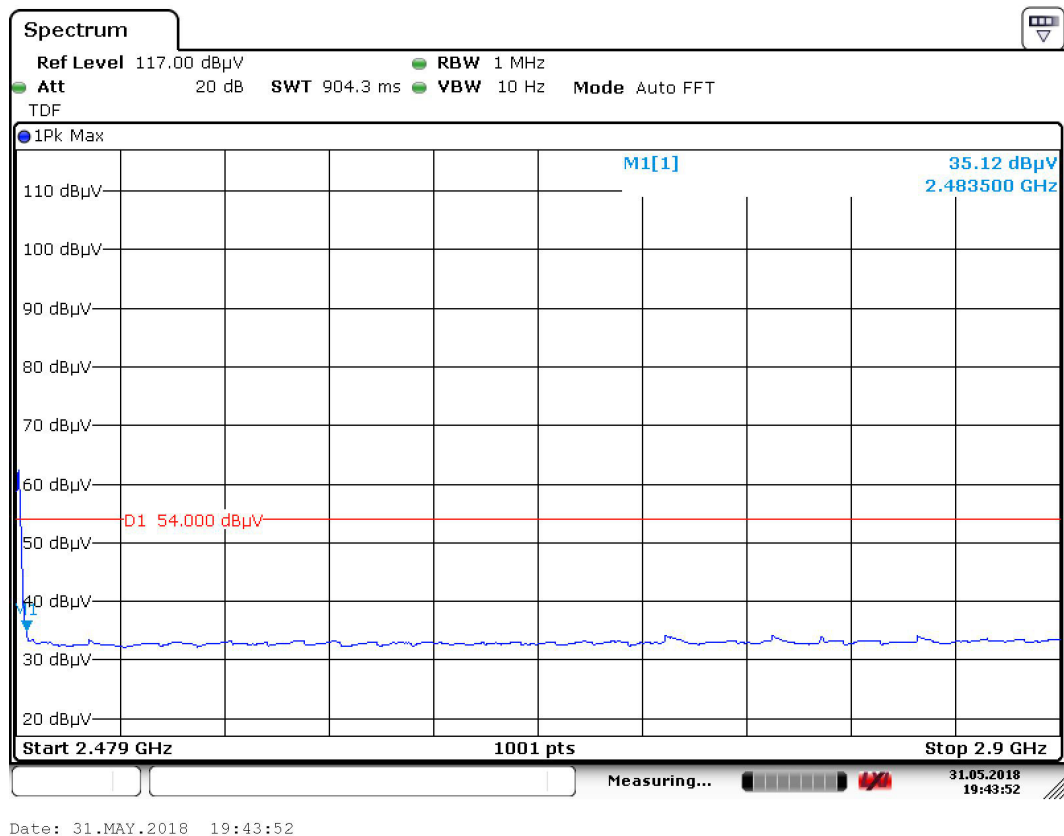


Spurious Emissions, TX Mode, 9K-30M



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

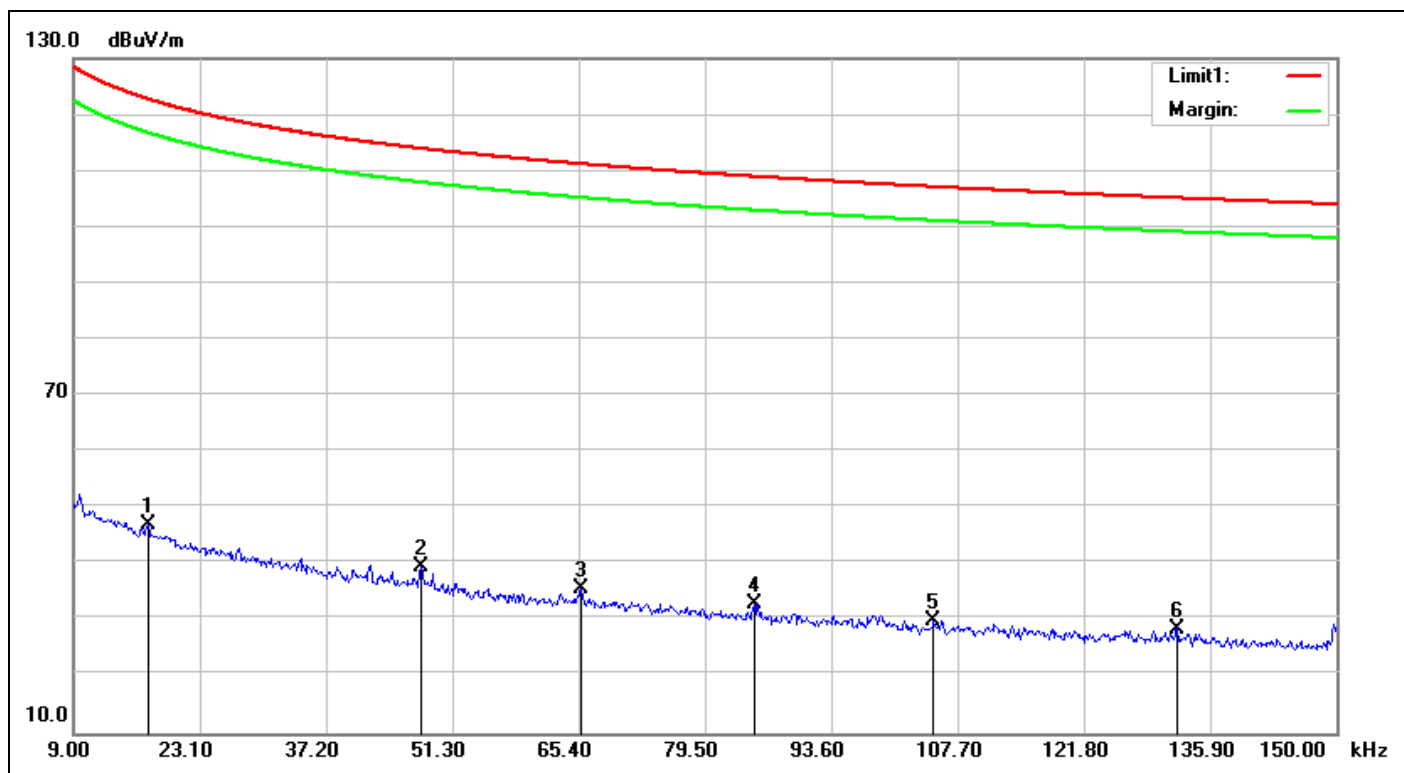

Service No.:	114070061	Test Distance:	3m
Test Standard:	FCC15.209_9k-1G_3m	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/31 21:44:30
Applicant:	Quitewin Technology Corporation	Test Rating:	DC 12V
Product:	Battcheck	Temp.(°C)/Hum.(%):	22.5(°C)/43%
Model No.:	BC-01	Test Engineer:	Kevin.Kuo
Test Mode:	TX-2440		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.0173	20.00	27.12	47.12	122.75	-75.63	QP	100	316	
2	0.0478	19.51	19.97	39.48	113.95	-74.47	QP	100	349	
3	0.0657	19.34	16.20	35.54	111.19	-75.65	QP	100	38	
4	0.0850	19.22	13.69	32.91	108.96	-76.05	QP	100	149	
5	0.1050	19.12	10.76	29.88	107.13	-77.25	QP	100	308	
6	0.1322	19.10	9.50	28.60	105.14	-76.54	QP	100	335	

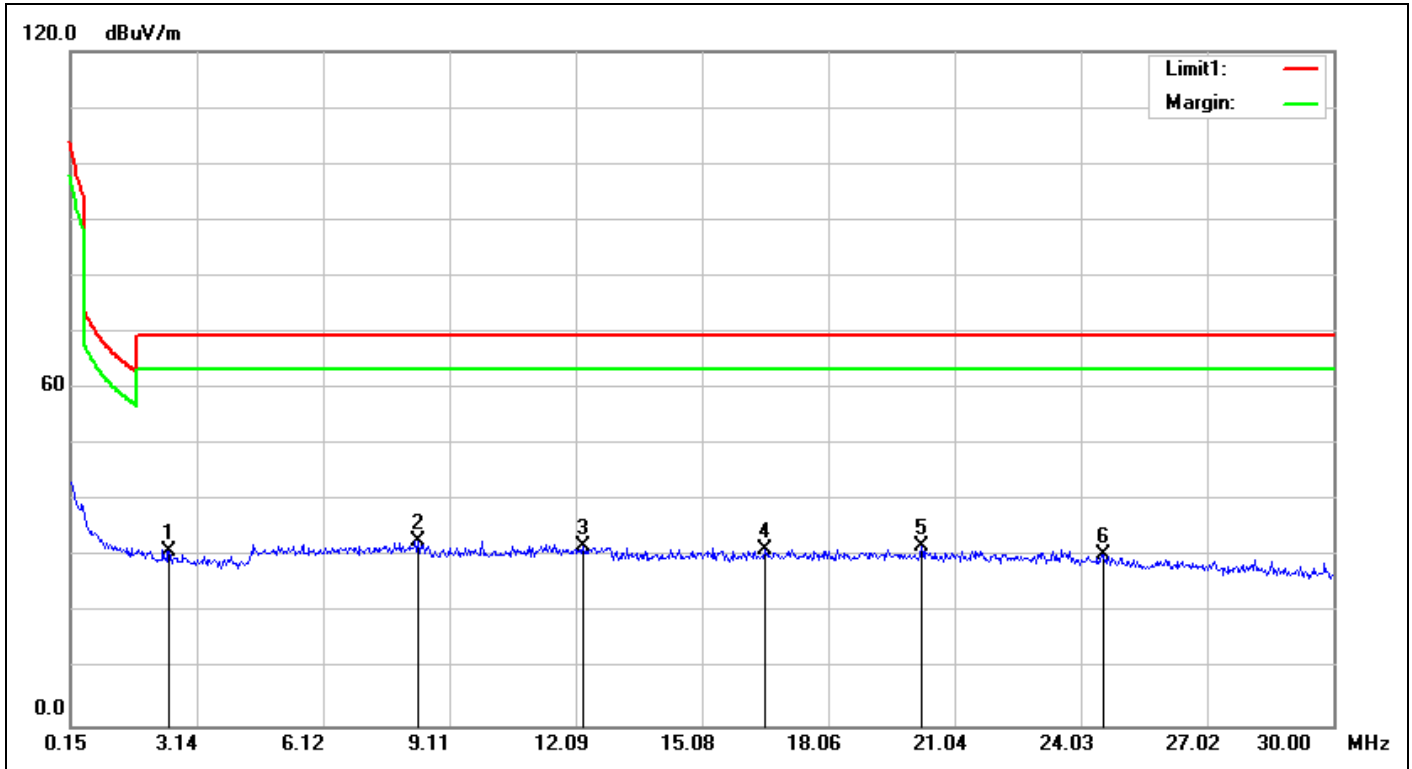

Service No.:	114070061	Test Distance:	3m
Test Standard:	FCC15.209_9k-1G_3m	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/31 21:46:09
Applicant:	Quitewin Technology Corporation	Test Rating:	DC 12V
Product:	Battcheck	Temp.(°C)/Hum.(%)	22.5(°C)/43%
Model No.:	BC-01	Test Engineer:	Kevin.Kuo
Test Mode:	TX-2440		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2.4782	18.64	12.40	31.04	69.50	-38.46	QP	100	192	
2	8.3588	20.07	12.88	32.95	69.50	-36.55	QP	100	349	
3	12.2691	20.62	11.35	31.97	69.50	-37.53	QP	100	95	
4	16.5674	21.38	9.87	31.25	69.50	-38.25	QP	100	52	
5	20.2689	22.01	9.86	31.87	69.50	-37.63	QP	100	30	
6	24.5673	22.28	8.12	30.40	69.50	-39.10	QP	100	200	


Spurious Emissions, TX Mode, 30M-1G



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

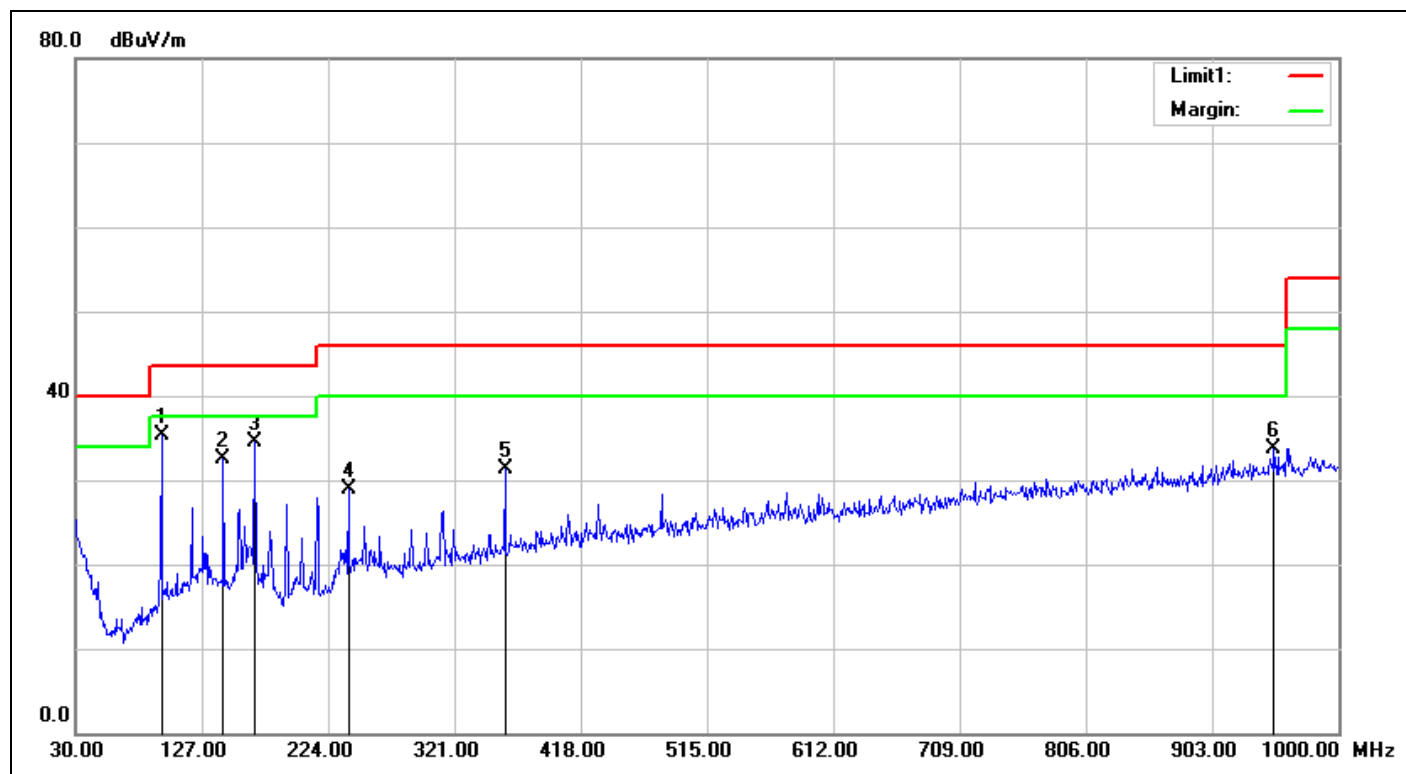

Service No.:	114070061	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/31 21:34:27
Applicant:	Quitewin Technology Corporation	Test Rating:	DC 12V
Product:	Battcheck	Temp.(°C)/Hum.(%)	22.5(°C)/43%
Model No.:	BC-01	Test Engineer:	Kevin.Kuo
Test Mode:	TX-2440		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	95.9599	-10.09	45.32	35.23	43.50	-8.27	QP	100	310	
2	143.4900	-7.12	39.68	32.56	43.50	-10.94	QP	100	296	
3	167.7400	-8.78	43.24	34.46	43.50	-9.04	QP	100	157	
4	239.5200	-6.85	35.67	28.82	46.00	-17.18	QP	100	218	
5	359.8000	-3.16	34.41	31.25	46.00	-14.75	QP	100	112	
6	950.5299	5.50	28.29	33.79	46.00	-12.21	QP	100	242	

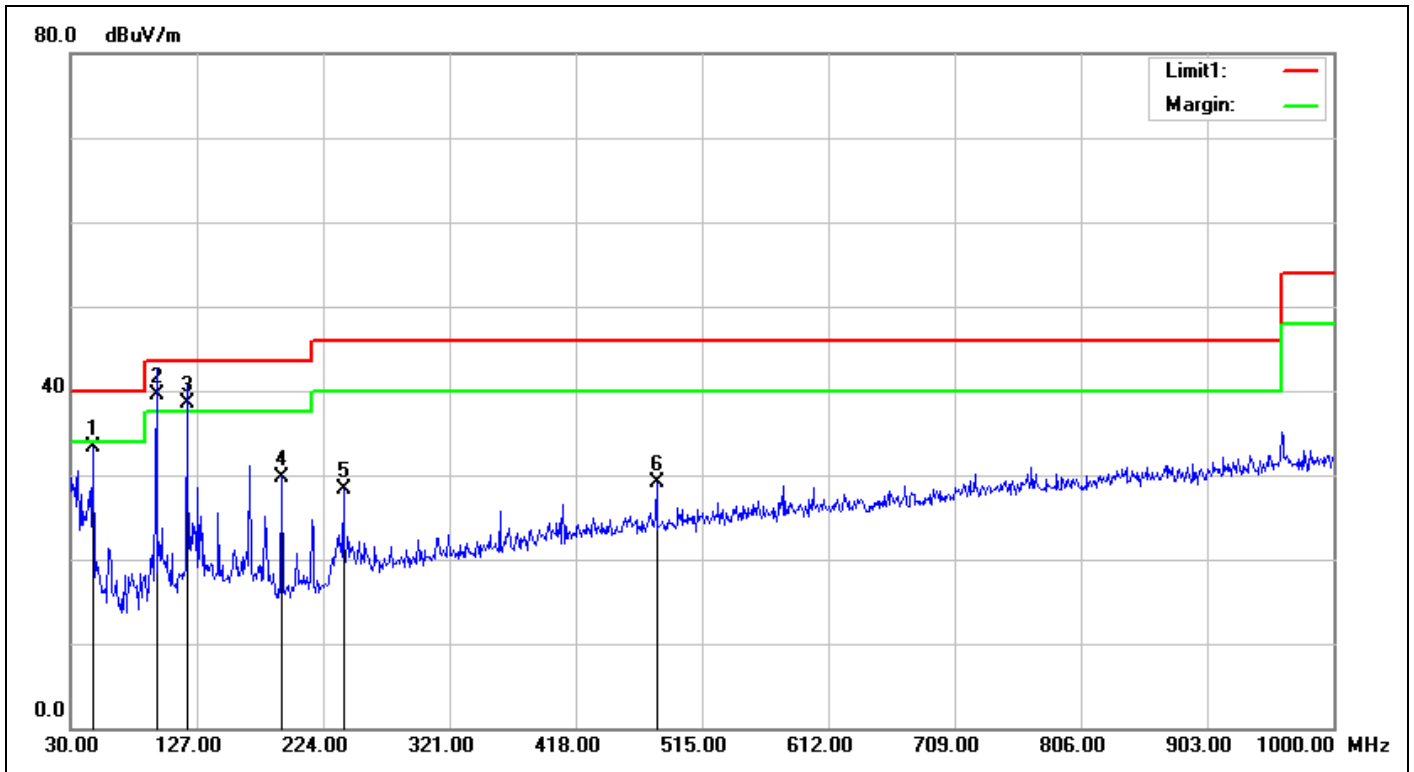

Service No.:	114070061	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/31 21:35:31
Applicant:	Quitewin Technology Corporation	Test Rating:	DC 12V
Product:	Battcheck	Temp.(°C)/Hum.(%)	22.5(°C)/43%
Model No.:	BC-01	Test Engineer:	Kevin.Kuo
Test Mode:	TX-2440		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	47.4600	-10.07	43.32	33.25	40.00	-6.75	QP	100	358	
2	95.9600	-10.09	49.65	39.56	43.50	-3.94	QP	100	224	
3	119.2400	-7.50	45.92	38.42	43.50	-5.08	QP	100	261	
4	191.9900	-9.42	39.22	29.80	43.50	-13.70	QP	100	81	
5	239.5200	-6.85	35.07	28.22	46.00	-17.78	QP	100	125	
6	480.0800	-1.47	30.54	29.07	46.00	-16.93	QP	100	286	


Spurious Emissions, TX Mode, 1G-18G



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

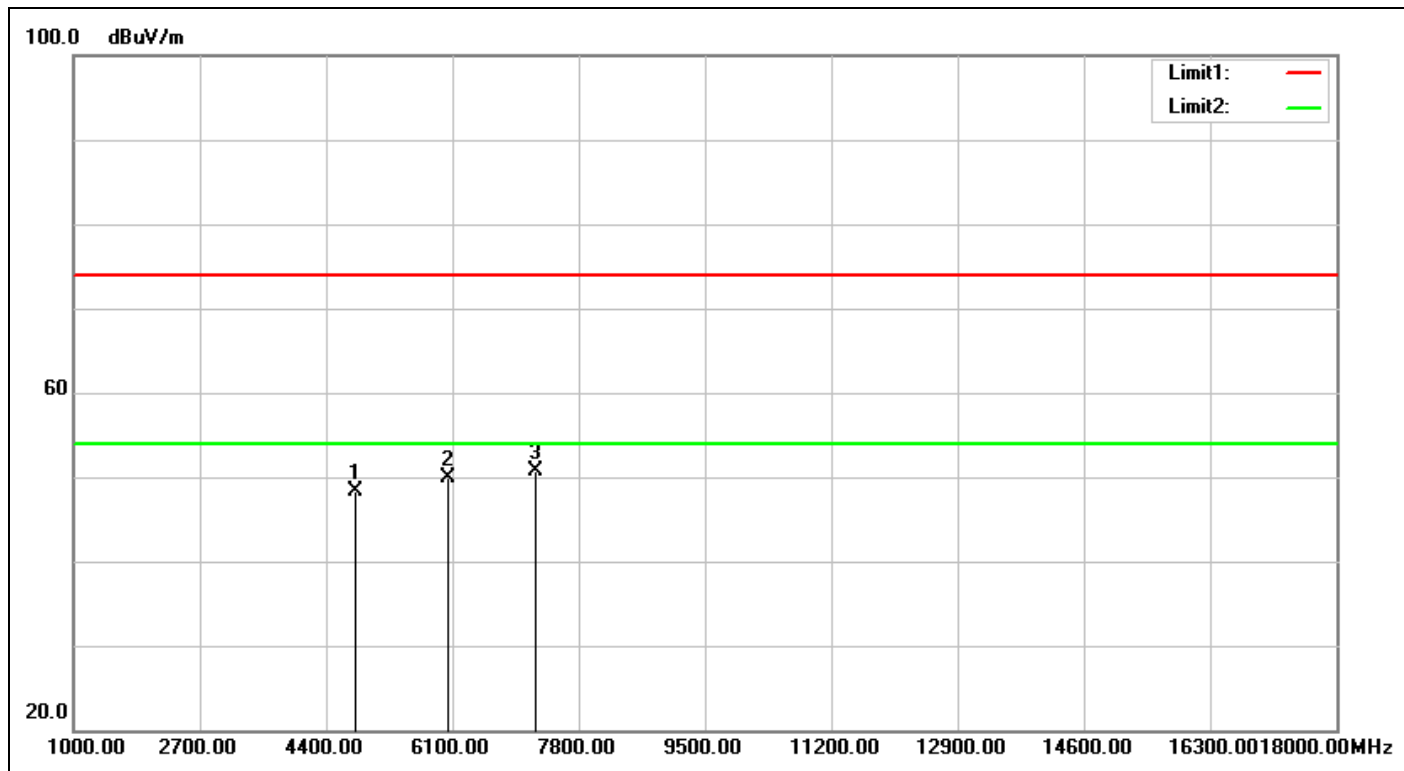


Service No.:	114070061	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/31 19:42:56
Applicant:	Quitewin Technology Corporation	Test Rating:	DC 12V
Product:	Battcheck	Temp.(°C)/Hum.(%)	22.5(°C)/43%
Model No.:	BC-01	Test Engineer:	Kevin.Kuo
Test Mode:	TX-2402		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4804.000	-2.98	51.32	48.34	74.00	-25.66	peak	100	166	
2	6032.000	3.42	46.45	49.87	74.00	-24.13	peak	100	110	
3	7206.000	5.19	45.42	50.61	74.00	-23.39	peak	100	217	

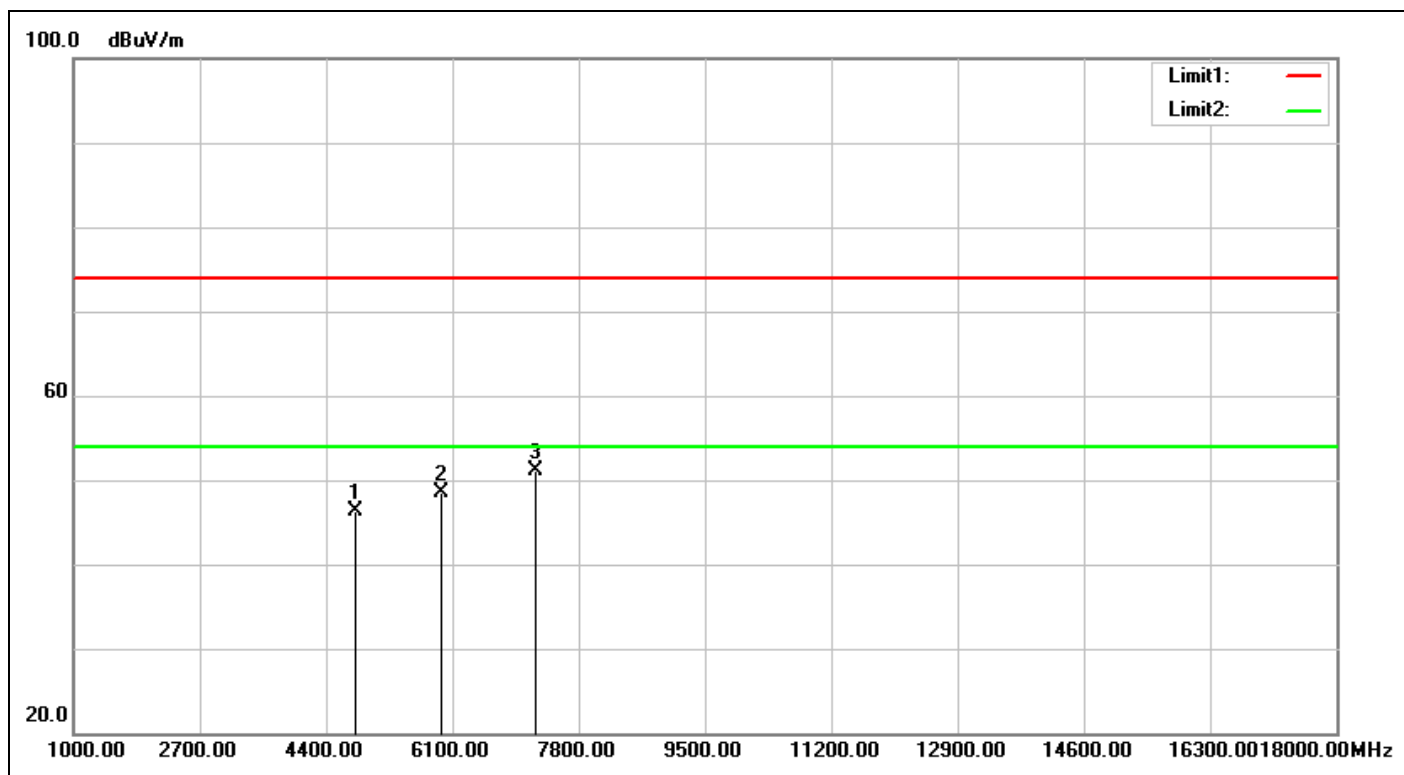


Service No.:	114070061	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/31 19:43:59
Applicant:	Quitewin Technology Corporation	Test Rating:	DC 12V
Product:	Battcheck	Temp.(°C)/Hum.(%)	22.5(°C)/43%
Model No.:	BC-01	Test Engineer:	Kevin.Kuo
Test Mode:	TX-2402		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4804.000	-2.98	49.35	46.37	74.00	-27.63	peak	100	12	
2	5947.000	2.95	45.63	48.58	74.00	-25.42	peak	100	236	
3	7206.000	5.19	45.99	51.18	74.00	-22.82	peak	100	253	

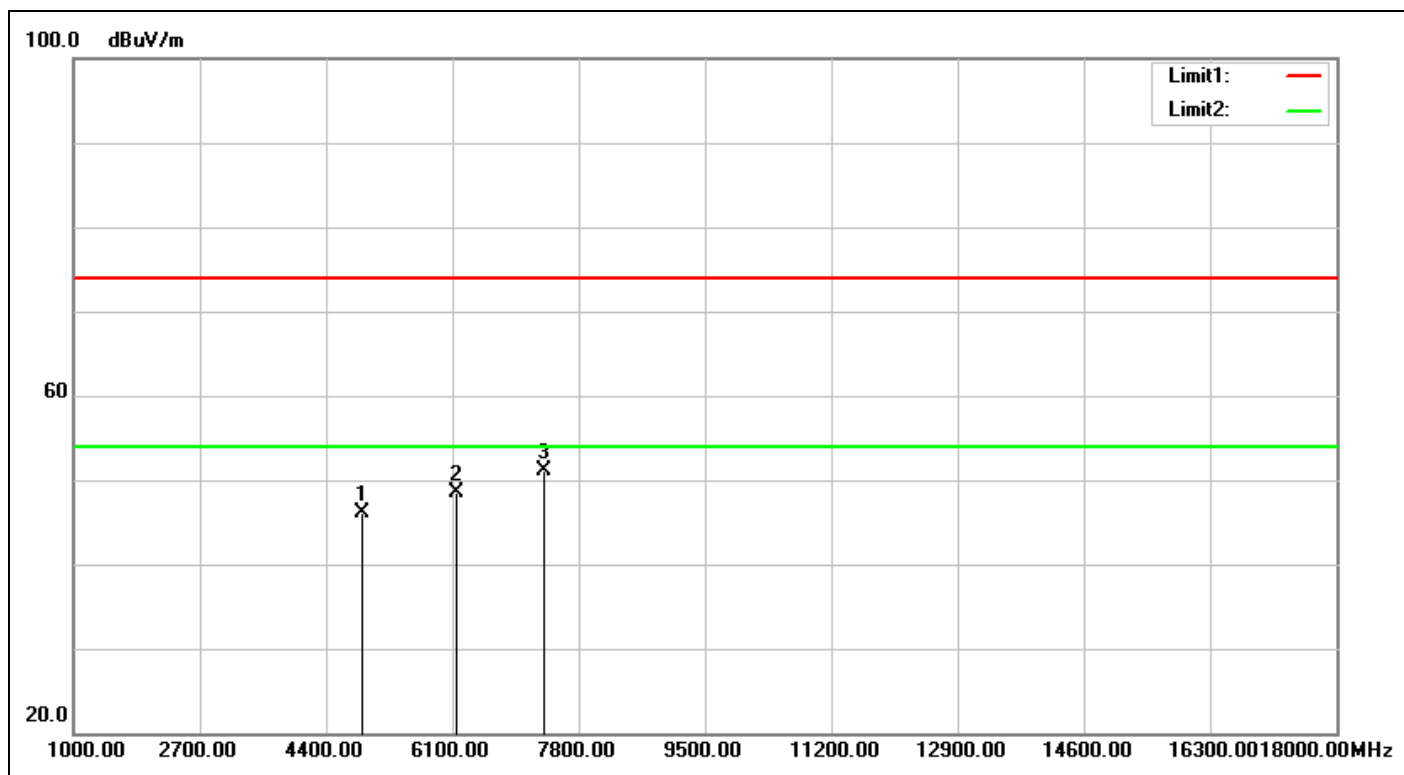


Service No.:	114070061	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/31 19:46:29
Applicant:	Quitewin Technology Corporation	Test Rating:	DC 12V
Product:	Battcheck	Temp.(°C)/Hum.(%):	22.5(°C)/43%
Model No.:	BC-01	Test Engineer:	Kevin.Kuo
Test Mode:	TX-2440		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4884.000	-2.76	48.77	46.01	74.00	-27.99	peak	100	66	
2	6151.000	3.89	44.63	48.52	74.00	-25.48	peak	100	293	
3	7326.000	5.52	45.60	51.12	74.00	-22.88	peak	100	103	

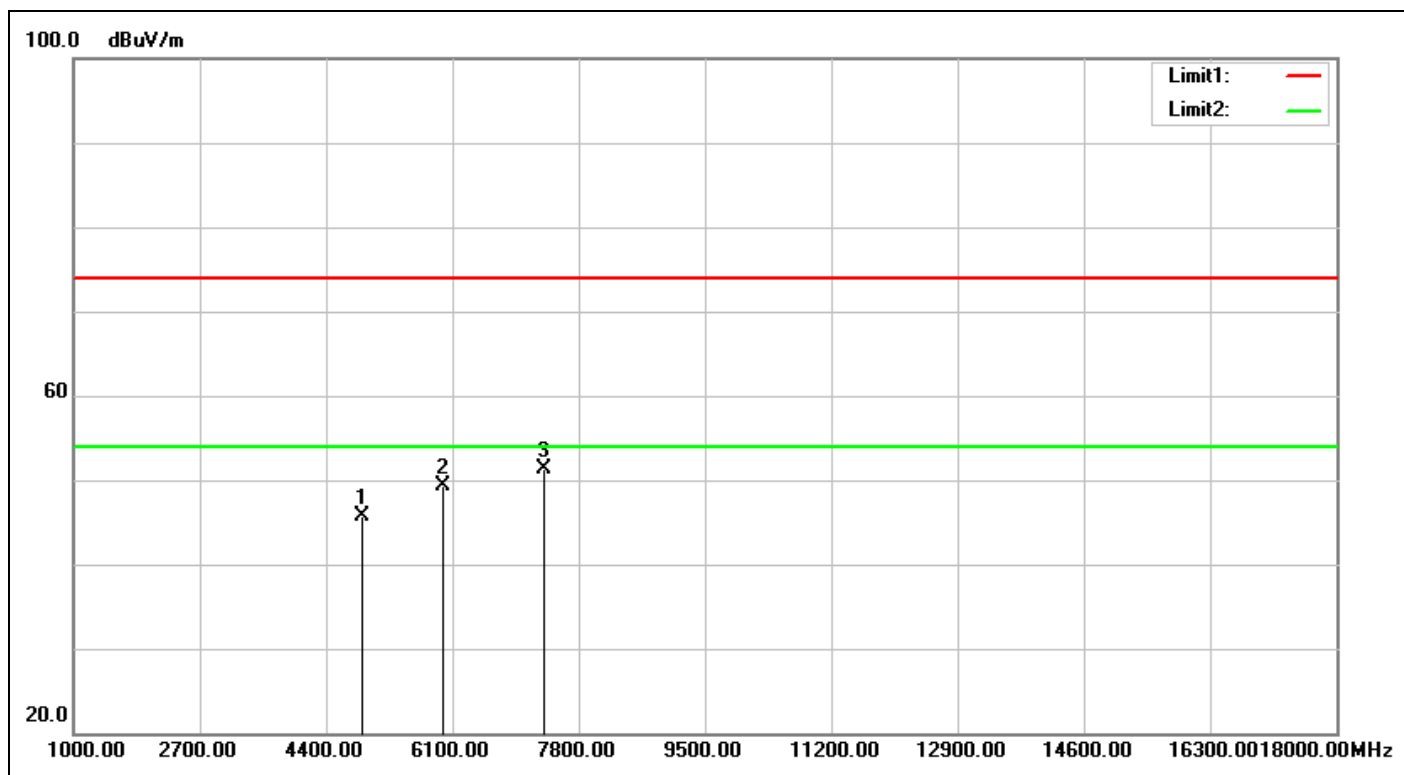


Service No.:	114070061	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/31 19:47:31
Applicant:	Quitewin Technology Corporation	Test Rating:	DC 12V
Product:	Battcheck	Temp.(°C)/Hum.(%)	22.5(°C)/43%
Model No.:	BC-01	Test Engineer:	Kevin.Kuo
Test Mode:	TX-2440		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4884.000	-2.76	48.38	45.62	74.00	-28.38	peak	100	133	
2	5981.000	3.17	46.14	49.31	74.00	-24.69	peak	100	139	
3	7326.000	5.52	45.83	51.35	74.00	-22.65	peak	100	208	

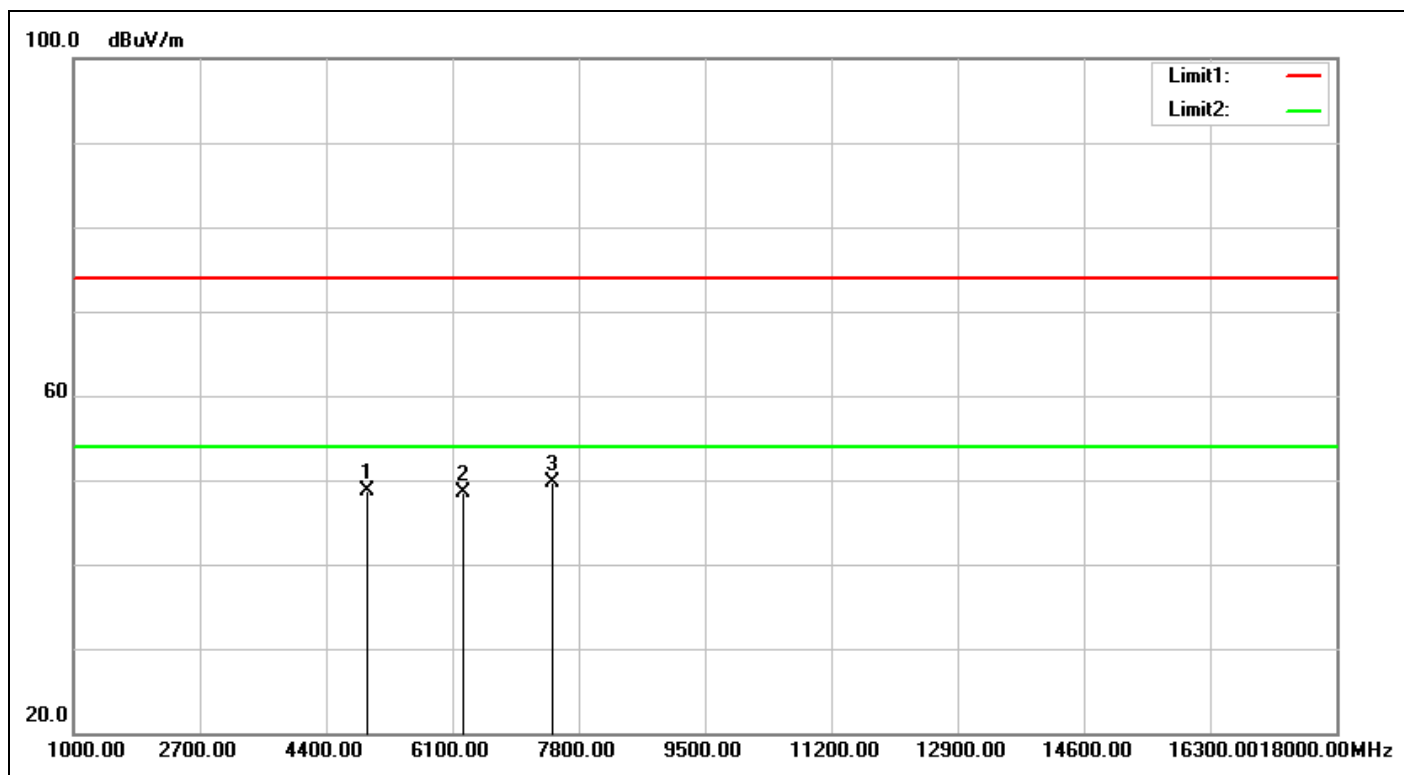

Service No.:	114070061	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/31 19:50:04
Applicant:	Quitewin Technology Corporation	Test Rating:	DC 12V
Product:	Battcheck	Temp.(°C)/Hum.(%)	22.5(°C)/43%
Model No.:	BC-01	Test Engineer:	Kevin.Kuo
Test Mode:	TX-2480		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4960.000	-2.57	51.25	48.68	74.00	-25.32	peak	100	104	
2	6236.000	4.23	44.32	48.55	74.00	-25.45	peak	100	102	
3	7440.000	5.83	43.90	49.73	74.00	-24.27	peak	100	59	

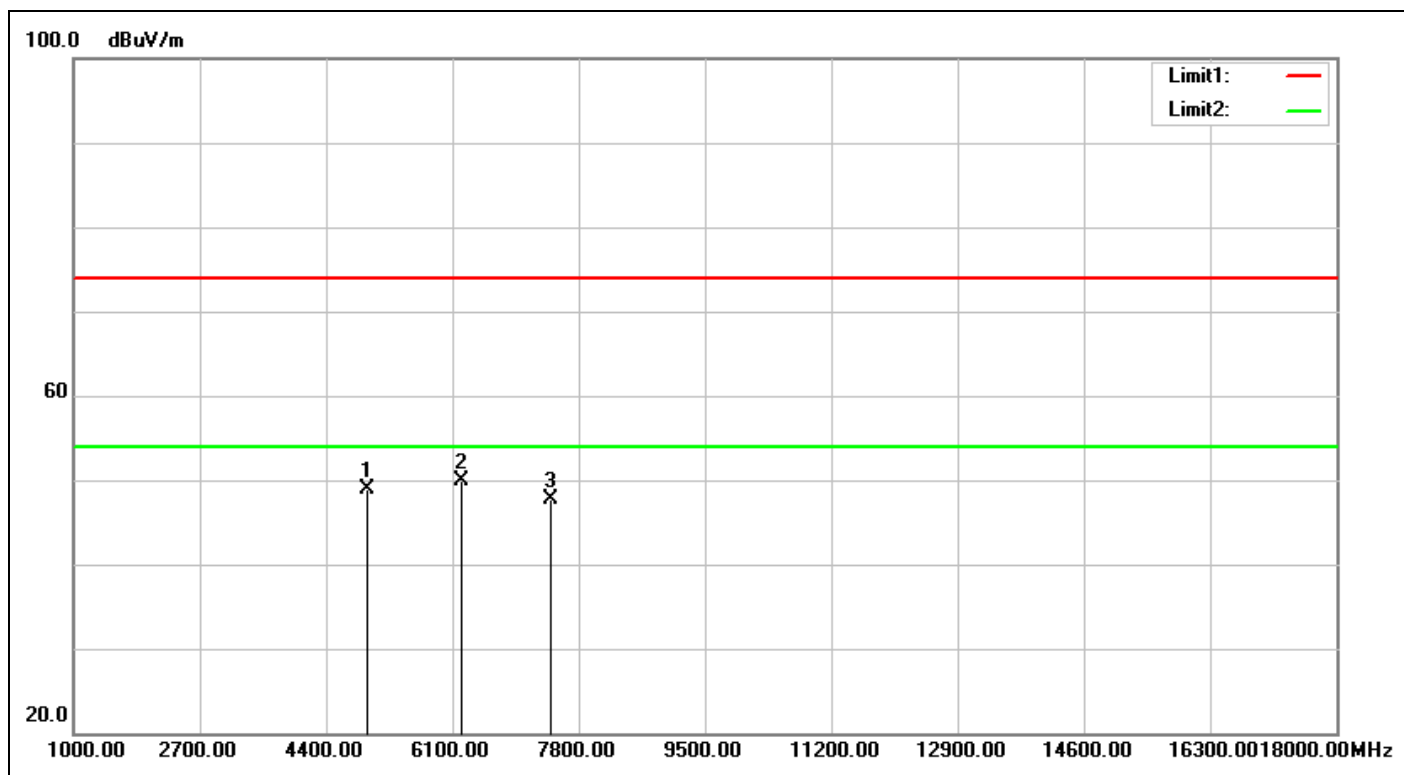

Service No.:	114070061	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/31 19:51:07
Applicant:	Quitewin Technology Corporation	Test Rating:	DC 12V
Product:	Battcheck	Temp.(°C)/Hum.(%)	22.5(°C)/43%
Model No.:	BC-01	Test Engineer:	Kevin.Kuo
Test Mode:	TX-2480		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4960.000	-2.57	51.38	48.81	74.00	-25.19	peak	100	136	
2	6219.000	4.16	45.83	49.99	74.00	-24.01	peak	100	26	
3	7440.000	5.83	41.94	47.77	74.00	-26.23	peak	100	211	


Spurious Emissions, TX Mode, 18G-26.5G



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

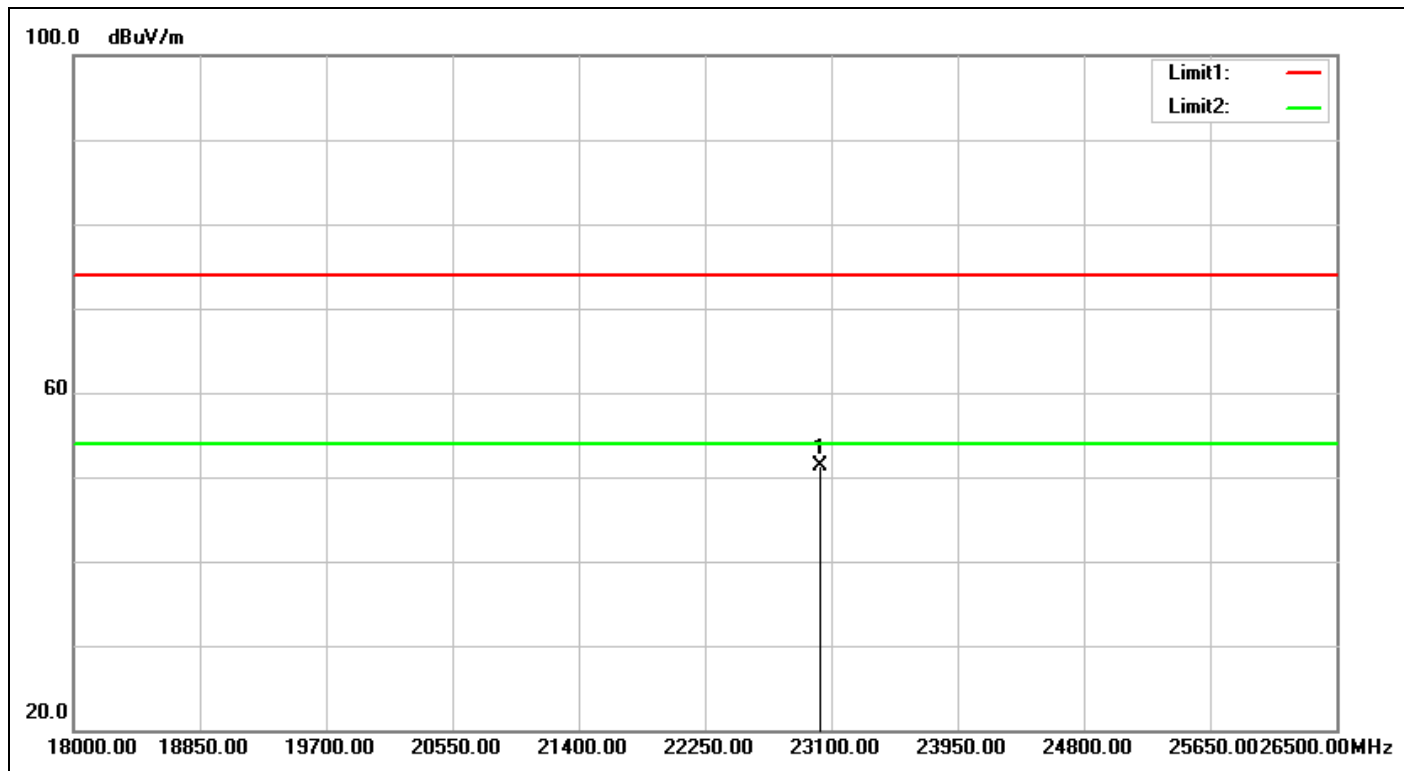


Service No.:	114070061	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/31 20:02:32
Applicant:	Quitewin Technology Corporation	Test Rating:	DC 12V
Product:	Battcheck	Temp.(°C)/Hum.(%)	22.5(°C)/43%
Model No.:	BC-01	Test Engineer:	Kevin.Kuo
Test Mode:	TX-2402		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	23023.500	32.82	18.43	51.25	74.00	-22.75	peak	100	334	

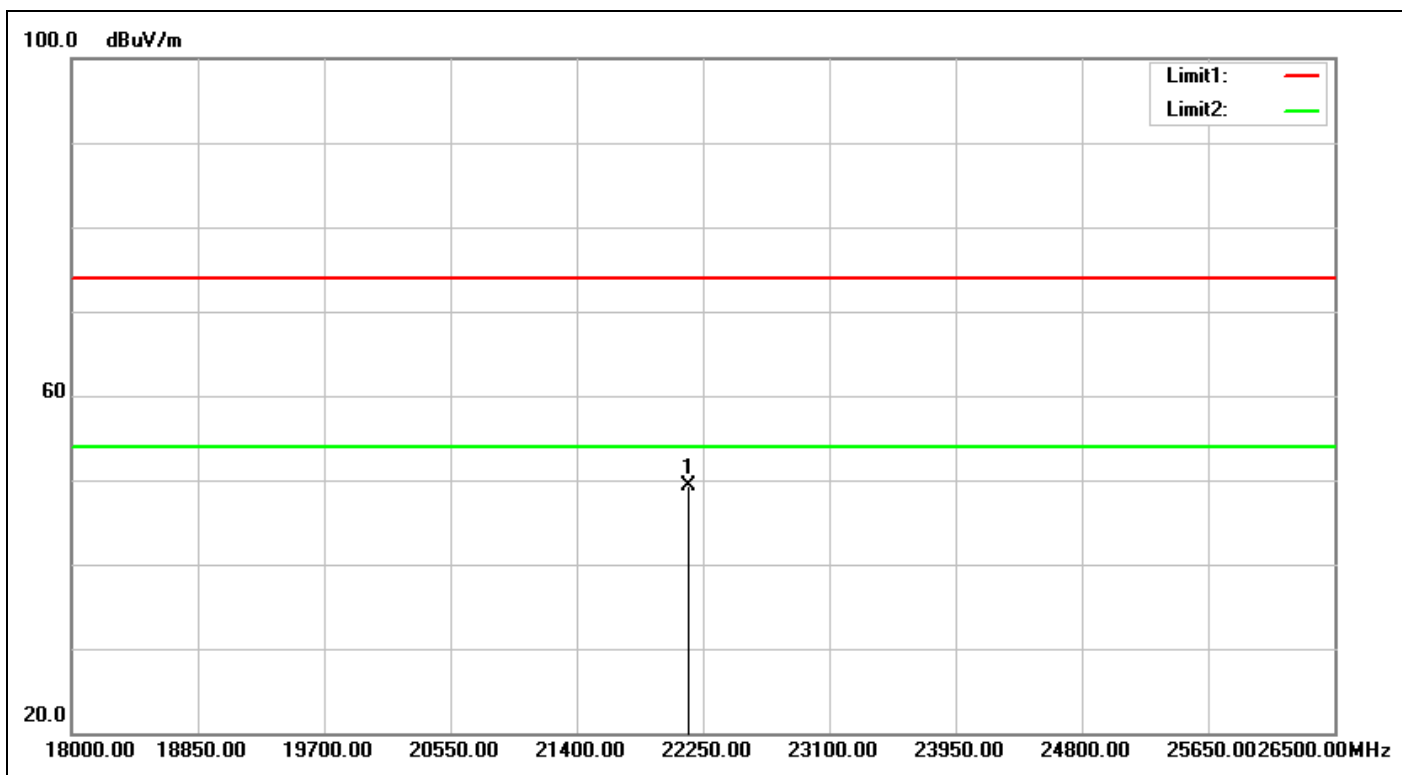


Service No.:	114070061	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/31 20:03:35
Applicant:	Quitewin Technology Corporation	Test Rating:	DC 12V
Product:	Battcheck	Temp.(°C)/Hum.(%):	22.5(°C)/43%
Model No.:	BC-01	Test Engineer:	Kevin.Kuo
Test Mode:	TX-2402		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22156.500	32.61	16.73	49.34	74.00	-24.66	peak	100	84	

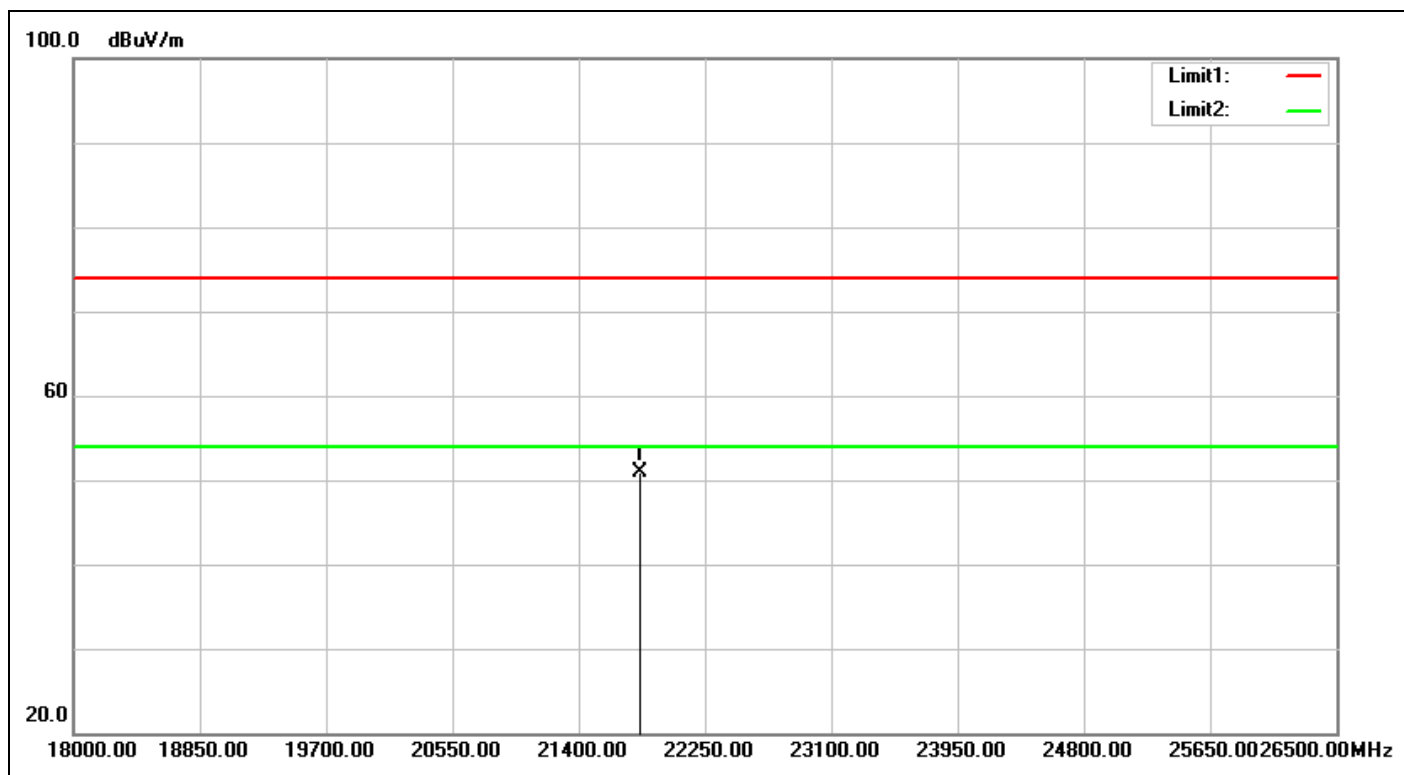


Service No.:	114070061	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/31 20:13:26
Applicant:	Quitewin Technology Corporation	Test Rating:	DC 12V
Product:	Battcheck	Temp.(°C)/Hum.(%):	22.5(°C)/43%
Model No.:	BC-01	Test Engineer:	Kevin.Kuo
Test Mode:	TX-2440		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21808.000	32.70	18.26	50.96	74.00	-23.04	peak	100	222	

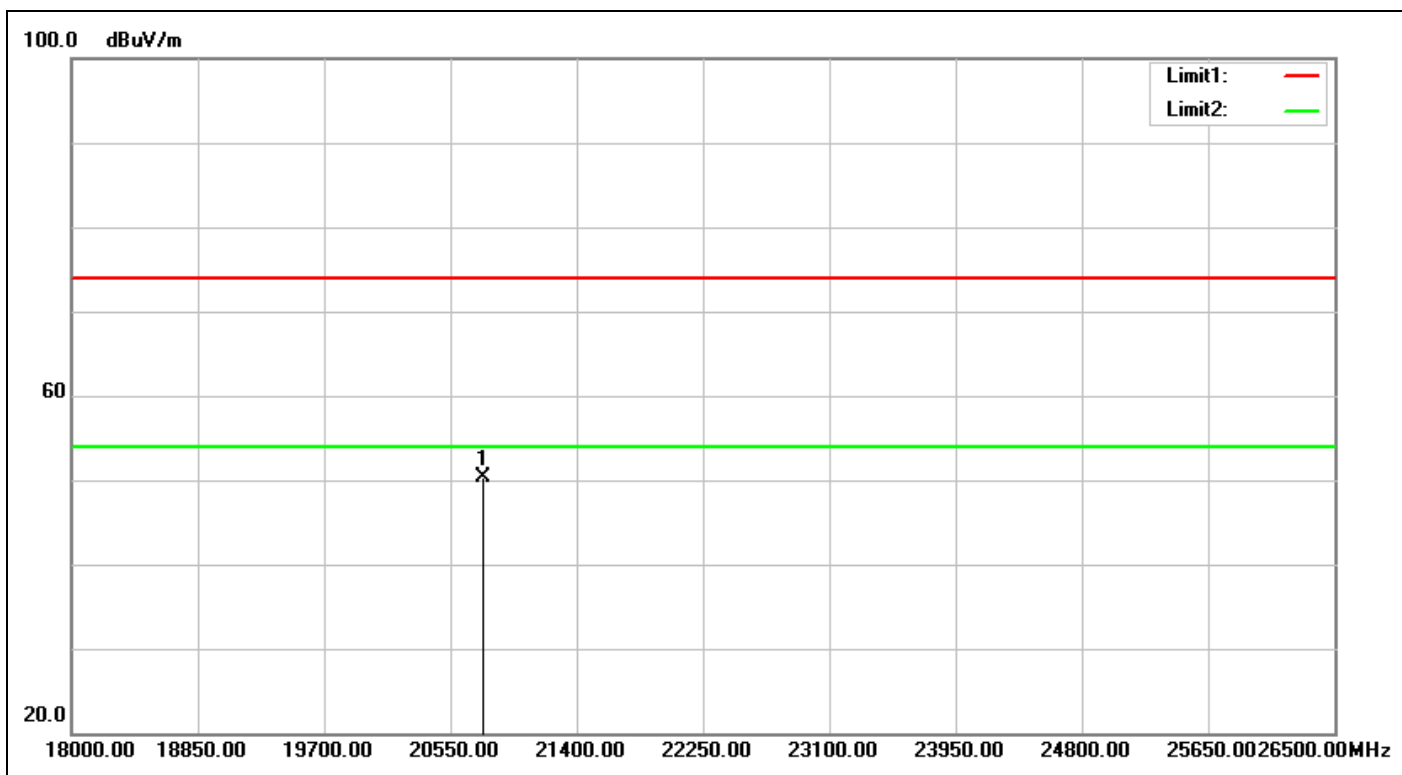


Service No.:	114070061	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/31 20:14:29
Applicant:	Quitewin Technology Corporation	Test Rating:	DC 12V
Product:	Battcheck	Temp.(°C)/Hum.(%):	22.5(°C)/43%
Model No.:	BC-01	Test Engineer:	Kevin.Kuo
Test Mode:	TX-2440		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20771.000	31.96	18.35	50.31	74.00	-23.69	peak	100	13	

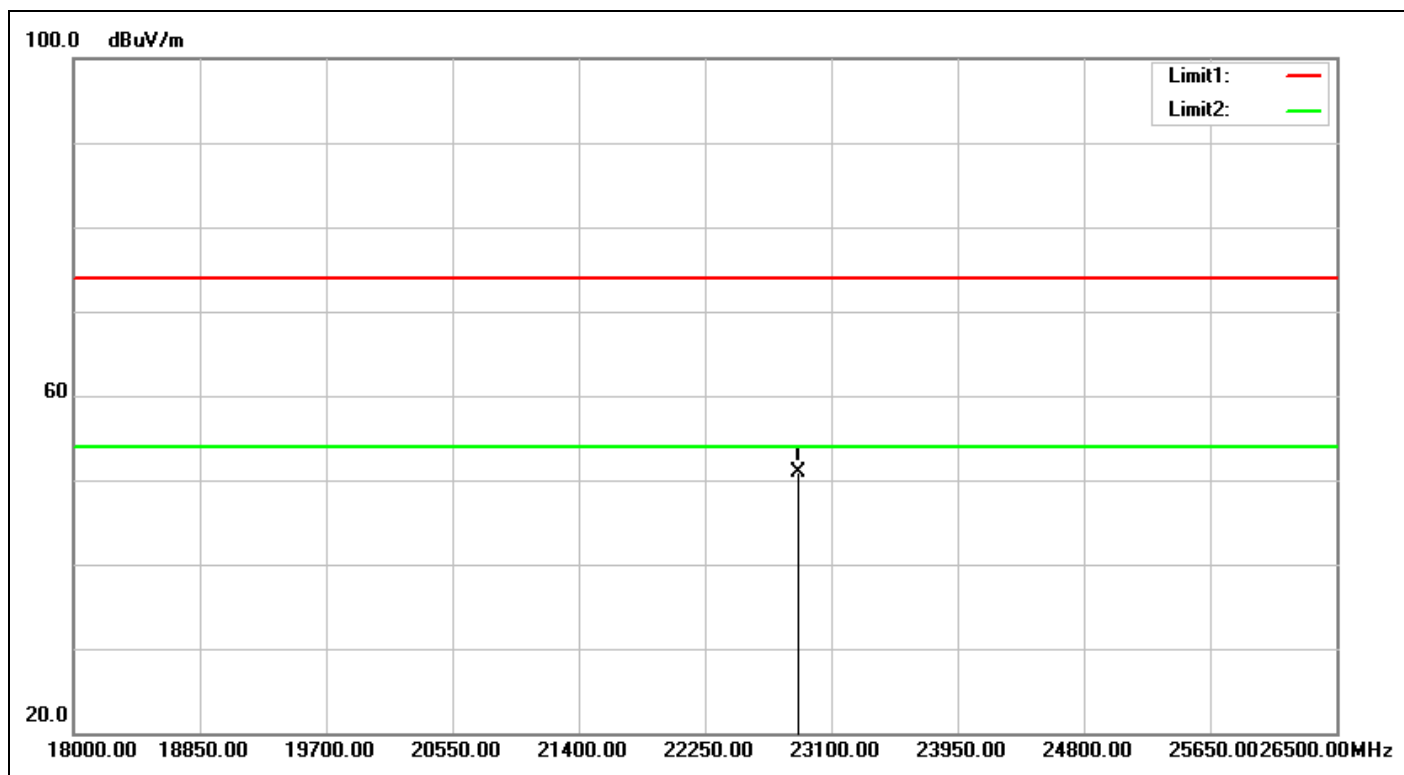

Service No.:	114070061	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/31 20:17:06
Applicant:	Quitewin Technology Corporation	Test Rating:	DC 12V
Product:	Battcheck	Temp.(°C)/Hum.(%):	22.5(°C)/43%
Model No.:	BC-01	Test Engineer:	Kevin.Kuo
Test Mode:	TX-2480		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22879.000	32.76	18.21	50.97	74.00	-23.03	peak	100	255	

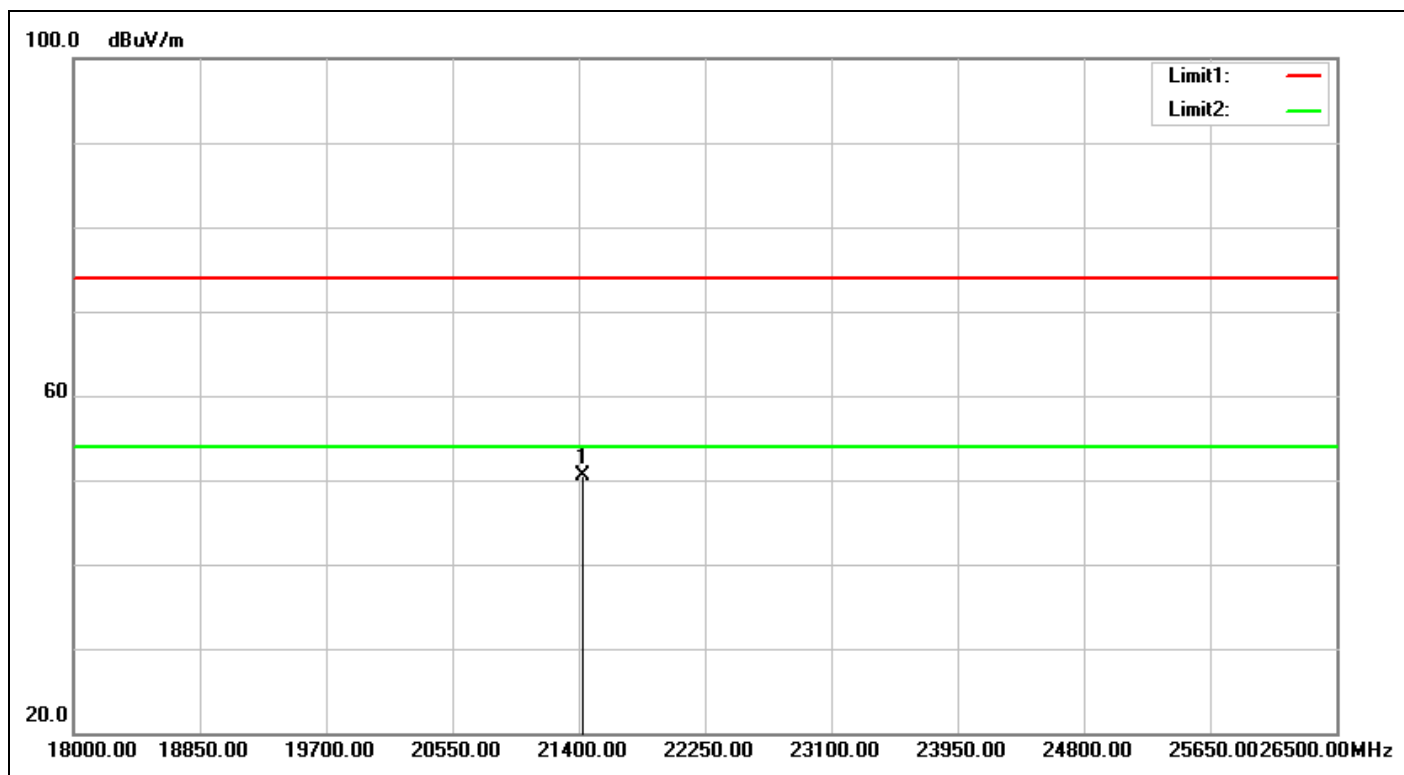

Service No.:	114070061	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/31 20:18:09
Applicant:	Quitewin Technology Corporation	Test Rating:	DC 12V
Product:	Battcheck	Temp.(°C)/Hum.(%):	22.5(°C)/43%
Model No.:	BC-01	Test Engineer:	Kevin.Kuo
Test Mode:	TX-2480		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21425.500	32.82	17.75	50.57	74.00	-23.43	peak	100	315	


Spurious Emissions, RX Mode, 9K-30M



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

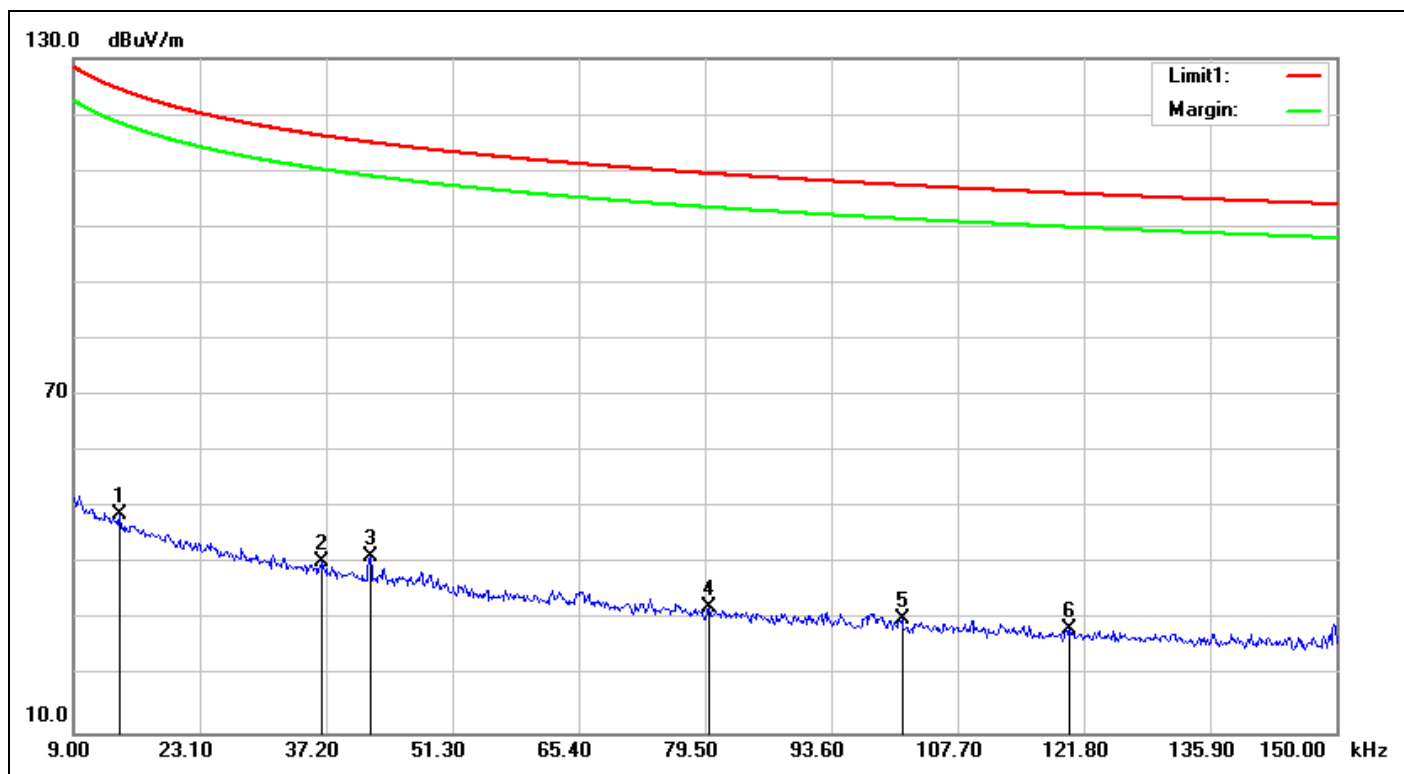

Service No.:	114070061	Test Distance:	3m
Test Standard:	FCC15.209_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2018/5/31 21:49:49
Applicant:	Quitewin Technology Corporation	Test Rating:	DC 12V
Product:	Battcheck	Temp.(°C)/Hum.(%)	22.5(°C)/43%
Model No.:	BC-01	Test Engineer:	Kevin.Kuo
Test Mode:	RX-2440		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.0141	19.97	28.86	48.83	124.52	-75.69	QP	100	206	
2	0.0368	19.89	20.47	40.36	116.21	-75.85	QP	100	136	
3	0.0421	19.71	21.77	41.48	115.05	-73.57	QP	100	221	
4	0.0799	19.25	13.03	32.28	109.50	-77.22	QP	100	108	
5	0.1015	19.13	11.11	30.24	107.43	-77.19	QP	100	35	
6	0.1202	19.11	9.44	28.55	105.96	-77.41	QP	100	12	

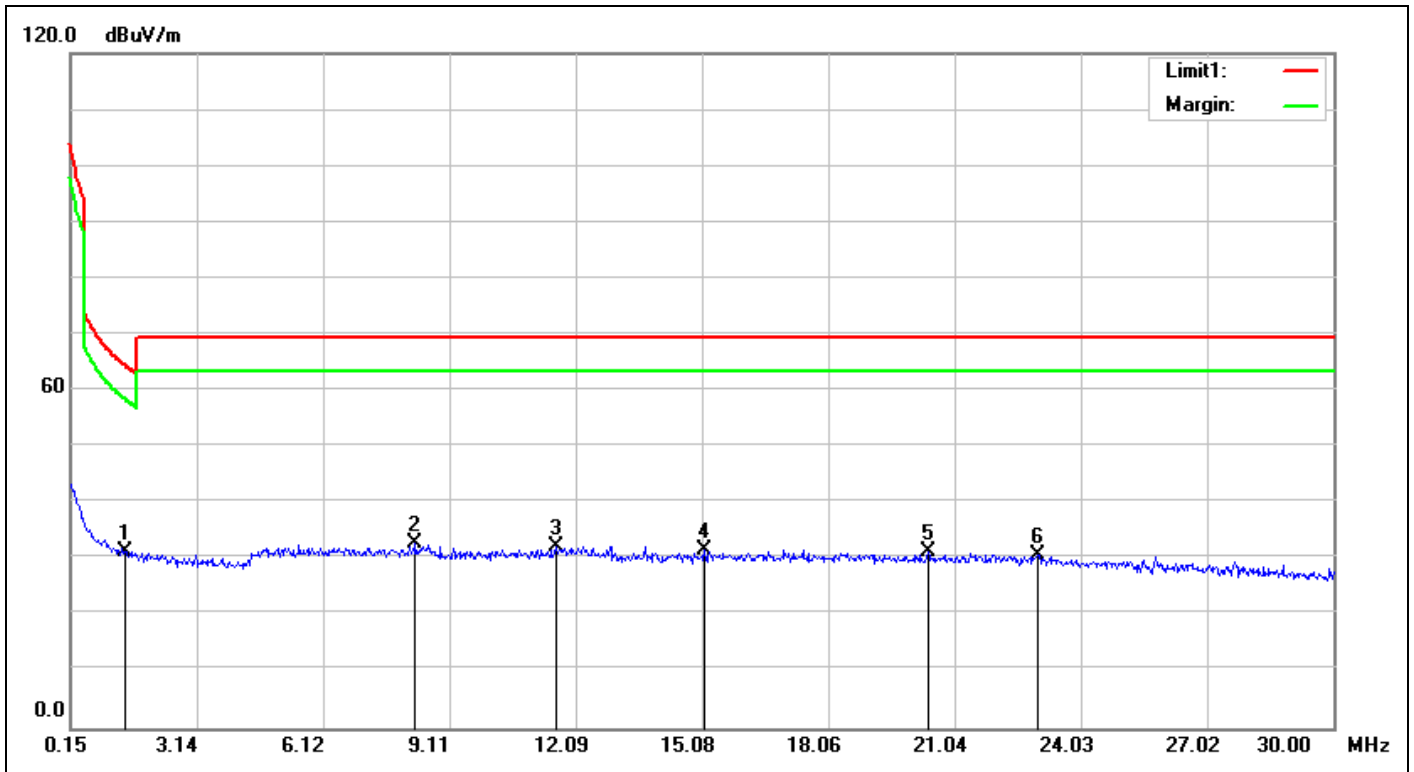

Service No.:	114070061	Test Distance:	3m
Test Standard:	FCC15.209_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2018/5/31 21:48:03
Applicant:	Quitewin Technology Corporation	Test Rating:	DC 12V
Product:	Battcheck	Temp.(°C)/Hum.(%)	22.5(°C)/43%
Model No.:	BC-01	Test Engineer:	Kevin.Kuo
Test Mode:	RX-2440		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1.4336	18.88	12.52	31.40	64.50	-33.10	QP	100	30	
2	8.2990	20.06	12.94	33.00	69.50	-36.50	QP	100	146	
3	11.6124	20.50	11.85	32.35	69.50	-37.15	QP	100	211	
4	15.1347	21.12	10.60	31.72	69.50	-37.78	QP	100	6	
5	20.4182	22.01	9.31	31.32	69.50	-38.18	QP	100	119	
6	23.0151	22.18	8.53	30.71	69.50	-38.79	QP	100	19	


Spurious Emissions, RX Mode, 30M-1G



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

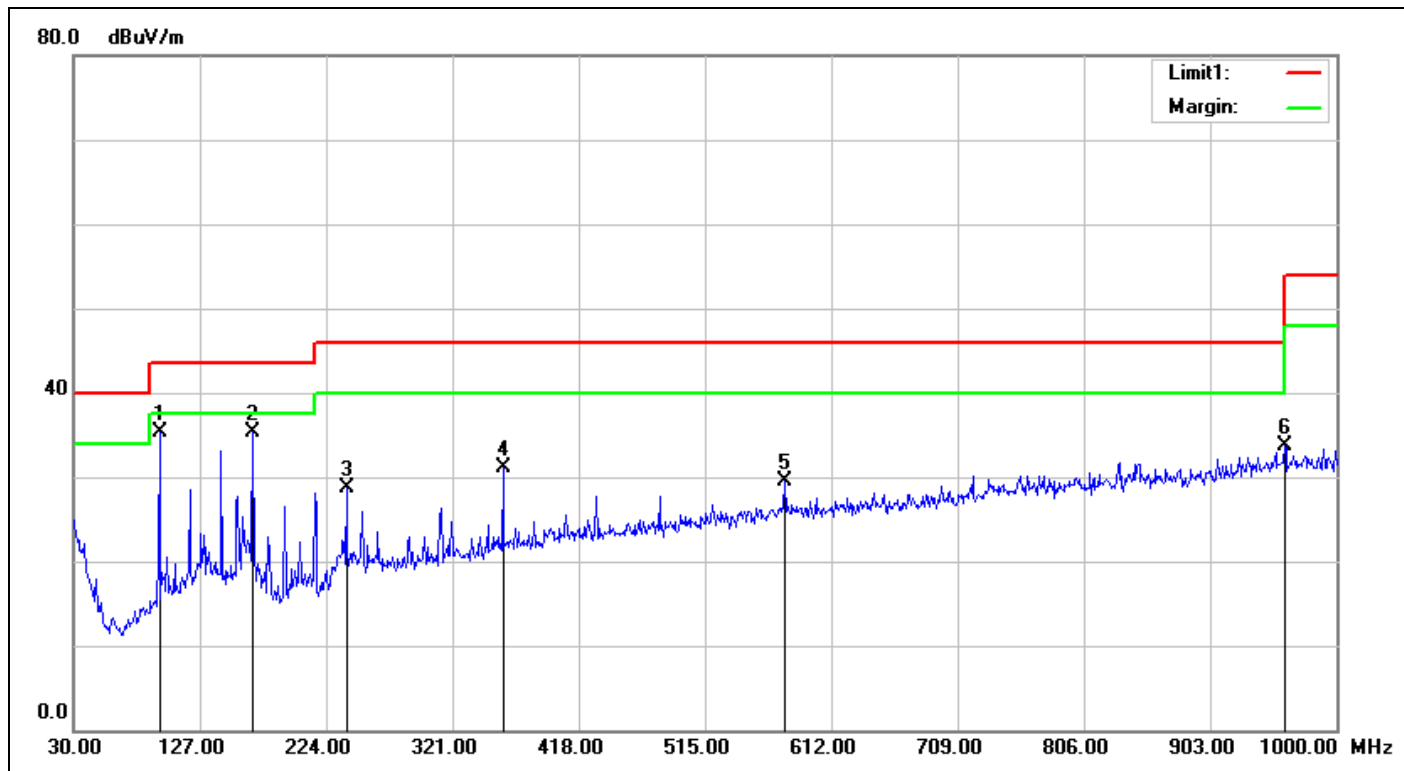

Service No.:	114070061	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/31 21:38:05
Applicant:	Quitewin Technology Corporation	Test Rating:	DC 12V
Product:	Battcheck	Temp.(°C)/Hum.(%)	22.5(°C)/43%
Model No.:	BC-01	Test Engineer:	Kevin.Kuo
Test Mode:	RX-2440		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	95.9599	-10.09	45.49	35.40	43.50	-8.10	QP	100	300	
2	167.7400	-8.78	44.05	35.27	43.50	-8.23	QP	100	154	
3	239.5200	-6.85	35.55	28.70	46.00	-17.30	QP	100	222	
4	359.8000	-3.16	34.22	31.06	46.00	-14.94	QP	100	103	
5	576.1100	-0.17	29.61	29.44	46.00	-16.56	QP	100	200	
6	960.2300	5.54	28.16	33.70	54.00	-20.30	QP	100	273	

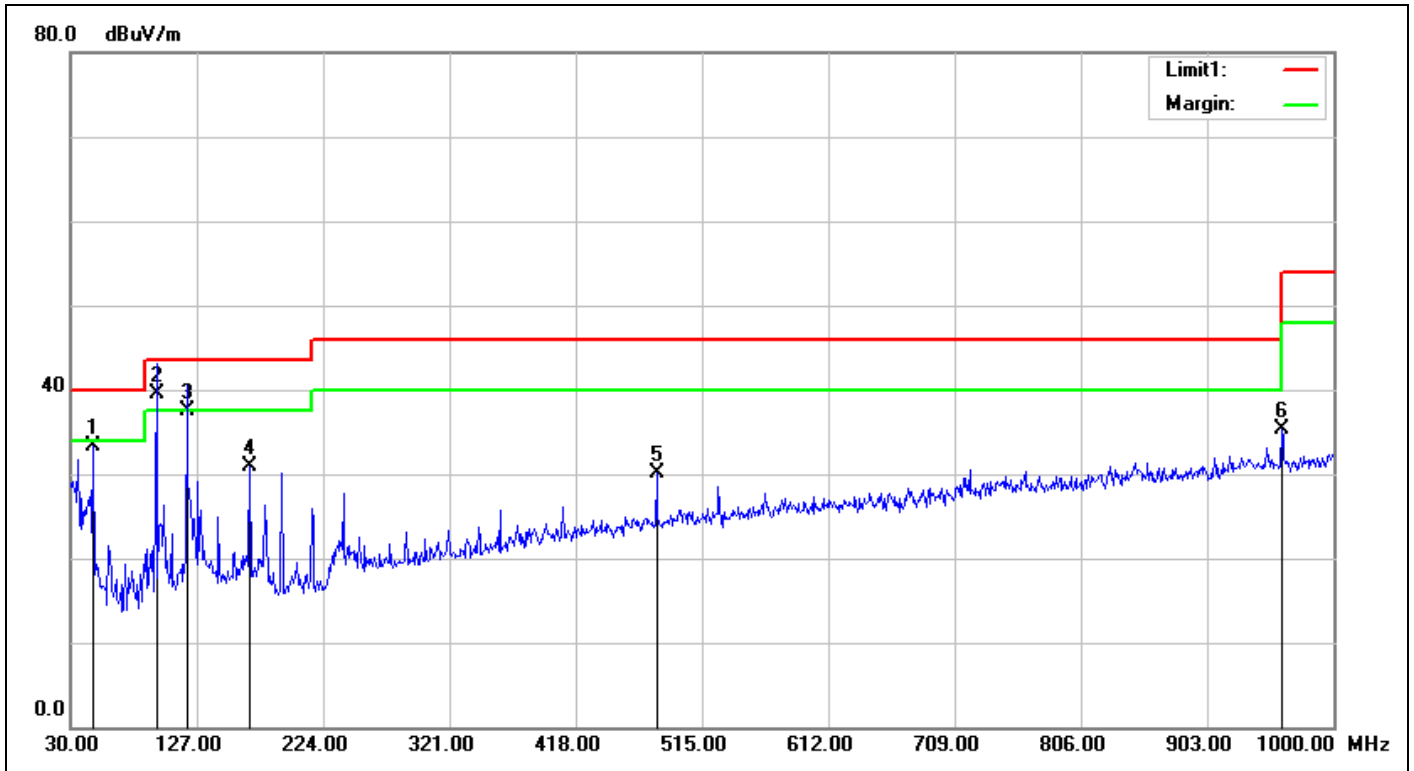

Service No.:	114070061	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/31 21:39:09
Applicant:	Quitewin Technology Corporation	Test Rating:	DC 12V
Product:	Battcheck	Temp.(°C)/Hum.(%)	22.5(°C)/43%
Model No.:	BC-01	Test Engineer:	Kevin.Kuo
Test Mode:	RX-2440		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	47.4600	-10.07	43.47	33.40	40.00	-6.60	QP	100	340	
2	95.9600	-10.09	49.65	39.56	43.50	-3.94	QP	100	228	
3	119.2400	-7.50	44.99	37.49	43.50	-6.01	QP	100	247	
4	167.7400	-8.78	39.60	30.82	43.50	-12.68	QP	100	163	
5	480.0800	-1.47	31.56	30.09	46.00	-15.91	QP	100	278	
6	960.2300	5.54	29.80	35.34	54.00	-18.66	QP	100	117	


Spurious Emissions, RX Mode, 1G-18G



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

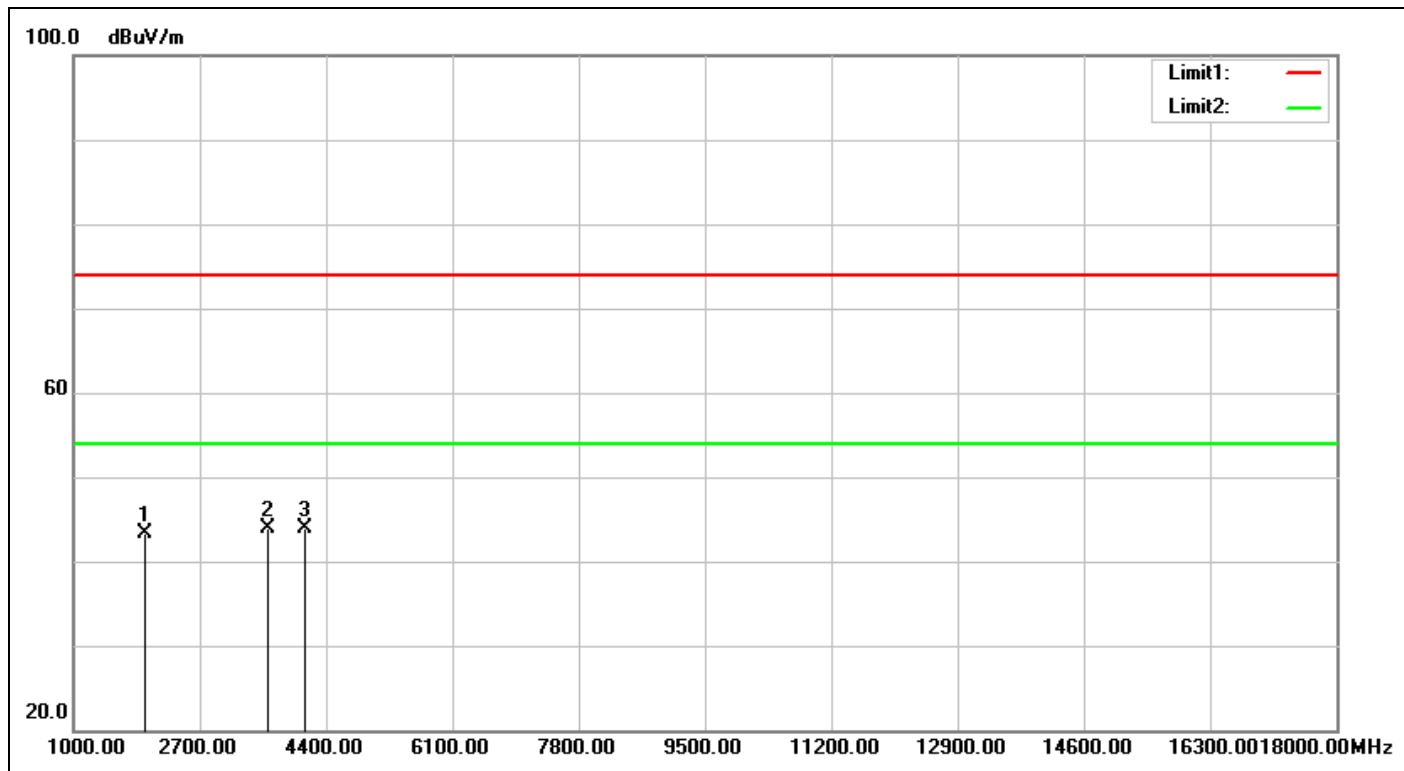

Service No.:	114070061	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/31 19:53:58
Applicant:	Quitewin Technology Corporation	Test Rating:	DC 12V
Product:	Battcheck	Temp.(°C)/Hum.(%)	22.5(°C)/43%
Model No.:	BC-01	Test Engineer:	Kevin.Kuo
Test Mode:	RX-2440		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1969.000	-8.08	51.45	43.37	74.00	-30.63	peak	100	129	
2	3618.000	-5.95	49.86	43.91	74.00	-30.09	peak	100	99	
3	4111.000	-4.94	48.84	43.90	74.00	-30.10	peak	100	193	

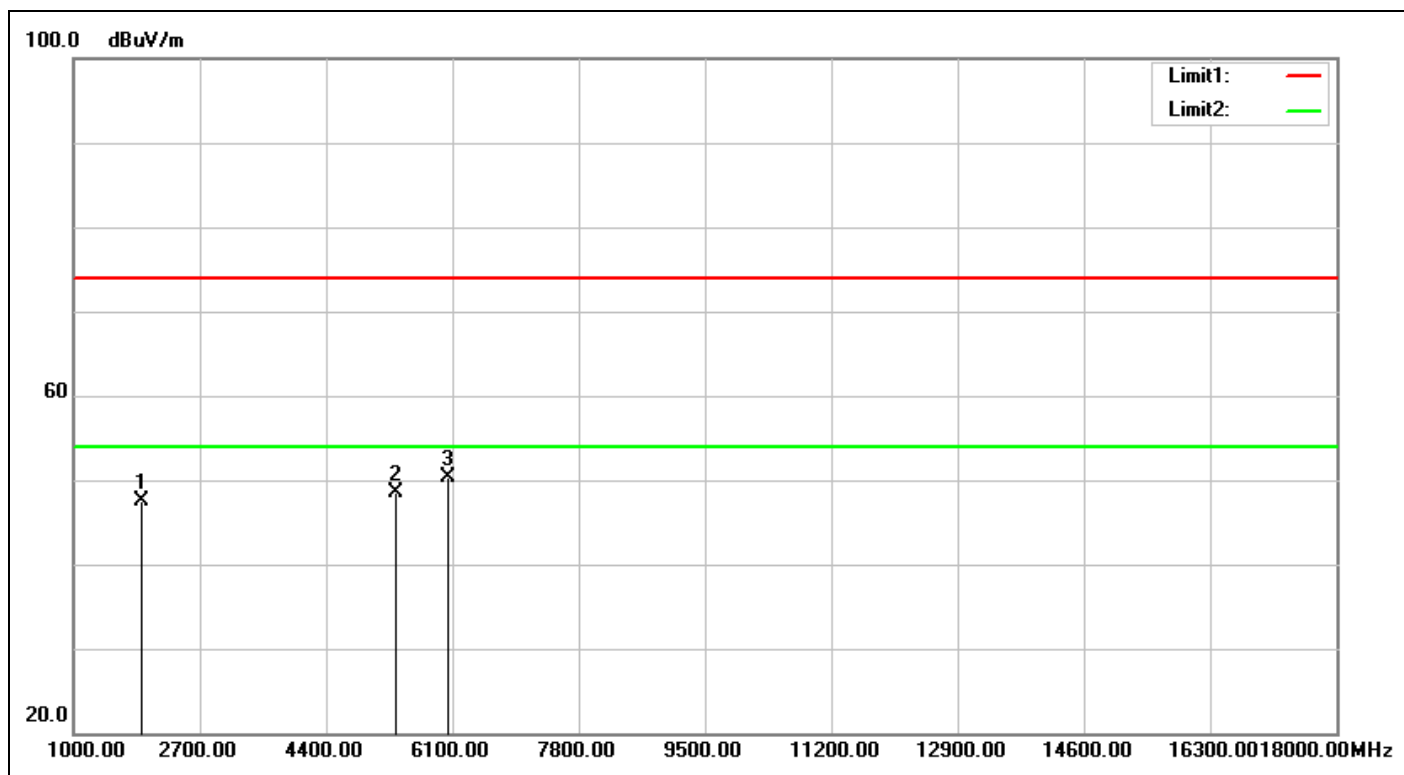

Service No.:	114070061	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/31 19:55:00
Applicant:	Quitewin Technology Corporation	Test Rating:	DC 12V
Product:	Battcheck	Temp.(°C)/Hum.(%)	22.5(°C)/43%
Model No.:	BC-01	Test Engineer:	Kevin.Kuo
Test Mode:	RX-2440		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1918.000	-8.34	55.78	47.44	74.00	-26.56	peak	100	330	
2	5335.000	-0.81	49.26	48.45	74.00	-25.55	peak	100	252	
3	6049.000	3.49	46.76	50.25	74.00	-23.75	peak	100	275	


Spurious Emissions, RX Mode, 18G-26.5G



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

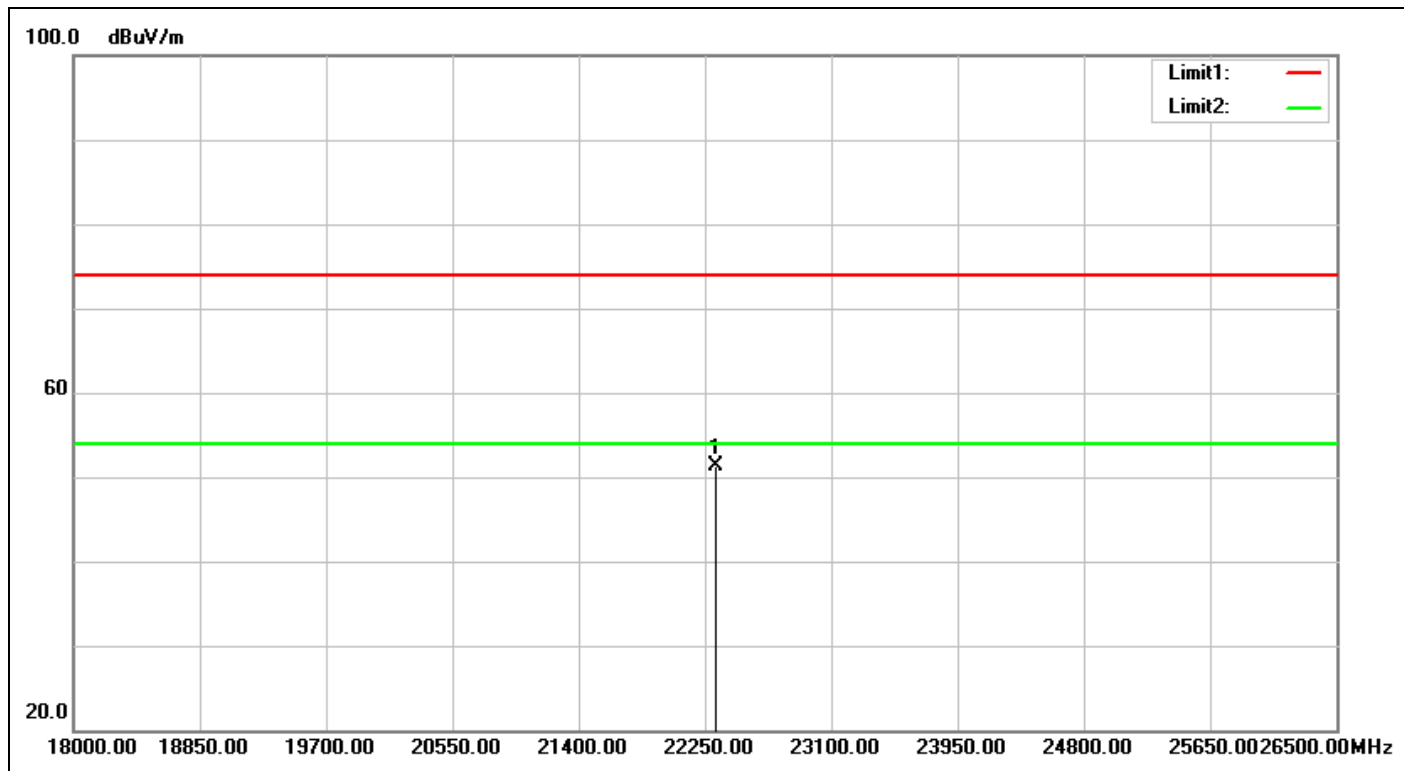

Service No.:	114070061	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/5/31 20:30:35
Applicant:	Quitewin Technology Corporation	Test Rating:	DC 12V
Product:	Battcheck	Temp.(°C)/Hum.(%)	22.5(°C)/43%
Model No.:	BC-01	Test Engineer:	Kevin.Kuo
Test Mode:	RX-2440		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22326.500	32.62	18.72	51.34	74.00	-22.66	peak	100	256	

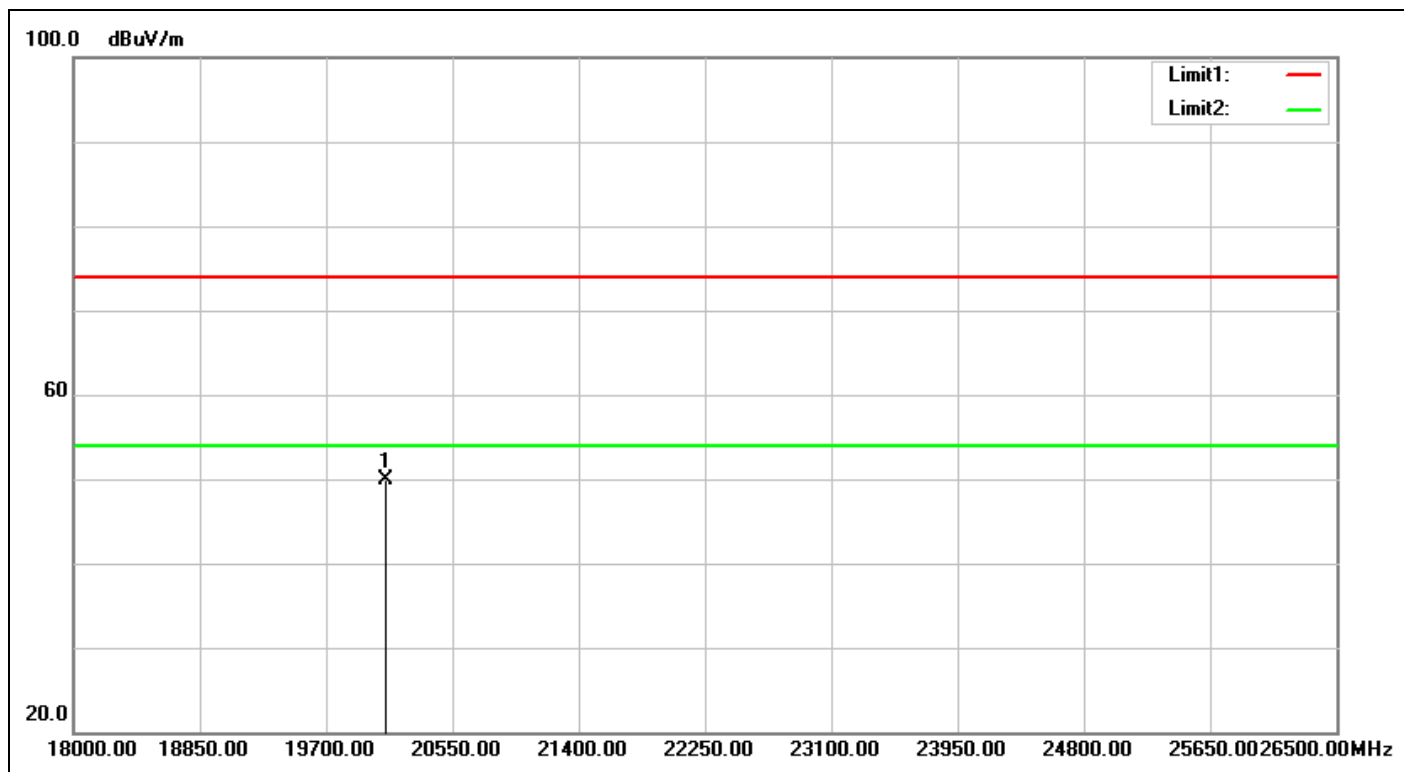

Service No.:	114070061	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/5/31 20:31:38
Applicant:	Quitewin Technology Corporation	Test Rating:	DC 12V
Product:	Battcheck	Temp.(°C)/Hum.(%):	22.5(°C)/43%
Model No.:	BC-01	Test Engineer:	Kevin.Kuo
Test Mode:	RX-2440		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20099.500	31.25	18.59	49.84	74.00	-24.16	peak	100	102	