



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A05062303
Report No.:FCCA05062303
Page:1 of 25
Date:Aug. 22, 2005

Product Name: Intelligent Batterymate Series
Model No.: IBI121XXX, IB128XXX, RIB128XXX
Applicant: Quitewin Technology Corporation
15F-1, No.79, Sec.1, Hsin-Tai-Wu Road, Hsi-Chih,
Taipei Hsien, Taiwan 221
Date of Receipt: June 23, 2005
Finished date of Test: Aug. 22, 2005
Applicable Standards: 47 CFR Part 15, Subpart C, Class B
ANSI C63.4:2003

We, **Spectrum Research & Testing Laboratory Inc.**, hereby certify that one sample of the above was tested in our laboratory with positive results according to the above-mentioned standards. The records in the report are an accurate account of the results. Details of the results are given in the subsequent pages of this report.

Checked By : *Julian Chiang* for , Date: *2005. 8. 22*
(Hugo Yeh)

Approved By : *JH* , Date: *Aug. 22, 2005*
(Johnson Ho, Director)

NVLAP[®]

Lab Code: 200099-0



Table of Contents

1. DOCUMENT POLICY AND TEST STATEMENT.....	3
1.1 DOCUMENT POLICY	3
1.2 TEST STATEMENT.....	3
1.3 EUT MODIFICATION	3
2. DESCRIPTION OF EUT AND TEST MODE	4
2.1 GENERAL DESCRIPTION OF EUT	4
2.2 DESCRIPTION OF EUT INTERNAL DEVICE.....	4
2.3 DESCRIPTION OF TEST MODE.....	4
2.4 DESCRIPTION OF SUPPORT UNIT	5
3. DESCRIPTION OF APPLIED STANDARDS	5
4. CONDUCTED EMISSION TEST.....	6
4.1 CONDUCTED EMISSION LIMIT.....	6
4.2 TEST EQUIPMENT.....	6
4.3 TEST SETUP	7
4.4 TEST PROCEDURE	7
4.5 EUT OPERATING CONDITION	7
4.6 TEST RESULT	8
5. RADIATED EMISSION TEST.....	10
5.1 RADIATED EMISSION LIMIT.....	10
5.2 TEST EQUIPMENT.....	11
5.3 TEST SET-UP	12
5.4 TEST PROCEDURE	13
5.5 EUT OPERATING CONDITION	13
5.6 RADIATED EMISSION TEST RESULT.....	14
6. BAND EDGE TEST.....	15
6.1 LIMIT	15
6.2 TEST EQUIPMENT.....	15
6.3 TEST RESULT	16
7. 20DB BANDWIDTH.....	17
7.1 LIMIT	17
7.2 TEST EQUIPMENT.....	17
7.3 TEST SET-UP	17
7.4 TEST PROCEDURE	17
7.5 EUT OPERATING CONDITION	17
7.6 TEST RESULT	18
8. RELEASE TIME	19
8.1 LIMIT	19
8.2 TEST EQUIPMENT.....	19
8.3 TEST SET-UP	19
8.4 TEST PROCEDURE	19
8.5 EUT OPERATING CONDITION	19
8.6 TEST RESULT	20
9. PHOTOS OF TESTING.....	21
10. TERMS OF ABRIVATION.....	25

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	TEST REPORT	Reference No.:A05062303 Report No.:FCCA05062303 Page:3 of 25 Date:Aug. 22, 2005
---	--------------------	--

1. DOCUMENT POLICY AND TEST STATEMENT

1.1 DOCUMENT POLICY

- The report shall not be reproduced except in full, without the written approval of SRT Lab, Inc.
- The report must not be used by the applicant to claim that the product is endorsed by NVLAP, TÜV, NEMKO and SRT.
- The NVLAP logo applies only to the applicable standards specified in this report.

1.2 TEST STATEMENT

- The test results in the report apply only to the unit tested by SRT Lab.
- There was no deviation from the requirements of test standards during the test.
- AC power source, 120 Vac/60 Hz, was used during the test.

1.3 EUT MODIFICATION

- No modification in SRT Lab.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A05062303 Report No.:FCCA05062303 Page:4 of 25 Date:Aug. 22, 2005
---	----------------------	--

2. DESCRIPTION OF EUT AND TEST MODE

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Intelligent Batterymate Series
MODEL NO.	IBI121XXX, IB128XXX, RIB128XXX
POWER REQUIREMENTS	DC 12 V
CARRIER FREQUENCY	315MHz
MODULATION TYPE	AM/ASK/CCK
OPERATING TEMPERATURE RANGE	-20~+85

NOTE :

The EUT has three model numbers as below on market.

The difference of them as below:

(1)IBI121XXX - Intelligent Battery Indicator

IB128XXX - Intelligent Batterymate

RIB128XXX - Remote Intelligent Batterymate

(2)IB12/RIB12/IBI12: "12" means 12V.

(3)IB128/RIB128: "8" means 80A.

IBI121: The second "1" means 10A.

(4)The first "X" means the code of mechanical engineering.

(5)The second "X" means the code of electronic engineering.

(6)The third "X" means the code of case color.

The "X" in model number could be A~Z, 0~9.

For more detailed features, please refer to the manufacturer's specification or User's Manual.

2.2 DESCRIPTION OF EUT INTERNAL DEVICE

DEVICE	BRAND / MAKER	MODEL #	FCC ID/DOC	REMARK
N/A				

2.3 DESCRIPTION OF TEST MODE

N/A (It is only applicable to more than one test mode.)

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A05062303 Report No.:FCCA05062303 Page:5 of 25 Date:Aug. 22, 2005
---	----------------------	--

2.4 DESCRIPTION OF SUPPORT UNIT

The EUT was configured by the requirement of ANSI C63.4:2003 and CISPR22:2003. All interface ports were connected to the appropriate support units via specific cables. The support units and cables are listed below.

NO	DEVICE	BRAND	MODEL #	FCC ID /DOC	CABLE
1	LOAD	ADDA	AD0812LS-A70GL	N/A	1.5m Unshielded Power Cord
2					
3					
4					
5					

NOTE : For the actual test configuration, please refer to the photos of testing.

3. DESCRIPTION OF APPLIED STANDARDS

According to the specifications provided by the applicant, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C, Class B

ANSI C63.4:2003

All tests have been performed and recorded as per the above standards.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A05062303 Report No.:FCCA05062303 Page:6 of 25 Date:Aug. 22, 2005
---	----------------------	--

4. CONDUCTED EMISSION TEST

4.1 CONDUCTED EMISSION LIMIT

FREQUENCY (MHz)	Class A (dB μ V)		Class B (dB μ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.5 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.2 TEST EQUIPMENT


The following test equipment was used for the test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	9 kHz TO 2.75 GHz	ROHDE & SCHWARZ	ESHS30/ 826003/008	AUG. 2005 ETC
LISN (for EUT)	50 μ H, 50 ohm	FCC	FCC-LISN-50-25-2 / 01017	NOV. 2005 ETC
LISN (for Peripheral)	50 μ H, 50 ohm	FCC	FCC-LISN-50-25-2 / 01018	NOV. 2005 ETC
50 ohm TERMINATOR	50 ohm	HP	11593A/ 2	OCT. 2005 ETC
COAXIAL CABLE	3m	SUNCITY	J400/ 3M	JUL. 2006 SRT
ISOLATION TRANSFORMER	N/A	APC	AFC-11015/ F102040016	N/A
FILTER	2 LINE, 30A	FIL.COIL	FC-943/ 771	N/A
GROUND PLANE	2.3M (H) x 2.4M (W)	SRT	N/A	N/A
GROUND PLANE	2.4M (H) x 2.4M (W)	SRT	N/A	N/A

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.



4.3 TEST SETUP

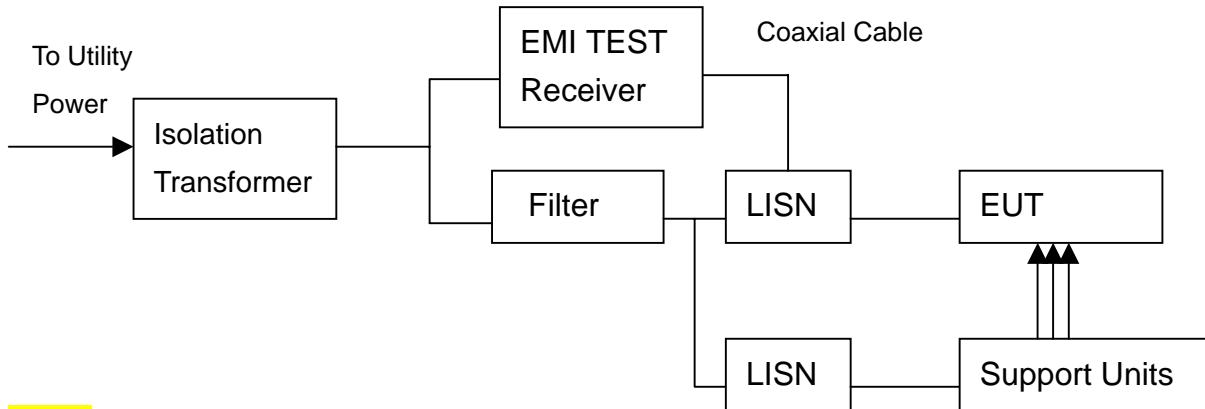

NOTE:

1. The EUT was put on a wooden table with 0.8m heights above ground plane, and 0.4m away from reference ground plane (> 2mx2m).
2. For the actual test configuration, please refer to the photos of testing.
3. The serial no. of the LISN connected to EUT is 01017.
4. The serial no. of the LISN connected to support units is 01018.

4.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.4:2003 and CISPR22:2003. The frequency spectrum from 0.15 MHz to 30 MHz was investigated. The LISN used was 50 ohm/50 μ H as specified. All readings were quasi-peak and average values with 10 kHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. Both lines of the power mains of EUT were measured and the cables connected to EUT and support units were moved to find the maximum emission levels for each frequency.

First, find the margin or higher points at least 6 points by software, then use manual to find the maximum data. The procedure is referred on the test procedure of SRT LAB.

4.5 EUT OPERATING CONDITION

1. Set the EUT under transmission condition continuously at specific channel frequency.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A05062303 Report No.:FCCA05062303 Page:8 of 25 Date:Aug. 22, 2005
---	----------------------	--

4.6 TEST RESULT

Temperature:	15°C	Humidity:	51 %RH
Frequency Range:	0.15 – 30 MHz	Tested Mode:	TX
Receiver Detector:	Q.P. and AV.	Tested By:	Hugo Yeh
		Tested Date:	Aug. 17, 2005

Power Line Measured : Line

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.243	0.20	20.9	18.9	21.1	19.1	62.0	52.0	-40.9	-32.9
1.428	0.20	3.6	0.2	3.8	0.4	56.0	46.0	-52.2	-45.6
2.932	0.20	6.4	2.3	6.6	2.5	56.0	46.0	-49.4	-43.5
7.203	0.20	7.7	3.2	7.9	3.4	60.0	50.0	-52.1	-46.6
11.131	0.20	7.9	4.1	8.1	4.3	60.0	50.0	-51.9	-45.7
17.809	0.20	15.1	11.4	15.3	11.6	60.0	50.0	-44.7	-38.4

Power Line Measured : Neutral

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.240	0.20	23.2	21.1	23.4	21.3	62.1	52.1	-38.7	-30.8
4.418	0.20	3.7	0.2	3.9	0.4	56.0	46.0	-52.1	-45.6
3.507	0.20	5.4	0.4	5.6	0.6	56.0	46.0	-50.4	-45.4
6.451	0.20	7.8	3.7	8.0	3.9	60.0	50.0	-52.0	-46.1
7.253	0.20	7.6	3.9	7.8	4.1	60.0	50.0	-52.2	-45.9
17.809	0.20	14.8	8.4	15.0	8.6	60.0	50.0	-45.0	-41.4

NOTE :

1. Measurement uncertainty is +/-1.32dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. Margin value = Emission level - Limit
5. The emission of other frequencies were very low against the limit.
6. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A05062303 Report No.:FCCA05062303 Page:9 of 25 Date:Aug. 22, 2005
---	----------------------	--

Temperature:	15°C	Humidity:	51 %RH
Frequency Range:	0.15 – 30 MHz	Tested Mode:	RX
Receiver Detector:	Q.P. and AV.	Tested By:	Hugo Yeh
		Tested Date:	Aug. 17, 2005

Power Line Measured : Line

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.219	0.20	24.2	21.8	24.4	22.0	62.8	52.8	-38.4	-30.8
1.418	0.20	2.8	1.2	3.0	1.4	56.0	46.0	-53.0	-44.6
1.457	0.20	3.9	1.2	4.1	1.4	56.0	46.0	-51.9	-44.6
11.831	0.20	7.9	4.0	8.1	4.2	60.0	50.0	-51.9	-45.8
14.876	0.20	7.9	3.9	8.1	4.1	60.0	50.0	-51.9	-45.9
17.809	0.20	13.1	5.5	13.3	5.7	60.0	50.0	-46.7	-44.3

Power Line Measured : Neutral

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.213	0.20	27.3	25.1	27.5	25.3	63.1	53.1	-35.6	-27.8
1.349	0.20	8.5	6.3	8.7	6.5	56.0	46.0	-47.3	-39.5
4.398	0.20	13.1	3.2	13.3	3.4	56.0	46.0	-42.7	-42.6
6.370	0.20	6.7	1.2	6.9	1.4	60.0	50.0	-53.1	-48.6
7.121	0.20	7.2	0.3	7.4	0.5	60.0	50.0	-52.6	-49.5
21.693	0.20	9.1	3.5	9.3	3.7	60.0	50.0	-50.7	-46.3

NOTE :

1. Measurement uncertainty is +/-1.32dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. Margin value = Emission level - Limit
5. The emission of other frequencies were very low against the limit.
6. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A05062303 Report No.:FCCA05062303 Page:10 of 25 Date:Aug. 22, 2005
---	----------------------	---

5. RADIATED EMISSION TEST

5.1 RADIATED EMISSION LIMIT

FCC Part 15, Subpart C Section 15.231.

FREQUENCY (MHz)	DISTANCE (m)	FIELD STRENGTH (dB μ V/m)	
		PEAK	AVERAGE
260 - 470	3	100.82	80.82

FCC Part 15, Subpart B Section 15.209.

FREQUENCY (MHz)	DISTANCE (m)	FIELD STRENGTH (dB μ V/m)
30 - 88	3	40.0
88 - 216	3	43.5
216 - 960	3	46.0
Above 960	3	54.0

NOTE :

1. In the emission tables above , the tighter limit applies at the band edges.
2. Distance refers to the distance between measuring instrument, antemma, and the closest point of any part of the device or system.

CISPR 22:2003 limits of radiated emission measurement for frequency below 1000 MHz

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	dB μ V/m	dB μ V/m
30 – 230	40	30
230 - 1000	47	37

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB μ V/m) = 20 log Emission level (μ V/m).

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A05062303 Report No.:FCCA05062303 Page:11 of 25 Date:Aug. 22, 2005
---	----------------------	---

5.2 TEST EQUIPMENT

The following test equipment was used during the radiated emission test:


EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	9 kHz TO 1 GHz	ROHDE & SCHWARZ	ESCS30/ 830245/012	OCT. 2005 ETC
BI-LOG ANTENNA	25 MHz TO 2 GHz	EMCO	3143/ 9509-1141	SEP. 2005 SRT
SPECTRUM ANALYZER	9 KHz TO 26.5 GHz	HP	8593E/ 3710A03220	MAY 2006 ETC
PRE-AMPLIFIER	1 GHz TO 26.5 GHz	HP	8449B/ 3008A01019	NOV. 2005 ETC
HORN ANTENNA	1 GHz TO 18 GHz	EMCO	3115/ 9602-4681	DEC. 2005 ETC
OATS	3 – 10 M MEASUREMENT	SRT	SRT-1	DEC. 2005 SRT
COAXIAL CABLE	25M	SUNCITY	J400/ 25M	AUG. 2006 SRT
FILTER	2 LINE, 30A	FIL.COIL	FC-943/ 869	N/A
FREQUENCY CONVERTER	N/A	APC	AFC-2KBB/ F100030031	AUG. 2006 SRT

NOTE:

1. The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.
2. The Open Area Test Site (SRT-1) is registered by FCC with No. 90957 and VCCI with No. R-1081.
3. The Open Area Test Site (SRT-2) is registered by FCC with No. 98458 and VCCI with No. R-1168.



5.3 TEST SET-UP

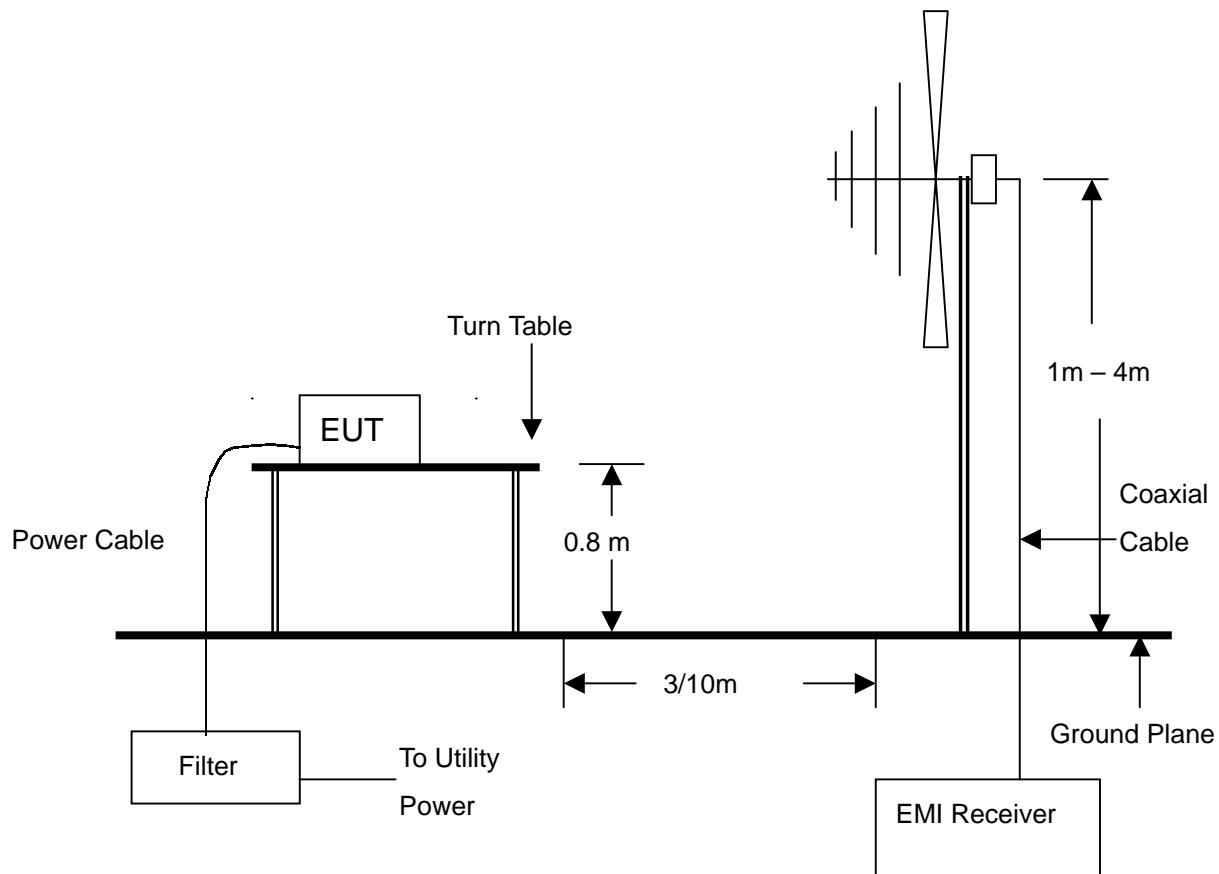

NOTE :

1. The EUT system was put on a wooden table with 0.8m heights above a ground plane.
2. For the actual test configuration, please refer to the photos of testing.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	TEST REPORT	Reference No.:A05062303 Report No.:FCCA05062303 Page:13 of 25 Date:Aug. 22, 2005
---	--------------------	---

5.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.4:2003 and CISPR 22:2003. The measurements were made at an open area test site with 10 meter measurement distance under 1 GHz and with 3m distance above 1GHz. The frequency spectrum measured started from 30 MHz. Under 1 GHz, all readings were quasi-peak values with 120 kHz resolution bandwidth of the test receiver. Above 1 GHz, the measurements were made at an open area test site with 3 meter measurement distance and all readings were peak or average values with 1 MHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. The cables connected to EUT and support units were moved to find the maximum emission levels for each frequency.

First, find the margin or higher points at least 6 points by software, then use manual to find the maximum data. The procedure is referred on the test procedure of SRT LAB.

5.5 EUT OPERATING CONDITION

Same as section 4.5 of this report.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<p>TEST REPORT</p>	<p>Reference No.:A05062303 Report No.:FCCA05062303 Page:14 of 25 Date:Aug. 22, 2005</p>
---	---------------------------	---

5.6 RADIATED EMISSION TEST RESULT

Temperature:	22°C	Humidity:	55 %RH
Frequency Range:	30 - 1000 MHz	Measured Distance:	3m
Receiver Detector:	PK & AV.	Tested Mode:	TX (Fundamental
Tested Date:	Aug. 22, 2005		Frequency)
Tested By:	Hugo Yeh		

Fundamental frequency of transmitter

Frequency (MHz)	Antenna Polarization	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
314.986(F)	H	2.61	14.39	69.7(PK)	86.7	95.6	-8.9
314.986(F)	V	2.61	14.39	68.8(PK)	85.8	95.6	-9.8
314.983(F)	H	2.61	14.39	39.8(AV)	56.8	75.6	-18.8
314.983(F)	V	2.61	14.39	38.1(AV)	55.1	75.6	-20.5

Receiver Detector: Q.P. Tested Mode: TX (Harmonic)

Frequency (MHz)	Antenna Polarization	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
68.8400	H	1.13	5.58	13.2	19.9	55.6	-35.7
91.1200	H	1.22	7.15	15.6	24.0	55.6	-31.6
200.8200	H	2.15	9.40	15.6	27.2	55.6	-28.5
629.9720	H	2.46	13.80	33.4	49.7	55.6	-5.9
703.1800	H	2.74	15.30	15.2	33.2	55.6	-22.4
944.7100	H	2.95	16.41	32.8	52.2	55.6	-3.4
68.8000	V	1.13	5.58	14.3	21.0	55.6	-34.6
91.2300	V	1.22	7.15	13.8	22.2	55.6	-33.4
200.8600	V	2.15	9.40	14.3	25.9	55.6	-29.8
629.9740	V	2.46	13.80	33.1	49.4	55.6	-6.2
703.1400	V	2.74	15.30	15.2	33.2	55.6	-22.4
944.7200	V	2.95	16.41	32.6	52.0	55.6	-3.6

NOTE :

1. Measurement uncertainty is less than +/- 2dB
2. **: Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss
4. The field strength of other emission frequencies were very low against the limit.
5. (F) : Fundamental frequency of transmitter.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A05062303 Report No.:FCCA05062303 Page:15 of 25 Date:Aug. 22, 2005
---	----------------------	---

6. BAND EDGE TEST

6.1 LIMIT

FCC Part15, Subpart C Section 15.231. In any 120 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 120 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

OPERATING FREQUENCY RANGE (MHz)	SPURIOUS EMISSION FREQUENCY (MHz)	LIMIT	
		Peak power ration to emission(dBc)	Emission level(dBuV/m)
260 – 470	240 - 260	NA	46
	>470	>20	NA

6.2 TEST EQUIPMENT

The following test equipment was used during the test :

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
SPECTRUM	9kHz-7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	APR. 2006 R&S



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.


TEST REPORT

Reference No.:A05062303
Report No.:FCCA05062303
Page:16 of 25
Date:Aug. 22, 2005

6.3 TEST RESULT

Temperature:	20°C	Humidity:	65%RH
Spectrum Detector:	PK	Tested by:	Hugo Yeh
Test Result:	PASS	Tested Date:	Aug. 18, 2005

FREQUENCY (MHz)	RF LEVEL 120kHz BW (dBuV)	Limit of Power (dBuV)	Margin (dB)
314.9856	44.56	71.3	-26.74

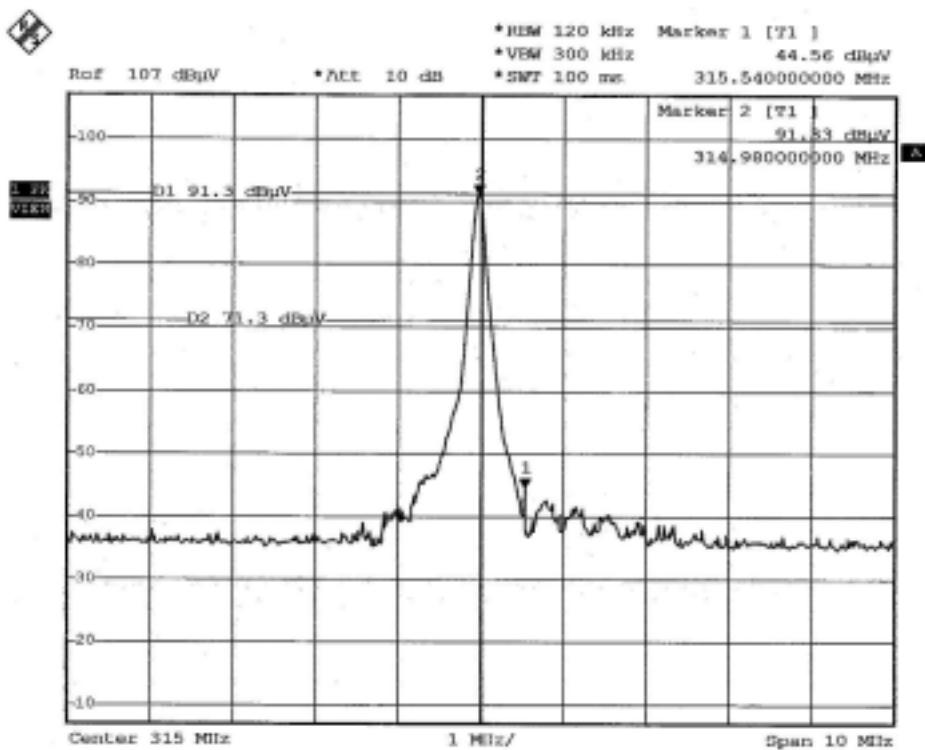

Date: 18.AUG.2005 13:58:11

Band edge



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A05062303
Report No.:FCCA05062303
Page:17 of 25
Date:Aug. 22, 2005

7. 20dB Bandwidth

7.1 LIMIT

Frequency Range (MHz)	Limit(kHz)
70-900	0.25 % of the center frequency
>900	0.5 % of the center frequency


7.2 TEST EQUIPMENT

The following test equipment was used during the test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
SPECTRUM	9kHz-7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	APR. 2006 R&S

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

7.3 TEST SET-UP

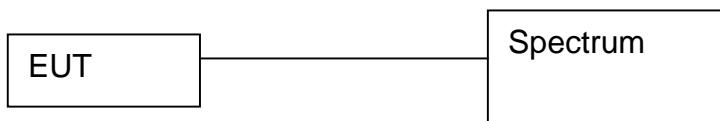

The EUT was connected to a spectrum through a 50 ohm RF cable.

7.4 TEST PROCEDURE

The EUT was operating in hopping mode or could be controlled its channel.
Printed out the test result from the spectrum by hard copy function.


7.5 EUT OPERATING CONDITION

Same as section 4.5 of this report.

7.6 TEST RESULT

Temperature:	26°C	Humidity:	55%RH
Spectrum Detector:	PK	Tested by:	Hugo Yeh
Test Result:	PASS	Tested Date:	Aug. 18, 2005

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	20dB DOWN BW (kHz)	MAXIMUM LIMIT (kHz)
1	314.9856	285.00	787.464

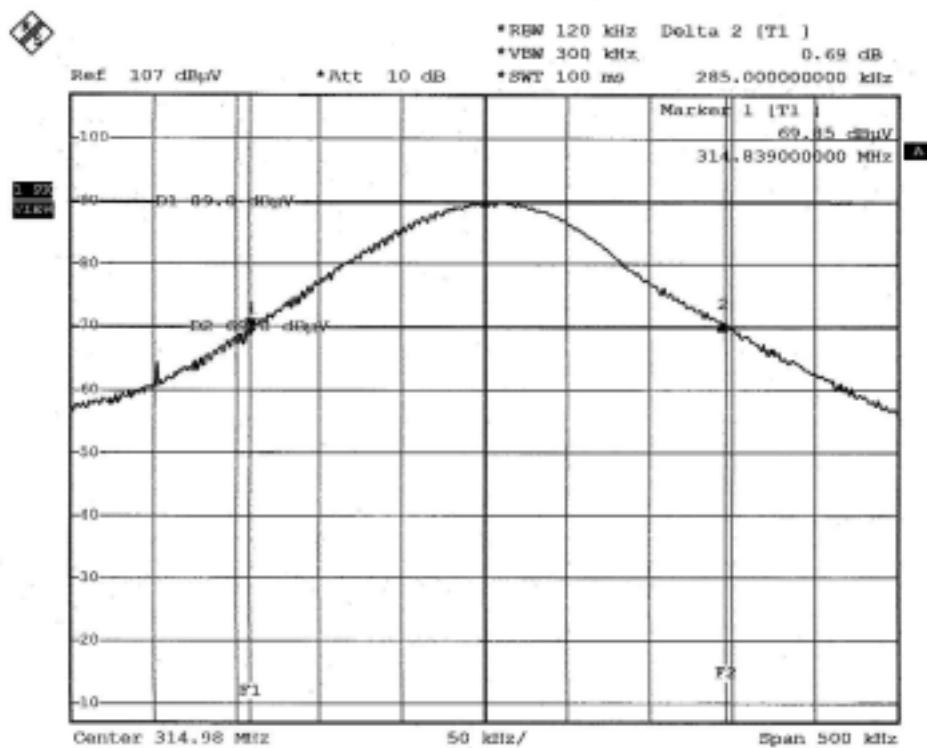

Date: 18.AUG.2005 14:04:02

Bank width

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A05062303 Report No.:FCCA05062303 Page:19 of 25 Date:Aug. 22, 2005
---	----------------------	---

8. Release Time

8.1 LIMIT

FCC Part15, Subpart C Section 15.231.

FREQUENCY RANGE (MHz)	LIMIT (ms)
260-470	< 5s


8.2 TEST EQUIPMENT

The following test equipment was used during the test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
Oscilloscope	100MHz 200Ms a/s	HP	54645A/ US39151317	APR. 2006 ETC

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

8.3 TEST SET-UP



The EUT was connected to a spectrum through a 50 RF cable.

8.4 TEST PROCEDURE

The EUT was operating in hopping mode or could be controlled its channel.
Printed out the test result from the spectrum by hard copy function.

8.5 EUT OPERATING CONDITION

Same as section 4.5 of this report.



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.


TEST REPORT

Reference No.:A05062303
Report No.:FCCA05062303
Page:20 of 25
Date:Aug. 22, 2005

8.6 TEST RESULT

Temperature:	26°C	Humidity:	55%RH
Spectrum Detector:	PK	Tested by:	Hugo Yeh
Test Result:	PASS	Tested Date:	Aug. 22, 2005

Start Release Time(ms)	Stop Time (ms)	Total Release Time(ms)	Limit of Release Time(s)
0.4	30	29.6	5

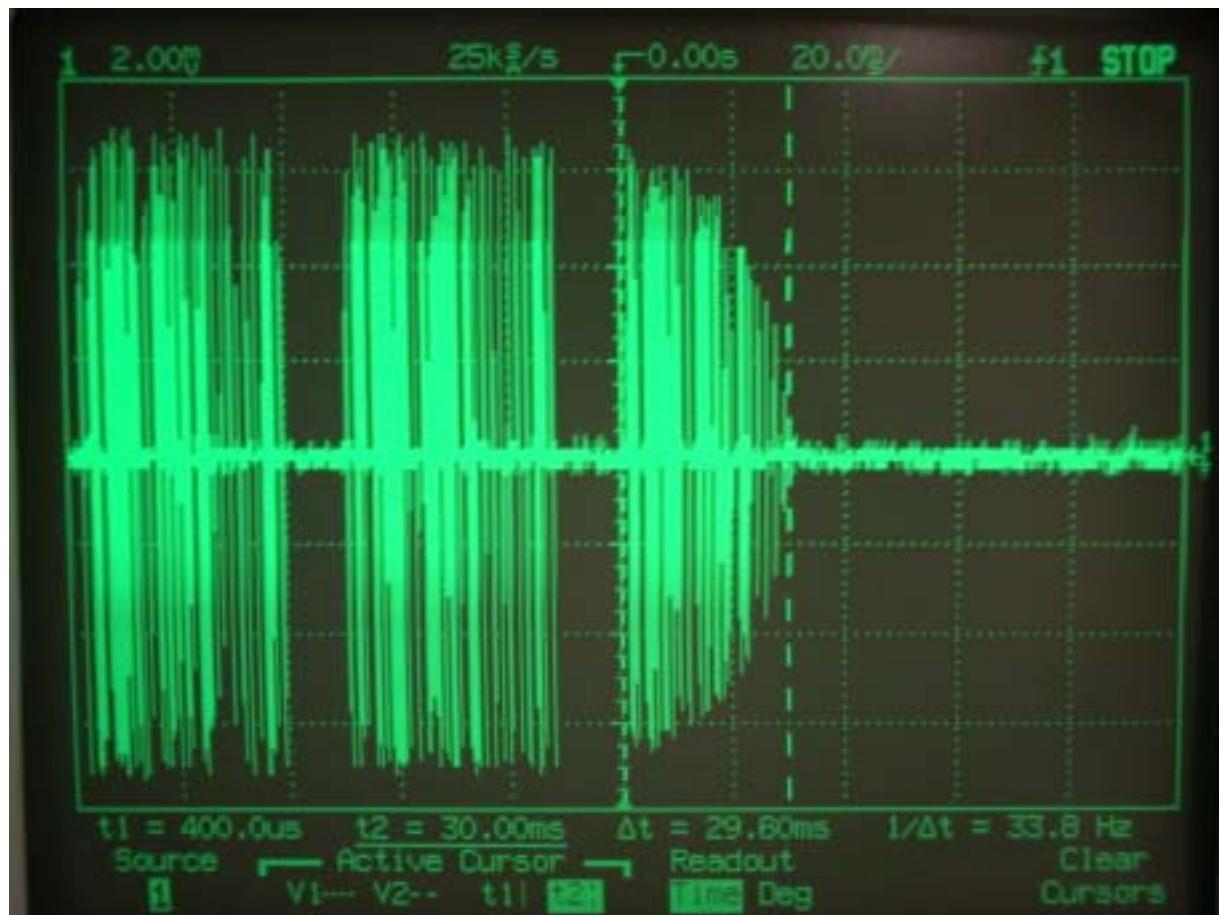



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A05062303
Report No.:FCCA05062303
Page:21 of 25
Date:Aug. 22, 2005

9. PHOTOS OF TESTING

- Conducted test (TX)





**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A05062303
Report No.:FCCA05062303
Page:22 of 25
Date:Aug. 22, 2005

- Conducted test (RX)






**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A05062303
Report No.:FCCA05062303
Page:23 of 25
Date:Aug. 22, 2005

- Radiated test (TX)

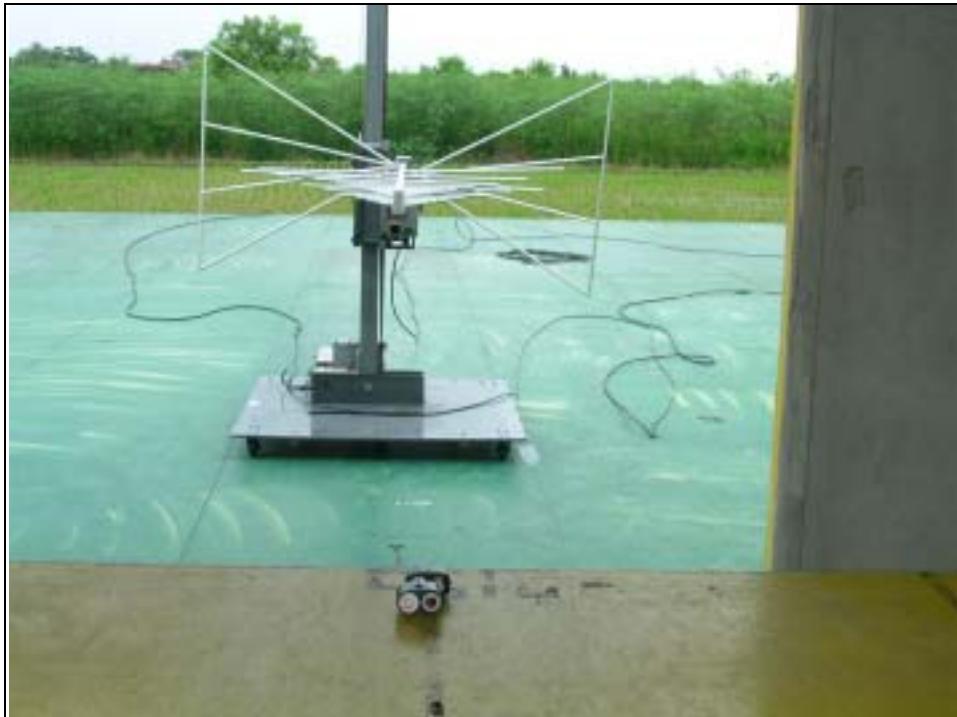




**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A05062303
Report No.:FCCA05062303
Page:24 of 25
Date:Aug. 22, 2005

- Radiated test (RX)

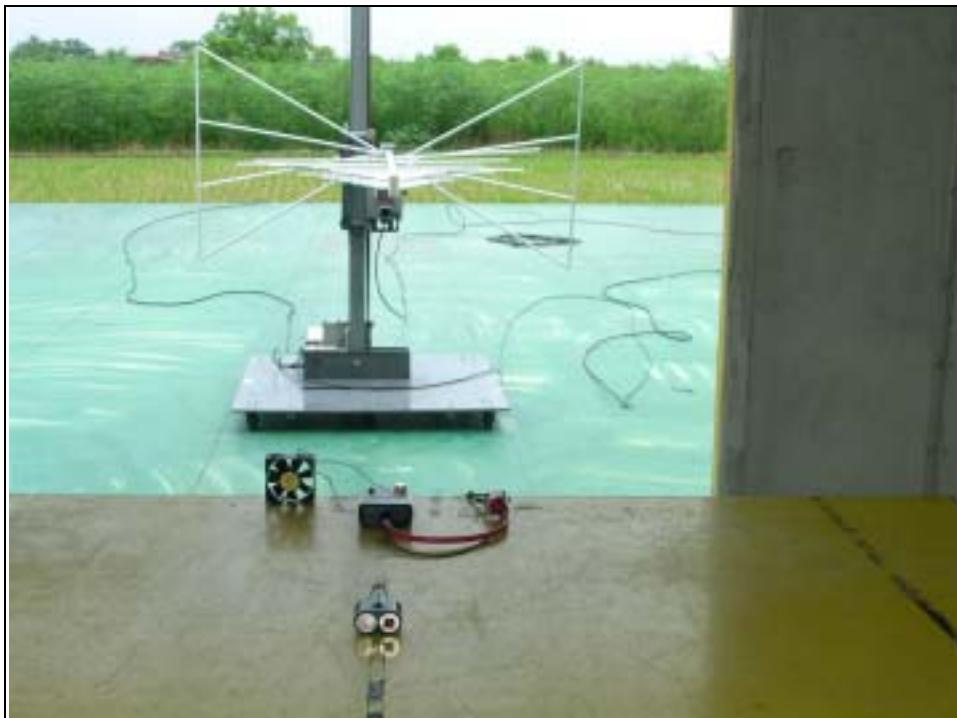



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A05062303
Report No.:FCCA05062303
Page:25 of 25
Date:Aug. 22, 2005

10. TERMS OF ABRIVATION

AV.	Average detection
AZ(°)	Turn table azimuth
Correct.	Correction
EL(m)	Antenna height (meter)
EUT	Equipment Under Test
Horiz.	Horizontal direction
LISN	Line Impedance Stabilization Network
NSA	Normalized Site Attenuation
Q.P.	Quasi-peak detection
SRT Lab	Spectrum Research & Testing Laboratory, Inc.
Vert.	Vertical direction