

Johnson Health Tech. Co., Ltd.

MPE ASSESSMENT REPORT

Report Type:

FCC MPE assessment report

Model:

MAX-ONYX-C, XL-ONYX-C

REPORT NUMBER:

2407B0045SHA-002

ISSUE DATE:

October 17, 2024

DOCUMENT CONTROL NUMBER:

TTRFFCCMPE-02_V1 © 2018 Intertek





Intertek Testing Services (Shanghai FTZ) Co., Ltd.
Building No.86, 1198 Qinzhou Road (North)
Caohejing Development Zone
Shanghai 200233, China

Telephone: 86 21 6127 8200

www.intertek.com

Report no.: 2407B0045SHA-002

Applicant: Johnson Health Tech. Co., Ltd.

No. 999, Sec. 2, Dongda Rd., Daya Dist., Taichung City 428, China.

Manufacturer : Same as applicant

Factory 1 : Same as applicant

Factory 2 Johnson Industries (Shanghai) CO., LTD.

2217 hechen highway, JIADING DISTRICT, Shanghai, China

FCC ID : TN7ONYX02

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

FCC PART 1 SECTION 1.1310


Project Engineer
Eric Li

REVIEWED BY:

REVIEWED BY:

Reviewer
Wakeyou Wang


This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.





Revision History

Report No.	Version	Description	Issued Date
2407B0045SHA-002	Rev. 01	Initial issue of report	October 17, 2024






Measurement result summary

TEST ITEM	FCC REFERANCE	TEST RESULT	NOTE
RF Exposure	1.1310	Pass	-

Notes: 1: NA =Not Applicable

2: Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

3: Additions, Deviations and Exclusions from Standards: None.






1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name:	Fitness Equipment TV Console		
Type/Model:	MAX-ONYX-C, XL-ONYX-C		
	The EUT is Fitness Equipment TV Console, there are two models, they are the		
	same except model name, display size. We tested MAX-ONYX-C as		
Description of EUT:	representative and listed the worst results in this report.		
Rating:	12Vdc, 3A		
Category of EUT:	Class B		
EUT type:	☐ Table top ☐ Floor standing		
Software Version:	/		
Hardware Version:	/		
Sample received date:	July 17, 2024		
Date of test:	July 18, 2024 to July 29, 2024		

1.2 Technical Specification

Frequency Range:	111kHz – 205kHz
Modulation:	FSK
Antenna:	Coil antenna






1.3 Description of Test Facility

Name:	Intertek Testing Services (Shanghai FTZ) Co., Ltd.
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is	CNAS Accreditation Lab
recognized,	Registration No. CNAS L21189
certified, or	FCC Accredited Lab
accredited by these	Designation Number: CN0175
organizations:	IC Registration Lab CAB identifier.: CN0014 VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02





2 TEST SPECIFICATIONS

2.1 Standards or specification

FCC PART 1 SECTION 1.1310 KDB 680106 D01 RF Exposure Wireless Charging App v03

2.2 Mode of operation during the test


Within this test report, EUT was tested under all modes and tested under its rating voltage and frequency. Other voltage and frequency are specified if used. The worst data was listed in the report.

2.3 Test peripherals list

Item No.	Name	Brand and Model Description	
1	Wireless load	EESON	100%/50%/0% power level
2	Power Adapter	TC-33097	Power supply only

2.4 Record of climatic conditions

Test Item	Temperature	Relative Humidity	Pressure
	(°C)	(%)	(kPa)
RF Exposure	24	53	101






TEST REPORT

2.5 Instrument list

U	sed	Equipment	Manufacturer	Туре	Internal no.	Due date
Ŀ	\	Exposure Level Tester	Narda	ELT-400	EC 2928	2025-04-06
Ŀ	\	Field sensor & Field meter	AR	FL17000	EC 5818-1	2025-05-17





TEST REPORT

3 RF Exposure Assessment

Test result: Pass

3.1 Assessment Limit

Reference: 47 CFR §1.1310, KDB 680106


Limits for General Population/Uncontrolled Exposure

Frequency range [MHz]	Electric field strength [V/m]	Magnetic field strength [A/m]	Power density [mW/cm²]	Averaging time [minutes]
0.1 - 0.3	614	1.63	*100	30
0.3 - 1.34	614	1.63	*100	30
1.34 – 30	824/f	2.19/f	*180/ f ²	30
30 – 300	27.5	0.073	0.2	30
300 – 1 500	•	•	f/1500	30
1 500 - 100 000	-	-	1.0	30

Limits for Occupational/Controlled Exposure

Frequency range [MHz]	Electric field strength [V/m]	Magnetic field strength [A/m]	Power density [mW/cm²]	Averaging time [minutes]
0.1 - 0.3	614	1.63	*100	6
0.3 - 3.0	614	1.63	*100	6
3.0 – 30	1842/f	4.89/f	*900/f ²	6
30 – 300	61.4	0.163	1.0	6
300 – 1 500	-	•	f/300	6
1 500 – 100 000	-	•	5	6

3.2 Assessment Configuration

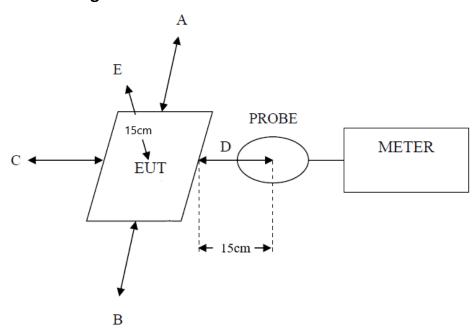



3.3 Assessment Results

Test result of Magnetic Field Strength:

Test Position	Test distance (cm)	Test result (A/m)	Limit (A/m)	Result (Pass/Fail)
A: Right	15	0.0073	1.63 *0.5	Pass
B: Left	15	0.0063	1.63 *0.5	Pass
C: Front	15	0.0056	1.63 *0.5	Pass
D: Back	15	0.0051	1.63 *0.5	Pass
E: Top	15	0.0057	1.63 *0.5	Pass

Test result of Electric Field Strength:

Test Position	Test distance (cm)	Test result (V/m)	Limit (V/m)	Result (Pass/Fail)
A: Right	15	0.81	614 *0.5	Pass
B: Left	15	0.73	614 *0.5	Pass
C: Front	15	0.62	614 *0.5	Pass
D: Back	15	0.54	614 *0.5	Pass
E: Top	15	0.67	614 *0.5	Pass