TX:

VR1 VR2　VR3 VR4　Switch5 Switch6

1　2　3　4　5　6

Read resistance **value**

Read Switch value

Pulse code

72-73MHz

FM surger/modulation

72-73MHz

Power

Signal　Amplifier

72-73MHz
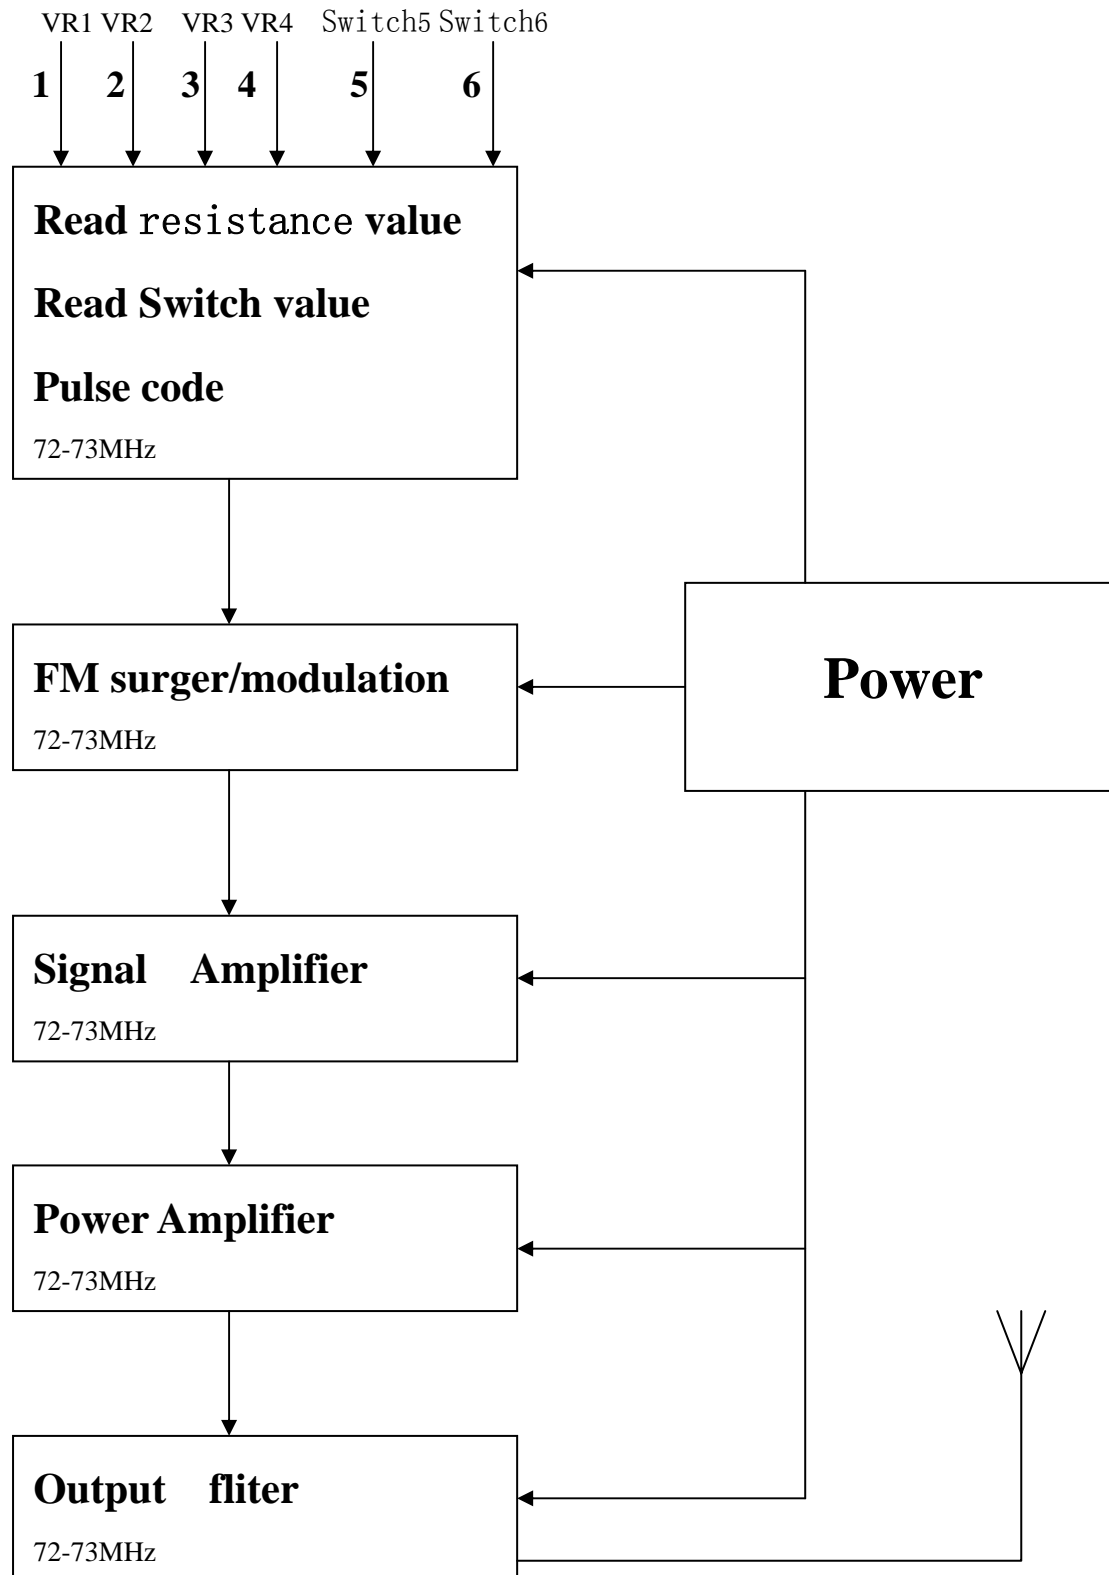
Power Amplifier

72-73MHz

Output　fliter

72-73MHz

In the SCHEMATICS, you can find another Tx, Tx2(4M). It is used to give an operation clock to the SCM only.