




**TENSHO MODEL CO., LTD.**

5th Floor, XieSheng Industrial Building, NO. 70 , LongShan Middle Road, Xiamen, China.

TEL: 0086-592- 5590708, 5590728, 5590758

FAX: 0086-592-5590755

## Operation Description

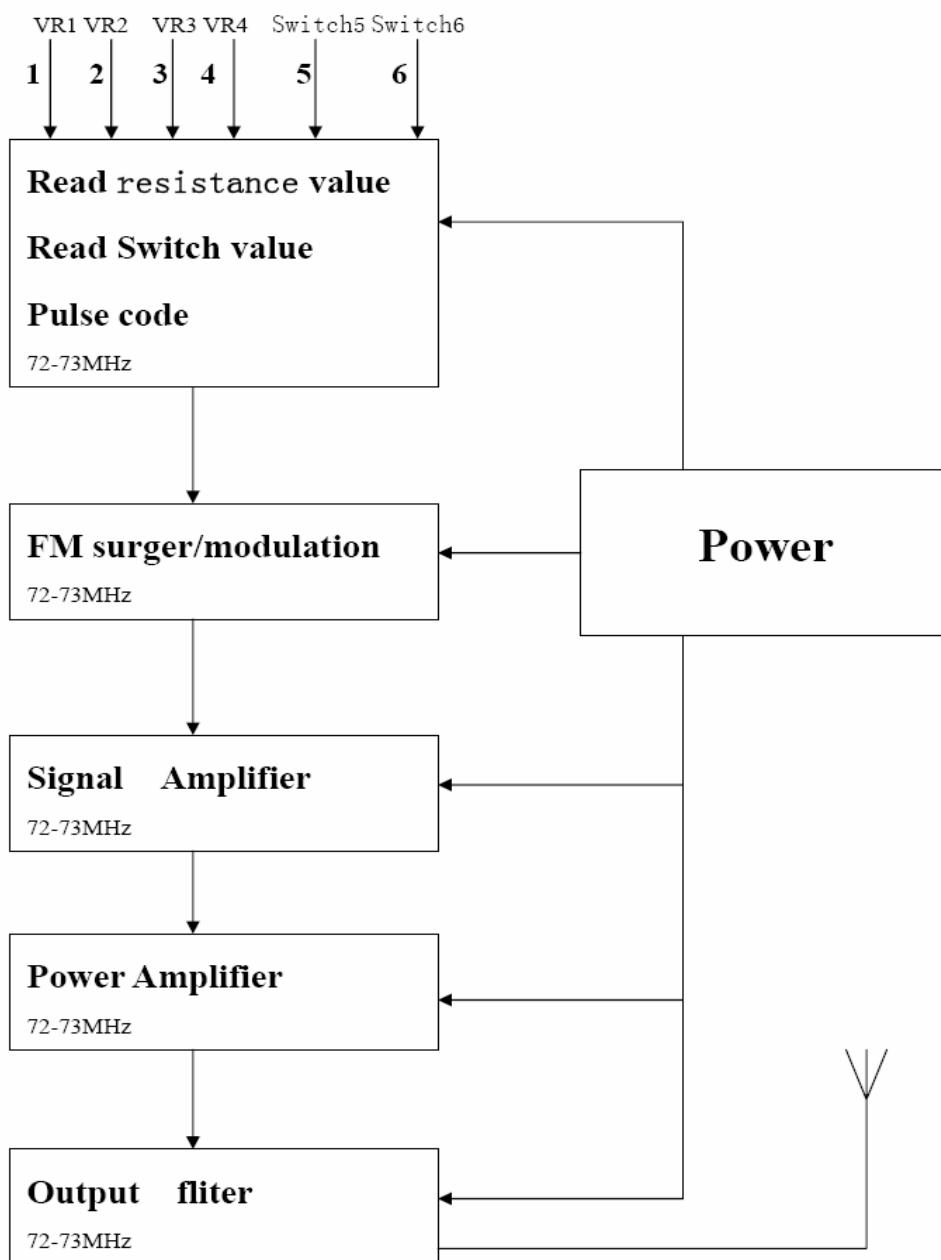

Note: In the SCHEMATICS, you can find another Tx, Tx2(4M). It is used to give an operation clock to the SCM only.



**TENSHO MODEL CO., LTD.**

5th Floor, XieSheng Industrial Building, NO. 70 , LongShan Middle Road, Xiamen, China.

TEL: 0086-592- 5590708, 5590728, 5590758

FAX: 0086-592-5590755

1. Read resistance value from each channel ( Ch1, Ch2, Ch3, Ch4 from VR 1~4, Ch5 and Ch6 from switch 5 and switch 6)
2. Determine the Pulse Code and send the Pulse Code to FM suger/Modulation .
3. Get the Signal Amplified and Power of the signal amplified.
4. filtrate the signal and sent out the signal from the Antenna.