

Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 1 of 54

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

0F

Bluetooth Stereo Headset Product Name:

(1) NolaN (for model: NSRTA3C2XXX) **Brand Name:**

(2) PMR (for model: NSRTA3C2XXX)

NSRTA3C2XXX ($X=0\sim9$ or $A\sim Z$) **Model Name:**

FCC ID: TNZNSRTA3C2XXX

Report No.: EF/2006/90007-04

Issue Date: Nov. 14, 2007

§15.247 **FCC Rule Part:**

Prepared for: Nolan Systems Inc.

1595 Cleo Springs Dr., San Jose, CA

95131, USA

Prepared by: SGS Taiwan Ltd.

No. 134, Wu Kung Rd., Wuku Industrial

Zone, Taipei County, Taiwan.



Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sqs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意 此條款列印於背面,亦可在<u>www.sgs.com</u>中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面 許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、僞造、竄改皆屬非法,違犯者將會被依法追訴



Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 2 of 54

VERIFICATION OF COMPLIANCE

Applicant: Nolan Systems Inc.

1595 Cleo Springs Dr., San Jose, CA 95131, USA

Equipment Under Test: Bluetooth Stereo Headset

Brand Name: (1) NolaN (for model: NSRTA3C2XXX)

(2) PMR (for model: NSRTA3C2XXX)

FCC ID Number: TNZNSRTA3C2XXX

Model No.: NSRTA3C2XXX ($X=0\sim9$ or $A\sim Z$)

The variant model names depend on different trader in the market. **Model Difference:**

EF/2006/90007-04 File Number:

Date of test: Sep. 20, 2006 ~ Sep. 26, 2006; Nov. 12, 2007

Sep. 19, 2006; Nov. 12, 2007 **Date of EUT Received:**

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247

The test results of this report relate only to the tested sample identified in this report.

Test By:	Alex Hsieh	Date	Nov. 14, 2007	
_	Alex Hsieh/Sr. Engineer			
Prepared By:	Gigi yeh	Date	Nov. 14, 2007	
_	Gigi Yeh/Clerk			
Approved By:	Timent Su	Date	Nov. 14, 2007	
			_	

Vincent Su/Manager

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款 列印於背面,亦可在<u>www.sgs.com</u>中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不 可部份複製。對本報告內容或外觀之任何未經授權之變更、僞造、竄改皆屬非法,違犯者將會被依法追訴。



Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 3 of 54

Version

Version No.	Date
00	Nov. 14, 2007
01	Nov. 20, 2007



Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007** Page: 4 of 54

Table of Contents

1.	GEN	ERAL INFORMATION	7
	1.1.	Product Description	7
	1.2.	Related Submittal(s) / Grant (s)	7
	1.3.	Test Methodology	7
	1.4.	Test Facility	7
	1.5.	Special Accessories	7
	1.6.	Equipment Modifications	7
2.	SYST	TEM TEST CONFIGURATION	8
	2.1.	EUT Configuration	8
	2.2.	EUT Exercise	8
	2.3.	Test Procedure	8
	2.4.	Configuration of Tested System	9
3.	SUM	MARY OF TEST RESULTS	10
4.	DES	CRIPTION OF TEST MODES	10
5.	CON	DUCTED EMISSION TEST	11
	5.1.	Standard Applicable	11
	5.2.	EUT Setup	11
	5.3.	Measurement Procedure	11
	5.4.	Measurement Equipment Used:	12
	5.5.	Measurement Result	12
6.	PEA	K OUTPUT POWER MEASUREMENT	15
	6.1.	Standard Applicable	
	6.2.	Measurement Procedure	15
	6.3.	Measurement Result	15
	6.4.	Measurement Equipment Used:	15
7.	20dB	BAND WIDTH	18
	7.1.	Standard Applicable	18
	7.2.	Measurement Procedure	18
	7.3.	Measurement Result	18
	7.4.	Measurement Equipment Used:	18

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、僞造、竄改皆屬非法,違犯者將會被依法追訴。



FCC ID: TNZNSRTA3C2XXX

Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007** Page: 5 of 54

8.	100K	Hz BANDWIDTH OF BAND EDGES MEASUREMENT	21
	8.1.	Standard Applicable	21
	8.2.	Measurement Procedure	21
	8.3.	Measurement Result	21
	8.4.	Measurement Equipment Used:	21
9.	SPUR	RIOUS RADIATED EMISSION TEST	25
	9.1.	Standard Applicable	25
	9.2.	EUT Setup	25
	9.3.	Measurement Procedure	25
	9.4.	Test SET-UP (Block Diagram of Configuration)	26
	9.5.	Measurement Equipment Used:	27
	9.6.	Field Strength Calculation	27
	9.7.	Measurement Result	27
10.	FRE(QUENCY SEPARATION	40
	10.1.	Standard Applicable	40
	10.2.	Measurement Procedure	40
	10.3.	Measurement Result	40
	10.4.	Measurement Equipment Used:	40
11.	NUM	BER OF HOPPING FREQUENCY	42
	11.1.	Standard Applicable	
	11.2.	Measurement Procedure	42
	11.3.	Measurement Result	42
	11.4.	Measurement Equipment Used:	42

12. TIME OF OCCUPANCY (DWELL TIME)44

13. Peak Power Spectral Density51

Standard Applicable44

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款 列印於背面,亦可在<u>www.sgs.com</u>中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不 可部份複製。對本報告內容或外觀之任何未經授權之變更、僞造、竄改皆屬非法,違犯者將會被依法追訴。

12.1.

12.2.

12.3.

13.2.

13.3.



Report No EF/2006/90007-04 Issue Date: Nov. 14, 2007 Page: 6 of 54

14.	ANTE	ENNA REQUIREMENT	.54
	14.1.	Standard Applicable	.54
	14.2.	Antenna Connected Construction	.54

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、僞造、竄改皆屬非法,違犯者將會被依法追訴。



Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 7 of 54

1. GENERAL INFORMATION

1.1. Product Description

The Nolan Systems Inc. Model: NSRTA3C2XXX (X=0~9 or A~Z) is Bluetooth Stereo Headset

The EUT is compliance with Bluetooth Standard.

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 2402 2480 MHz, 79 channels
- B). Rated output power: 1.68dBm
- C). Modulation type: Frequency Hopping Spread Spectrum (FHSS)
- D). Antenna Designation: Micro-Strip Antenna, -0.93 dBi, Non-User Replaceable (Fixed)
- E). Power Supply: 3.7Vdc re-chargeable battery or 5V form PC USB Port.

1.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: TNZNSRTA3C2XXX filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rule. The composite system (Digital device) is compliance with Subpart B is authorized under a Doc procedure.

1.3. Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4. Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the address of SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003 and CISPR 22/EN 55022 requirements. Site No. 1(3 &10 meters) Registration Number: 990257, Both OATS and Anechoic chamber (3 meters) was accredited by TAF (0513). Canada Registration Number: 4620A-1.

1.5. Special Accessories

Not available for this EUT intended for grant.

1.6. Equipment Modifications

Not available for this EUT intended for grant.



Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007** Page: 8 of 54

2. SYSTEM TEST CONFIGURATION

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

2.3. Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 8 and 13 of ANSI C63.4-2003.



Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007** Page: 9 of 54

2.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System (Fixed channel)




Table 2-1 Equipment Used in Tested System

Item	m Equipment Mfr/Bra		Model/ Type No.	FCC ID	Series No.	Data Cable	Power Cord
1.	Notebook	IBM	T40	N/A	99HCYF4	120cm, shielded	Un-shield
2.	CASIRA	CSR	BCES301199/1	N/A	715856	N/A	N/A
3.	DC Power Supply	Topward	3303A	N/A	715856	N/A	N/A
4.	Test software	BlueSuite 1.22	CSR	Version1.22	N/A	N/A	N/A



Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 10 of 54

3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)	Conducted Emission	Compliant
§15.247(b)(1)	Peak Output Power	Compliant
§15.247(a)	20dB Bandwidth	Compliant
§15.247(c)	100 KHz Bandwidth Of Fre-	Compliant
	quency Band Edges	
§15.209(a) (f)	Spurious Emission	Compliant
§15.247(a)(1)	Frequency Separation	Compliant
§15.247(a)(1)(iii)	Number of hopping frequency	Compliant
§15.247(a)(1)(iii)	Time of Occupancy	Compliant
§15.247	Peak Power Density	Compliant
§15.203,	Antenna Requirement	Compliant
§15.247(b)(4)(i)		

4. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low (2402MHz) · mid (2441MHz) and high (2480MHz) with highest data rate are chosen for full testing.

The EUT was placed on a 5 mm high non-metal supporter which was on the wooden table.



Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 11 of 54

5. CONDUCTED EMISSION TEST

5.1. Standard Applicable

According to §15.207. frequency within 150KHz to 30MHz shall not exceed the limit table as be-

Frequency range	Limits dB(uV)			
MHz	Quasi-peak	Average		
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60	50		

Note

- 1. The lower limit shall apply at the transition frequencies
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

5.2. EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2003.
- 2. The EUT was plug-in the AC/DC Power adapter. The host system was placed on the center of the back edge on the test table. The peripherals was placed on the side of the host PC system. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
- 3. The spacing between the peripherals was 10 centimeters.
- 4. External I/O cables were draped along the edge of the test table and bundle when necessary.
- 5. The host system was connected with 110Vac/60Hz power source.

5.3. Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.



Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 12 of 54

5.4. Measurement Equipment Used:

Conducted Emission Test Site										
EQUIPMENT MFR		MODEL	SERIAL	LAST	CAL DUE.					
TYPE		NUMBER	NUMBER	CAL.						
EMC Analyzer	HP	8594EM	3624A00203	09/02/2007	09/03/2008					
EMI Test Receiver	R&S	ESCS30	828985/004	06/09/2007	06/10/2008					
Transient Limiter	HP	11947A	3107A02062	09/02/2007	09/03/2008					
LISN	Rolf-Heine	NNB-2/16Z	99012	12/31/2006	12/30/2007					
LISN	Rolf-Heine	NNB-2/16Z	99013	12/24/2006	12/23/2007					
Coaxial Cables	N/A	No. 3, 4	N/A	12/01/2006	12/01/2007					

5.5. **Measurement Result**

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peake.




Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 13 of 54

Air Drossum:

AC POWER LINE CONDUCTED EMISSION TEST DATA

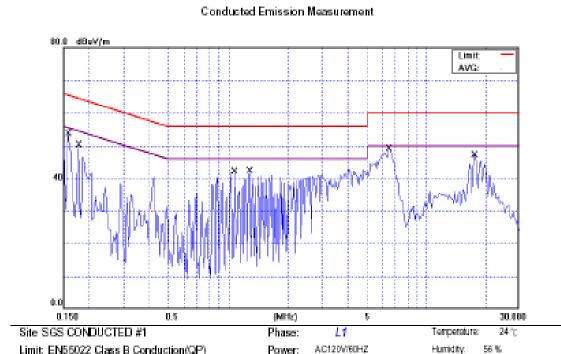

Distance:

Limit: EN55022 Class B Conduction(QP)

EUT: Bluetooth Stereo Headset

M/N: NSRTA3C2XXX Note: Operation mode

No.	Яc.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
		MHz	dBuWm	αB	dBu Wim	dBuV (m	dΒ	Detector	Comment
1		0.1678	67.39	0.20	57.59	65.58	-7.99	QP	
2		0.1578	35.65	0.20	35.85	55.58	-19.73	AVG	
3		0.1773	51.22	0.20	51.42	64.61	-13.19	QP	
4		0.1773	34.39	0.20	34.59	54.61	-20.02	AVG	
5		1.0836	43.38	0.20	43.58	56.00	-12.42	QP	
6		1.0836	42.85	0.20	43.05	46.00	-2.95	AVG	
7		1.2828	43.84	0.20	44.04	56.00	-11.96	QP	
8		1.2828	42.03	0.20	42.23	46.00	-3.77	AVG	
9		6.5094	43.82	0.63	44.35	60.00	-15.65	QP	
10		6.5094	43.35	0.53	43.88	50.00	-6.12	AVG	
11		17.5065	46.16	0.70	46.86	60.00	-13.14	QP	
12		17.5065	40.79	0.70	41.49	50.00	-8.51	AVG	
		17.5055	40.79	0.70	41.49	60.00	-6.61	AVG	

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款 列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、僞造、竄改皆屬非法,違犯者將會被依法追訴。




Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Air Pressure:

hps.

Page: 14 of 54

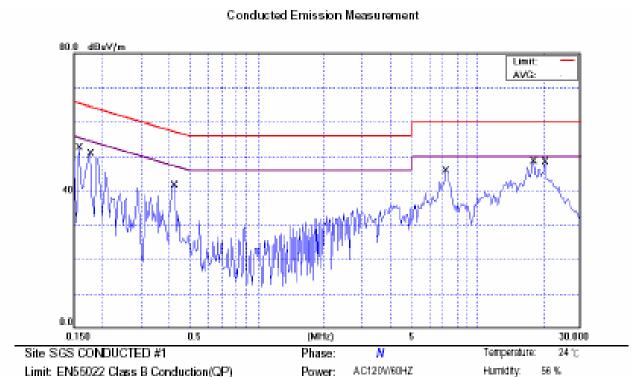

Distance:

EUT: Bluetooth Stereo Headset

M/N: NSRTA3C2XXX Note: Operation mode

No.	Mc.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
		MHz	dBuW/m	ďΒ	dBuWlm	dBuV/m	dΒ	Detector	Comment
1		0.1578	67.22	0.20	57.42	65.58	-8.16	QP	
2		0.1578	40.47	0.20	40.67	55.58	-14.91	AVG	
3		0.1773	51.02	0.20	51.22	64.61	-13.39	QP	
4		0.1773	36.47	0.20	36.67	64.61	-17.94	AVG	
5		0.4234	40.25	0.20	40.45	57.38	-16.93	QP	
6		0.4234	39.89	0.20	40.09	47.38	-7.29	AVG	
7		7.2008	43.78	0.56	44.34	60.00	-15.66	QP	
8		7.2008	36.53	0.56	37.09	50.00	-12.91	AVG	
9		17.9625	44.98	0.76	45.74	60.00	- 14.26	QP	
10		17.9625	36.90	0.76	37.66	60.00	-12.34	AVG	
11		20.2594	40.82	0.81	41.63	60.00	-18.37	QP	
12		20.2594	32.82	0.81	33.63	50.00	-16.37	AVG	

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款 列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、僞造、竄改皆屬非法,違犯者將會被依法追訴。

Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 15 of 54

6. PEAK OUTPUT POWER MEASUREMENT

6.1. Standard Applicable

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1Watt. For all other frequency hopping systems in the 2400 – 2483.5MHz band: 0.125 Watts.

6.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Channel power function, RBW, VBW = 1MHz)
- 3. Record the max. reading.
- 4. Repeat above procedures until all frequency measured were complete.

6.3. Measurement Result

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2402.00	1.48	0.20	1.68	0.00147	1
2441.00	1.44	0.20	1.64	0.00146	1
2480.00	1.20	0.20	1.40	0.00138	1

6.4. Measurement Equipment Used:

Conducted Emission Test Site											
EQUIPMENT	MFR	MODEL SERIAL		LAST	CAL DUE.						
TYPE		NUMBER	NUMBER	CAL.							
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2007	03/28/2008						
Spectrum Analyzer	Spectrum Analyzer Agilent		US41160416	06/28/2007	06/29/2008						
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2007	11/10/2008						
Low Loss Cable	HUBER+SUHNE R	SUCOFLEX 104PEA	N/A	N/A	N/A						
Attenuator	Mini-Circult	BW-S10W5	N/A	10/07/2007	10/06/2008						
Attenuator	Attenuator Mini-Circult		N/A	10/07/2007	10/06/2008						
Splitter	Mini-Circult	ZFSC-2-10G	N/A	10/07/2007	10/06/2008						


This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款 列印於背面,亦可在<u>www.sgs.com</u>中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不 可部份複製。對本報告內容或外觀之任何未經授權之變更、僞造、竄改皆屬非法,違犯者將會被依法追訴。




Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 16 of 54

Peak Power Output Data Plot (CH Low)

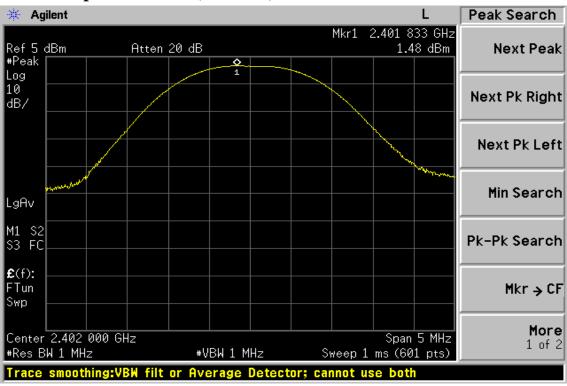

Peak Power Output Data Plot (CH Mid)

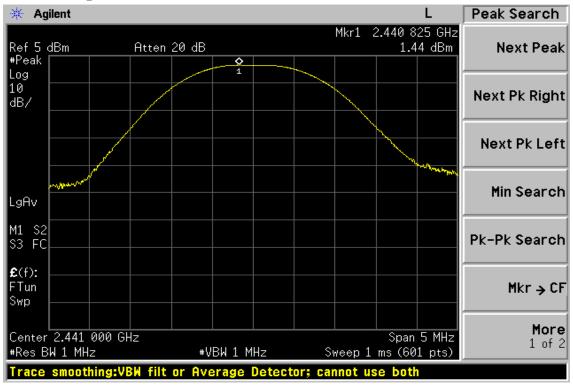


This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款 列印於背面,亦可在<u>www.sgs.com</u>中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不 可部份複製。對本報告內容或外觀之任何未經授權之變更、僞造、竄改皆屬非法,違犯者將會被依法追訴。



Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 17 of 54

Peak Power Output Data Plot (CH High)

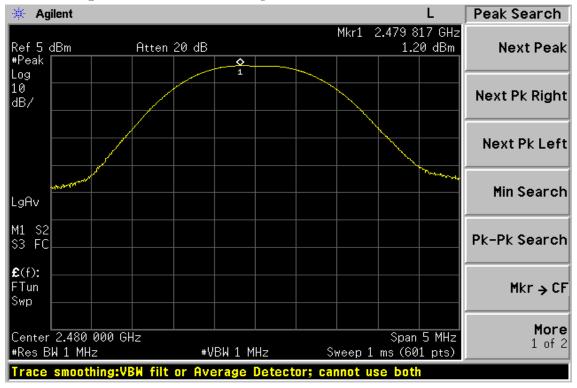



Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 18 of 54

7. 20dB BAND WIDTH

7.1. Standard Applicable

For frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth.

7.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW=10KHz (1 % of Bandwidth.), Span= 3MHz, Sweep=auto
- 4. Mark the peak frequency and –20dB (upper and lower) frequency.
- 5. Repeat above procedures until all frequency measured were complete.

7.3. Measurement Result

СН	Bandwidth (MHz)
Lower	0.739
Mid	0.739
Higher	0.721

7.4. Measurement Equipment Used:

7.4. Weasurement Equipment Oscu.											
Conducted Emission Test Site											
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.						
TYPE		NUMBER	NUMBER	CAL.							
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2007	03/28/2008						
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2007	06/29/2008						
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2007	11/10/2008						
Low Loss Cable	HUBER+SUHNE R	SUCOFLEX 104PEA	N/A	N/A	N/A						
Attenuator	Mini-Circult	BW-S10W5	N/A	10/07/2007	10/06/2008						
Attenuator Mini-Circult		BW-S6W5	N/A	10/07/2007	10/06/2008						
Splitter	Mini-Circult	ZFSC-2-10G	N/A	10/07/2007	10/06/2008						


This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款 列印於背面,亦可在<u>www.sgs.com</u>中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不 可部份複製。對本報告內容或外觀之任何未經授權之變更、僞造、竄改皆屬非法,違犯者將會被依法追訴。




Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 19 of 54

20dB Band Width Test Data CH-Low

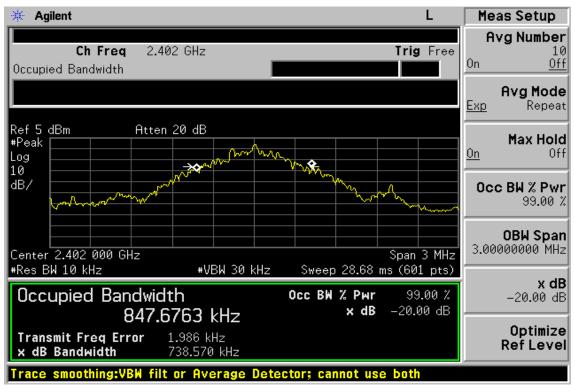

20dB Band Width Test Data CH-Mid

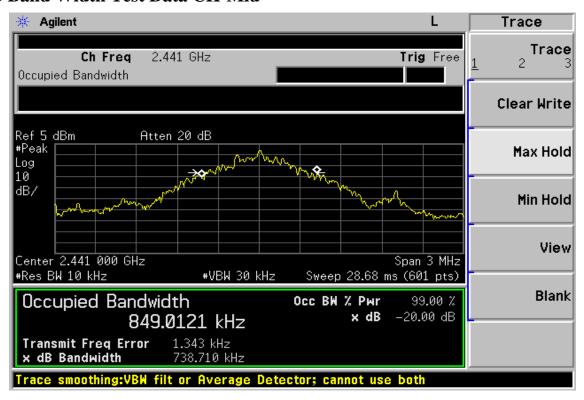


This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款 列印於背面,亦可在<u>www.sgs.com</u>中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不 可部份複製。對本報告內容或外觀之任何未經授權之變更、僞造、竄改皆屬非法,違犯者將會被依法追訴。



Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 20 of 54

20dB Band Width Test Data CH-High

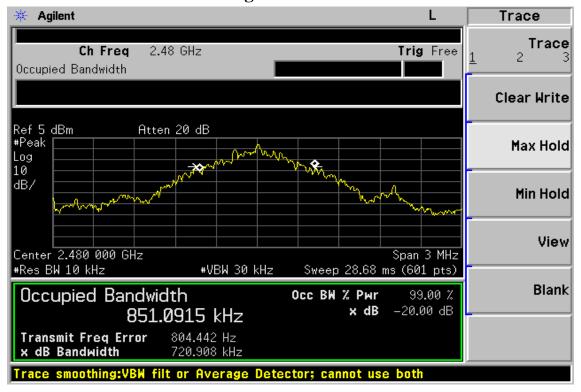

Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 21 of 54

8. 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT

8.1. Standard Applicable

According to §15.247(c), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

8.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Span=25MHz, Sweep = auto
- 5. Mark Peak, 2.390GHz and 2.488GHz and record the max. level.
- 6. Repeat above procedures until all frequency measured were complete.
- 7. Radiated Emission refer to section 9.

8.3. Measurement Result

Refer to attach spectrum analyzer data chart.

8.4. Measurement Equipment Used:

Conducted Emission Test Site										
EQUIPMENT	MFR	MODEL SERIAL		LAST	CAL DUE.					
TYPE		NUMBER	NUMBER	CAL.						
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2007	03/28/2008					
Spectrum Analyzer	Spectrum Analyzer Agilent		US41160416	06/28/2007	06/29/2008					
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2007	11/10/2008					
Low Loss Cable	HUBER+SUHNE R	SUCOFLEX 104PEA	N/A	N/A	N/A					
Attenuator	Mini-Circult	BW-S10W5	N/A	10/07/2007	10/06/2008					
Attenuator	Attenuator Mini-Circult		N/A	10/07/2007	10/06/2008					
Splitter	Mini-Circult	ZFSC-2-10G	N/A	10/07/2007	10/06/2008					

Note: Measurement Equipment for radiated emission refers to section 9.


This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款 列印於背面,亦可在<u>www.sgs.com</u>中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不 可部份複製。對本報告內容或外觀之任何未經授權之變更、僞造、竄改皆屬非法,違犯者將會被依法追訴。




Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 22 of 54

Conducted Emission: Test Data CH-Low

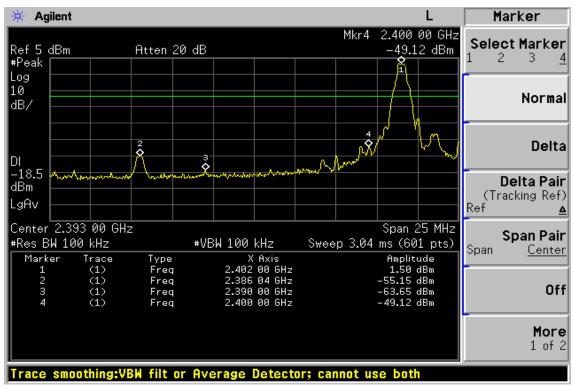

Conducted Emission: Test Data CH-High

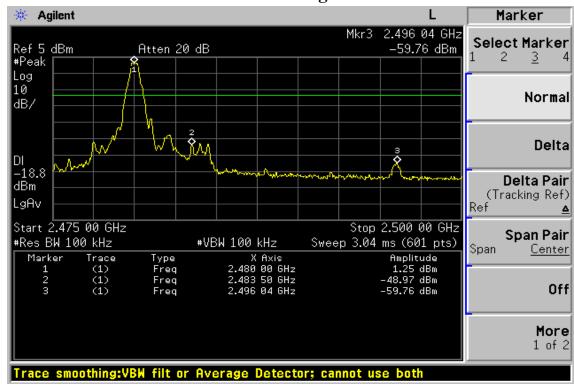

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款 列印於背面,亦可在<u>www.sgs.com</u>中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不 可部份複製。對本報告內容或外觀之任何未經授權之變更、僞造、竄改皆屬非法,違犯者將會被依法追訴。



Report No EF/2006/90007-04 Issue Date: Nov. 14, 2007

Page: 23 of 54

Radiated Emission:

Operation Mode TX CH Low Test Date Sep. 22, 2006

Fundamental Frequency 2402 MHz Test By Alex Temperature $25 \text{ }^{\circ}\text{C}$ Pol Ver.

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
2386.0	33.44		-2.17	31.27		74.00	54.00	-22.73	Peak
2390.0	33.28		-2.13	31.15		74.00	54.00	-22.85	Peak

Operation Mode TX CH Low Test Date Sep. 22, 2006

Fundamental Frequency 2402 MHz Test By Alex Temperature 25 °C Pol Hor.

Humidity 65 %

		Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
	Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
•	2386.0	33.65		-2.17	31.48		74.00	54.00	-22.52	Peak
	2390.0	33.69		-2.13	31.56		74.00	54.00	-22.44	Peak

Remark:

- (1) Datas of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column °
- (3) Spectrum Peak Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sqs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款列印於背面,亦可不www.sqs.com中查閱。將本公司之義務,受責,管轄權告明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、僞造、竄改皆屬非法,違犯者將會被依法追訴。



Report No EF/2006/90007-04 Issue Date: Nov. 14, 2007

Page: 24 of 54

Radiated Emission:

Operation Mode TX CH High Test Date Sep. 22, 2006

Fundamental Frequency $2480 \, \text{MHz}$ Test By Alex Temperature $25 \, ^{\circ}\text{C}$ Pol Ver.

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m	(dB)	
2483.5	35.73		-1.72	34.01		74.00	54.00	-19.99	Peak
2496.0	33.35		-1.61	31.74		74.00	54.00	-22.26	Peak
Operation	Mode	TX C	CH High			Tes	t Date	Sep. 22, 20	006
Fundamen	ital Freque	ncy 2480	MHz			Tes	t By	Alex	
Temperatu	ıre	25 °(\mathbb{C}			Pol		Hor.	
Humidity		65 %							

		Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Fı	req.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(M	(Hz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
248	83.6	44.06		-1.72	42.34		74.00	54.00	-11.66	Peak
249	96.0	35.76		-1.61	34.15		74.00	54.00	-19.85	Peak

- (1) Datas of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column \circ
- (3) Spectrum Peak Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms
- (4) Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 25 of 54

9. SPURIOUS RADIATED EMISSION TEST

9.1. Standard Applicable

According to \$15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

9.2. EUT Setup

- 1. The radiated emission tests were performed in the 3 meter open-test site, using the setup in accordance with the ANSI C63.4-2003.
- 2. The EUT was put in the front of the test table. The peripherals was placed on the side of the host system. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
- 3. The spacing between the peripherals was 10 centimeters.
- 4. External I/O cables were draped along the edge of the test table and bundle when necessary.
- 5. The host PC system was connected with 110Vac/60Hz power source.

9.3. Measurement Procedure


- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Repeat above procedures until all frequency measured were complete.

Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**


Page: 26 of 54

9.4. Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

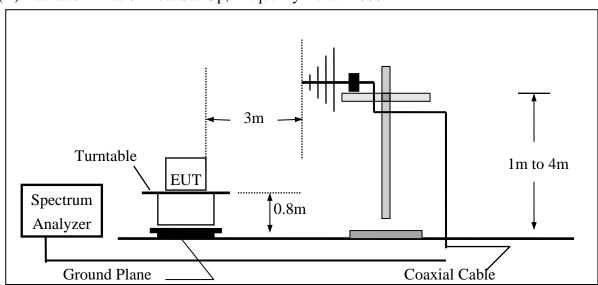

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

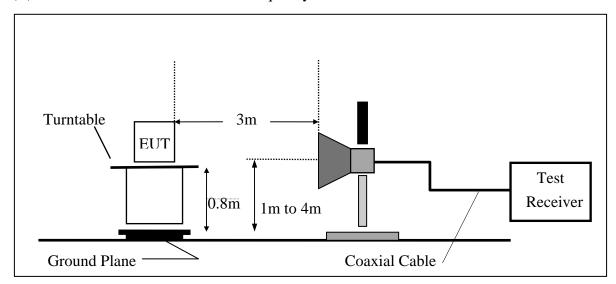



Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 27 of 54

9.5. **Measurement Equipment Used:**

	9	66 Chamber			
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	R&S	FSP 40	100034	05/27/2007	05/26/2008
Spectrum Analyzer	Agilent	E7405A	US41160416	08/27/2007	08/26/2008
Bilog Antenna	SCHWAZBECK	VULB9163	152	06/03/2007	06/02/2008
Horn antenna			309/320	08/16/2007	08/15/2008
Horn antenna	Schwarzbeck	BBHA 9170	184/185	07/04/2007	07/03/2008
Pre-Amplifier	HP	8447D	2944A09469	07/19/2007	07/18/2008
Pre-Amplifier	HP	8494B	3008A00578	02/26/2007	02/25/2008
Turn Table	HD	DT420	N/A	N.C.R	N.C.R
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R
Controller	HD	HD100	N/A	N.C.R	N.C.R
Low Loss Cable HUBER+SUH		SUCOFLEX 104PEA-10 M	10m	10/09/2007	10/08/2008
Low Loss Cable	HUBER+SUHNE R	SUCOFLEX 104PEA-3M	3m	10/09/2007	10/08/2008
Site NSA	SGS	966 chamber	N/A	11/17/2006	11/16/2007

9.6. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

9.7. Measurement Result

Refer to attach tabular data sheets.


This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款 列印於背面,亦可在<u>www.sgs.com</u>中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不 可部份複製。對本報告內容或外觀之任何未經授權之變更、僞造、竄改皆屬非法,違犯者將會被依法追訴。




Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 28 of 54

Conducted Spurious Emission Measurement Result Ch Low 30MHz - 3GHz

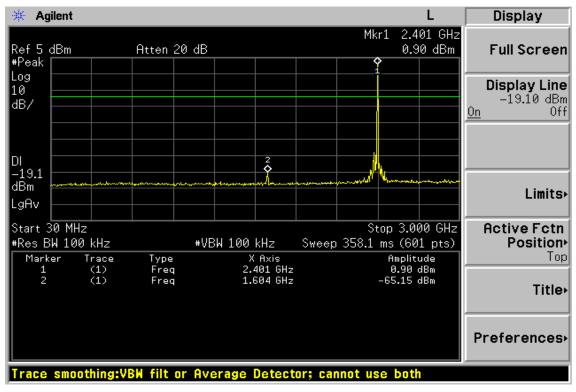

Ch Low 3GHz – 26.5GHz

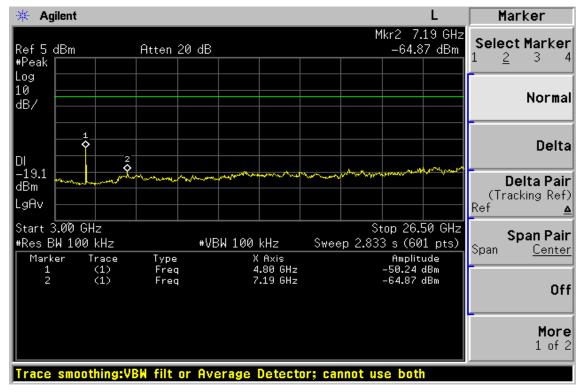


This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sos.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款 列印於背面,亦可在<u>www.sgs.com</u>中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不 可部份複製。對本報告內容或外觀之任何未經授權之變更、僞造、竄改皆屬非法,違犯者將會被依法追訴。




Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 29 of 54

Ch Mid 30MHz - 3GHz

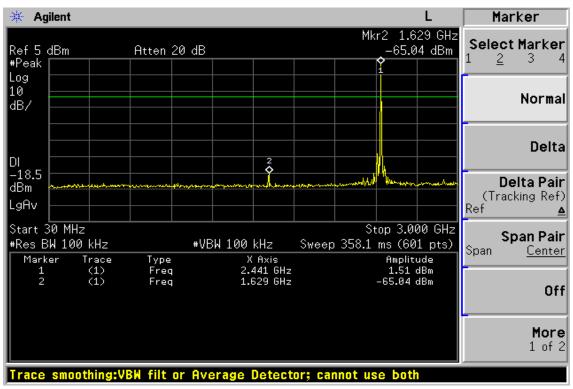

Ch Mid 3GHz – 26.5GHz

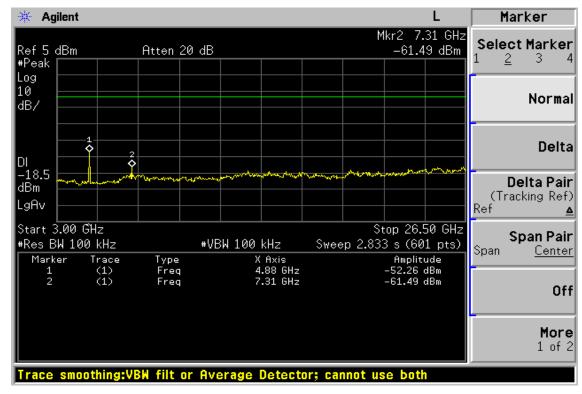


This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款 列印於背面,亦可在<u>www.sgs.com</u>中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不 可部份複製。對本報告內容或外觀之任何未經授權之變更、僞造、竄改皆屬非法,違犯者將會被依法追訴。




Report No EF/2006/90007-04 Issue Date: Nov. 14, 2007

Page: 30 of 54

Ch High 30MHz - 3GHz

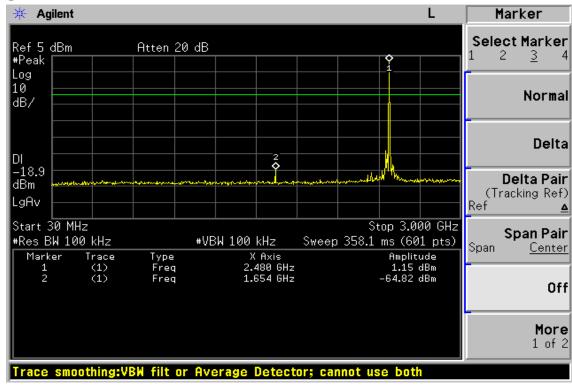

Ch High 3GHz - 26.5GHz

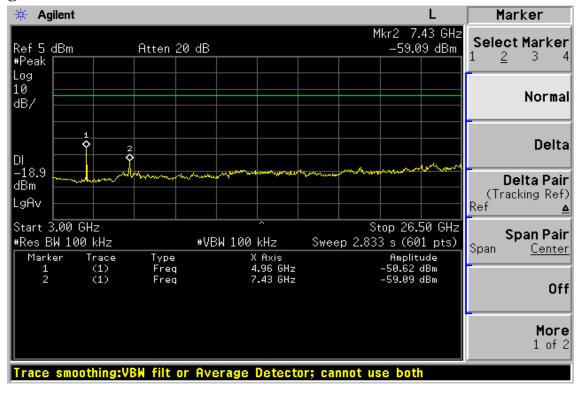

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,受責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、僞造、竄改皆屬非法,違犯者將會被依法追訴。



Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 31 of 54

Radiated Spurious Emission Measurement Result (below 1GHz)

TX CH Low Operation Mode **Test Date** Nov. 12, 2007 Fundamental Frequency 2402MHz Test By Bondi

Temperature 25 °C Pol Ver./Hor.

Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
92.08	V	Peak	44.44	-17.38	27.06	43.50	-16.44
101.78	V	Peak	46.84	-16.87	29.97	43.50	-13.53
153.19	V	Peak	33.34	-13.00	20.34	43.50	-23.16
256.98	V	Peak	33.85	-13.67	20.18	46.00	-25.82
480.08	V	Peak	33.80	-8.56	25.24	46.00	-20.76
644.98	V	Peak	32.12	-5.10	27.02	46.00	-18.98
106.63	Н	Peak	37.61	-16.48	21.13	43.50	-22.37
256.98	Н	Peak	52.10	-13.67	38.43	46.00	-7.57
288.99	Н	Peak	36.36	-13.23	23.13	46.00	-22.87
463.59	Н	Peak	41.46	-8.55	32.91	46.00	-13.09
480.08	Н	Peak	38.34	-8.56	29.78	46.00	-16.22
512.09	Н	Peak	34.73	-8.33	26.40	46.00	-19.60

- (1) Measuring frequencies from 30 MHz to the 1GHz •
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Datas of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 32 of 54

Radiated Spurious Emission Measurement Result (below 1GHz)

TX CH Mid Nov. 12, 2007 Operation Mode Test Date

Fundamental Frequency 2441MHz Test By Bondi Temperature 25 °C Pol Ver./Hor

Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
58.13	V	Peak	41.34	-14.66	26.68	40.00	-13.32
77.53	V	Peak	44.14	-17.46	26.68	40.00	-13.32
92.08	V	Peak	45.98	-17.38	28.60	43.50	-14.90
101.78	V	Peak	44.25	-16.87	27.38	43.50	-16.12
143.49	V	Peak	33.83	-13.42	20.41	43.50	-23.09
256.98	V	Peak	33.14	-13.67	19.47	46.00	-26.53
106.63	Н	Peak	37.59	-16.48	21.11	43.50	-22.39
256.98	Н	Peak	52.23	-13.67	38.56	46.00	-7.44
288.99	Н	Peak	35.77	-13.23	22.54	46.00	-23.46
449.04	Н	Peak	36.02	-8.61	27.41	46.00	-18.59
480.08	Н	Peak	39.99	-8.56	31.43	46.00	-14.57
512.09	Н	Peak	35.02	-8.33	26.69	46.00	-19.31

- (1) Measuring frequencies from 30 MHz to the 1GHz •
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Datas of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 33 of 54

Radiated Spurious Emission Measurement Result (below 1GHz)

Nov. 12, 2007 Operation Mode TX CH High **Test Date**

Fundamental Frequency 2480MHz Test By Bondi Temperature 25 °C Pol Ver./Hor

Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
77.53	V	Peak	43.89	-17.46	26.43	40.00	-13.57
92.08	V	Peak	45.93	-17.38	28.55	43.50	-14.95
101.78	V	Peak	44.59	-16.87	27.72	43.50	-15.78
153.19	V	Peak	34.23	-13.00	21.23	43.50	-22.27
177.44	V	Peak	33.17	-14.38	18.79	43.50	-24.71
256.98	V	Peak	33.28	-13.67	19.61	46.00	-26.39
101.78	Н	Peak	38.45	-16.87	21.58	43.50	-21.92
256.98	Н	Peak	52.12	-13.67	38.45	46.00	-7.55
288.99	Н	Peak	36.35	-13.23	23.12	46.00	-22.88
449.04	Н	Peak	35.78	-8.61	27.17	46.00	-18.83
468.44	Н	Peak	35.73	-8.55	27.18	46.00	-18.82
480.08	Н	Peak	39.27	-8.56	30.71	46.00	-15.29

- (1) Measuring frequencies from 30 MHz to the 1GHz •
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Datas of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No EF/2006/90007-04 Issue Date: Nov. 14, 2007

Page: 34 of 54

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode TX CH Low Test Date Sep. 22, 2006

Fundamental Frequency 2402 MHz Test By Alex Temperature $25 \text{ }^{\circ}\text{C}$ Pol Ver.

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq. (MHz)	U	U	Ant./CL CF(dB)		AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)	Margin (dB)	
(11111)	(4241)	(4241)	01 (02)	(42 4 1122)	(42 4 77111))(42 4 1111)	(424 (7111)	(42)	•
4804.0	50.84	38.54	6.59	55.45	43.13	74.00	54.00	-10.87	AV
7206.0									
9608.0									
12010.0									
14412.0									
16814.0									
19216.0									
21618.0									
24020.0									

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency o
- (2) Datas of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column \circ
- (4) Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- (5) Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.



Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 35 of 54

Radiated Spurious Emission Measurement Result (above 1GHz)

TX CH Low Operation Mode **Test Date** Sep. 22, 2006

Fundamental Frequency 2402 MHz Test By Sky Temperature Pol Hor 25 °C

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	U	U	Ant./CL		AV	Limit	Limit	Margin	
(MHz)	(aBuv)	(aBuv)	CF(aB)	(aBuv/m ₎	(aBuv/m)(dBuV/m)	(aBuv/m)	(dB)	ı
4804.0	49.95	36.84	6.59	54.56	41.45	74.00	54.00	-12.55	AV
7206.0									
9608.0									
12010.0									
14412.0									
16814.0									
19216.0									
21618.0									
24020.0									

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency o
- (2) Datas of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column o
- (4) Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- (5) Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.



Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 36 of 54

Radiated Spurious Emission Measurement Result (above 1GHz)

TX CH Mid Operation Mode Test Date Sep. 22, 2006

Fundamental Frequency 2441 MHz Test By Sky Temperature 25 °C Pol Ver

Humidity 65 %

	Peak	AV		Actu	al FS	Peak	AV		
Fre q.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1747.5	51.39		-5.35	46.04		74.00	54.00	-7.96	Peak
4874.0	53.64	41.34	4.75	58.39	46.09	74.00	54.00	-7.91	AV
4882.0									
7323.0									
9764.0									
12205.0									
14646.0									
17087.0									
19528.0									
21969.0									
24410.0									

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency o
- (2) Datas of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column o
- (4) Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- (5) Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.



Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 37 of 54

Radiated Spurious Emission Measurement Result (above 1GHz)

TX CH Mid Operation Mode **Test Date** Sep. 22, 2006

Fundamental Frequency 2441 MHz Test By Alex Temperature Pol Hor 25 °C

65 % Humidity

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	-
1747.5	52.32		-5.35	46.97		74.00	54.00	-7.03	Peak
4882.0	51.71	40.51	4.75	56.46	45.26	74.00	54.00	-8.74	AV
7323.0									
9764.0									
12205.0									
14646.0									
17087.0									
19528.0									
21969.0									
24410.0									

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency o
- (2) Datas of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column o
- (4) Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- (5) Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.



Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 38 of 54

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode TX CH High **Test Date** Sep. 22, 2006

Fundamental Frequency 2480 MHz Test By Alex Temperature Pol Ver. 25 °C

Humidity 65 %

		Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
	Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	
	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	-
•	1650.0	48.75		-5.28	43.47		74.00	54.00	-10.53	Peak
	1650.0	44.04		4.49	42.07		74.00	54.00	-11.93	Peak
	4960.0	43.97		6.71	48.89		74.00	54.00	-5.11	Peak
	7440.0									
	9920.0									
	12400.0									
	14880.0									
	17360.0									
	19840.0									
	22320.0									
	24800.0									

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency o
- (2) Datas of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column o
- (4) Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- (5) Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.



Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 39 of 54

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode TX CH High **Test Date** Sep. 22, 2006

Fundamental Frequency 2480 MHz Test By Alex Temperature Pol Hor 25 °C

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	•
1650.0	44.33		-5.84	38.49		74.00	54.00	-15.51	Peak
4960.0									
7440.0									
9920.0									
12400.0									
14880.0									
17360.0									
19840.0									
22320.0									
24800.0									

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency o
- (2) Datas of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column o
- (4) Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- (5) Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.



Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 40 of 54

10. FREQUENCY SEPARATION

10.1. Standard Applicable

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the 20dB bandwidth of the hopping channel, whichever is greater.

10.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = middle of hopping channel.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Adjust Span to 5 MHz, Sweep = auto.
- 5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

10.3. Measurement Result

Channel separation	Limit	Result		
MHz	kHz			
1	>=25KHz or 20 dB bandwidth	PASS		

10.4. Measurement Equipment Used:


Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
ТҮРЕ		NUMBER	NUMBER	CAL.				
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2007	03/28/2008			
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2007	06/29/2008			
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2007	11/10/2008			
Low Loss Cable	HUBER+SUHNE R	SUCOFLEX 104PEA	N/A	N/A	N/A			
Attenuator	Mini-Circult	BW-S10W5	N/A	10/07/2007	10/06/2008			
Attenuator	Mini-Circult	BW-S6W5	N/A	10/07/2007	10/06/2008			
Splitter	Mini-Circult	ZFSC-2-10G	N/A	10/07/2007	10/06/2008			



Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 41 of 54

Frequency Separation Test Data

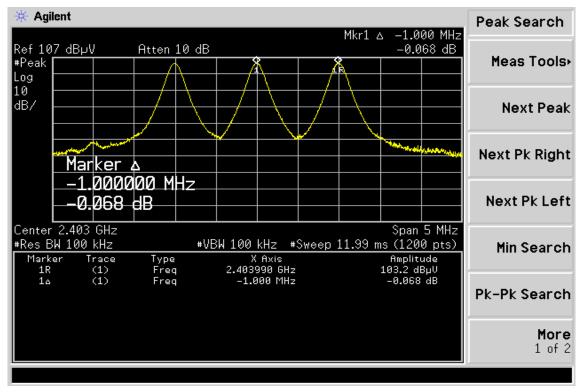

Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 42 of 54

11. NUMBER OF HOPPING FREQUENCY

11.1. Standard Applicable

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

11.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz,
- 5. Max hold, view and count how many channel in the band.

11.3. Measurement Result

Total No of	Limit (CH)	Measurement result (CH)	Result
hopping channel	15	79	Pass

11.4. Measurement Equipment Used:

Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
TYPE		NUMBER	NUMBER	CAL.				
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2007	03/28/2008			
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2007	06/29/2008			
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2007	11/10/2008			
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A			
Attenuator	Mini-Circult	BW-S10W5	N/A	10/07/2007	10/06/2008			
Attenuator	Mini-Circult	BW-S6W5	N/A	10/07/2007	10/06/2008			
Splitter	Mini-Circult	ZFSC-2-10G	N/A	10/07/2007	10/06/2008			




Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**


Page: 43 of 54

Channel Number

2.4 GHz - 2.441GHz

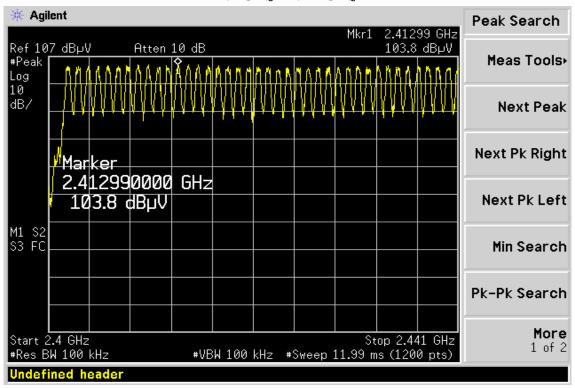

2.441 GHz - 2.4835GHz

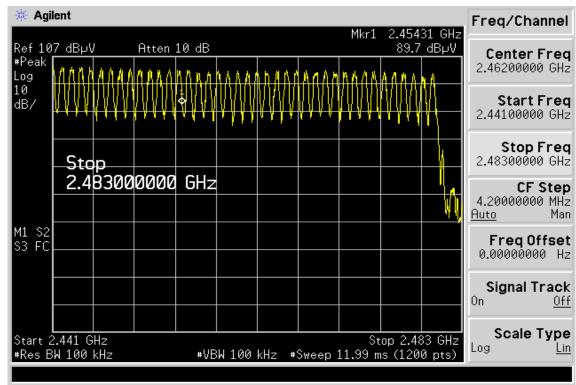

Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 44 of 54

12. TIME OF OCCUPANCY (DWELL TIME)

A period time = 0.4 (ms) * 79 = 31.6 (s)

12.1. Standard Applicable

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

12.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Span = 0Hz, Adjust Sweep = 30s.
- 5. Repeat above procedures until all frequency measured were complete.

12.3. Measurement Result

The dwell time of 0.312 s within a 30 second period in data mode is independent from the packet type (packet length). The calculation for a 30 second period is a follows:

Dwell time = time slot length * hop rate / number of hopping channels *30s

CH Low: DH1 time slot = 0.405 (ms) * (1600/(1*79)) * 31.6 = 259.2 (ms) DH3 time slot = 1.675 (ms) * (1600/(3*79)) * 31.6 = 357.3 (ms) DH5 time slot = 2.925 (ms) * (1600/(5*79)) * 31.6 = 374.4 (ms) CH Mid: DH1 time slot = 0.405 (ms) * (1600/(1*79)) * 31.6 = 259.2 (ms) DH3 time slot = 1.675 (ms) * (1600/(3*79)) * 31.6 = 357.3 (ms) DH5 time slot = 2.906 (ms) * (1600/(5*79)) * 31.6 = 371.9 (ms) CH High: DH1 time slot = 0.405 (ms) * (1600/(1*79)) * 31.6 = 259.2 (ms)

DH5 time slot = 2.906 (ms) * (1600/(5*79)) * 31.6 = 371.9 (ms)

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款 列印於背面,亦可在<u>www.sgs.com</u>中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不 可部份複製。對本報告內容或外觀之任何未經授權之變更、僞造、竄改皆屬非法,違犯者將會被依法追訴。

DH3 time slot = 1.662 (ms) * (1600/(3*79)) * 31.6 = 354.5 (ms)



Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 45 of 54

12.4. Measurement Equipment Used:

Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
TYPE		NUMBER	NUMBER	CAL.				
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2007	03/28/2008			
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2007	06/29/2008			
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2007	11/10/2008			
Low Loss Cable	HUBER+SUHNE R	SUCOFLEX 104PEA	N/A	N/A	N/A			
Attenuator	Mini-Circult	BW-S10W5	N/A	10/07/2007	10/06/2008			
Attenuator	Mini-Circult	BW-S6W5	N/A	10/07/2007	10/06/2008			
Splitter	Mini-Circult	ZFSC-2-10G	N/A	10/07/2007	10/06/2008			




Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 46 of 54

Dwell Time Test Data

CH-Low


DH1

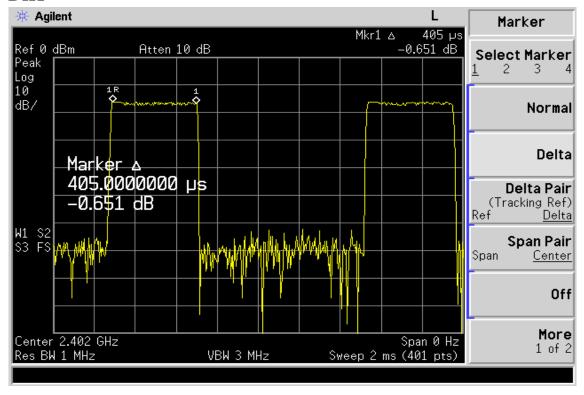




Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007** Page: 47 of 54

DH3

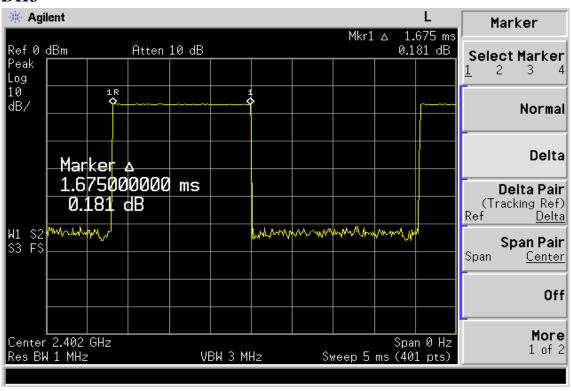

DH5

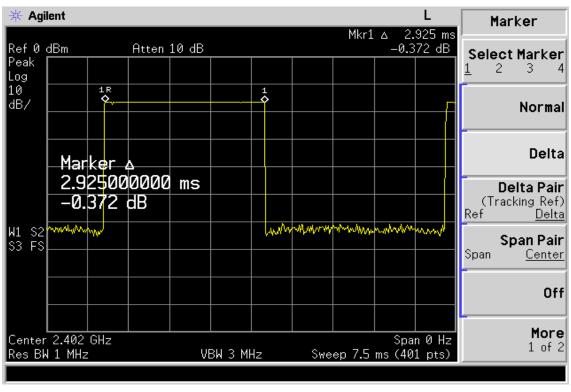




Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**


Page: 48 of 54

CH-Mid

DH1

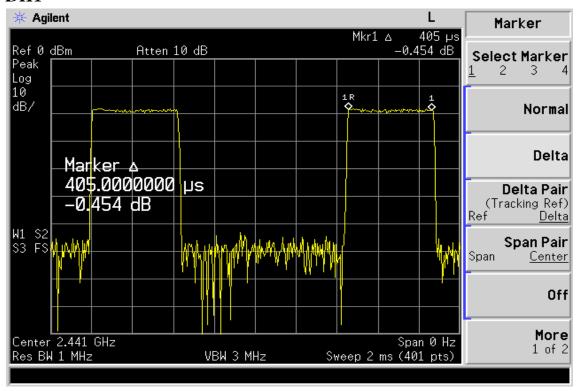


DH3

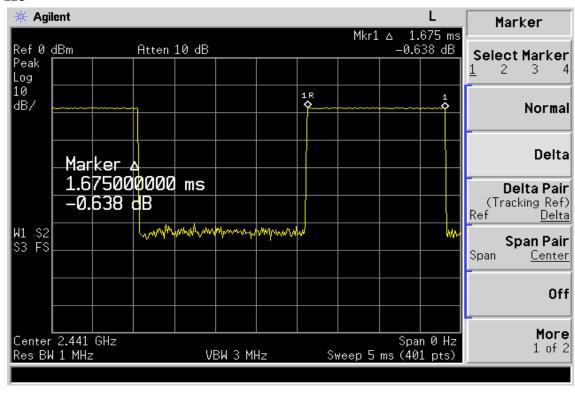




Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007** Page: 49 of 54

DH5

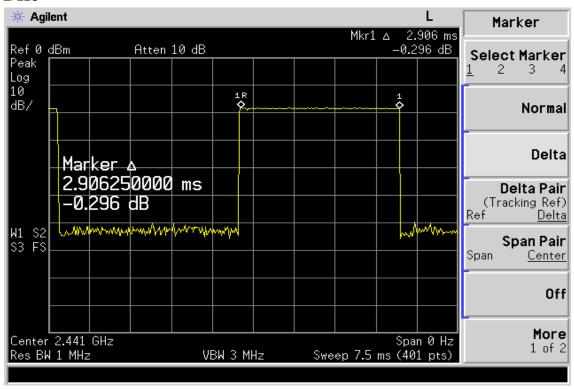

CH-High

DH1

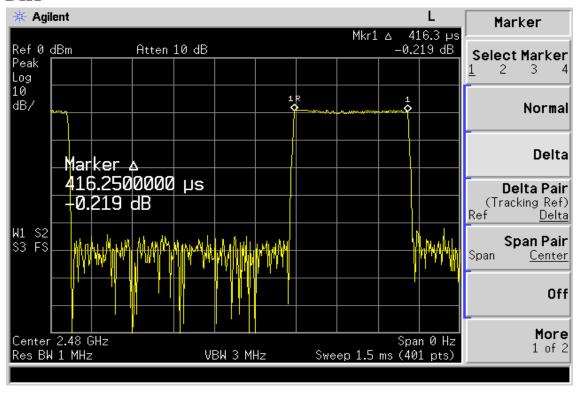





Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 50 of 54

DH3

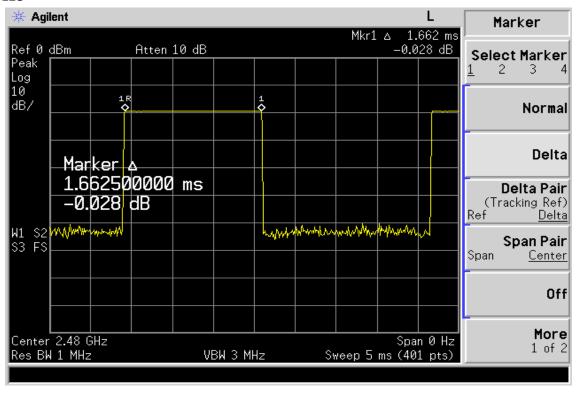

DH5

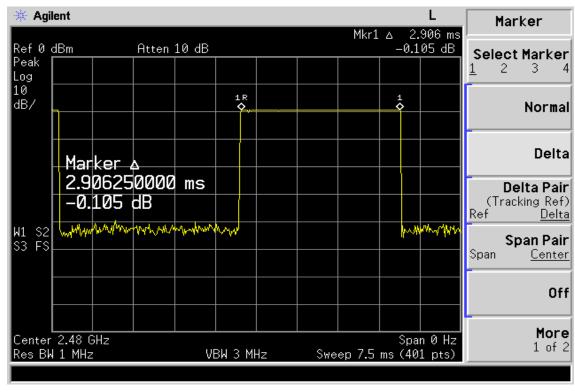



Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 51 of 54

13. Peak Power Spectral Density

13.1. Standard Applicable

According to §15.247(d), for direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3kHz band during any time interval of continuous transmission.

13.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 3KHz, VBW = 10KHz, Span = 1.5MHz, Sweep=100s
- 4. Record the max. reading.
- 5. Repeat above procedures until all frequency measured were complete.

13.3. Measurement Result

СН	RF Power Density	Cable loss	RF Power Density	Maximum Limit
	Reading (dBm)	(dB)	Level (dBm)	(dBm)
Low	-8.83	0.20	-8.63	8
Mid	-8.60	0.20	-8.40	8
High	-9.40	0.20	-9.20	8

13.4. Measurement Equipment Used:


Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
TYPE		NUMBER	NUMBER	CAL.				
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2007	03/28/2008			
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2007	06/29/2008			
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2007	11/10/2008			
Low Loss Cable	HUBER+SUHNE R	SUCOFLEX 104PEA	N/A	N/A	N/A			
Attenuator	Mini-Circult	BW-S10W5	N/A	10/07/2007	10/06/2008			
Attenuator	Mini-Circult	BW-S6W5	N/A	10/07/2007	10/06/2008			
Splitter	Mini-Circult	ZFSC-2-10G	N/A	10/07/2007	10/06/2008			




Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 52 of 54

Power Spectral Density Test Plot (CH-Low)

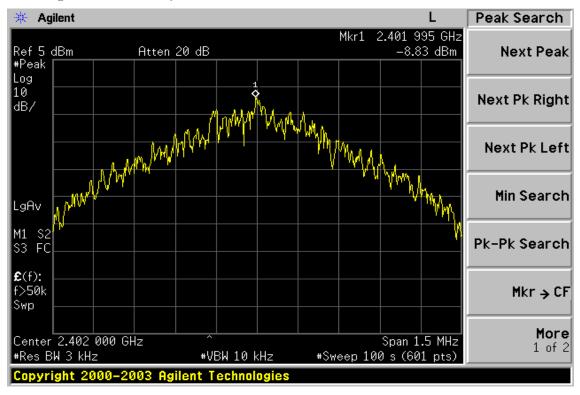

Power Spectral Density Test Plot (CH-Mid)

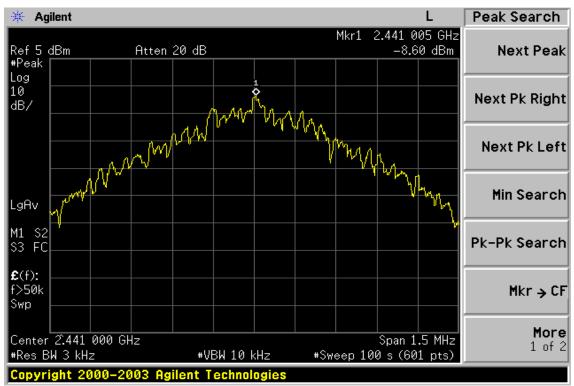




Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 53 of 54

Power Spectral Density Test Plot (CH-High)

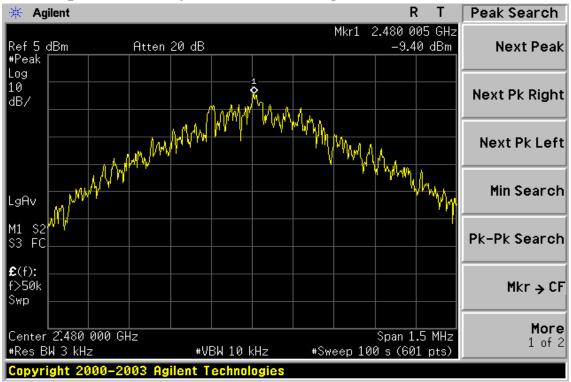



Report No EF/2006/90007-04 **Issue Date: Nov. 14, 2007**

Page: 54 of 54

14. ANTENNA REQUIREMENT

14.1. Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

14.2. Antenna Connected Construction

The directional gains of antenna used for transmitting is -0.93 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.