



Report Tracker

For MFA internal use only

Please keep this page with the report in out files.

Applicant: RF Central
Model:
FCC ID:

Formulaire: L:\\Project\\Formulaire\\FCC_15.247_WIP.rtf
Last Modified: 5/14/2007
Purpose:

MFA Project ID: p0770002
Client ID: RFCENTRAL

MFA Document ID: d0770019
Date: July 25, 2007
This Printing 2007-Aug-2 Thu
Writer: /rh

< Check here if this report has been manually modified.
 < Check here if this report was made from another report.
Original document :
 < Check here if this report varies significantly from the formulaire



Flom Test Labs
EMI, EMC, RF Testing Experts Since 1963

toll-free: (866) 311-3268
fax: (480) 926-3598
<http://www.flomlabs.com>
info@flomlabs.com

Date: July 25, 2007

Federal Communications Commission
Via: Electronic Filing

Attention: Authorization & Evaluation Division

Applicant: RF Central, LLC
Equipment: Camera Mounted Video Transmitter
FCC ID: TO4-RFXCMT2058
FCC Rules:

Gentlemen:

On behalf of the Applicant, enclosed please find Application Form 731, Engineering Test Report and all pertinent documentation, the whole for approval of the referenced equipment as shown.

We trust the same is in order. Should you need any further information, kindly contact the writer who is authorized to act as agent.

Sincerely yours,

Hoosamuddin S. Bandukwala, Lab Director

Enclosure(s)
HSB/rh

Flom Test Labs
3356 N. San Marcos Place, Suite 107
Chandler, Arizona 85225-7176
(866) 311-3268 phone, (480) 926-3598 fax

p0770002, d0770019

List Of Exhibits
(FCC Certification (Transmitters) - Revised 9/28/98)

Applicant: RF Central, LLC

FCC ID: TO4-RFXCMT2058

By Applicant:

1. Letter Of Authorization
2. Identification Drawings
 - Id Label
 - Location Info
 - Attestation Statement(S)
 - Location of Compliance Statement
3. Documentation: 2.1033(B)
 - (3) User Manual(S)
 - (4) Operational Description
 - (5) Block Diagram
 - (5) Schematic Diagram
 - (7) External Photographs
Internal Photographs
Parts List
Active Devices

By F.T.L. Inc.

- A. Testimonial & Statement of Certification
- B. Statement of Qualifications

Transmitter Certification

of

FCC ID: TO4-RFXCMT2058
Model: RFX-CMT

to

Federal Communications Commission


Rule Part(s) 15.247

Date Of Report: July 25, 2007

On the Behalf of the Applicant: RF Central, LLC
99 Garden Parkway
Carlisle, PA 17013

Attention of: Keith Blaisdell, Director of Engineering and Production
Ph: (717)249-4900; fax: (717)249-3630
Email: keith.blaisdell@rfcentral.com

Supervised By:



Hoosamuddin S. Bandukwala, Lab Director

The applicant has been cautioned as to the following:

15.21 Information to User.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) Special Accessories.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.


Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

Testimonial And Statement Of Certification

This is to certify that:

1. **That** the application was prepared either by, or under the direct supervision of, the undersigned.
2. **That** the technical data supplied with the application was taken under my direction and supervision.
3. **That** the data was obtained on representative units, randomly selected.
4. **That**, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

Certifying Engineer:



Hoosamuddin S. Bandukwala, Lab Director

Table Of Contents

Rule	Description	Page
	Test Report	1
2.1033(c)	General Information Required	2
	Standard Test Conditions and Engineering Practices	4
	Test Results Summary	5
15.247(b)	Peak Output Power	6
15.247(d)	Conducted Spurious Emissions	7
15.247(c),	Radiated Spurious Emissions	17
15.247(c),	Emissions At Band Edges	27
15.247(a)(2)	Occupied Bandwidth	32
15.247(d)	Transmitter Power Spectral Density (PSD)	34
15.207	A/C Powerline Conducted Emissions	37
	Test Equipment Utilized	39

Required information per ISO 17025-2005, paragraph 5.10:

a) **Test Report**

b) Laboratory:
(FCC: 31040/SIT)
(Canada: IC 2044)

Flom Test Lab, Inc.
3356 N. San Marcos Place, Suite 107
Chandler, AZ 85225

c) Report Number: d0770019

d) Client:
RF Central, LLC
99 Garden Parkway
Carlisle, PA 17013

e) Identification:
Description:
RFX-CMT Serial # 993
Camera Mounted Video Transmitter

f) EUT Condition: Not required unless specified in individual tests.


g) Report Date:
EUT Received:
July 25, 2007

h, j, k): As indicated in individual tests.

i) Sampling method: No sampling procedure used.

l) Uncertainty: In accordance with FTL internal quality manual.

m) Supervised by:



Hoosamuddin S. Bandukwala, Lab Director

n) Results: The results presented in this report relate only to the item tested.

o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

List Of General Information Required For Certification

In Accordance with FCC Rules and Regulations,
Volume II, Part 2 and to

15.247

Sub-Part 2.1033

(c)(1):

Name and Address of Applicant: RF Central, LLC
99 Garden Parkway
Carlisle, PA 17013

(c)(2): **FCC ID:** TO4-RFXCMT2058

Model Number: RFX-CMT

(c)(3): **Instruction Manual(s):**

Please See Attached Exhibits

(c)(4): **Type of Emission:** DTS

(c)(5): **FREQUENCY RANGE, MHz:** 5745 – 5835MHz

(c)(6): **Power Rating, W:** 0.140 W
 Switchable Variable N/A

(c)(7): **Maximum Power Rating, W:** 1.0 W

15.203: **Antenna Requirement:**

The antenna is permanently attached to the EUT
 The antenna uses a unique coupling
 The EUT must be professionally installed
 The antenna requirement does not apply

The unit was tested with a omni-directional antenna with a gain of 4.0 dBi.

Subpart 2.1033 (continued)**(c)(8): Circuit Diagram/Circuit Description:**

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

Please See Attached Exhibits

(c)(9): Label Information:

Please See Attached Exhibits

(c)(10): Photographs:

Please See Attached Exhibits

(c)(11): Digital Modulation Description:

 Attached Exhibits
x N/A

(c)(12): Test And Measurement Data:

Follows

Sub-part

2.1033(b):

Test And Measurement Data

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2 and the following individual Parts:

15.247 Operation within bands 2400-2483.5 MHz (spread spectrum)

Standard Test Conditions and Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-2004, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst-case measurements.

A2LA

"A2LA has accredited Flom Test Labs, Inc. Chandler, AZ for technical competence in the field of Electrical testing. The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO 17025:2005 'General Requirements for the Competence of Testing and Calibration Laboratories' and any additional program requirements in the identified field of testing."

Please refer to www.a2la.org for current scope of accreditation.

Certificate number: 2152.01



Test Results Summary


Specification	Test Name	Pass, Fail, N/A	Comments
15.247(b)	Peak Output Power	Pass	
15.247(d)	Conducted Spurious Emissions	Pass	
15.247(d), 15.209(a), 15.205	Radiated Spurious Emissions	Pass	
15.247(d), 15.209(a), 15.205	Emissions At Band Edges	Pass	
15.247(a)(2)	Occupied Bandwidth	Pass	
15.247(e)	Transmitter Power Spectral Density	Pass	
15.207	A/C Powerline Conducted Emissions	Pass	

Name of Test: Peak Output Power
Specification: 15.247(b)
Test Equipment Utilized i00228, i00317

Test Procedure

The UUT was connected to a power meter input via a precision 30 dB attenuator. The peak readings were taken and the result were compared to the limit.

Test Setup



Transmitter Peak Output Power


Tuned Frequency MHz	Recorded Measurement	Specification Limit	Result
5745	0.140 W	1 W	Pass
5795	0.138 W	1 W	Pass
5835	0.100 W	1 W	Pass

Name of Test: Conducted Spurious Emissions
Specification: 15.247(d)
Spec. Limit: -20 dBC
Test Equipment Utilized: i00029, i00329


Test Procedure

The UUT was connected directly to a spectrum analyzer to verify that the UUT met the requirements for spurious emissions. The reference level was offset for the peak power output with the resolution bandwidth set for 1 MHz. The frequency range from 30 MHz to the 10th harmonic of the fundamental transmitter was observed. Only detectable spurious emissions were recorded and plotted. The reference level is added to the recorded measurement to provide the corrected level in units of dBC.


Test Setup




Conducted Spurious Emissions

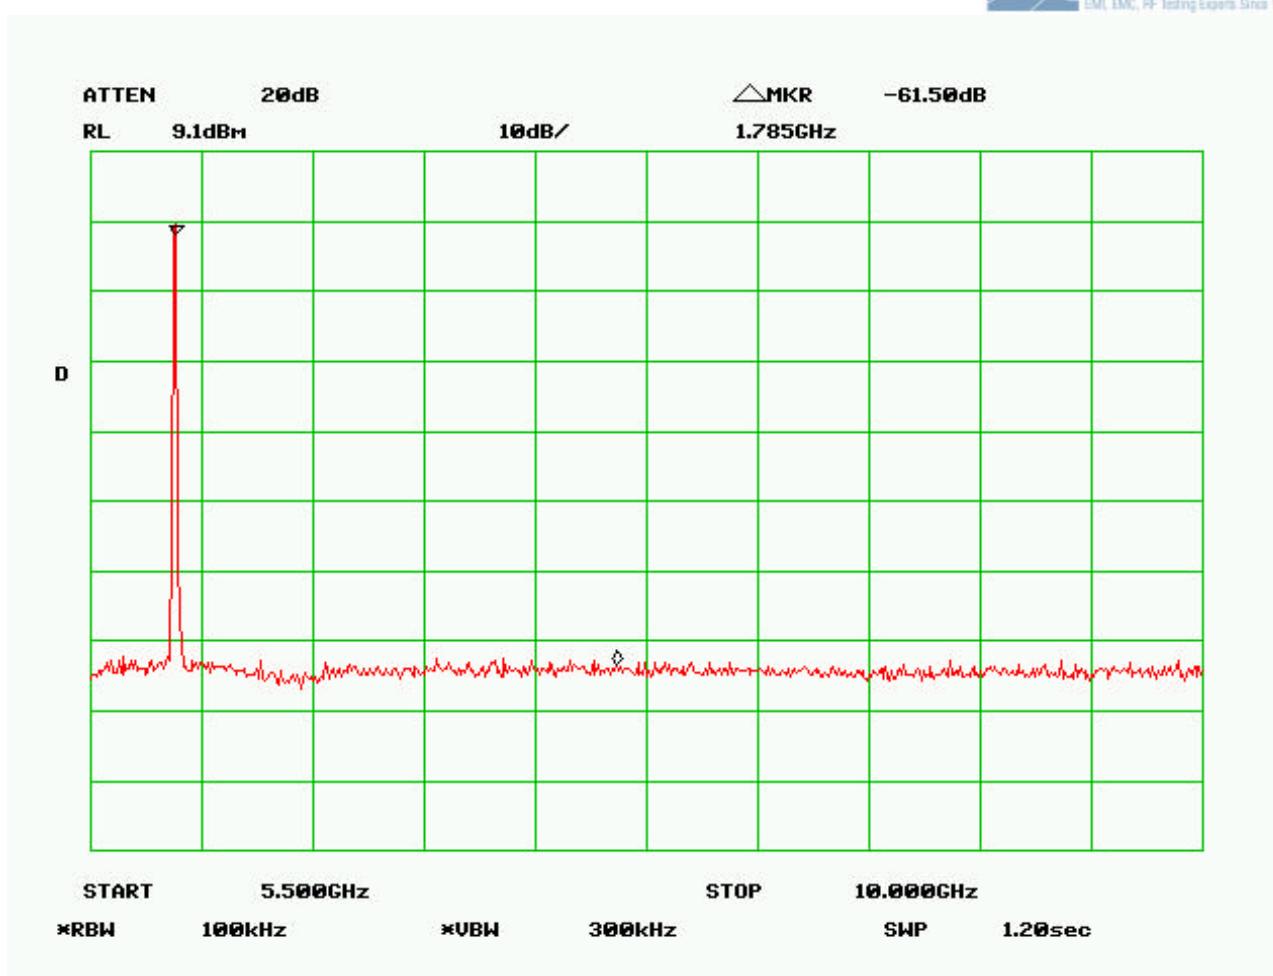


Mid Channel

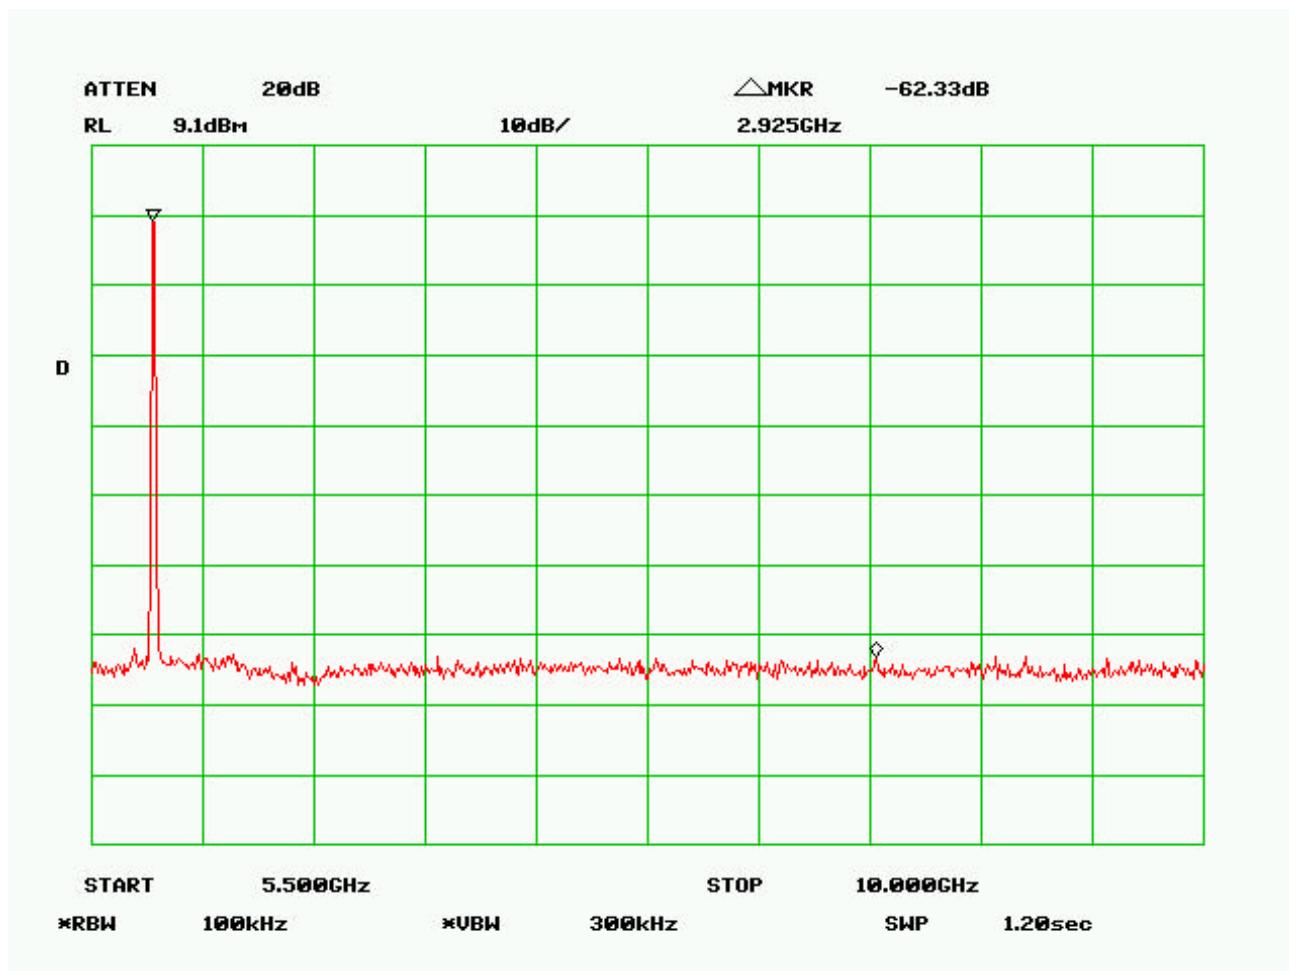

High Channel

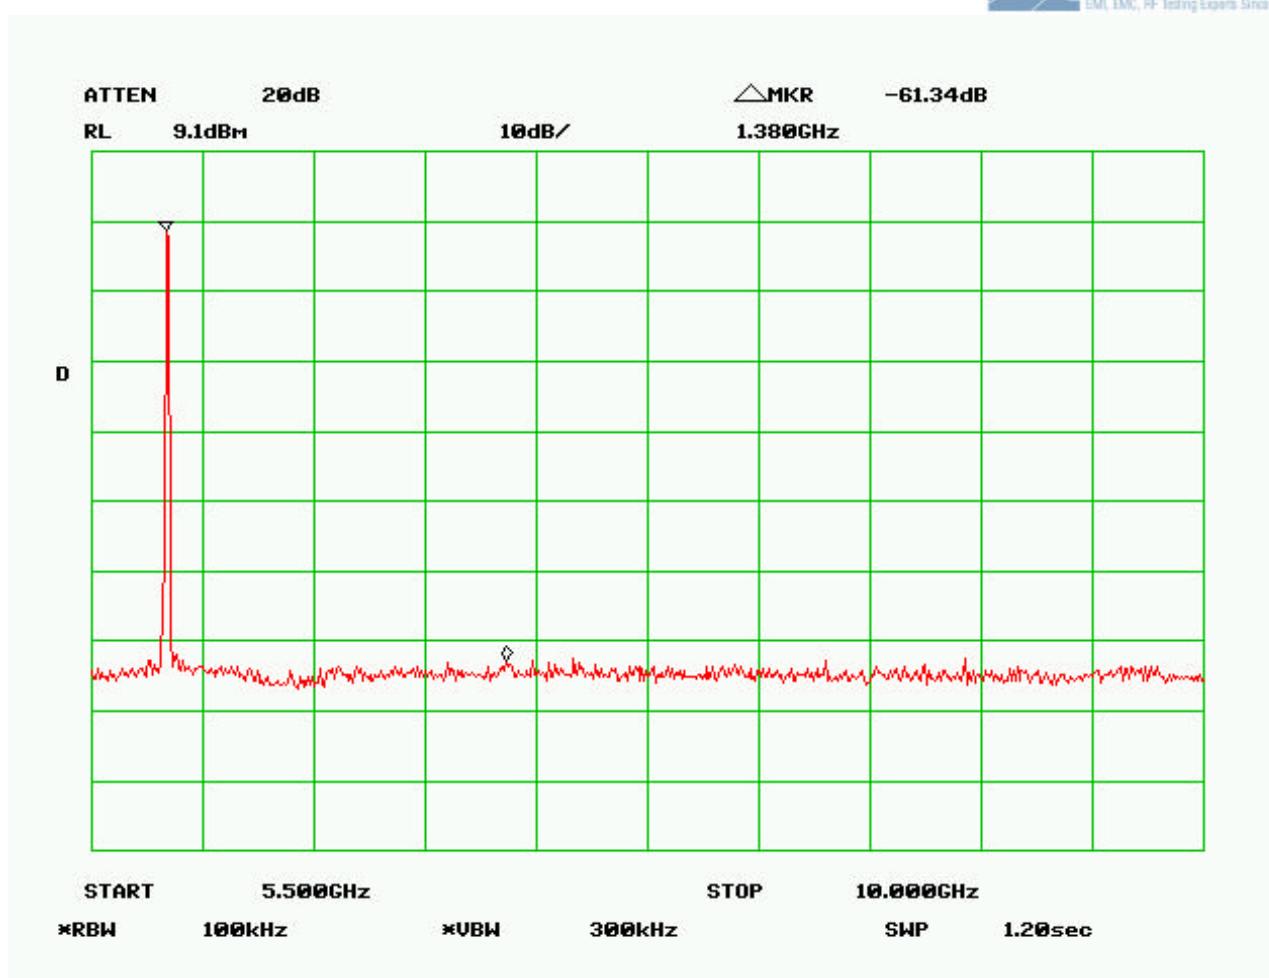


Low Channel

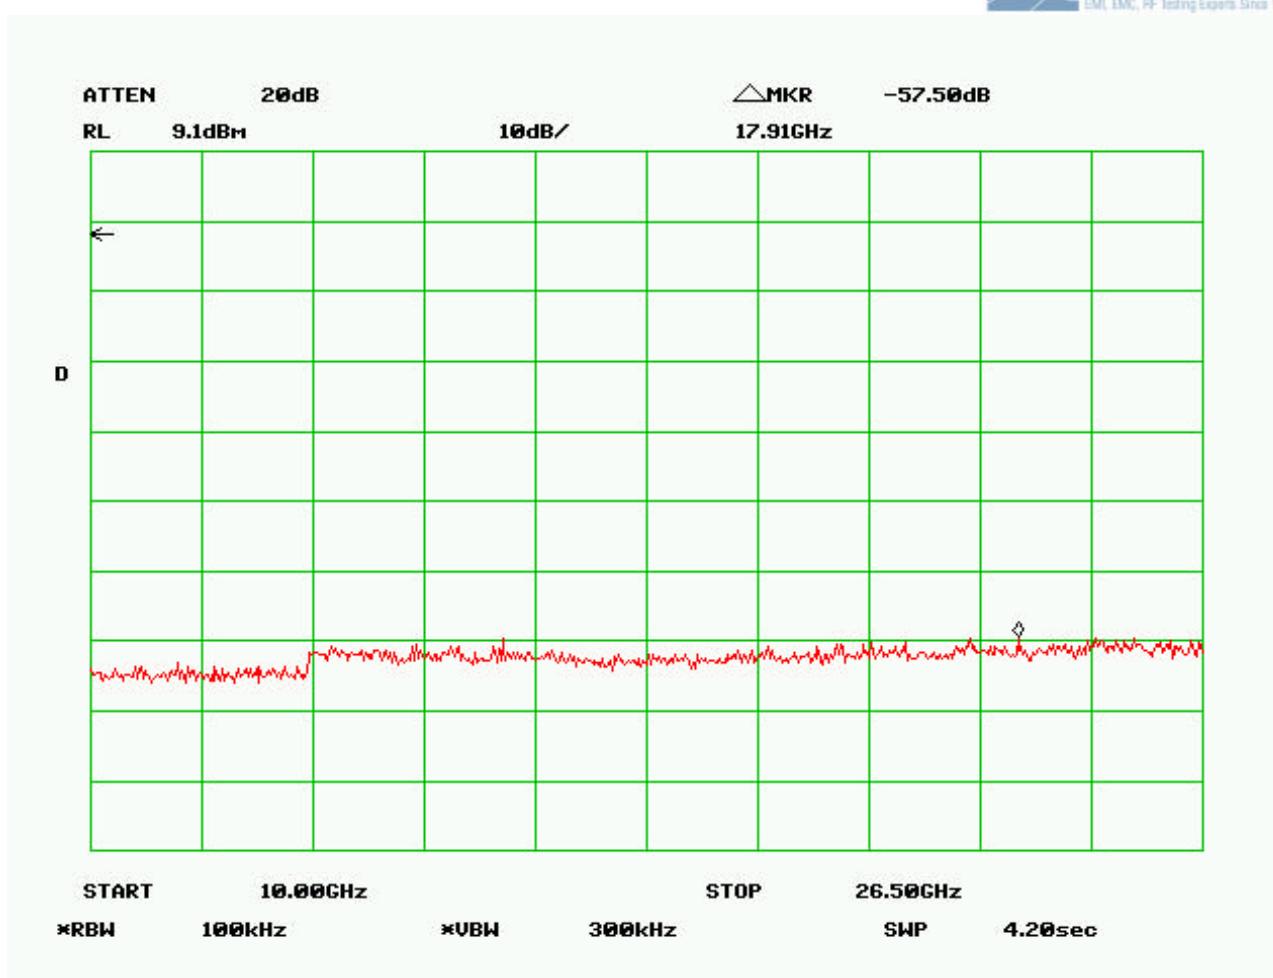


Low – Channel





Mid Channel

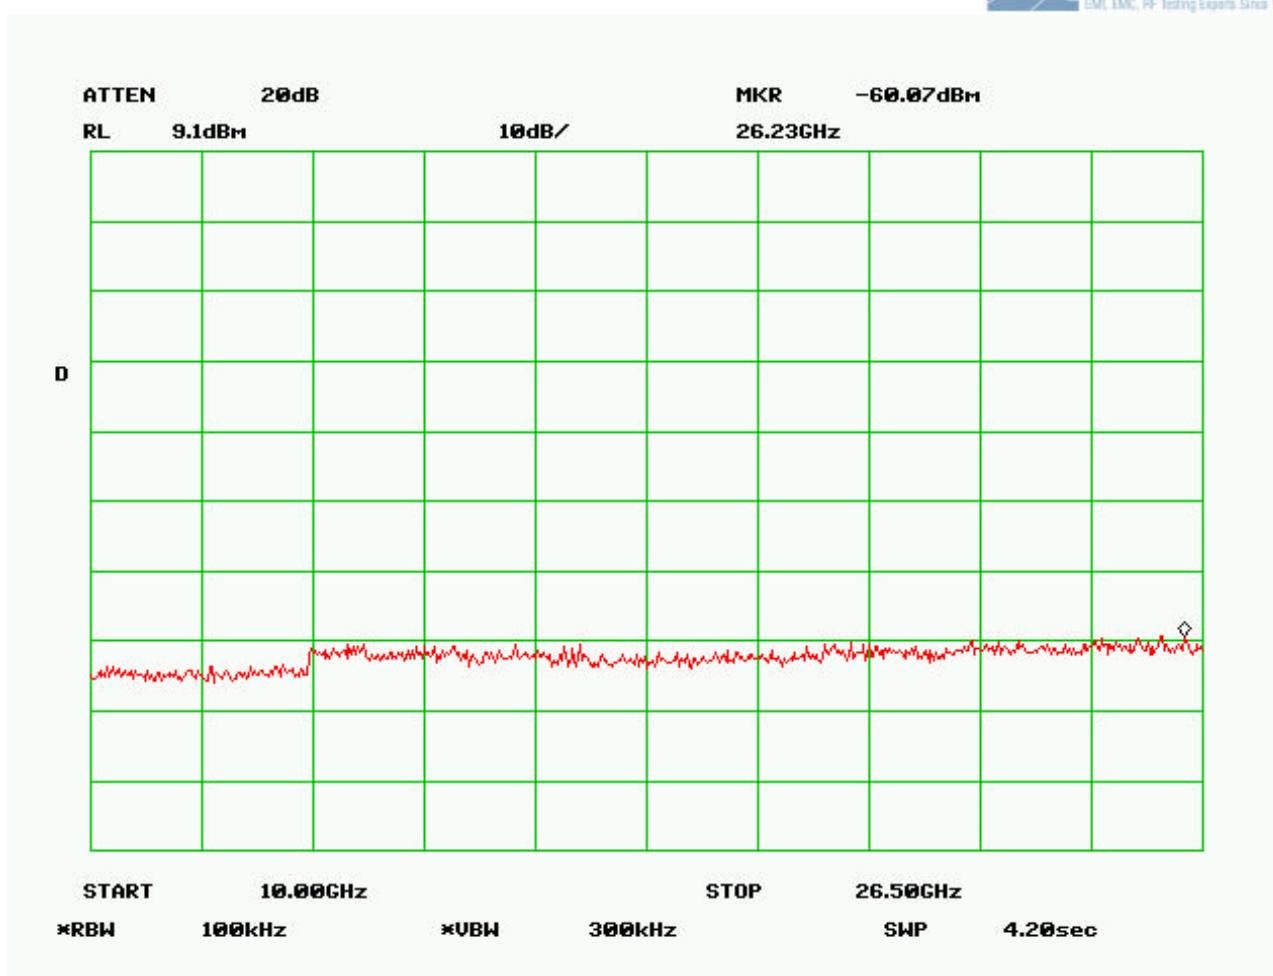

High Channel

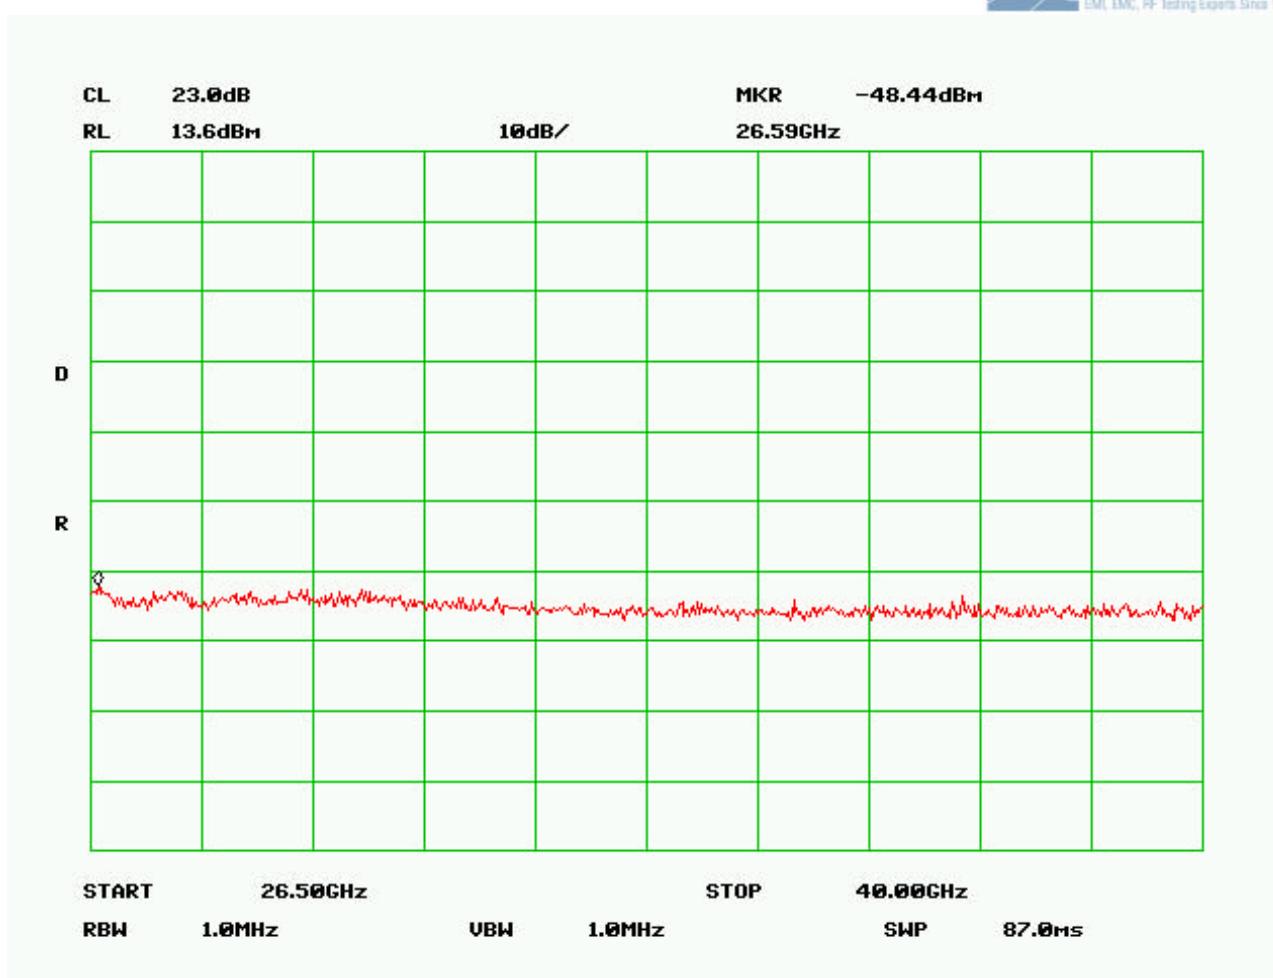

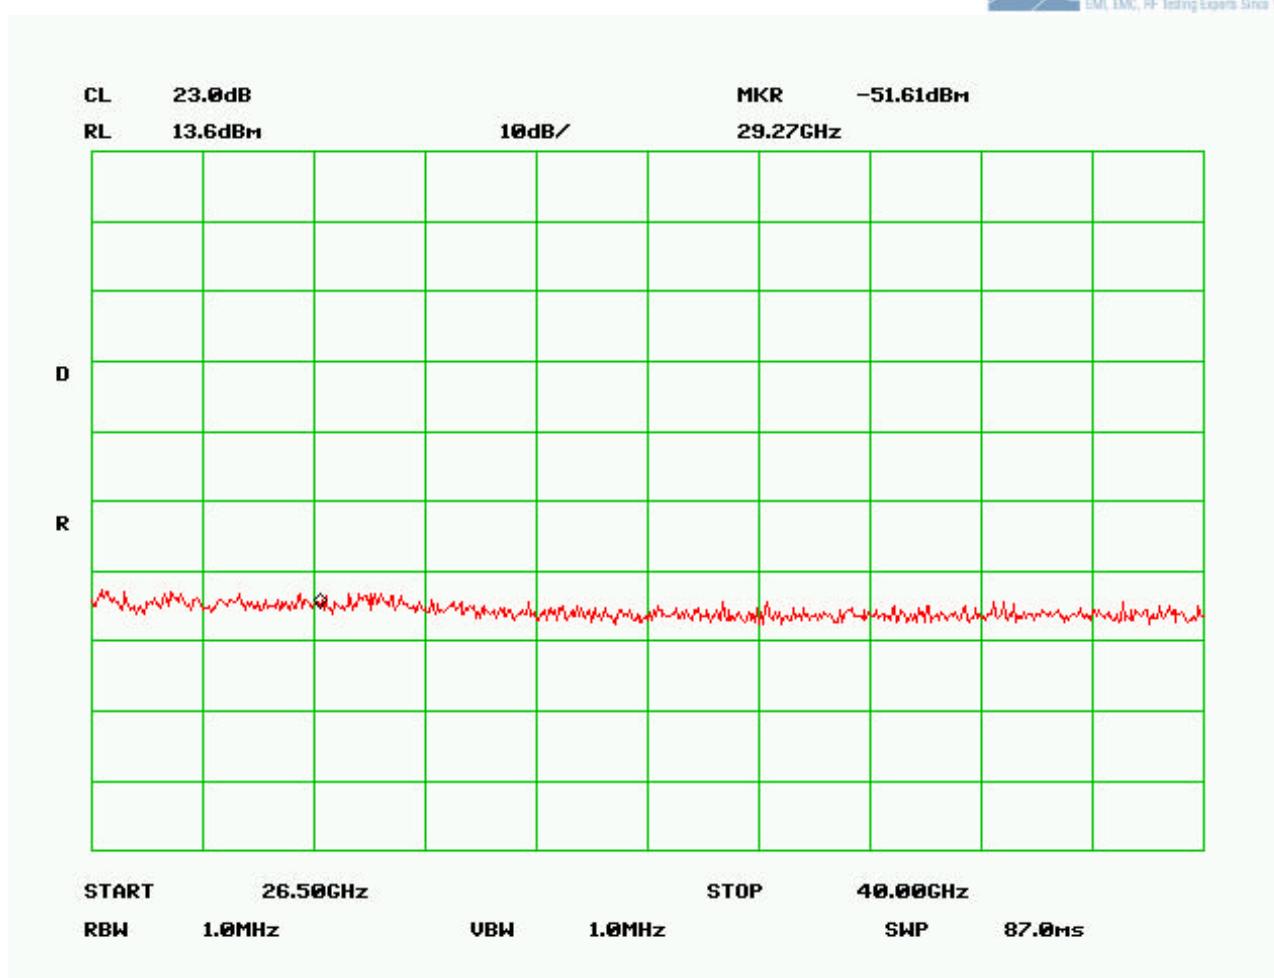

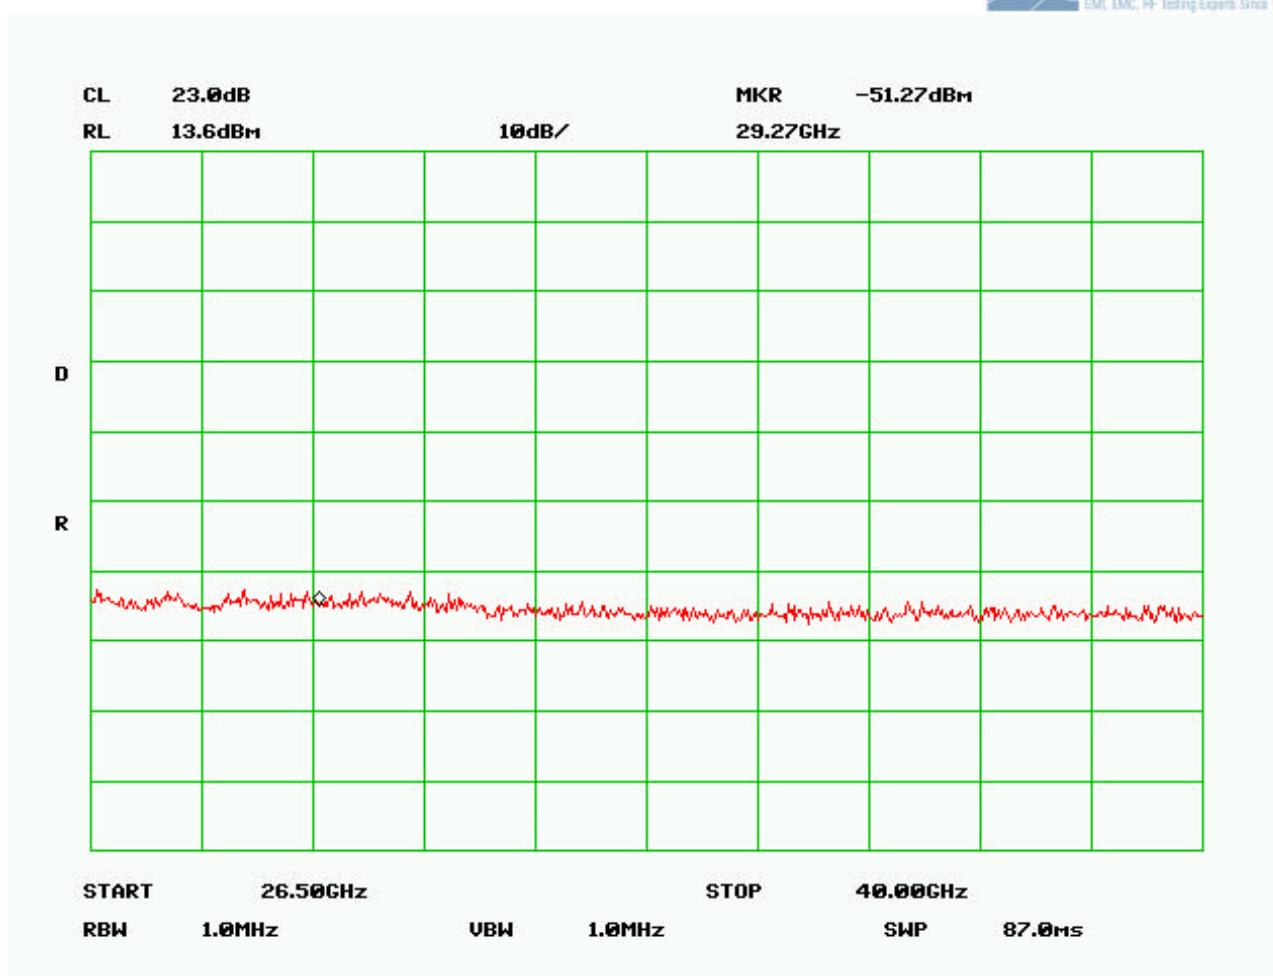


Low Channel

Name of Test: Radiated Spurious Emissions
Specification: 15.247(c), 15.209(a), 15.205
Spec. Limit: -20 dBC and for restricted band 54 dBuV average and 74 dBuV peak
Test Equipment Utilized: i00029, i00033, i00088, i00089, i00103

Test Procedure

The UUT was tested in a anechoic chamber 3m from the receiving transducer. A spectrum analyzer was used to verify that the UUT met the requirements for Radiated Spurious Emissions. The antennas were tested in both the vertical and horizontal orientation and raised from 1 to 4 meters while rotating the UUT 360° to ensure the TX signal levels were maximized.

Test Setup




RBW = 1 MHz with VBW = 1MHz


Corrected Level = Recorded Level + ACF + Cable loss + Distance Correction factor

Where: Distance Correction factor = $10 \log D_1/D_2$


Radiated Spurious Emissions

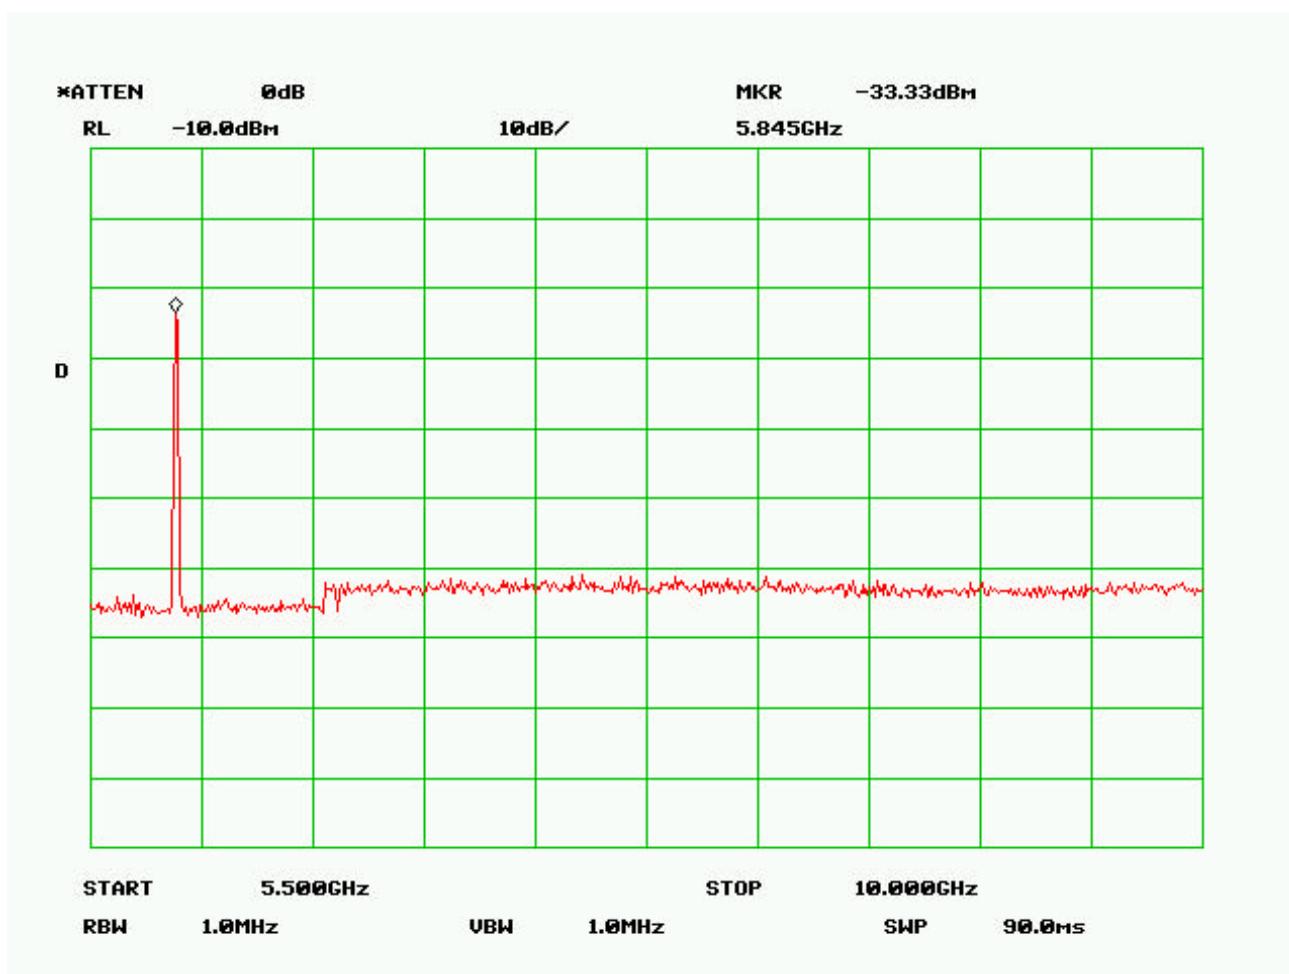


Mid - Channel

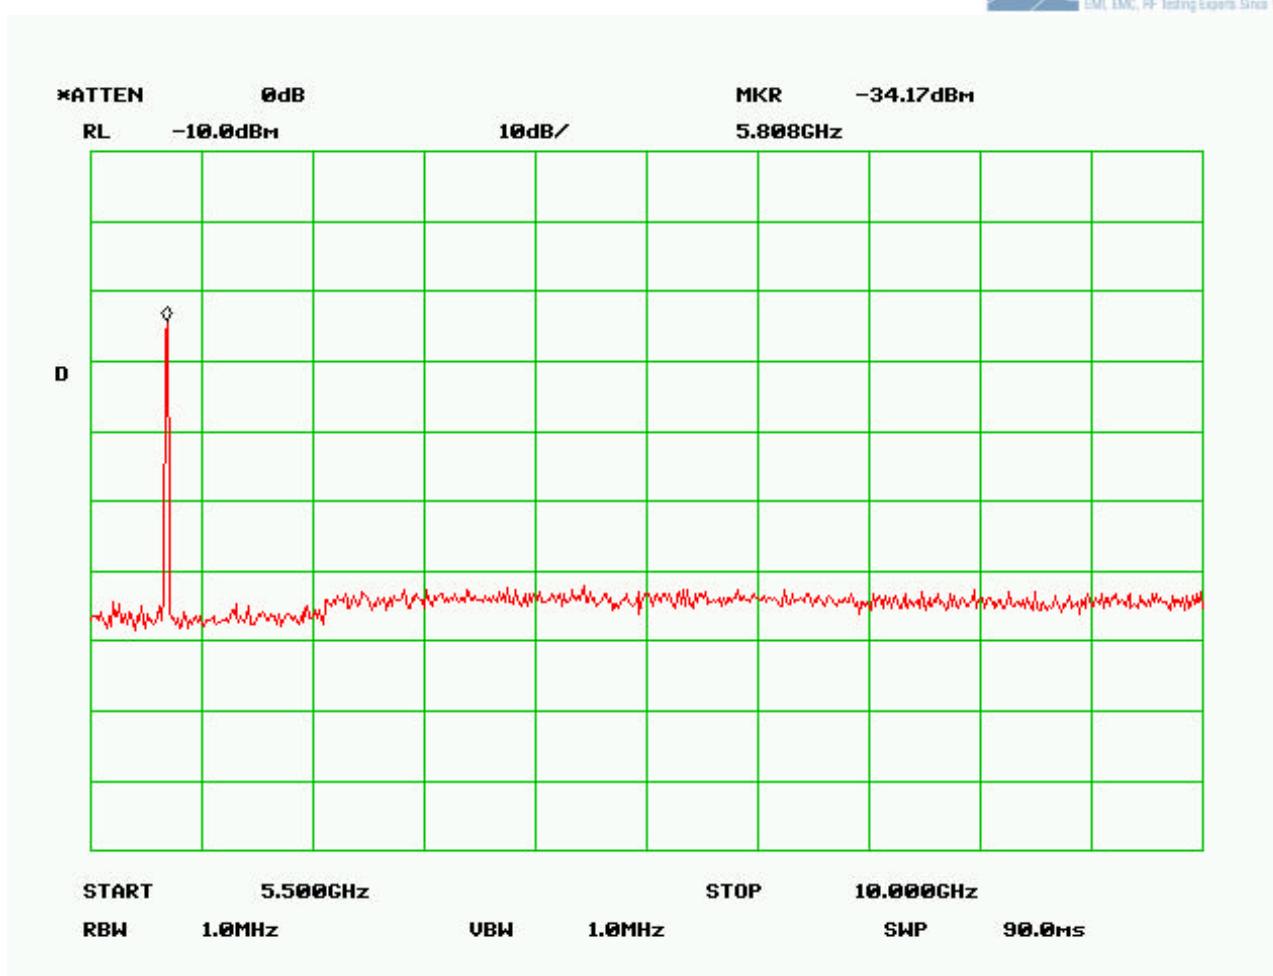


Low Channel

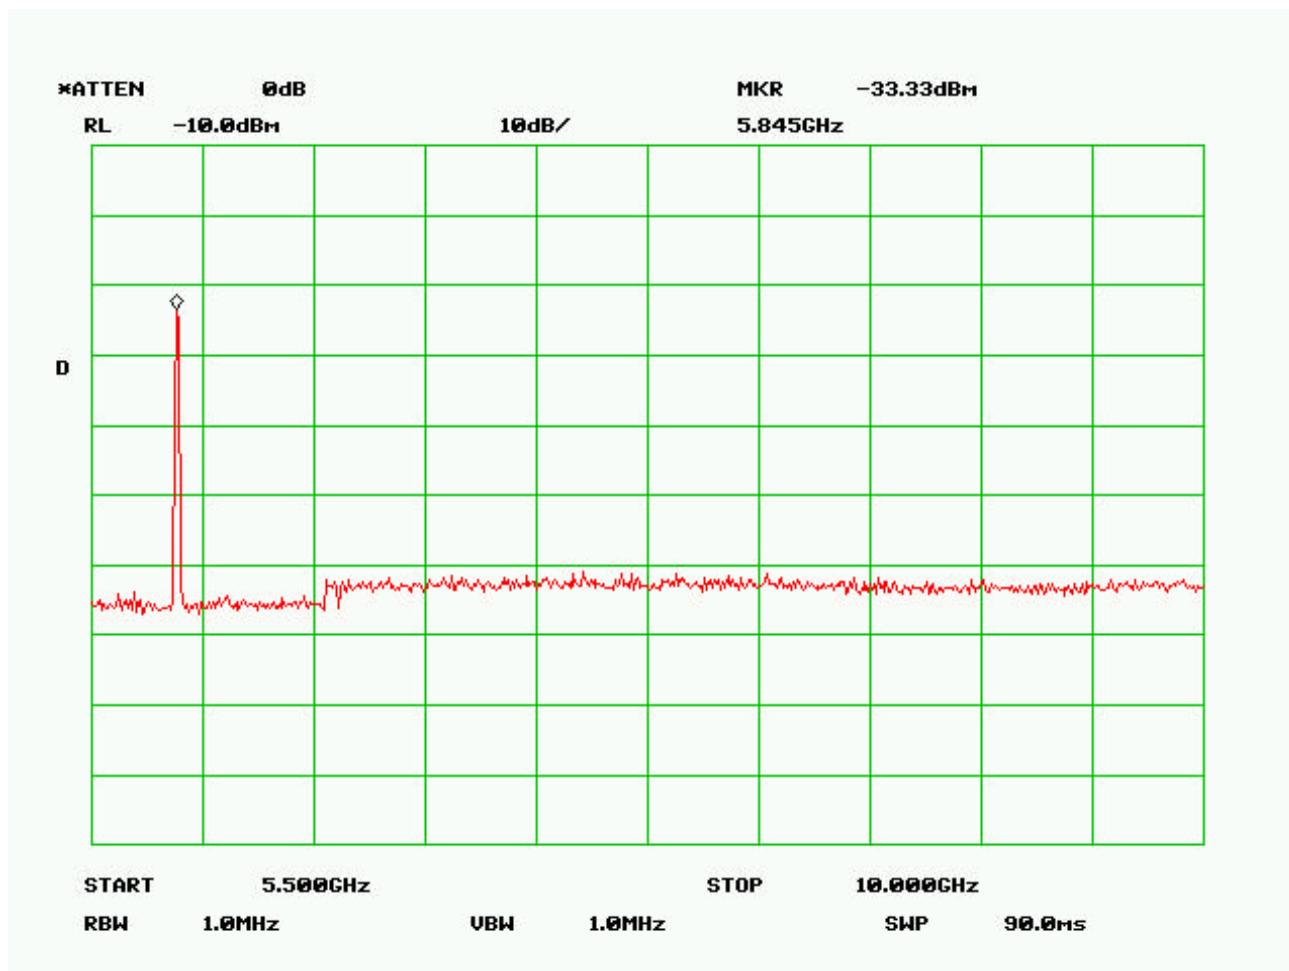


Hi Channel

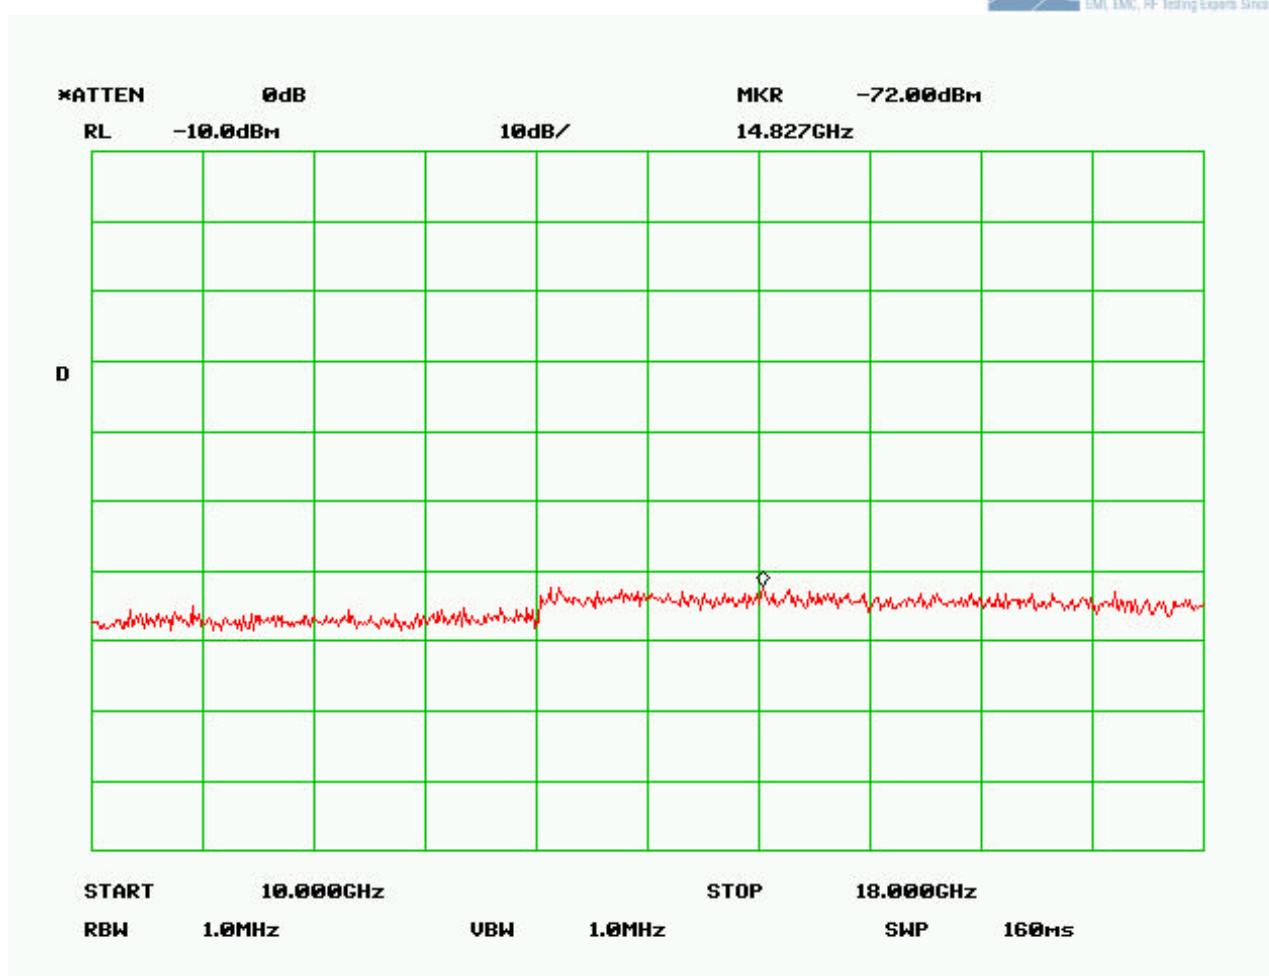


Mid - Channel

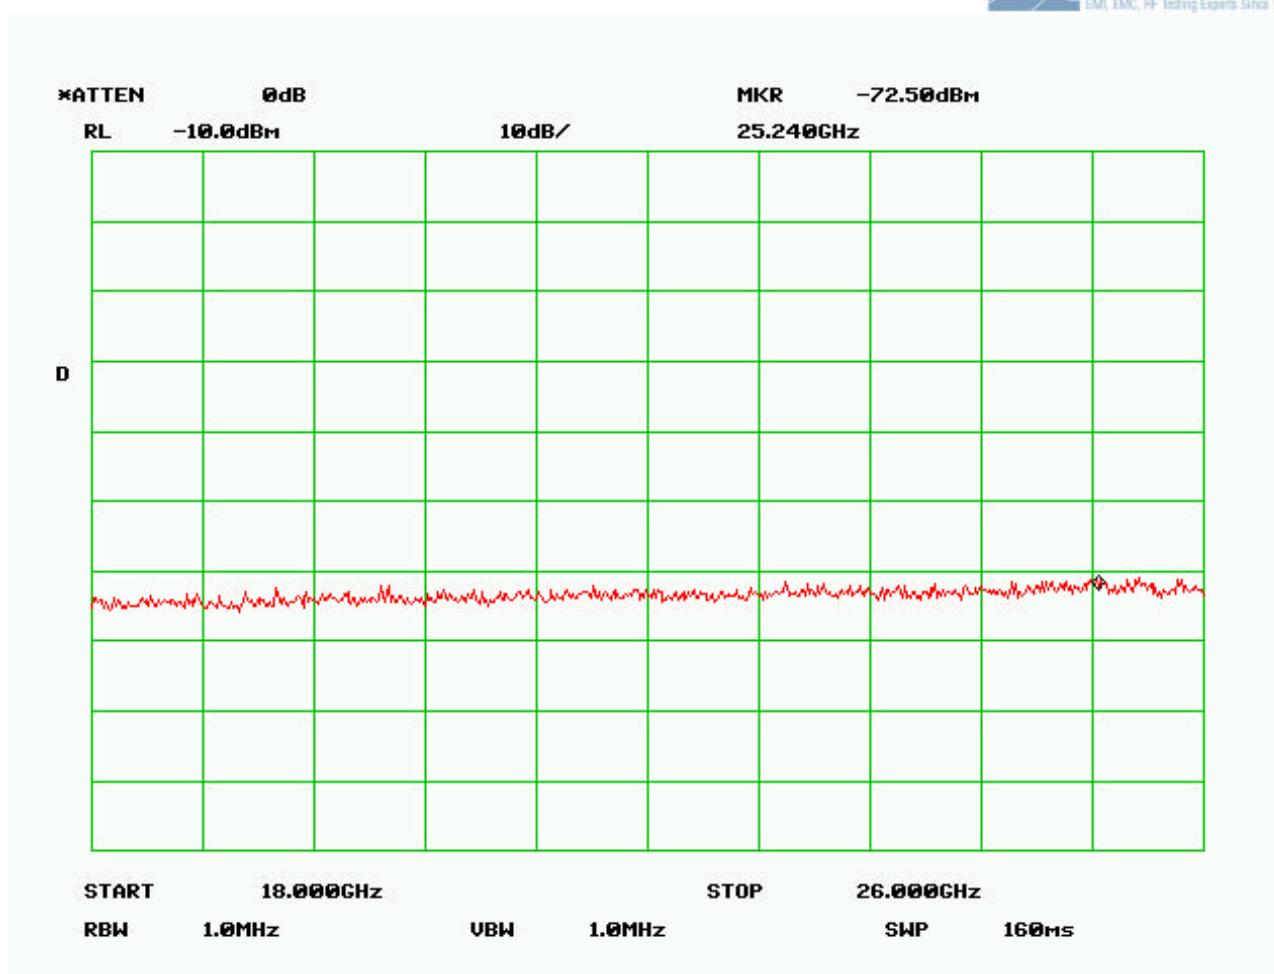
**Low - Channel**

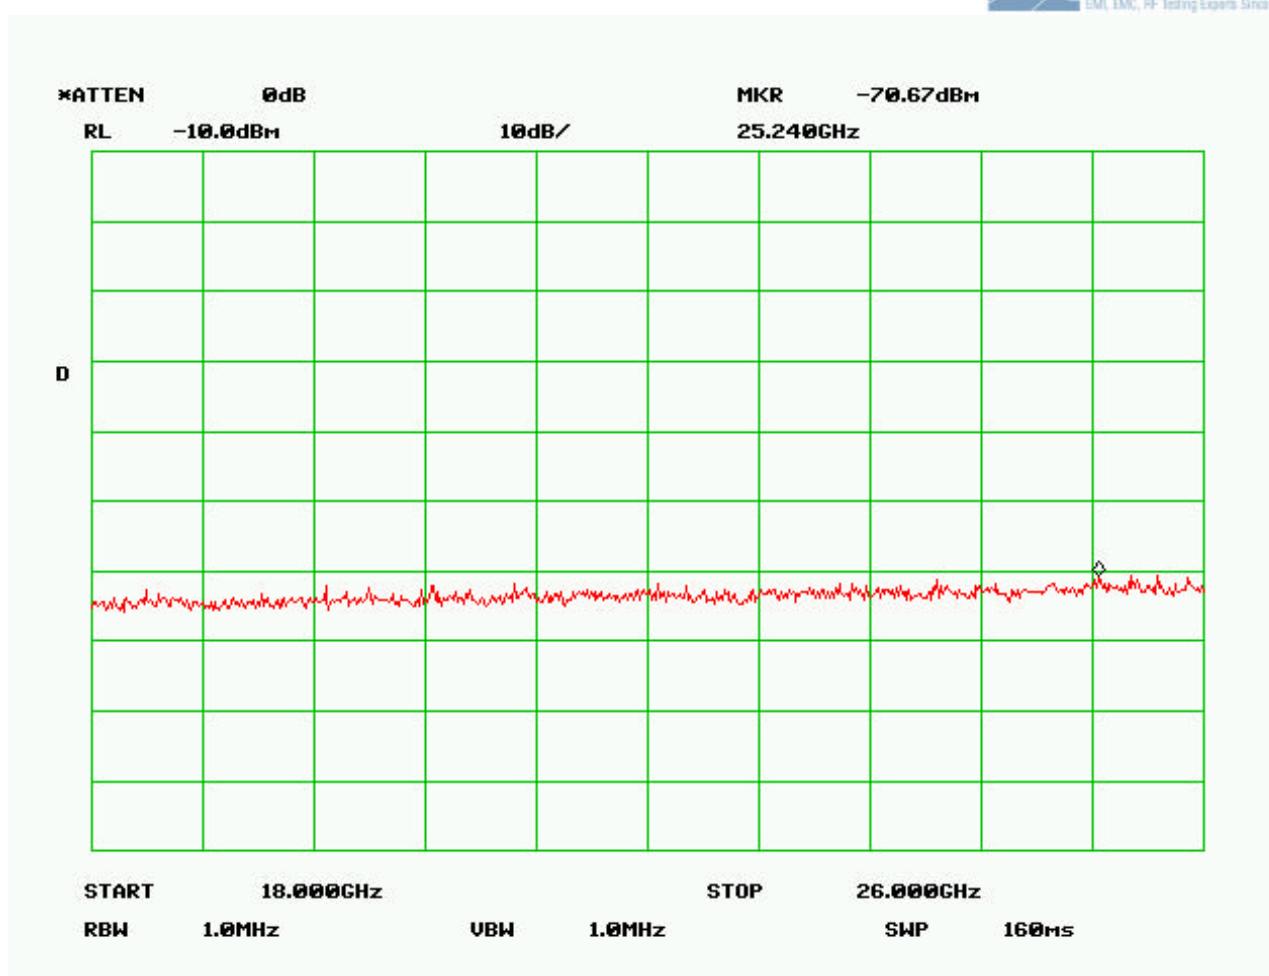


High Channel

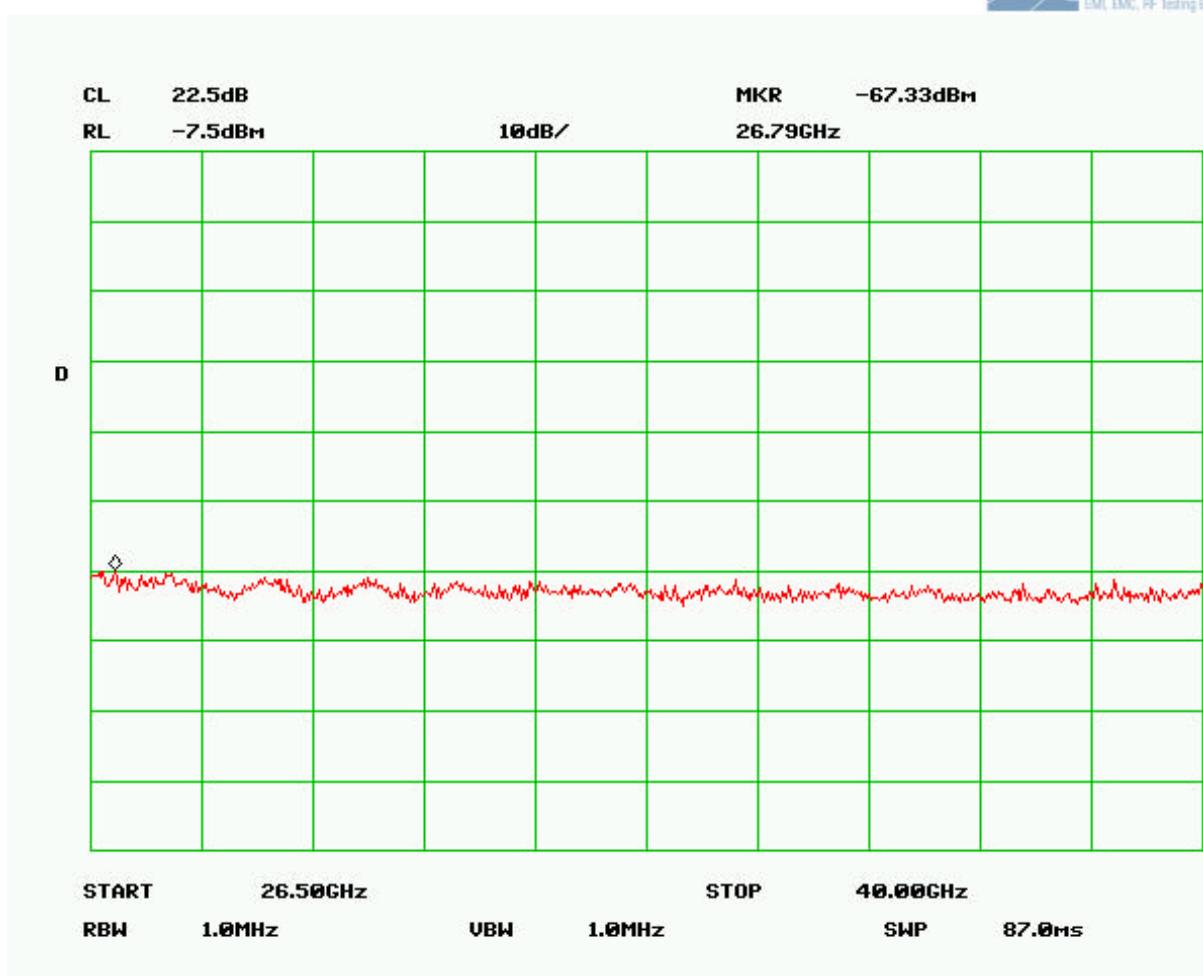

Low –Channel

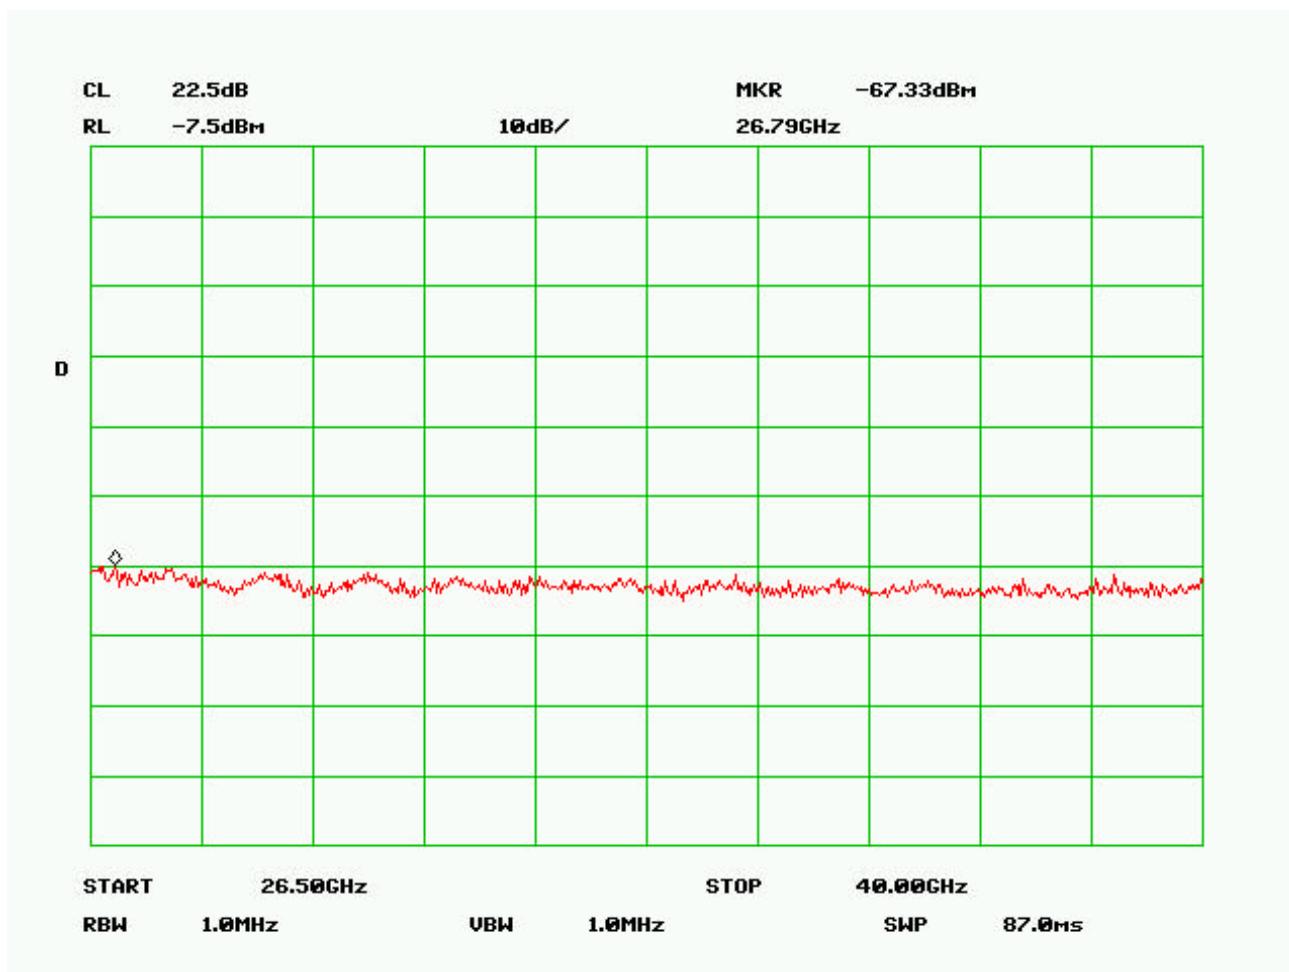

High Channel

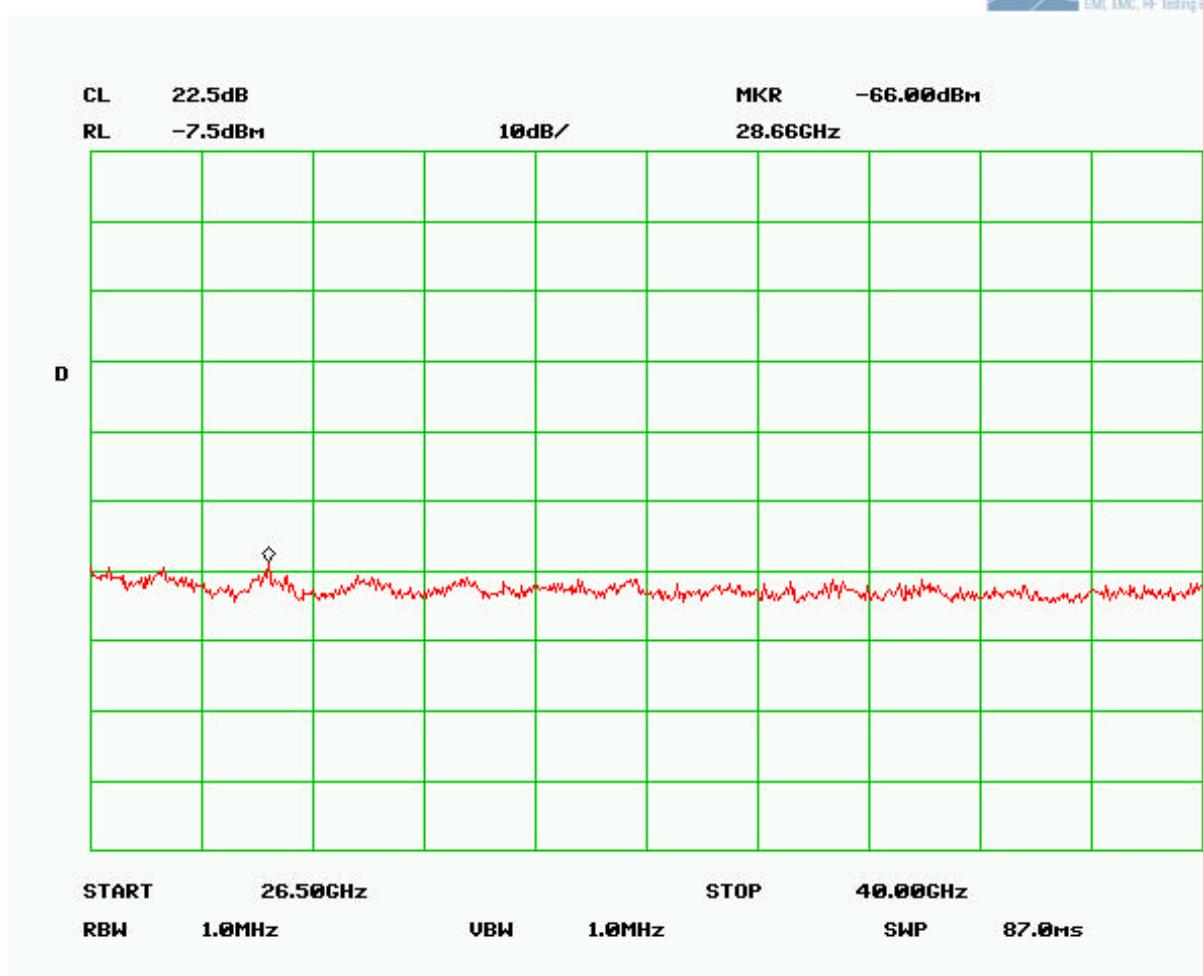


Mid Channel

Name of Test: Emissions At Band Edges
Specification: 15.247(c), 15.209(a), 15.205
Limit -20 dBC and for restricted band 54 dBuV average and 74 dBuV peak
Test Equipment Utilized i00028, i00271, i00290


Test Procedure

The UUT was tested in an anechoic chamber set 3m from the receiving transducer. A spectrum analyzer was used to verify that the UUT met the requirements for band edge with both peak and average measurements. The cable and transducer correction factors were input into the analyzer as a reference level offset to ensure accurate readings were obtained.


Test Setup




Band Edge / Restricted Band Emissions

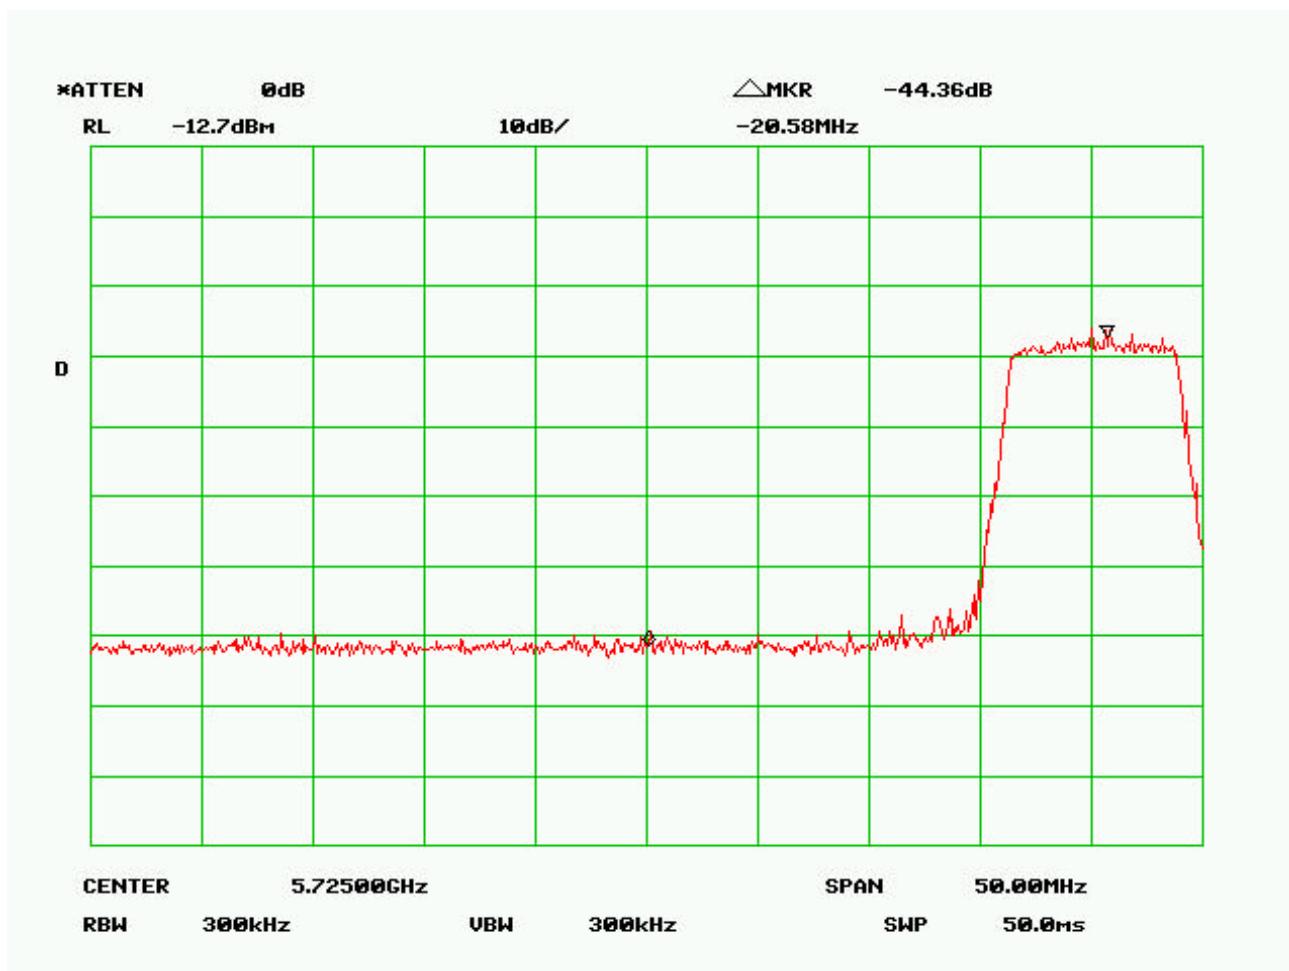



Low-Channel

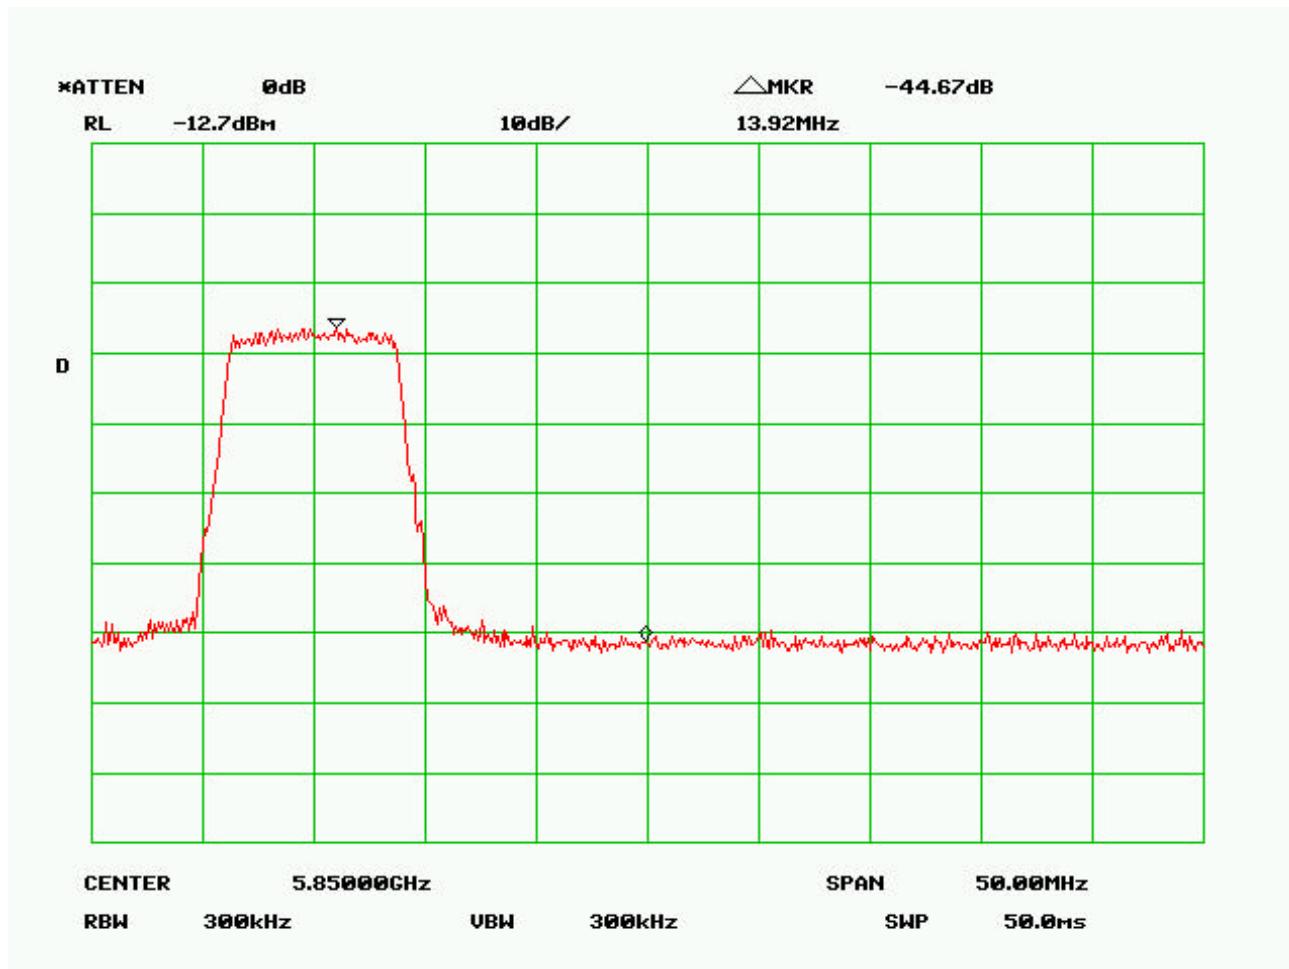

High - Channel

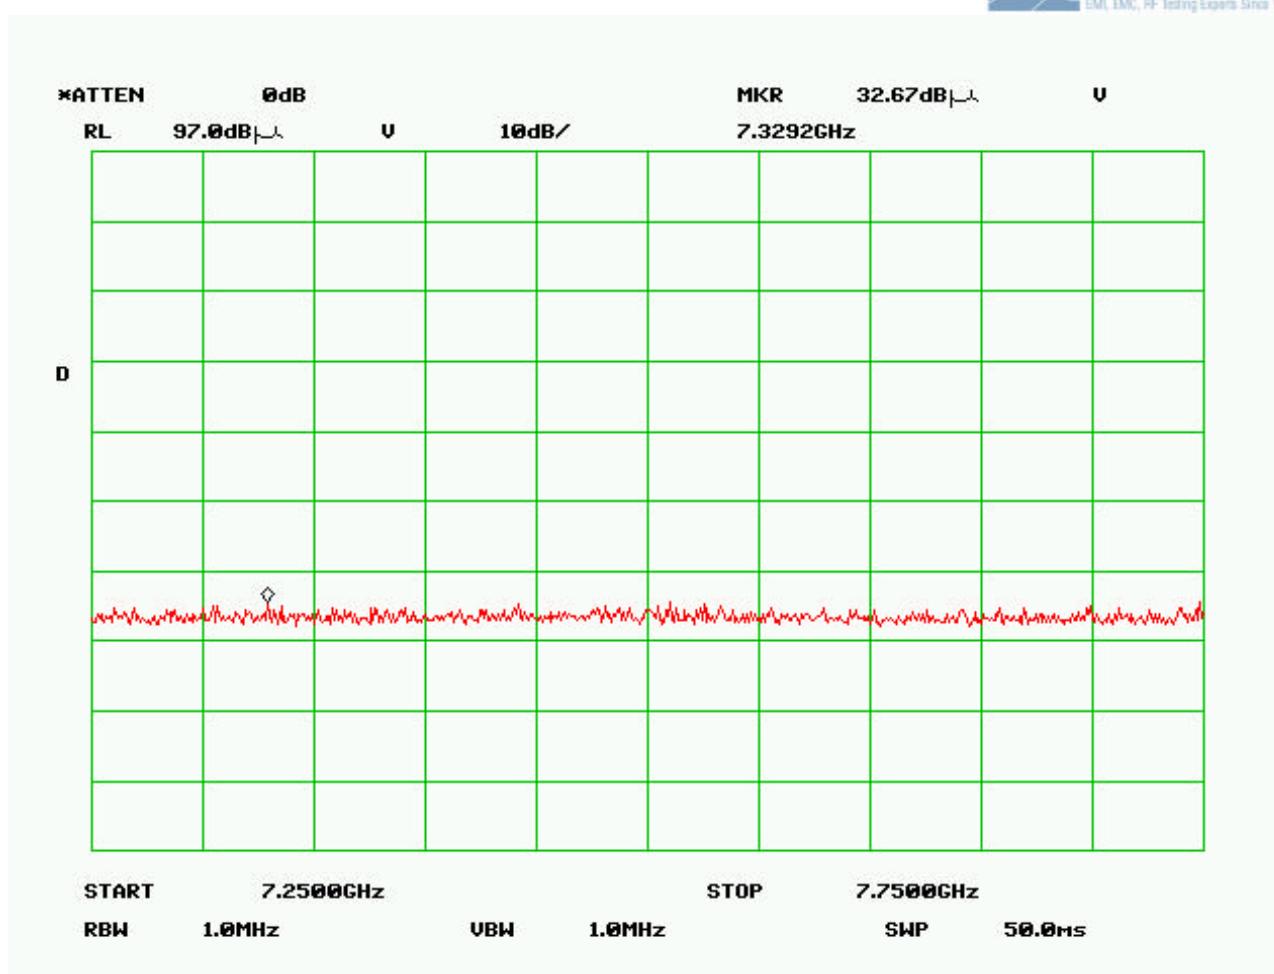

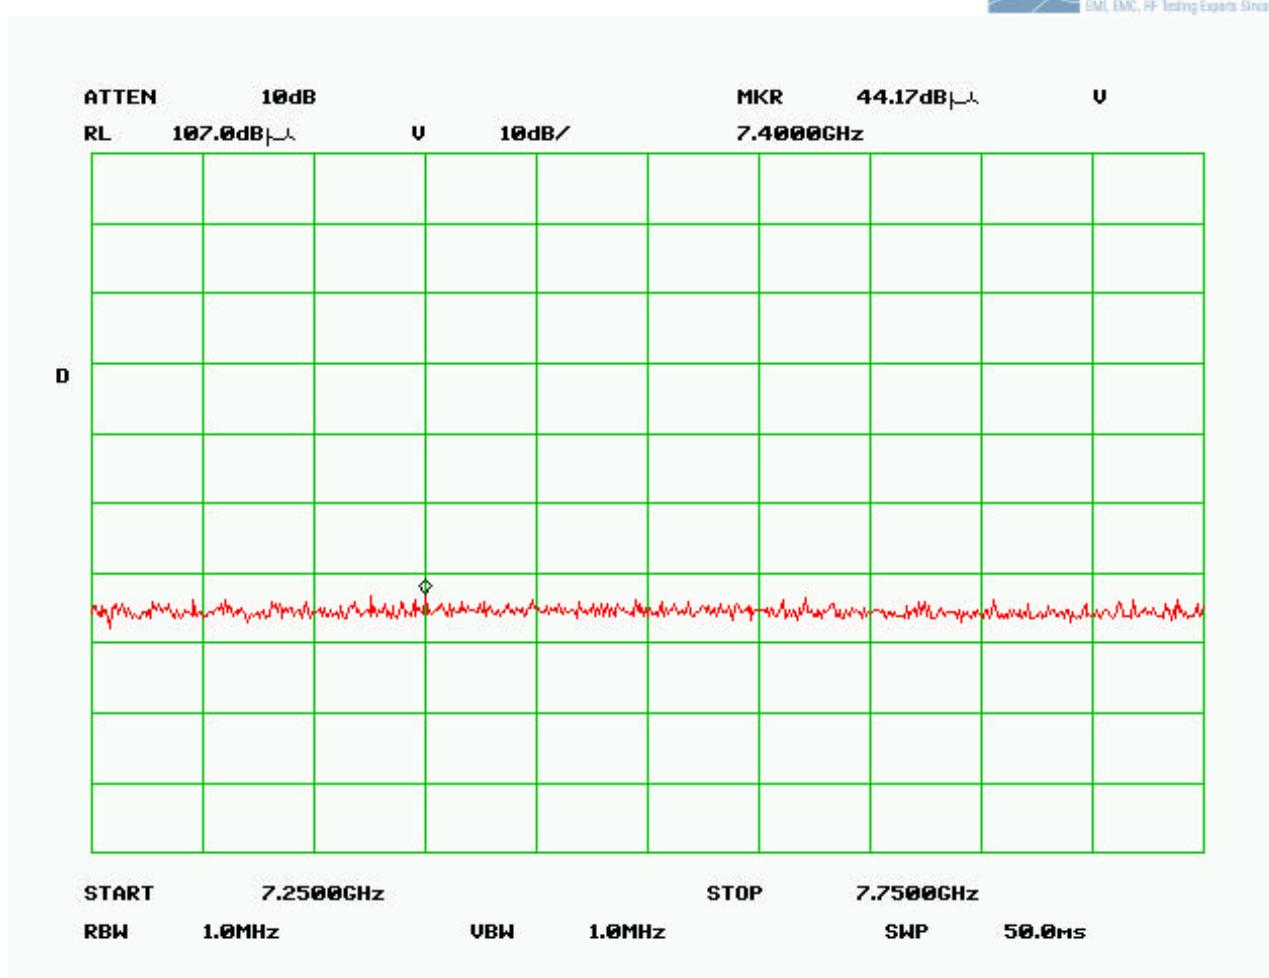

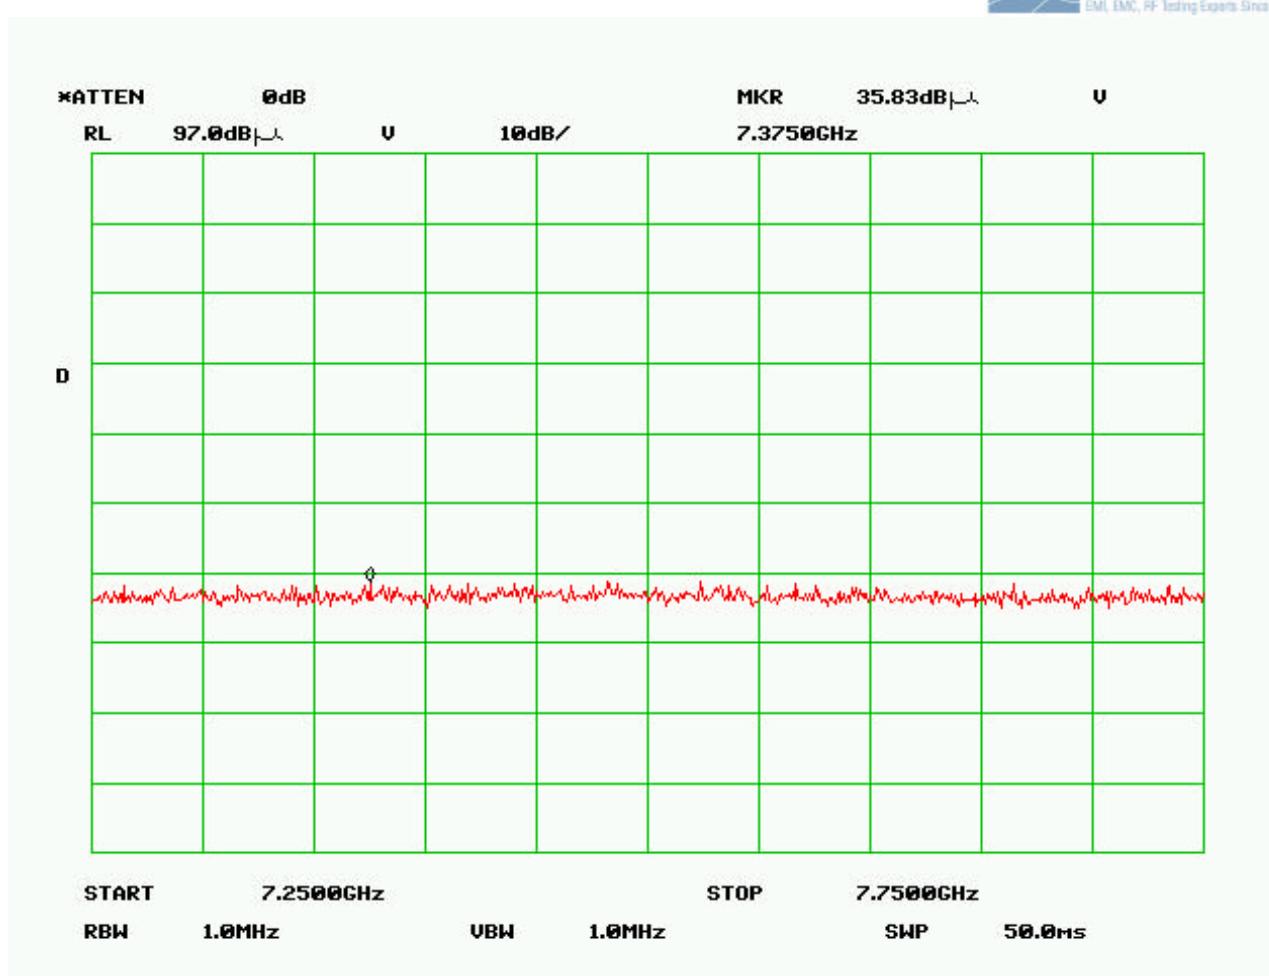


Name of Test: Occupied Bandwidth
Specification: 15.247(a)(2)
Limit BW = 500 KHz
Test Equipment Utilized i00329


Test Procedure

The UUT was connected directly to a spectrum analyzer. The Span was set wide enough to capture the entire transmit spectrum and the resolution bandwidth was set to at least 1% of the span. The analyzer was set to max hold and when the entire spectrum was captured the 6dB and 99% bandwidths were measured to verify the bandwidth met the specification.


Test Setup




Occupied Bandwidth Summary

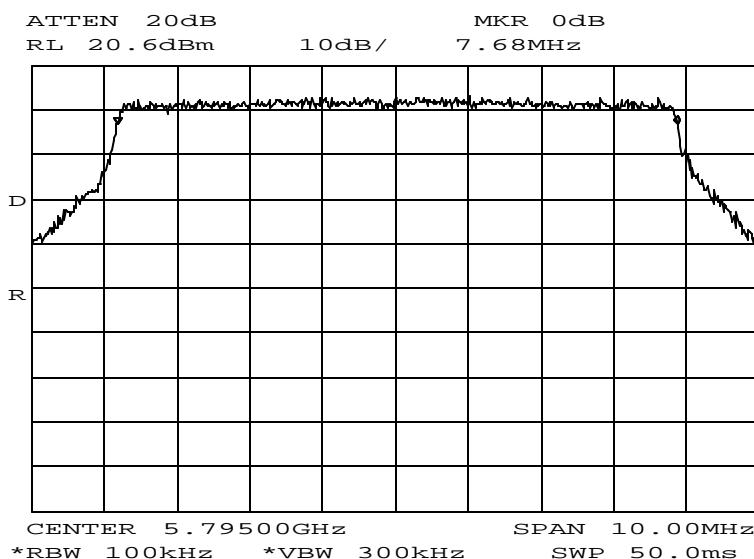

Power: HIGH
 Modulation: 64 QAM
 MID CH 6DB

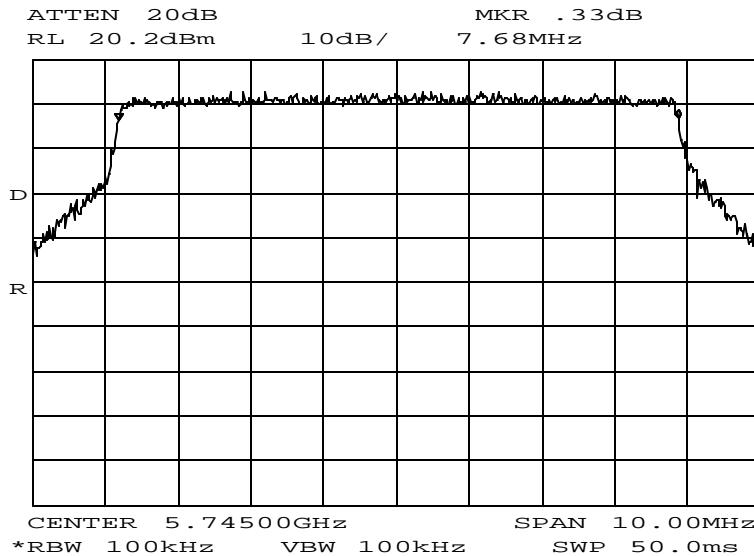

Power: HIGH
 Modulation: 64 QAM
 LOW CH 6DB

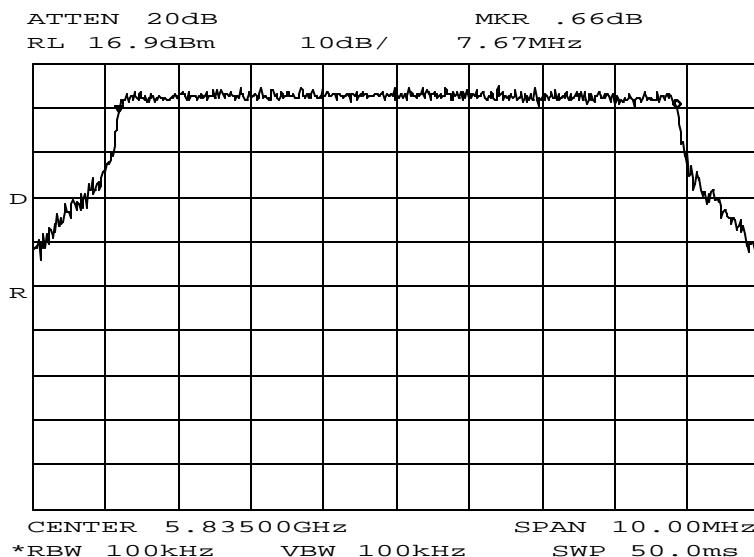


Power: HIGH
 Modulation: 64 QAM
 HIGH CH 6DB

Name of Test: Transmitter Power Spectral Density (PSD)
Specification: 15.247(d)
Limit 8 dBm in any 3 kHz Bandwidth
Test Equipment Utilized i00329

Test Procedure


The UUT was connected directly to a spectrum analyzer. The Span was set to 1.5 MHz and the resolution bandwidth was set to 3 KHz. The analyzer was set for a sweep time of 500 seconds. When the entire spectrum was captured the marker peak function of the analyzer was utilized to verify the PSD met the specification.


Test Setup




PSD Summary

Frequency MHz	Recorded Measurement	Specification Limit	Result
5.745	-3.10 dBm	8 dBm	Pass
5.794	-4.7 dBm	8 dBm	Pass
5.835	-5.7 dBm	8 dBm	Pass

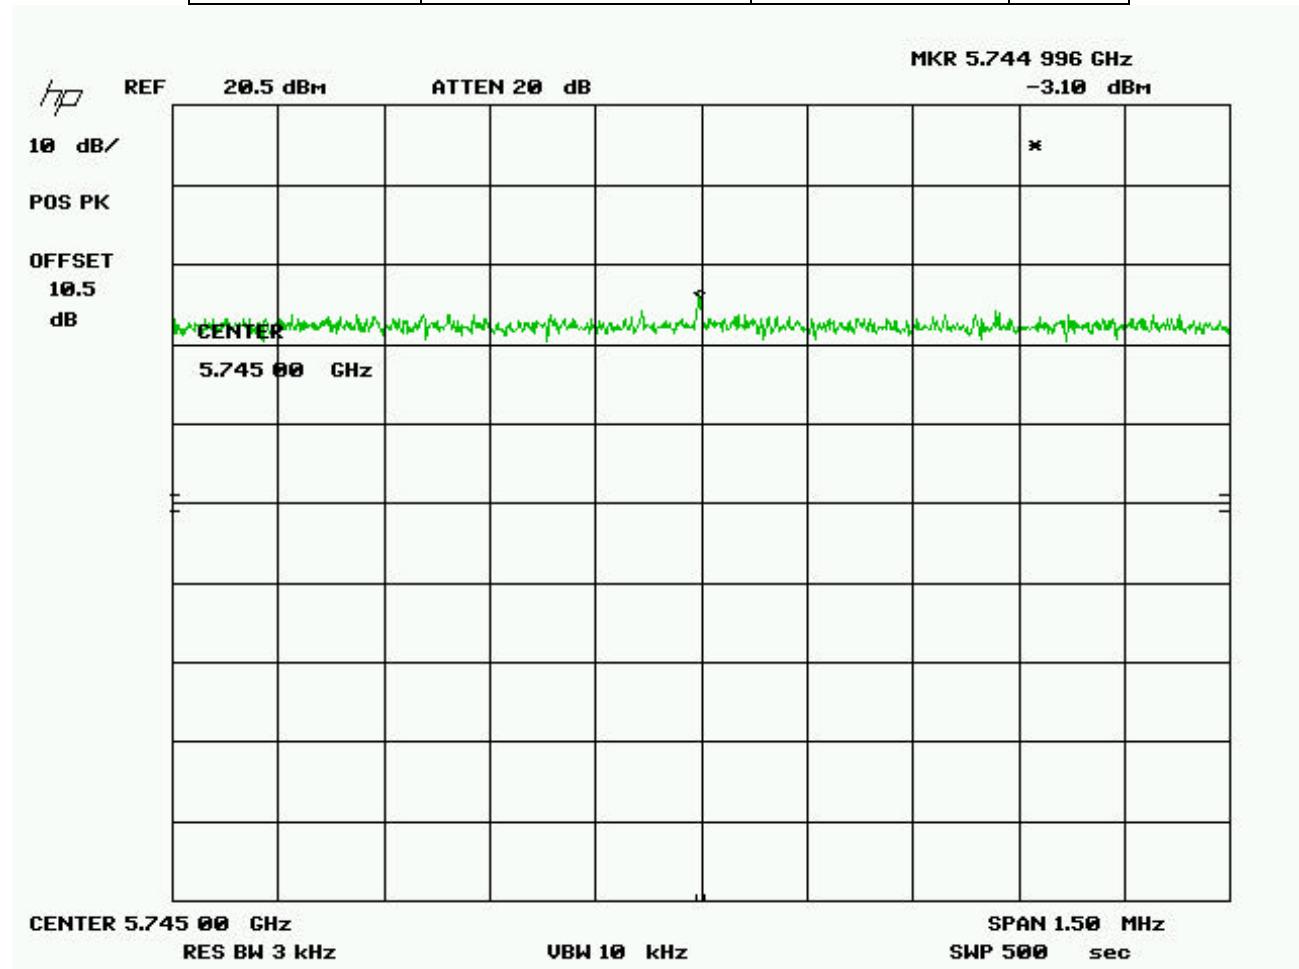

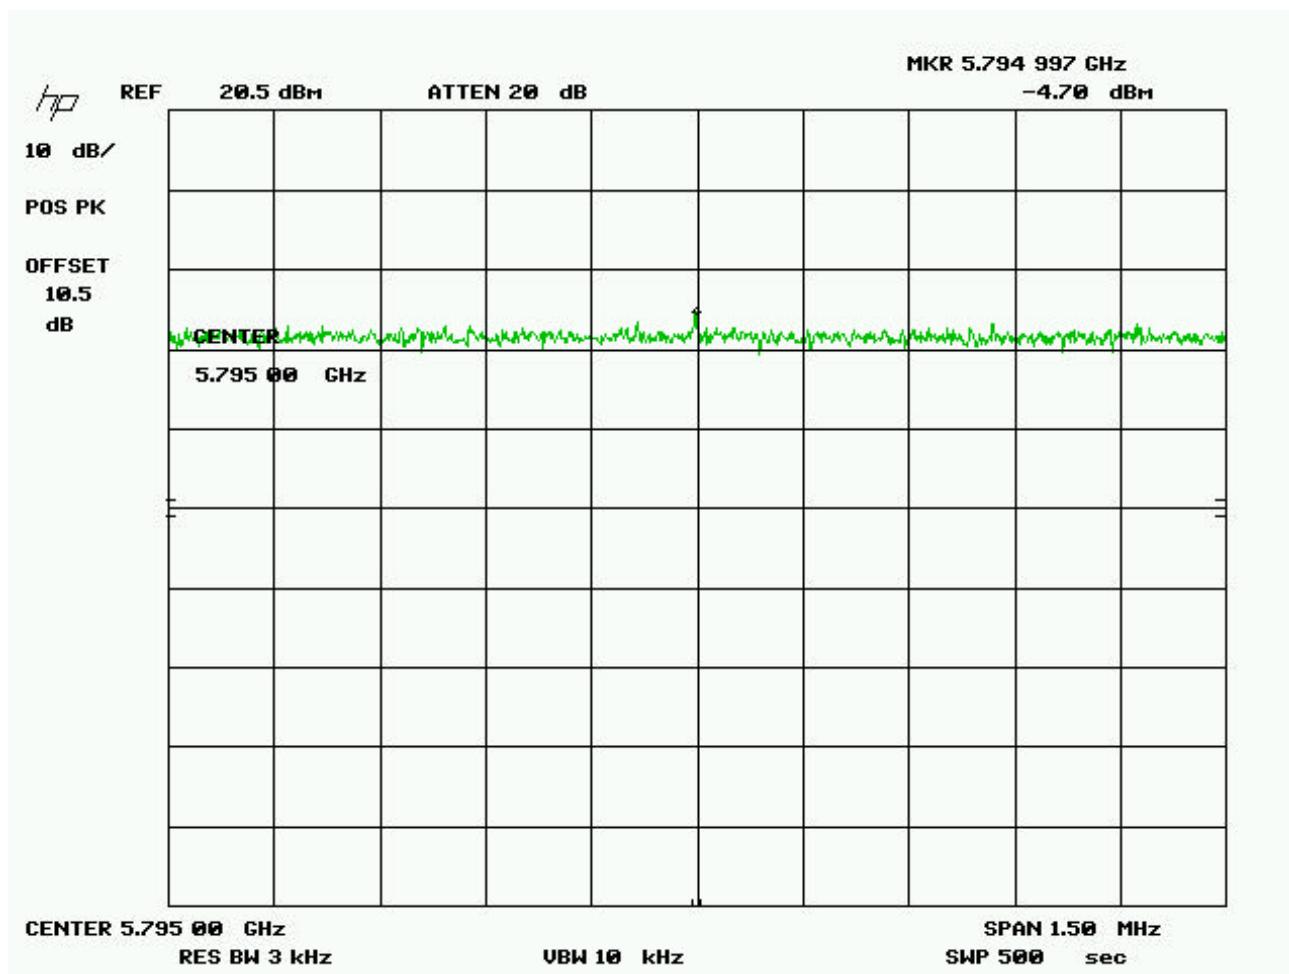

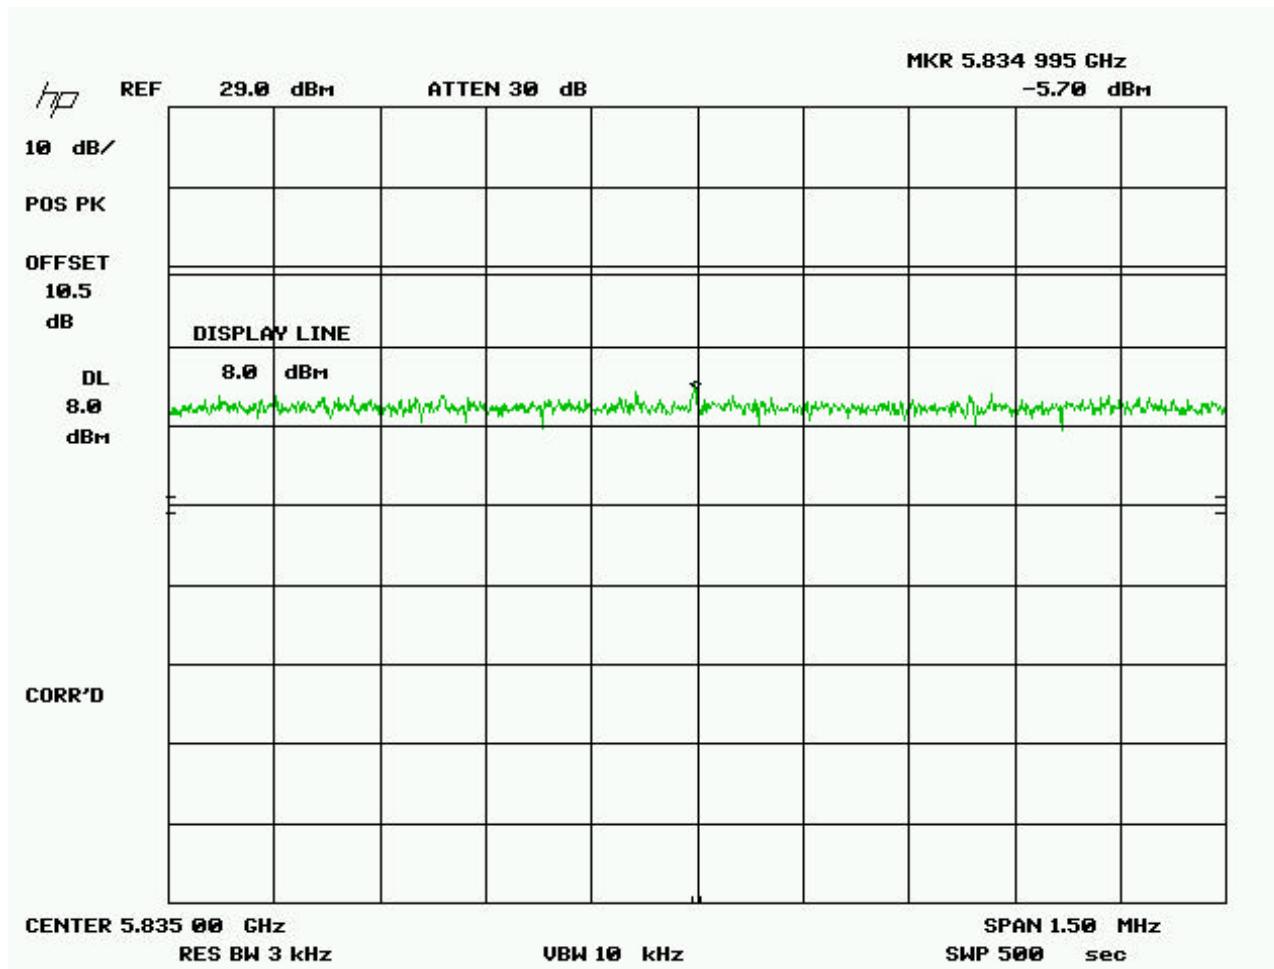


Name of Test: A/C Powerline Conducted Emissions
Specification: 15.207
Test Equipment Utilized i00033, i00270


Test Procedure

The UUT power cable connected to a LISN and the monitored output of the LISN was connected directly to a spectrum analyzer. The conducted emissions from 150 kHz to 30 MHz were monitored and compared to the specification limits. The average measurements were the worst-case and are recorded in the tables below.


Test Setup

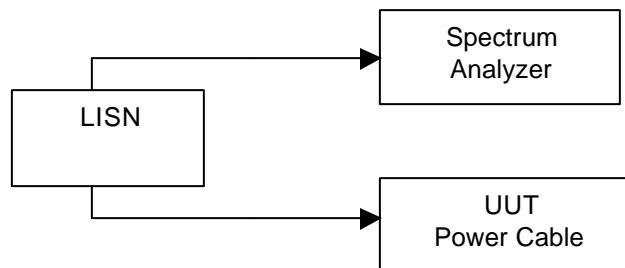

L1 – Phase Test Results

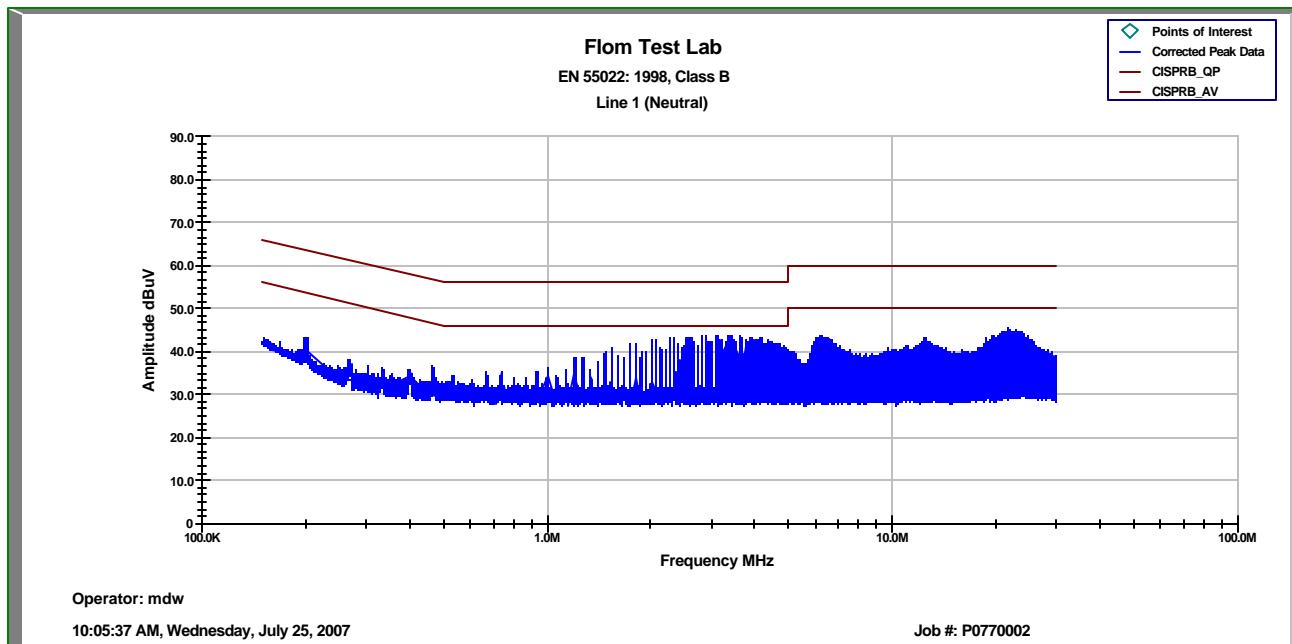

L2 - Neutral Test Results

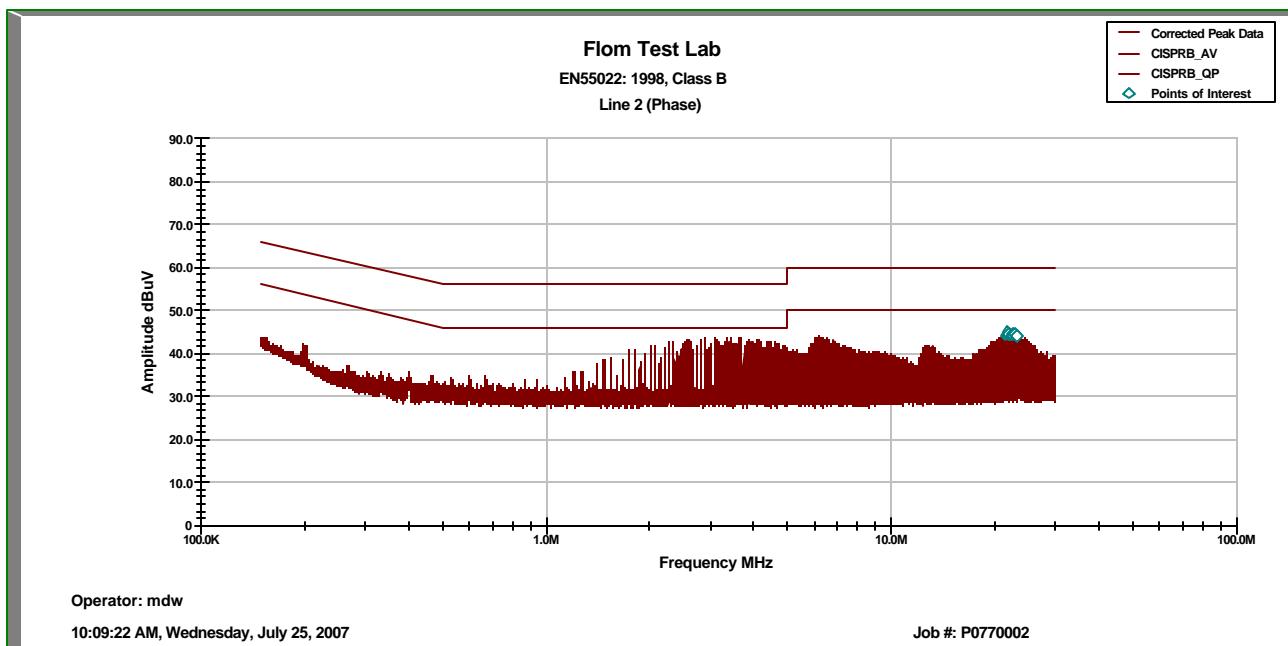

Test Equipment Utilized

Description	MFG	Model Number	FTL Asset Number	Last Cal Date	Cal Due Date
RF Pre-Amplifier	HP	8449	i00028	1/23/07	1/23/09
Spectrum Analyzer	HP	8563E	i00029	03/09/07	03/09/08
Spectrum Analyzer	HP	85462A	i00033	11/03/06	11/03/07
Bi-conical Antenna	EMCO	3109B	i00088	10/14/05	10/14/07
Log Periodic Antenna	Aprel	2001	i00089	10/20/05	10/20/07
Horn Antenna	EMCO	3115	i00103	9/5/06	9/5/07
Power Sensor	HP	E4418B	i00228	8/1/06	8/1/07
LISN	FCC	FCC-LISN-50-32-2-01	i00270	10/25/05	10/25/07
Spectrum Analyzer	HP	8566B	i00290	6/16/06	7/30/07
Power Meter	HP	8481A	i00317	10/1/06	10/1/07
Spectrum Analyzer	HP	8566B	i00329	4/16/07	4/16/08
Test PC	Dell	Dimension 2400	SN/0932RY	N/A	N/A

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

END OF TEST REPORT