



849 NW STATE ROAD 45
NEWBERRY, FL 32669 USA
PH: 888.472.2424 OR 352.472.5500
FAX: 352.472.2030
EMAIL: INFO@TIMCOENGR.COM
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

FCC PART 22

TEST REPORT

APPLICANT	FUNK-ELECTRONIC PICIORGROS GMBH
	Claudiastr. 5 * 51149
	Cologne, GERMANY
FCC ID	TO9TMO100
MODEL NUMBER	TMO100
PRODUCT DESCRIPTION	TMO-100 SCADA and Telemetry Modem for TETRA Infrastructures
STANDARD APPLIED	CFR 47 Part 22
DATE SAMPLE RECEIVED	4/16/2014
DATE TESTED	4/22/2014
REPORT ISSUE DATE	4/24/2014
TESTED BY	NAM NGUYEN
APPROVED BY	NAM NGUYEN
TIMCO REPORT NO.	619AUT14TestReport
TEST RESULTS	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**

TABLE OF CONTENTS

GENERAL REMARKS	3
GENERAL INFORMATION	4
EQUIPMENT LIST	5
TEST PROCEDURE	6
RF POWER OUTPUT	7
MODULATION CHARACTERISTICS	8
VOICE MODULATED COMMUNICATION EQUIPMENT	8
OTHER MODULATION CHARACTERISTICS	9
EMISSION LIMITATIONS	10
OCCUPIED BANDWIDTH	11
SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)	14
FIELD STRENGTH OF SPURIOUS EMISSIONS	16

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

Summary

The device under test does:

fulfill the general approval requirements as identified in this test report
 not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669



Authorized Signatory Name:

Nam Nguyen
Engineering Project Manager

Date: 4/24/2014

Applicant: FUNK-ELECTRONIC PICIORGROS GMBH
FCC ID: TO9TMO100
Report: F\FUNK_ELECTRONIC\619AUT14\619AUT14TestReport

GENERAL INFORMATION

EUT Specification

EUT Description	TMO-100 SCADA and Telemetry Modem for TETRA Infrastructures
FCC ID	TO9TMO100
Model Number	TMO100
Operating Frequency	454 -460 MHz
Serial Number	2180
Type of Emission	21K0D1W
Modulation	$\pi/4$ DQPSK (TETRA)
EUT Power Source	<input type="checkbox"/> 110–120Vac/50– 60Hz
	<input checked="" type="checkbox"/> DC Power (12V to 24V)
	<input type="checkbox"/> Battery Operated Exclusively
Test Item	<input type="checkbox"/> Prototype
	<input checked="" type="checkbox"/> Pre-Production
	<input type="checkbox"/> Production
Type of Equipment	<input checked="" type="checkbox"/> Fixed
	<input type="checkbox"/> Mobile
	<input type="checkbox"/> Portable
Test Conditions	The temperature was 26°C relative humidity of 50%.
Revision History to the EUT	None
Test Exercise	The EUT was placed in continuous transmit mode.
Applicable Standards	ANSI/TIA 603-C:2004, FCC CFR 47 Part 22
Test Facility	Timco Engineering Inc. 849 NW State Road 45 Newberry, FL 32669 USA.

Applicant: FUNK-ELECTRONIC PICIORGROS GMBH

FCC ID: TO9TMO100

Report: F\FUNK_ELECTRONIC\619AUT14\619AUT14TestReport

EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Antenna: Biconical	Eaton	94455-1	1096	05/10/13	05/10/15
Antenna: Log-Periodic	Electro-Metrics	LPA-25	1122	05/09/13	05/09/15
Antenna: Double-Ridged Horn/ETS Horn 2	ETS-Lindgren	3117	00041534	10/05/12	10/05/14
Hygro-Thermometer	Extech	445703	0602	06/20/13	06/20/15
Digital Multimeter	Fluke	77	35053830	08/22/13	08/22/15
Notch Filter	Microlab	HA-10N	NA	5/17/13	5/17/15
Notch Filter	Microlab	HA-20N	NA	5/17/13	5/17/15
Tunable Notch Filter	Eagle	210BFBF	NA	9/15/13	9/15/15
Antenna: Double-Ridged Horn	Electro-Metrics	RGA-180	2319	06/19/12	06/19/14
Antenna: Dipole Kit	Electro-Metrics	TDA-30/1-4	152	11/01/13	11/01/15
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	12/31/13	12/31/15
EMI Test Receiver	Rohde & Schwarz	ESIB40	100274	2/15/13	2/15/15
EMI Test Receiver	Rohde & Schwarz	ESU40	100320	3/21/13	3/21/15

EMI TEST RECEIVER FIRMWARE VERSION USED

Manufacturer	Model	Receiver Firmware	BIOS Ver
Rohde & Schwarz	ESU40	4.43 SP3	V5.1-24-3
Rohde & Schwarz	ESIB40	4.34.3	3.3

Applicant: FUNK-ELECTRONIC PICIORGROS GMBH

FCC ID: TO9TMO100

Report: F\FUNK_ELECTRONIC\619AUT14\619AUT14TestReport

TEST PROCEDURE

Power Line Conducted Interference: The procedure used was ANSI/TIA 603-C: 2004, using a 50uH LISN. Both lines were observed with the DUT transmitting. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

Bandwidth 20 dB: The measurements were made with the spectrum analyzer's resolution bandwidth (RBW) = 1 MHz and the video bandwidth (VBW) = 3 MHz and the span set as shown on plot.

Power Output: The RF power output was measured at the antenna feed point using a peak power meter.

Antenna Conducted Emissions: The RBW = 100 kHz, VBW = 300 kHz and the span set to 10.0 MHz and the spectrum was scanned from 30 MHz to the 10th harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz.

Radiation Interference: The test procedure used was ANSI/TIA 603-C:2004, using a Rohde & Schwarz – EMI test receiver. The bandwidth (RBW) of the spectrum ANSI/TIA 603-C:2004, receiver was 100 kHz up to 1 GHz and 1 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was 3 MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

RF POWER OUTPUT


Rule Part No.: Part 2.1046(a), Part 22

Test Requirements: Manufacturer's Specification

Method of Measurement: RF power is measured by using a 50-ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage (if battery operated), or a properly adjusted power supply (if not battery operated), and the transmitter properly adjusted the RF output measures:

For the device with a fixed or integral antenna, the RF power is measured as ERP. The substitution method was used. The RF output measures:

Test Setup Diagram:

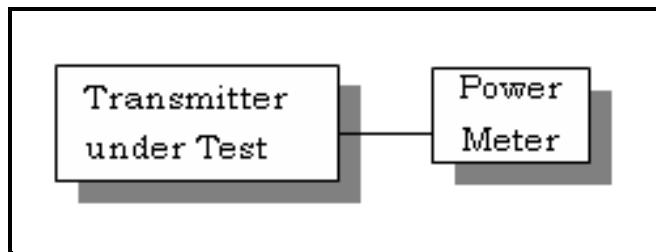

Test Data: RF power of the EUT can be set at 5.00W.

OUTPUT POWER:

Tuned Frequency (MHz)	
454.025	4.91
459.975	5.05

Part 2.1033 (C)(8) DC Input into the final amplifier

Nominal dc voltage: 12.0-24.0 V, dc maximum current: 0.3 A

FOR HIGH POWER SETTING INPUT POWER: $(18.0V)(0.3A) = 5.4\text{Watts}$

MODULATION CHARACTERISTICS

Rule Part No.: Part 2.1047(a)(b)

Method of Measurement:

Audio frequency response

The audio frequency response was measured in accordance with ANSI/TIA 603-D: 2010. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 – 5000Hz shall be submitted. The audio frequency response curve is shown below.

AUDIO FREQUENCY RESPONSE PLOT

NA (TETRA equipment - digital modulation)

VOICE MODULATED COMMUNICATION EQUIPMENT

Part 2.1047(a): For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all the circuitry installed between the modulation limiter and the modulated stage shall be submitted.

AUDIO LOW PASS FILTER.

NA (TETRA equipment - digital modulation)

AUDIO INPUT VERSUS MODULATION

Rule Part No.: Part 2.1047(b)

Method of Measurement: **Modulation cannot exceed 100%,** The audio input level needed for a particular percentage of modulation was measured in accordance with ANSI/TIA 603-D: 2010. The audio input curves versus modulation are shown below. Curves are provided for audio input frequencies of 300, 1000, and 3000 Hz.

NA (TETRA equipment - digital modulation)

OTHER MODULATION CHARACTERISTICS

Part 2.1033(c)

Part 2.1033(c) (4) Type of Emission: 21K0D1W

Part 22.357

Type of Emission: $\pi/4$ DQPSK TETRA as defined in EN 300 392-2.

TETRA is a digital, trunked radio technology that operates with Time Division Multiple Access (TDMA) in four-slot channels within a twenty-five kilohertz bandwidth.


EMISSION LIMITATIONS

Part 22.731

Upon application for multichannel operation, the FCC may authorize emission bandwidths wider than those specified in §22.357, provided that spectrum utilization is equal to or better than that achieved by single channel operation.

Method of Measurement: ANSI/TIA 603-D: 2010

Test Setup Diagram:

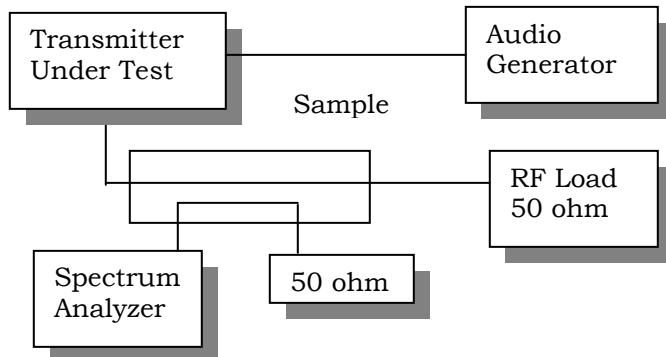

Test Data: See the plots below


OCCUPIED BANDWIDTH

Part 2.1049(c) EMISSION BANDWIDTH: 25kHz Channel Spacing

Data in the plots show that on any frequency removed from the assigned frequency by more than 50%, but not more than 100%: At least 25dB. On any frequency removed from the assigned frequency by more than 100%, but not more than 250%: At least 35 dB. On any frequency removed from the assigned frequency by more than 250%, of the authorized bandwidth: At least $43 + 10\log(P)$ dB.

Method of Measurement: ANSI/TIA 603-D: 2010


Test Setup Diagram:

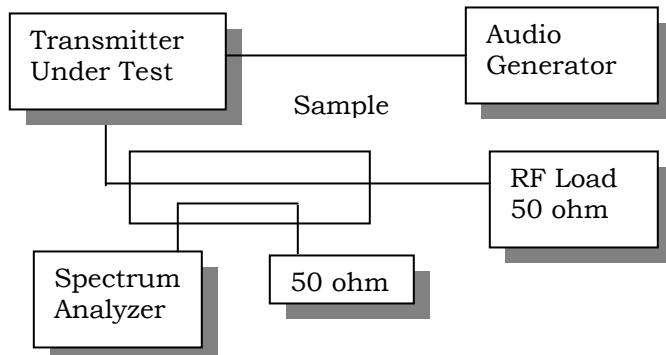

Test Data: See the plots below

OCCUPIED BANDWIDTH PLOT


25kHz Channel Spacing: Low End of Band

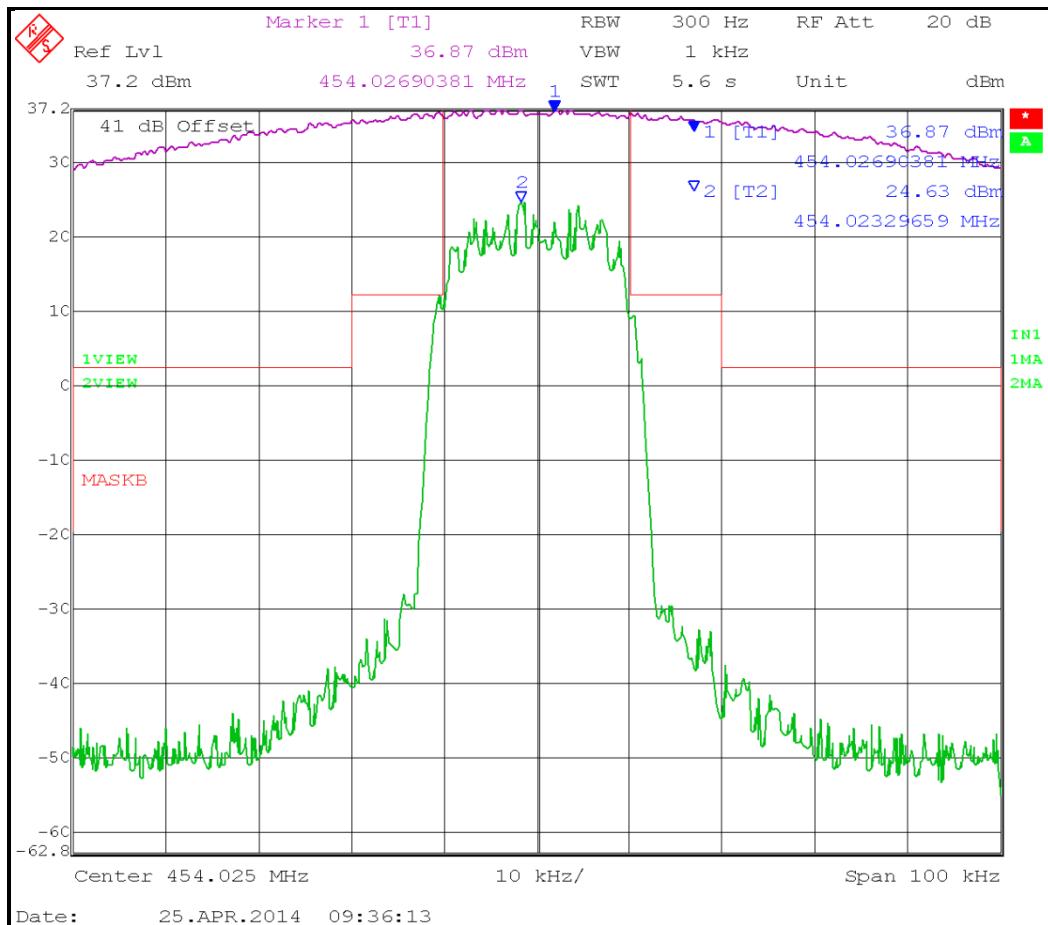

Applicant: FUNK-ELECTRONIC PICIORGROS GMBH
 FCC ID: TO9TMO100
 Report: F\FUNK_ELECTRONIC\619AUT14\619AUT14TestReport

OCCUPIED BANDWIDTH PLOT

25kHz Channel Spacing: High End of Band

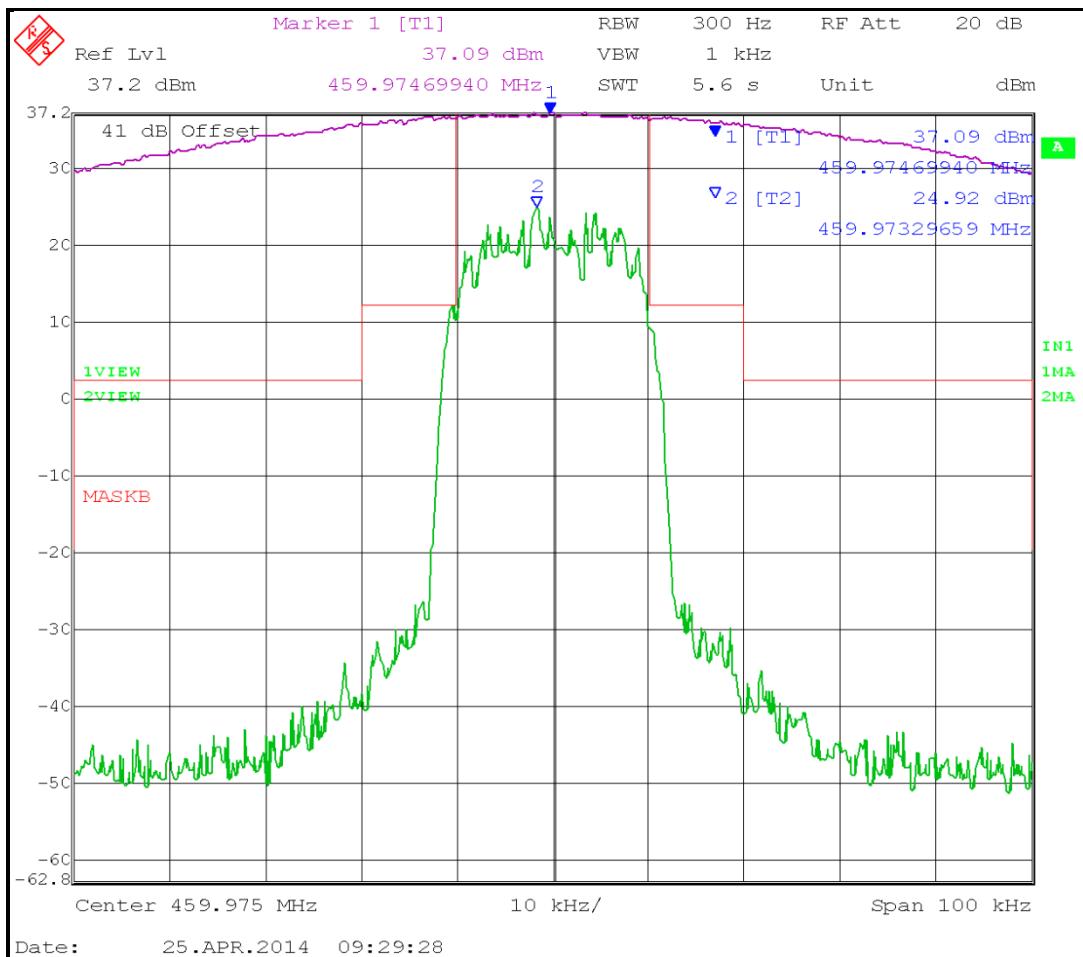

Applicant: FUNK-ELECTRONIC PICIORGROS GMBH
 FCC ID: TO9TMO100
 Report: F\FUNK_ELECTRONIC\619AUT14\619AUT14TestReport

SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)


Rule Part No.: Part 2.1051(a)

Requirements:

25kHz Channel Spacing = $43 + 10\log(5.00) = 50.0$ dBc (High power)

Method of Measurement: The carrier was modulated 100% using a 2500 Hz tone. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard ANSI/TIA 603-C: 2004.

Method of Measuring Conducted Spurious Emissions

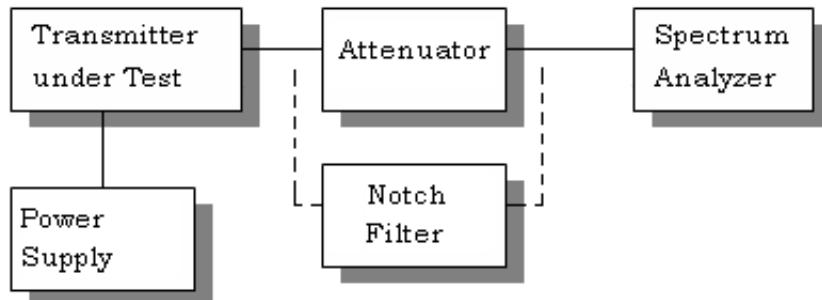

Test Data:

Low End of Band

TF HIGH POWER	EF	dB below carrier
454.03	908.05	95.9
	1362.08	89.9
	1816.10	88.6
	2270.13	90.3
	2724.15	90.8
	3178.18	NE
	3632.20	NE
	4086.23	NE
	4540.25	NE

- NE : No emission found.

High End of Band

TF HIGH POWER	EF	dB below carrier
459.98	919.95	89.7
	1379.93	91.1
	1839.90	90.1
	2299.88	91.9
	2759.85	91.2
	3219.83	NE
	3679.80	NE
	4139.78	NE
	4599.75	NE

NE : No emission found.

RESULTS: PASS/FAIL

FIELD STRENGTH OF SPURIOUS EMISSIONS


Rule Parts. No.: Part 2.1053

Requirements:

25kHz Channel Spacing = $43 + 10\log(5.00) = 50.0$ dBc (High power)

METHOD OF MEASUREMENT: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per ANSI/TIA 603-C: 2004 using the substitution method. Measurements were made at the test site of TIMCO ENGINEERING, INC. located at 849 NW State Road 45, Newberry, FL 32669.

Test Setup Diagram:

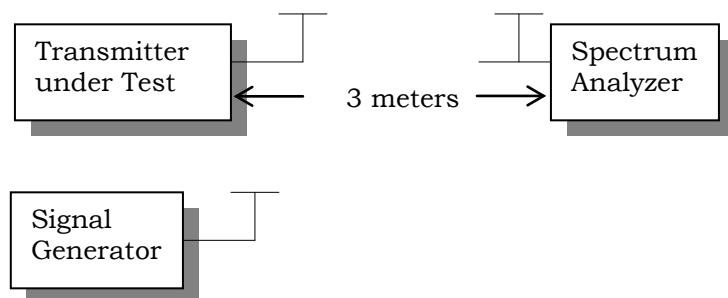

Test Data:

Low End of the Band

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
454.03	0	0
908.05	H	93.6
1362.08	H	91.1
1816.10	H	87.8
2270.13	H	84.4
2724.15	H	84.0
3178.18	H/V	NE
3632.20	H/V	NE
4086.23	H/V	NE
4540.25	H/V	NE

NE : No emission found.

Applicant: FUNK-ELECTRONIC PICIORGROS GMBH

FCC ID: TO9TMO100

Report: F\FUNK_ELECTRONIC\619AUT14\619AUT14TestReport

High End of the Band

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
459.98	0	0
919.95	H	94.1
1379.93	H	92.0
1839.90	H	88.0
2299.88	H	85.5
2759.85	H	83.7
3219.83	H/V	NE
3679.80	H/V	NE
4139.78	H/V	NE
4599.75	H/V	NE

NE : No emission found.