

COMMUNICATION CERTIFICATION LABORATORY

1940 West Alexander Street
Salt Lake City, UT 84119
801-972-6146

Test Report

Certification

TEST OF: CCT01A

FCC ID: TOC-0001

To FCC PART 15, Subpart C
Section 15.249

Test Report Serial No: 73-8197

Applicant:

Grayling Wireless Inc.
Suite 201, 4321-23B Street NE
Calgary, Alberta
Canada T2E 7V9

Date of Test: March 21 & 22, 2006

Issue Date: March 27, 2006

Accredited Testing Laboratory By:



NVLAP Lab Code 100272-0

CERTIFICATION OF ENGINEERING REPORT

This report has been prepared by Communication Certification Laboratory to determine compliance of the device described below with the certification requirements of FCC Part 15, Subpart C. This report may be reproduced in full, partial reproduction may only be made with the written consent of the laboratory. The results in this report apply only to the sample tested.

- Applicant: Grayling Wireless Inc.
- Manufacturer: Grayling Wireless Inc.
- Trade Name: Grayling Wireless
- Model Number: CCT01A
- FCC ID: TOC-0001

On this 27th day of March 2006, I, individually, and for Communication Certification Laboratory, certify that the statements made in this engineering report are true, complete, and correct to the best of my knowledge, and are made in good faith.

Although NVLAP has recognized that the Communication Certification Laboratory EMC testing facilities are in good standing, NVLAP does not endorse the product described in this report.

COMMUNICATION CERTIFICATION LABORATORY



Tested by: Norman P. Hansen
EMC Technician

TABLE OF CONTENTS

SECTION 1.0	CLIENT INFORMATION.....	4
SECTION 2.0	EQUIPMENT UNDER TEST (EUT).....	5
SECTION 3.0	TEST SPECIFICATION, METHODS & PROCEDURES.....	6
SECTION 4.0	OPERATION OF EUT DURING TESTING.....	9
SECTION 5.0	SUMMARY OF TEST RESULTS.....	10
SECTION 6.0	MEASUREMENTS, EXAMINATIONS AND DERIVED RESULTS.....	11
APPENDIX 1	TEST PROCEDURES AND TEST EQUIPMENT.....	18
APPENDIX 2	PHOTOGRAPHS.....	20

SECTION 1.0 CLIENT INFORMATION

1.1 Client Information:

Company Name: Grayling Wireless Inc.
Suite 201, 4321-23B Street NE
Calgary, Alberta
Canada T2E 7V9

Contact Name: Keyes Lowe
Title: Project Manager

1.2 Manufacturer:

Company Name: Grayling Wireless Inc.
Suite 201, 4321-23B Street NE
Calgary, Alberta
Canada T2E 7V9

Contact Name: Keyes Lowe
Title: Project Manager

SECTION 2.0 EQUIPMENT UNDER TEST (EUT)**2.1 Identification of EUT:**

Trade Name: Grayling Wireless
Model Number: CCT01A
Serial Number: MB301 & MB305
Options Fitted: N/A
Country of Manufacture: Canada

2.2 Description of EUT:

The CCT01A is a small transmitter for the Grayling Wireless ClearCalm system designed to mount in a Self Contained Breathing Apparatus (SCBA) faceplate for voice communication. The CCT01A is designed to transmit to a CCR01A lapel receiver of the ClearCalm system. The CCT01A is powered from a single AAA battery.

The CCT01A uses 5 channels in the 902 to 928 MHz frequency range.

Channel 1	Channel 2	Channel 3	Channel 4	Channel 5
906.0 MHz	910.0 MHz	915.0 MHz	919.0 MHz	923.0 MHz

Testing was performed on the lower, middle, and upper channels in accordance with FCC §15.31(m).

SECTION 3.0 TEST SPECIFICATION, METHODS & PROCEDURES**3.1 Test Specification:**

Title: FCC PART 15, Subpart C (47 CFR 15).
Section 15.249

Operation within the bands 902 - 928 MHz,
2400 - 2483.5 MHz, 5725 - 5875 MHz, and 24.0
- 24.25 GHz

Purpose of Test: The tests were performed to demonstrate
initial compliance.

3.2 Methods & Procedures:**3.2.1 §15.224**

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
902 - 928 MHz	50	500
2400 - 2483.5 MHz	50	500
5725 - 5875 MHz	50	500
24.0 - 24.25 GHz	250	2500

(b) Fixed, point-to-point operation as referred to in this paragraph shall be limited to systems employing a fixed transmitter transmitting to a fixed remote location. Point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information are not allowed. Fixed, point-to-point operation is permitted in the 24.05-24.25 GHz band subject to the following conditions:

- (1) The field strength of emissions in this band shall not exceed 2500 millivolts/meter.
- (2) The frequency tolerance of the carrier signal shall be maintained within + 0.001% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply

voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

- (3) Antenna gain must be at least 33 dBi. Alternatively, the main lobe beamwidth must not exceed 3.5 degrees. The beamwidth limit shall apply to both the azimuth and elevation planes. At antenna gains over 33 dBi or beamwidths narrower than 3.5 degrees, power must be reduced to ensure that the field strength does not exceed 2500 millivolts/meter.

(c) Field strength limits are specified at a distance of 3 meters.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

(e) As shown in Section 15.35(b), for frequencies above 1000 MHz, the above field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

(f) Parties considering the manufacture, importation, marketing or operation of equipment under this section should also note the requirement in Section 15.37(d).

3.3 Test Procedure

The radiated emissions testing was performed according to the procedures in ANSI C63.4 (2003). Testing was performed at CCL's Wanship open area test site #2, located at 550 West Wanship Road, Wanship, UT. This site has been fully described in a report submitted to the FCC, and was accepted in a letter dated August 11, 2003 (90504).

CCL participates in the National Voluntary Laboratory Accreditation Program (NVLAP) and has been accepted under NVLAP Lab Code:100272-0, which is effective until September 30, 2006.

For radiated emissions testing at 30 MHz or above that is performed at distances closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

SECTION 4.0 OPERATION OF EUT DURING TESTING

4.1 Operating Environment:

Power Supply: 1.5 VDC from 1 - AAA battery

4.2 Operating Modes:

The CCT01A was tested when placed horizontally on the table top in a test fixture, flat horizontally on the table, and on edge. The transmitter was in a constant transmit state during testing.

4.3 EUT Exercise Software:

No software was required.

SECTION 5.0 SUMMARY OF TEST RESULTS**5.1 FCC PART 15, Subpart C Section 15.249****5.1.1 Summary of Tests:**

Section	Test Performed	Frequency Range (MHz)	Result
15.249 (a)	Field Strength of Fundamental	902 -928	Complied
15.249 (a)	Field Strength of Harmonics	1804 -9280	Complied
15.249 (b)	Fixed Point-to-Point Operation	N/A	Not Applicable
15.249 (d)	Radiated Spurious Emissions	30 - 9280	Complied

5.2 Result

In the configuration tested, the EUT complied with the requirements of the specification.

SECTION 6.0 MEASUREMENTS, EXAMINATIONS AND DERIVED RESULTS**6.1 General Comments:**

This section contains the test results only. Details of the test methods used and a list of the test equipment used during the measurements can be found in Appendix 1 of this report.

6.2 Test Results:**6.2.1 §15.249 (a) & (d)**

The radiated emissions from the fundamental frequency must not exceed 94.0 dB μ V/m. Emissions from harmonics and spurious emissions must not exceed 54.0 dB μ V/m. The measurement distance specified using these limits is 3 meters and the testing was performed at that distance. The tables below show the worst-case emissions from testing. Testing was performed on the lowest, middle, and highest channels. The plots following the data tables show the fundamental frequency of the lowest channel and the highest channel residing totally within the specified operating band.

Channel 1 - Radiated Emission Data

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB μ V)	Correction Factor (dB/m)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
906.0	Peak	Vertical	57.1	28.6	85.7	94.0	-8.3
906.0	Peak	Horizontal	52.6	28.6	81.2	94.0	-12.8
1812.0	Peak	Vertical	15.8	27.7	43.5	74.0	-30.5
1812.0	Average	Vertical	11.5	27.7	39.2	54.0	-14.8
1812.0	Peak	Horizontal	18.0	27.7	45.7	74.0	-28.3
1812.0	Average	Horizontal	14.5	27.7	42.2	54.0	-11.8
2718.0	Peak	Vertical	1.5	30.7	32.2	74.0	-41.8
2718.0	Average	Vertical	-8.7	30.7	22.0	54.0	-32.0
2718.0	Peak	Horizontal	2.3	30.7	33.0	74.0	-41.0
2718.0	Average	Horizontal	-8.1	30.7	22.6	54.0	-31.4
3624.0	Peak	Vertical	6.4	33.6	40.0	74.0	-34.0

Channel 3 Radiated Emission Data

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB μ V)	Correction Factor (dB/m)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
915.0	Peak	Vertical	60.6	28.8	89.4	94.0	-4.6
915.0	Peak	Horizontal	61.5	28.8	90.3	94.0	-3.7
1830.0	Peak	Vertical	20.4	27.8	48.2	74.0	-25.8
1830.0	Average	Vertical	17.3	27.8	45.1	54.0	-8.9
1830.0	Peak	Horizontal	19.9	27.8	47.7	74.0	-26.3
1830.0	Average	Horizontal	16.7	27.8	44.5	54.0	-9.5
2745.0	Peak	Vertical	1.5	30.7	32.2	74.0	-41.8
2745.0	Average	Vertical	-8.7	30.7	22.0	54.0	-32.0
2745.0	Peak	Horizontal	2.3	30.7	33.0	74.0	-41.0
2745.0	Average	Horizontal	-8.1	30.7	22.6	54.0	-31.4
3660.0	Peak	Vertical	6.4	33.6	40.0	74.0	-34.0
3660.0	Average	Vertical	-5.0	33.6	28.6	54.0	-25.4
3660.0	Peak	Horizontal	6.8	33.6	40.4	74.0	-33.6
3660.0	Average	Horizontal	-5.2	33.6	28.4	54.0	-25.6
4575.0	Peak	Vertical	5.3	34.7	40.0	74.0	-34.0
4575.0	Average	Vertical	-6.0	34.7	28.7	54.0	-25.3
4575.0	Peak	Horizontal	5.1	34.7	39.8	74.0	-34.2
4575.0	Average	Horizontal	-6.0	34.7	28.7	54.0	-25.3
5490.0	Peak	Vertical	5.7	36.4	42.1	74.0	-31.9
5490.0	Average	Vertical	-6.4	36.4	30.0	54.0	-24.0
5490.0	Peak	Horizontal	5.3	36.4	41.7	74.0	-32.3
5490.0	Average	Horizontal	-6.1	36.4	30.3	54.0	-23.7
6405.0	Peak	Vertical	9.1	37.0	46.1	74.0	-27.9
6405.0	Average	Vertical	-2.7	37.0	34.3	54.0	-19.7
6405.0	Peak	Horizontal	9.0	37.0	46.0	74.0	-28.0
6405.0	Average	Horizontal	-2.6	37.0	34.4	54.0	-19.6
7320.0	Peak	Vertical	9.3	39.5	48.8	74.0	-25.2
7320.0	Average	Vertical	-2.8	39.5	36.7	54.0	-17.3

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB μ V)	Correction Factor (dB/m)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
7320.0	Peak	Horizontal	8.6	39.5	48.1	74.0	-25.9
7320.0	Average	Horizontal	-2.9	39.5	36.6	54.0	-17.4
8235.0	Peak	Vertical	8.3	40.6	48.9	74.0	-25.1
8235.0	Average	Vertical	-3.5	40.6	37.1	54.0	-16.9
8235.0	Peak	Horizontal	8.1	40.6	48.7	74.0	-25.3
8235.0	Average	Horizontal	-3.6	40.6	37.0	54.0	-17.0
9150.0	Peak	Vertical	8.4	41.7	50.1	74.0	-23.9
9150.0	Average	Vertical	-3.6	41.7	38.1	54.0	-15.9
9150.0	Peak	Horizontal	8.3	41.7	50.0	74.0	-24.0
9150.0	Average	Horizontal	-3.7	41.7	38.0	54.0	-16.0
Note: Measurements shown for frequencies of 2718 MHz and above are noise floor measurements. No emissions were seen at a distance of 1 meter from the EUT.							

Channel 5 Radiated Emission Data

Frequency (MHz)	Detector	Antenna Polarity	Receiver Reading (dB μ V)	Correction Factor (dB/m)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
923.0	Peak	Vertical	53.6	28.9	82.5	94.0	-11.5
923.0	Peak	Horizontal	59.7	28.9	88.6	94.0	-5.4
1846.0	Peak	Vertical	17.6	27.9	45.5	74.0	-28.5
1846.0	Average	Vertical	12.8	27.9	40.7	54.0	-13.3
1846.0	Peak	Horizontal	18.0	27.9	45.9	74.0	-28.1
1846.0	Average	Horizontal	14.5	27.9	42.4	54.0	-11.6
2769.0	Peak	Vertical	1.5	30.7	32.2	74.0	-41.8
2769.0	Average	Vertical	-8.7	30.7	22.0	54.0	-32.0
2769.0	Peak	Horizontal	2.3	30.7	33.0	74.0	-41.0
2769.0	Average	Horizontal	-8.1	30.7	22.6	54.0	-31.4
3692.0	Peak	Vertical	6.4	33.6	40.0	74.0	-34.0
3692.0	Average	Vertical	-5.0	33.6	28.6	54.0	-25.4

Sample Field Strength Calculation:

The field strength is calculated by adding the Correction Factor (Antenna Factor + Cable Factor) to the measured level of the receiver. The receiver amplitude reading is compensated for any amplifier gain.

The basic equation with a sample calculation is shown below:


$$FS = RA + CF \quad \text{Where}$$

FS = Field Strength

RA = Receiver Amplitude Reading


CF = Correction Factor (Antenna Factor + Cable Factor)

Assume a receiver reading of 44.2 dB μ V is obtained from the receiver and a correction factor of 17.5 dB. The field strength is calculated by adding the correction factor to the receiver reading, giving a field strength of 61.7 dB μ V/m, $FS = 44.2 + 17.5 = 61.7$ dB μ V/m.

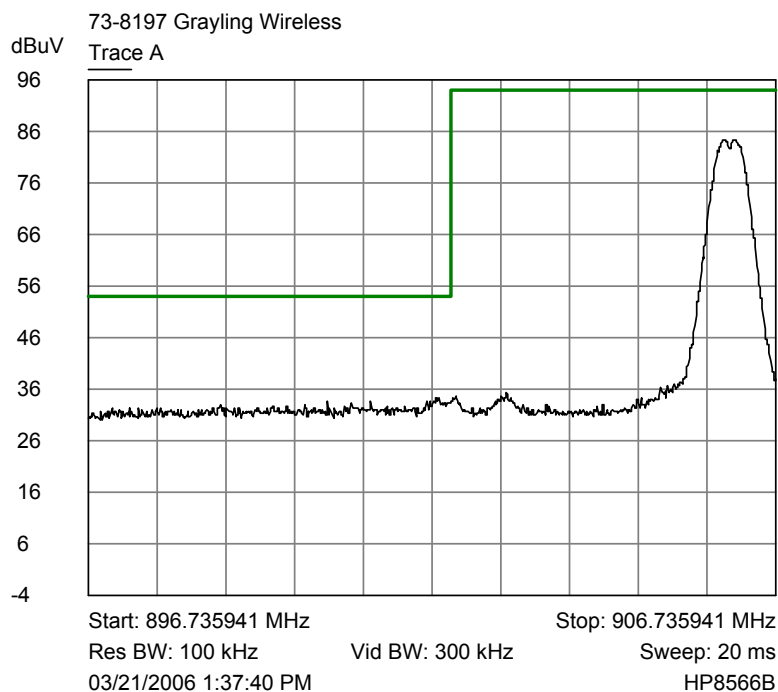

MB301

Trace A Channel 1 Band edge plot

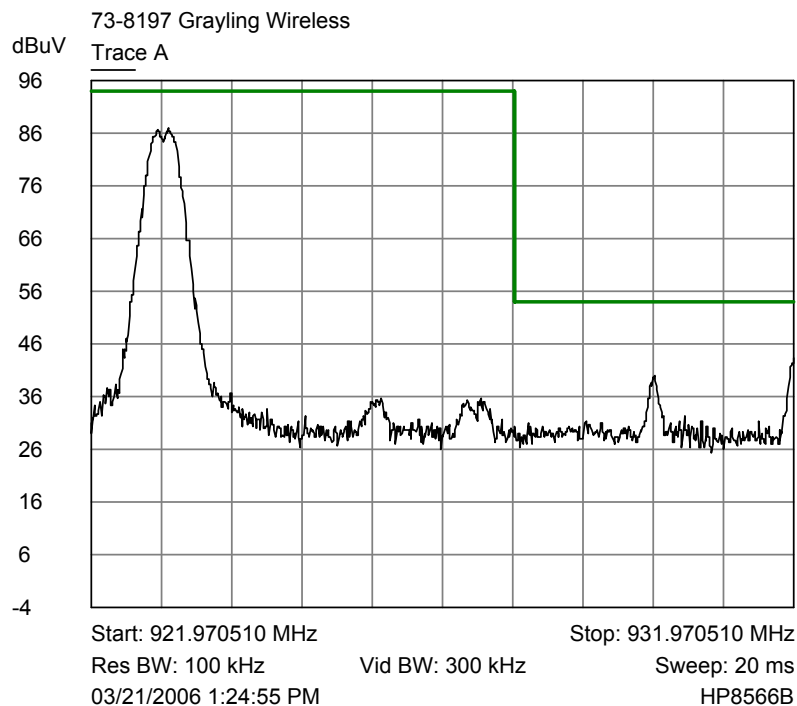

MB301

Trace A Channel 5 band edge plot

RESULT

In the configuration tested, the EUT complied with the requirements of §15.249 (a) & (d) with a nearest margin to the limit of 3.7 dB and the fundamental frequencies of all channels are within the specified band of operation.

APPENDIX 1 TEST PROCEDURES AND TEST EQUIPMENT**A.1.1 Radiated Interference Emissions**

The radiated emission from the intentional radiator was measured using a spectrum analyzer. For frequencies above 30 MHz and below 1000 MHz, the resolution bandwidth was set at 100 kHz and the video bandwidth was set at 300 kHz, bypassing the Quasi-Peak Adapter. For measurements at frequencies above 1000 MHz, a 1 MHz RBW was used with the VBW set to 3 MHz for peak detection and set to 10 Hz for average detection measurements.

A biconilog antenna was used to measure the frequency range of 30 to 1000 MHz at a distance of 3 meters from the EUT. The readings obtained by the antenna are correlated to the levels obtained with a tuned dipole antenna by adding antenna factors. A double-ridged guide antenna was used for frequencies above 1000 MHz at a distance of 3 MHz. If no emission was seen at a distance of 3 meters from the EUT, a distance of 1 meter was used and the measurement adjusted for distance and compared to the 3 meter limit.

The configuration of the intentional radiator was varied to find the maximum radiated emission. The intentional radiator was rotated 360 degrees, and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.


Desktop intentional radiators are measured on a non-conducting table 0.8 meter above the ground plane. The table is placed on a turntable which is level with the ground plane.

Type of Equipment	Manufacturer	Model Number	Serial Number	Date of Last Calibration
Wanship Open Area Test Site #2	CCL	N/A	N/A	10/28/2005
Test Software	CCL	Radiated Emissions	Revision 1.3	N/A
Spectrum Analyzer	Hewlett Packard	8566B	2230A01711	10/10/2005
Biconilog Antenna	EMCO	3142	9601-1009	12/28/2005
Active Loop Antenna	EMCO	6502	2011	04/21/2005
3 Meter Radiated Emissions Cable Wanship Site #2	CCL	Cable K	N/A	12/12/2005

Type of Equipment	Manufacturer	Model Number	Serial Number	Date of Last Calibration
Double Ridged Guide Antenna	EMCO	3115	9604-4779	05/26/2005
High Frequency Amplifier	Hewlett Packard	8449B	3008A00990	05/25/2005
Pre/Power-Amplifier	Hewlett Packard	8447F	3113A05161	09/19/2005
6 dB Attenuator	Hewlett Packard	8491A	32835	12/12/2005

An independent calibration laboratory or CCL personnel calibrates all the equipment listed above at intervals defined in ANSI C63.4:2003 Section 4.4 following outlined calibration procedures. All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Supporting documentation relative to tractability is on file and is available for examination upon request.

Radiated Emissions Test Setup

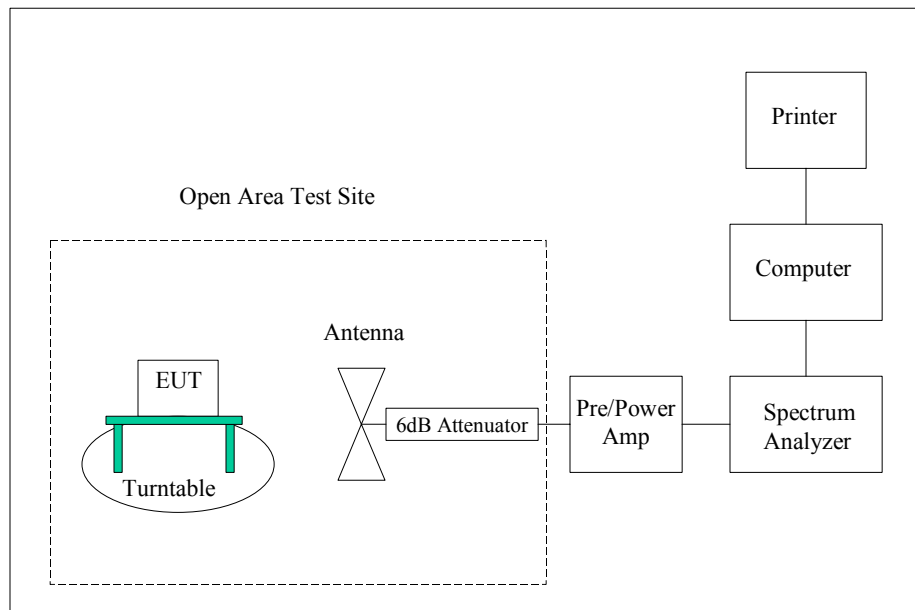

APPENDIX 2 PHOTOGRAPHS

Photograph 1 - Front View of the Radiated Test Setup
(Test Jig Configuration)



Photograph 2 - Back View of the Radiated Test Setup
(Horizontal on the Front Face Alignment)



Photograph 3 - View of the Radiated Test Setup
(On Edge Alignment)




Photograph 4 - Front View of the EUT



Photograph 5 - Back View of the EUT



Photograph 6 - View of the Back Side of the PCB

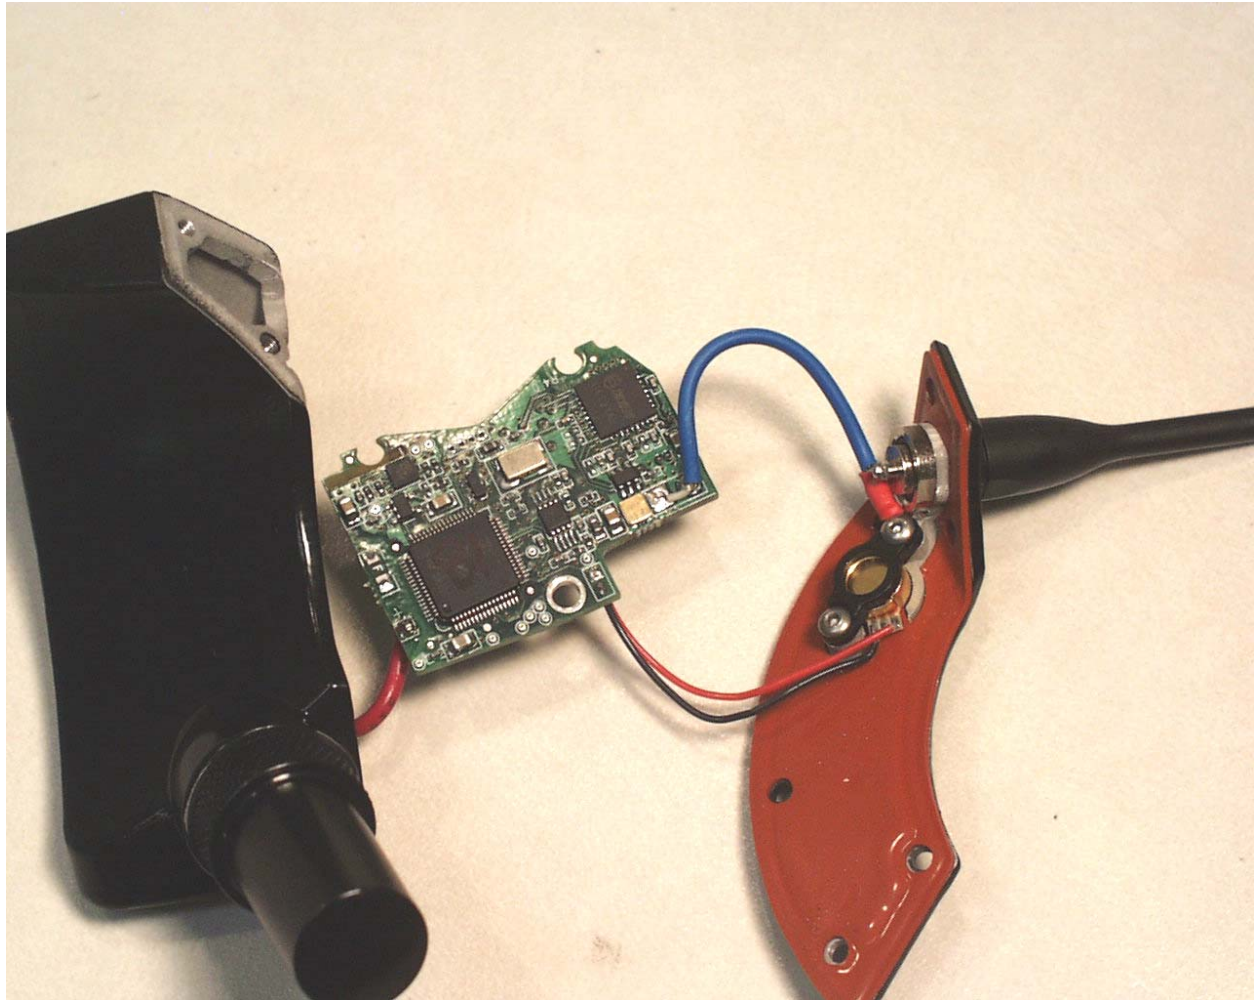

Photograph 11 - View of the Front Side of the PCB

