

## FCC EVALUATION REPORT FOR CERTIFICATION

### *KOREA Standard Technology*

*Test report No.: KST-FCC0632*

**Applicant's Name :** AIR WOLF COMPANY INC.  
**Applicant's Address :** 2F, 972 Hoge-3dong, dongan-gu, anyang-si, kyonggi-do, S. Korea  
**Manufacturer's Name :** AIR WOLF COMPANY INC.  
**Manufacturer's Address :** 2F, 972 Hoge-3dong, dongan-gu, anyang-si, kyonggi-do, S. Korea

#### **EUT's:**

**FCC ID :** TOKAir-X5000B  
**Product Name :** Two Way Car Alarm System  
**Model Number(s) :** Air-X5000B  
**Product Options :** N/A  
**Category :** FCC Part15, Subpart C – Intentional Radiator

### **Supplementary Information**

The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with measurement procedures specified in ANSI C63.4-2003.

I attest to the accuracy of data and all measurements reported herein were performed by or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

**Test Date : October 5, 2006**

**Issued Date : October 11, 2006**

**Tested by:**



**Choi, Jae-Rock**

**Approved by:**



**Lee, Weon-Woo**



## Contents

1. Description of Device
2. Test Facility
3. MAP
4. Test system configuration
5. Description of E.U.T.
6. Summary of test results.
7. Test results.
8. Photographs.

Appendix. Schematics

Specifications.

## 1. Description of Device

|                                 |                                    |
|---------------------------------|------------------------------------|
| 1) Kind of equipment:           | Two Way Car Alarm System           |
| 2) FCC ID:                      | TOKAir-X5000B                      |
| 3) Model Name:                  | Air-X5000B                         |
| 4) Serial No.:                  | None                               |
| 5) Type of Sample Tested:       | Pre-production                     |
| 6) High Frequency Used:         | 20.945 MHz / 8.000 MHz             |
| 7) Communication;               | FM Two-Way                         |
| 8) Operating Frequency;         | FM 433.925 MHz                     |
| 9) Modulation Type & Deviation; | FSK                                |
| 10) Power Rating:               | DC 12 V DC POWER SUPPLY            |
| 11) RF Sensitivity;             | -120dBm                            |
| 12) Tested Power supply:        | DC 12 V                            |
| 13) Dimension;                  | 135(W) x 33(H) x 18(T) mm          |
| 14) Date of Manufacture:        | October, 2006                      |
| 15) Manufacture:                | AIR WOLF COMPANY INC.              |
| 16) Description of Operating:   | Pulse code signal with manually    |
| 17) Dates of Test:              | October 5, 2006                    |
| 18) Place of Tests:             | Korea Standard Technology EMC site |
| 19) Test Report No:             | KST-FCC0632                        |

## 2. Test Facility

The open field test site and conducted measurement facility are used for these testing, where are located following address and drawing. This site was fully described in a report dated November 14, 2002, that was submitted to the FCC.

Korea Standard Technology ( KOSTEC Co., Ltd)

Head office & Test Lab ;

:180-254, Annyung-Ri, Taeon-Yup, Hwasung-shi, Kyunggi-do, Korea

Telephone Number : 82-31-222-4251

Facsimile Number: 82-31-222-4252

**MIC**(Ministry of Information and Communication) Number: **KR0041**


**FCC** Filing Number. : **525762**

**VCCI** Membership Number : **2005**


**VCCI** Registration Number : **R-1657 / C-1763**

## 3. Route Map of Measurement Facility

Korea

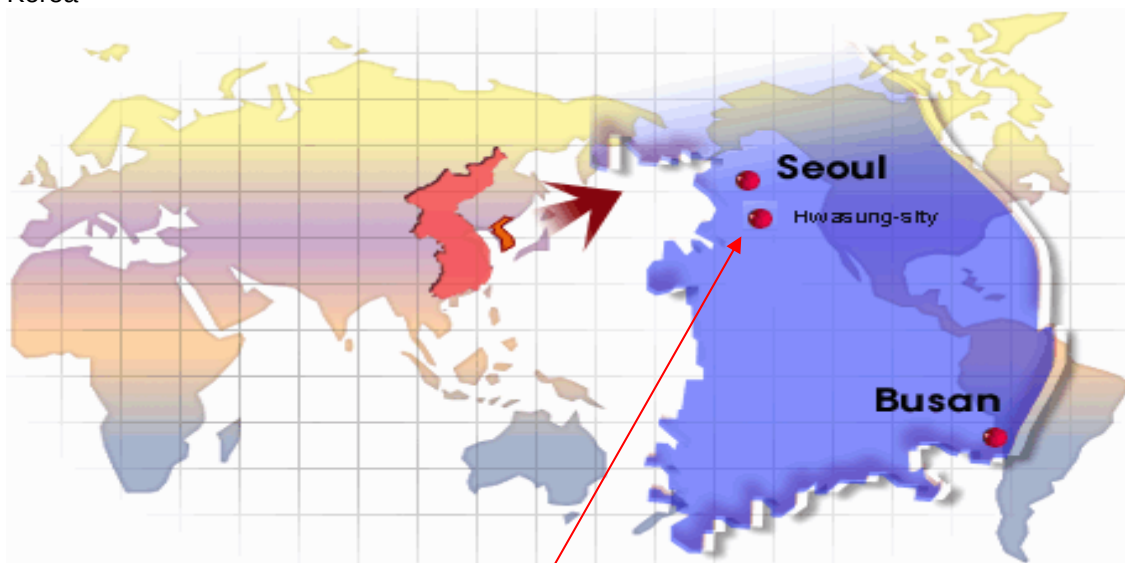

Hwasung-shi (open area test site)

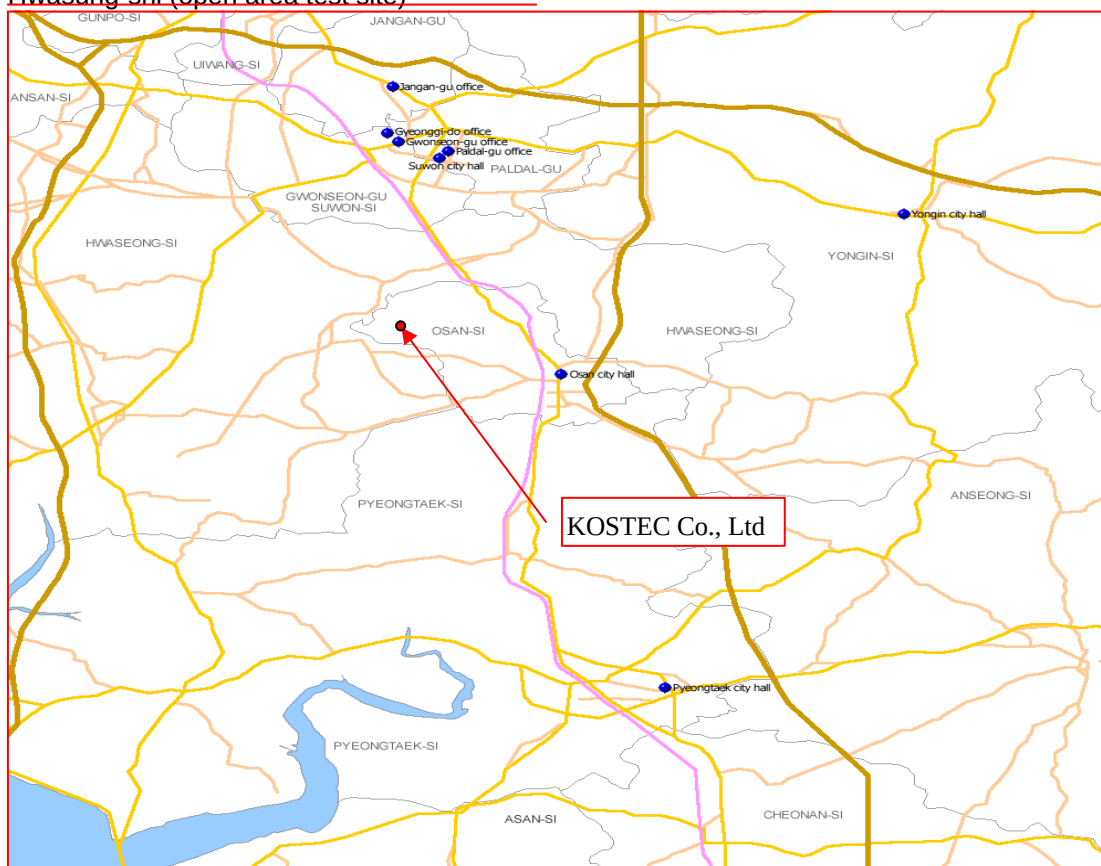

## 4. Test System Configuration

### Operation Environment

| Ambient             | <u>Temperature</u><br>( ° C ) | <u>Humidity</u><br>( % ) | <u>Pressure</u> ( hPa ) |
|---------------------|-------------------------------|--------------------------|-------------------------|
| 10 m Open Area site | 27                            | 46                       | 1009                    |
| Shielded room:      | 25                            | 40                       | 1009                    |

### Test site

These testing were performed following locations ;

Shielded room : Conducted Emission,

10 m Open Area Site: Radiated Emission

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, Cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, site imperfection, mismatch, and system repeatability.

Based on NIS 80,81, The measurement uncertainty level with a 95% confidence level were applied.

### sample calculation

#### Conducted emission

The field strength is calculated by adding the LISN factor, cable loss from the measured reading.

The sample calculation is as follows:

$$FS = MR + LF + CL$$

MR = Meter Reading

LF = LISN Factor

CL = Cable Loss

If MR is 30 dB, LISN Factor 1 dB, CL 1 dB

The result (MR) is

$$30 + 1 + 1 = 32 \text{ dBuV}$$

## 7. TEST RESULTS

### 7.1 Conducted emission

#### Measurement procedure

##### Mains

The measurements were performed in a shielded room. EUT was placed on a non-metallic table height of 0.4 m above the reference ground plane. They were folded back and forth forming a bundle 30 cm to 40 cm long and were hanged at a 40 cm height to the ground plane.

Each EUT power lead, except ground (safety) lead, were individually connected through a LISN to input power source.

Both lines of power cord, hot and neutral, were measured.

#### Used equipment

| Equipment     | Model no. | Serial no. | Makers | Next cal date | Used |
|---------------|-----------|------------|--------|---------------|------|
| Test receiver | ESPI3     | 100109     | R&S    | 2007.3.3      | ●    |
| L.I.S.N.      | ESH2-Z5   | 100044     | R&S    | 2007.5.1      | ●    |
|               | ESH3-Z5   | 100147     | R&S    | 2007.8.11     | ●    |

#### Measurement uncertainty

Conducted Emission measurement :  $\pm 2.4$  (K=2)

#### Test data

- **Not Application**
- Use to DC 12 V DC POWER SUPPLY.

# EMI TEST REPORT



Report reference No: KST-FCC0632

## 7.2 Radiated Emission

### Measurement procedure

A pretest was performed at 3 m distances in a semi-anechoic chamber for searching correct frequency. The final test was done at a 10 m open area test site with a quasi-peak detector. EUT was placed on a non-metallic table height of 0.8 m above the reference ground plane. Cables connected to EUT were fixed to cause maximum emission. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

### Used equipment

| Equipment               | Model no. | Serial no.  | Makers     | Next cal date |
|-------------------------|-----------|-------------|------------|---------------|
| Test receiver           | ESCS30    | 100111      | R&S        | 2007.3.06     |
| Ultra broadband antenna | HL562     | 100075      | R&S        | 2007.3.23     |
| Matching network        | RAM       | 358.5414.02 | R&S        | -             |
| Antenna Mast            | AT14      | none        | Daeil EMC  | -             |
| Turn Table              | TT15      | none        | Daeil EMC  | -             |
| 10m Open area site      | none      | none        | KOSTEC Lab | -             |
| chamber(3 m)            | none      | none        | FRANCONIA  | -             |

### Measurement uncertainty

Radiated Emission measurement :  
30-300 MHz +3.96 dB / -4.04 dB  
300-1000 MHz +3.04 dB / -3.00 dB

Radiated Limits per section 15.231 ;

| Fundamental Frequency ( MHz ) | Field Strength of Fundamental ( microvolts/meter ) $\mu V$ | Field Strength of Spurious Emissions (microvolts / meter ) $\mu V$ |
|-------------------------------|------------------------------------------------------------|--------------------------------------------------------------------|
| 40.66 ~ 40.70                 | 2250                                                       | 225                                                                |
| 70 ~ 130                      | 1250                                                       | 125                                                                |
| 130 ~ 174                     | 1250 ~ 3750                                                | 125 ~ 375                                                          |
| 174 ~ 260                     | 3750                                                       | 375                                                                |
| 260 ~ 470                     | 3750 ~ 12500                                               | 375 ~ 1250                                                         |
| 470 & above                   | 12500                                                      | 1250                                                               |





# EMI TEST REPORT



Report reference No: KST-FCC0632

Test data

## < Part 15.231 – TX Mode >

| Freq<br>(MHz) | Reading<br>(dB $\mu$ V/m) | P<br>(H/V) | Antenna<br>(dB) | Cable Loss<br>(dB) | Result(P)<br>(dB $\mu$ V/m) | Result(A)<br>(dB $\mu$ V/m) | Limit<br>(dB $\mu$ V/m) | Margin<br>(dB) |
|---------------|---------------------------|------------|-----------------|--------------------|-----------------------------|-----------------------------|-------------------------|----------------|
| 433.925       | 45.18                     | H          | 14.19           | 7.73               | 68.00                       | 67.10                       | 80.8                    | 13.70          |
| 867.850       | 5.56                      | H          | 20.17           | 11.27              | 38.00                       | 37.00                       | 60.8                    | 23.80          |
| 1301.775      | 5.10                      | H          | 24.60           | 13.40              | 44.10                       | 43.10                       | 54.0                    | 10.90          |
| 1735.700      | 12.00                     | V          | 26.30           | 15.80              | 56.60                       | 54.10                       | 60.8                    | 6.70           |
| 2169.625      | 8.30                      | H          | 28.10           | 17.90              | 55.60                       | 54.30                       | 60.8                    | 6.50           |
| 2603.550      | 5.70                      | H          | 30.10           | 20.30              | 56.90                       | 56.10                       | 60.8                    | 4.70           |

Reading = Test receiver reading / P= antenna Polarization / H=antenna H  
 A=turn table Angle / Antenna = antenna factor / Cable loss = used cable loss  
 Result = reading + antenna + loss / Margin = Limit - result  
 \* Receiving Antenna Mode: Horizontal, Vertical / \* Test site: 3 m Open area site

Note ; These frequencies fall under restricted bands according to section 15.205.

The field strength of emissions at these frequencies does not exceed the limits specified in Section 15.205.

$$\text{dBuV} = 20\log_{10}(\mu\text{V/m})$$

$$\text{dBuV} = \text{dBm} + 107$$

Calculation of Limit at 434 MHz per Section 15.231 as follows;

$$260 \text{ MHz} - 3750 \mu\text{V/m} \quad / \quad 470 \text{ MHz} - 12500 \mu\text{V/m}$$

$$\frac{12500-3750}{470-260} = \frac{8750}{210}$$

$$\frac{(434-260) \times (8750)}{210} = 7250 \mu\text{V/m}$$

$$7250 + 3750 = 11000 \mu\text{V/m} \text{ ( } 80.8 \text{ dB}\mu\text{V) Limit at 434 MHz.}$$



# EMI TEST REPORT



Report reference No: KST-FCC0632

Test Data – Other frequency

< RX Mode >

| Freq<br>(MHz) | Reading<br>(dB $\mu$ /m) | P<br>(H/V) | H<br>(m) | A<br>(. ) | Antenna<br>(dB) | Cable Loss<br>(dB) | Result<br>(dB $\mu$ /m) | Limit<br>(dB $\mu$ /m) | Margin<br>(dB) |
|---------------|--------------------------|------------|----------|-----------|-----------------|--------------------|-------------------------|------------------------|----------------|
| 48.21         | 19.10                    | H          | 2.30     | 360       | 8.83            | 2.70               | 23.70                   | 40.0                   | 16.30          |
| 96.42         | 20.85                    | H          | 2.30     | 200       | 8.75            | 3.80               | 33.40                   | 43.5                   | 10.10          |
| 144.64        | 23.70                    | V          | 1.50     | 180       | 7.76            | 4.14               | 35.60                   | 43.5                   | 7.90           |
| 241.06        | 23.01                    | H          | 2.30     | 110       | 9.14            | 5.25               | 37.40                   | 46.0                   | 8.60           |
| 412.52        | 12.72                    | H          | 1.70     | 90        | 13.76           | 7.52               | 34.00                   | 46.0                   | 12.00          |
| 626.98        | 7.85                     | H          | 1.50     | 110       | 17.36           | 9.39               | 34.60                   | 46.0                   | 11.40          |

Reading = Test receiver reading / P= antenna Polarization / H=antenna H  
 A=turn table Angle / Antenna = antenna factor / Cable loss = used cable loss  
 Result = reading + antenna + loss / Margin = Limit - result  
 \* Receiving Antenna Mode: Horizontal, Vertical / \* Test site: 3 m Open area site



## 7.3 Occupied Bandwidth Measurement

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz.

The bandwidth is determined at the points 20 dB down from the modulated carrier.

Carrier Frequency - 400 MHz

$400 \text{ MHz} \times 0.0025 = 1.085 \text{ MHz}$

Graph is as follows;


Next Page

# EMI TEST REPORT



Report reference No: KST-FCC0632

## Occupied Bandwidth

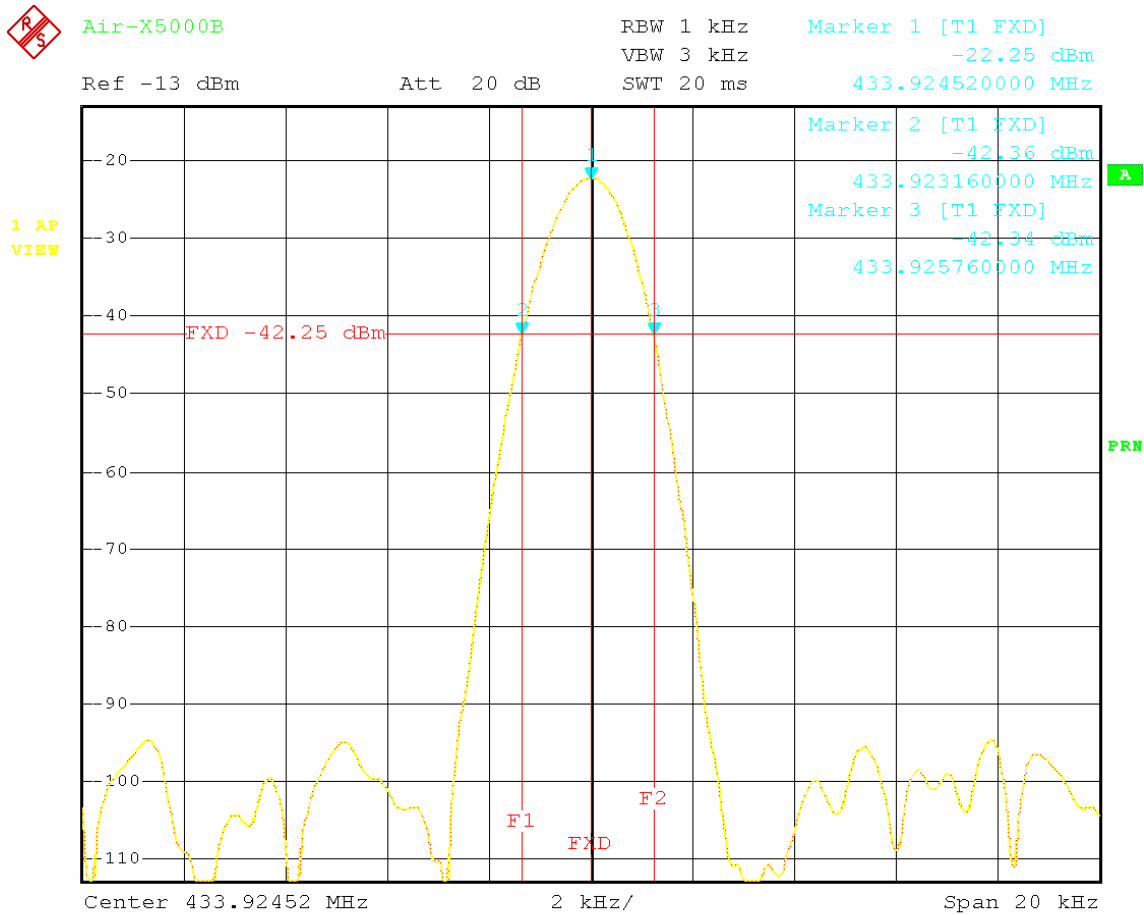

Date: 4.OCT.2006 11:11:42

