

Labelling Requirements for Lomak International

FCC Instructions

(2) Label text and information should be in a size of type large enough to be readily legible, consistent with the dimensions of the equipment and the label. However, the type size for the text is not required to be larger than eight point.


(3) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (b)(1) of this section on it, such as for a CPU board or a plug-in circuit board peripheral device, the text associated with the logo may be placed in a prominent location in the instruction manual or pamphlet supplied to the user. However, the unique identification (trade name and model number) and the logo must be displayed on the device. (4) The label shall not be a stick-on, paper label. The label on these products shall be permanently affixed to the product and shall be readily visible to the purchaser at the time of purchase, as described in § 2.925(d) of this chapter. "Permanently affixed" means that the label is etched, engraved, stamped, silk-screened, indelibly printed, or otherwise permanently marked on a permanently attached part of the equipment or on a nameplate of metal, plastic, or other material fastened to the equipment by welding, riveting, or a permanent adhesive. The label must be designed to last the expected lifetime of the equipment in the environment in which the equipment may be operated and must not be readily detachable.

CE Marking

The letters must be easily accessible, have a minimum height of 5mm and always be in proportion.

C Tick

The mark shall be legible and visible to the unaided eye; no smaller than 3mm in diameter, with supplier identification characters no less than 1mm in height. The label may be reproduced in any colour provided that visibility is assured through either contrast with the background colour or marking in relief (moulding, engraving etc).

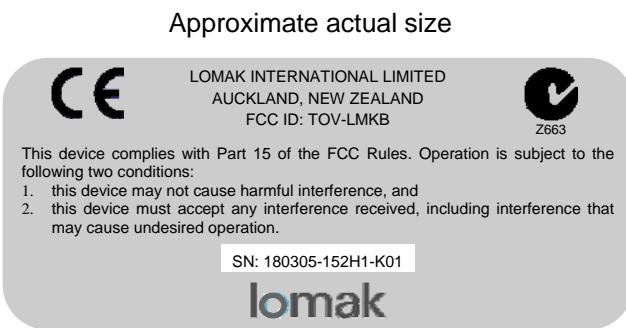

Positioning of label (not to scale)

