

FCC CERTIFICATION
On Behalf of
TECH ART ENTERPRISE LIMITED

Wii Wireless Controller Adaptor
Model No.: TA35036

FCC ID: TPMTA35036

Prepared for : TECH ART ENTERPRISE LIMITED
Address : Unit D, 5F, 8 Building, Xinghua Industrial Park, 6 Rd. of
Shekou Industry, Nanshan District, Shenzhen, China

Prepared by : ACCURATE TECHNOLOGY CO. LTD
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China
Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20080872
Date of Test : May 16,2008
Date of Report : May 20,2007

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
1.2. Description of Test Facility	4
1.3. Measurement Uncertainty	5
2. MEASURING DEVICE AND TEST EQUIPMENT	6
3. SUMMARY OF TEST RESULTS.....	7
4. FUNDAMENTAL AND HARMONICS RADIATED EMISSION MEASURMENT	8
4.1. Block Diagram of Test Setup.....	8
4.2. The Emission Limit	8
4.3. Configuration of EUT on Measurement	9
4.4. Operating Condition of EUT	9
4.5. Test Procedure	9
4.6. The Field Strength of Radiation Emission Measurement Results	10
5. RADIATED EMISSION FOR FCC PART 15 SECTION 15.249(D).....	13
5.1. Block Diagram of Test Setup.....	13
5.2. The Emission Limit For Section 15.249(d)	13
5.3. EUT Configuration on Measurement	15
5.4. Operating Condition of EUT	15
5.5. Test Procedure	15
5.6. The Emission Measurement Result	16
6. BAND EDGES	19
6.1. The Requirement	19
6.2. EUT Configuration on Measurement	19
6.3. Operating Condition of EUT	19
6.4. Test Procedure	19
6.5. The Measurement Result	20
7. ANTENNA REQUIREMENT.....	21
7.1. The Requirement	21
7.2. Antenna Construction	21
APPENDIX I (TEST CURVES) (26pages)	

Test Report Certification

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.249; 2007 & ANSI C63.4: 2003

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section15.249 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : May 16,2008

Prepared by :

sky lang

(Engineer)

Approved & Authorized Signer :

Seam - 2

(Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : Wii Wireless Controller Adaptor
 Model Number : TA35036
 Power Supply : DC 3.3V (Power by Wii Wireless Controller)
 Operate Frequency : 2402M-2476MHz
 Channel Number : 75
 Wii Wireless Controller : Model Number: RVL-003
 Manufacturer: Nintendo
 FCC ID: UMB-WCF7
 Applicant : TECH ART ENTERPRISE LIMITED
 Address : Unit D, 5F, 8 Building, Xinghua Industrial Park, 6 Rd. of Shekou Industry, Nanshan District, Shenzhen, China
 Manufacturer : TECH ART ENTERPRISE LIMITED
 Address : Unit D, 5F, 8 Building, Xinghua Industrial Park, 6 Rd. of Shekou Industry, Nanshan District, Shenzhen, China
 Date of sample received : May 12,2008
 Date of Test : May 16,2008

1.2. Description of Test Facility

EMC Lab : Listed by FCC
 The Registration Number is 274801
 Listed by Industry Canada
 The Registration Number is IC4174
 Accredited by China National Accreditation Committee
 for Laboratories
 The Certificate Registration Number is L0579
 Name of Firm : Shenzhen Academy of Metrology& Quality Inspection
 Site Location : Bldg. Metrology& Quality Inspection, Longzhu Road,
 Nanshan, Shenzhen, Guangdong, P.R. China

1.3. Measurement Uncertainty

Conducted emission expanded uncertainty = 3.5dB, k=2

Radiated emission expanded uncertainty = 4.5dB, k=2

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	03.29.2009
EMI Test Receiver	Rohde&Schwarz	ESI26	838786/013	01.23.2009
Bilog Antenna	Schwarzbeck	VULB9163	9163-194	03.31.2009
Bilog Antenna	Chase	CBL6112B	2591	01.23.2009
Horn Antenna	Rohde&Schwarz	HF906	100013	01.23.2009
Spectrum Analyzer	Anritsu	MS2651B	6200238856	03.29.2009
Pre-Amplifier	Agilent	8447D	2944A10619	03.29.2009
L.I.S.N.	Rohde&Schwarz	ESH3-Z5	100305	03.29.2009
L.I.S.N.	Rohde&Schwarz	ESH3-Z5	100310	03.29.2009


3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
Section 15.207	Conducted Emission	N/A
Section 15.249(d)	Radiated Emission	Compliant
Section 15.249(a)	The fundamental field strength and the harmonics	Compliant
Section 15.249(d)	Band Edge	Compliant

4. FUNDAMENTAL AND HARMONICS RADIATED EMISSION MEASUREMENT


4.1. Block Diagram of Test Setup

4.1.1. Block diagram of connection between the EUT and simulators



(EUT: Wii Wireless Controller Adaptor)

4.1.2. Anechoic Chamber Test Setup Diagram

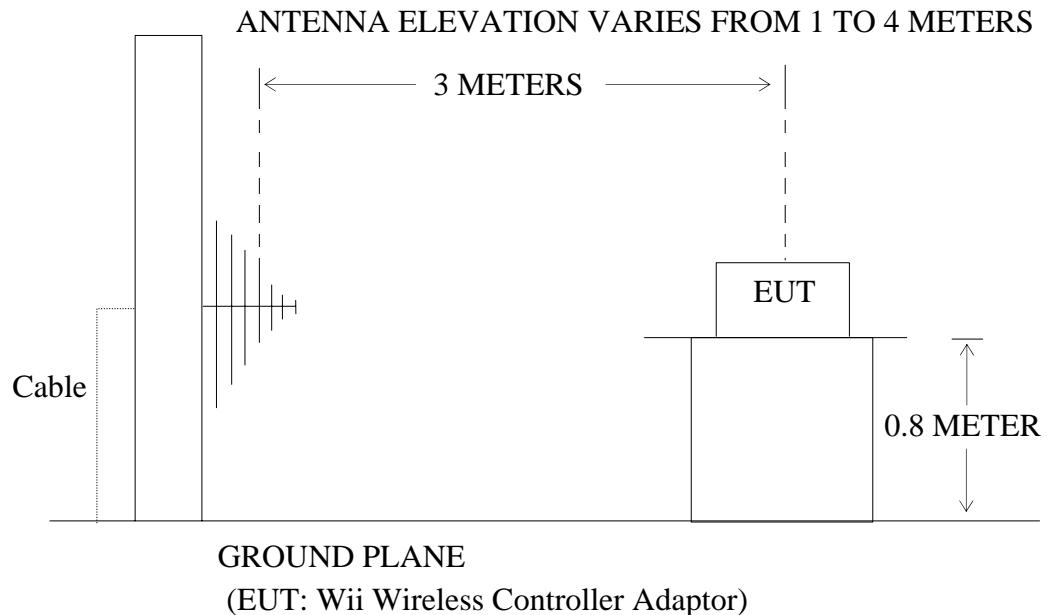

4.2. The Emission Limit

4.2.1 For intentional radiators, According to section 15.249(a), Operation within the frequency band of 2.4 to 2.4835GHz, The fundamental field strength shall not exceed 94 dB μ V/m and the harmonics shall not exceed 54 dB μ V/m.

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of harmonics (microvolts/meter)
902-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

4.2.2 According to section 15.249(e), as shown in section 15.35(b), The peak field

strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

4.3. Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.3.1. Wii Wireless Controller Adaptor (EUT)

Model Number	:	TA35036
Serial Number	:	N/A
Manufacturer	:	TECH ART ENTERPRISE LIMITED

4.4. Operating Condition of EUT

4.4.1. Setup the EUT and simulator as shown as Section 4.1.

4.4.2. Connect the EUT to the bottom of Wii wireless Controller, Turn on the power of Wii wireless Controller.

4.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402MHz -2476MHz. We are select 2402MHz, 2440MHz, 2476MHz TX frequency to transmitted.

4.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement.

The bandwidth of test receiver (R&S ESI26) is set at 1MHz.

4.6. The Field Strength of Radiation Emission Measurement Results PASS.

Date of Test: <u>May 16,2008</u>	Temperature: <u>24°C</u>
EUT: <u>Wii Wireless Controller Adaptor</u>	Humidity: <u>47%</u>
Model No.: <u>TA35036</u>	Power Supply: <u>DC 3.3V (Power by Wii Wireless Controller)</u>
Test Mode: <u>TX 2402MHz</u>	Test Engineer: <u>Feng</u>

Fundamental Radiated Emissions

Frequency (MHz)	Reading(dB μ V/m)		Factor(dB) Corr.	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB μ V/m)		Polarizati on
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2402.000	63.1	86.8	-3.6	59.5	83.2	94	114	34.5	30.8	Vertical
2402.000	66.9	90.8	-3.6	63.3	87.2	94	114	30.7	26.8	Horizontal

Harmonics Radiated Emissions

Frequency (MHz)	Reading(dB μ V/m)		Factor(dB) Corr.	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB μ V/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

The spectral diagrams in appendix I display the measurement of peak values.

Note:

1. Remark “-” means that the emission level is too low to be measured.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

Date of Test:	May 16,2008	Temperature:	24°C
EUT:	Wii Wireless Controller Adaptor	Humidity:	47%
Model No.:	TA35036	Power Supply:	DC 3.3V (Power by Wii Wireless Controller)
Test Mode:	TX 2440MHz	Test Engineer:	Feng

Fundamental Radiated Emissions

Frequency (MHz)	Reading(dB μ V/m)		Factor(dB) Corr.	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB μ V/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2440.000	64.0	87.9	-3.5	60.5	84.4	94	114	33.5	29.6	Vertical
2440.000	63.6	87.5	-3.5	60.1	84.0	94	114	33.9	30.0	Horizontal

Harmonics Radiated Emissions

Frequency (MHz)	Reading(dB μ V/m)		Factor(dB) Corr.	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB μ V/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

The spectral diagrams in appendix I display the measurement of peak values.

Note:

1. Remark “-“ means that the emission level is too low to be measured.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

Date of Test:	May 16,2008	Temperature:	24°C
EUT:	Wii Wireless Controller Adaptor	Humidity:	47%
Model No.:	TA35036	Power Supply:	DC 3.3V (Power by Wii Wireless Controller)
Test Mode:	TX 2476MHz	Test Engineer:	Feng

Fundamental Radiated Emissions

Frequency (MHz)	Reading(dB μ V/m)		Factor(dB) Corr.	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB μ V/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2476.000	64.7	88.5	-3.4	61.3	85.1	94	114	32.7	28.9	Vertical
2476.000	62.9	86.5	-3.4	59.5	83.1	94	114	34.5	30.9	Horizontal

Harmonics Radiated Emissions

Frequency (MHz)	Reading(dB μ V/m)		Factor(dB) Corr.	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB μ V/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

The spectral diagrams in appendix I display the measurement of peak values.

Note:

1. Remark “-“ means that the emission level is too low to be measured.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:


Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

5. RADIATED EMISSION FOR FCC PART 15 SECTION 15.249(D)


5.1. Block Diagram of Test Setup

5.1.1. Block diagram of connection between the EUT and simulators



(EUT: Wii Wireless Controller Adaptor)

5.1.2. Anechoic Chamber Test Setup Diagram

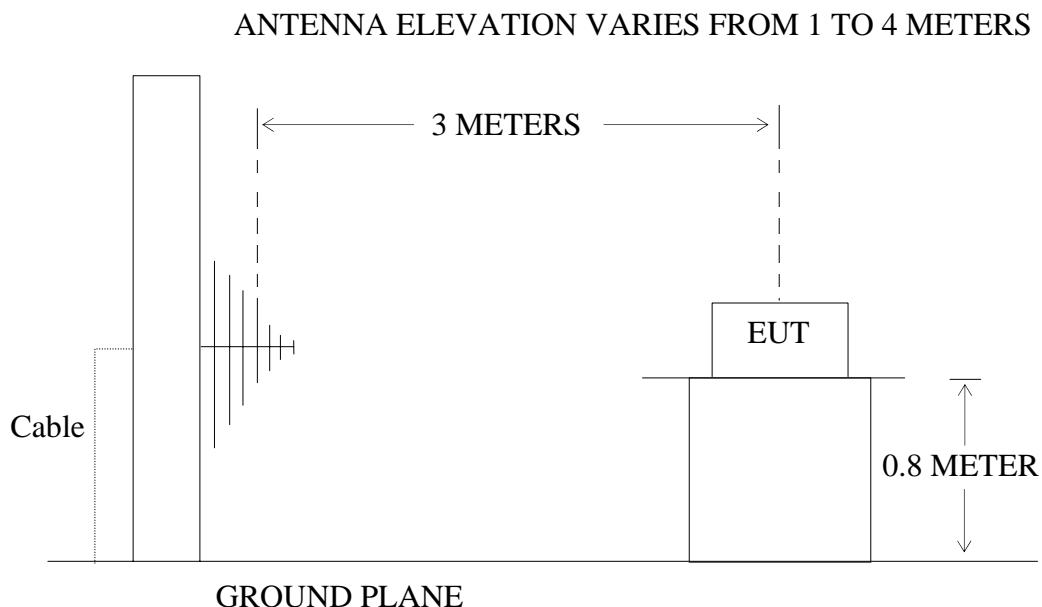

(EUT: Wii Wireless Controller Adaptor)

5.2. The Emission Limit For Section 15.249(d)

5.2.1 Emission radiated outside of the specified frequency bands, except for harmonics, shall be comply with the general radiated emission limits in Section 15.209.

Radiation Emission Measurement Limits According to Section 15.209

Frequency (MHz)	Limit,		
	Field Strength of Quasi-peak Value (microvolts/m)	Field Strength of Quasi-peak Value (dB μ V/m)	The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector.
30 - 88	100	40	

88 - 216	150	43.5	Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.
216 - 960	200	46	
Above 960	500	54	

5.3. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.3.1. Wii Wireless Controller Adaptor (EUT)

Model Number	:	TA35036
Serial Number	:	N/A
Manufacturer	:	TECH ART ENTERPRISE LIMITED

5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Connect the EUT to the bottom of Wii wireless Controller, Turn on the power of Wii wireless Controller.

5.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402MHz -2476MHz. We are select 2402MHz, 2440MHz, 2476MHz TX frequency to transmitted.

5.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement.

The bandwidth of test receiver (R&S ESI26) is set at 120KHz in 30-1000MHz. and set at 1MHz in above 1000MHz.

The frequency range from 30MHz to 25000MHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

5.6. The Emission Measurement Result

PASS.

Date of Test:	<u>May 16,2008</u>	Temperature:	<u>24°C</u>
EUT:	<u>Wii Wireless Controller Adaptor</u>	Humidity:	<u>47%</u>
Model No.:	<u>TA35036</u>	Power Supply:	<u>DC 3.3V (Power by Wii Wireless Controller)</u>
Test Mode:	<u>TX 2402MHz</u>	Test Engineer:	<u>Feng</u>

Frequency (MHz)	Reading (dB μ V/m)	Factor(dB) Corr.	Result	Limit	Margin	Polarization
			QP	QP	QP	
-	-	-	-	-	-	Vertical
-	-	-	-	-	-	Horizontal

The spectral diagrams in appendix I display the measurement of peak values.

Note:

1. Remark “-“ means that the emission level is too low to be measured.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

Date of Test:	May 16,2008	Temperature:	24°C
EUT:	Wii Wireless Controller Adaptor	Humidity:	47%
Model No.:	TA35036	Power Supply:	DC 3.3V (Power by Wii
Test Mode:	TX 2440MHz	Test Engineer:	Wireless Controller) Feng

Frequency (MHz)	Reading (dB μ V/m)	Factor(dB) Corr.	Result	Limit	Margin	Polarization
			QP	QP	QP	
-	-	-	-	-	-	Vertical
-	-	-	-	-	-	Horizontal

The spectral diagrams in appendix I display the measurement of peak values.

Note:

1. Remark “-“ means that the emission level is too low to be measured.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

Date of Test:	May 16,2008	Temperature:	24°C
EUT:	Wii Wireless Controller Adaptor	Humidity:	47%
Model No.:	TA35036	Power Supply:	DC 3.3V (Power by Wii
Test Mode:	TX 2476MHz	Test Engineer:	Wireless Controller) Feng

Frequency (MHz)	Reading (dB μ V/m)	Factor(dB) Corr.	Result	Limit	Margin	Polarization
			QP	QP	QP	
-	-	-	-	-	-	Vertical
-	-	-	-	-	-	Horizontal

The spectral diagrams in appendix I display the measurement of peak values.

Note:

1. Remark “-“ means that the emission level is too low to be measured.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

6. BAND EDGES

6.1. The Requirement

6.1.1. Band Edge from 2400MHz to 2483.5MHz. Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

6.2. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.2.1. Wii Wireless Controller Adaptor (EUT)

Model Number : TA35036
 Serial Number : N/A
 Manufacturer : TECH ART ENTERPRISE LIMITED

6.3. Operating Condition of EUT

6.3.1. Setup the EUT and simulator as shown as Section 4.1.

6.3.2. Connect the EUT to the bottom of Wii wireless Controller, Turn on the power of Wii wireless Controller.

6.3.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402MHz -2476MHz. We are select 2402MHz, 2476MHz TX frequency to transmitted.

6.4. Test Procedure

6.4.1. Measure the fundamental amplitude appearing on spectral display and set it as a reference level. measure the lower band edge amplitude. Get the delta amplitude and edge frequency.

6.4.2. Repeat above procedures , Measure the fundamental amplitude appearing on spectral display and set it as a reference level. measure the upper band edge amplitude. Get the delta amplitude and edge frequency.

6.5. The Measurement Result

Pass

6.5.1 Lower band edge: Emission radiated outside of the lower band edge are 36.1 dB below the level of the fundamental.

Frequency (MHz)	The emission of carrier power strength (dB μ V/m)	The maximum field strength at the band edge (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2402	87.2	51.1	74	22.9	Peak
2402	63.3	27.2	54	26.8	Average

6.5.2 Upper band edge: Emission radiated outside of the upper band edge are 46.3 dB below the level of the fundamental.

Frequency (MHz)	The emission of carrier power strength (dB μ V/m)	The maximum field strength at the band edge (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2476	85.1	38.8	74	35.2	Peak
2476	61.3	15.0	54	39.0	Average


7. ANTENNA REQUIREMENT

7.1. The Requirement

7.1.1. According to Section 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.2. Antenna Construction

The antenna is PCB Layout antenna, no consideration of replacement.

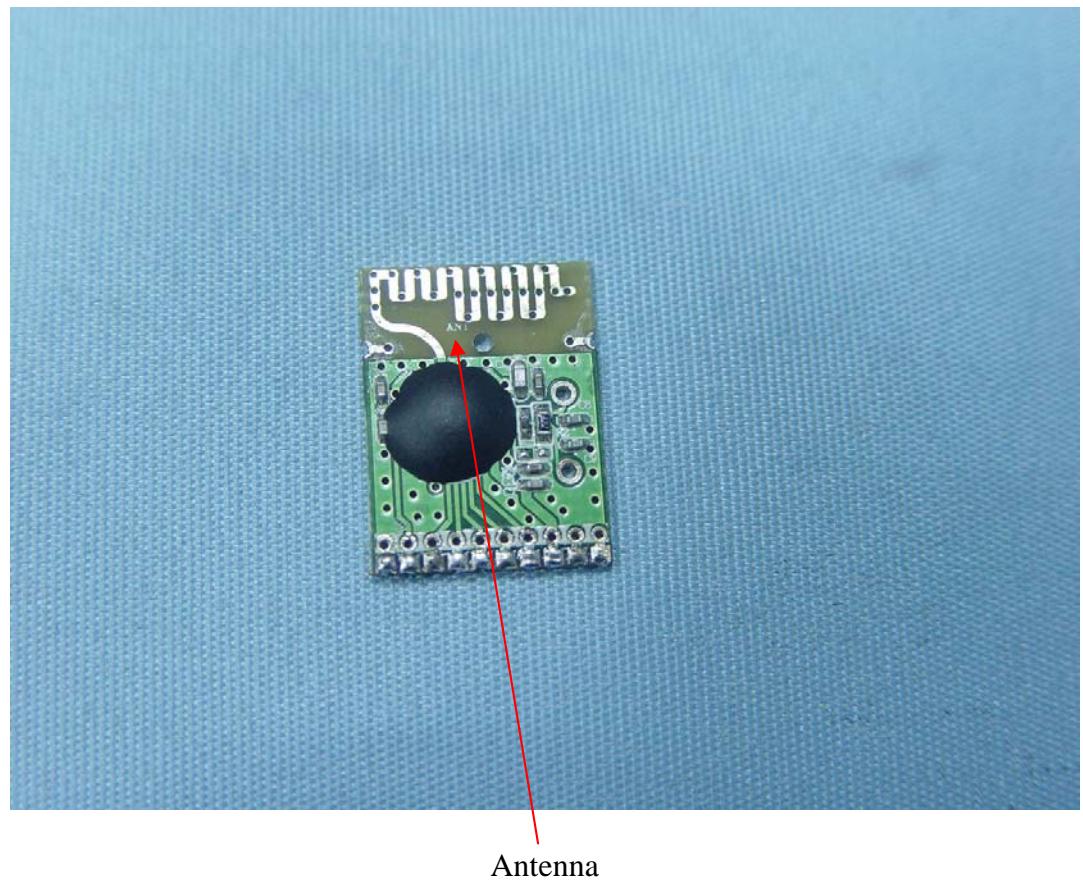


APPENDIX I (Test Curves)

Radiated Disturbance**FCC Part 15**

EUT: Wii Wireless Controller Adaptor
 Manufacturer: TECH ART ENTERPRISE LIMITED
 Operating Condition: TX 2402MHz
 Test Site: ATC EMC Lab.SAC
 Test Specification: Horizontal
 Comment: DC 3.3V


M/N: TA35036

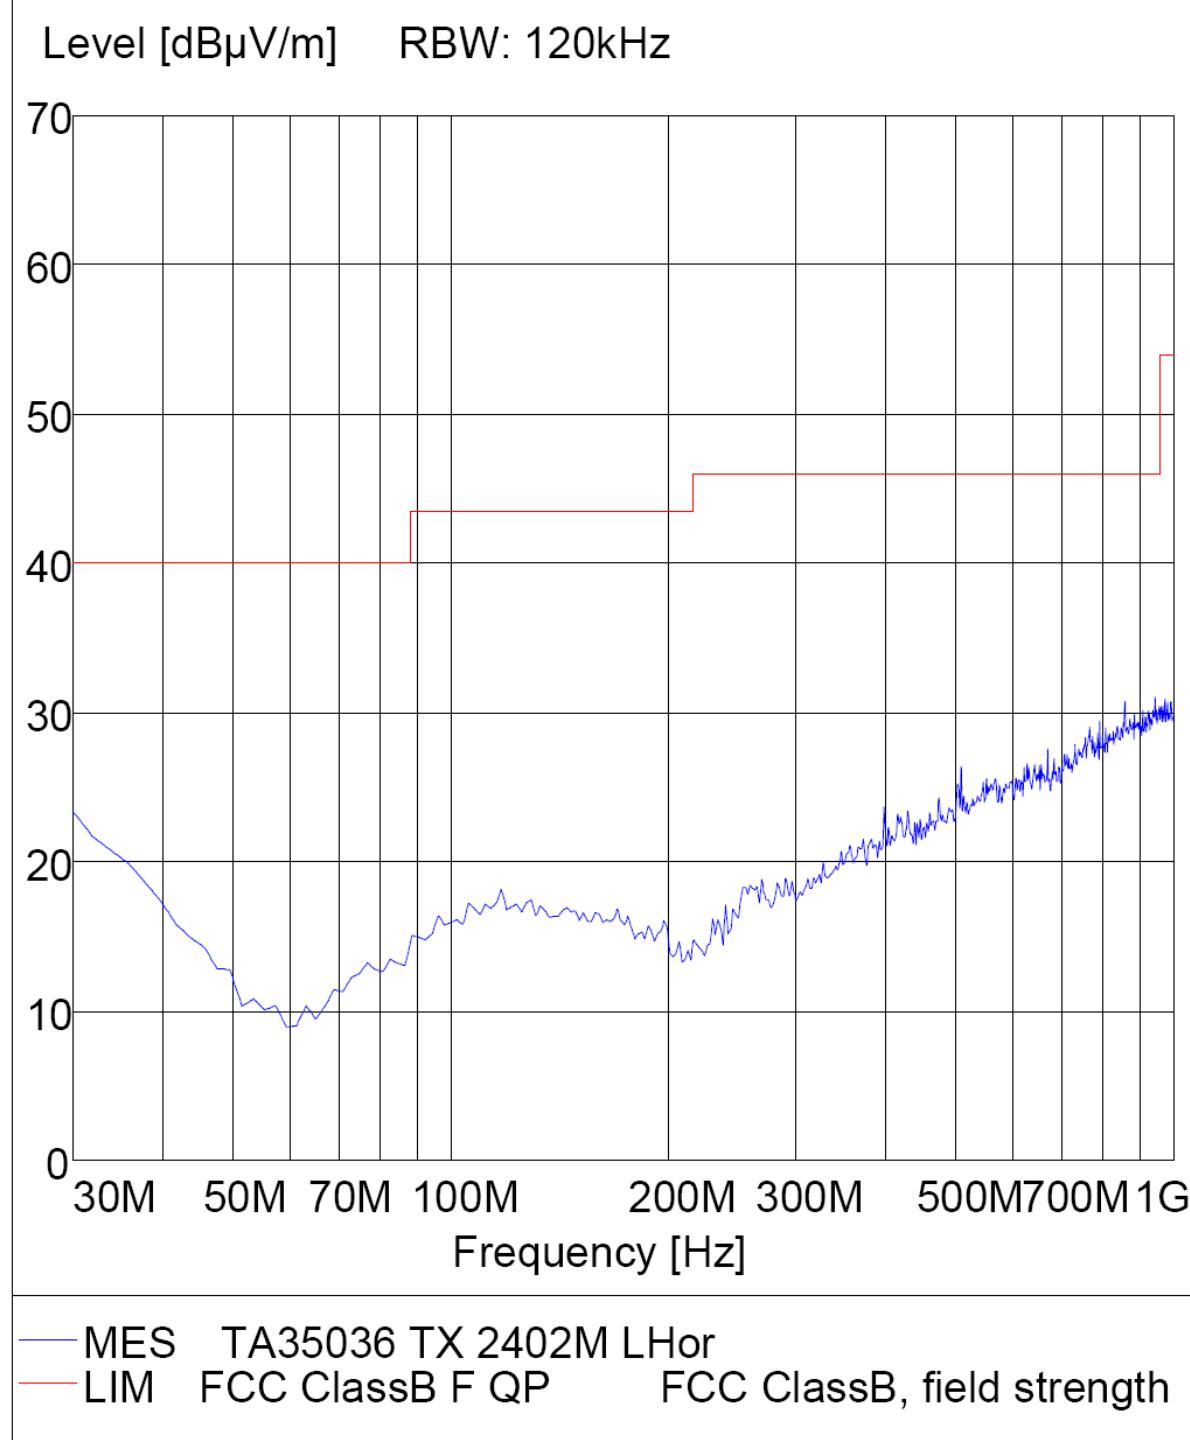

Radiated Disturbance**FCC Part 15**

EUT: Wii Wireless Controller Adaptor
 Manufacturer: TECH ART ENTERPRISE LIMITED
 Operating Condition: TX 2402MHz
 Test Site: ATC EMC Lab.SAC
 Test Specification: Vertical
 Comment: DC 3.3V


M/N: TA35036

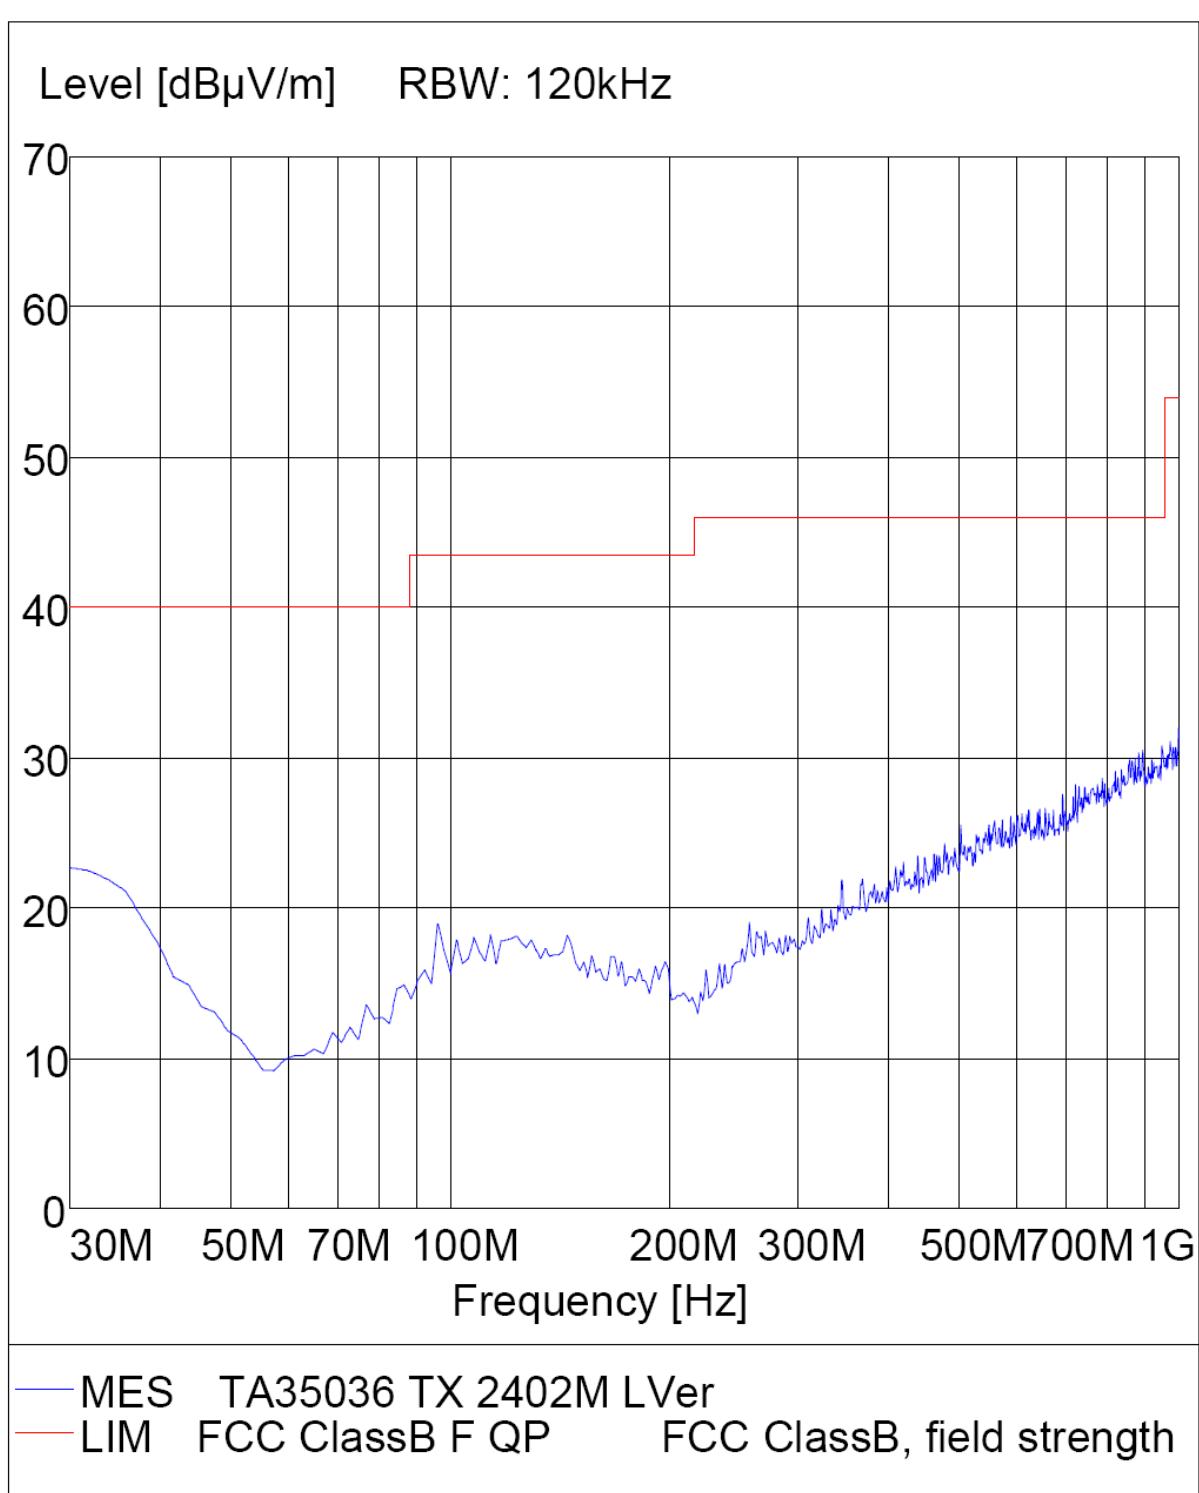

Radiated Disturbance**FCC Part 15**

EUT: Wii Wireless Controller Adaptor
 Manufacturer: TECH ART ENTERPRISE LIMITED
 Operating Condition: TX 2402MHz
 Test Site: ATC EMC Lab.SAC
 Test Specification: Horizontal
 Comment : DC 3.3V


M/N: TA35036

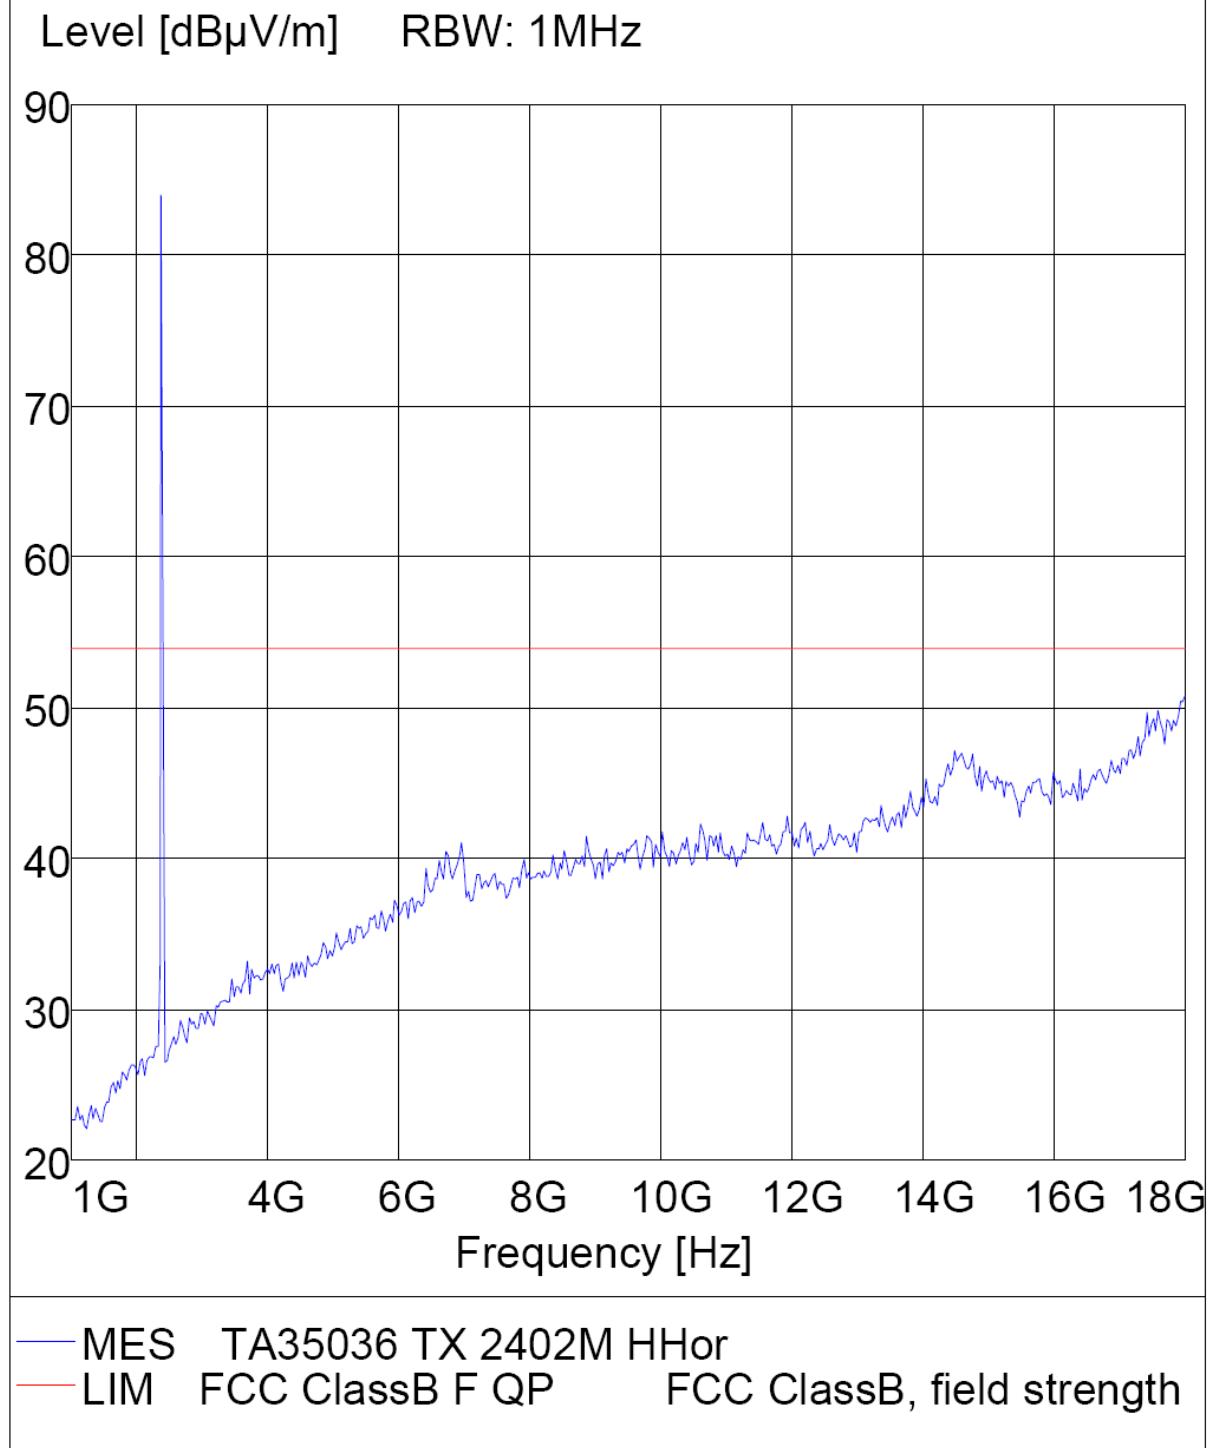

Radiated Disturbance**FCC Part 15**

EUT: Wii Wireless Controller Adaptor
 Manufacturer: TECH ART ENTERPRISE LIMITED
 Operating Condition: TX 2402MHz
 Test Site: ATC EMC Lab.SAC
 Test Specification: Vertical
 Comment : DC 3.3V

M/N: TA35036

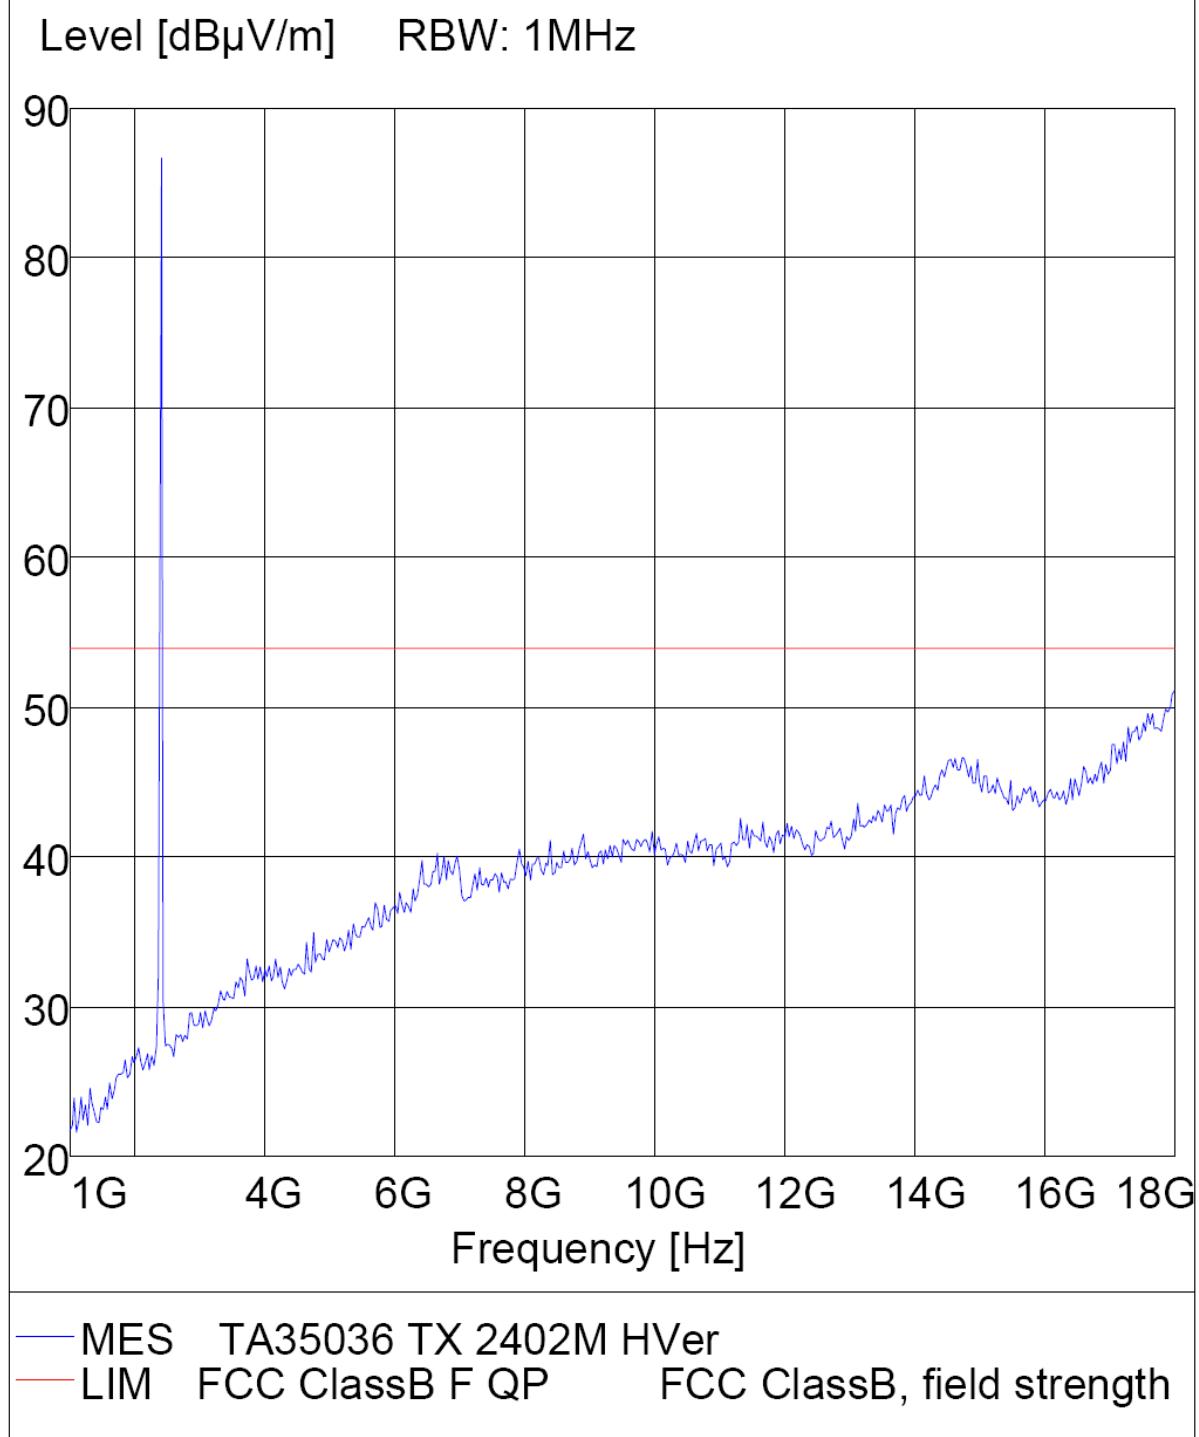


Radiated Disturbance**FCC Part 15**

EUT: Wii Wireless Controller Adaptor
Manufacturer: TECH ART ENTERPRISE LIMITED
Operating Condition: TX 2402MHz
Test Site: ATC EMC Lab.SAC
Test Specification: Horizontal
Comment: DC 3.3V

M/N: TA35036


Level [dB μ V/m] RBW: 1MHz

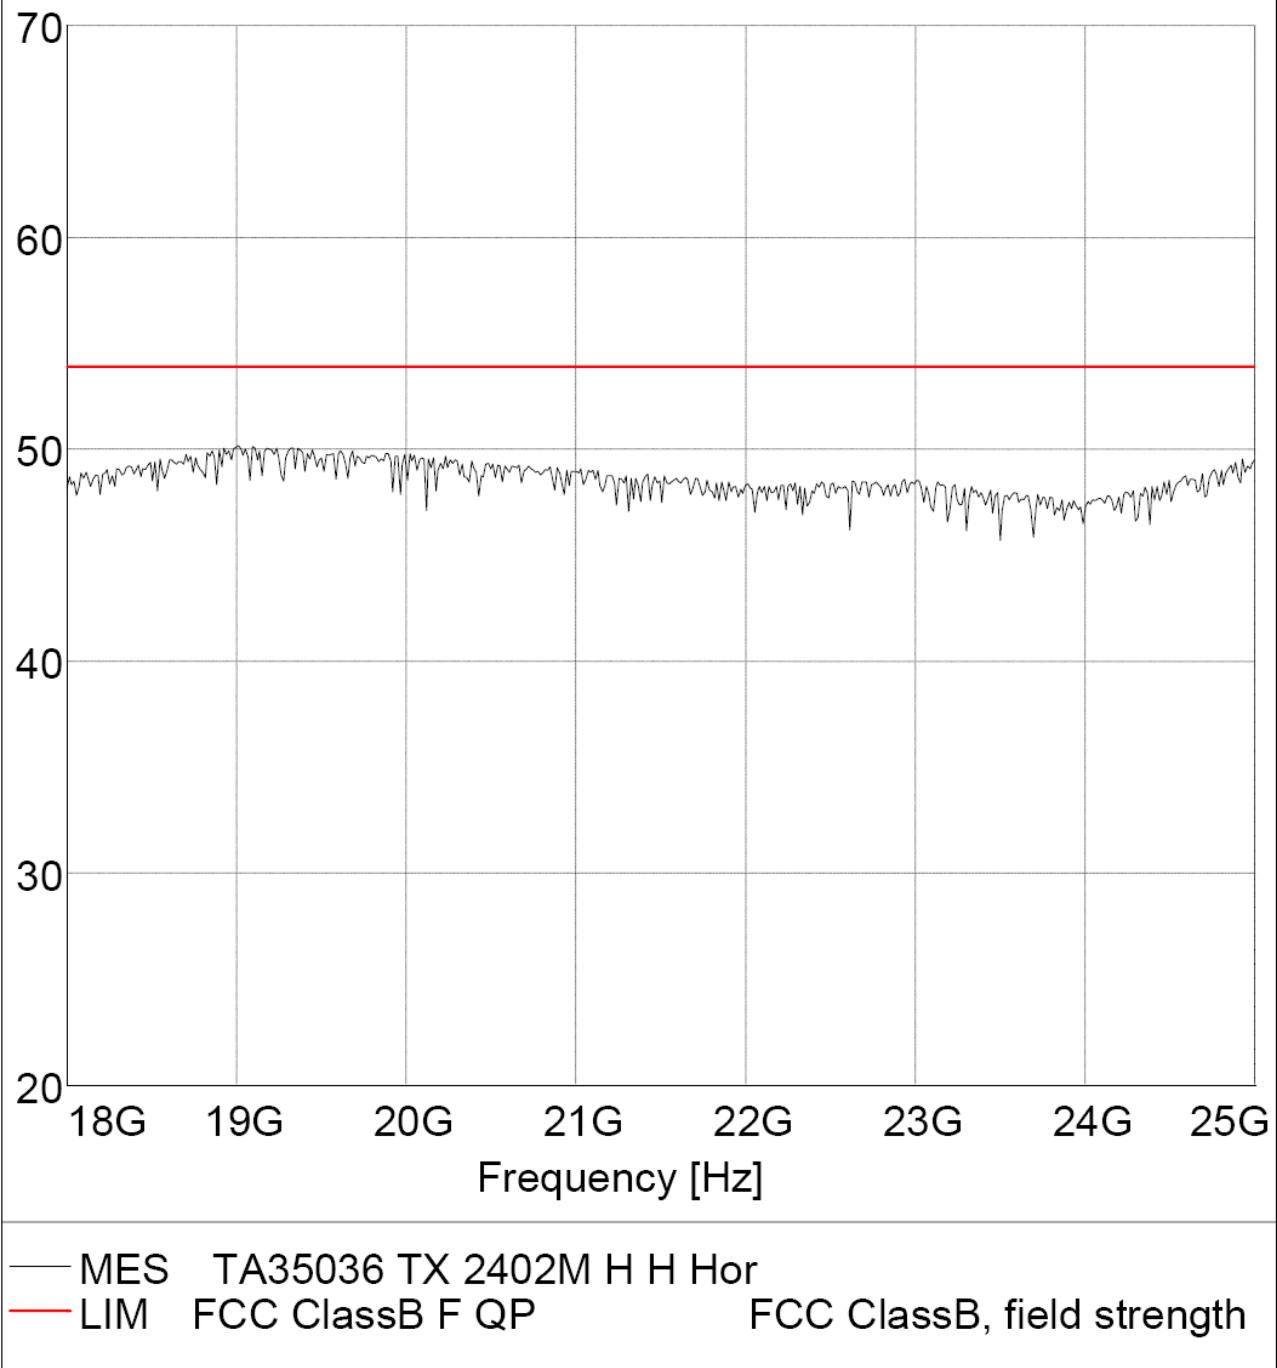

Radiated Disturbance**FCC Part 15**

EUT: Wii Wireless Controller Adaptor
Manufacturer: TECH ART ENTERPRISE LIMITED
Operating Condition: TX 2402MHz
Test Site: ATC EMC Lab.SAC
Test Specification: Vertical
Comment: DC 3.3V


M/N: TA35036

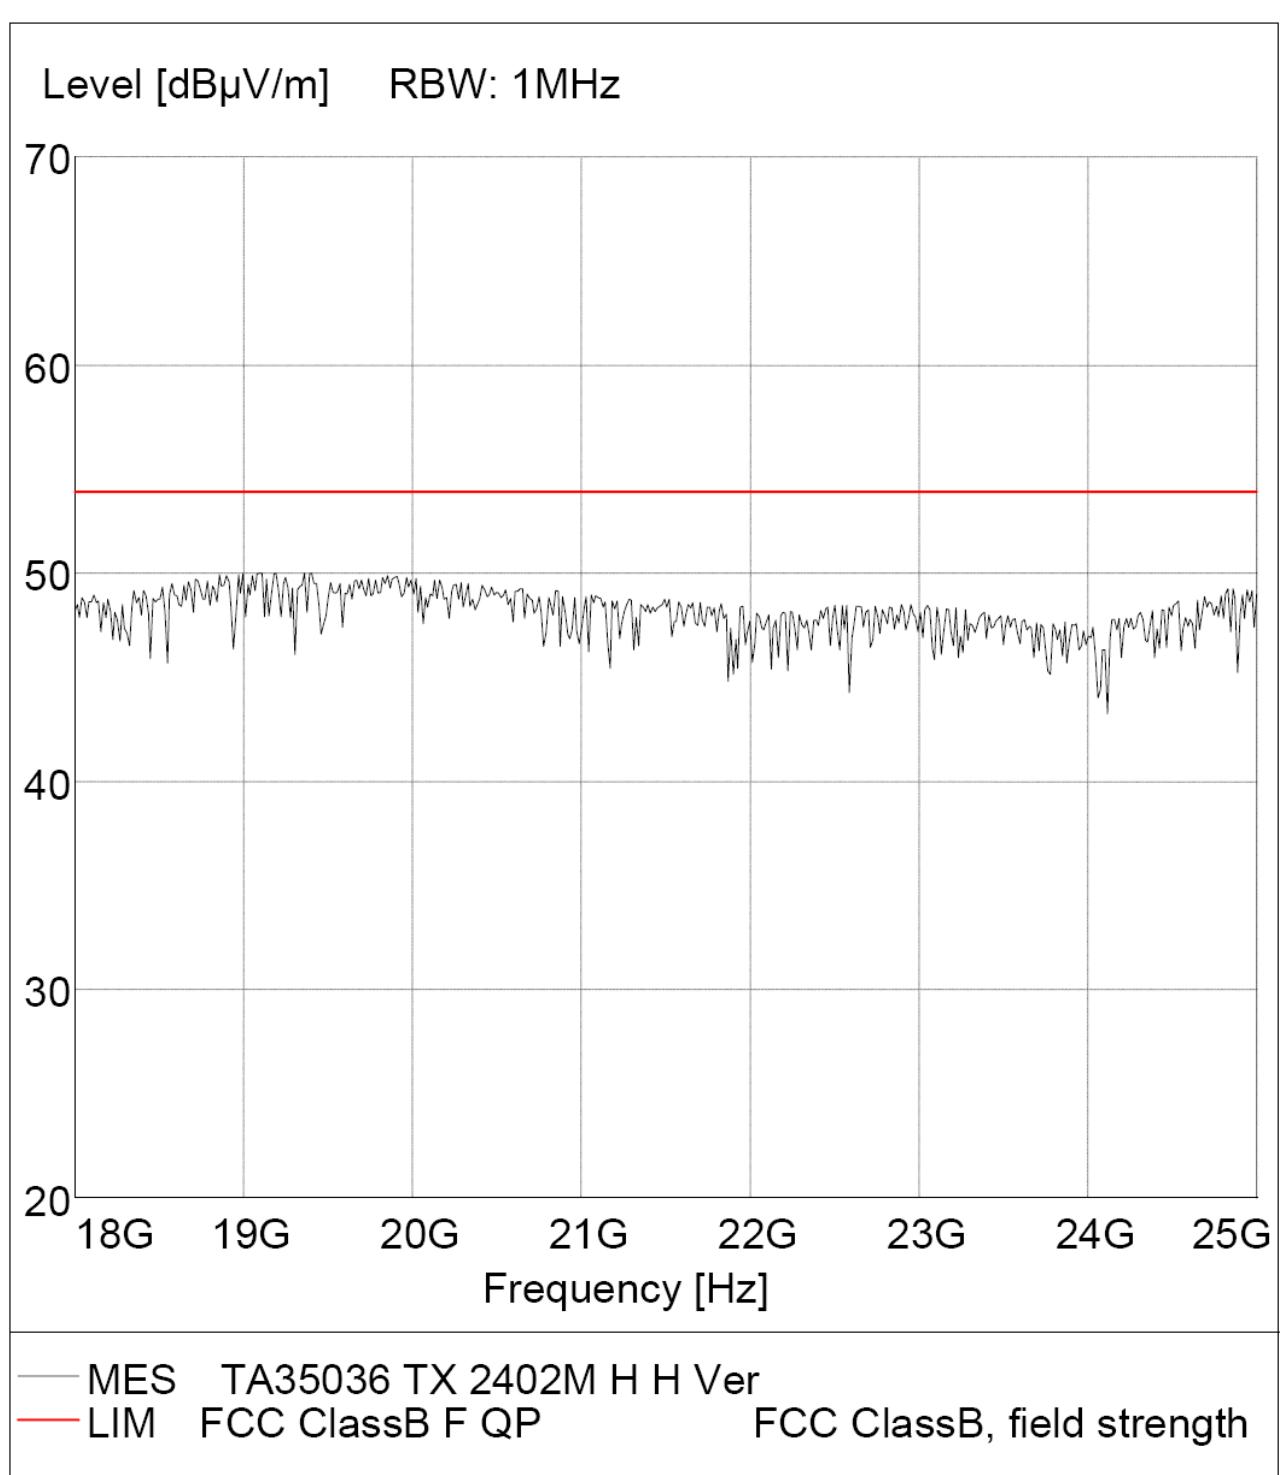

Radiated Disturbance**FCC Part 15**

EUT: Wii Wireless Controller Adaptor
 Manufacturer: TECH ART ENTERPRISE LIMITED
 Operating Condition: TX 2440MHz
 Test Site: ATC EMC Lab.SAC
 Test Specification: Horizontal
 Comment: DC 3.3V


M/N: TA35036

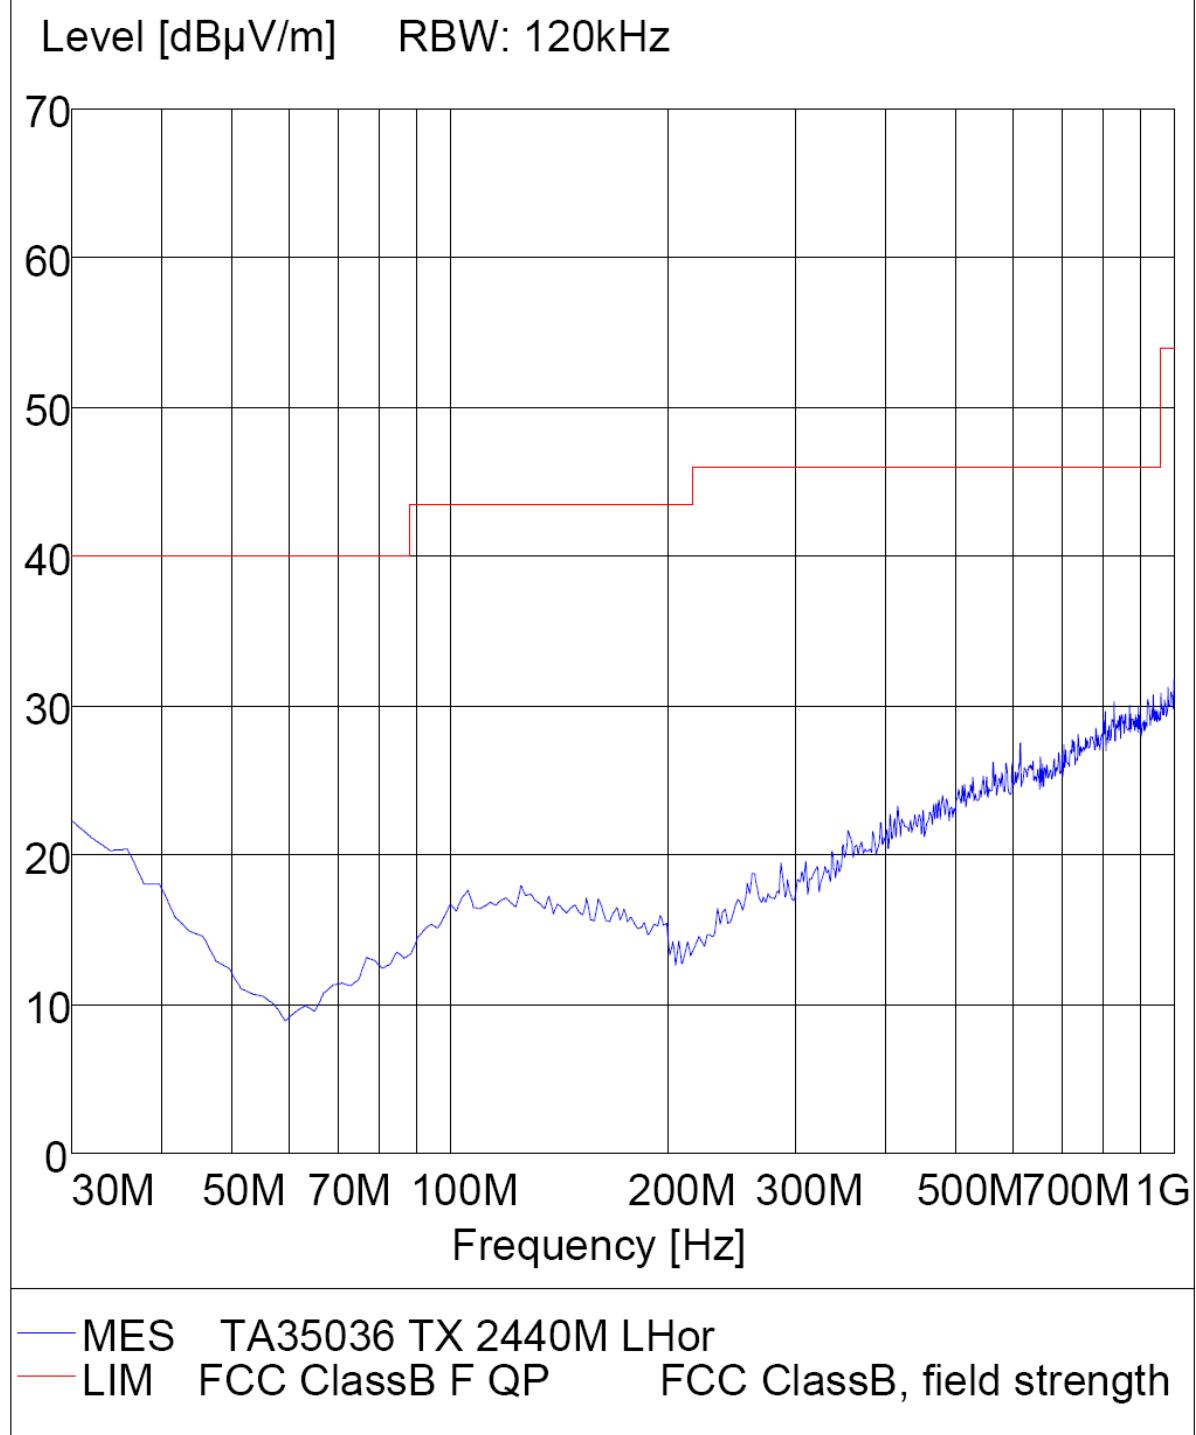

Radiated Disturbance**FCC Part 15**

EUT: Wii Wireless Controller Adaptor
 Manufacturer: TECH ART ENTERPRISE LIMITED
 Operating Condition: TX 2440MHz
 Test Site: ATC EMC Lab.SAC
 Test Specification: Vertical
 Comment: DC 3.3V


M/N: TA35036

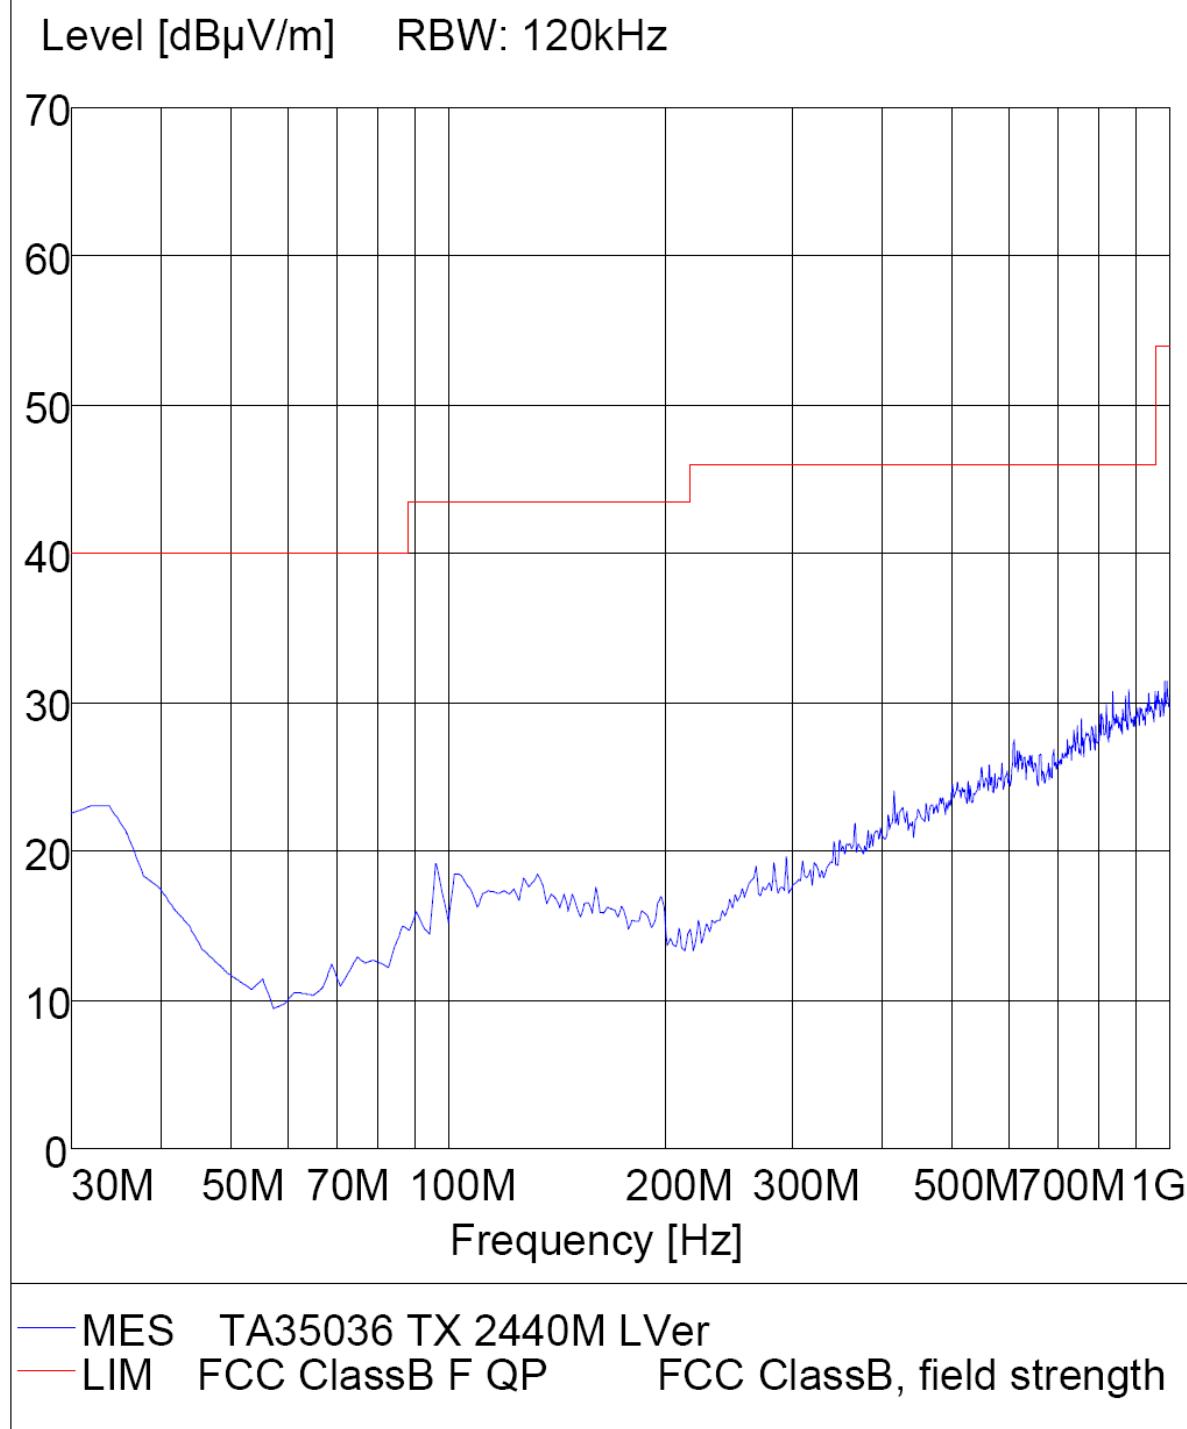

Radiated Disturbance**FCC Part 15**

EUT: Wii Wireless Controller Adaptor
 Manufacturer: TECH ART ENTERPRISE LIMITED
 Operating Condition: TX 2440MHz
 Test Site: ATC EMC Lab.SAC
 Test Specification: Horizontal
 Comment : DC 3.3V


M/N: TA35036

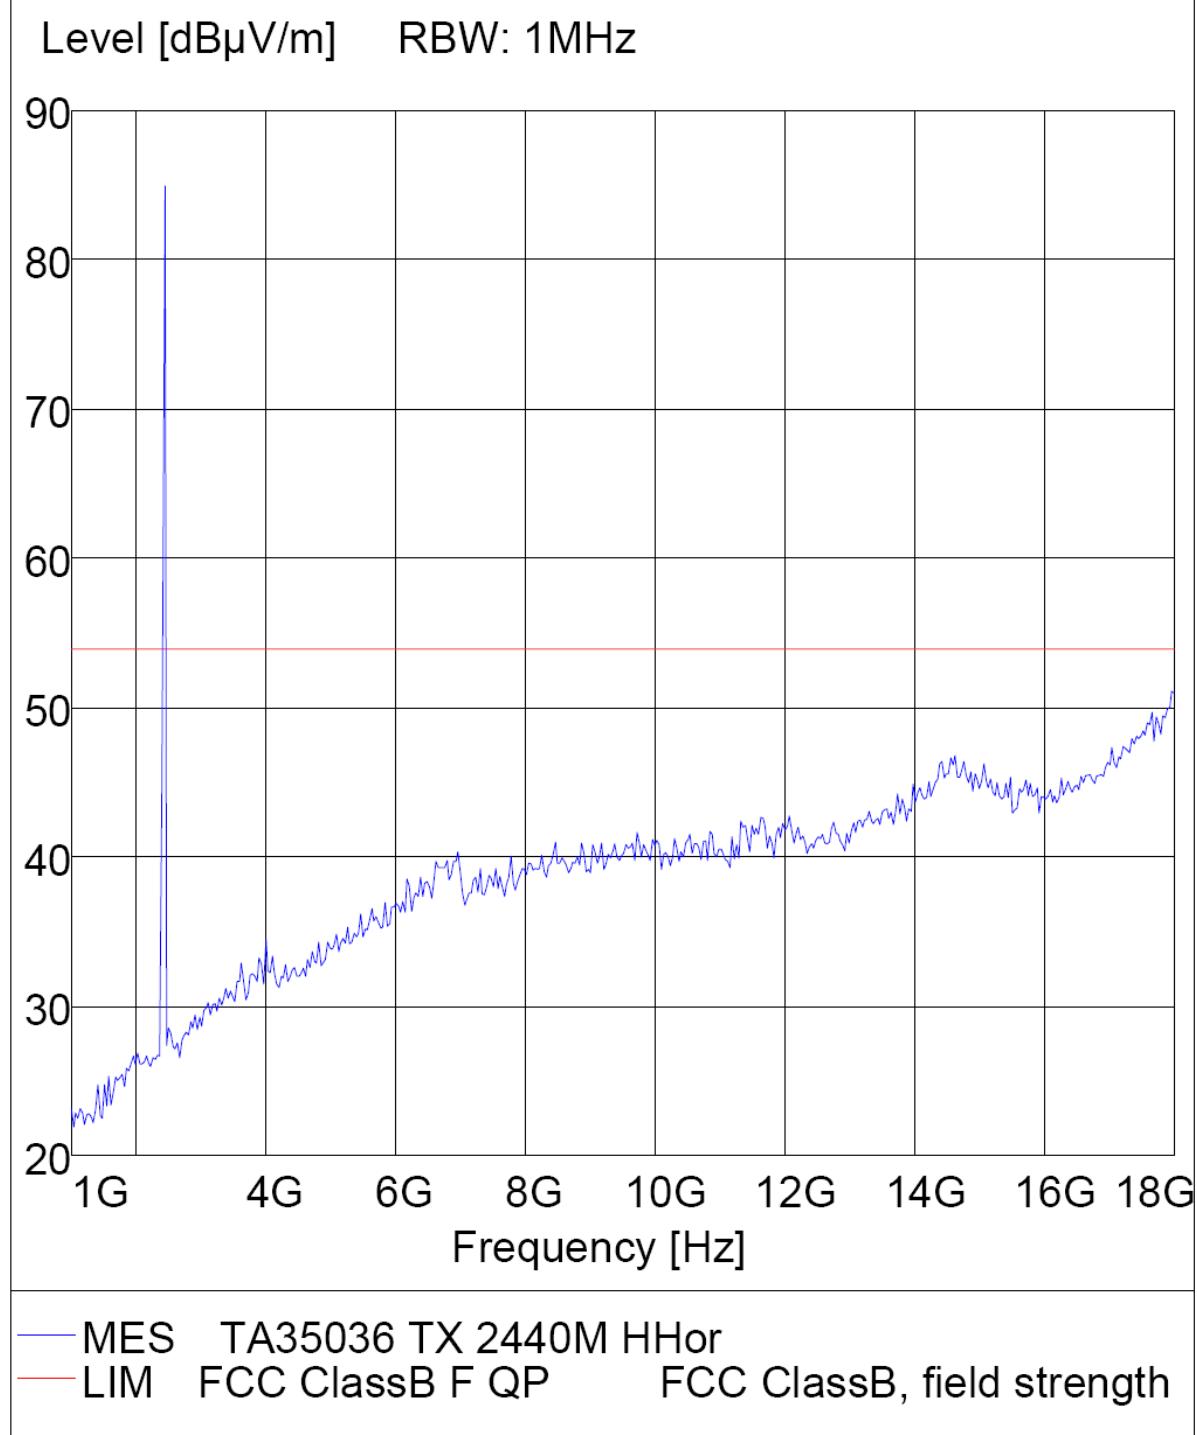

Radiated Disturbance**FCC Part 15**

EUT: Wii Wireless Controller Adaptor
 Manufacturer: TECH ART ENTERPRISE LIMITED
 Operating Condition: TX 2440MHz
 Test Site: ATC EMC Lab.SAC
 Test Specification: Vertical
 Comment : DC 3.3V


M/N: TA35036

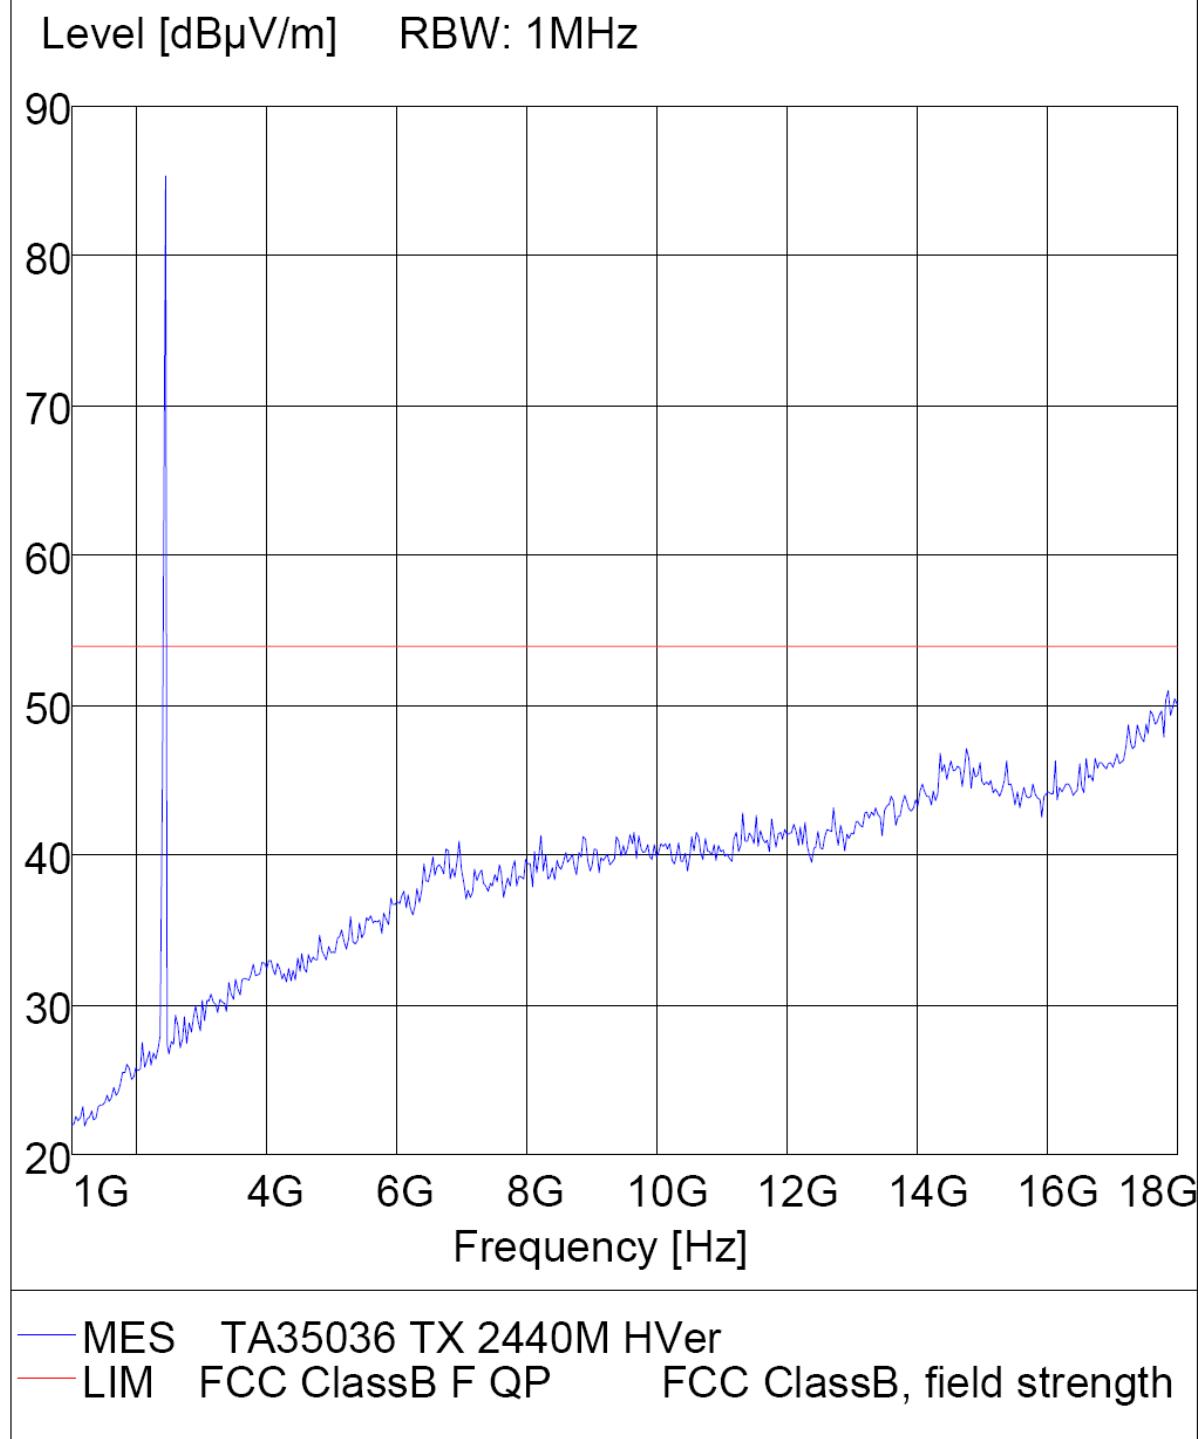

Radiated Disturbance**FCC Part 15**

EUT: Wii Wireless Controller Adaptor
Manufacturer: TECH ART ENTERPRISE LIMITED
Operating Condition: TX 2440MHz
Test Site: ATC EMC Lab.SAC
Test Specification: Horizontal
Comment: DC 3.3V


M/N: TA35036

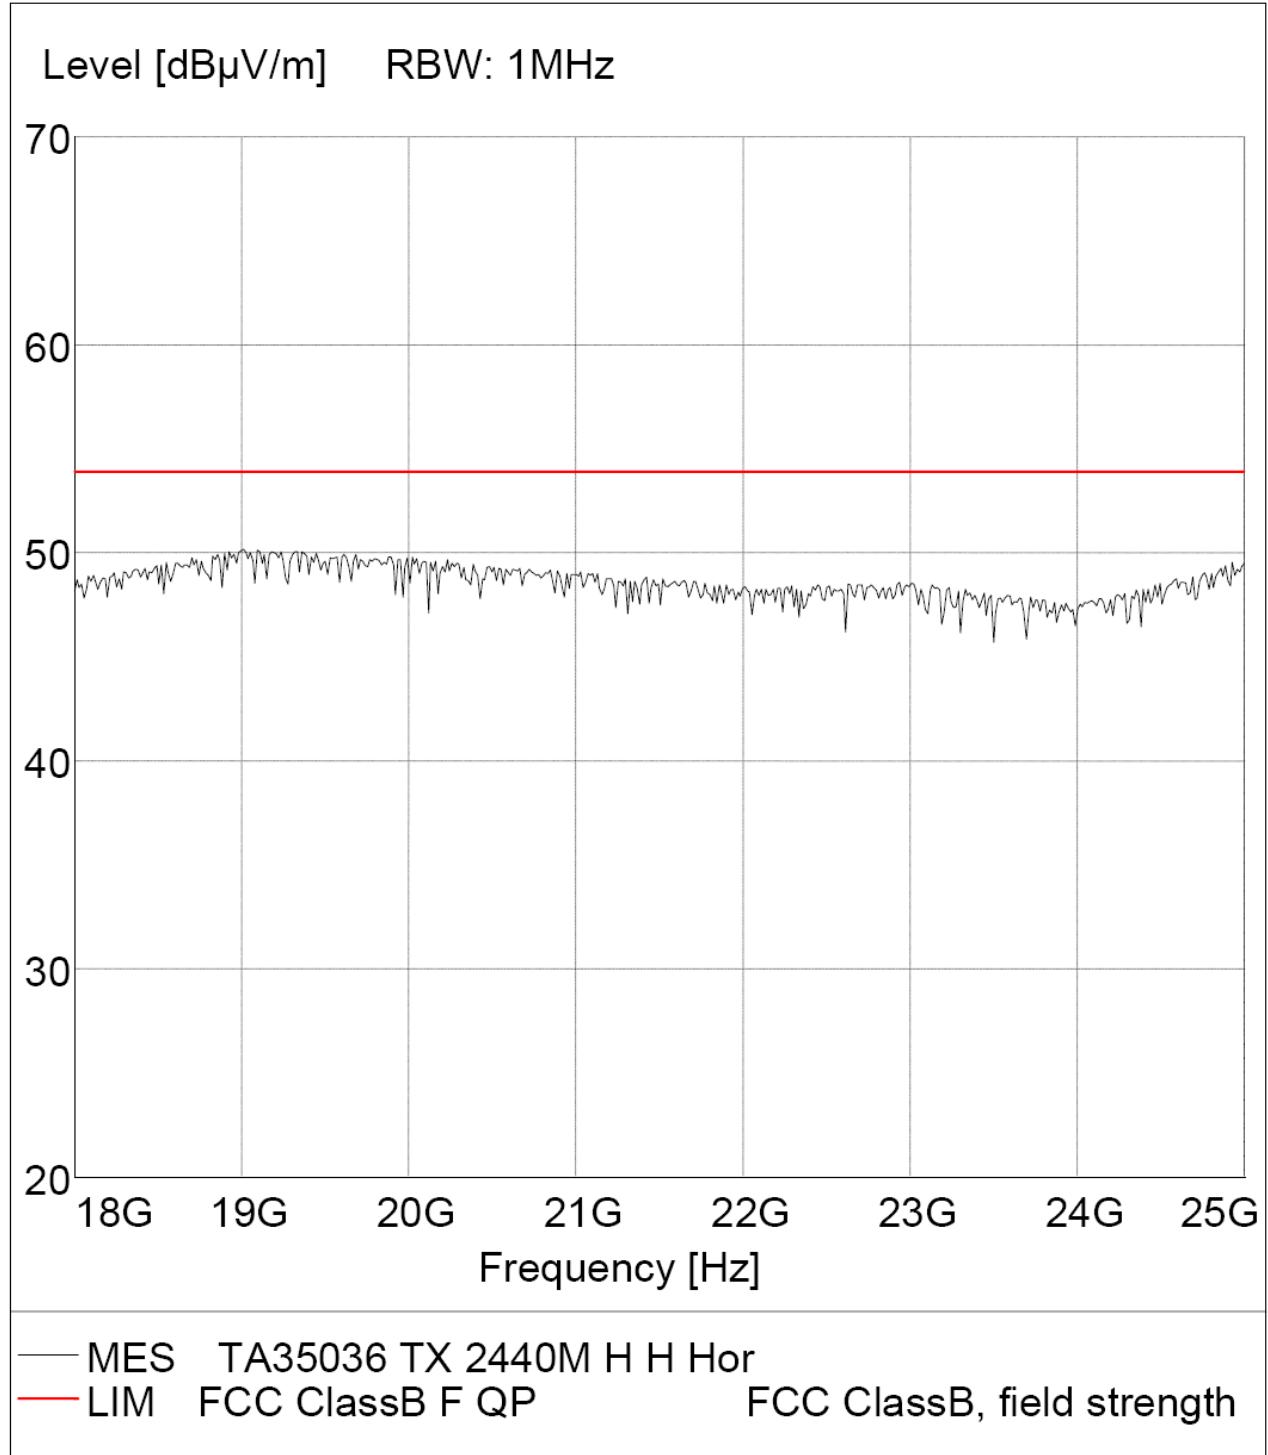

Radiated Disturbance**FCC Part 15**

EUT: Wii Wireless Controller Adaptor
Manufacturer: TECH ART ENTERPRISE LIMITED
Operating Condition: TX 2440MHz
Test Site: ATC EMC Lab.SAC
Test Specification: Vertical
Comment: DC 3.3V


M/N: TA35036

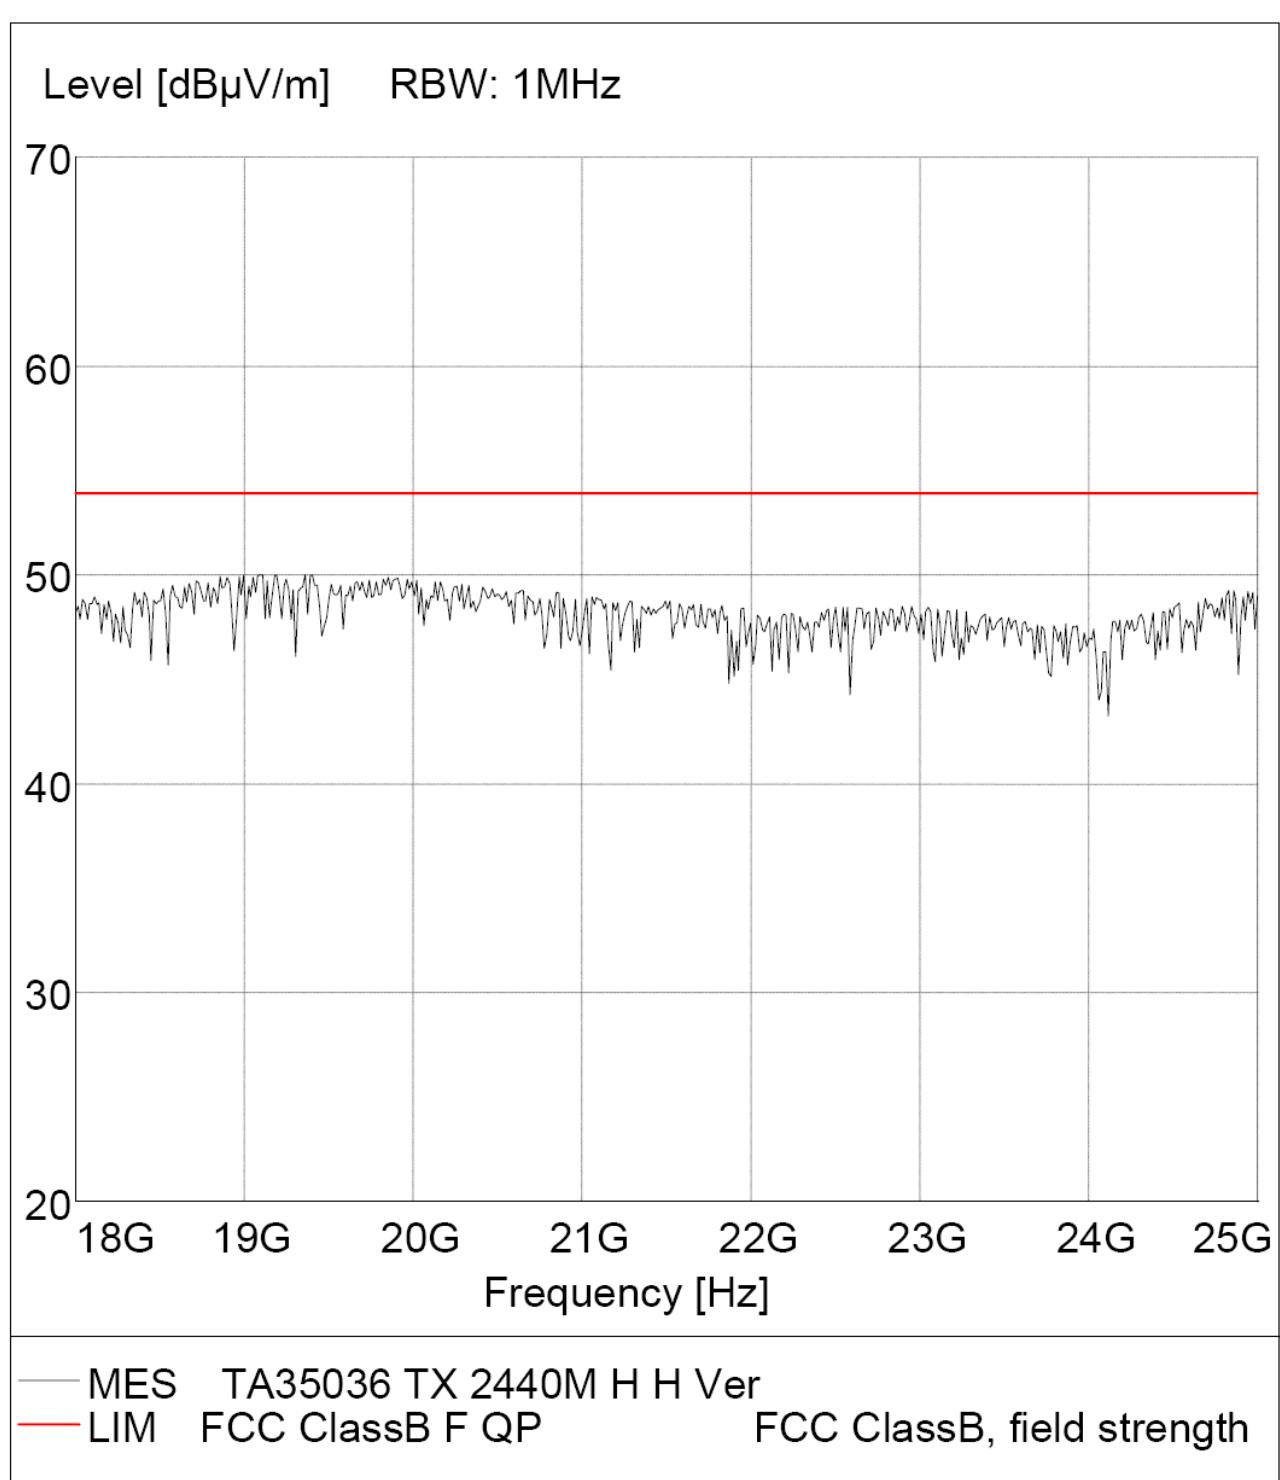

Radiated Disturbance**FCC Part 15**

EUT: Wii Wireless Controller Adaptor
 Manufacturer: TECH ART ENTERPRISE LIMITED
 Operating Condition: TX 2476MHz
 Test Site: ATC EMC Lab.SAC
 Test Specification: Horizontal
 Comment: DC 3.3V


M/N: TA35036

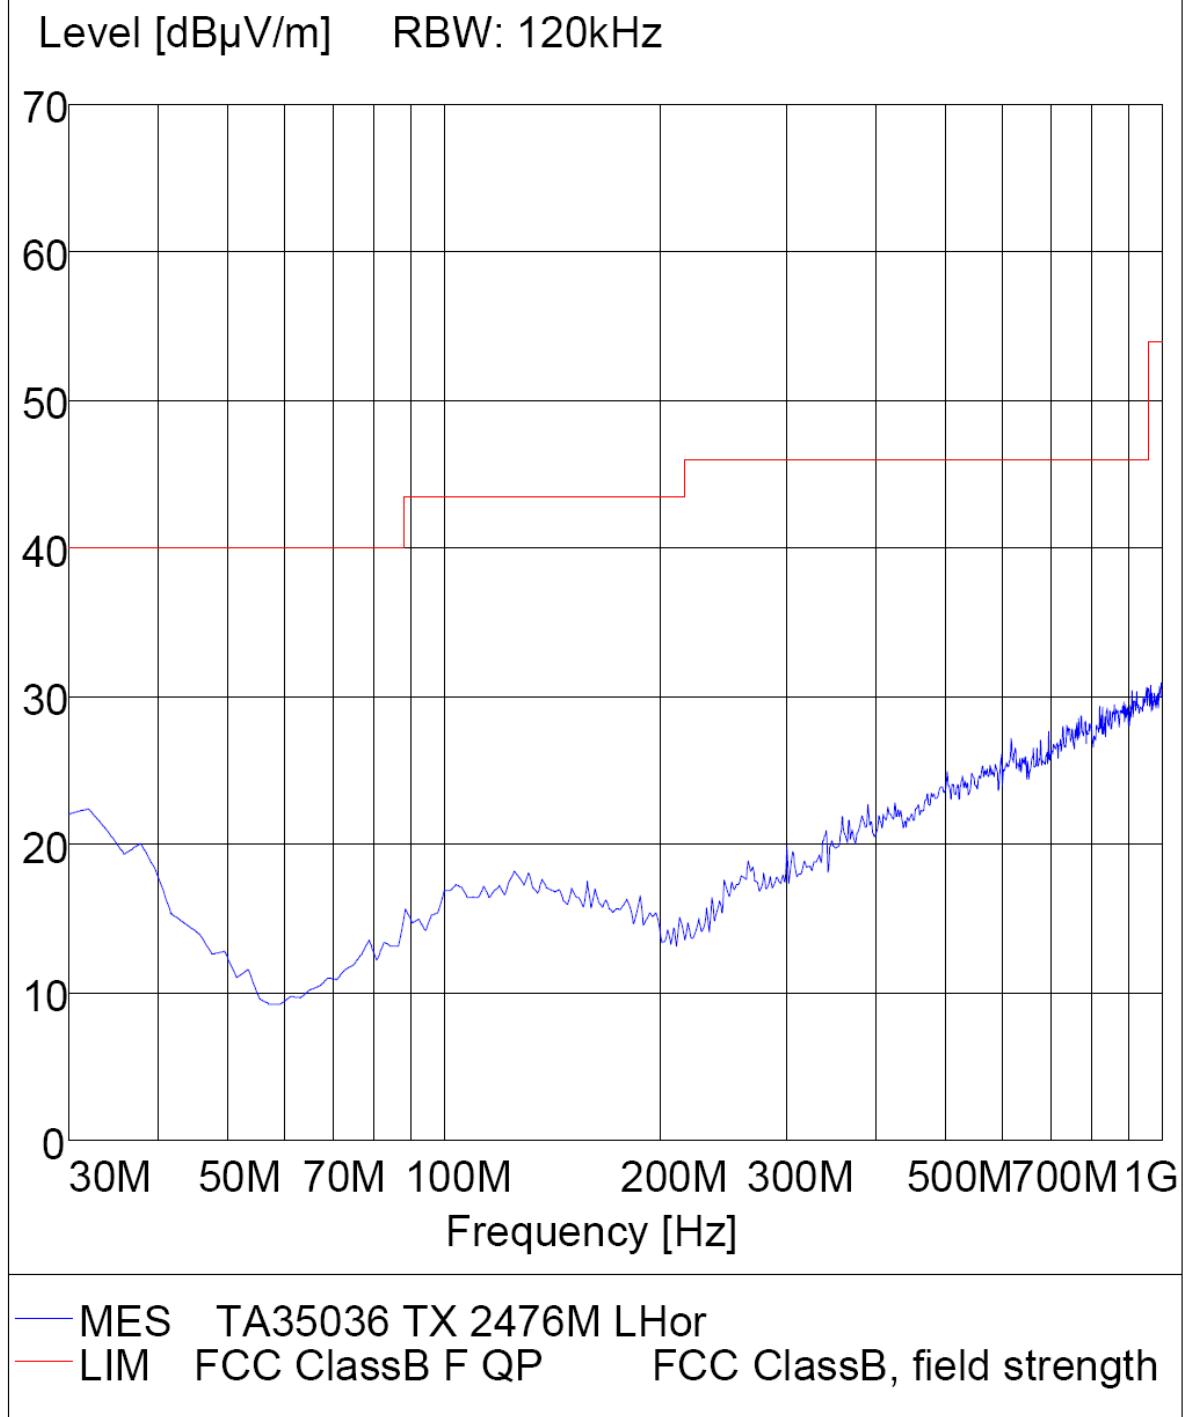

Radiated Disturbance**FCC Part 15**

EUT: Wii Wireless Controller Adaptor
 Manufacturer: TECH ART ENTERPRISE LIMITED
 Operating Condition: TX 2476MHz
 Test Site: ATC EMC Lab.SAC
 Test Specification: Vertical
 Comment: DC 3.3V


M/N: TA35036

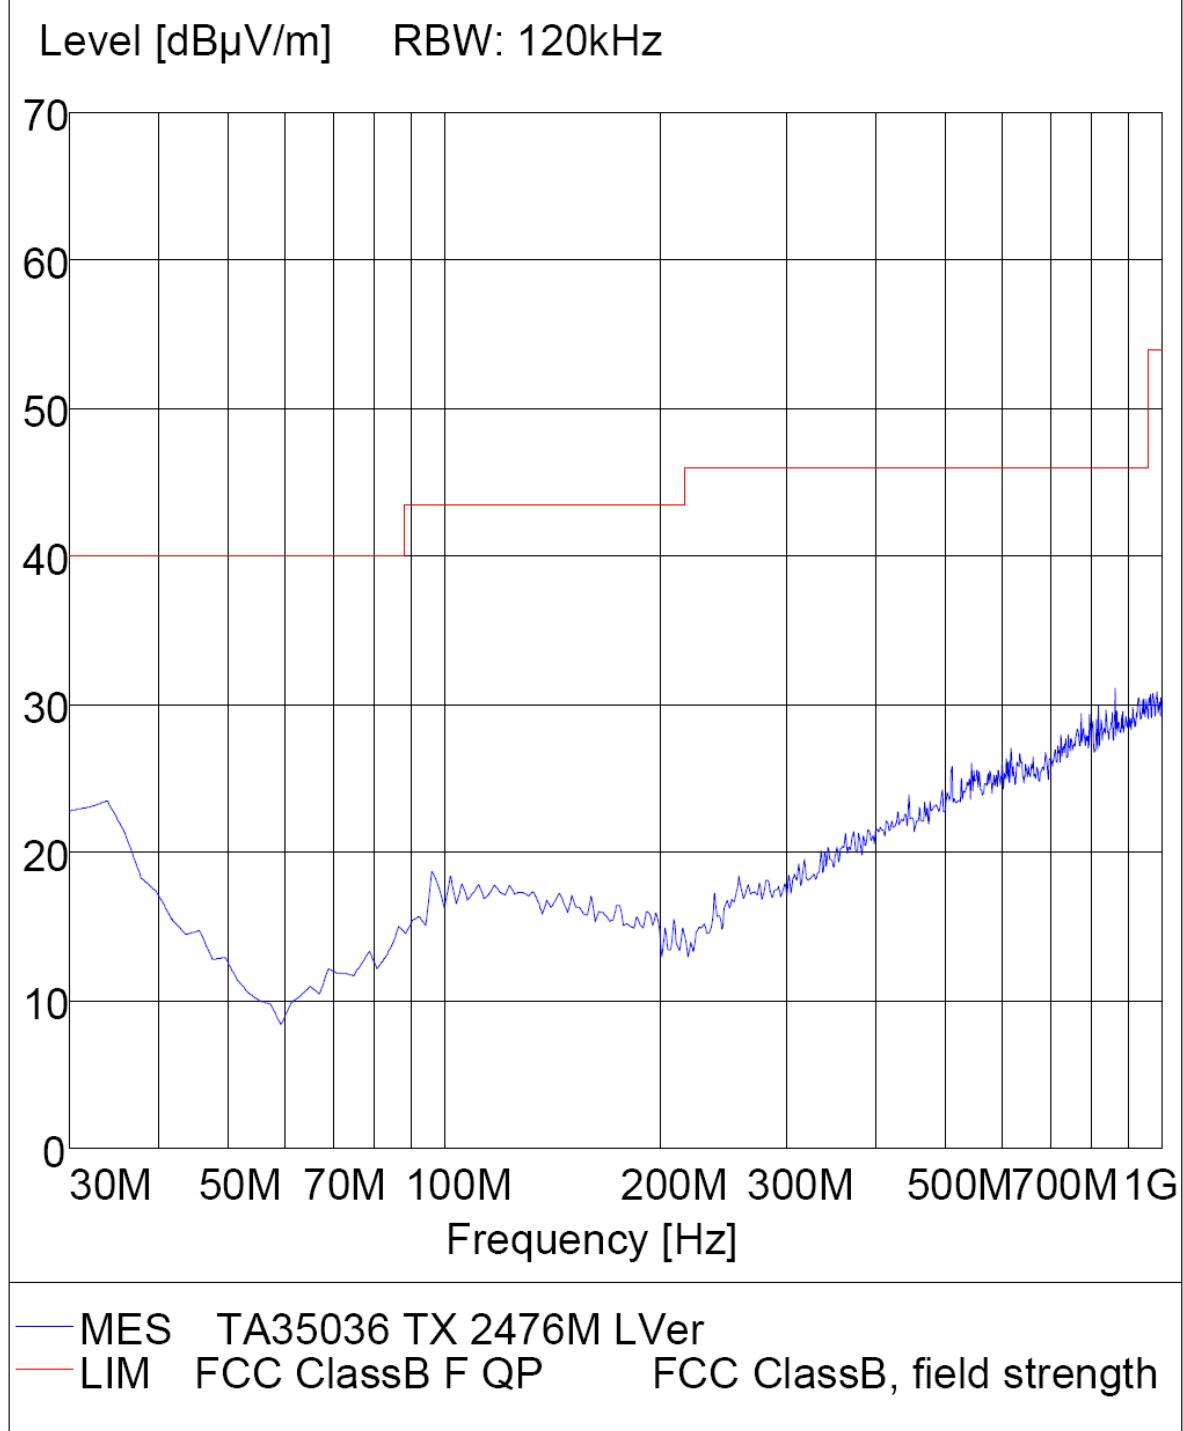

Radiated Disturbance**FCC Part 15**

EUT: Wii Wireless Controller Adaptor
 Manufacturer: TECH ART ENTERPRISE LIMITED
 Operating Condition: TX 2476MHz
 Test Site: ATC EMC Lab.SAC
 Test Specification: Horizontal
 Comment : DC 3.3V


M/N: TA35036

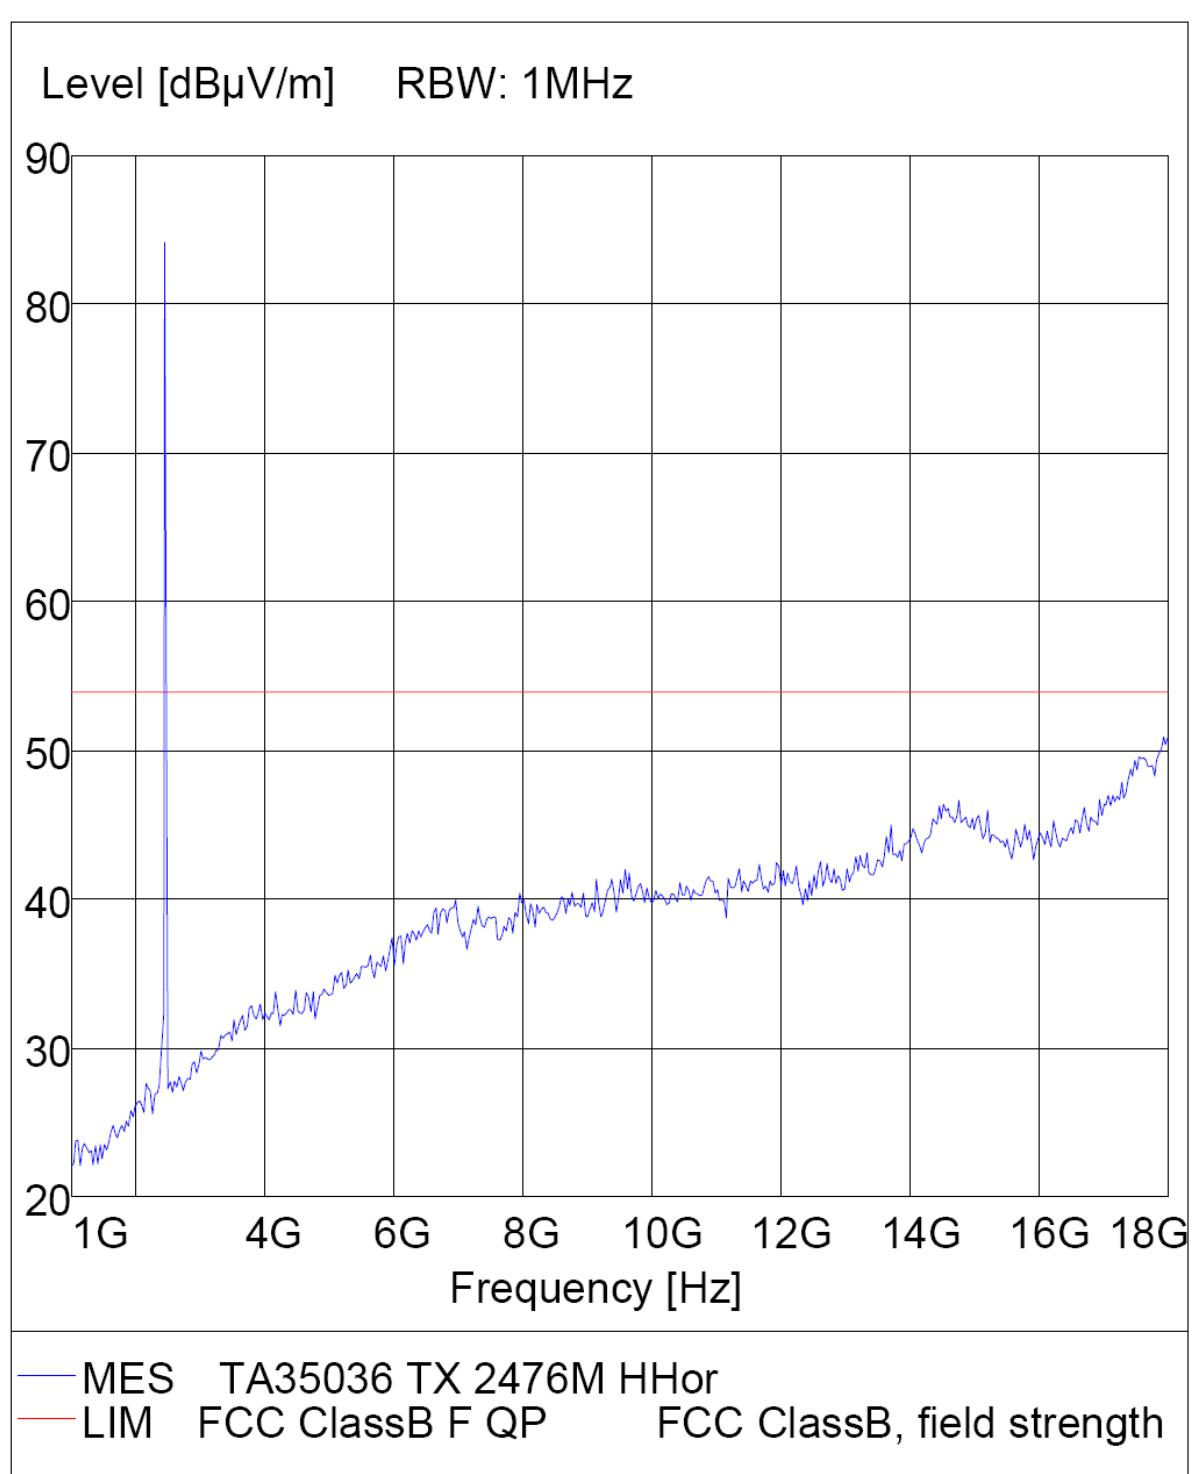

Radiated Disturbance**FCC Part 15**

EUT: Wii Wireless Controller Adaptor
 Manufacturer: TECH ART ENTERPRISE LIMITED
 Operating Condition: TX 2476MHz
 Test Site: ATC EMC Lab.SAC
 Test Specification: Vertical
 Comment : DC 3.3V


M/N: TA35036

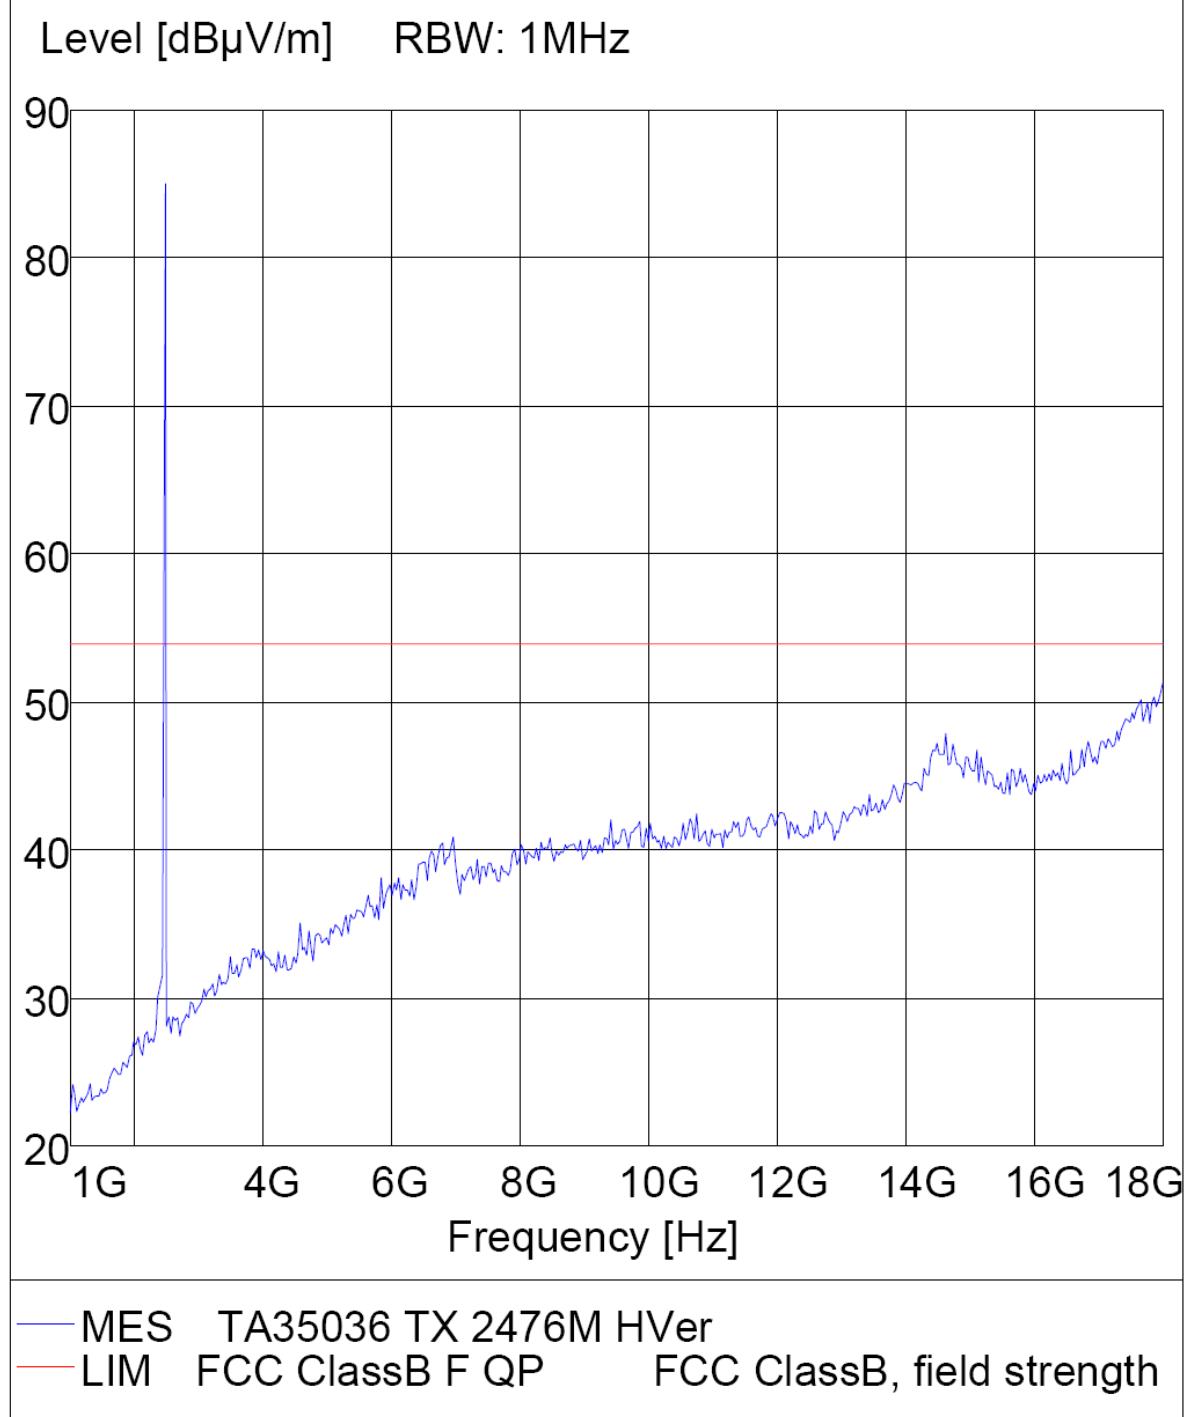

Radiated Disturbance**FCC Part 15**

EUT: Wii Wireless Controller Adaptor
Manufacturer: TECH ART ENTERPRISE LIMITED
Operating Condition: TX 2476MHz
Test Site: ATC EMC Lab.SAC
Test Specification: Horizontal
Comment: DC 3.3V

M/N: TA35036

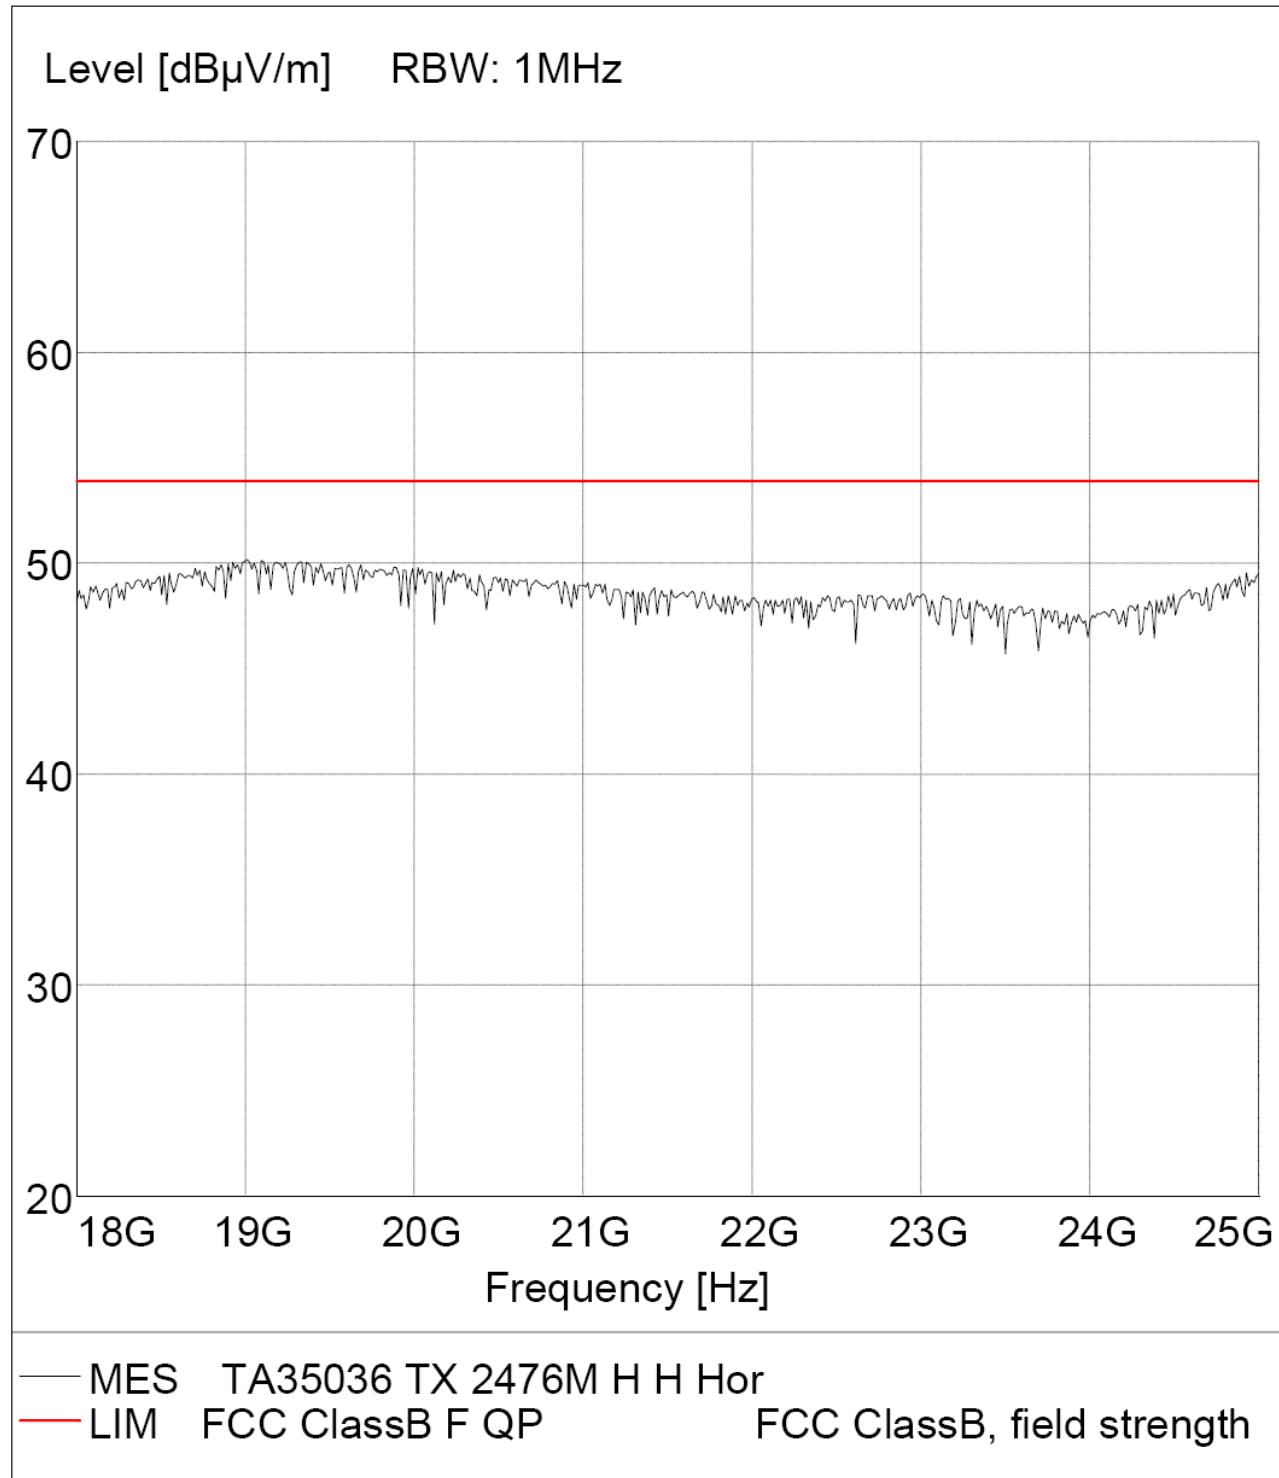

Radiated Disturbance**FCC Part 15**

EUT: Wii Wireless Controller Adaptor
Manufacturer: TECH ART ENTERPRISE LIMITED
Operating Condition: TX 2476MHz
Test Site: ATC EMC Lab.SAC
Test Specification: Vertical
Comment: DC 3.3V

M/N: TA35036

