

EMC TEST REPORT

For

Radio Control System
Model Number: QT6AH
FCC ID: TPX-QT6AH

Report Number : WT058001544

Test Laboratory : Shenzhen Academy of Metrology and
Quality Inspection EMC Laboratory

Site Location : Bldg. of Metrology & Quality Inspection,
Longzhu Road, Shenzhen, Guangdong,
China

Tel : 0086-755-26941637, 26941531
Fax : 0086-755-26941545

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. TEST RESULTS.....	4
2. GENERAL INFORMATION	4
2.1. Description of EUT.....	4
2.2. Test Facility	5
3. TEST EQUIPMENT	5
3.1. For Conducted Disturbance Test.....	5
3.2. For Radiated Disturbance Test	5
4. RADIATED EMISSION MEASUREMENT	6
4.1. Block Diagram of Test Setup.....	6
4.2. Test Procedure	7
4.3. Operating Condition of EUT.....	7
4.4. Test Data	7
4.5. EMISSION MASK.....	8
5. FREQUENCY STABILITY.....	9
5.1. Block Diagram of Test Setup.....	9
5.2. Test Standard and Limit	9
5.3. Test Procedure	9
5.4. Test Data	10
6. BAND EDGES TESTING.....	11
6.1 Test Procedure	11
6.2 Test Equipment	11
6.3 Test Results	11
7. POWER CAPABILITY	12

CERTIFICATE

Applicant : Shenzhen QQF Science & Technology Co., Ltd.
Address : 1/F, Bldg 104, Nanyou No.1 Industrial Zone Nanshan District, Shenzhen, China
Manufacturer : Shenzhen QQF Science & Technology Co., Ltd.
Address : 1/F, Bldg 104, Nanyou No.1 Industrial Zone Nanshan District, Shenzhen, China
EUT Description : Radio Control System
Model No : QT6AH

Test Standards:

FCC PART 95, SUBPART C & E : 2003

FCC PART 2, SUBPART J : 2003


ANSI C63.4 2003

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results. Also, this report shows that the EUT technically complies with FCC requirements.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Tested by :  Date : November 3, 2005

(Peter Lin)

Approved by :  Date : November 4, 2005

(Apollo Liu)

1. TEST RESULTS

Table 1 Test Results

Test Items	Test Results
95.210(a) Transmitter Power Test	Pass
95.635 Unwanted Radiated Test	Pass
95.623(c) Frequency Stability Test	Pass
95.633(b) Emission Bandwidth Test	Pass
95.647 Transmitter antenna	Pass
95.649 Power capability	Pass

Note: FCC Part2, Paragraph 2.1033(c)(8) The dc voltages applied to and dc currents into the several elements of the final radio frequency amplifying device for normal operation over the power range: 12VDC, Current 250mA.

2. GENERAL INFORMATION

2.1. Description of EUT

Description	:	Radio Control System
Model Number	:	QT6AH
Applicant	:	Shenzhen QQF Science & Technology Co., Ltd.
Manufacturer	:	Shenzhen QQF Science & Technology Co., Ltd.
Transmitter:		
Working Frequency	:	72.510MHz
Emission Designator	:	4K20F1D
Transmitting Power	:	-9dBm
Power Supply	:	DC12V
Adaptor:	Input Power:	N/A
	Output Power:	N/A

The system is FM proportional radio control system. According to FCC Part 95 Section 95.647, the antenna of each R/C station transmitting in 72~76 MHz band, must be an integral part of the transmitter. The antenna must have no gain and must be vertically polarized.

The system's rod antenna is designed as a fixed, permanent, non-user replaceable with no gain and vertically polarized unit integrated to EUT.

2.2. Test Facility

Name of Facility : Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory
 Site Location : Bldg. of Metrology & Quality Inspection, Longzhu Road, Shenzhen, Guangdong, China
 Site Description : June 02, 2004 file on Federal Communications Commission Registration Number: 274801
 Aug. 11, 2000 certificated by TUV Rheinland, Shenzhen.

3. TEST EQUIPMENT

3.1. For Conducted Disturbance Test

Table 2 Conducted Disturbance Test Equipment

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
SB2603	EMI Test Receiver	Rohde & Schwarz	ESCS30	Jan.30,2005	1 Year
SB3321	AMN	Rohde & Schwarz	ESH2-Z5	Jan.30,2005	1 Year
SB2589	L.I.S.N	KYROTISU	KNW-407	Jan.30,2005	1 Year

3.2. For Radiated Disturbance Test

Table 3 Radiated Disturbance Test Equipment


NO.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
SB3436	EMI Test Receiver	Rohde & Schwarz	ESI26	Jan.30,2005	1 Year
SB3440	Bilog Antenna	Chase	CBL6112B	Jan.30,2005	1 Year
	Horn antenna	Rohde & Schwarz	HF906	Jan.30,2005	1 Year

4. RADIATED EMISSION MEASUREMENT

4.1. Block Diagram of Test Setup


4.1.1. Block Diagram of the EUT

Figure 1 EUT

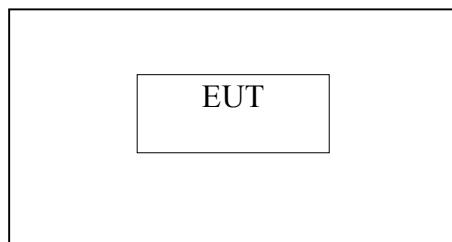

4.1.2. Test setup of Open Site Test

Figure 2 Test Setup(Open Site)

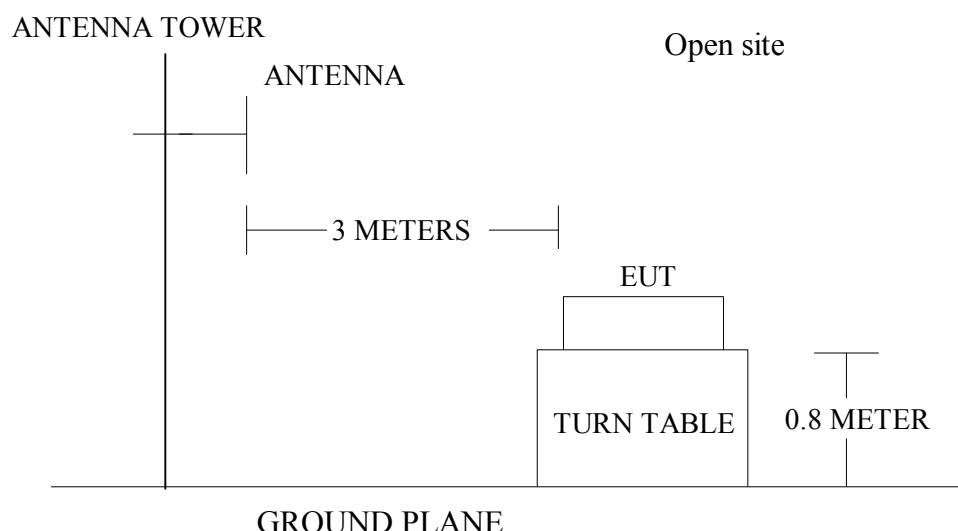

4.1.3 Test Standard FCC Part 95:2003

4.1.4 Limits of Fundamental Frequency Measurement

The maximum transmitter output power is 0.75W.

4.1.5 Provisions Applicable: According to Section 95.635(b), the power of each unwanted emission shall be less than Transmitted Power as specified below:

- 1) At least 25dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.
- 2) At least 45dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 125% of the authorized bandwidth.
- 3) At least 55dB on any frequency removed from the center of the authorized bandwidth by more than 125% up to and including 250% of the authorized bandwidth.
- 4) At least $56 + 10 \log(TP)$ dB on any frequency removed from the center of the authorized bandwidth by more than 250%.

4.2. Test Procedure

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the receiving antenna, which was mounted on antenna tower and its position at 0.8 m above the ground.
- c. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading and recorded the value.
- d. The EUT is replaced by a proper antenna(substitution antenna) connected to a signal generator tuned to the frequency of emission.
- e. The signal generator level has to be adjusted to have the same emission nature.
- f. The radiated power can be calculated via the factor and antenna gain.
- g. Repeat step 1-6 for horizontal polarization.

4.3. Operating Condition of EUT

4.3.1. Setup the EUT as shown in section 4.1.

4.3.2. Turn on the power.

4.3.3 Let the Transmitter working in each channel.

Enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.4. Test Data

The emissions don't show in below are too low against the limits.

Table 1 Radiated Disturbance Test Data


Date of Test	2005.11.02	Temperature	20	°C
EUT	Radio Control System	Humidity	58	%
Model Number	QT6AH			

Frequency MHz	Readings(dBm) Peak	Polarization	Limits (dBm)
72.510	-13.4	Horizontal	28.75
58.216	-60.3	Horizontal	-26.00
72.510	-9.0	Vertical	28.75
58.211	-60.0	Vertical	-26.00

Note:

1. Unwanted emissions more than 20kHz from the channel center frequency shall be attenuated at least $-56 - 10\log(\text{maximum output power}) = -17\text{dBm}$
2. The other emission levels were very low against the limit.


4.5.EMISSION MASK

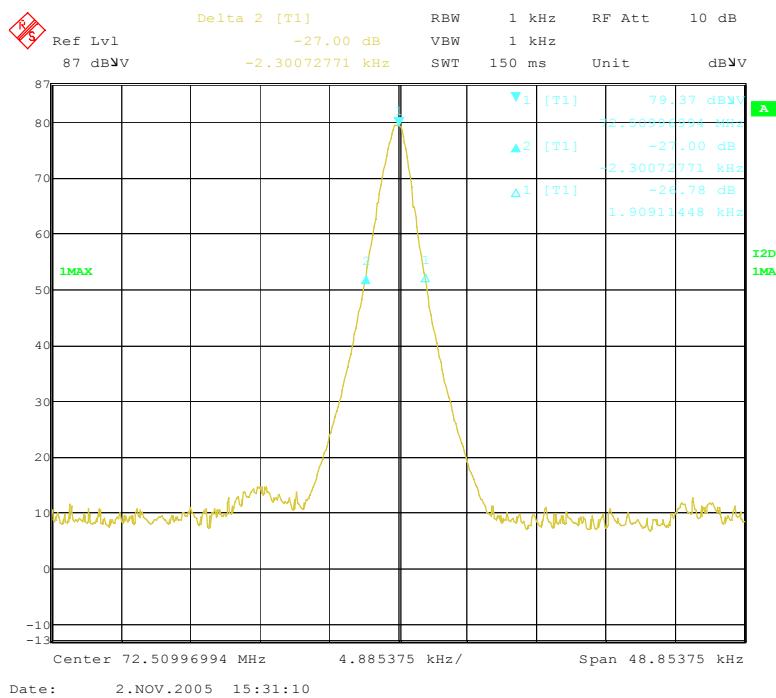

5. FREQUENCY STABILITY

5.1. Block Diagram of Test Setup

Figure 2 Test Setup

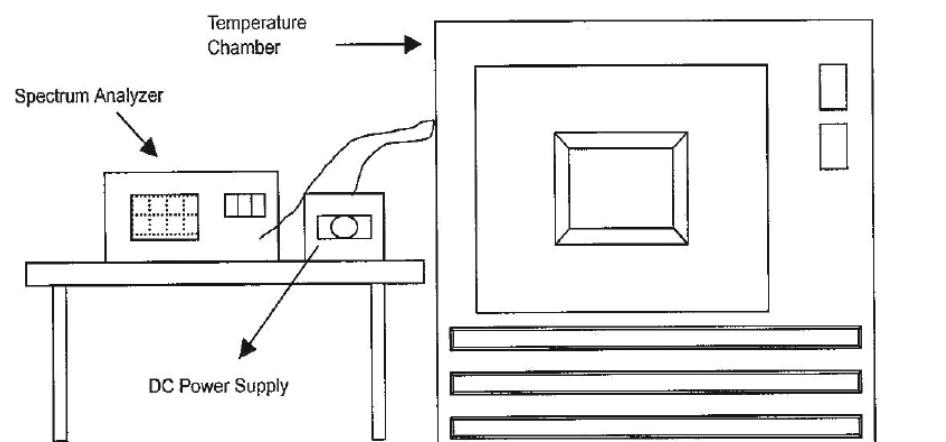

5.2. Test Standard and Limit

5.2.1. Test Standard

FCC Part 95: 2003

5.2.2. Test Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.002% of the operating frequency over a temperature variation of -30 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

5.3. Test Procedure

- a. The EUT was situated inside the environmental test chamber and supply the EUT with nominal DC voltage.
- b. Turn the EUT on and couple its output to a spectrum analyzer.
- c. Turn the EUT off and set the chamber to the highest temperature specified.
- d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 10 minutes.
- e. Repeat step b and c with the temperature chamber set to the lowest temperature.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

5.4. Test Data

Operating Frequency: 72.510MHz		Limit: +/- 0.002%	
Temp(°C)	DC (V)	10 minute	%
50	11.0	72.51053	0.00073
	9.6	72.51043	0.00059
	8.1	72.51033	0.00045
40	11.0	72.51031	0.00042
	9.6	72.51019	0.00026
	8.1	72.51029	0.00040
30	11.0	72.51030	0.00041
	9.6	72.51027	0.00037
	8.1	72.51018	0.00025
20	11.0	72.51029	0.00040
	9.6	72.51020	0.00027
	8.1	72.51023	0.00031
10	11.0	72.51019	0.00026
	9.6	72.51028	0.00039
	8.1	72.51030	0.00041
0	11.0	72.51024	0.00033
	9.6	72.51018	-0.00025
	8.1	72.51028	0.00039
-10	11.0	72.51012	-0.00017
	9.6	72.51022	0.00030
	8.1	72.51023	0.00032
-20	11.0	72.51021	0.00030
	9.6	72.51020	0.00027
	8.1	72.51019	-0.00026

Reference Frequency	Frequency Measured at end point voltage DC8V	Frequency Deviation (%)	Limit (%)
72.510	72.51034	0.00047	0.002

6. BAND EDGES TESTING

An R/C transmitter is allowed to transmit any appropriate non-voice emission, which meets the emission limitations for an R/C transmitter. The authorized bandwidth for any emission type transmitted by an R/C transmitter is 8kHz.

6.1 Test Procedure


- The EUT was placed on the turning table.
- The signal was coupled to the spectrum analyzer through an antenna.
- Set the resolution bandwidth and video bandwidth to 20kHz and select Peak function to scan the channel frequency.
- The 26dB bandwidth was measured and recorded.

6.2 Test Equipment

RS ESI26 EMI Test Receiver
HP 930C printer

6.3 Test Results

The occupied bandwidth of the EUT complied with the emission bandwidth requirement. During testing, all control switches and buttons were investigated for the worse case modulated signal. The occupied bandwidth plot submitted was the worst case condition.

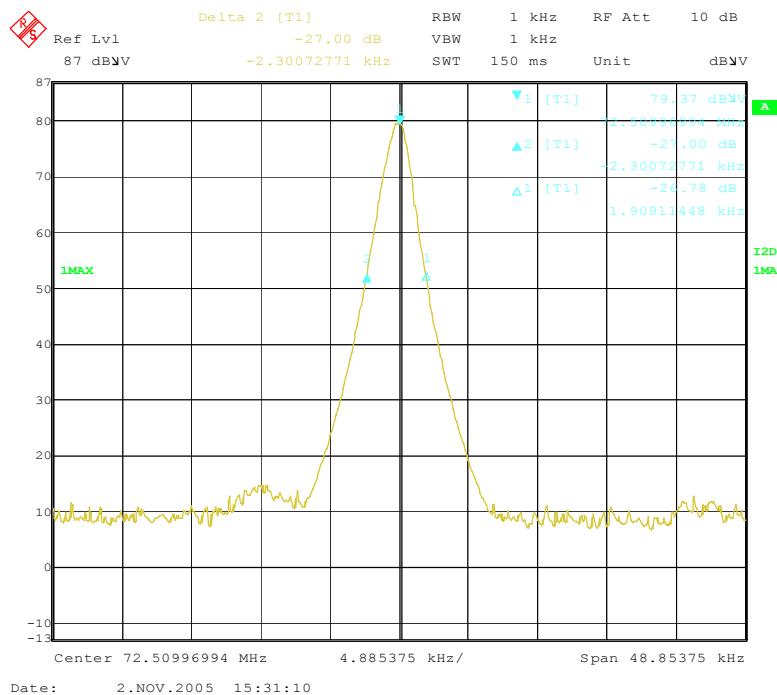

7. POWER CAPABILITY

7.1 Provisions Applicable

According to FCC Part 95 Section 95.649. No R/C unit shall incorporate provisions for increasing its transmitter power to any level in excess of the limits specified in 95.639.

7.2 Compliance

All the components employed by EUT have the power capability less than 0.75W either being assembled or individual. The output power was measured to be -9dBm.