



**CONFORMANCE TEST REPORT  
FOR  
FCC 47 CFR, Part 15 Subpart B & C**

**Report No.: 06-12-MAS-046-01**

Client:	Shin Chuan Computer Co., Ltd.
Product:	RFID External Module
Trade Name:	----
Model No.:	RFID EM , MARS-1030A-RFIDxxx (Agent)
FCC ID:	TQ2-RFIDEXTNL
Manufacturer/supplier:	AMIC Technology Corporation.
Representation/Agency:	ADVANTECH CO., LTD
Date test item received:	2006/12/06
Date test campaign completed:	2007/01/26
Date of issue:	2007/01/26

**The test result only corresponds to the tested sample. It is not permitted to copy this report, in part or in full, without the permission of the test laboratory.**

*Total number of pages of this test report: 19 pages*

*Total number of pages of photos: External photos 1 page*

*Internal photos 1 pages*

*Setup photos 2 pages*

Test Engineer	Checked By	Approved By
 Mark	 James	 Joe Hsieh

ELECTRONICS TESTING CENTER, TAIWAN  
NO.8, LANE 29, WENMING RD.,  
LESHAN TSUEN, GUISHAN SHIANG,  
TAOYUAN COUNTY, TAIWAN 33383,  
R.O.C.TAIWAN, R.O.C.

TEL: (03) 3276170~4  
INT: +886-3-3276170~4  
FAX: (03) 3276188  
INT: +886-3-3276188



Client : Shin Chuan Computer Co., Ltd.  
Address : 6F-2, 268, LianCheng Rd., ZhongHe City, Taipei Country 23553, Taiwan  
(R.O.C.)  
Manufacturer : AMIC Technology Corporation.  
Address : No. 2, Li-Hsin 6<sup>th</sup> Road, Science-Based Industrial Park, Hsin-Chu City, 300, Taiwan, R.O.C.  
Representation/Agency : ADVANTECH CO., LTD  
Address : No. 1, Alley 20, Lane 26, Rueiguang Rd, Neihu District, Taipei, Taiwan 114  
EUT : RFID External Module  
Trade name : ----  
Model No. : RFID EM , MARS-1030A-RFIDxxx (Agent)  
Power Source : 3.3V DC  
Regulations applied : FCC 47 CFR, Part 15 Subpart B & C (2006)

The testing described in this report has been carried out to the best of our knowledge and ability, and our responsibility is limited to the exercise of reasonable care. This certification is not intended to relieve the sellers from their legal and/or contractual obligations.

The compliance test is only certified for the test equipment and the results of the testing report relate only to the item tested. The compliance test of this report was conducted in accordance with the appropriate standards. It's not intention to assure the quality and performance of the product. This report shall not be reproduced except in full, without the approval of ETC. This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

Laboratory Introduction: Electronics Testing Center, Taiwan is recognized, filed and mutual recognition arrangement as following:

- ① ISO9001: TÜV Product Service
- ② ISO/IEC 17025: BSMI, CNLA, DGT, NVLAP, CCIBLAC, UL, Compliance
- ③ Filing: FCC, Industry Canada, VCCI
- ④ MRA: Australia, Hong Kong, New Zealand, Singapore, USA, Japan, Korea, China, APLAC through CNLA
- ⑤ FCC Registration Number: 90588, 91094, 91095



NVLAP Lab Code 200133-0

*Table of Contents**Page*

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1 PRODUCT DESCRIPTION .....	4
1.2 CHARACTERISTICS OF DEVICE: .....	4
1.3 TEST METHODOLOGY .....	4
1.4 TEST FACILITY .....	4
<b>2. TEST SYSTEM AND LIMITATION .....</b>	<b>5</b>
2.1 DEVICE FOR TESTED SYSTEM .....	5
2.2 RESTRICTED BANDS OF OPERATION.....	5
2.3 LIMITATION.....	6
2.4 LABELING REQUIREMENT .....	7
2.5 USER INFORMATION.....	7
<b>3. RADIATED EMISSION MEASUREMENT.....</b>	<b>8</b>
3.1 APPLICABLE STANDARD.....	8
3.2 MEASUREMENT PROCEDURE .....	8
3.3 TEST DATA .....	11
3.4 CALCULATION.....	14
3.5 RADIATED TEST EQUIPMENT .....	14
3.6 MEASURING INSTRUMENT SETUP.....	15
<b>4. FREQUENCY STABILITY.....</b>	<b>16</b>
4.1 APPLICABLE STANDARD.....	16
4.2 TEST EQUIPMENT.....	16
4.3 TEST SETUP .....	16
<b>5. CONDUCTED EMISSION MEASUREMENT .....</b>	<b>19</b>

## 1. GENERAL INFORMATION

### 1.1 Product Description

a) Type of EUT	: RFID External Module
b) Model No.	: RFID EM , MARS-1030A-RFIDxxx (Agent)
c) Trade Name	: ----
d) FCC ID	: TQ2-RFIDEXTNL
e) Working Frequency	: 13.56 MHz
f) Power Supply	: 3.3V DC

### 1.2 Characteristics of Device:

The EUT is a RFID External Module. The RFID External Module directs the RF transceiver to transmit RF signals, receives the encoded signal from the tag through the RF transceiver, decodes the tag's identification, and transmits the identification with any other data from the tag to the Holder device.

### 1.3 Test Methodology

Both Conducted and radiated testing were performed according to the procedures in chapter 7 and chapter 8 of ANSI C63.4 (2003) and FCC 47 CFR Part 15.

### 1.4 Test Facility

The semi-anechoic chamber and conducted measurement facility used to collect the radiated and conducted data are located inside the Building at No.8, Lane 29, Wen-ming Road, Lo-shan Tsun, Kweishan Hsiang, Taoyuan, Taiwan, R.O.C.

This site has been accreditation as a FCC filing site.

## 2. TEST SYSTEM AND LIMITATION

### 2.1 Device for Tested System

Device	Manufacture	Model No.	S/N No.	Cable Description
RFID External Module*	AMIC	RFID EM , MARS-1030A-RFIDxxx (Agent)	----	----
DC Power Supply	GW	GPC 3030D	----	1.8m Unshielded Power Line
Test Jig	N/A	N/A	----	0.2m Unshielded Signal Line 1.8m Unshielded Power Line

Remark “\*” means equipment under test.

### 2.2 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.25
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

Remark “\*\*” : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

## 2.3 Limitation

### (1) Conducted Emission Limits :

According to §15.107 and §15.207 Conducted limits.

For an unintentional and intentional radiator which is designed to be connected to the public utility (AC) power line, the conducted limit is the following:

Frequency MHz	Quasi Peak dB $\mu$ V	Average dB $\mu$ V
0.15 - 0.5	66-56	56-46
0.5 - 5.0	56	46
5.0 - 30.0	60	50

### (2) Radiated Emission Limits :

According to §15.225 Operation within the band 13.110 – 14.010 MHz.

- (a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

According to §15.109 and § 15.209 Radiated emission limits, general requirements.

- (a) Except as provided elsewhere in this Subpart, the emissions from an unintentional and intentional radiator shall not exceed the field strength levels specified in the following table:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100 **	3
88 – 216	150 **	3
216 – 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

### (3) Frequency Stability Limit

According to §15.225 Operation within the band 13.110 – 14.010 MHz.

(e) The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

## 2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

## 2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. To comply with the FCC RF exposure compliance requirement, the device and its antenna must not be co-located or operating to conjunction with any other antenna or transmitter.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

### 3. RADIATED EMISSION MEASUREMENT

#### 3.1 Applicable Standard

According to §15.225 Operation within the band 13.110 – 14.010 MHz.

- (a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

According to §15.109 and § 15.209 Radiated emission limits, general requirements.

- (a) Except as provided elsewhere in this Subpart, the emissions from an unintentional and intentional radiator shall not exceed the field strength levels specified in the following table:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100 **	3
88 – 216	150 **	3
216 – 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

#### 3.2 Measurement Procedure

##### A.Preliminary Measurement For Portable Devices.

For portable devices, the following procedure was performed to determine the maximum emission axis of EUT:

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. So, the axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.

**B. Final Measurement**

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 30 MHz respectively. Turn on EUT and make sure that it is in continuous operating function.
2. For emission measured below 30 MHz, set the EMI Test Receiver on a 10 kHz and 30 kHz resolution bandwidth respectively for each frequency measured in step 2.
3. For emission measured above 30 MHz, set the EMI Test Receiver on a 120 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.

Figure 1 : Frequencies measured below 30 MHz configuration


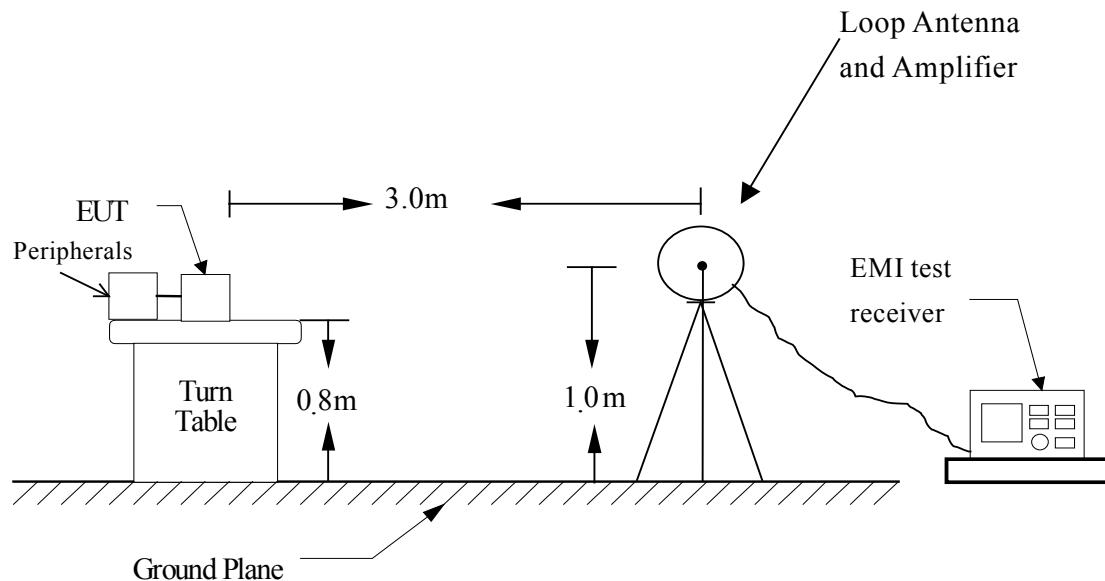


Figure 2 : Frequencies measured above 30 MHz configuration

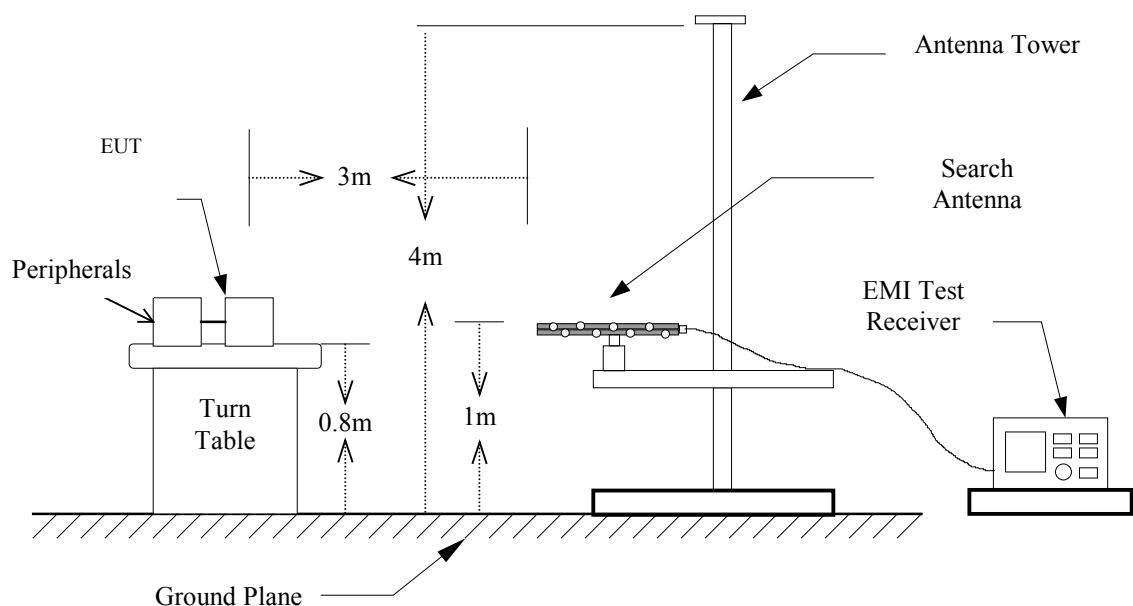

### 3.3 Test Data

3.3.1 Test Frequency : Below 30 MHz

Operated mode : Continue Transmitting

Test Date : Jan. 21, 2007 Temperature : 18 °C Humidity : 70 %

#### 3.3.1.1 Fundamental

Frequency (MHz)	Meter Reading QP	Corrected Factor (dB/m)	Resulot @3m (dBuV) QP	Resulot @30m (uV/m) QP	Limit @30m (uV/m) QP	Margin (uV/m)
13.56	67.0	6.9	73.9	49.5	15848	-15798.5

#### 3.3.1.2 Harmonic

Frequency (kHz)	Meter Reading (dBuV) QP	Corrected Factor (dB/m)	Resulot @3m (dBuV/m) QP	Limit @3m (dBuV/m) QP	Margin @3m (dB)
27.120	30.6	5.5	36.1	69.5	-33.4
40.680	----	14.7	----	40.0	----
54.240	----	9.4	----	40.0	----
67.800	----	7.3	----	40.0	----
81.360	----	8.4	----	40.0	----
94.920	----	10.2	----	43.5	----
108.480	----	13.3	----	43.5	----
122.040	----	13.7	----	43.5	----
135.600	----	13.3	----	43.5	----

#### Note:


1. Place of Measurement: Measuring site of the ETC.
2. Test Result = Meter Reading + Correct Factor
3. If the result of peak value is under the limit of Quasi-Peak, the Quasi-Peak value doesn't need to be measured.

With a distant extrapolation of  $40\log(30m/3m)$  on the offset level of receiver during the test.

#### Limit Calculation:

Fundamental ( §15.225(a) ) :  $20 \log(15848) + 40 \log(30/3) = 124.0$  dBuV/m  
Harmonic ( §15.225(d) ) :  $20 \log(30) + 40 \log(30/3) = 69.5$  dBuV/m

## Occupied Bandwidth Measurement

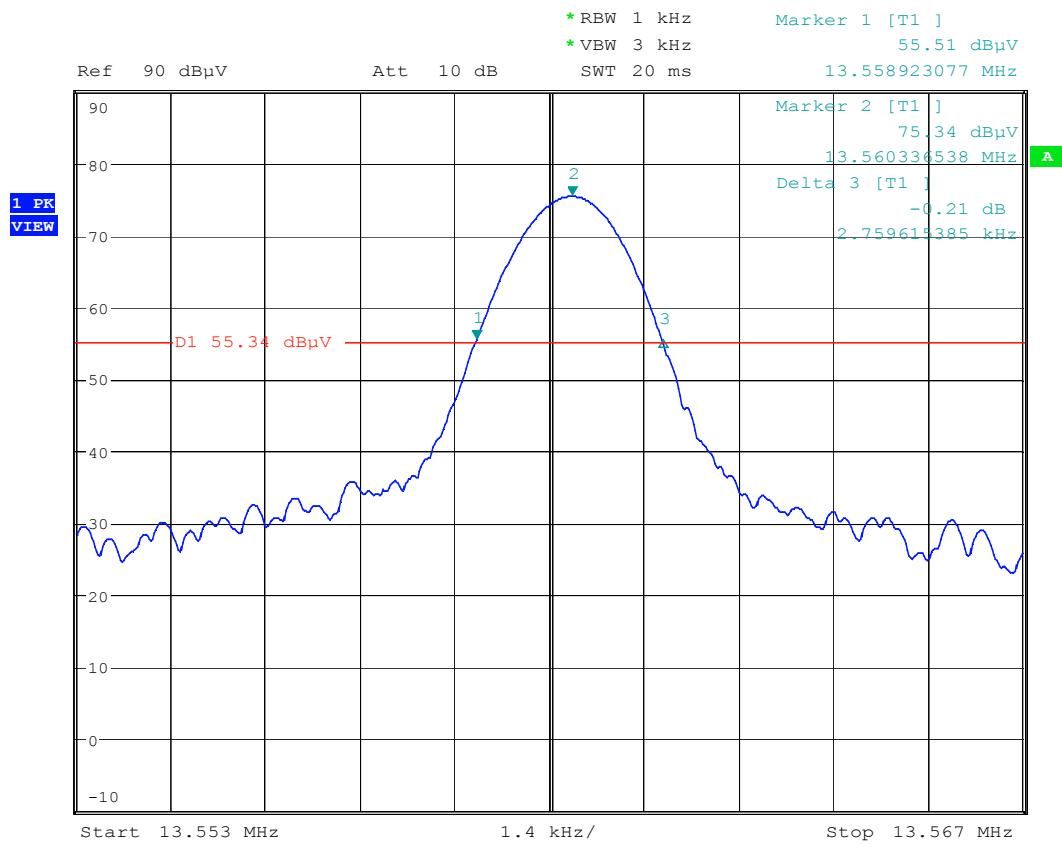

## 3.3.2 Test Frequency : 30 MHz ~ 1 GHz

EUT :	Model :	Status : TX		
Condition : Horizontal	Date : 2007/1/21	Temp. : 18°C		Humi. : 70%

	Freq (MHz)	QP Level (dBuV)	Factor (dB/m)	QP Result (dBuV/m)	QP Limit (dBuV/m)	QP Margin (dB)	Ant Height	Table Degree
1	31.944	16.5	13.1	29.6	40.0	-10.4	1.1	235
2	98.036	6.7	10.9	17.6	43.5	-25.9	1.2-	314
3	220.501	6.0	13.7	19.7	46.0	-26.3	1.3	32
4	230.220	9.0	14.1	23.1	46.0	-22.9	1.0	195
5	294.369	11.0	16.3	27.3	46.0	-18.7	1.2	124
6	342.966	10.1	17.7	27.8	46.0	-18.2	1.2	224

EUT :	Model :	Status : TX		
Condition : Vertical	Date : 2007/1/21	Temp. : 18°C		Humi. : 70%

	Freq (MHz)	QP Level (dBuV)	Factor (dB/m)	QP Result (dBuV/m)	QP Limit (dBuV/m)	QP Margin (dB)	Ant Height	Table Degree
1	31.944	17.6	13.1	30.7	40.0	-9.3	1.1	302
2	146.633	3.9	14.7	18.6	43.5	-24.9	1.2	298
3	195.230	7.4	13.1	20.5	43.5	-23.0	1.2	85
4	230.220	8.4	14.1	22.5	46.0	-23.5	1.0	114
5	294.369	13.8	16.3	30.1	46.0	-15.9	1.0	248
6	442.104	8.5	20.4	28.9	46.0	-17.1	1.2	224

**Note:**

1. Place of Measurement: Measuring site of the ETC.
2. Peak Result = Peak Reading + Correct Factor
3. AVG Result = Peak Result + Duty Factor
4. If the result of peak value is under the limit of Quasi-Peak, the Quasi-Peak value doesn't need to be measured.

### 3.4 Calculation

Field Strength:

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$\text{RESULT} = \text{READING} + \text{CORR. FACTOR}$$

where CORR. FACTOR = Antenna FACTOR + Cable FACTOR

### 3.5 Radiated Test Equipment

The following instrument are used for radiated emissions measurement :

Equipment	Manufacturer	Model No.	Next Cal. Due
EMI Receiver	R&S	ESIB 7	05/17/2007
PRE-Amplifier	ADVANTEST	BB525C	09/17/2007
BiLog Antenna	Schaffner	CBL 6112B	06/11/2007
Loop Antenna	EMCO	6512	07/15/2007
Spectrum Analyzer	R&S	FSU46	10/31/2007

Note: The standards used to perform this calibration are traceable to NML/ROC, NIST/USA and NPL.

### 3.6 Measuring Instrument Setup

Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution Bandwidth	Video Bandwidth
0.009 to 30	EMI Test Receiver	Peak	10 kHz	30 kHz
30 to 1000	EMI Test Receiver	Peak	120 kHz	300 kHz

## 4. FREQUENCY STABILITY

### 4.1 Applicable Standard


According to §15.225 Operation within the band 13.110 – 14.010 MHz.

(e) The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

### 4.2 Test Equipment

Equipment	Manufacturer	Model No.	Next Cal. Date
Spectrum Analyzer	Agilent	8564EC	09/22/2007
Temperature Chamber	ESPEC	EBR-3HW2P3A-22	01/16/2007
DC Power Supply	GW	GPC-3030D	N/A
Digital Multi Meter	YF-FONG	YF1069	04/26/2007

### 4.3 Test Setup

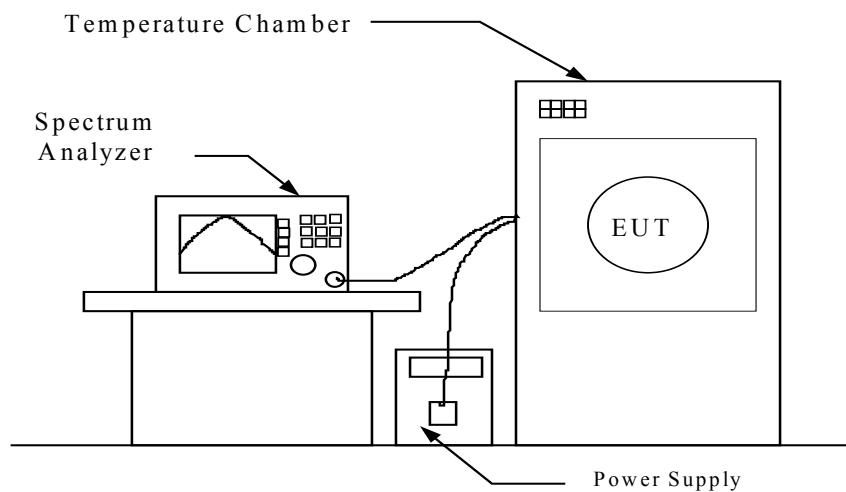

## 4.4 Test Procedure

### A. Frequency stability vs. temperature measurement

1. The EUT was placed into the constant temperature chamber.
2. The spectrum analyzer (a wide band antenna connected to the spectrum analyzer) was used to read the EUT operating frequency.
3. Set the constant temperature chamber temperature within the range of  $-20^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$ , and measured the EUT operating frequency at start-up, and two, five, and ten minutes after startup.

### B. Frequency stability vs. input voltage measurement

1. The EUT was placed into the constant temperature chamber and set the temperature to  $20^{\circ}\text{C}$ .
2. The spectrum analyzer (a wide band antenna connected to the spectrum analyzer) was used to read the EUT operating frequency.
3. The EUT is powered with the DC Power Supply, supplied it with 85% and 115% voltage, and measured the EUT operating frequency.

**4.4 Test Data**Operated mode : Continue TransmittingTest Date : Jan. 21, 2007 Temperature : 18 °C Humidity : 70 %

Frequency Stability Versus Environment Temperature (50°C ~ -20°C):

Reference Frequency :				Limit : <u>±0.01%</u>				
Environment Temperature (°C)	Frequency Measure with Time Elapsed							
	0 Minutes		2 Minutes		5 Minutes		10 Minutes	
	MHz	%	MHz	%	MHz	%	MHz	%
50	13.5603	0	13.5603	0	13.5603	0	13.5603	0
40	13.5603	0	13.5603	0	13.5603	0	13.5603	0
30	13.5603	0	13.5603	0	13.5603	0	13.5603	0
20	13.5603	0	13.5603	0	13.5603	0	13.5603	0
10	13.5603	0	13.5603	0	13.5603	0	13.5603	0
0	13.5603	0	13.5603	0	13.5603	0	13.5603	0
-10	13.5603	0	13.5603	0	13.5603	0	13.5603	0
-20	13.5603	0	13.5603	0	13.5603	0	13.5603	0

Frequency Stability Versus Input Power (±15%):

Environment Temperature : 20 °C

Reference Frequency :				Limit : <u>±0.01%</u>				
Power Supplied (Vdc)	Frequency Measure with Time Elapsed							
	0 Minutes		2 Minutes		5 Minutes		10 Minutes	
	MHz	%	MHz	%	MHz	%	MHz	%
2.805	13.5603	0	13.5603	0	13.5603	0	13.5603	0
3.795	13.5603	0	13.5603	0	13.5603	0	13.5603	0

## 5. CONDUCTED EMISSION MEASUREMENT

This EUT is excused from investigation of conducted emission, for it is powered by battery only. According to §15.207 (d), measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.