

Report Number: F690501/RF-RTL007987

Page: 1

of

65

TEST REPORT

of

FCC Part 15 Subpart C §15.247

FCC ID: TQ8-AC111DFEE

Equipment Under Test: DIGITAL CAR AUDIO SYSTEM

Model Name : AC111DFEE (Alt.: AC101DFEE, AC101DFEG.

> AC111DFEG, AC111DFDG, AC111DFGG. AC111DFGN, AC111DFGE, AC111DFGL.

AC111DFUG)

Applicant : Hyundai MOBIS Co., Ltd.

Manufacturer : Hyundai MOBIS Co., Ltd.

Date of Test(s) : 2014.08.14 ~ 2014.08.29

Date of Issue : 2014.09.02

In the configuration tested, the EUT complied with the standards specified above.

Tested By:

Date:

2014.09.02

Harim Lee

Approved By:

Date:

2014.09.02

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



Report Number: F690501/RF-RTL007987 Page: 2 of 65

INDEX

Table of Contents	Page
1. General Information	3
2. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission	8
3. 20 $d\mathbb{B}$ Bandwidth	35
4. Maximum Peak Output Power	42
5. Hopping Channel Separation	44
6. Number of Hopping Frequency	37
7. Time of Occupancy(Dwell Time)	51
8. Antenna Requirement	65



Report Number: F690501/RF-RTL007987 Page: 3 of 65

1. General Information

1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- Wireless Div. 2FL, 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 435-837

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.

Telephone : +82 31 688 0901 FAX : +82 31 688 0921

1.2. Details of Applicant

Applicant : Hyundai MOBIS Co., Ltd.

Address : 69-23, Hansam-ro, Deoksan-myeon, Jincheong-gun, Chungcheongbuk-do

Contact Person : Choi, Seung-Hoon Phone No. : +82 31 260 0098

1.3. Description of EUT

Kind of Product	DIGITAL CAR AUDIO SYSTEM
Model Name	AC111DFEE (Alt.: AC101DFEE, AC101DFEG, AC111DFEG, AC111DFGG, AC11DFGG, AC111DFGG, AC11DFGG, AC111DFGG, AC11DFGG, AC11DFGG
Power Supply	DC 14.4 V
Frequency Range	2 402 Mb ~ 2 480 Mb
Modulation Technique	GFSK, π/4DQPSK, 8DPSK
Number of Channels	79
Antenna Type	Internal Type
Antenna Gain	3.5 dBi

1.4. Declaration by the manufacturer

- Adaptive Frequency Hopping is supported and use at least 20 channels



Report Number: F690501/RF-RTL007987 Page: 4 of 65

1.5. Information about the FHSS characteristics:

1.5.1. Pseudorandom Frequency Hopping Sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The nominal hop rate is 1 600 hops/s.

1.5.2. Equal Hopping Frequency Use

The channels of this system will be used equally over the long-term distribution of the hopsets.

1.5.3. Example of a 79 hopping sequence in data mode:

02, 05, 31, 24, 20, 10, 43, 36, 30, 23, 40, 06, 21, 50, 44, 09, 71, 78, 01, 13, 73, 07, 70, 72, 35, 62, 42, 11, 41, 08, 16, 29, 60, 15, 34, 61, 58, 04, 67, 12, 22, 53, 57, 18, 27, 76, 39, 32, 17, 77, 52, 33, 56, 46, 37, 47, 64, 49, 45, 38, 69, 14, 51, 26, 79, 19, 28, 65, 75, 54, 48, 03, 25, 66, 05, 16, 68, 74, 59, 63, 55

1.5.4. System Receiver Input Bandwidth

Each channel bandwidth is 1 Mb.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

1.5.5. Equipment Description

15.247(a)(1) that the rx input bandwidths shift frequencies in synchronization with the transmitted

15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.

15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate it channels selection/ hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



Report Number: F690501/RF-RTL007987 Page: 5 of 65

1.6. Test Equipment List

Equipment Manufacturer		Model	S/N	Cal Date	Cal Interval	Cal Due.
Signal Generator R&S		SMR40	100272	Jul. 18, 2014	Annual	Jul. 18, 2015
Signal Generator	R&S	SMBV100A	259067	Jun. 25, 2014	Annual	Jun. 25, 2015
Spectrum Analyzer	Agilent	N9030A	MY53120526	Oct. 08, 2013	Annual	Oct. 08, 2014
Spectrum Analyzer	R&S	FSV30	101004	Jun. 25, 2014	Annual	Jun. 25, 2015
High Pass Filter	Wainwright	WHK3.0/18G-6SS	4	Jul. 02, 2014	Annual	Jul. 02, 2015
High Pass Filter	Wainwright	WHK7.5/26.5G-6SS	15	Jul. 02, 2014	Annual	Jul. 02, 2015
Low Pass Filter	Mini circuits	NLP-1200+	V 8979400903-2	Mar. 21, 2014	Annual	Mar. 21, 2015
Power Sensor	R&S	NRP-Z81	100669	Mar. 19, 2014	Annual	Mar. 19, 2015
Bluetooth Tester	TESCOM	TC-3000C	3000C000142	Dec. 12, 2013	Annual	Dec. 12, 2014
Directional Coupler	Directional Coupler KRYTAR		122661	Mar. 18, 2014	Annual	Mar. 18, 2015
DC Power Supply	DC Power Supply Agilent		MY49030063	Dec. 12, 2013	Annual	Dec. 12, 2014
Preamplifier	H.P.	8447D	2944A03909	Jan. 06, 2014	Annual	Jan. 06, 2015
Preamplifier	R&S	SCU 18	1391123	Jan. 14, 2014	Annual	Jan. 14, 2015
Preamplifier	MITEQ Inc.	JS44-18004000-35-8P	1546891	Apr. 28, 2014	Annual	Apr. 28, 2015
Bilog Antenna	TESEQ	VULB9163	396	Jun. 16, 2014	Biennial	Jun. 16, 2016
Loop Antenna	R&S	HFH2-Z2	100118	Jul. 12, 2013	Biennial	Jul. 12, 2015
Horn Antenna	R&S	HF906	100326	Apr. 10, 2013	Biennial	Apr. 10, 2015
Horn Antenna	SCHWARZBECK MESSELEKTRONIK	BBHA9170	BBHA9170431	May. 15, 2014	Biennial	May. 15, 2016
Antenna Master	INN-CO	MM4000	N/A	N/A	N/A	N.C.R.
Turn Table	INN-CO	DS 1200 S	N/A	N/A	N/A	N.C.R.
Test Receiver R&S		ESU26	100109	Mar. 04, 2014	Annual	Mar. 04, 2015
Anechoic Chamber SY Corporation		L × W × H (9.6 m × 6.4 m × 6.6 m)	N/A	N/A	N/A	N.C.R.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



Report Number: F690501/RF-RTL007987 65 Page: 6 of

1.7. Summary of Test Results

The EUT has been tested according to the following specifications:

APPLIED STANDARD:FCC Part15 subpart C								
Section	Test Item	Result						
15.205(a) 15.209 15.247(d)	Transmitter Radiated Spurious Emissions Conducted Spurious Emission	Complied						
15.247(a)(1)	20 dB Bandwidth	Complied						
15.247(b)(1)	Maximum Peak Output Power	Complied						
15.247(a)(1)	Frequency Separation	Complied						
15.247(a)(1)(iii)	Number of Hopping Frequency	Complied						
15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Complied						

1.8. Sample calculation

Where relevant, the following sample calculation is provided:

1.8.1. Conducted test

Offset value (dB) = Directional Coupler(dB) + Cable loss (dB)

1.8.2. Radiation test

Field strength level ($dB\mu V/m$) = Measured level ($dB\mu V$) + Antenna factor (dB) + Cable loss (dB) – amplifier gain (dB)

1.9. Test report revision

Revision	Report number	Date of Issue	Description	
0	F690501/RF-RTL007987	2014.09.02	Initial	



Report Number: F690501/RF-RTL007987 Page: 7 of 65

1.10. Alternative models

Model	name	Specification
Basic model	AC111DFEE	R+CD+MP3+RDS+BT+VR
	AC101DFEE	R+CD+MP3+RDS
	AC101DFEG	R+CD+MP3
	AC111DFEG	R+CD+MP3+BT+VR, Different region
	AC111DFDG	R+CD+MP3+BT+VR, Different region
Alternative model	AC111DFGG	R+CD+MP3+BT, Different region
	AC111DFGN	R+CD+MP3+BT, Different region
	AC111DFGE	R+CD+MP3+BT, Different region
	AC111DFGL	R+CD+MP3+BT, Different region
	AC111DFUG	R+CD+MP3+BT, Different region




Report Number: F690501/RF-RTL007987 Page: 8 of 65

2. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission


2.1. Test Setup

2.1.1. Transmitter Radiated Spurious Emissions

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 klb to 30 Mb Emissions.

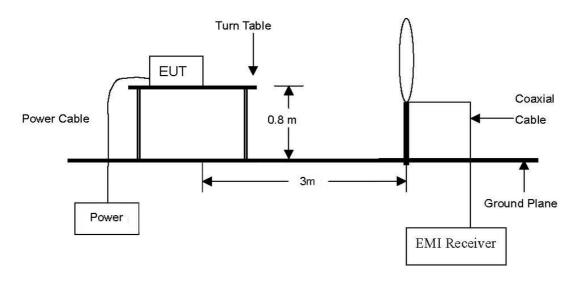

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 $\,\text{Mz}$ to 1 $\,\text{GHz}$ Emissions.

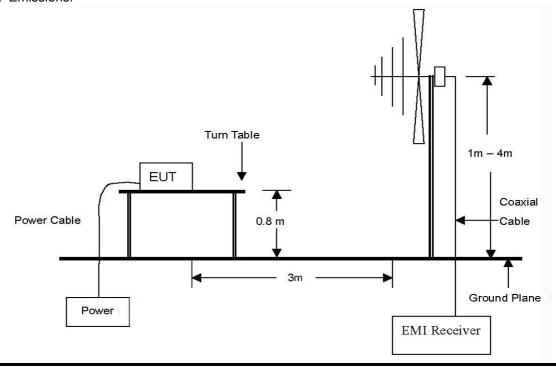


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.




Report Number: F690501/RF-RTL007987 Page: 9 of 65

The diagram below shows the test setup that is utilized to make the measurements for emission .The spurious emissions were investigated form 1 \mbox{GHz} to the 10th harmonic of the highest fundamental frequency or 40 \mbox{GHz} , whichever is lower.

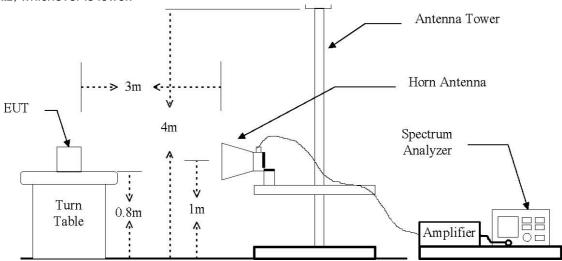

2.1.2. Conducted Spurious Emissions

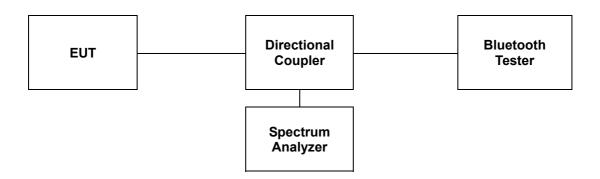



Report Number: F690501/RF-RTL007987 Page: 10 of 65

2.2. Limit

According to §15.247(d), in any 100 klb bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 klb bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section §15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section §15.205(a), must also comply the radiated emission limits specified in section §15.205(c))

According to § 15.209(a), Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (Mb)	Distance (Meters)	Field Strength (dBµV/m)	Field Strength (μ̄//m)
0.009 - 0.490	300	20 log (2 400/F(kHz))	2 400/F(klz)
0.490 – 1.705	30	20 log (24 000/F(kllz))	24 000/F(kHz)
1.705 – 30.0	30	29.54	30
30 - 88	3	40.0	100
88 – 216	3	43.5	150
216 – 960	3	46.0	200
Above 960	3	54.0	500



Report Number: F690501/RF-RTL007987 Page: 11 of 65

2.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates of DA000705, ANSI C63.4-2003

2.3.1. Test Procedures for emission below 30 Mb

- 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
- 3. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 4. The test-receiver system was set to average or quasi peak detect function and Specified Bandwidth with Maximum Hold Mode.

2.3.2. Test Procedures for emission from above 30 Mb

- 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- 3. The antenna is a bi-log antenna, a horn antenna and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode
- 6. If the emission level of the EUT in peak mode was 10 $\,\mathrm{dB}$ lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 $\,\mathrm{dB}$ margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.



Report Number: F690501/RF-RTL007987 Page: 12 of 65

NOTE;

All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 \(\text{ktz} \) for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1 \(\text{Gtz} \).
- 2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 Mb for Peak detection and frequency above 1 Gb.
- 3. The resolution bandwidth of test receiver/spectrum analyzer is 1 Mb and the video bandwidth is $1/T_{on}$ Hz $(T_{on}$ = On-time of the Pulsed emission) for Average detection (AV) at frequency above 1 Gb.
 - VBW = 360 $_{\rm HZ} \ge 1/T_{\rm on}$ $_{\rm HZ}$, pulse width in seconds ($T_{\rm on}$ = 2.91 ms). Refer to the DH5, 3DH5 of Time of Occupancy (Dwell Time) test item.
- 4. When Average result is different from peak result over 20 dB (over-averaging), According to 15.35 (c), as a "duty cycle correction factor", pulse averaging with 20 log(duty cycle) has to be used.
- 5. To get a maximum emission level from the EUT, the EUT is manipulated through three orthogonal planes.

2.3.2. Test Procedures for Conducted Spurious Emissions

2.3.2.1. Band-edge Compliance of RF Conducted Emissions

The transmitter output was connected to the spectrum analyzer.

Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation.

RBW ≥ 100 kl/z

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

2.3.2.2. Spurious RF Conducted Emissions

The transmitter output was connected to the spectrum analyzer.

RBW = 100 kllz

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



Report Number: F690501/RF-RTL007987 Page: 13 of 65

2.4. Test Results

Ambient temperature : $(23 \pm 1)^{\circ}$ C Relative humidity : 47 % R.H.

2.4.1. Spurious Radiated Emission

The frequency spectrum from 9 kW to 1 000 Mb was investigated. Emission levels are not reported much lower than the limits by over 30 dB. All reading values are peak values.

Radiated Emissions		Ant	Correctio	n Factors	Total FCC Lin		imit	
Frequency (M地)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dBµV/m)	Limit (dBµN/m)	Margin (dB)
33.36	44.04	Peak	٧	17.06	-27.20	33.90	40.00	6.10
37.56	37.10	Peak	Н	16.55	-27.15	26.50	40.00	13.50
135.21	39.52	Peak	٧	12.05	-26.07	25.50	43.50	18.00
142.60	44.42	Peak	Н	13.12	-25.94	31.60	43.50	11.90
166.41	40.45	Peak	٧	9.79	-25.64	24.60	43.50	18.90
538.24	25.20	Peak	V	19.01	-25.01	19.20	46.00	26.80
Above 600.00	Not Detected	-	-	-	-	-	-	-

Remark:

- 1. Spurious emissions for all channels and modes were investigated and almost the same below 1 6Hz.
- 2. Reported spurious emissions are in **EDR / 3DH5 / Middle channel** as worst case among other modes.
- 3. Radiated spurious emission measurement as below (Actual = Reading + Antenna Factor + Amp + CL)



Report Number: F690501/RF-RTL007987 Page: 14 of 65

2.4.2. Spurious Radiated Emission

The frequency spectrum above 1 000 $\, \text{Mb} \,$ was investigated. Emission levels are not reported much lower than the limits by over 30 $\, \text{dB} .$

Operating Mode: GFSK(1 Mbps)

A. Low Channel (2 402 账)

Fundamental Level			Fundamental Level Ant. Correction Factors			
Frequency Reading Detect (組版) (dBμV) Mode			Pol.	AF (dB/m)	CL (dB)	Actual (dBµV/m)
2 401.97	50.74	Peak	V	28.07	6.42	85.23

Radia	Radiated Emissions			Ant Correction Factors			FCC	Limit
Frequency (Mb)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/ m)	CL (dB)	Actual (dBµN/m)	Limit (dBµN/m)	Margin (dB)
*2 310.00	22.70	Peak	V	27.77	6.48	56.95	74.00	17.05
*2 310.00	12.31	Average	V	27.77	6.48	46.56	54.00	7.44
*2 386.48	25.19	Peak	V	28.10	6.49	59.78	74.00	14.22
*2 386.48	12.85	Average	V	28.10	6.49	47.44	54.00	6.56
*2 390.00	24.32	Peak	V	28.08	6.47	58.87	74.00	15.13
*2 390.00	11.97	Average	V	28.08	6.47	46.52	54.00	7.48

Radi	ated Emissi	ions	Ant	Ant Correction Factors		Total FCC I		Limit
Frequency (Mb)			Pol.	AF (dB/ m)	AMP + CL (dB)	Actual (dΒμV/m)	Limit (dBµN/m)	Margin (dB)
3 145.60	59.48	Peak	V	30.14	-35.51	54.11	65.23	11.12
*4 804.41	52.86	Peak	V	32.62	-33.67	51.81	74.00	22.19
*4 804.41	50.11	Average	V	32.62	-33.67	49.06	54.00	4.94
Above 4 900.00	Not detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



Report Number: F690501/RF-RTL007987 Page: 15 of 65

B. Middle Channel (2 441 灿z)

Fundamental Level			Ant.	Correction	n Factors	Total
Frequency (쌘)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dBµV/m)
2 441.04	51.05	Peak	V	28.01	6.76	85.82

Radia	Radiated Emissions		Ant	Correctio	n Factors	Total	FCC	Limit
Frequency (Mb)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/ m)	AMP + CL (dB)	Actual (dBµN/m)	Limit (dBµN/m)	Margin (dB)
3 145.60	59.75	Peak	V	30.14	-35.51	54.38	65.82	11.44
*4 882.00	54.76	Peak	V	33.01	-33.46	54.31	74.00	19.69
*4 882.00	53.41	Average	V	33.01	-33.46	50.96	54.00	3.04
Above 4 900.00	Not detected	-	-	-	-	-	-	-



Report Number: F690501/RF-RTL007987 Page: 16 of 65

C. High Channel (2 480 Mb)

Fundamental Level			Ant.	Correction	n Factors	Total
Frequency (쌘)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dΒμV/m)
2 480.02	50.95	Peak	V	28.13	6.60	85.68

Radia	ted Emissio	ons	Ant	Correctio	n Factors	Total	FCC	Limit
Frequency (Mb)	Reading (dBµV)	Detect Mode	Pol.	AF (dB/ m)	CL (dB)	Actual (dBµN/m)	Limit (dBµN/m)	Margin (dB)
*2 483.50	24.42	Peak	V	28.17	6.65	59.24	74.00	14.76
*2 483.50	13.20	Average	V	28.17	6.65	48.02	54.00	5.98
*2 488.96	26.29	Peak	V	28.23	6.73	61.25	74.00	12.75
*2 488.96	13.24	Average	V	28.23	6.73	48.20	54.00	5.80
*2 500.00	24.35	Peak	V	28.31	6.88	59.54	74.00	14.46
*2 500.00	13.05	Average	V	28.31	6.88	48.24	54.00	5.76

Radia	ted Emissic	ons	Ant	Correction	n Factors	Total	FCC	Limit
Frequency (Mb)	Reading (dBµV)	Detect Mode	Pol.	AF (dB/ m)	AMP + CL (dB)	Actual (dBµV/m)	Limit (dBµN/m)	Margin (dB)
3 145.60	59.88	Peak	V	30.14	-35.51	54.51	65.68	11.17
*4 960.98	53.32	Peak	V	33.17	-33.36	53.13	74.00	20.87
*4 960.98	51.33	Average	V	33.17	-33.36	50.84	54.00	3.16
Above 5 000.00	Not detected	-	-	-	-	-	-	-



Report Number: F690501/RF-RTL007987 Page: 17 of 65

Operating Mode: 8DPSK(3 Mbps)

A. Low Channel (2 402 账)

Fundamental Level			Ant.	Correction	n Factors	Total
Frequency (Mb)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dBµV/m)
2 402.01	50.81	Peak	V	28.07	6.42	85.30

Radia	ted Emissio	ons	Ant	Correctio	n Factors	Total	FCC	Limit
Frequency (Mb)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/ m)	CL (dB)	Actual (dΒμΝ/m)	Limit (dBµN/m)	Margin (dB)
*2 310.00	24.91	Peak	V	27.77	6.48	59.16	74.00	14.84
*2 310.00	12.36	Average	V	27.77	6.48	46.61	54.00	7.39
*2 382.48	26.18	Peak	V	28.13	6.51	60.82	74.00	13.18
*2 382.48	12.89	Average	V	28.13	6.51	47.53	54.00	6.47
*2 390.00	23.43	Peak	V	28.08	6.47	57.98	74.00	16.02
*2 390.00	12.76	Average	V	28.08	6.47	47.31	54.00	6.69

Radia	Radiated Emissions		Ant	Correctio	n Factors	Total	FCC	Limit
Frequency (M比)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/ m)	AMP + CL (dB)	Actual (dBµV/m)	Limit (dBµV/m)	Margin (dB)
3 145.60	59.94	Peak	V	30.14	-35.51	54.57	65.30	10.73
*4 803.74	48.10	Peak	V	32.61	-33.67	47.04	74.00	26.96
*4 803.74	38.14	Average	V	32.61	-33.67	37.08	54.00	16.92
Above 4 900.00	Not detected	-	1	-	-	-	-	-



Report Number: F690501/RF-RTL007987 Page: 18 of 65

B. Middle Channel (2 441 灿)

Fundamental Level			Ant.	Correction	n Factors	Total
Frequency (쌘)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/ m)	CL (dB)	Actual (dΒμV/m)
2 441.97	50.97	Peak	V	28.02	6.78	85.77

Radia	Radiated Emissions		Ant	Correctio	n Factors	Total	FCC	Limit
Frequency (M比)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/ m)	AMP + CL (dB)	Actual (dBµN/m)	Limit (dBµN/m)	Margin (dB)
3 145.60	59.76	Peak	V	30.14	-35.51	54.39	65.77	11.38
*4 881.28	51.83	Peak	V	33.01	-33.46	51.38	74.00	22.62
*4 881.28	42.75	Average	V	33.01	-33.46	42.30	54.00	11.70
Above 4 900.00	Not detected	-	-	-	-	-	-	-



Report Number: F690501/RF-RTL007987 Page: 19 of 65

C. High Channel (2 480 Mb)

Fundamental Level			Ant.	Correction	n Factors	Total
Frequency (쌘)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dΒμV/m)
2 480.05	50.73	Peak	V	28.13	6.60	85.46

Radia	ted Emissio	ons	Ant	Correction	n Factors	Total	FCC	Limit
Frequency (雕)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/ m)	CL (dB)	Actual (dBµN/m)	Limit (dBµV/m)	Margin (dB)
*2 483.50	25.15	Peak	V	28.17	6.65	59.97	74.00	14.03
*2 483.50	13.10	Average	V	28.17	6.65	47.92	54.00	6.08
*2 487.25	26.83	Peak	V	28.21	6.70	61.74	74.00	12.26
*2 487.25	13.23	Average	V	28.21	6.70	48.14	54.00	5.86
*2 500.00	25.36	Peak	V	28.31	6.88	60.55	74.00	13.45
*2 500.00	13.15	Average	V	28.31	6.88	48.34	54.00	5.66

Radia	Radiated Emissions			Correctio	n Factors	Total	FCC	Limit
Frequency (Mb)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/ m)	AMP + CL (dB)	Actual (dBµN/m)	Limit (dBµV/m)	Margin (dB)
3 145.60	59.91	Peak	V	30.14	-35.51	54.54	65.46	10.92
*4 959.84	44.86	Peak	V	33.16	-33.33	44.69	74.00	29.31
*4 959.84	36.35	Average	V	33.16	-33.33	36.18	54.00	17.82
Above 5 000.00	Not detected	-	-	-	-	-	-	-



Report Number: F690501/RF-RTL007987 Page: 20 of 65

Remarks:

- 1. "*" means the restricted band.
- 3. Radiated emissions measured in frequency above 1 000 Mb were made with an instrument using peak/average detector mode.
- 4. Average test would be performed if the peak result were greater than the average limit.
- 5. Actual = Reading + AF + AMP + CL + Duty factor




Report Number: F690501/RF-RTL007987 Page: 21 of 65

2.4.3. Spurious RF Conducted Emissions: Plot of Spurious RF Conducted Emission

Operating Mode: GFSK(1 Mbps)


Low Channel

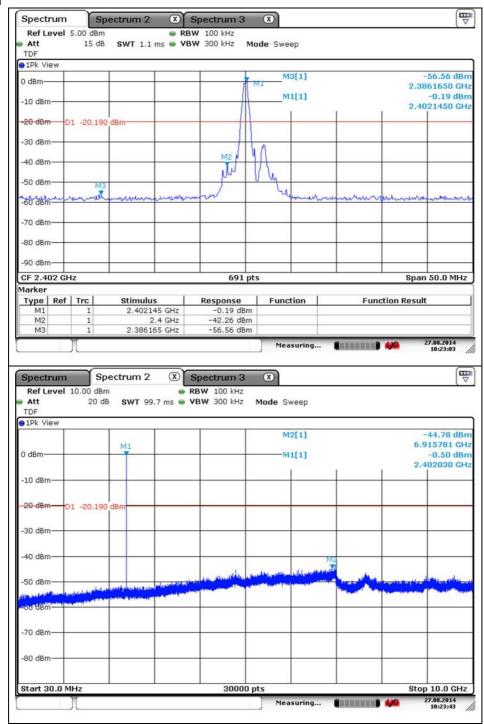

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.




Report Number: F690501/RF-RTL007987 Page: 22 of 65

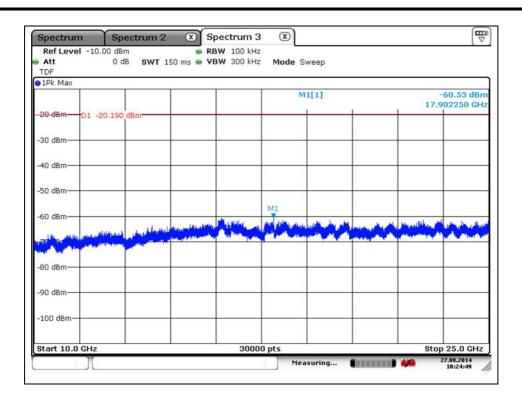




Report Number: F690501/RF-RTL007987 Page: 23 of 65

Middle Channel

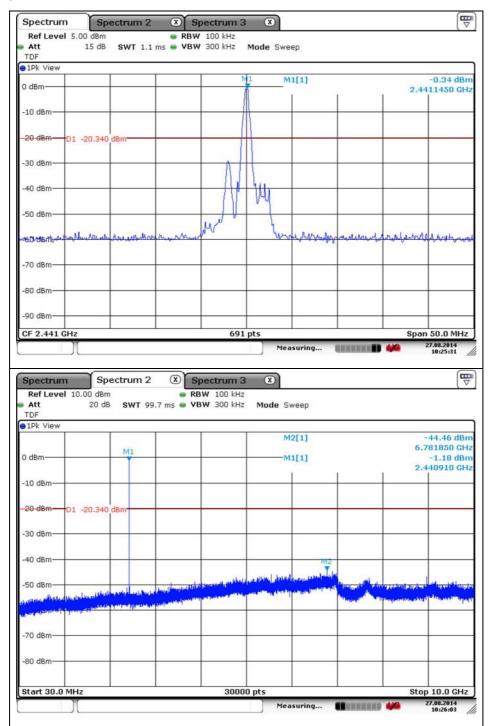




Report Number: F690501/RF-RTL007987 Page: 24 of 65

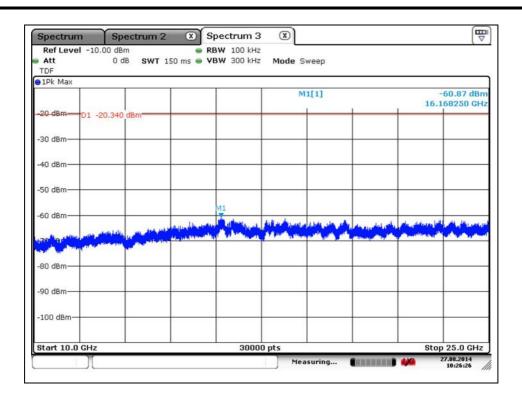




Report Number: F690501/RF-RTL007987 Page: 25 of 65

High Channel

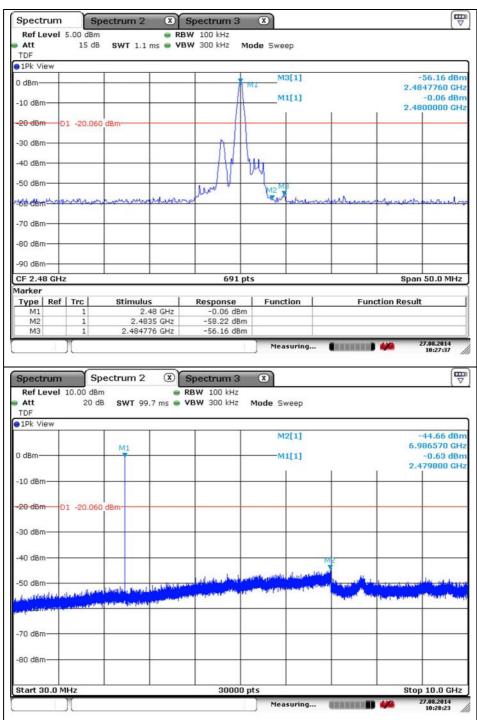




Report Number: F690501/RF-RTL007987 Page: 26 of 65

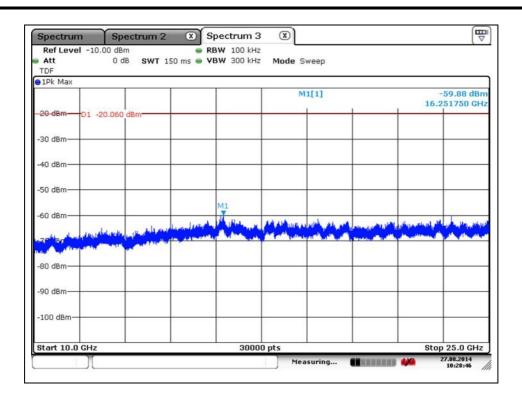



Report Number: F690501/RF-RTL007987 Page: 27 of 65

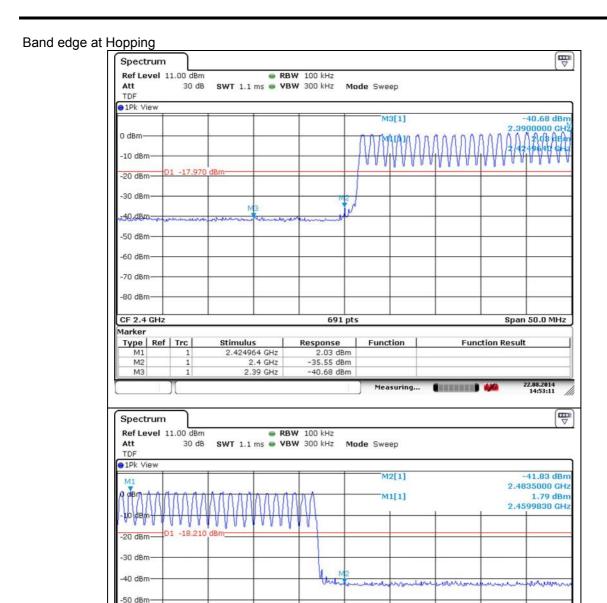

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

691 pts

Response

1.79 dBm 41.83 dBm Function

-60 dBm -70 dBm -80 dBm

Marker

M1 M2

CF 2.4835 GHz

Type | Ref | Trc |

Stimulus

2.459983 GHz 2.4835 GHz Span 50.0 MHz

Function Result


•



Report Number: F690501/RF-RTL007987 Page: 28 of 65


Operating Mode: 8DPSK(3 Mbps)

Low Channel

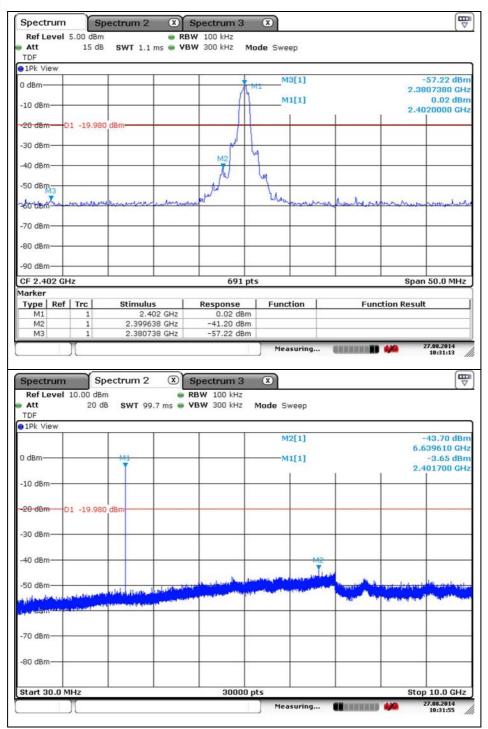




Report Number: F690501/RF-RTL007987 Page: 29 of 65

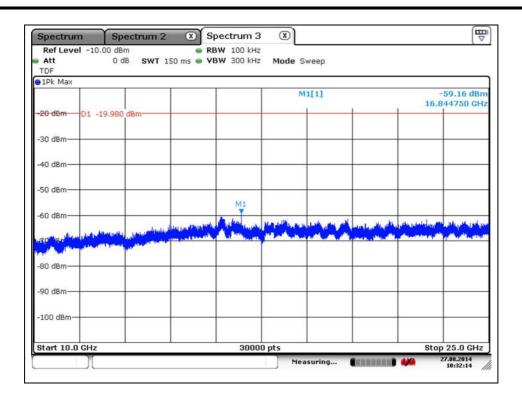




Report Number: F690501/RF-RTL007987 Page: 30 of 65

Middle Channel

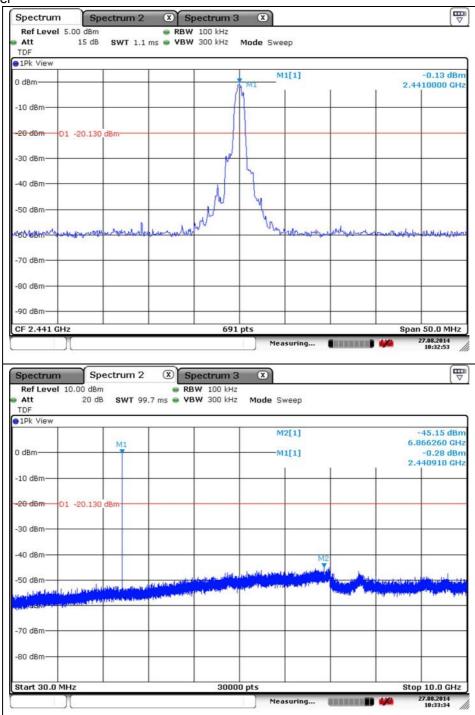




Report Number: F690501/RF-RTL007987 Page: 31 of 65

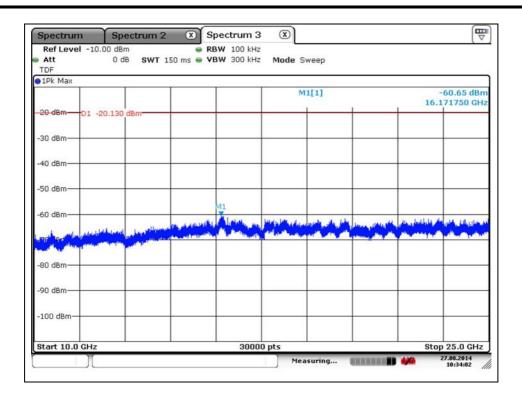




Report Number: F690501/RF-RTL007987 Page: 32 of 65

High Channel

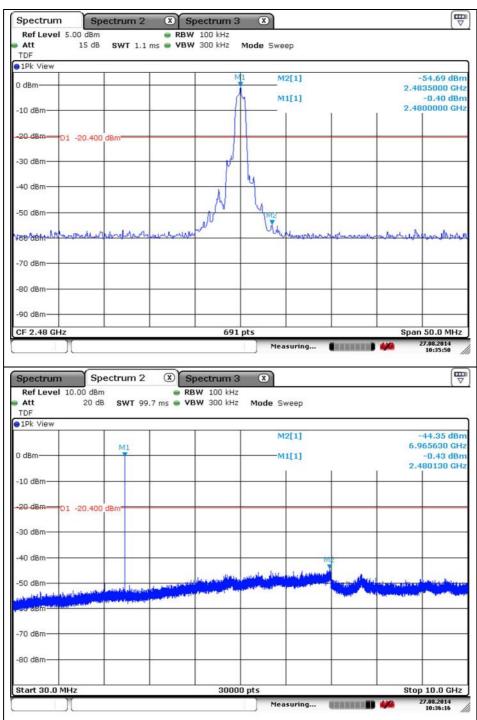




Report Number: F690501/RF-RTL007987 Page: 33 of 65

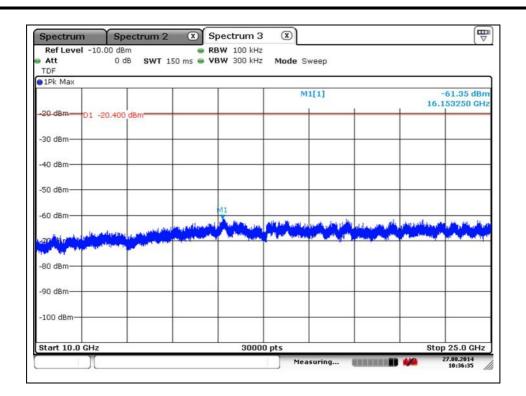



Report Number: F690501/RF-RTL007987 Page: 34 of 65

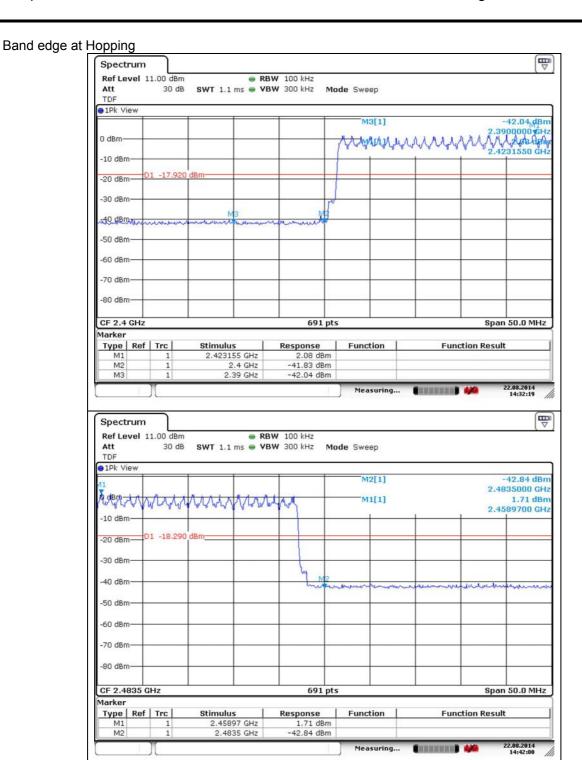




Report Number: F690501/RF-RTL007987 Page: 35 of 65

3. 20 dB Bandwidth Measurement

3.1. Test Setup

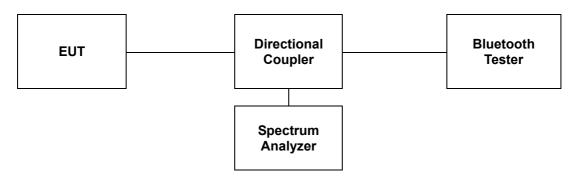

3.2. Limit

Limit: Not Applicable

3.3. Test Procedure

All data rates and modes were investigated for this test. The full data for the worst case data rate are reported in this section.

The test follows DA 00-705.

The 20 dB band width was measured with a spectrum analyzer connected to RF antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency.

Use the following spectrum analyzer setting:

Span = approximately 2 to 3 times the 20 $\,^{dB}$ bandwidth, centered on a hopping channel. RBW = greater than 1 % of the 20 $\,^{dB}$ bandwidth VBW \geq RBW Sweep = auto Detector = peak Trace = max hold

The marker-to-peak function to set the mark to the peak of the emission. Use the marker-delta function to measure 20 $\,\mathrm{dB}$ down one side of the emission. Reset the function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is 20 $\,\mathrm{dB}$ bandwidth of the emission.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



Report Number: F690501/RF-RTL007987 Page: 36 of 65

3.4. Test Results

Operation Mode	Data Rate	Channel	Channel Frequency (쌘)	20 dB Bandwidth (船)
GFSK	1 Mbps	Low	2 402	0.93
		Middle	2 441	0.95
		High	2 480	0.93
π/4DQPSK	2 Mbps	Low	2 402	1.25
		Middle	2 441	1.27
		High	2 480	1.24
8DPSK	3 Mbps	Low	2 402	1.27
		Middle	2 441	1.27
		High	2 480	1.29




Report Number: F690501/RF-RTL007987 Page: 37 of 65


20 dB Bandwidth

Operating Mode: GFSK

Low Channel

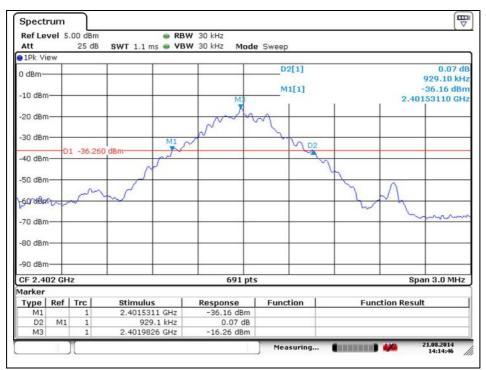


Middle Channel

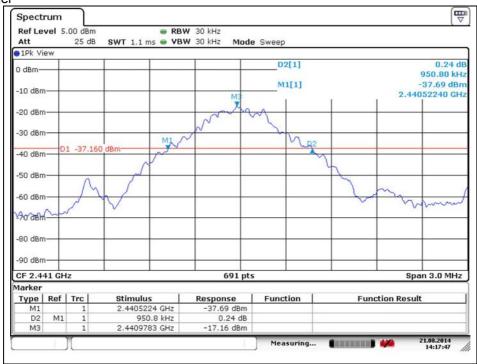




Report Number: F690501/RF-RTL007987 Page: 38 of 65

High Channel

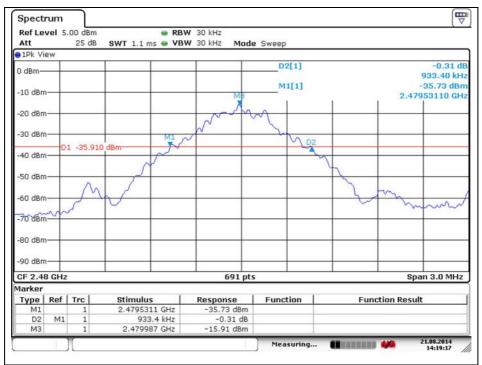

Operating Mode: π/4DQPSK


Low Channel

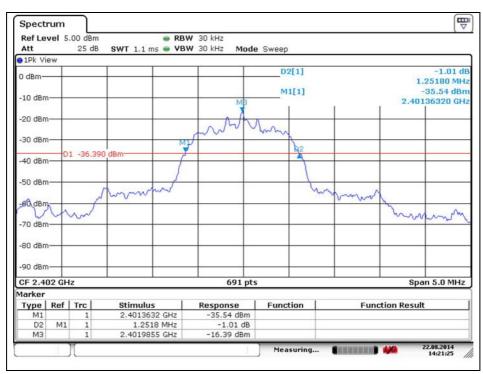




Report Number: F690501/RF-RTL007987 Page: 39 of 65

Middle Channel

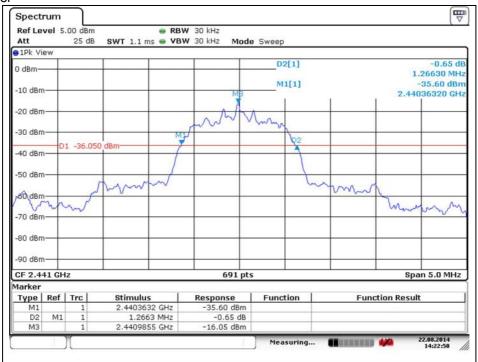

High Channel

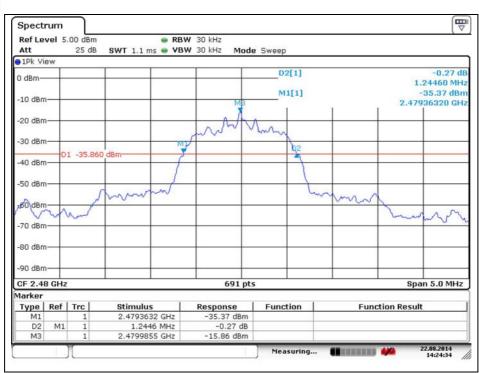





Report Number: F690501/RF-RTL007987 Page: 40 of 65

Operating Mode: 8DPSK

Low Channel

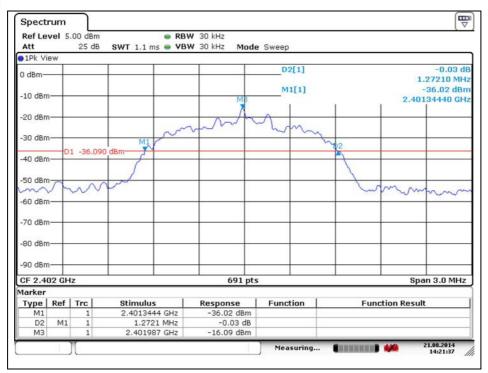


Middle Channel

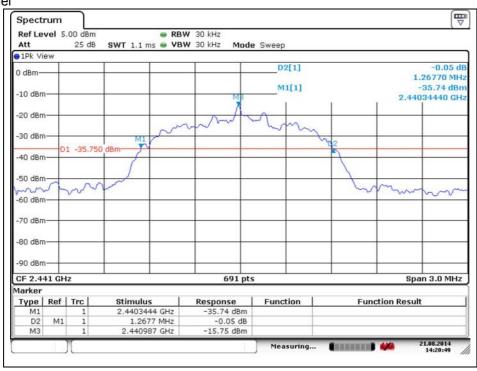



Report Number: F690501/RF-RTL007987 Page: 41 of 65

High Channel

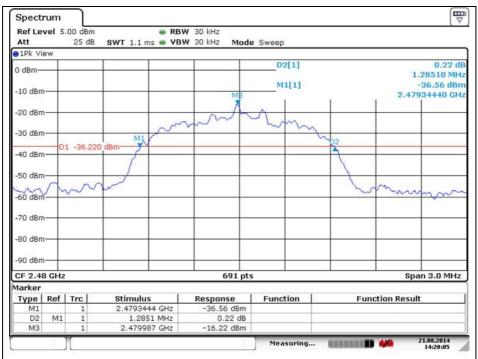




Report Number: F690501/RF-RTL007987 Page: 42 of 65

4. Maximum Peak Output Power Measurement

4.1. Test Setup

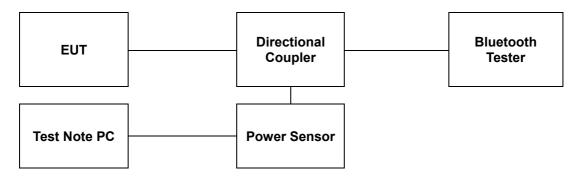

4.2. Limit

The maximum peak output power of the intentional radiator shall not exceed the following:

- 1. §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
- 2. §15.247(b)(1), For frequency hopping systems operating in the 2 400 − 2 483.5 Mb employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725 − 5 805 Mb band: 1 Watt.

4.3. Test Procedure

All data rates and modes were investigated for this test. The test follows DA 00-705. Using the power sensor instead of a spectrum analyzer.

- 1. Place the EUT on the table and set it in the transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Power sensor.
- 3. Test program: (S/W name: R&S Power Viewer, Version: 3.2.0)
- 4. Measure peak & average power each channel.



Report Number: F690501/RF-RTL007987 Page: 43 of 65

4.4. Test Results

Ambient temperature : (23 \pm 1) $^{\circ}$ C Relative humidity : 47 $^{\circ}$ R.H.

Operation Mode	Data Rate	Channel	Channel Frequency (쌘)	Attenuator + Cable offset (dB)	Peak Power Result (dB m)	Peak Power Limit (dB m)
	1 Mbps	Low	2 402	16.26	3.29	30.00
GFSK		Middle	2 441	16.30	3.32	30.00
		High	2 480	16.35	3.33	30.00
	2 Mbps	Low	2 402	16.26	3.30	20.97
π/4DQPSK		Middle	2 441	16.30	3.30	20.97
		High	2 480	16.35	3.31	20.97
8DPSK	3 Mbps	Low	2 402	16.26	3.33	20.97
		Middle	2 441	16.30	3.37	20.97
		High	2 480	16.35	3.32	20.97

Remark:


In the case of AFH, the limit for peak power is $0.125~\mathrm{W}$



Report Number: F690501/RF-RTL007987 Page: 44 of 65

5. Hopping Channel Separation

5.1. Test Setup

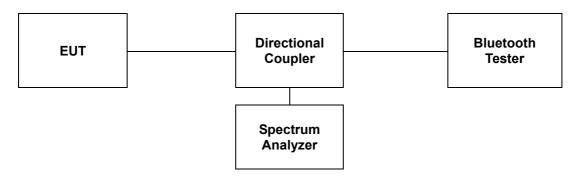

5.2. Limit

§15.247(a)(1) Frequency hopping system operating in 2 400 - 2 483.5 Mb. Band may have hopping channel carrier frequencies that are separated by 25 kb or two-third of 20 dB bandwidth of the hopping channel, whichever is is greater, provided the systems operate with an output power no greater than 125 mW.

5.3. Test Procedure

All data rates and modes were investigated for this test. The full data for the worst case data rate are reported in this section. The test follows DA 00-705.

The device is operating in hopping mode between 79 channels and also supporting Adaptive Frequency Hopping with hopping between 20 channels. As compared with each operating mode, 79 channels are chosen as a representative for test.

Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels.

RBW = 1 % of the span.

VBW = RBW

Sweep = auto

Detector = peak

Trace = max hold.

Allow the trace to stabilize. Use the marker-delta function to determine the between the peaks of the adjacent channels.



Report Number: F690501/RF-RTL007987 Page: 45 of 65

5.4. Test Results

Ambient temperature : (23 \pm 1) $^{\circ}$ C Relative humidity : 47 $^{\circ}$ R.H.

Operation Mode	Channel (Middle)	Adjacent Hopping Channel Separation (妣)	Two-third of 20 dB Bandwidth (战)	Minimum Bandwidth (龀)
GFSK	2 441 Mb	1 000	633	25
8DPSK	2 441 MHz	1 000	847	25


Note;


Measurement is made with EUT operating in hopping mode between 79 channels providing a worse case scenario as compared to AFH mode hopping between 20 channels.



Report Number: F690501/RF-RTL007987 Page: 46 of 65

Operating Mode: GFSK

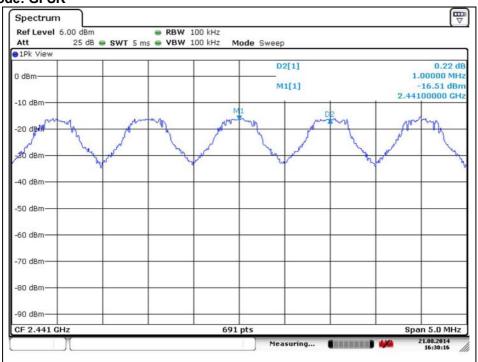

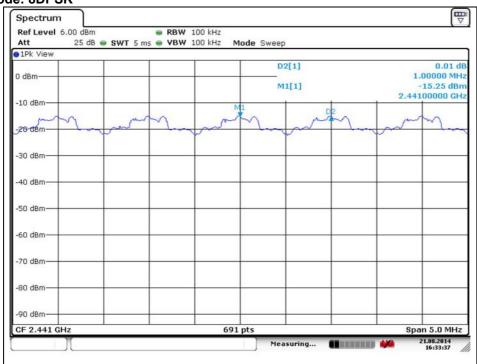




Report Number: F690501/RF-RTL007987 Page: 47 of 65

6. Number of Hopping Frequency

6.1. Test Setup

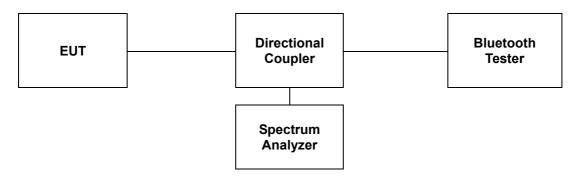

6.2. Limit

§15.247(a)(1)(iii), Frequency hopping systems in the 2 400–2 483.5 Mb band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

6.3. Test Procedure

All data rates and modes were investigated for this test. The full data for the worst case data rate are reported in this section. The test follows DA000705.

The device supports Adaptive Frequency Hopping and will use a minimum of 20 channels of the 79 available channels.

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna the port to the Spectrum analyzer
- 3. Set spectrum analyzer Start = 2 400 Mb, Stop = 2 441.5 Mb, Sweep=sweep and Start = 2 441.5 Mb, Stop = 2 483.5 Mb, Sweep = sweep. Detector = peak.
- 4. Set the spectrum analyzer as RBW, VBW = 500 klb.
- 5. Max hold, allow the trace to stabilize and count how many channel in the band.



Report Number: F690501/RF-RTL007987 Page: 48 of 65

6.4. Test Results

Ambient temperature : (23 \pm 1) $^{\circ}$ C Relative humidity : 47 $^{\circ}$ R.H.

Operation Mode	Number of Hopping Frequency	Limit
GFSK	79	≥ 15
8DPSK	79	≥ 15


Remark:

Measurement is made with EUT operating in hopping mode between 79 channels providing a worse case scenario as compared to AFH mode hopping between 20 channels.




Report Number: F690501/RF-RTL007987 Page: 49 of 65

Operating Mode: GFSK

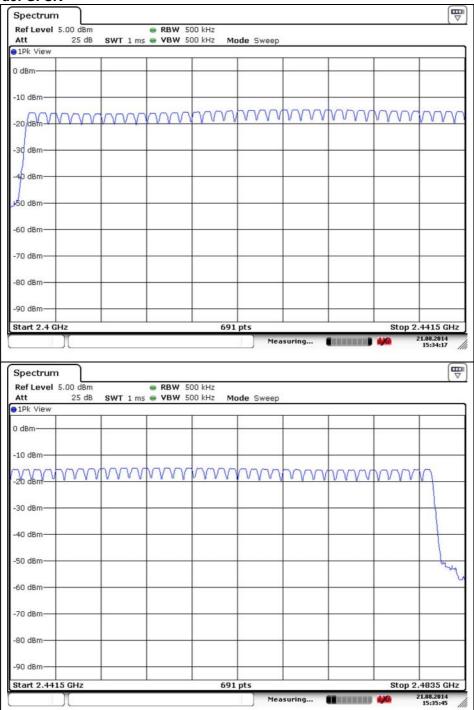



Report Number: F690501/RF-RTL007987 Page: 50 of 65

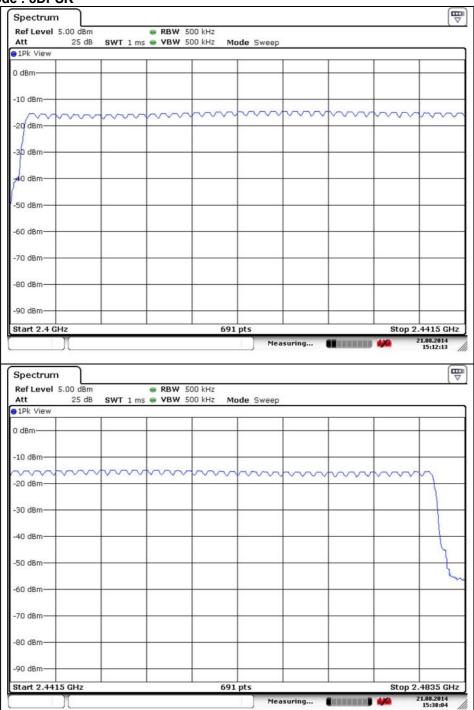




Report Number: F690501/RF-RTL007987 Page: 51 of 65

7. Time of Occupancy (Dwell Time)

7.1. Test Set up

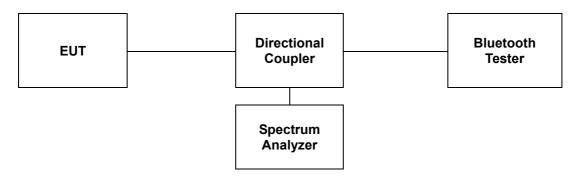

7.2. Limit

§15.247(a)(1)(iii) For frequency hopping system operating in the 2 $400 - 2483.5 \, \text{Mb}$ band, the average time of occupancy on any frequency shall not be greater than 0.4 second within a 31.6 second period.

A period time = 0.4(s) * 79 = 31.6(s)

*Adaptive Frequency Hopping

A period time = 0.4(s) * 20 = 8 (s)



Report Number: F690501/RF-RTL007987 Page: 52 of 65

7.3. Test Procedure

All data rates and modes were investigated for this test. The full data for the worst case data rate are reported in this section. The test follows DA 00-705.

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable.
- 3. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- 4. The Bluetooth has 3 type of payload, DH1, DH3, DH5 and 3-DH1, 3-DH3, 3-DH5. The hopping rate is insisted of 1 600 per second.

The EUT must have its hopping function enabled. Use the following spectrum analyzer setting:

Span = zero span, centered on a hopping channel

RBW = 1 Mbz

VBW = RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector = peak

Trace = max hold

Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation repeat this test for each variation.



Report Number: F690501/RF-RTL007987 Page: 53 of 65

7.4. Test Results

Ambient temperature : (23 \pm 1) $^{\circ}$ C Relative humidity : 47 $^{\circ}$ R.H.

7.4.1. Packet Type: DH1, 3-DH1

Operation Mode	Frequency	Dwell Time (ms)	Time of occupancy on the Tx Channel in 31.6 sec (ms)	Limit for time of occupancy on the Tx Channel in 31.6 sec (ms)
GFSK	2 441 Mb	0.39	124.80	400
8DPSK	2 441 Mb	0.41	131.20	400


Note:


Time of occupancy on the TX channel in 31.6 sec In case of GFSK, $0.39 \times \{(1600 \div 2) / 79\} \times 31.6 = 124.80 \text{ ms}$ In case of 8DPSK, $0.41 \times \{(1600 \div 2) / 79\} \times 31.6 = 131.20 \text{ ms}$



Report Number: F690501/RF-RTL007987 Page: 54 of 65

Operating Mode: GFSK

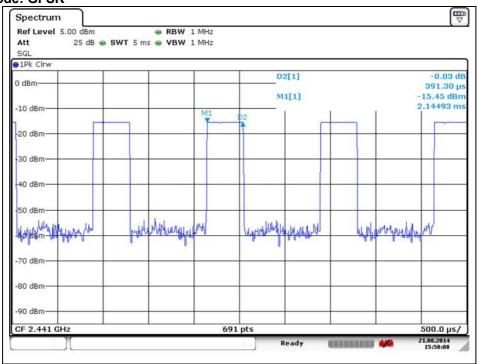

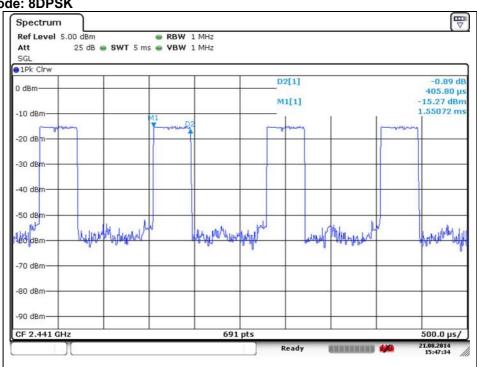



Report Number: F690501/RF-RTL007987 Page: 55 of 65

7.4.2. Packet Type: DH3, 3-DH3

Operation Mode	Frequency	Dwell Time (ms)	Time of occupancy on the Tx Channel in 31.6 sec (ms)	Limit for time of occupancy on the Tx Channel in 31.6 sec (ms)
GFSK	2 441 Mbz	1.65	264.00	400
8DPSK	2 441 Mbz	1.65	264.00	400


Note:


Time of occupancy on the TX channel in 31.6 sec In case of GFSK and 8DPSK, 1.65 × $\{(1600 \div 4) / 79\}$ × 31.6 = 264.00 ms



Report Number: F690501/RF-RTL007987 Page: 56 of 65

Operating Mode: GFSK

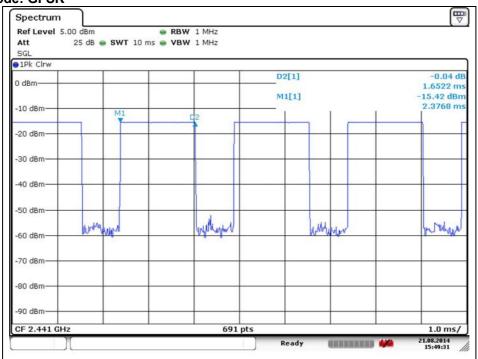

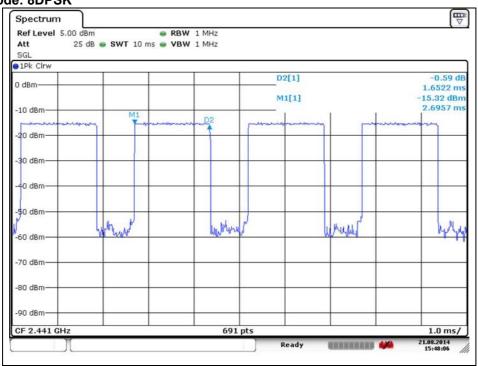



Report Number: F690501/RF-RTL007987 Page: 57 of 65

7.4.3. Packet Type: DH5, 3-DH5

Operation Mode	Frequency	Dwell Time (ms)	Time of occupancy on the Tx Channel in 31.6 sec (ms)	Limit for time of occupancy on the Tx Channel in 31.6 sec (ms)
GFSK	2 441 Mbz	2.90	309.33	400
8DPSK	2 441 Mb	2.91	310.40	400


Note:


Time of occupancy on the TX channel in 31.6 sec In case of GFSK, 2.90 × $\{(1600 \div 6) / 79\}$ × 31.6 = 309.33 ms In case of 8DPSK, 2.91 × $\{(1600 \div 6) / 79\}$ × 31.6 = 310.40 ms



Report Number: F690501/RF-RTL007987 Page: 58 of 65

Operating Mode: GFSK

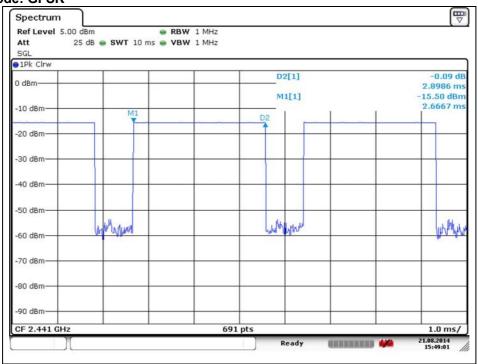

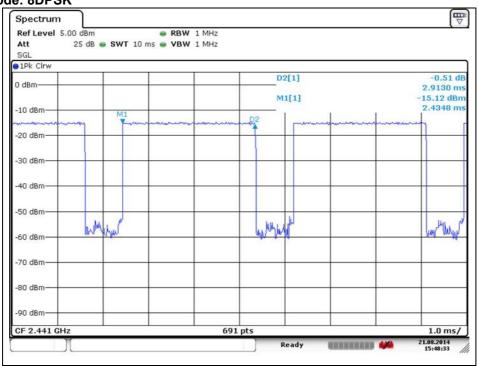



Report Number: F690501/RF-RTL007987 Page: 59 of 65

7.4.4. Packet Type: DH1, 3-DH1 (Adaptive Frequency Hopping)

Operation Mode	Frequency	Dwell Time (ms)	Time of occupancy on the Tx Channel in 8 sec (ms)	Limit for time of occupancy on the Tx Channel in 8 sec (ms)
GFSK	2 441 Mbz	0.39	62.40	400
8DPSK	2 441 Mb	0.41	65.60	400


Note:


Time of occupancy on the TX channel in 8 sec In case of GFSK, $0.39 \times \{(800 \div 2) / 20\} \times 8 = 62.40$ ms In case of 8DPSK, $0.41 \times \{(800 \div 2) / 20\} \times 8 = 65.60$ ms



Report Number: F690501/RF-RTL007987 Page: 60 of 65

Operating Mode: GFSK

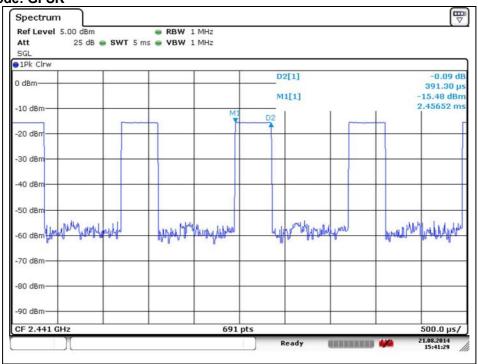

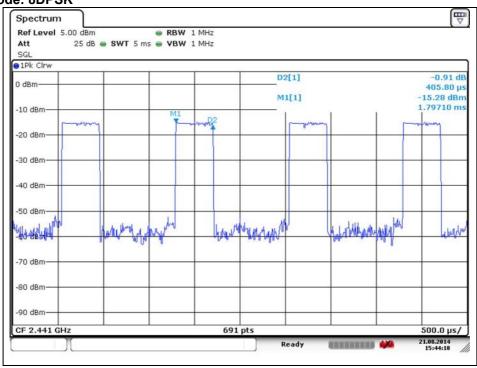



Report Number: F690501/RF-RTL007987 Page: 61 of 65

7.4.5. Packet Type: DH3, 3-DH3 (Adaptive Frequency Hopping)

Operation Mode	Frequency	Dwell Time (ms)	Time of occupancy on the Tx Channel in 8 sec (ms)	Limit for time of occupancy on the Tx Channel in 8 sec (ms)
GFSK	2 441 Mb	1.65	132.00	400
8DPSK	2 441 Mb	1.65	132.00	400


Note:


Time of occupancy on the TX channel in 8 sec In case of GFSK and 8DPSK, 1.65 × $\{(800 \div 4) / 20\} \times 8 = 132.00$ ms



Report Number: F690501/RF-RTL007987 Page: 62 of 65

Operating Mode: GFSK

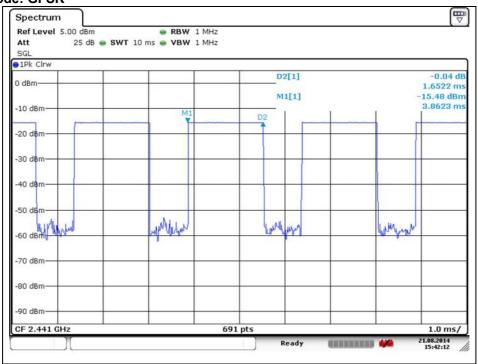

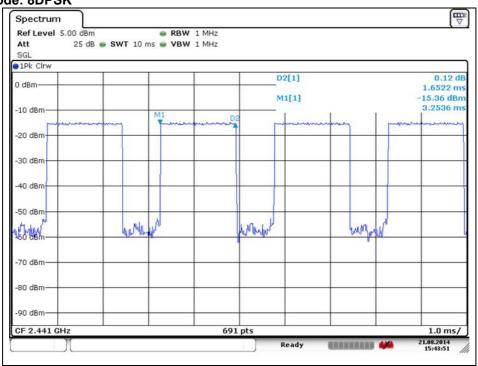



Report Number: F690501/RF-RTL007987 Page: 63 of 65

7.4.6. Packet Type: DH5, 3-DH5 (Adaptive Frequency Hopping)

Operation Mode	Frequency	Dwell Time (ms)	Time of occupancy on the Tx Channel in 8 sec (ms)	Limit for time of occupancy on the Tx Channel in 8 sec (ms)
GFSK	2 441 Mbz	2.90	154.67	400
8DPSK	2 441 Mb	2.91	155.20	400


Note:


Time of occupancy on the TX channel in 8 sec In case of GFSK, 2.90 × $\{(800 \div 6) / 20\} \times 8 = 154.67$ ms In case of 8DPSK, 2.91 × $\{(800 \div 6) / 20\} \times 8 = 155.20$ ms



Report Number: F690501/RF-RTL007987 Page: 64 of 65

Operating Mode: GFSK

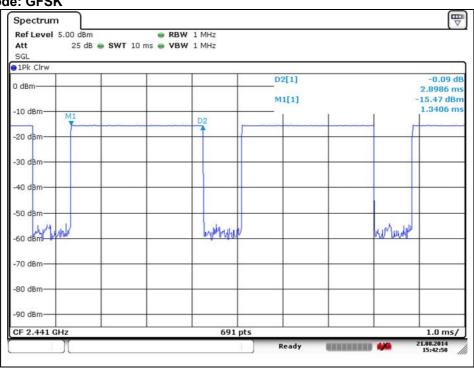

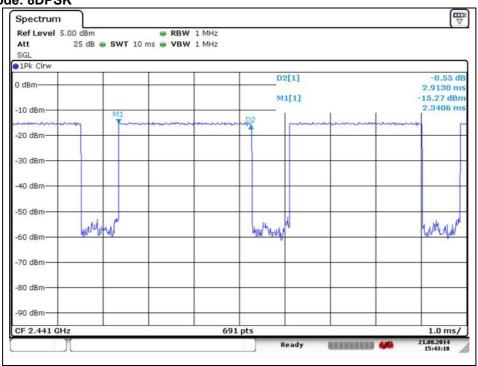



Report Number: F690501/RF-RTL007987 Page: 65 of 65

8. Antenna Requirement

8.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section §15.247 (b) if transmitting antennas of directional gain greater than 6 dB i are used, the power shall be reduced by the amount in dB that the gain of the antenna exceeds 6 dB i.

8.2. Antenna Connected Construction

Antenna used in this product is Integral type with gain of 3.5 $\,\mathrm{dB}$ i.