

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA TEL: +82-31-645-6300 FAX: +82-31-645-6401

# **FCC BT REPORT**

## **FCC Certification**

**Applicant Name:** 

HYUNDAI MOBIS CO., LTD.

Address:

203, Teheran-ro, Gangnam-gu, Seoul, 135-977, South

Korea

Date of Issue:

October 17, 2017

Test Site/Location:

HCT CO., LTD., 74,Seoicheon-ro 578beon-gil,Majang-myeo,Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-R-1710-F002

FCC ID : TQ8-ACB10S1GG

APPLICANT: HYUNDAI MOBIS CO., LTD.

Model: ACB10S1GG

Additional model(s): ACB10S1RE, ACB10S1EG, ACB10S1EE, ACB10S1UG, ACB10S1MG

EUT Type: Car Audio system

Max. RF Output Power: -3.129 dBm (0.49 mW)

Frequency Range: 2402 MHz - 2480 MHz (Bluetooth)

Modulation type GFSK(Normal), π/4DQPSK and 8DPSK(EDR)

FCC Classification: FCC Part 15 Spread Spectrum Transmitter

FCC Rule Part(s): Part 15 subpart C 15.247

The measurements shown in this report were made in accordance with the procedures specified in §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Report prepared by : Soo Kyung Kang

Engineer of Telecommunication testing center

Approved by : Yong Hyun Lee

Manager of Telecommunication testing center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.



# **Version**

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1710-F002	October 17, 2017	- First Approval Report

F-TP22-03 (Rev.00) 2 / 75 **HCT CO.,LTD.** 



# **Table of Contents**

1.	GENERA	AL INFORMATION	4
2.	EUT DES	SCRIPTION	4
3.	TEST ME	ETHODOLOGY	5
	3.1	EUT CONFIGURATION	5
	3.2	EUT EXERCISE	5
	3.3	GENERAL TEST PROCEDURES	5
	3.4	DESCRIPTION OF TEST MODES	6
4.	INSTRU	MENT CALIBRATION	6
5.	FACILITI	ES AND ACCREDITATIONS	6
	5.1	FACILITIES	6
	5.2	EQUIPMENT	6
6.	ANTENN	A REQUIREMENTS	6
7.	MEASUF	REMENT UNCERTAINTY	7
8.	SUMMA	RY OF TEST RESULTS	8
9.	TEST RE	SULT	9
	9.1	PEAK POWER	9
	9.2	BAND EDGES	16
	9.3	FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99% BW)	24
	9.4	NUMBER OF HOPPING FREQUENCY	33
	9.5	TIME OF OCCUPANCY (DWELL TIME)	37
	9.6	SPURIOUS EMISSIONS	44
	9.6.1	CONDUCTED SPURIOUS EMISSIONS	44
	9.6.2	RADIATED SPURIOUS EMISSIONS	53
	9.6.3	RADIATED RESTRICTED BAND EDGES	69
	9.7	POWERLINE CONDUCTED EMISSIONS	73
10.		LIST OF TEST EQUIPMENT	74
	10.1	LIST OF TEST EQUIPMENT(Conducted Test)	74
	10.2	LIST OF TEST FOLIDMENT/Padiated Tost)	75



# 1. GENERAL INFORMATION

Applicant: HYUNDAI MOBIS CO., LTD.

Address: 203, Teheran-ro, Gangnam-gu, Seoul, 135-977, South Korea

FCC ID: TQ8-ACB10S1GG

**EUT Type:** Car Audio System

Model: ACB10S1GG

Additional model(s): ACB10S1RE, ACB11S1EG, ACB10S1EE, ACB10S1UG, ACB10S1MG

**Date(s) of Tests:** October 10, 2017 ~ October 17, 2017

Place of Tests: HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea

# 2. EUT DESCRIPTION

Model	ACB10S1GG			
Additional model(s) ACB10S1RE, ACB11S1EG, ACB10S1EE, ACB10S1UG, ACB10S				
EUT Type Car Audio System				
Power Supply DC 14.4 V				
Frequency Range 2402 MHz - 2480 MHz (Bluetooth)				
Max. RF Output Power:	-3.129 dBm (0.49 mW)			
BT Operating Mode	Normal, EDR, AFH			
Modulation Type	GFSK(Normal), π/4DQPSK and 8DPSK(EDR)			
Modulation Technique	FHSS			
Number of Channels	79Channels, Minimum 20 Channels(AFH)			
	Manufacturer: PARTRON Co.,Ltd			
Antenna Specification	Antenna type: Dielectric Chip Antenna			
	Peak Gain : 2.46 dBi			

## **\* 15.247 Requirements for Bluetooth transmitter**

- This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:
- 1) This system is hopping pseudo-randomly.
- 2) Each frequency is used equally on the average by each transmitter.
- 3) The receiver input bandwidths that match the hopping channel bandwidths of their corresponding transmitters
- 4) The receiver shifts frequencies in synchronization with the transmitted signals.
- 15.247(g): The system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this Section 15.247 should the transmitter be presented with a continuous data (or information) stream.
- 15.247(h): The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.



# 3. TEST METHODOLOGY

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) is used in the measurement of the test device.

## 3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

## 3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

# 3.3 GENERAL TEST PROCEDURES

#### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

#### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 8 of ANSI C63.10. (Version: 2013). To record the final measurements, the analyzer detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 120 kHz for frequencies below 1 GHz or 1 MHz for frequencies above 1 GHz. For average measurements above 1 GHz, the analyzer was set to peak detector with a reduced VBW setting(RBW = 1 MHz, VBW = 1/T Hz, where T = Pulse width).

## **Conducted Antenna Terminal**

See Section from 7.8.2 to 7.8.8.(ANSI 63.10-2013)

F-TP22-03 (Rev.00) 5 / 75 **HCT CO.,LTD.** 



## 3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

## 4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

Espectially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2006).

# 5. FACILITIES AND ACCREDITATIONS

## 5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 07, 2015 (Registration Number: 90661)

# **5.2 EQUIPMENT**

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 6. ANTENNA REQUIREMENTS

# According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- \* The antennas of this E.U.T are permanently attached.
- \*The E.U.T Complies with the requirement of §15.203

F-TP22-03 (Rev.00) 6 / 75 **HCT CO.,LTD.** 



# 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of k = 2 to indicate a 95 % level of confidence.

Parameter	Expanded Uncertainty (±dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70

F-TP22-03 (Rev.00) 7 / 75 **HCT CO.,LTD.** 



# 8. SUMMARY OF TEST RESULTS

	LOT RESULTS			Test
Test Description	FCC Part Section(s)	Test Limit	Test Condition	Result
20 dB Bandwidth	§15.247(a)(1)(ii) or (iii)	N/A		PASS
Occupied Bandwidth	N/A	N/A		N/A
Conducted Maximum Peak Output Power	§15.247(b)(1)	< 1 W if ≥ 75 non- overlapping hopping channels used < 0.125 W if < 75 non- overlapping hopping channels used		PASS
Carrier Frequency Separation	§15.247(a)(1)	>25 kHz or >2/3 of the 20dB BW	CONDUCTED	PASS
Number of Hopping Frequencies	§15.247(a)(1)(iii)	≥ 15		PASS
Time of Occupancy	§15.247(a)(1)(iii)	<400 ms		PASS
Conducted Spurious Emissions	§15.247(d)	> 20 dB for all out-of band emissions		PASS
Band Edge(Out of Band Emissions)	§15.247(d)	> 20 dB for all out-of band emissions		PASS
AC Power line Conducted Emissions	§15.207(a)	cf. Section 9.7		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 9.6.2	DADIATED	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 9.6.3	RADIATED	PASS

F-TP22-03 (Rev.00) 8 / 75 **HCT CO.,LTD.** 




# 9. TEST RESULT 9.1 PEAK POWER

# LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

- 1. For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 W. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 W.
- 2. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.

#### **TEST CONFIGURATION**



## **TEST PROCEDURE**

The transmitter output is connected to the Spectrum Analyzer. The Spectrum Analyzer is set to the peak detector mode. This test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.5 in ANSI 63.10-2013)

- 1) Span: approximately 5 times the 20 dB bandwidth, centered on a hopping channel
- 2) RBW > the 20 dB bandwidth of the emission being measured
- 3) VBW ≥ RBW
- 4) Sweep = Auto
- 5) Detector = Peak
- 6) Trace = Max hold

# **SAMPLE CALCULATION**

Output Power = Spectrum Reading Power + Power Splitter loss + Cable loss(2 ea) = 10 dBm + 6 dB + 1.5 dB = 17.5 dBm

# Note:

- 1. Spectrum reading values are not plot data. The power results in plot is already including the actual values of loss for the splitter and cable combination.
- 2. Spectrum offset = Power Splitter loss + Cable loss
- 3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. Actual value of loss for the splitter and cable combination is 7.36 dB at 2402 MHz and is 7.44 dB at 2480 MHz.

F-TP22-03 (Rev.00) 9 / 75 **HCT CO.,LTD.** 

So, 7.4 dB is offset. And the offset gap in the 2.4 GHz range do not affect the conducted peak power final result.

# **TEST RESULTS**

No non-compliance noted

# **TEST DATA**


Channel	Frequency		t Power SK)	Limit	Result
	(MHz)	(dBm)	(mW)	(mW)	
Low	2402	-7.753	0.17		PASS
Mid	2441	-4.552	0.35	125	PASS
High	2480	-7.588	0.17		PASS

Channel	Frequency	Output Power (8DPSK)		Output (π/4D0		Limit	Result
	(MHz)	(dBm)	(mW)	(dBm)	(mW)	(mW)	
Low	2402	-6.396	0.23	-6.998	0.20		PASS
Mid	2441	-3.129	0.49	-3.714	0.43	125	PASS
High	2480	-6.158	0.24	-6.747	0.21		PASS

F-TP22-03 (Rev.00) 10 / 75 **HCT CO.,LTD.** 




Test Plots (GFSK) Peak Power (CH.0)

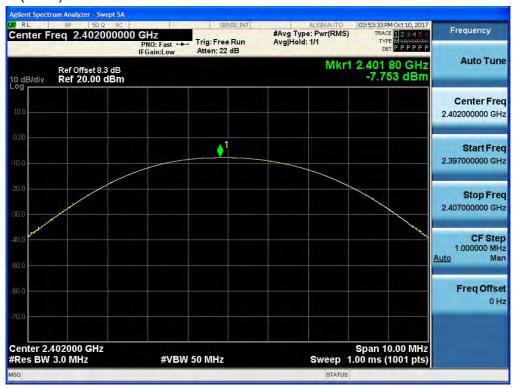


Test Plots (GFSK)
Peak Power (CH.39)







Test Plots (GFSK)
Peak Power (CH.78)

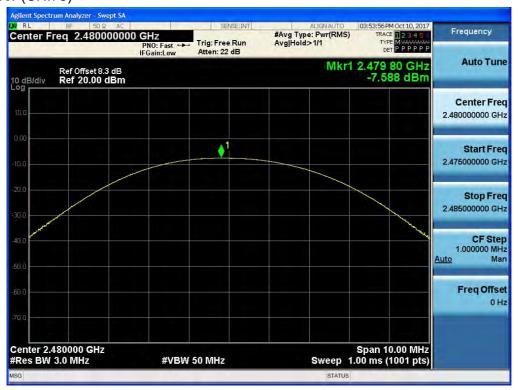

Test Plots (8DPSK) Peak Power (CH.0)





Test Plots (8DPSK)

Peak Power (CH.39)



Test Plots (8DPSK)
Peak Power (CH.78)







Test Plots (π/4DQPSK) Peak Power (CH.0)



Test Plots ( $\pi/4DQPSK$ ) Peak Power (CH.39)

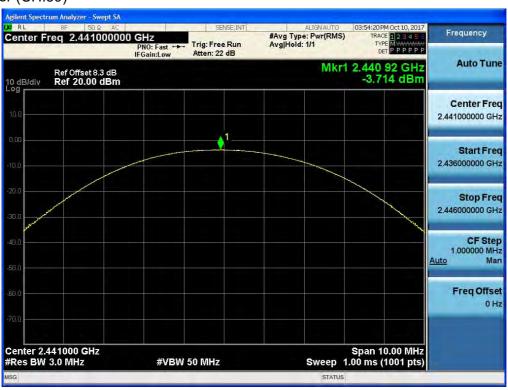





Test Plots (π/4DQPSK)



F-TP22-03 (Rev.00) 15 / 75 **HCT CO.,LTD.** 




## 9.2 BAND EDGES

#### LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

## **TEST CONFIGURATION**



## **TEST PROCEDURE**

# This test is performed with hopping off and hopping on.

The Spectrum Analyzer is set to (6.10.4 in ANSI 63.10-2013)

- 1) Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation
- 2) Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level.
- 3) Attenuation: Auto (at least 10 dB preferred).
- 4) Sweep time: Coupled.

5) RBW: 100 kHz6) VBW: 300 kHz7) Detector: Peak8) Trace: Max hold

F-TP22-03 (Rev.00) 16 / 75 **HCT CO.,LTD.** 

# **TEST RESULTS**

See attached.

## Note:

- 1. The results in plot is already including the actual values of loss for the splitter and cable combination.
- 2. Spectrum offset = Power Splitter loss + Cable loss
- 3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. Actual value of loss for the splitter and cable combination is 7.36 dB at 2402 MHz and is 7.44 dB at 2480 MHz. So, 7.4 dB is offset. And the offset gap in the 2.4 GHz range do not affect the band edge measurement final result.

# **TEST DATA**

# - Without hopping

Outoido	GFSK	8DPSK	π/4DQPSK	Margin				
Outside Frequency Band	(dB)	(dB)	(dB)	Limit (dBc)	GFSK	8DPSK	π/4DQPSK	Result
Trequency Band	(ub)	(ub)	(ub)	(ubc)	(dBc)	(dBc)	(dBc)	
Lower	50.576	50.455	50.282	20	30.58	30.46	30.28	PASS
Upper	49.837	50.275	50.439		29.84	30.28	30.44	PASS


# - With hopping

Outoido	GFSK	8DPSK	π/4DQPSK			Margin		
Outside Frequency Band	(dB)	(dD)	(dP)	Limit (dBc)	GFSK	8DPSK	π/4DQPSK	Result
Frequency Band	(UB)	(dB)	(dB) (dBc)	(ubc)	(dBc)	(dBc)	(dBc)	
Lower	49.740	49.946	49.113	20	29.74	29.95	29.11	PASS
Upper	50.110	49.247	49.396	20	30.11	29.25	29.40	PASS


F-TP22-03 (Rev.00) 17 / 75 **HCT CO.,LTD.** 



Test Plots without hopping (GFSK) Band Edges (CH.0)

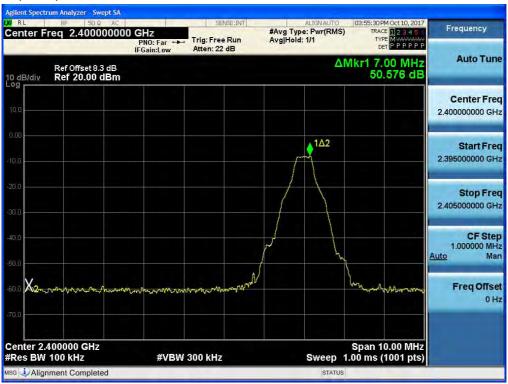

Test Plots without hopping (GFSK) Band Edges (CH.78)

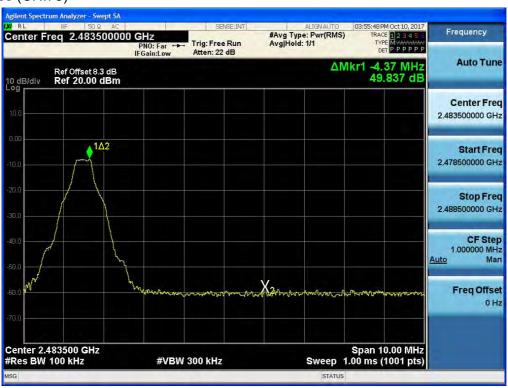

F-TP22-03 (Rev.00) 18 / 75 **HCT CO.,LTD.** 



Test Plots without hopping (8DPSK) Band Edges (CH.0)




Test Plots without hopping (8DPSK) Band Edges (CH.78)






Test Plots without hopping (π/4DQPSK)

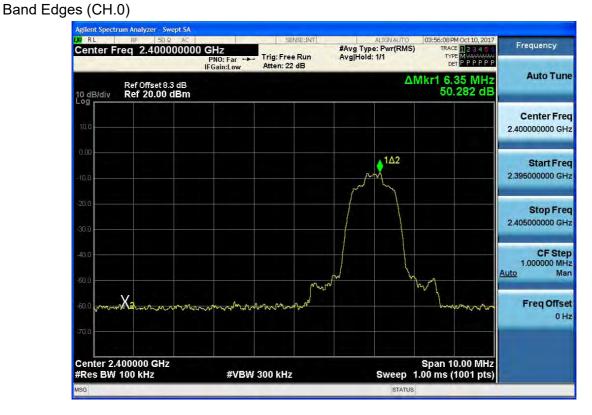

Test Plots without hopping ( $\pi$ /4DQPSK) Band Edges (CH.78)

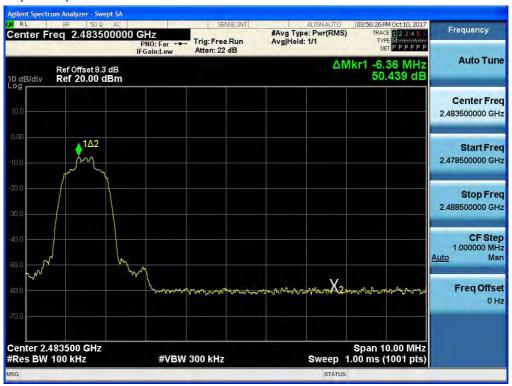




Test Plots with hopping (GFSK) Band Edges (CH.0)



Test Plots with hopping (GFSK) Band Edges (CH.78)

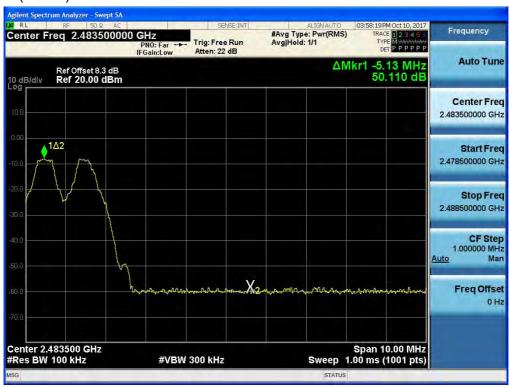

F-TP22-03 (Rev.00) 21 / 75 **HCT CO.,LTD.** 



Test Plots with hopping (8DPSK)



Test Plots with hopping (8DPSK) Band Edges (CH.78)






Test Plots with hopping ( $\pi$ /4DQPSK) Band Edges (CH.0)



Test Plots with hopping ( $\pi$ /4DQPSK) Band Edges (CH.78)

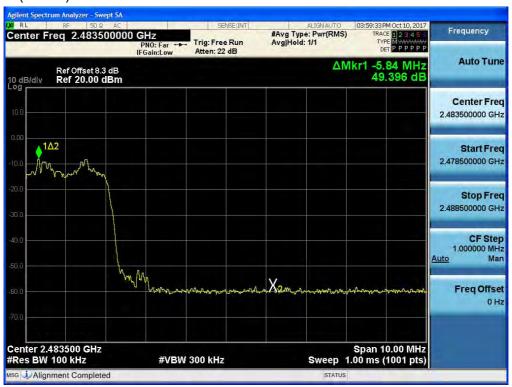

F-TP22-03 (Rev.00) 23 / 75 **HCT CO.,LTD.** 




# 9.3 FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99% BW)

#### LIMIT

According to §15.247(a)(1), Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

## **TEST CONFIGURATION**



## **TEST PROCEDURE**

The Channel Separation test is performed with hopping on. And the 20 dB Bandwidth test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.2 in ANSI 63.10-2013)

- 1) Span: Wide enough to capture the peaks of two adjacent channels
- 2) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3) VBW ≥ RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) All the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

## **TEST RESULTS**

No non-compliance noted

F-TP22-03 (Rev.00) 24 / 75 **HCT CO.,LTD.** 



# **TEST DATA**

Channel Separation (kHz)				20dB Bar	Limit	Result		
GFSK	8DPSK	π/4DQPSK	Channel	GFSK	8DPSK	π/4DQPSK	(kHz)	
			Low CH	970.9	1286	1273	>25 or	
998	998	994	Middle CH	995.8	1284	1277	>2/3 of the	Pass
			High CH	993.1	1287	1276	20dB BW	

# Occupied Bandwidth (99% BW)

99% BW (kHz)							
Channel GFSK 8DPSK π/4DQPSK							
CH.0	877.60	1157.0	1152.9				
CH.39	878.64	1157.2	1154.0				
CH.78	886.08	1157.6	1156.2				

Note: We can not know what use channel in AFH mode. So, we can not test in AFH mode. Also, if the test performs some channel in AFH mode, the test result is not different with normal mode.

F-TP22-03 (Rev.00) 25 / 75 **HCT CO.,LTD.** 




# Test Plots (GFSK)

# **Channel Separation**



# Test Plots (8DPSK) Channel Separation








<u>'</u>

# Test Plots (π/4DQPSK)

# **Channel Separation**




F-TP22-03 (Rev.00) 27 / 75 **HCT CO.,LTD.** 





# Test Plots (GFSK)

20 dB Bandwidth & Occupied Bandwidth (CH.0)

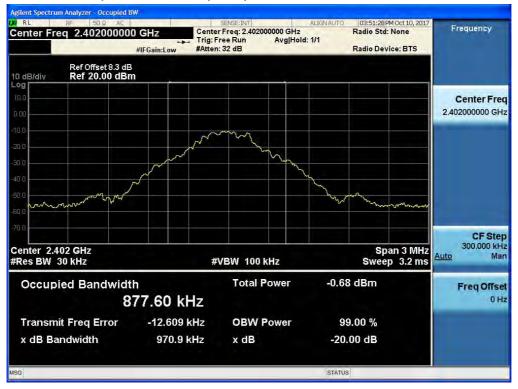

# Test Plots (GFSK)

20 dB Bandwidth & Occupied Bandwidth (CH.39)




F-TP22-03 (Rev.00) 28 / 75 **HCT CO.,LTD.** 




# Test Plots (GFSK)

20 dB Bandwidth & Occupied Bandwidth (CH.78)

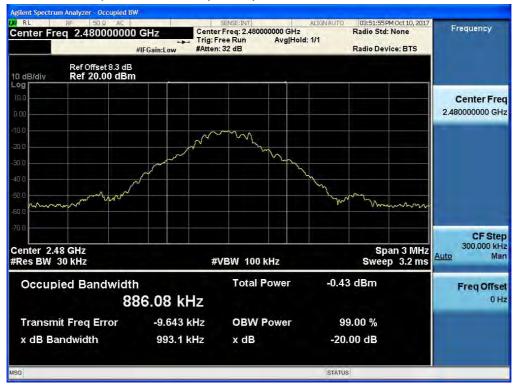


# Test Plots (8DPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.0)

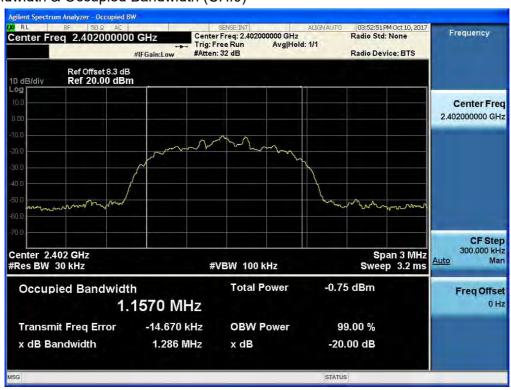

F-TP22-03 (Rev.00) 29 / 75 **HCT CO.,LTD.** 






Test Plots (8DPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.39)



# Test Plots (8DPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.78)

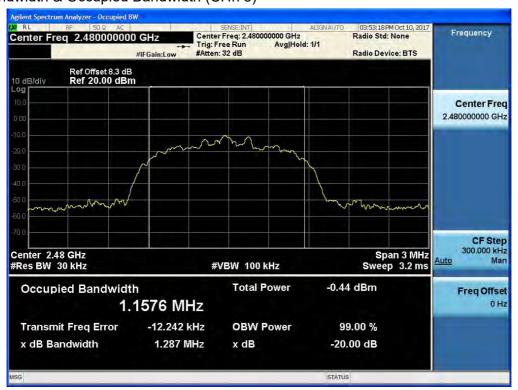


F-TP22-03 (Rev.00) 30 / 75 **HCT CO.,LTD.** 




# Test Plots (π/4DQPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.0)

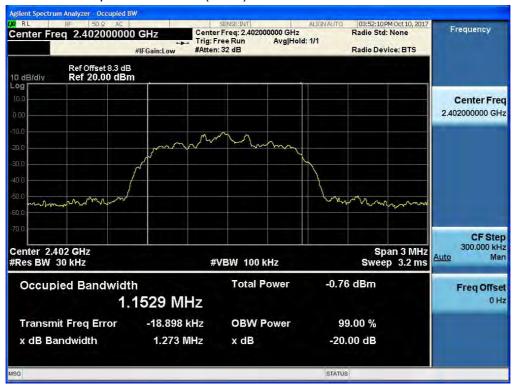

# Test Plots (π/4DQPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.39)

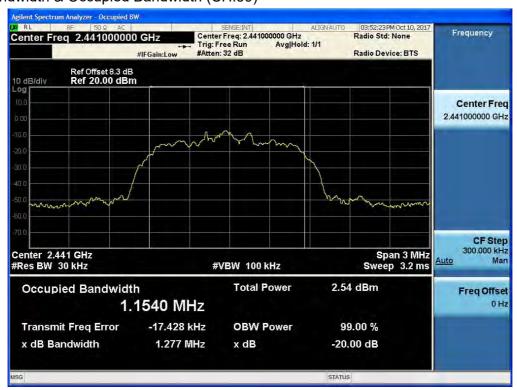


F-TP22-03 (Rev.00) 31 / 75 **HCT CO.,LTD.** 



# Test Plots ( $\pi/4DQPSK$ )

20 dB Bandwidth & Occupied Bandwidth (CH.78)

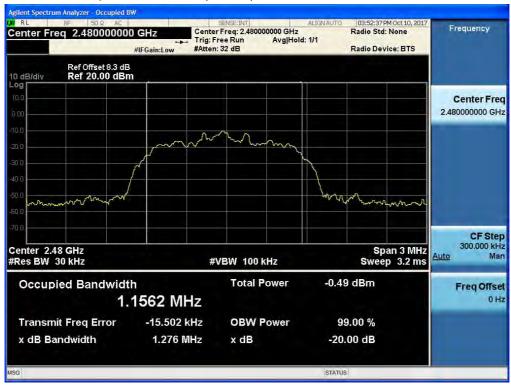

F-TP22-03 (Rev.00) 32 / 75 **HCT CO.,LTD.** 




# 9.4 NUMBER OF HOPPING FREQUENCY

# LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400 MHz ~ 2483.5 MHz bands shall use at least 15 hopping frequencies.

# **TEST CONFIGURATION**



## **TEST PROCEDURE**

The Bluetooth frequency hopping function of the EUT was enabled.

The Spectrum Analyzer is set to (7.8.3 in ANSI 63.10-2013)

- 1) Span: the frequency band of operation
- 2) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 3) VBW≥RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) Allow the trace to stabilize.

## **TEST RESULTS**

No non-compliance noted

# **TEST DATA**


	Result (No. of CH)	Limaid	Popult	
GFSK	8DPSK	π/4DQPSK	Limit	Result
79	79	79	>15	Pass

Note: In case of AFH mode, minimum number of hopping channels is 20.

F-TP22-03 (Rev.00) 33 / 75 **HCT CO.,LTD.** 


# Test Plots (GFSK)

Number of Channels (2.4 GHz - 2.441 GHz)

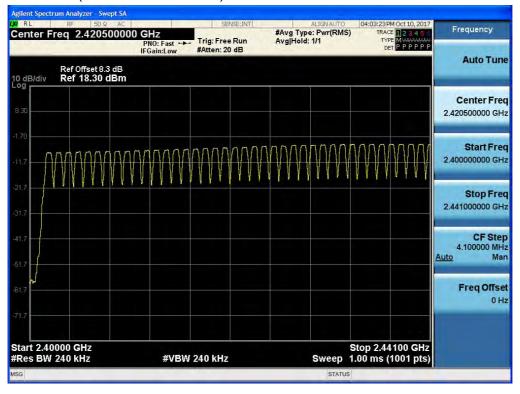

# Test Plots (GFSK)

Number of Channels (2.441 GHz - 2.4835 GHz)

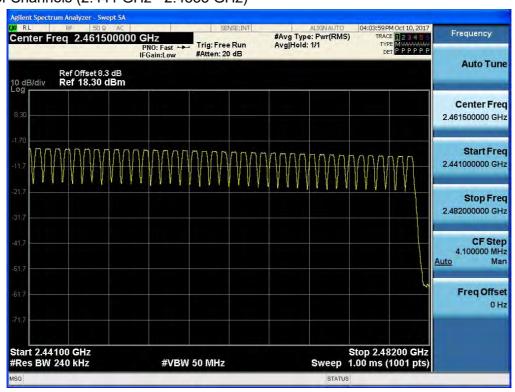


F-TP22-03 (Rev.00) 34 / 75 **HCT CO.,LTD.** 



# Test Plots (8DPSK)

Number of Channels (2.4 GHz - 2.441 GHz)

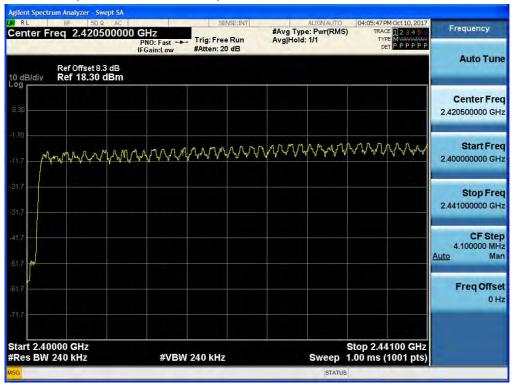

# Test Plots (8DPSK)

Number of Channels (2.441 GHz - 2.4835 GHz)




F-TP22-03 (Rev.00) 35 / 75 **HCT CO.,LTD.** 




# Test Plots (π/4DQPSK)

Number of Channels (2.4 GHz - 2.441 GHz)

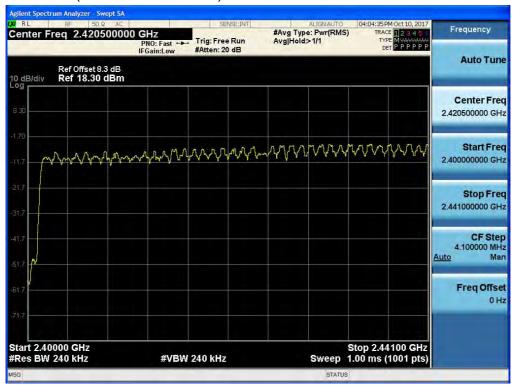

# Test Plots (π/4DQPSK)

Number of Channels (2.441 GHz - 2.4835 GHz)

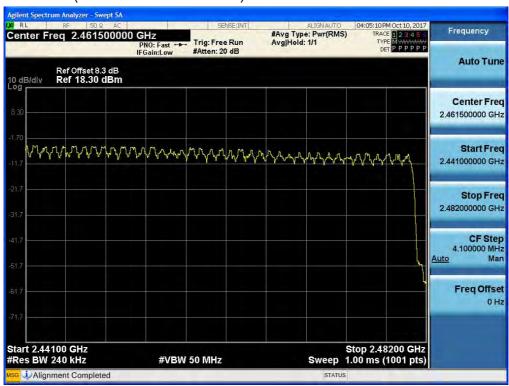

F-TP22-03 (Rev.00) 36 / 75 **HCT CO.,LTD.** 




## 9.5 TIME OF OCCUPANCY (DWELL TIME)

#### LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400 MHz ~ 2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

#### **TEST CONFIGURATION**

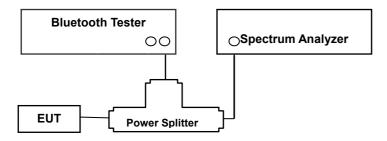

#### **TEST PROCEDURE**

This test is performed with hopping off.

EUT was set to transmit the longest packet type (DH5)

The Spectrum Analyzer is set to (7.8.4 in ANSI 63.10-2013)

- 1) Span: Zero span, centered on a hopping channel
- 2) RBW shall be ≤ channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel.
- 3) Sweep = as necessary to capture the entire dwell time per hopping channel
- 4) Detector: Peak
- 5) Trace: Max hold

The marker-delta function was used to determine the dwell time.

2.890 \* (1600/6)/79 \* 31.6 = 308.27 (ms)

#### **SAMPLE CALCULATION**

#### Normal Mode / EDR Mode

CH Mid:

**DH 5**(The longest packet type for GFSK)

**2-DH 5**(The longest packet type for π/4DQPSK)

CH Mid: 2.890 \* (1600/6)/79 \* 31.6 = 308.27 (ms)

**3-DH 5**(The longest packet type for 8DPSK)

CH Mid: 2.890 \* (1600/6)/79 \* 31.6 = 308.27 (ms)

F-TP22-03 (Rev.00) 37 / 75 **HCT CO.,LTD.** 



#### **AFH Mode**

**DH 5**(The longest packet type for GFSK)

CH Mid: 2.890 \* (800/6)/20 \* 8.0 = 154.13 (ms)

**2-DH 5**(The longest packet type for  $\pi/4DQPSK$ )

CH Mid: 2.890 \* (800/6)/20 \* 8.0 = 154.13 (ms)

**3-DH 5**(The longest packet type for 8DPSK)

CH Mid:

2.890 \* (800/6)/20 \* 8.0 = 154.13 (ms)

Note:

A DH5 Packet need 5 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 1600/6 hops per second with 79 channels. So the system have each channel 3.3755 times per second and so for 31.6 seconds the system have 106.7 times of appearance. Each tx-time per appearance of DH5 is 2.892 ms.

Dwell time = Tx-time \* 106.7

#### **TEST RESULTS**

See the table.

	Channel	GFSK	8DPSK	π/4DQPSK
Pulse	Low	2.885	2.890	2.890
Time	Mid	2.885	2.895	2.890
(ms)	High	2.890	2.890	2.890

	Channel	GFSK	8DPSK	π/4DQPSK	Period Time (s)	Limit (ms)	Result
Total of	Low	307.73	308.27	308.27	32		PASS
Dwell	Mid	307.73	308.80	308.27	32	400	PASS
(ms)	High	308.27	308.27	308.27	32		PASS

F-TP22-03 (Rev.00) 38 / 75 **HCT CO.,LTD.** 



Toot Dieto (CESIA)

Test Plots (GFSK)
Dwell Time (CH.0)




Test Plots (GFSK)

Dwell Time (CH.39)





Test Plots (GFSK)

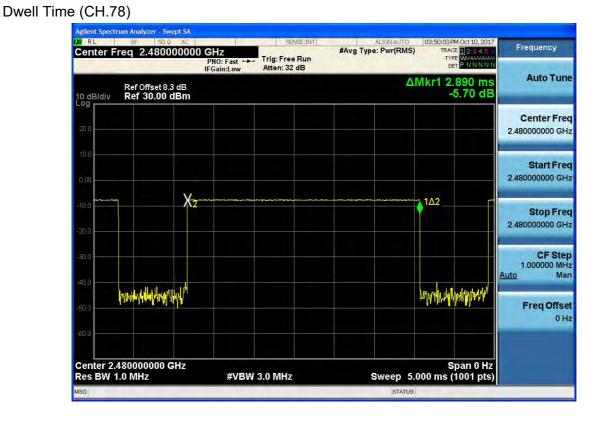

Test Plots (8DPSK)
Dwell Time (CH.0)






Test Plots (8DPSK)

Dwell Time (CH.39)




Test Plots (8DPSK) Dwell Time (CH.78)

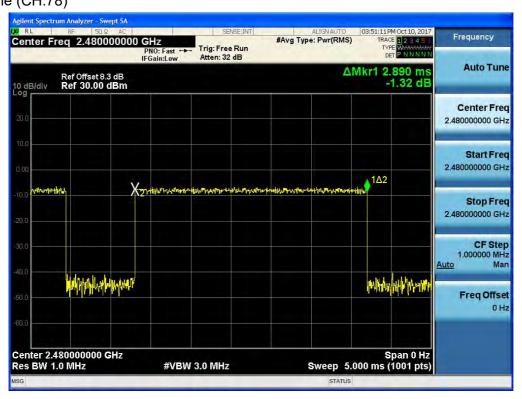




Test Plots ( $\pi/4DQPSK$ ) Dwell Time (CH.0)

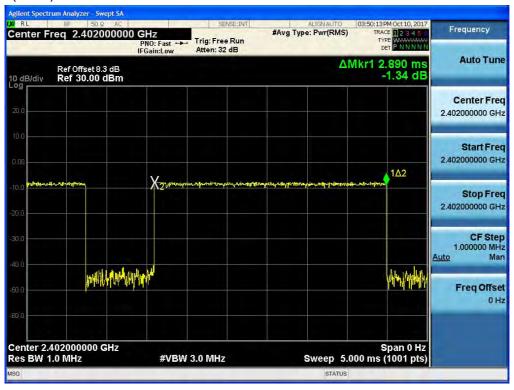

Test Plots ( $\pi/4DQPSK$ ) Dwell Time (CH.39)

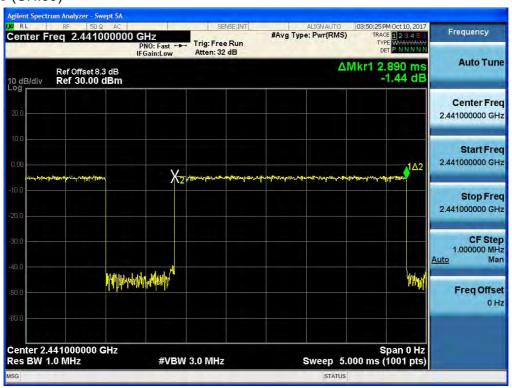

F-TP22-03 (Rev.00) 42 / 75 **HCT CO.,LTD.** 



Test Plots ( $\pi$ /4DQPSK) Dwell Time (CH.78)



F-TP22-03 (Rev.00) 43 / 75 **HCT CO.,LTD.** 



#### 9.6 SPURIOUS EMISSIONS


#### 9.6.1 CONDUCTED SPURIOUS EMISSIONS

## Test Requirements and limit, §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.205(c)).

Limit: 20 dBc

## **TEST CONFIGURATION**

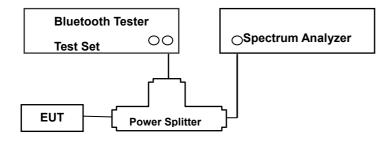

#### **TEST PROCEDURE**

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer.

The Spectrum Analyzer is set to (7.8.8 in ANSI 63.10-2013)

1) Span: 30 MHz to 10 times the operating frequency in GHz.

RBW: 100 kHz
 VBW: 300 kHz
 Sweep: Coupled
 Detector: Peak

Measurements are made over the 30 MHz to 26 GHz range with the transmitter set to the lowest, middle, and highest channels.

This test is performed with hopping off.

F-TP22-03 (Rev.00) 44 / 75 **HCT CO.,LTD.** 



# **TEST RESULTS**

No non-compliance noted.

Note: In order to simplify the report, attached plots were only the worst case channel and data rate.

## **FACTORS FOR FREQUENCY**


Freq(MHz)         Factor(dB)           30         7.18           100         6.35           200         7.04           300         6.58           400         6.26           500         5.95           600         6.17           700         6.34           800         6.72           900         7.08           1000         7.38           2000         7.78           2400*         7.36           2500*         7.44           3000         7.88           4000         8.95           5000         9.57           6000         6.68           7000         9.99           8000         8.34           9000         9.61           10000         10.47           11000         8.96           12000         9.73           13000         8.84           14000         9.50           15000         11.54           16000         8.14           17000         11.73           18000         9.71           19000         10.40	FACTORS F	OR FREQUENCY
100       6.35         200       7.04         300       6.58         400       6.26         500       5.95         600       6.17         700       6.34         800       6.72         900       7.08         1000       7.38         2000       7.78         2400*       7.36         2500*       7.44         3000       7.88         4000       8.95         5000       9.57         6000       6.68         7000       9.99         8000       8.34         9000       10.47         11000       8.96         12000       9.73         13000       8.84         14000       9.50         15000       11.54         16000       8.14         17000       11.73         18000       9.71         19000       10.40         20000       11.69         21000       10.72         22000       12.31         23000       9.85         24000       12.52	Freq(MHz)	Factor(dB)
200       7.04         300       6.58         400       6.26         500       5.95         600       6.17         700       6.34         800       6.72         900       7.08         1000       7.38         2000       7.78         2400*       7.36         2500*       7.44         3000       7.88         4000       8.95         5000       9.57         6000       6.68         7000       9.99         8000       8.34         9000       9.61         10000       10.47         11000       8.96         12000       9.73         13000       8.84         14000       9.50         15000       11.54         16000       8.14         17000       11.73         18000       9.71         19000       10.40         20000       11.69         21000       10.72         22000       12.31         23000       9.85         24000       12.52	30	
200       7.04         300       6.58         400       6.26         500       5.95         600       6.17         700       6.34         800       6.72         900       7.08         1000       7.38         2000       7.78         2400*       7.36         2500*       7.44         3000       7.88         4000       8.95         5000       9.57         6000       6.68         7000       9.99         8000       8.34         9000       9.61         10000       10.47         11000       8.96         12000       9.73         13000       8.84         14000       9.50         15000       11.54         16000       8.14         17000       11.73         18000       9.71         19000       10.40         20000       11.69         21000       10.72         22000       12.31         23000       9.85         24000       12.52	100	6.35
400       6.26         500       5.95         600       6.17         700       6.34         800       6.72         900       7.08         1000       7.38         2000       7.78         2400*       7.36         2500*       7.44         3000       7.88         4000       8.95         5000       9.57         6000       6.68         7000       9.99         8000       8.34         9000       9.61         1000       10.47         11000       8.96         12000       9.73         13000       8.84         14000       9.50         15000       11.54         16000       8.14         17000       11.73         18000       9.71         19000       10.40         20000       11.69         21000       10.72         22000       12.31         23000       9.85         24000       12.52         25000       11.07	200	7.04
500         5.95           600         6.17           700         6.34           800         6.72           900         7.08           1000         7.38           2000         7.78           2400*         7.36           2500*         7.44           3000         7.88           4000         8.95           5000         9.57           6000         6.68           7000         9.99           8000         8.34           9000         9.61           10000         10.47           11000         8.96           12000         9.73           13000         8.84           14000         9.50           15000         11.54           16000         8.14           17000         11.73           18000         9.71           19000         10.40           20000         11.69           21000         10.72           22000         12.31           23000         9.85           24000         12.52           25000         11.07 <td>300</td> <td></td>	300	
600       6.17         700       6.34         800       6.72         900       7.08         1000       7.38         2000       7.78         2400*       7.36         2500*       7.44         3000       7.88         4000       8.95         5000       9.57         6000       6.68         7000       9.99         8000       8.34         9000       9.61         1000       10.47         11000       8.96         12000       9.73         13000       8.84         14000       9.50         15000       11.54         16000       8.14         17000       11.73         18000       9.71         19000       10.40         20000       11.69         21000       10.72         22000       12.31         23000       9.85         24000       12.52         25000       11.07	400	
700         6.34           800         6.72           900         7.08           1000         7.38           2000         7.78           2400*         7.36           2500*         7.44           3000         7.88           4000         8.95           5000         9.57           6000         6.68           7000         9.99           8000         8.34           9000         9.61           10000         10.47           11000         8.96           12000         9.73           13000         8.84           14000         9.50           15000         11.54           16000         8.14           17000         11.73           18000         9.71           19000         10.40           20000         11.69           21000         10.72           22000         12.31           23000         9.85           24000         12.52           25000         11.07		
800       6.72         900       7.08         1000       7.38         2000       7.78         2400*       7.36         2500*       7.44         3000       7.88         4000       8.95         5000       9.57         6000       6.68         7000       9.99         8000       8.34         9000       9.61         1000       10.47         11000       8.96         12000       9.73         13000       8.84         14000       9.50         15000       11.54         16000       8.14         17000       11.73         18000       9.71         19000       10.40         20000       11.69         21000       10.72         22000       12.31         23000       9.85         24000       12.52         25000       11.07	600	
900         7.08           1000         7.38           2000         7.78           2400*         7.36           2500*         7.44           3000         7.88           4000         8.95           5000         9.57           6000         6.68           7000         9.99           8000         8.34           9000         9.61           10000         10.47           11000         8.96           12000         9.73           13000         8.84           14000         9.50           15000         11.54           16000         8.14           17000         11.73           18000         9.71           19000         10.40           20000         11.69           21000         10.72           22000         12.31           23000         9.85           24000         12.52           25000         11.07	700	6.34
1000       7.38         2000       7.78         2400*       7.36         2500*       7.44         3000       7.88         4000       8.95         5000       9.57         6000       6.68         7000       9.99         8000       8.34         9000       9.61         1000       10.47         11000       8.96         12000       9.73         13000       8.84         14000       9.50         15000       11.54         16000       8.14         17000       11.73         18000       9.71         19000       10.40         20000       11.69         21000       10.72         22000       12.31         23000       9.85         24000       12.52         25000       11.07	800	6.72
2000         7.78           2400*         7.36           2500*         7.44           3000         7.88           4000         8.95           5000         9.57           6000         6.68           7000         9.99           8000         8.34           9000         9.61           10000         10.47           11000         8.96           12000         9.73           13000         8.84           14000         9.50           15000         11.54           16000         8.14           17000         11.73           18000         9.71           19000         10.40           20000         11.69           21000         10.72           22000         12.31           23000         9.85           24000         12.52           25000         11.07	900	7.08
2400*       7.36         2500*       7.44         3000       7.88         4000       8.95         5000       9.57         6000       6.68         7000       9.99         8000       8.34         9000       9.61         10000       10.47         11000       8.96         12000       9.73         13000       8.84         14000       9.50         15000       11.54         16000       8.14         17000       11.73         18000       9.71         19000       10.40         20000       11.69         21000       10.72         22000       12.31         23000       9.85         24000       12.52         25000       11.07		7.38
2500*         7.44           3000         7.88           4000         8.95           5000         9.57           6000         6.68           7000         9.99           8000         8.34           9000         9.61           10000         10.47           11000         8.96           12000         9.73           13000         8.84           14000         9.50           15000         11.54           16000         8.14           17000         11.73           18000         9.71           19000         10.40           20000         11.69           21000         10.72           22000         12.31           23000         9.85           24000         12.52           25000         11.07	2000	7.78
3000       7.88         4000       8.95         5000       9.57         6000       6.68         7000       9.99         8000       8.34         9000       9.61         10000       10.47         11000       8.96         12000       9.73         13000       8.84         14000       9.50         15000       11.54         16000       8.14         17000       11.73         18000       9.71         19000       10.40         20000       11.69         21000       10.72         22000       12.31         23000       9.85         24000       12.52         25000       11.07	2400*	7.36
4000       8.95         5000       9.57         6000       6.68         7000       9.99         8000       8.34         9000       9.61         10000       10.47         11000       8.96         12000       9.73         13000       8.84         14000       9.50         15000       11.54         16000       8.14         17000       11.73         18000       9.71         19000       10.40         20000       11.69         21000       10.72         22000       12.31         23000       9.85         24000       12.52         25000       11.07	2500*	7.44
5000       9.57         6000       6.68         7000       9.99         8000       8.34         9000       9.61         10000       10.47         11000       8.96         12000       9.73         13000       8.84         14000       9.50         15000       11.54         16000       8.14         17000       11.73         18000       9.71         19000       10.40         20000       11.69         21000       10.72         22000       12.31         23000       9.85         24000       12.52         25000       11.07	3000	
6000       6.68         7000       9.99         8000       8.34         9000       9.61         10000       10.47         11000       8.96         12000       9.73         13000       8.84         14000       9.50         15000       11.54         16000       8.14         17000       11.73         18000       9.71         19000       10.40         20000       11.69         21000       10.72         22000       12.31         23000       9.85         24000       12.52         25000       11.07	4000	
7000         9.99           8000         8.34           9000         9.61           10000         10.47           11000         8.96           12000         9.73           13000         8.84           14000         9.50           15000         11.54           16000         8.14           17000         11.73           18000         9.71           19000         10.40           20000         11.69           21000         10.72           22000         12.31           23000         9.85           24000         12.52           25000         11.07	5000	9.57
8000     8.34       9000     9.61       10000     10.47       11000     8.96       12000     9.73       13000     8.84       14000     9.50       15000     11.54       16000     8.14       17000     11.73       18000     9.71       19000     10.40       20000     11.69       21000     10.72       22000     12.31       23000     9.85       24000     12.52       25000     11.07	6000	6.68
9000     9.61       10000     10.47       11000     8.96       12000     9.73       13000     8.84       14000     9.50       15000     11.54       16000     8.14       17000     11.73       18000     9.71       19000     10.40       20000     11.69       21000     10.72       22000     12.31       23000     9.85       24000     12.52       25000     11.07	7000	9.99
10000     10.47       11000     8.96       12000     9.73       13000     8.84       14000     9.50       15000     11.54       16000     8.14       17000     11.73       18000     9.71       19000     10.40       20000     11.69       21000     10.72       22000     12.31       23000     9.85       24000     12.52       25000     11.07	8000	8.34
11000     8.96       12000     9.73       13000     8.84       14000     9.50       15000     11.54       16000     8.14       17000     11.73       18000     9.71       19000     10.40       20000     11.69       21000     10.72       22000     12.31       23000     9.85       24000     12.52       25000     11.07	9000	9.61
12000     9.73       13000     8.84       14000     9.50       15000     11.54       16000     8.14       17000     11.73       18000     9.71       19000     10.40       20000     11.69       21000     10.72       22000     12.31       23000     9.85       24000     12.52       25000     11.07	10000	10.47
13000     8.84       14000     9.50       15000     11.54       16000     8.14       17000     11.73       18000     9.71       19000     10.40       20000     11.69       21000     10.72       22000     12.31       23000     9.85       24000     12.52       25000     11.07	11000	8.96
14000     9.50       15000     11.54       16000     8.14       17000     11.73       18000     9.71       19000     10.40       20000     11.69       21000     10.72       22000     12.31       23000     9.85       24000     12.52       25000     11.07	12000	9.73
15000     11.54       16000     8.14       17000     11.73       18000     9.71       19000     10.40       20000     11.69       21000     10.72       22000     12.31       23000     9.85       24000     12.52       25000     11.07	13000	8.84
16000     8.14       17000     11.73       18000     9.71       19000     10.40       20000     11.69       21000     10.72       22000     12.31       23000     9.85       24000     12.52       25000     11.07	14000	
16000     8.14       17000     11.73       18000     9.71       19000     10.40       20000     11.69       21000     10.72       22000     12.31       23000     9.85       24000     12.52       25000     11.07	15000	11.54
18000     9.71       19000     10.40       20000     11.69       21000     10.72       22000     12.31       23000     9.85       24000     12.52       25000     11.07	16000	8.14
19000     10.40       20000     11.69       21000     10.72       22000     12.31       23000     9.85       24000     12.52       25000     11.07	17000	
20000     11.69       21000     10.72       22000     12.31       23000     9.85       24000     12.52       25000     11.07	18000	9.71
20000     11.69       21000     10.72       22000     12.31       23000     9.85       24000     12.52       25000     11.07	19000	10.40
22000     12.31       23000     9.85       24000     12.52       25000     11.07	20000	11.69
22000     12.31       23000     9.85       24000     12.52       25000     11.07	21000	10.72
23000 9.85 24000 12.52 25000 11.07	22000	12.31
25000 11.07	23000	
	24000	12.52
26000 10.50	25000	11.07
	26000	10.50

Note: 1. '\*' is fundamental frequency range.


2. Factor = Cable loss + Splitter loss



Test Plots (8DPSK)- 30 MHz - 1 GHz Spurious Emission (CH.39)

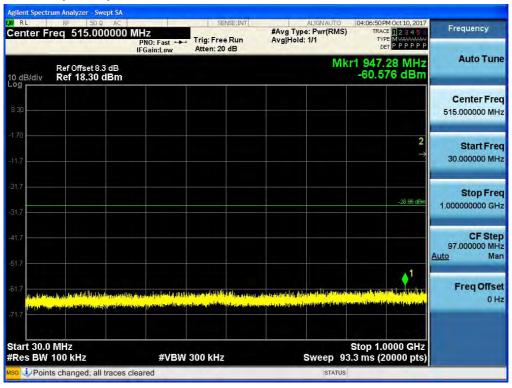

Test Plots (8DPSK)- 1 GHz – 3 GHz Spurious Emission (CH.39)

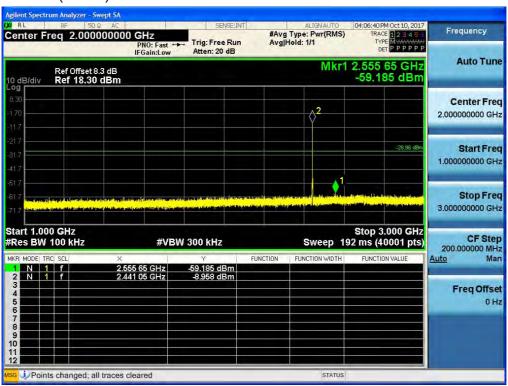


F-TP22-03 (Rev.00) 46 / 75 **HCT CO.,LTD.** 




Test Plots(8DPSK)- 3 GHz - 5 GHz Spurious Emission (CH.39)



Test Plots (8DPSK)- 5 GHz - 7 GHz Spurious Emission (CH.39)

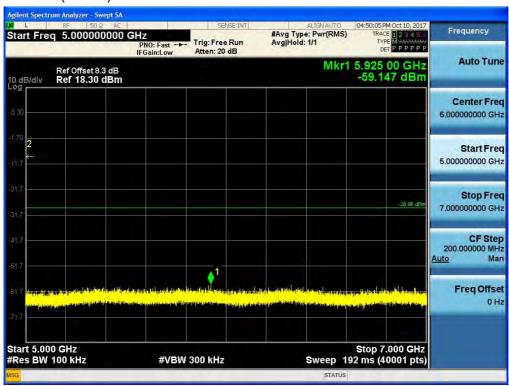


F-TP22-03 (Rev.00) 47 / 75 **HCT CO.,LTD.** 






Test Plots(8DPSK)- 7 GHz - 9 GHz Spurious Emission (CH.39)

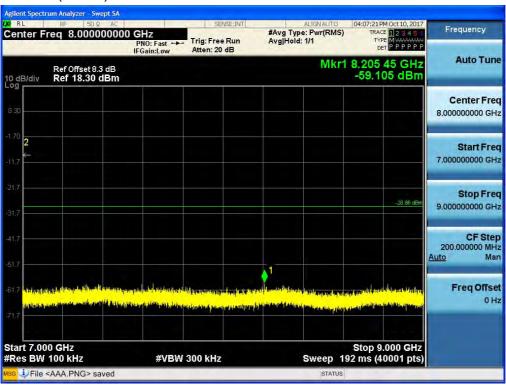


Test Plots(8DPSK)- 9 GHz - 11 GHz Spurious Emission (CH.39)

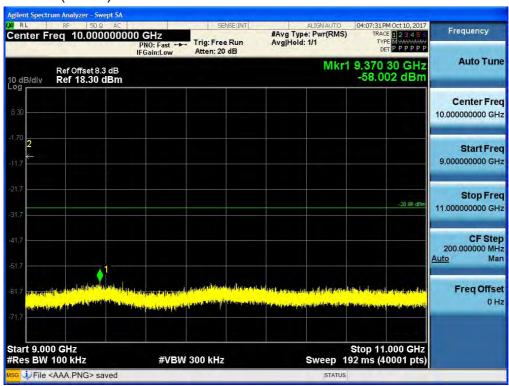


F-TP22-03 (Rev.00) 48 / 75 **HCT CO.,LTD.** 



Test Plots(8DPSK) 11 GHz - 13 GHz Spurious Emission (CH.39)

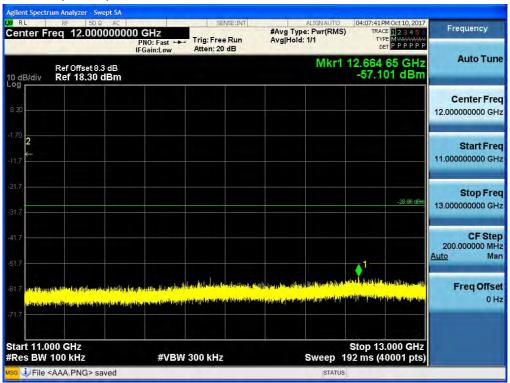


Test Plots (8DPSK)- 13 GHz – 15 GHz Spurious Emission (CH.39)

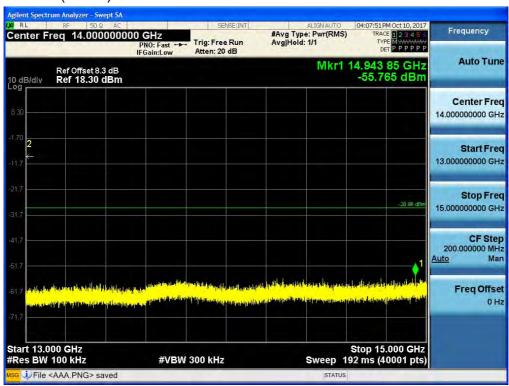


F-TP22-03 (Rev.00) 49 / 75 **HCT CO.,LTD.** 



Test Plots(8DPSK)— 15 GHz - 17 GHz Spurious Emission (CH.39)

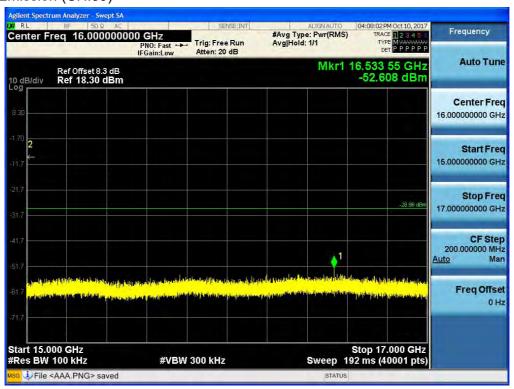

Test Plots(8DPSK)- 17 GHz - 19 GHz Spurious Emission (CH.39)

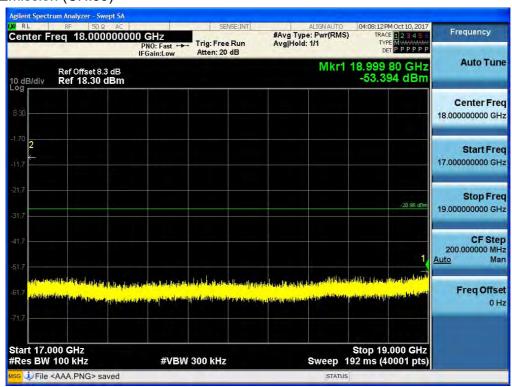


F-TP22-03 (Rev.00) 50 / 75 **HCT CO.,LTD.** 



Test Plots (8DPSK)- 19 GHz - 21 GHz Spurious Emission (CH.39)




Test Plots (8DPSK)- 21 GHz - 23 GHz Spurious Emission (CH.39)

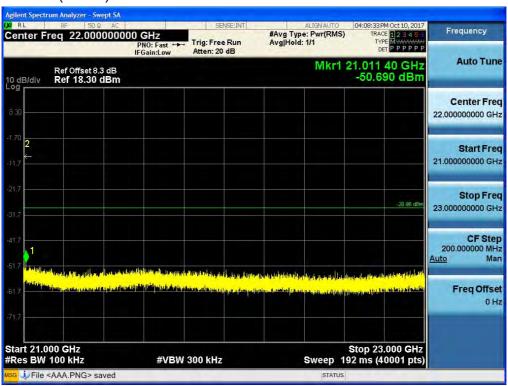

F-TP22-03 (Rev.00) 51 / 75 **HCT CO.,LTD.** 



Test Plots (8DPSK)- 23 GHz - 25 GHz Spurious Emission (CH.39)

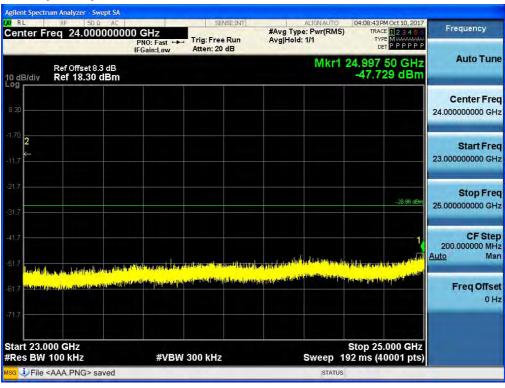

F-TP22-03 (Rev.00) 52 / 75 **HCT CO.,LTD.** 



## 9.6.2 RADIATED SPURIOUS EMISSIONS

LIMIT: §15.247(d), §15.205, §15.209

20dBc in any 100kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

F-TP22-03 (Rev.00) 53 / 75 **HCT CO.,LTD.** 




#### **TEST CONFIGURATION**

#### **Below 30 MHz**

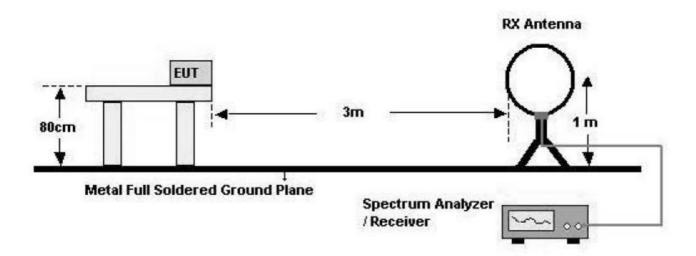


## 30 MHz - 1 GHz

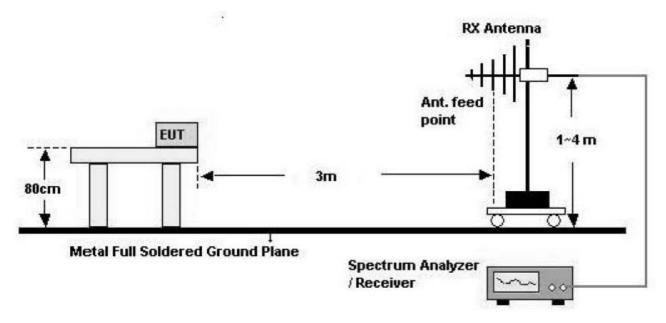

F-TP22-03 (Rev.00) 54 / 75 **HCT CO.,LTD.** 



#### **Above 1 GHz**

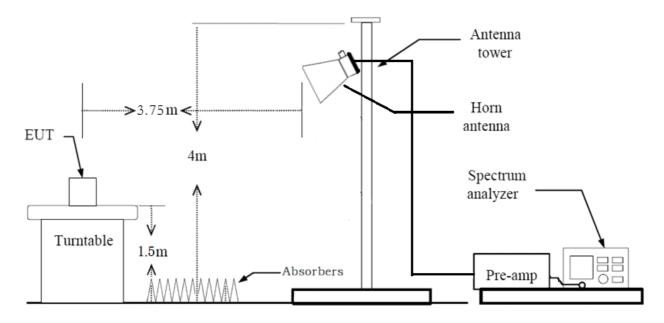

#### **TEST PROCEDURE**

- 1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Repeat above procedures until the measurements for all frequencies are complete.
- 7. Spectrum Setting
  - a. Peak: 1 GHz 25 GHz, RBW = 1 MHz, VBW ≥3\*RBW
  - b. Average: 1 GHz 25 GHz, RBW = 1 MHz, VBW ≥ 1/τ Hz, where τ = pulse width in seconds.

F-TP22-03 (Rev.00) 55 / 75 **HCT CO.,LTD.** 



#### Note:

- 1. We are performed the RSE and radiated band edge using standard radiated method.
- 2. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).
- 3. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)
- 4. The duty cycle factor for BT mode.

DT Mode	Ton	VBW(1/T)	The actual setting value of VBW
BT Mode	(ms)	(Hz)	(Hz)
GFSK	2.885	347	1000
π/4DQPSK	2.890	346	1000
8DPSK	2.890	346	1000

F-TP22-03 (Rev.00) 56 / 75 **HCT CO.,LTD.** 



#### **TEST RESULTS**

#### 9 kHz - 30MHz

**Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin		
MHz	dBuV	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB		
	No Critical peaks found								

#### Notes:

- 1. Measuring frequencies from 9 kHz to the 30MHz.
- 2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
- 3. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
- 4. Limit line = specific Limits (dBuV) + Distance extrapolation factor
- 5. This test is performed with hopping off.
- 6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

F-TP22-03 (Rev.00) 57 / 75 **HCT CO.,LTD.** 



#### **TEST RESULTS**

#### **Below 1 GHz**

**Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin		
MHz	dBuV	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB		
	No Critical peaks found								

#### Notes:

- 1. Measuring frequencies from 30 MHz to the 1 GHz.
- 2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
- 3. This test is performed with hopping off.
- 4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

F-TP22-03 (Rev.00) 58 / 75 **HCT CO.,LTD.** 



Above 1 GHz

Operation Mode: CH Low(GFSK)

Frequency	Reading	* A.F.+C.LA.G.+D.F.	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Туре
4804	52.21	-0.61	V	51.60	73.98	22.38	PK
4804	41.84	-0.61	V	41.23	53.98	12.75	AV
7206	47.09	8.78	V	55.87	73.98	18.11	PK
7206	34.11	8.78	V	42.89	53.98	11.09	AV
4804	51.74	-0.61	Η	51.13	73.98	22.85	PK
4804	42.79	-0.61	Н	42.18	53.98	11.80	AV
7206	47.30	8.78	Н	56.08	73.98	17.90	PK
7206	34.34	8.78	Н	43.12	53.98	10.86	AV

Operation Mode: CH Low(8DPSK)

Frequency	Reading	* A.F.+C.LA.G.+D.F.	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Туре
4804	51.39	-0.61	V	50.78	73.98	23.20	PK
4804	40.39	-0.61	V	39.78	53.98	14.20	AV
7206	46.01	8.78	V	54.79	73.98	19.19	PK
7206	34.22	8.78	V	43	53.98	10.98	AV
4804	51.71	-0.61	Н	51.1	73.98	22.88	PK
4804	40.97	-0.61	Н	40.36	53.98	13.62	AV
7206	46.10	8.78	Н	54.88	73.98	19.10	PK
7206	34.25	8.78	Н	43.03	53.98	10.95	AV

F-TP22-03 (Rev.00) 59 / 75 **HCT CO.,LTD.** 



Operation Mode: CH Low(π/4DQPSK)

Frequency	Reading	* A.F.+C.LA.G.+D.F.	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Туре
4804	51.10	-0.61	V	50.49	73.98	23.49	PK
4804	40.13	-0.61	V	39.52	53.98	14.46	AV
7206	46.03	8.78	V	54.81	73.98	19.17	PK
7206	34.21	8.78	V	42.99	53.98	10.99	AV
4804	51.70	-0.61	Н	51.09	73.98	22.89	PK
4804	40.94	-0.61	Н	40.33	53.98	13.65	AV
7206	46.07	8.78	Н	54.85	73.98	19.13	PK
7206	34.23	8.78	Н	43.01	53.98	10.97	AV

<sup>\*</sup>A.F.: Antenna Factor / C.L.: Cable Loss / AMP.G.: Amplifier Gain / D.F.: Distance Factor

#### Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain + Distance Factor
- 5. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)
- 6. Spectrum setting:
  - a. Peak Setting 1 GHz 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. Average Setting 1 GHz − 25 GHz, RBW = 1 MHz, VBW ≥ 1/τ Hz, where τ = pulse width in seconds. We performed using a reduced video BW method was done with the analyzer in linear mode.
- 7. FYI: Duty Cycle Correction Factor (79 channel hopping)
  - a. Time to cycle through all channels =  $\Delta$  t=  $\tau$  [ms] x 79 channels = 229.100 ms, where  $\tau$  = pulse width
  - b. 100 ms/  $\Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer, H'=1
  - c. Worst Case Dwell Time = T [ms] x H '= 2.900 ms
  - d. Duty Cycle Correction = 20log (Worst Case Dwell Time/ 100ms) dB = -30.752 dB
- 8. Duty Cycle Correction Factor(AFH mode minimum channel number case 20 channels)
  - a. Time to cycle through all channels =  $\Delta$  t=  $\tau$  [ms] x 20 channels = 58.00 ms, where  $\tau$  = pulse width
  - b. 100 ms/  $\Delta t$  [ms] =  $H \rightarrow \text{Round up to next highest integer}$ , H' = 2
  - c. Worst Case Dwell Time =  $\tau$  [ms] x H '= 5.800 ms
  - d. Duty Cycle Correction(AFH) = 20log (Worst Case Dwell Time/ 100ms) dB = -24.7314 dB

F-TP22-03 (Rev.00) 60 / 75 **HCT CO.,LTD.** 



- e. We applied DCCF in the test result which hopping channel number is 20.
- 9. We have done Normal Mode and EDR Mode test.
- 10. This test is performed with hopping off.
- 11. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

F-TP22-03 (Rev.00) 61 / 75 **HCT CO.,LTD.** 



Operation Mode: CH Mid(GFSK)

Frequency	Reading	* A.F.+C.LA.G.+D.F.	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Туре
4882	51.99	0.19	V	52.18	73.98	21.80	PK
4882	41.53	0.19	V	41.72	53.98	12.26	AV
7323	46.71	8.85	V	55.56	73.98	18.42	PK
7323	34.26	8.85	V	43.11	53.98	10.87	AV
4882	52.50	0.19	Н	52.69	73.98	21.29	PK
4882	42.28	0.19	Н	42.47	53.98	11.51	AV
7323	46.75	8.85	Н	55.6	73.98	18.38	PK
7323	34.28	8.85	Н	43.13	53.98	10.85	AV

Operation Mode: CH Mid(8DPSK)

Frequency	Reading	* A.F.+C.LA.G.+D.F.	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Туре
4882	51.55	0.19	V	51.74	73.98	22.24	PK
4882	40.17	0.19	V	40.36	53.98	13.62	AV
7323	46.10	8.85	V	54.95	73.98	19.03	PK
7323	34.18	8.85	V	43.03	53.98	10.95	AV
4882	51.73	0.19	Н	51.92	73.98	22.06	PK
4882	40.68	0.19	Н	40.87	53.98	13.11	AV
7323	46.11	8.85	Н	54.96	73.98	19.02	PK
7323	34.23	8.85	Н	43.08	53.98	10.90	AV

F-TP22-03 (Rev.00) 62 / 75 **HCT CO.,LTD.** 



Operation Mode: CH Mid(π/4DQPSK)

Frequency	Reading	* A.F.+C.LA.G.+D.F.	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Туре
4882	51.84	0.19	V	52.03	73.98	21.95	PK
4882	40.11	0.19	V	40.3	53.98	13.68	AV
7323	46.29	8.85	V	55.14	73.98	18.84	PK
7323	34.19	8.85	V	43.04	53.98	10.94	AV
4882	52.04	0.19	Н	52.23	73.98	21.75	PK
4882	40.69	0.19	Н	40.88	53.98	13.10	AV
7323	46.37	8.85	Н	55.22	73.98	18.76	PK
7323	34.22	8.85	Н	43.07	53.98	10.91	AV

<sup>\*</sup>A.F.: Antenna Factor / C.L.: Cable Loss / AMP.G.: Amplifier Gain / D.F.: Distance Factor

#### Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain + Distance Factor
- 5. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)
- 6. Spectrum setting:
  - a. Peak Setting 1 GHz 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. Average Setting 1 GHz − 25 GHz, RBW = 1 MHz, VBW ≥ 1/τ Hz, where τ = pulse width in seconds. We performed using a reduced video BW method was done with the analyzer in linear mode.
- 7. FYI: Duty Cycle Correction Factor (79 channel hopping)
  - a. Time to cycle through all channels =  $\Delta$  t=  $\tau$  [ms] x 79 channels = 229.100 ms, where  $\tau$  = pulse width
  - b. 100 ms/  $\Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer, H'=1
  - c. Worst Case Dwell Time = T [ms] x H '= 2.900 ms
  - d. Duty Cycle Correction = 20log (Worst Case Dwell Time/ 100ms) dB = -30.752 dB
- 8. Duty Cycle Correction Factor(AFH mode minimum channel number case 20 channels)
  - a. Time to cycle through all channels =  $\Delta$  t=  $\tau$  [ms] x 20 channels = 58.00 ms, where  $\tau$  = pulse width
  - b. 100 ms/  $\Delta t$  [ms] =  $H \rightarrow \text{Round up to next highest integer}$ , H' = 2
  - c. Worst Case Dwell Time =  $\tau$  [ms] x H '= 5.800 ms
  - d. Duty Cycle Correction(AFH) = 20log (Worst Case Dwell Time/ 100ms) dB = -24.7314 dB

F-TP22-03 (Rev.00) 63 / 75 **HCT CO.,LTD.** 



- e. We applied DCCF in the test result which hopping channel number is 20.
- 9. We have done Normal Mode and EDR Mode test.
- 10. This test is performed with hopping off.
- 11. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

F-TP22-03 (Rev.00) 64 / 75 **HCT CO.,LTD.** 



Operation Mode: CH High(GFSK)

Frequency	Reading	* A.F.+C.LA.G.+D.F.	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Туре
4960	52.43	0.92	V	53.35	73.98	20.63	PK
4960	43.19	0.92	V	44.11	53.98	9.87	AV
7440	46.56	9.03	V	55.59	73.98	18.39	PK
7440	34.09	9.03	V	43.12	53.98	10.86	AV
4960	52.99	0.92	Н	53.91	73.98	20.07	PK
4960	43.76	0.92	Н	44.68	53.98	9.30	AV
7440	46.71	9.03	Н	55.74	73.98	18.24	PK
7440	34.22	9.03	Н	43.25	53.98	10.73	AV

Operation Mode: CH High(8DPSK)

Frequency	Reading	* A.F.+C.LA.G.+D.F.	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Туре
4960	52.14	0.92	V	53.06	73.98	20.92	PK
4960	41.24	0.92	V	42.16	53.98	11.82	AV
7440	46.72	9.03	V	55.75	73.98	18.23	PK
7440	34.17	9.03	V	43.2	53.98	10.78	AV
4960	52.58	0.92	Н	53.5	73.98	20.48	PK
4960	41.80	0.92	Н	42.72	53.98	11.26	AV
7440	46.73	9.03	Н	55.76	73.98	18.22	PK
7440	34.20	9.03	Н	43.23	53.98	10.75	AV

F-TP22-03 (Rev.00) 65 / 75 **HCT CO.,LTD.** 



Operation Mode: CH High (π/4DQPSK)

Frequency	Reading	* A.F.+C.LA.G.+D.F.	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Туре
4960	52.34	0.92	V	53.26	73.98	20.72	PK
4960	41.17	0.92	V	42.09	53.98	11.89	AV
7440	46.56	9.03	V	55.59	73.98	18.39	PK
7440	34.14	9.03	V	43.17	53.98	10.81	AV
4960	52.13	0.92	Н	53.05	73.98	20.93	PK
4960	41.60	0.92	Н	42.52	53.98	11.46	AV
7440	46.59	9.03	Н	55.62	73.98	18.36	PK
7440	34.19	9.03	Н	43.22	53.98	10.76	AV

<sup>\*</sup>A.F.: Antenna Factor / C.L.: Cable Loss / AMP.G.: Amplifier Gain / D.F.: Distance Factor

#### Notes:


- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain + Distance Factor
- 5. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)
- 6. Spectrum setting:
  - a. Peak Setting 1 GHz 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. Average Setting 1 GHz − 25 GHz, RBW = 1 MHz, VBW ≥ 1/τ Hz, where τ = pulse width in seconds. We performed using a reduced video BW method was done with the analyzer in linear mode.
- 7. FYI: Duty Cycle Correction Factor (79 channel hopping)
  - a. Time to cycle through all channels =  $\Delta$  t=  $\tau$  [ms] x 79 channels = 229.100 ms, where  $\tau$  = pulse width
  - b. 100 ms/  $\Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer, H'=1
  - c. Worst Case Dwell Time = T [ms] x H '= 2.900 ms
  - d. Duty Cycle Correction = 20log (Worst Case Dwell Time/ 100ms) dB = -30.752 dB
- 8. Duty Cycle Correction Factor(AFH mode minimum channel number case 20 channels)
  - a. Time to cycle through all channels =  $\Delta$  t=  $\tau$  [ms] x 20 channels = 58.00 ms, where  $\tau$  = pulse width
  - b. 100 ms/  $\Delta t$  [ms] =  $H \rightarrow \text{Round up to next highest integer}$ , H' = 2
  - c. Worst Case Dwell Time =  $\tau$  [ms] x H '= 5.800 ms
  - d. Duty Cycle Correction(AFH) = 20log (Worst Case Dwell Time/ 100ms) dB = -24.7314 dB

F-TP22-03 (Rev.00) 66 / 75 **HCT CO.,LTD.** 



- e. We applied DCCF in the test result which hopping channel number is 20.
- 9. We have done Normal Mode and EDR Mode test.
- 10. This test is performed with hopping off.
- 11. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.


F-TP22-03 (Rev.00) 67 / 75 **HCT CO.,LTD.** 






# ■ RESULT PLOTS (Worst case : X-H)

## Radiated Spurious Emissions plot – Average Reading (GFSK, Ch.78 2nd Harmonic)

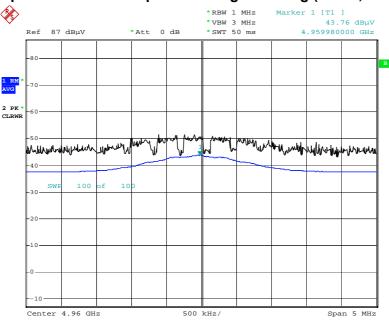

Date: 11.0CT.2017 12:14:58

# Radiated Spurious Emissions plot – Peak Reading (GFSK, Ch.78 2nd Harmonic)

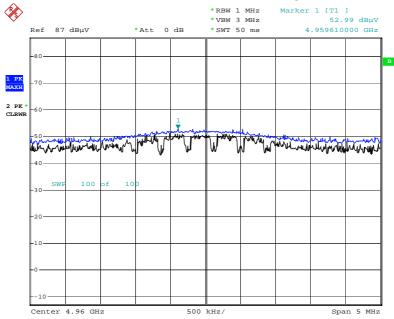

Date: 11.0CT.2017 12:16:12

Note: Only the worst case plots for Radiated Spurious Emissions.

F-TP22-03 (Rev.00) 68 / 75 **HCT CO.,LTD.** 



### 9.6.3 RADIATED RESTRICTED BAND EDGES

## Test Requirements and limit, §15.247(d), §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c).

Operation Mode Normal(GFSK)

Operating Frequency 2402 MHz, 2480 MHz

Channel No CH 0, CH 78

Frequency	Reading	※ A.F.+C.L.+D.F.	Ant. Pol.	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Туре
2390.0	26.11	32.68	Н	58.79	73.98	15.19	PK
2390.0	14.11	32.68	Н	46.79	53.98	7.19	AV
2390.0	25.86	32.68	V	58.54	73.98	15.44	PK
2390.0	14.05	32.68	٧	46.73	53.98	7.25	AV
2483.5	26.18	33.05	Н	59.23	73.98	14.75	PK
2483.5	17.12	33.05	Н	50.17	53.98	3.81	AV
2483.5	25.32	33.05	٧	58.37	73.98	15.61	PK
2483.5	15.78	33.05	V	48.83	53.98	5.15	AV

F-TP22-03 (Rev.00) 69 / 75 **HCT CO.,LTD.** 



Operation Mode EDR(8DPSK)

Operating Frequency 2402 MHz , 2480 MHz

Channel No CH 0, CH 78

Frequency	Reading	※ A.F.+C.L.+D.F.	Ant. Pol.	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Туре
2390.0	25.57	32.68	Н	58.25	73.98	15.73	PK
2390.0	14.17	32.68	Н	46.85	53.98	7.13	AV
2390.0	25.50	32.68	٧	58.18	73.98	15.80	PK
2390.0	14.15	32.68	V	46.83	53.98	7.15	AV
2483.5	26.21	33.05	Н	59.26	73.98	14.72	PK
2483.5	17.07	33.05	Н	50.12	53.98	3.86	AV
2483.5	25.61	33.05	V	58.66	73.98	15.32	PK
2483.5	15.41	33.05	V	48.46	53.98	5.52	AV

Operation Mode  $EDR(\pi/4DQPSK)$ 

Operating Frequency 2402 MHz , 2480 MHz

Channel No CH 0, CH 78

Frequency	Reading	* A.F.+C.L.+D.F.	Ant. Pol.	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Туре
2390.0	25.38	32.68	Н	58.06	73.98	15.92	PK
2390.0	14.12	32.68	Н	46.80	53.98	7.18	AV
2390.0	25.22	32.68	V	57.90	73.98	16.08	PK
2390.0	14.07	32.68	V	46.75	53.98	7.23	AV
2483.5	26.02	33.05	Н	59.07	73.98	14.91	PK
2483.5	17.06	33.05	Н	50.11	53.98	3.87	AV
2483.5	25.03	33.05	V	58.08	73.98	15.90	PK
2483.5	15.33	33.05	V	48.38	53.98	5.60	AV

\*A.F. : Antenna Factor C.L. : Cable Loss

D.F.: Distance Factor




#### Notes:

- 1. Frequency range of measurement = 2483.5 MHz ~ 2500 MHz
- 2. Total = Reading Value + Antenna Factor + Cable Loss + Distance Factor
- 3. Distance extrapolation factor = 20 log (test distance / specific distance) (dB)
- 4. Spectrum setting:
  - a. Peak Setting 1 GHz 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. Average Setting 1 GHz 25 GHz, RBW = 1 MHz, VBW ≥ 1/τ Hz, where τ = pulse width in seconds.

We performed using a reduced video BW method was done with the analyzer in linear mode.

- 5. FYI: Duty Cycle Correction Factor (79 channel hopping)
  - a. Time to cycle through all channels=  $\Delta$  t=  $\tau$  [ms] x 79 channels = 229.100 ms, where  $\tau$  = pulse width
  - b. 100 ms/  $\Delta t$  [ms] =  $H \rightarrow Round$  up to next highest integer, H'=1
  - c. Worst Case Dwell Time = T [ms] x H '= 2.900 ms
  - d. Duty Cycle Correction = 20log (Worst Case Dwell Time/ 100ms) dB = -30.752 dB
- 6. Duty Cycle Correction Factor(AFH mode minimum channel number case 20 channels)
  - a. Time to cycle through all channels=  $\Delta$  t=  $\tau$  [ms] x 20 channels = 58.00 ms, where  $\tau$  = pulse width
  - b. 100 ms/  $\Delta t$  [ms] =  $H \rightarrow \text{Round up to next highest integer}$ , H = 2
  - c. Worst Case Dwell Time = T [ms] x H '= 5.800 ms
  - d. Duty Cycle Correction(AFH) = 20log (Worst Case Dwell Time/ 100ms) dB = -24.7314 dB
  - e. We applied DCCF in the test result which hopping channel number is 20.
- 7. We have done Normal Mode, EDR Mode.
- 8. This test is performed with hopping off.
- 9. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.


F-TP22-03 (Rev.00) 71 / 75 **HCT CO.,LTD.** 






# ■ RESULT PLOTS (Worst case : X-H)

# Radiated Restricted Band Edges plot – Average Reading (GFSK, Ch.78)

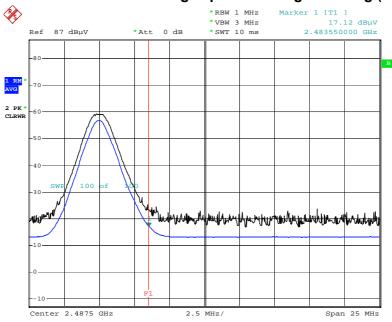

Date: 11.0CT.2017 11:24:26

# Radiated Restricted Band Edges plot – Peak Reading (GFSK, Ch.78)

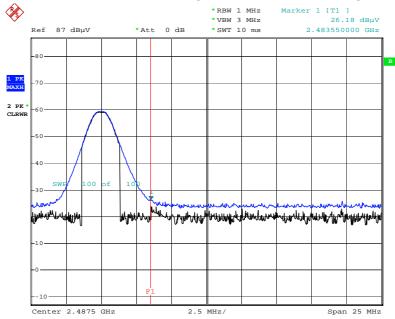

Date: 11.OCT.2017 11:23:18

Note: Only the worst case plots for Radiated Restricted Band Edges.

F-TP22-03 (Rev.00) 72 / 75 **HCT CO.,LTD.** 



#### 9.7 POWERLINE CONDUCTED EMISSIONS

#### LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolt (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Francisco Panera (MILE)	Limits (dBμV)				
Frequency Range (MHz)	Quasi-peak	Average			
0.15 to 0.50	66 to 56	56 to 46			
0.50 to 5	56	46			
5 to 30	60	50			

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

#### **TEST CONFIGURATION**

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

#### **TEST PROCEDURE**

- 1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
- 2. The EUT is connected via LISN to a test power supply.
- 3. The measurement results are obtained as described below:
- 4. Detectors Quasi Peak and Average Detector.

#### **SAMPLE CALCULATION**

Quasi-peak(Final Result) = Reading Value + Correction Factor

Note: We don't perform powerline conducted emission test. Because this EUT is used with vehicle.

F-TP22-03 (Rev.00) 73 / 75 **HCT CO.,LTD.** 



# **10. LIST OF TEST EQUIPMENT**

# 10.1 LIST OF TEST EQUIPMENT(Conducted Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	12/23/2016	Annual	100073
Rohde & Schwarz	ESCI / Test Receiver	12/23/2016	Annual	100584
Agilent	N9020A / Signal Analyzer	06/13/2017	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	11/30/2016	Annual	MY49431210
Agilent	N1911A / Power Meter	04/17/2017	Annual	MY45100523
Agilent	N1921A / Power Sensor	04/17/2017	Annual	MY52260025
Agilent	87300B / Directional Coupler	11/23/2016	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	06/12/2017	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/30/2017	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	07/10/2017	Annual	07560
Rohde & Schwarz	EMC32 / Software	-	-	-
Rohde & Schwarz	CBT / Bluetooth Tester	05/16/2017	Annual	100422

F-TP22-03 (Rev.00) 74 / 75 **HCT CO.,LTD.** 



# 10.2 LIST OF TEST EQUIPMENT(Radiated Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Audix	AM4000 / Antenna Position Tower	N/A	N/A	N/A
Audix	Turn Table	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Rohde & Schwarz	Loop Antenna	04/19/2017	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	04/06/2017	Biennial	760
Schwarzbeck	BBHA 9120D / Horn Antenna	08/25/2016	Biennial	9120D-1300
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	04/25/2017	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	09/06/2017	Annual	100688
Rohde & Schwarz	FSP(9 kHz ~ 40 GHz) / Spectrum Analyzer	07/27/2017	Annual	100843
Wainwright Instruments	WHK3.0/18G-10EF / High Pass Filter	06/12/2017	Annual	8
Wainwright Instruments	WHFX7.0/18G-8SS / High Pass Filter	05/15/2017	Annual	29
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	06/30/2017	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/24/2017	Annual	2
Api tech.	18B-03 / Attenuator (3 dB)	06/12/2017	Annual	1
Agilent	8493C-10 / Attenuator(10 dB)	07/19/2017	Annual	08285
CERNEX	CBLU1183540 / Power Amplifier	07/11/2017	Annual	22964
CERNEX	CBL06185030 / Power Amplifier	07/11/2017	Annual	22965
CERNEX	CBL18265035 / Power Amplifier	01/23/2017	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	06/30/2017	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/31/2017	Annual	3000C000276

F-TP22-03 (Rev.00) 75 / 75 **HCT CO.,LTD.**