

Certification of Compliance

CFR 47 Part 15 Subpart B

Test Report File No. : 05-IST-0329

Date of Issue : Oct 22, 2005

Model(s) : EMX-900

Kind of Product : MP3 PLAYER

FCC ID : TQEEMX-900

Applicant : ENOX Co., Ltd

Address : 7Fl, Newcore Bldg, 971-20, Hokey-dong, Dongan-gu,
Anyang-si, Gyeonggi-do, 431-080, Korea

Manufacturer : ENOX Co., Ltd

Address : 7Fl, Newcore Bldg, 971-20, Hokey-dong, Dongan-gu,
Anyang-si, Gyeonggi-do, 431-080, Korea

Test Result

Positive

Negative

Reviewed By



S.J.CHO / EMC Group Manager

Approved By



J.H.LEE / Chief

Comment(s)

- Investigations requested : Measurement to the relevant clauses of FCC rules and regulations Part 15 Subpart B - Unintentional Radiators, Class B.
- The test report with appendix consists of 26 pages.
- The test result only responds to the tested sample.
- It is not allowed to copy this report even partly without the allowance of IST EMC Laboratory.
- This equipment as for has been shown to be capable of continued compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4 2003.



TABLE OF CONTENTS

Table of contents	2
Information of test laboratory, Environmental conditions, Power used, Product information	3
Descriptions of test	
Conducted Emission	4
Radiated Emission	5
Measurement Uncertainty Calculations	6
Equipment Under Test	7
Test Set-Up (Figure)	8
Summary	9

■ Test Conditions and Data - Emissions

◆ Conducted Emissions	0.15MHz - 30MHz	Applicable
Test Conditions / Data and Plots		10-12
◆ Radiated Emissions	30MHz - 1GHz	Applicable
Test Conditions / Data and Plots		13-21

Appendix	A. The Photos of Test Setup	22-24
	B. The Photos of Equipment Under Test	25-26

Note:

INFORMATIONS OF TEST LABORATORY

EMC LABORATORY of IST Co., Ltd. (*FCC Filing Lab.*)

San 21-8, Goan-Ri, Baekam-Myun, Yongin-City

Kyonggi-Do, 449-860, Korea

TEL : +82 31 333 4093 FAX : +82 31 333 4094

ENVIRONMENTAL CONDITIONS

Temperature	23 °C
Humidity	45.5 %
Atmospheric pressure	1012 mbar

POWER SUPPLY SYSTEM USED

Power supply system	AC 120Vac, 60Hz (PC Power) (Refer to the product information)
---------------------	--

PRODUCT INFORMATION

The Equipment Under Test(EUT) is MP3 PLAYER of ENOX Co., Ltd
(FCC ID : TQEEMX-900)

Model Name :	EMX-900
Supported file format:	MPEG 1/2/2.5 Layer 3(8~320kbps, VBR) WMA (5~192kbps) ASF, OGG (Q10)
Battery :	Li-polymer Battery (3.7V) with in
USB :	USB2.0
LCD :	OLED (128 x 64) / 2 Color
Size :	75 x 32 x 16.4mm
S/N Ratio :	90dB
FM Bandwidth :	87~108MHz

- EMC suppression device is not used during the test.
- Please refer to user's manual.


DESCRIPTIONS OF TEST

Conducted Emissions:


The measurement were performed over the frequency range of 0.15MHz to 30MHz using a $50\Omega/50\mu\text{H}$ LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 10KHz or for "quasi-peak" & "Average" within a bandwidth of 9KHz.

-Procedure of Test

The line-conducted facility is located inside a shielded room No.1. A 1m X 1.5m wooden table 80cm height is placed 40cm away from the vertical wall and 1.5m away from the other wall of the shielded room. The R/S 3725/2 and Hyup-Rip KNW-407 LISN are bonded to bottom of the shielded room. The EUT is located on the wooden table with distance more than 80cm from the LISN and powered from the LISN. The peripheral equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the EMCO LISN. All interconnecting cables more than 1m were shortened by non-inductive bundling to a 1m length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating conditions. The RF output of the LISN was connected to the R/S receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using Quasi-Peak mode by manual measurement, after scanned by automatic Peak mode for frequency range from 0.15 to 30MHz. The bandwidth of the receiver was set to 10kHz. The EUT, peripheral equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

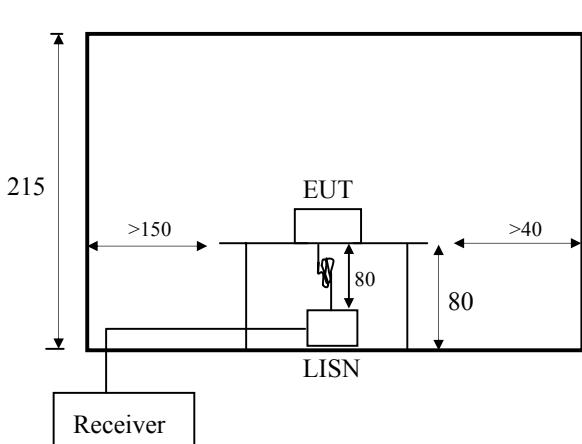

< Side View >

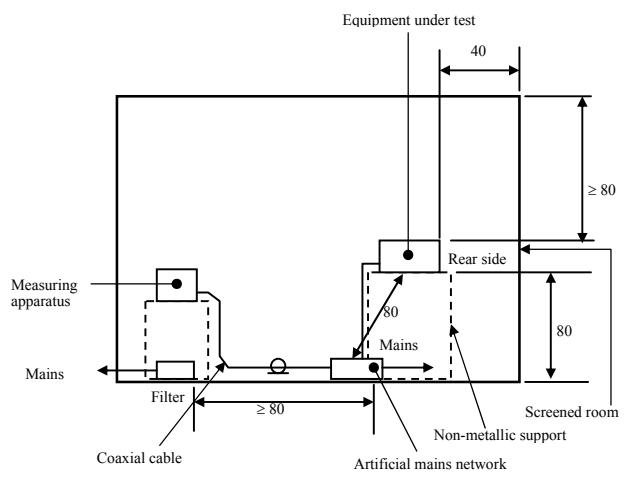

< Concept Drawing >


DESCRIPTION OF TEST

Radiated Emissions:

The measurement was performed over the frequency range of 30MHz to 1GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurement was made with the detector set for "quasi-peak" within a bandwidth of 120KHz.

-Procedure of Test

Preliminary measurements were made at 3 meter using bi-conical and log-periodic antennas, and spectrum analyzer to determine the frequency producing the max. emission in anechoic chamber. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turn-table azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30MHz to 1000MHz using S/B LogBicon antenna VL9160. Under 30MHz, magnetic loop antenna were used. Final measurements were made at open site with 3-meters test distance using the same antenna. The OATS have been verified in regular for its normalized site attenuation. The test equipment was placed on a wooden table. Sufficient time for the EUT, peripheral equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120kHz or 1MHz depending on the frequency of type of signal. The EUT, peripheral equipment and interconnecting cables were re-configured to the set-up producing the max. emission for the frequency and were placed on top of a 0.8-meter high nonmetallic 1 x 1.5 meter table. The EUT, peripheral equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation to the EUT and/or peripheral equipment and changing the polarity of the antenna, whichever determined the worst-case emission.

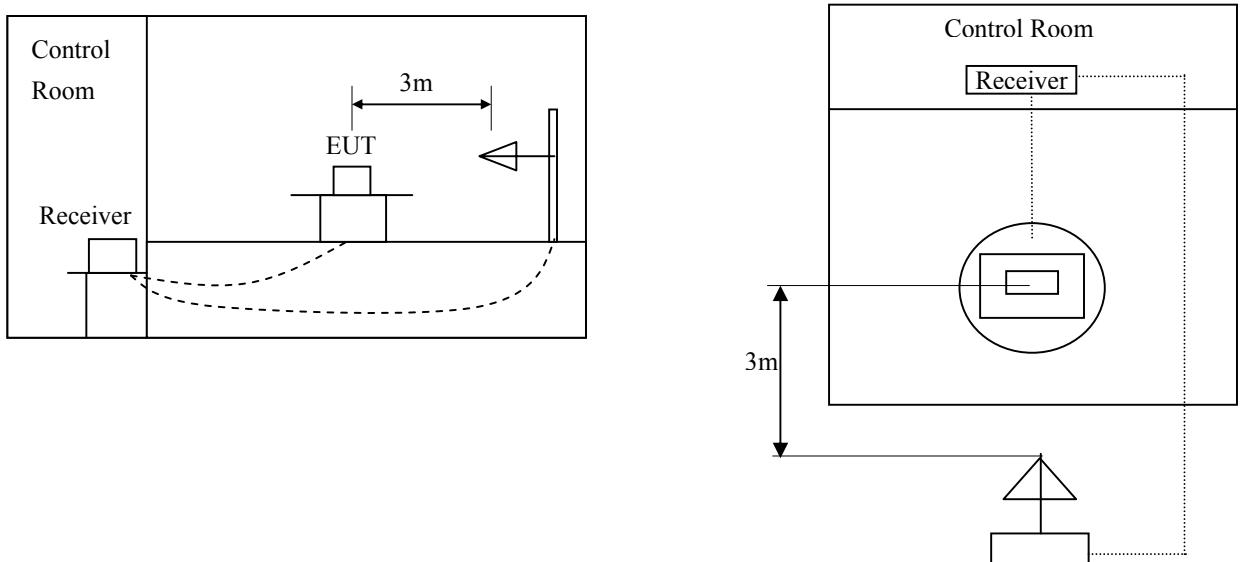

Measurement Uncertainty Calculations

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994).

Contribution (Conducted Emissions)	Probability Distribution	Uncertainty (\pm dB)
		0.15-30MHz
Receiver Specification	Rectangular	1.5
LISN Coupling Specification	Rectangular	1.5
Cable and Input Attenuator Calibration	Normal (k=2)	0.5
Mismatch to Receiver	U-Shaped	-0.8 / +0.7
System Repeatability	Normal (k=1)	0.2
Combined Standard Uncertainty	Normal (k=2)	-1.85 / +1.71
Expanded Uncertainty U	Normal (k=2)	-3.7 / +3.42

$U_{c,minus} = -1.85$, $U_{c,plus} = 1.71$

$U = -3.70 / +3.42 (k=2, 95.45\% \text{ confidence level})$

Contribution (Radiated Emissions)	Probability Distribution	Uncertainties(\pm dB)
		3 m
Antenna Factor	Normal (k=2)	0.9968
Frequency Interpolation	Rectangular	0.1039
Height Variation	Rectangular	-2.6 / +1.5
Directivity Difference	Rectangular	-1.0 / +0
Phase Center Location	Rectangular	1.0
Cable Loss	Normal (k=2)	0.5
Receiver		
Voltage Accuracy	Normal (k=2)	2.0
Pulse Response	Rectangular	1.5
Absolute Repetition Rate	Rectangular	1.5
Mismatch to Receiver		
$ \Gamma_{\text{antenna}} = 0.33$	U-Shaped	-1.0 / +0.9
$ \Gamma_{\text{receiver}} = 0.33$		
System Repeatability	Std Deviation	0.5
Combined Standard Uncertainty	Normal	-2.6048 / 2.2775
Expanded Uncertainty U	Normal (k=2)	-5.21 / +4.55

$U_{c,minus} = -2.6048$, $U_{c,plus} = 2.2775$

$U = -5.21 / +4.55 (k=2, 95.45\% \text{ confidence level})$

Equipment Under Test

EUT Type :

- Table-Top.
- Floor-Standing.
- Table-Top and Floor-Standing(Combination).

Operation - mode of the E.U.T. :

The equipment under test was operated during the measurement under following conditions :

- Standby Mode
- Operational Condition :
 - File up/download mode
 - FM receiving mode
 - Playback mode
 - Recording mode

Configuration of the equipment under test :

Following peripheral devices and interface cables were connected during the measurement :


Equipment	Type	Brand	Serial No.	FCC Info.	Compliance
PC	T328k	HP	KRJ33800KY	DoC	
Keyboard	5219	HP	BN32402948	E5XKB5209	
PS/2 Mouse	MO42KO	HP	030330777	DoC	
Serial Mouse	M-M48	Logitech	LCA53305547	DZL210365	
LCD Monitor	L703C	Daewoo	-	-	
Printer	A0302380	Northen Telecom	2516S60951	BS46XU225C-L	

Connecting Interface Cables :


- Shielded monitor's signal cable(with two ferrite core) : 1.8 m
- Shielded Printer's signal cable(with two ferrite core) : 1.8 m
- Unshielded Mouse(Serial) cable(without ferrite core) : 1.6 m
- Unshielded USB cable(with one ferrite core) : 1.2 m
- Unshielded Earphone cable(without ferrite core) : 1.25 m
- Unshielded Power cable(without ferrite core) : 1.8 m

Note :

Test Set-Up

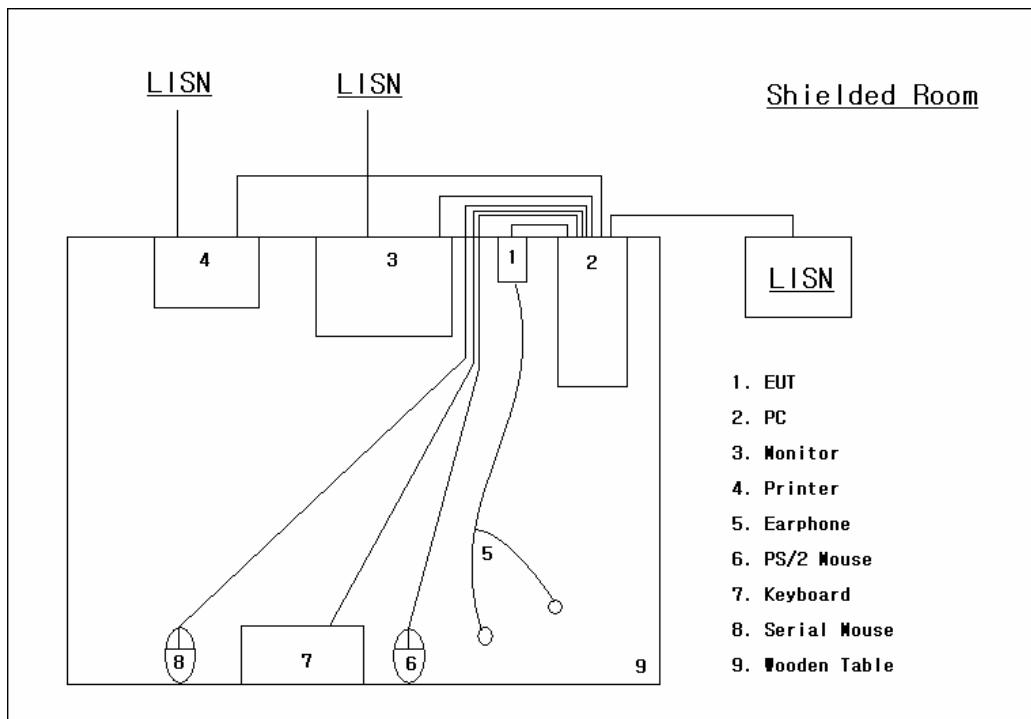

Conducted Emissions

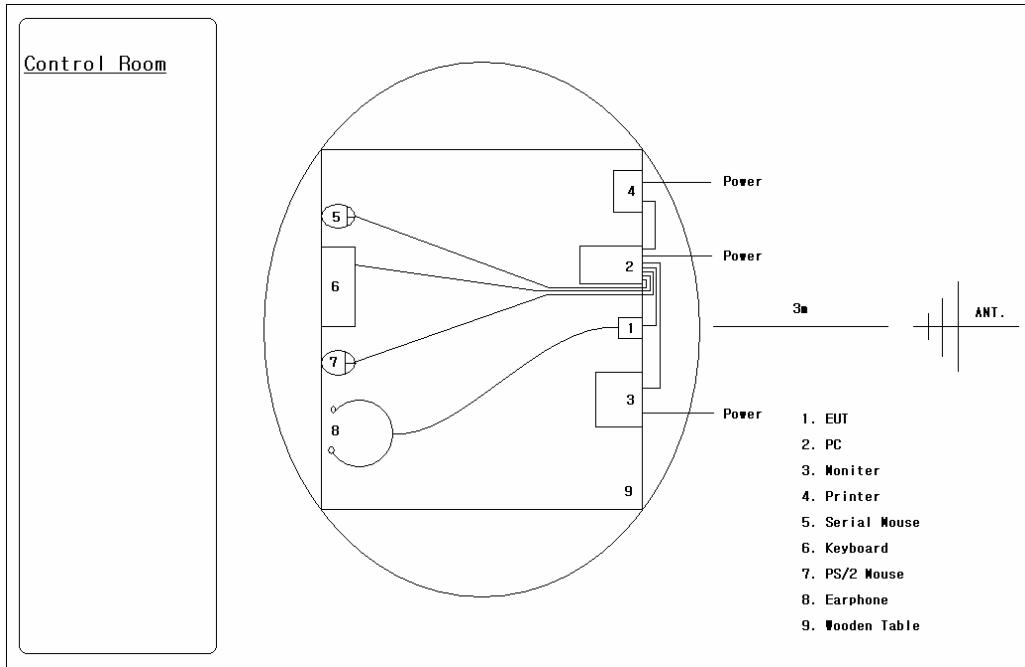

Radiated Emissions

SUMMARY

Emissions

■ Conducted Emission

The requirements are

MET

Not MET

Minimum limit margin

7.5 dB at 0.157 MHz

Maximum limit exceeding

Remarks : With Live phase, for Q-peak detect mode.

(File up/download mode)

Find the test data in following pages 10 to 12.

■ Radiated Emission

The requirements are

MET

Not MET

Minimum limit margin

6.6 dB at 78.0 MHz

Maximum limit exceeding

Remarks : File UP/Download mode.

Find the test data in following page 13 to 21.

Test Date

Begin of Testing : Oct 18, 2005

End of Testing : Oct 20, 2005

Prepared By

Note :

- means the test is applicable,
- is not applicable.


S.J.OH / Senior Engineer

TEST CONDITIONS AND DATA

Conducted Emissions

[Applicable]

◆ Test Equipment Used

Model Name	Description	Manufacture	Calibration Date	Serial Number
ESH3	Test Receiver	Rohde & Schwarz	Jul. 12, 2005	892108/018
3725/2	LISN	EMCO	Jul. 12, 2005	9101-2068
KNW-407	LISN	Hyup-Rip	Jul. 12, 2005	8-883-10
ESH3-Z2	Pulse Limiter	Rohde & Schwarz	Jul. 12, 2005	357.8810.52

◆ Test Accessories Used

Type	Manufacturer
Aneroid Barometer	Sato
Hygrometer	Sato

◆ Test Program

File up/download mode

◆ Test Date

Oct 18, 2005


◆ Test Area

Shielded Room (for Conducted Emission test)

Note : The equipment used is calibrated in regular for every year.

Conducted Emissions

Live Phase

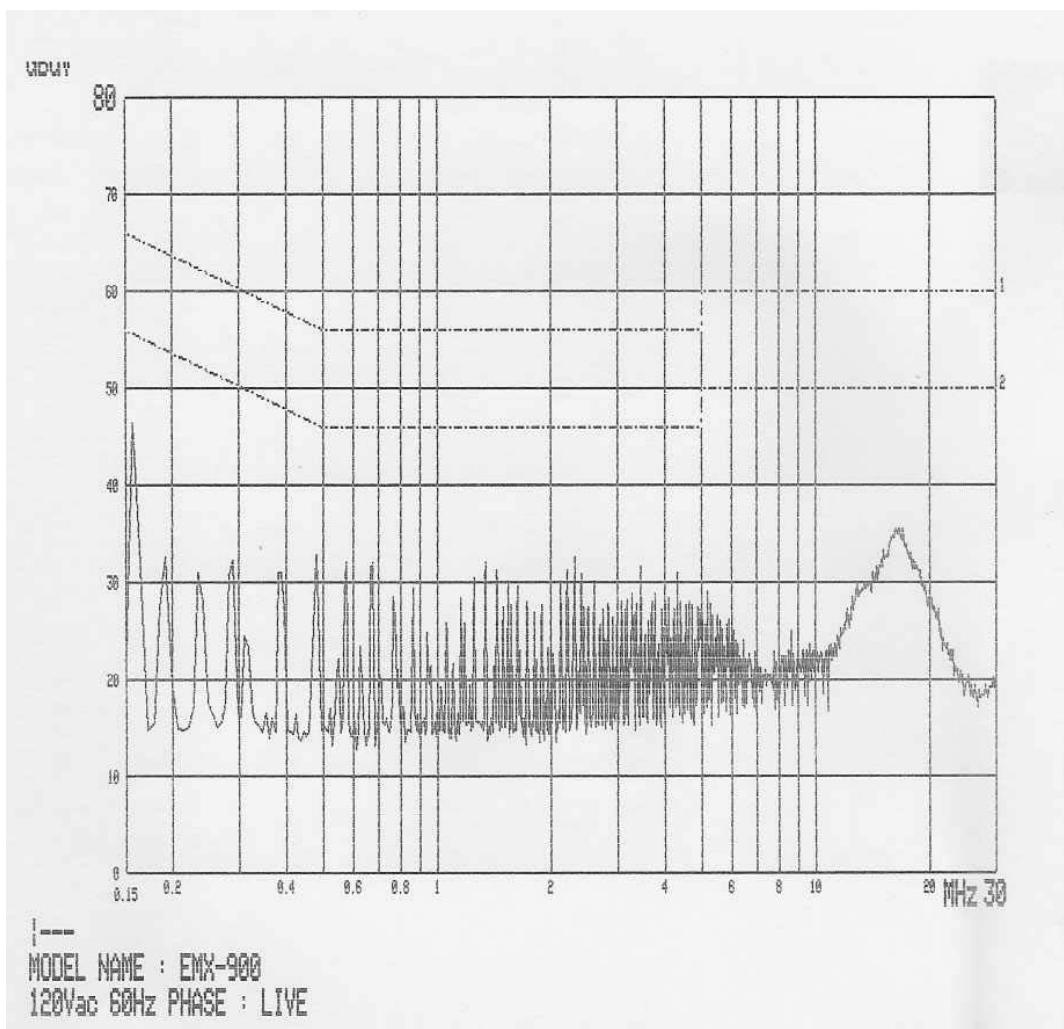


Freq. [MHz]	Measurement [dB μ V]		Limit [dB μ V]		Insertion Loss [dB]	Cable Loss [dB μ V]	Result [dB μ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average			Q-peak	Average	Q-peak	Average
0.157	45.4	46.1	65.6	55.6	0.3	0.5	46.2	46.9	19.4	8.7
0.236	30.0	29.3	62.2	52.2	0.4	0.4	30.8	30.1	31.4	22.1
0.479	33.2	34.1	56.4	46.4	0.4	0.4	34.0	34.9	22.4	11.5
1.343	31.1	30.8	56.0	46.0	0.3	0.5	31.9	31.6	24.1	14.4
16.856	32.4	29.2	60.0	50.0	0.3	0.7	33.4	30.2	26.6	19.8
20.636	21.3	16.6	60.0	50.0	0.3	0.7	22.3	17.6	37.7	32.4

Note :

Conducted Emissions

Neutral Phase

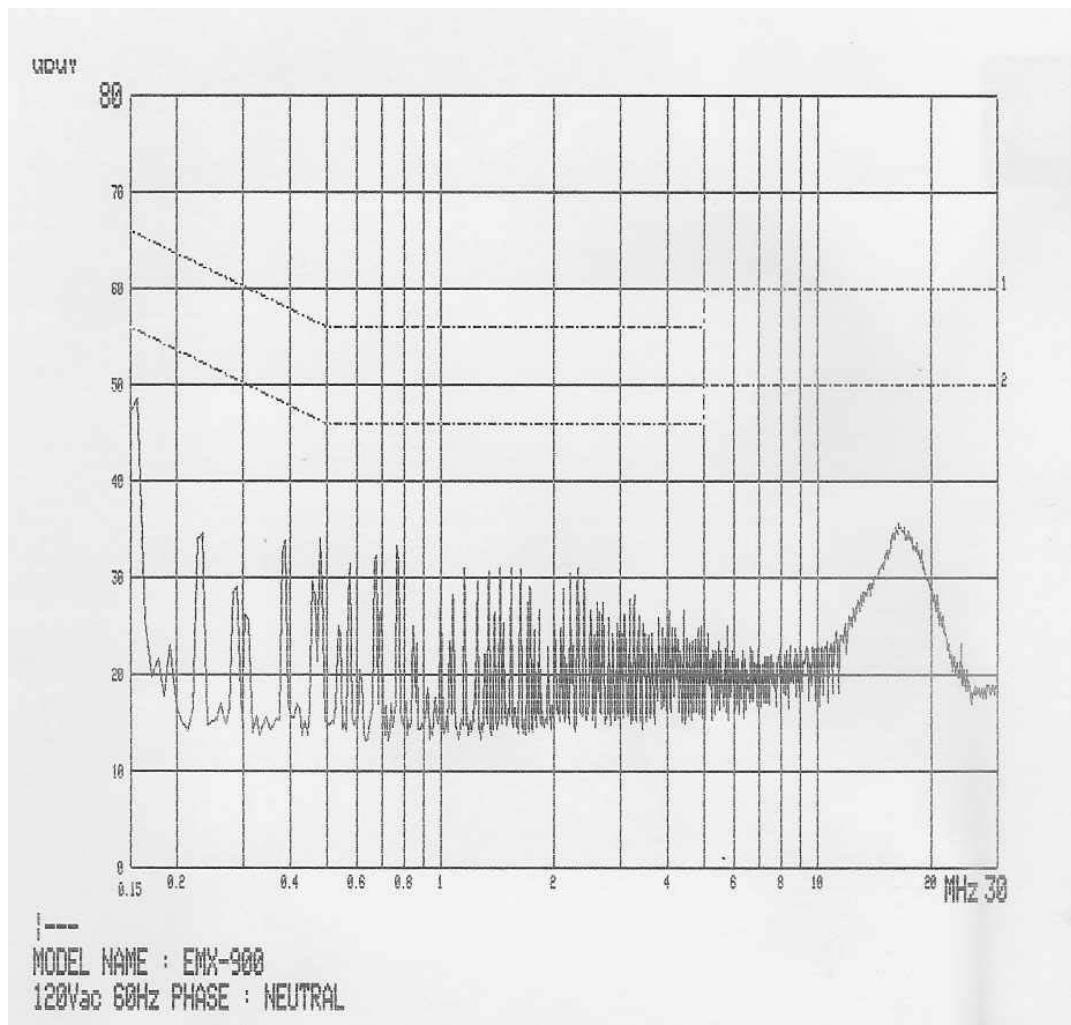

Freq. [MHz]	Measurement [dB μ V]		Limit [dB μ V]		Insertion Loss [dB]	Cable Loss [dB μ V]	Result [dB μ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average			Q-peak	Average	Q-peak	Average
0.157	46.3	47.3	65.6	55.6	0.3	0.5	47.1	48.1	18.5	7.5
0.236	32.7	33.0	62.2	52.2	0.4	0.4	33.5	33.8	28.7	18.4
0.383	28.2	28.6	58.2	48.2	0.4	0.4	29.0	29.4	29.2	18.8
1.343	30.7	29.2	56.0	46.0	0.3	0.5	31.5	30.0	24.5	16.0
10.308	19.8	17.7	60.0	50.0	0.3	0.6	20.7	18.6	39.3	31.4
20.616	22.5	18.3	60.0	50.0	0.3	0.7	23.5	19.3	36.5	30.7

Note :

TEST CONDITIONS AND DATA

Radiated Emission

[Applicable]

◆ Test Equipment Used

Name	Type	Manufacturer	Calibration. Date	Serial Number
ESVS10	Test Receiver	Rohde & Schwarz	Aug. 16, 2005	100171
VULB 9160	LogBicon Ant.	Schwarzbeck	Jul. 19, 2005	3048

◆ Test Accessories Used

Type	Manufacturer
Aneroid Barometer	Sato
Hygrometer	Sato

◆ Test Program

File up/download mode

FM receiving mode

Playback mode

◆ Test Date

Oct 20, 2005

◆ Test Area

Open site No.2

Note : The equipment used is calibrated in regular for every year.

Radiated Emissions


(Disturbance Radiation)

[Applicable]

Freq. [MHz]	Reading [dBuV]	Antenna Factor [dB/m]	Cable Loss [dB]	Polar. [H/V]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]
78.0	23.5	8.0	1.9	H	33.4	40.0	6.6
120.2	18.6	11.5	2.6	H	32.7	43.5	10.8
204.3	15.6	9.2	3.3	V	28.1	43.5	15.4
240.7	15.4	10.6	3.9	V	29.9	46.0	16.1
372.1	5.4	14.0	5.0	H	24.4	46.0	21.6
480.3	11.7	16.3	5.9	V	33.9	46.0	12.1

Note: **File up/download mode**

MEASUREMENT OF DISTURBANCE RADIATION

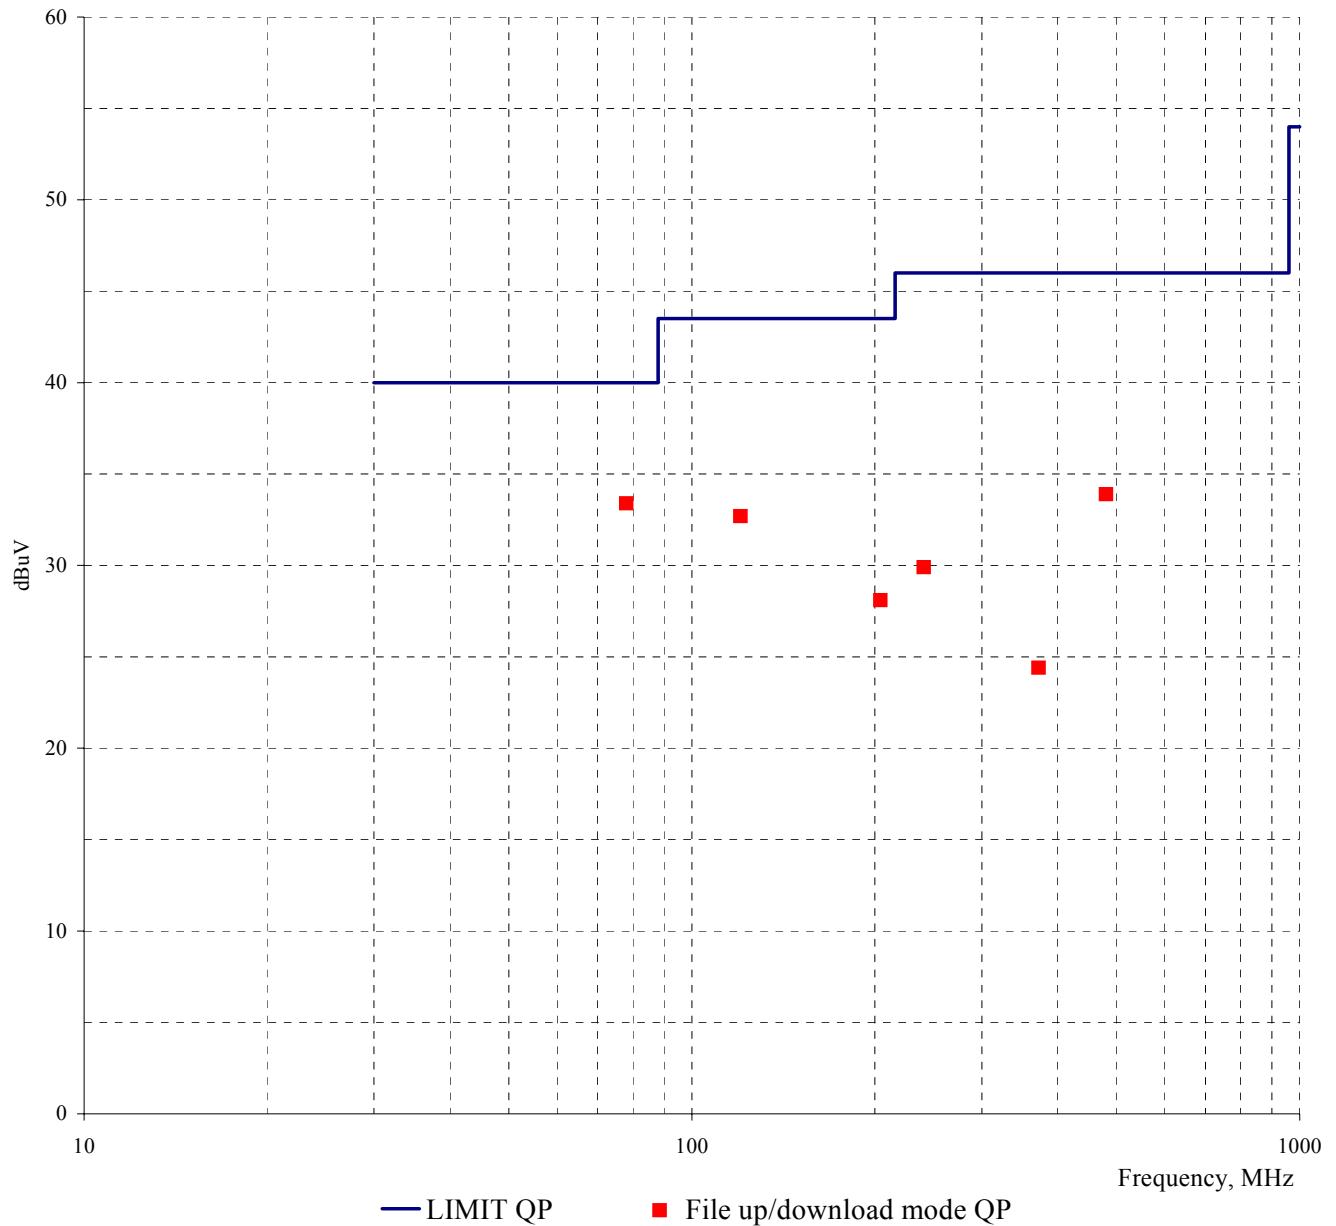


[Applicable]

CH Freq. [MHz]	Freq. [MHz]	Reading [dBuV]	Antenna Factor [dB/m]	Cable Loss [dB]	Polar. [H/V]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]
87.5	79.0	18.6	8.1	1.9	H	28.6	40.0	11.4
	146.7	11.5	12.8	2.8	H	27.1	43.5	16.4
	169.3	15.0	12.2	3.0	H	30.2	43.5	13.3
	192.0	12.0	10.0	3.3	H	25.3	43.5	18.2
	214.5	16.2	9.3	3.4	H	28.9	43.5	14.6
	236.9	9.9	10.6	3.8	H	24.3	46.0	21.7
	259.6	9.0	11.2	3.9	H	24.1	46.0	21.9
	304.7	9.1	12.5	4.4	H	26.0	46.0	20.0
	349.7	4.5	13.6	4.7	H	22.8	46.0	23.2
	372.3	7.4	14.1	5.0	H	26.5	46.0	19.5
	394.8	8.5	14.4	5.1	H	28.0	46.0	18.0
	417.3	8.2	15.0	5.3	H	28.5	46.0	17.5
98.0	79.0	17.0	8.1	1.9	H	27.0	40.0	13.0
	146.7	8.4	12.8	2.8	H	24.0	43.5	19.5
	169.3	11.5	12.2	3.0	H	26.7	43.5	16.8
	192.0	11.8	10.0	3.3	H	25.1	43.5	18.4
	214.5	13.8	9.3	3.4	H	26.5	43.5	17.0
	236.9	10.0	10.6	3.8	H	24.4	46.0	21.6
	259.6	12.5	11.2	3.9	H	27.6	46.0	18.4
	304.7	11.0	12.5	4.4	H	27.9	46.0	18.1
	349.7	9.3	13.6	4.7	H	27.6	46.0	18.4
	372.3	9.2	14.1	5.0	H	28.3	46.0	17.7
	394.8	12.8	14.4	5.1	H	32.3	46.0	13.7
	417.3	7.9	15.0	5.3	H	28.2	46.0	17.8
108.0	79.1	16.9	8.1	1.9	H	26.9	40.0	13.1
	146.7	8.9	12.8	2.8	H	24.5	43.5	19.0
	169.3	12.8	12.2	3.0	H	28.0	43.5	15.5
	192.0	15.8	10.0	3.3	H	29.1	43.5	14.4
	214.6	15.5	9.3	3.4	H	28.2	43.5	15.3
	236.9	11.6	10.6	3.8	H	26.0	46.0	20.0
	259.6	11.8	11.2	3.9	H	26.9	46.0	19.1
	304.7	10.7	12.5	4.4	H	27.6	46.0	18.4
	349.7	8.9	13.6	4.7	H	27.2	46.0	18.8
	372.3	9.0	14.1	5.0	H	28.1	46.0	17.9
	394.8	12.5	14.4	5.1	H	32.0	46.0	14.0
	417.3	8.4	15.0	5.3	H	28.7	46.0	17.3

Note :FM receiving mode

MEASUREMENT OF DISTURBANCE RADIATION

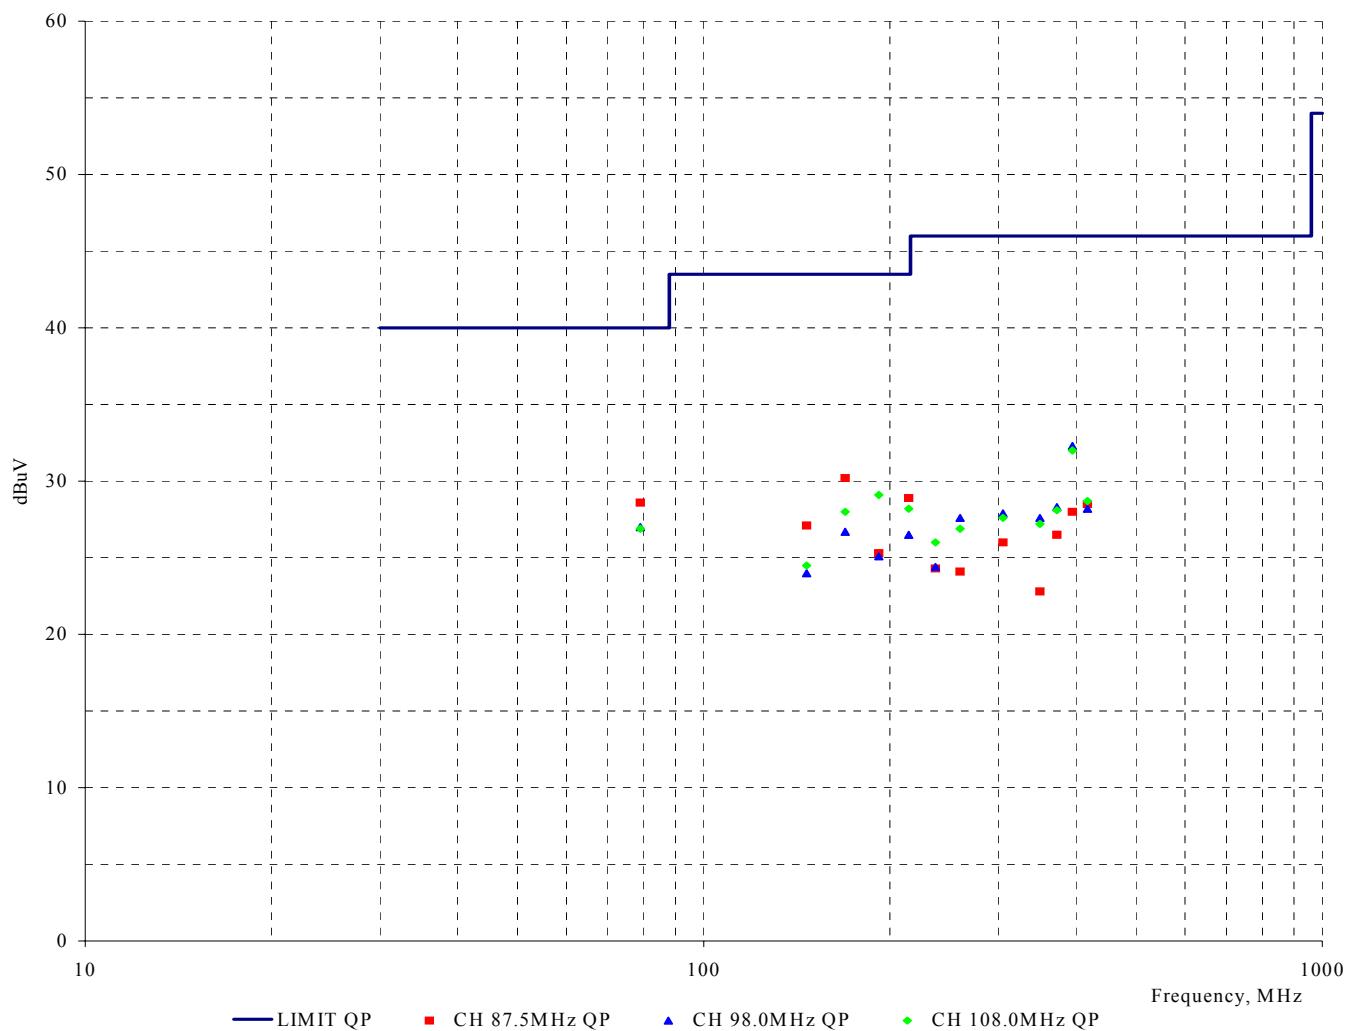


[Applicable]

Freq. [MHz]	Reading [dBuV]	Antenna Factor [dB/m]	Cable Loss [dB]	Polar. [H/V]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]
79.0	17.8	8.1	1.9	H	27.8	40.0	12.2
169.2	10.4	12.2	3.0	H	25.6	43.5	17.9
192.0	13.4	10.0	3.3	H	26.7	43.5	16.8
214.3	17.5	9.3	3.4	H	30.2	43.5	13.3
236.7	9.0	10.6	3.8	H	23.4	46.0	22.6
259.3	4.7	11.2	3.9	H	19.8	46.0	26.2
304.4	13.2	12.5	4.4	H	30.1	46.0	15.9
327.4	6.5	13.2	4.6	H	24.3	46.0	21.7
372.3	6.7	14.1	5.0	H	25.8	46.0	20.2
394.6	7.5	14.4	5.1	H	27.0	46.0	19.0

Note: Playback mode

MEASUREMENT OF DISTURBANCE RADIATION

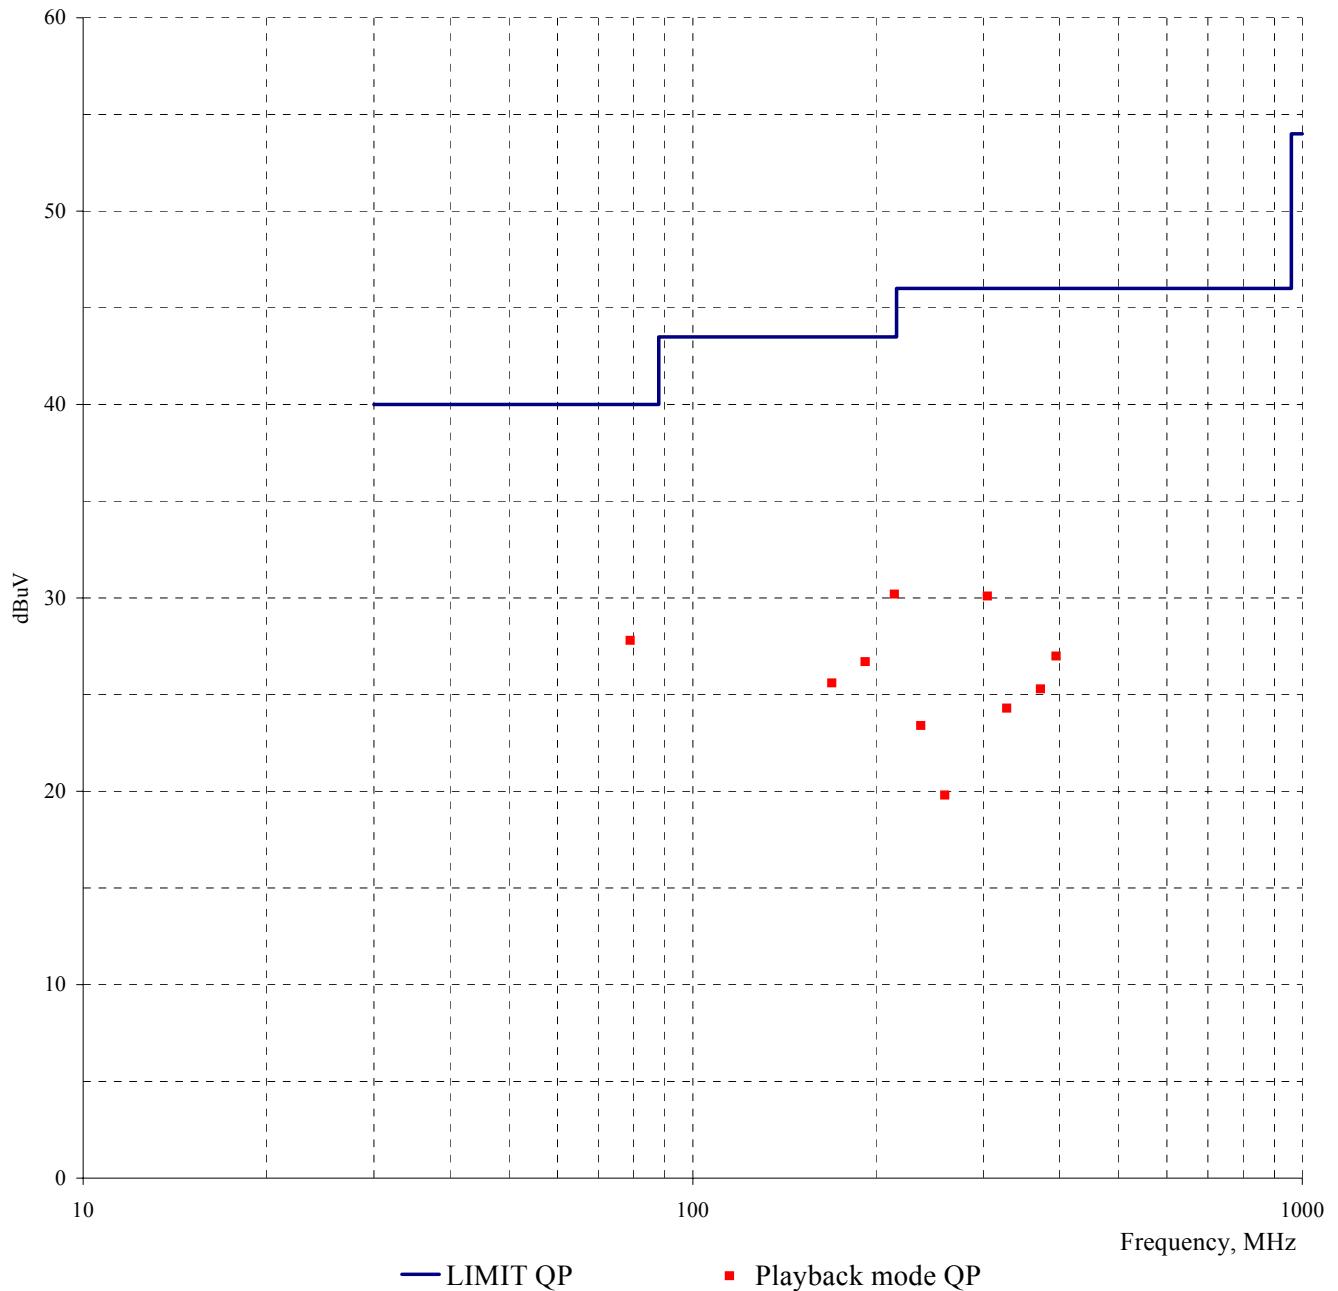


[Applicable]

Freq. [MHz]	Reading [dBuV]	Antenna Factor [dB/m]	Cable Loss [dB]	Polar. [H/V]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]
159.5	6.0	13.1	2.9	H	22.0	43.5	21.5
184.2	10.4	10.7	3.2	H	24.3	43.5	19.2
208.7	18.6	9.2	3.3	H	31.1	43.5	12.4
233.3	11.5	10.3	3.7	H	25.5	46.0	20.5
245.5	4.2	10.9	3.9	H	19.0	46.0	27.0
257.9	7.2	11.2	3.9	H	22.3	46.0	23.7
307.0	12.3	12.5	4.4	H	29.2	46.0	16.8
331.7	7.8	13.3	4.6	H	25.7	46.0	20.3
380.5	11.4	14.2	5.1	H	30.7	46.0	15.3
405.3	10.2	14.5	5.2	H	29.9	46.0	16.1

Note: **Recording mode**

MEASUREMENT OF DISTURBANCE RADIATION

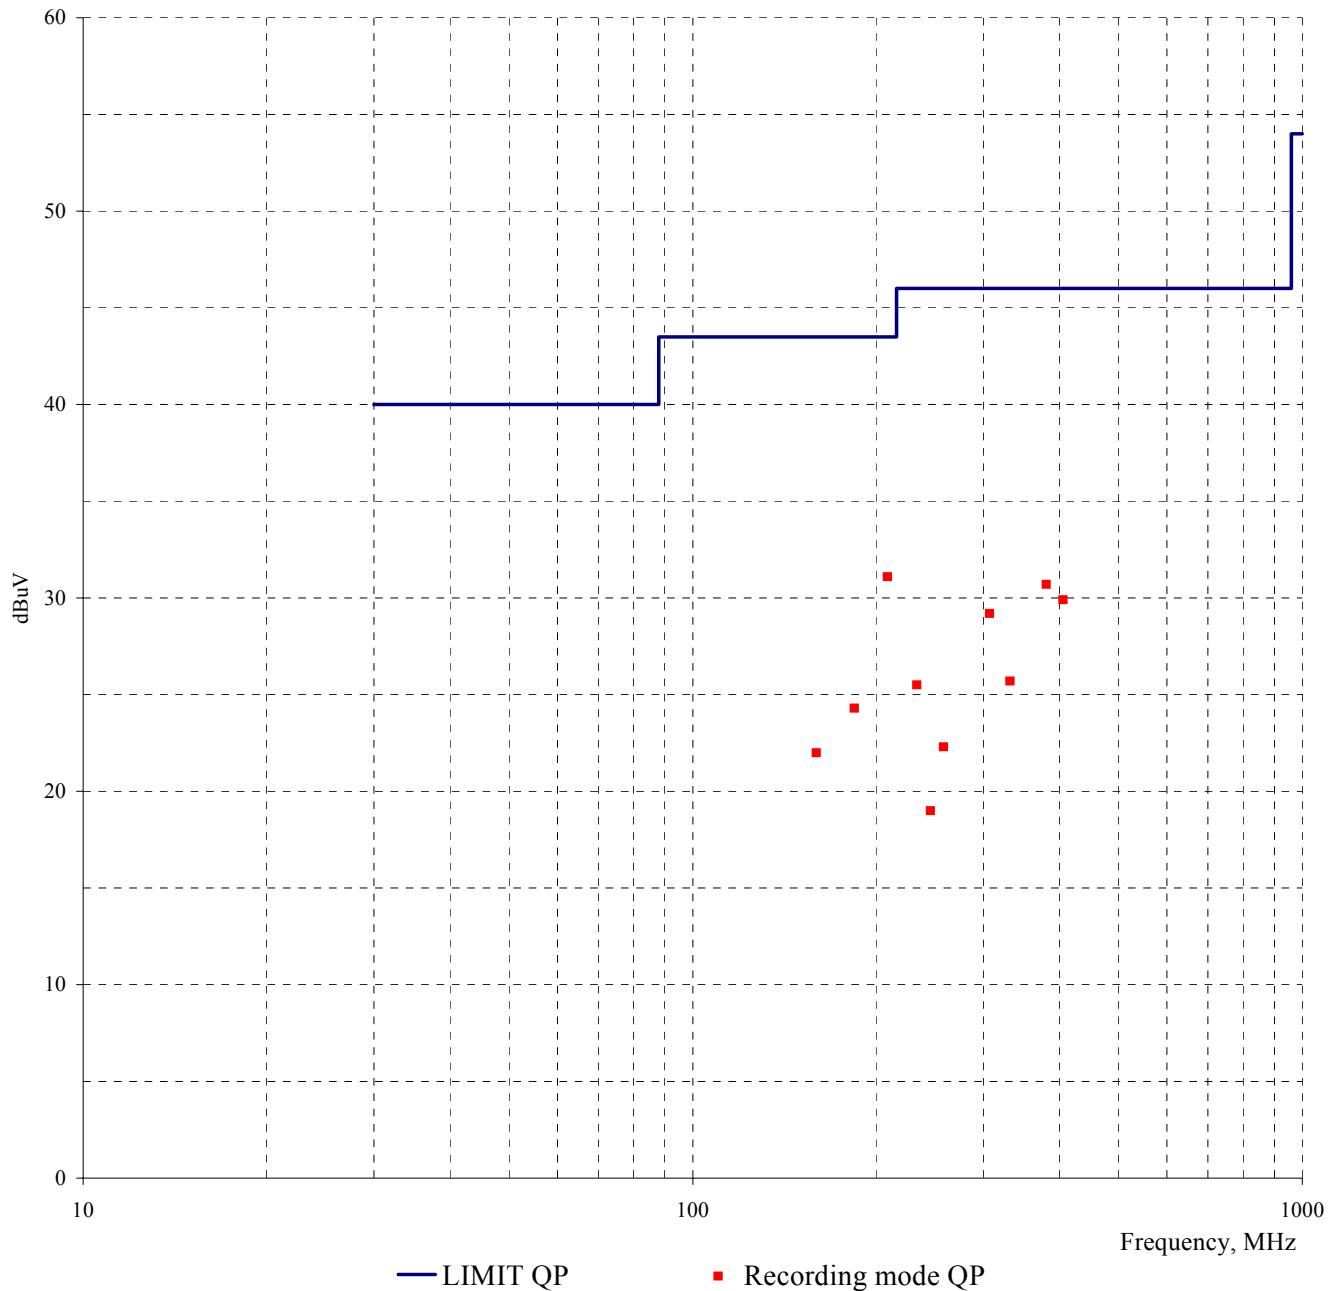

Appendix A. The Photos of Test Setup




Conducted Emissions (File up/download mode) - Front View



Conducted Emissions (File up/download mode) - Rear View

Appendix A. The Photos of Test Setup

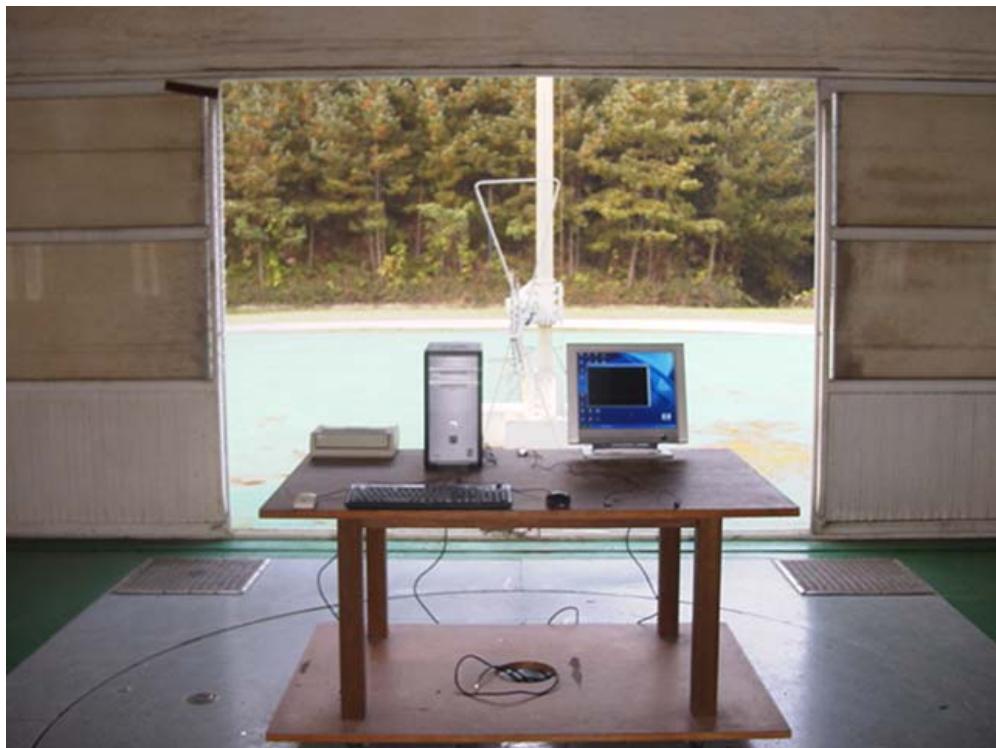


Radiated Emissions (File up/download mode) - Front View



Radiated Emissions (File up/download mode) - Rear View

Appendix A. The Photos of Test Setup

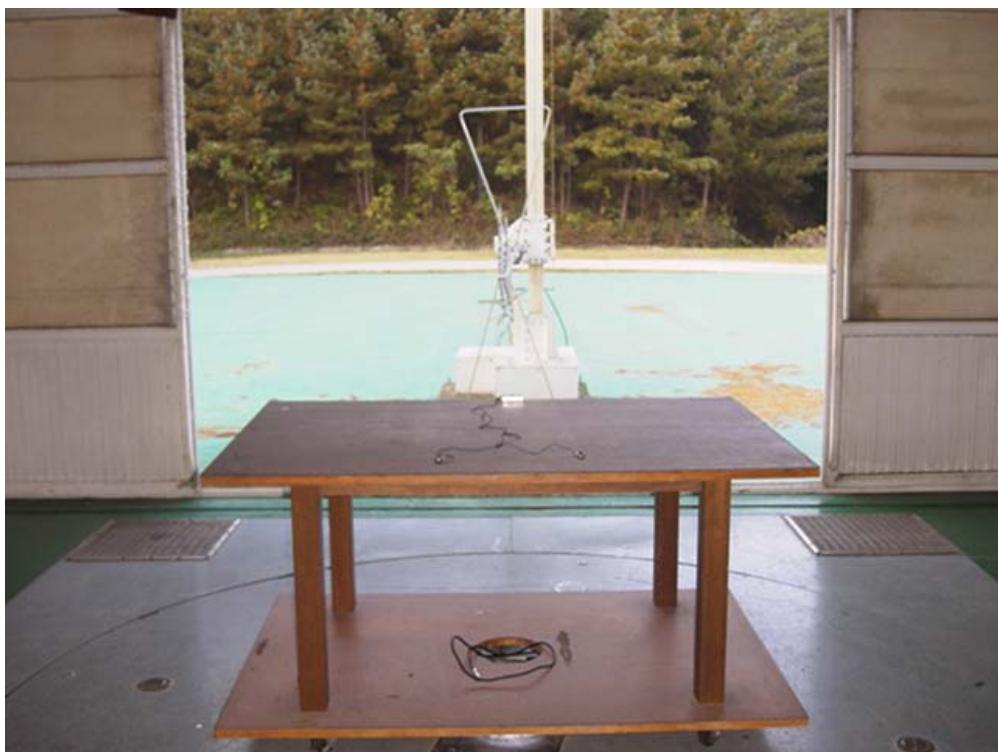

Radiated Emissions (FM receiving, Playback mode) -Front View



Radiated Emissions (FM receiving, Playback mode) -Rear View

Appendix B. The Photos of Equipment Under Test



Front View



Rear View

Appendix B. The Photos of Equipment Under Test



USB Cable



Earphone