

FCC CERTIFICATION
On Behalf of
Camke Development Ltd.

Remote Control Car Transmitter
Model No.: 001A-27, 001B-27

FCC ID: TQWCAR27

Prepared for : Camke Development Ltd.
Address : Rm 1103-1105 Silvercord, Tower 2, 30 Canton Road,
Tsimshatsui, Kowloon, Hongkong

Prepared by : ACCURATE TECHNOLOGY CO. LTD
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20051846
Date of Test : October 28, 2005
Date of Report : November 3, 2005

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
1.2. Description of Test Facility	4
1.3. Measurement Uncertainty	4
2. MEASURING DEVICE AND TEST EQUIPMENT	5
3. RADIATED EMISSION FOR FCC PART 15 SECTION 15.227(B).....	6
3.1. Block Diagram of Test Setup.....	6
3.2. The Field Strength of Radiation Emission Measurement Limits.....	6
3.3. Configuration of EUT on Measurement	7
3.4. Operating Condition of EUT	7
3.5. Test Procedure	7
3.6. The Field Strength of Radiation Emission Measurement Results	8
4. FUNDAMENTAL RADIATED EMISSION FOR FCC PART 15 SECTION 15.227(A).....	9
4.1. Block Diagram of Test Setup.....	9
4.2. The Emission Limit For Section 15.227(a)	9
4.3. EUT Configuration on Measurement	10
4.4. Operating Condition of EUT	10
4.5. Test Procedure	10
4.6. The Emission Measurement Result	11
5. BAND EDGES	12
5.1. The Requirement	12
5.2. EUT Configuration on Measurement	12
5.3. Operating Condition of EUT	12
5.4. Test Procedure	12
5.5. The Measurement Result	13
APPENDIX I (TEST CURVES) (4pages)	

Test Report Certification

Applicant : Camke Development Ltd.
 Manufacturer : Chaoda Plastic Toys Factory
 EUT Description : Remote Control Car Transmitter
 (A) MODEL NO.: 001A-27, 001B-27
 (B) SERIAL NO.: N/A
 (C) POWER SUPPLY: 9V DC ("6F22" batteries 1×)

Measurement Procedure Used:


FCC Rules and Regulations Part 15 Subpart C Section 15.227: 2004 & ANSI C63.4: 2003

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.227 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.


Date of Test : _____ October 28, 2005 _____

Prepared by :




(Engineer)

Reviewer :



(Quality Manager)

Approved & Authorized Signer :



(Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : Remote Control Car Transmitter
 Model Number : 001A-27, 001B-27
 (Note: The samples are same except the appearance color are different, So we prepare 001A-27 for test only.)
 Power Supply : 9V DC ("6F22" batteries 1×)
 Applicant : Camke Development Ltd.
 Address : Rm 1103-1105 Silvercord, Tower 2, 30 Canton Road, Tsimshatsui, Kowloon, Hongkong
 Manufacturer : Chaoda Plastic Toys Factory
 Address : Fengxiang Industrial Zone, Chenghai District, Shantou Guangdong, P.R.China
 Date of sample received : October 25, 2005
 Date of Test : October 28, 2005

1.2. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen, May 10, 2004
 Accredited by FCC, May 10, 2004
 The Certificate Registration Number is 253065
 Accredited by Industry Canada, May 18, 2004
 The Certificate Registration Number is IC 5077
 Name of Firm : ACCURATE TECHNOLOGY CO. LTD
 Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd. Science & Industry Park, Nanshan, Shenzhen, Guangdong P.R. China

1.3. Measurement Uncertainty

Conducted Emission Uncertainty = ±2.66dB

Radiated Emission Uncertainty = ±4.26dB

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	01.02.2006
EMI Test Receiver	Rohde&Schwarz	ESI26	838786/013	01.02.2006
Loop Antenna	Schwarzbeck	FMZB1516	113	01.02.2006
Bilog Antenna	Schwarzbeck	VULB9163	9163-194	01.02.2006
Horn Antenna	Rohde&Schwarz	HF906	100013	01.02.2006
Spectrum Analyzer	Anritsu	MS2651B	6200238856	01.02.2006
Pre-Amplifier	Agilent	8447D	2944A10619	01.02.2006
Signal Generator	GW	GAG-810	0913317	01.02.2006

3. RADIATED EMISSION FOR FCC PART 15 SECTION 15.227(B)


3.1. Block Diagram of Test Setup

3.1.1. Block diagram of connection between the EUT and simulators



(EUT: Remote Control Car Transmitter)

3.1.2. Anechoic Chamber Test Setup Diagram

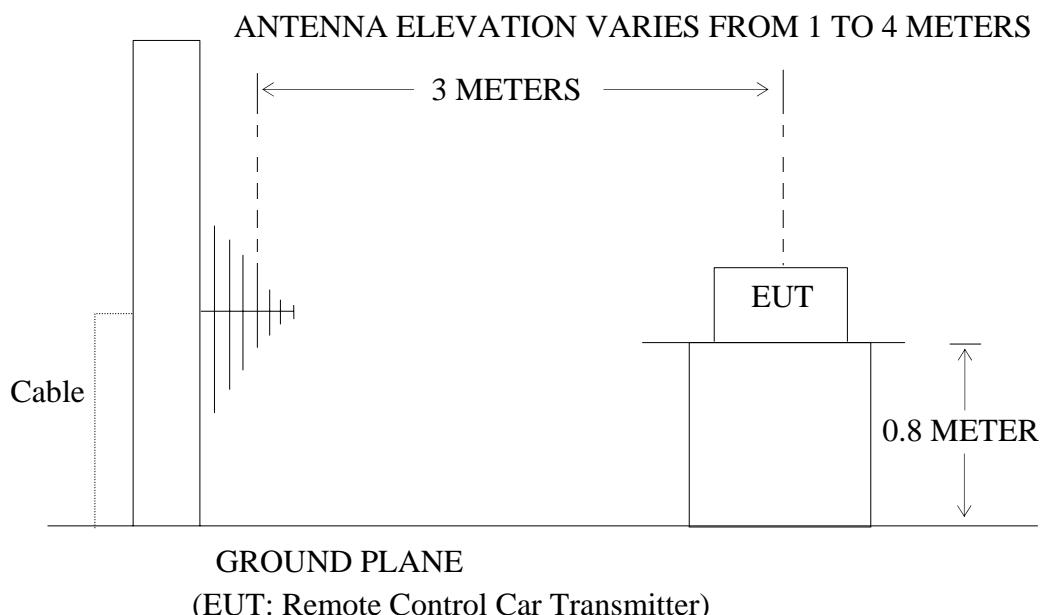

3.2. The Field Strength of Radiation Emission Measurement Limits

3.2.1. The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in section 15.209

Radiation Emission Measurement Limits According to Section 15.209(a)

Frequency (MHz)	Limit,		
	Field Strength of Quasi-peak Value (microvolts/m)	Field Strength of Quasi-peak Value (dB μ V/m)	The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those
30 - 88	100	40	
88 - 216	150	43.5	

216 - 960	200	46	frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.
Above 960	500	54	

3.3. Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.3.1. Remote Control Car Transmitter (EUT)

Model Number : 001A-27
 Serial Number : N/A
 Manufacturer : Chaoda Plastic Toys Factory

3.4. Operating Condition of EUT

3.4.1. Setup the EUT and simulator as shown as Section 3.1.

3.4.2. Turn on the power of all equipment.

3.4.3. Let the EUT work in TX modes(on) measure it.

3.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to FCC Part 15 Subpart C on radiated emission measurement.

The bandwidth of test receiver (R&S ESI26) is set at 120KHz in 30-1000MHz. The frequency range from 30MHz to 1000MHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

3.6. The Field Strength of Radiation Emission Measurement Results

PASS.

The frequency range 30MHz to 1000MHz is investigated.

Date of Test:	October 28, 2005	Temperature:	20°C
EUT:	Remote Control Car Transmitter	Humidity:	50%
Model No.:	001A-27	Power Supply:	9V DC ("6F22" battery 1×)
Test Mode:	TX	Test Engineer:	Andy

Polarization	Frequency (MHz)	Reading(dB μ V/m) QP	Factor Corr.(dB)	Result(dB μ V/m) QP	Limits(dB μ V/m) QP	Margin(dB μ V/m) QP
Horizontal	*	*	*	*	*	*
Vertical	*	*	*	*	*	*

*** Disturbances are small or not detectable.**


The spectral diagrams in appendix 1 display the measurement of un-weighted peak values.

The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

Reviewer :



4. FUNDAMENTAL RADIATED EMISSION FOR FCC PART 15

SECTION 15.227(A)


4.1. Block Diagram of Test Setup

4.1.1. Block diagram of connection between the EUT and simulators



(EUT: Remote Control Car Transmitter)

4.1.2. Anechoic Chamber Test Setup Diagram

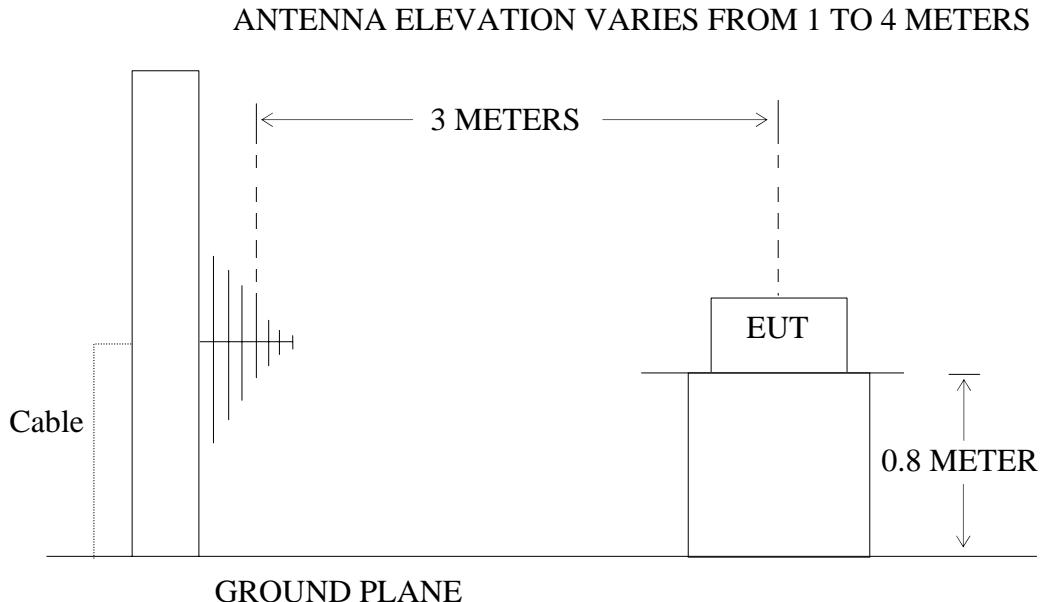

4.2. The Emission Limit For Section 15.227(a)

4.2.1 The field strength of any emission within this band shall not exceed 10,000 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in Section 15.35 for limiting peak emission apply.

4.3.EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.3.1. Remote Control Car Transmitter (EUT)

Model Number : 001A-27
Serial Number : N/A
Manufacturer : Chaoda Plastic Toys Factory

4.4.Operating Condition of EUT

4.4.1. Setup the EUT and simulator as shown as Section 4.1.

4.4.2. Turn on the power of all equipment.

4.4.3. Let the EUT work in TX mode (On) measure it.

4.5.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. calibrated Loop antenna is used as receiving antenna. In order to find the maximum emission levels, all of the interface cables must be manipulated according to FCC Part 15 on radiated emission measurement.

The bandwidth of test receiver (R&S ESI26) is set at 9KHz in 9kHz-30MHz

4.6.The Emission Measurement Result

PASS.

Date of Test:	October 28, 2005	Temperature:	20°C
EUT:	Remote Control Car Transmitter	Humidity:	50%
Model No.:	001A-27	Power Supply:	9V DC ("6F22" battery 1×)
Test Mode:	TX	Test Engineer:	Andy

Fundamental Radiated Emissions

Test conditions		Fundamental Frequency	
		27.145MHz	
T _{nom} (20°C)	Unit	(dB μ V/m)/ (μ V/m)	(dB μ V/m)/(μ V/m)
		AV	PEAK
		60.2/1,023	80.2/10,233
limit		80/10,000	100/100,000
Note: Measurement was performed with modulated signal with average detector and peak detector.			

The spectral diagrams in appendix 1.

Reviewer : Sean

5. BAND EDGES

5.1. The Requirement

5.1.1. The wanted emission within the band 26.96-27.28MHz.

5.2. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.2.1. Remote Control Car Transmitter (EUT)

Model Number : 001A-27
 Serial Number : N/A
 Manufacturer : Chaoda Plastic Toys Factory

5.3. Operating Condition of EUT

5.3.1. Setup the EUT and simulator as shown as Section 4.1.

5.3.2. Turn on the power of all equipment.

5.3.3. Let the EUT work in TX mode (On) measure it.

5.4. Test Procedure

The transmitter output was fed into the spectrum analyzer and photo was taken. The vertical scale is set to 10dB per division; the horizontal scale is set to 32kHz per division. Start frequency are 26.96MHz, stop frequency are 27.28MHz .
 RBW are 3kHz, VBW are 3kHz, Sweep time are 50ms.

5.5.The Measurement Result

The EUT does meet the FCC requirement.


The spectral diagrams in appendix 1.

APPENDIX I (Test Curves)

Radiated Disturbance

FCC PART15


EUT: Remote Control Car M/N:001A-27
Manufacturer: Camke Development Ltd.
Operating Condition: TX
Test Site: ATC EMC Lab.SAC
Operator: Andy
Test Specification: Average detector
Comment: DC 9V

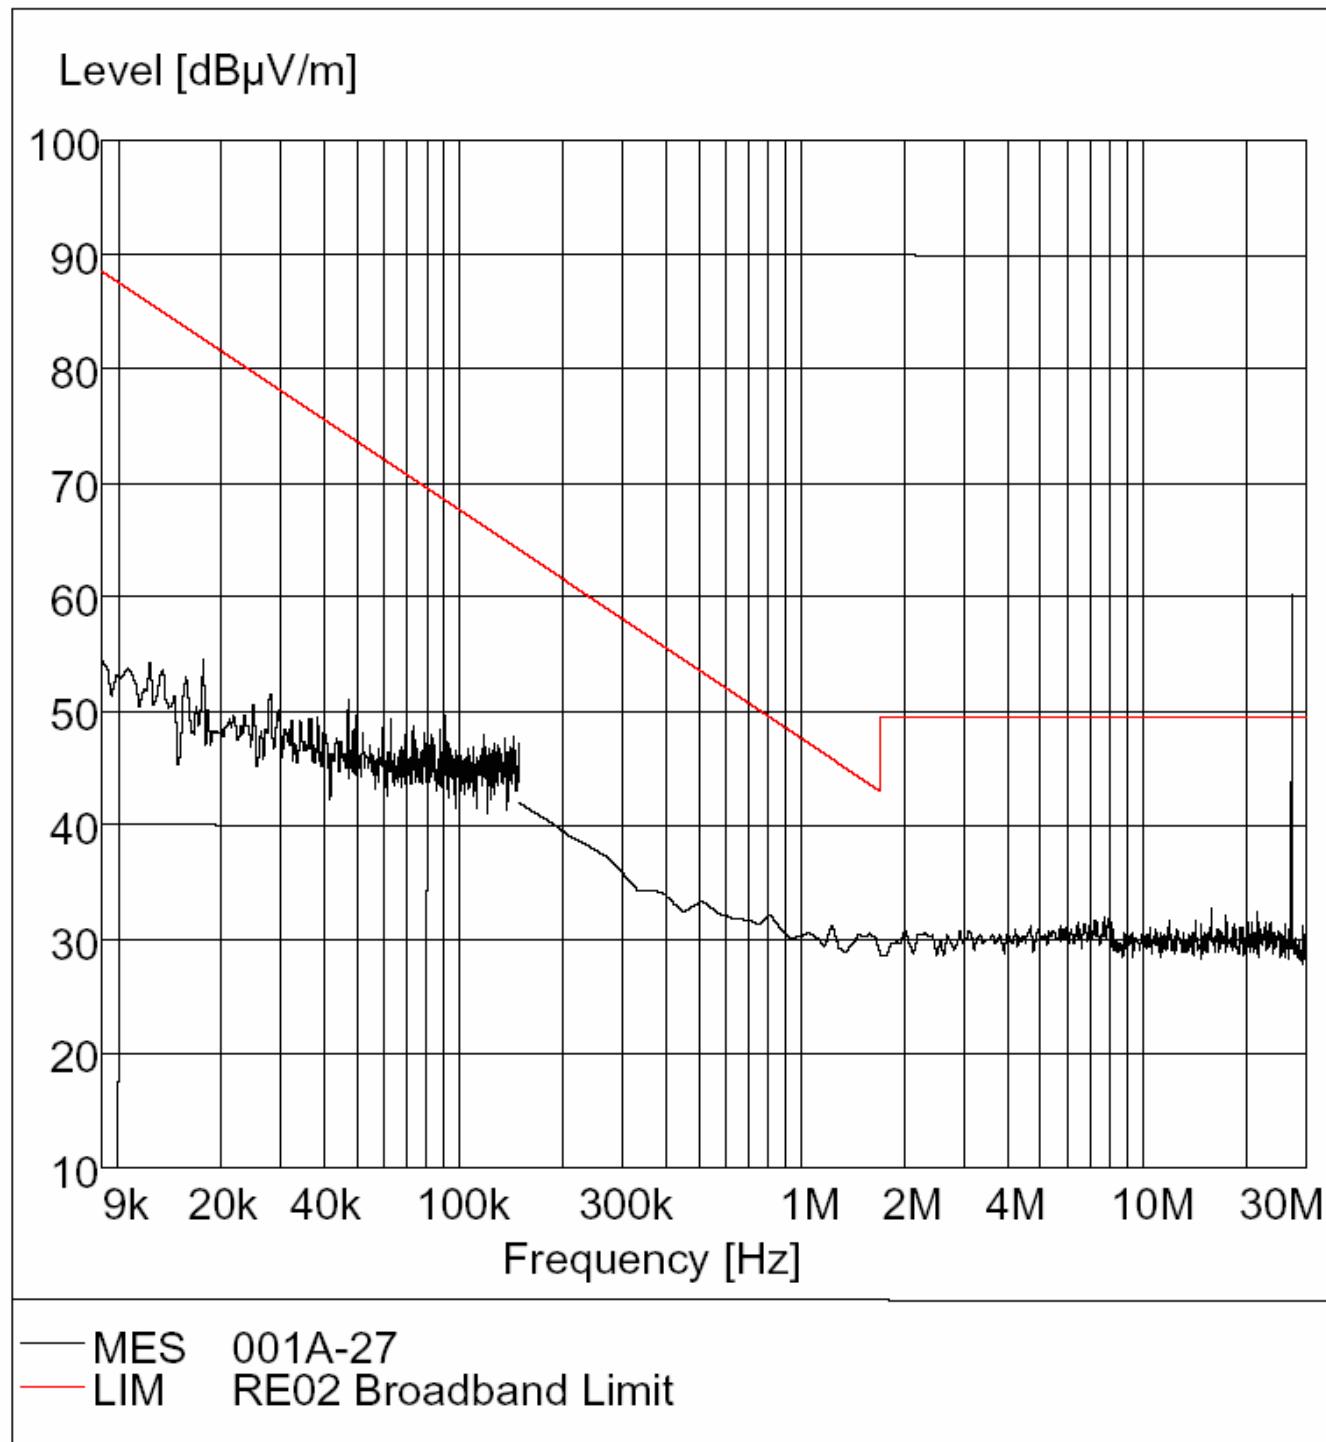

Radiated Disturbance

FCC PART15

EUT: Remote Control Car Transmitter
 Manufacturer: Camke Development Ltd.
 Operating Condition: TX
 Test Site: ATC EMC Lab.SAC
 Operator: Andy
 Test Specification: Horizontal
 Comment: DC 9V
 :

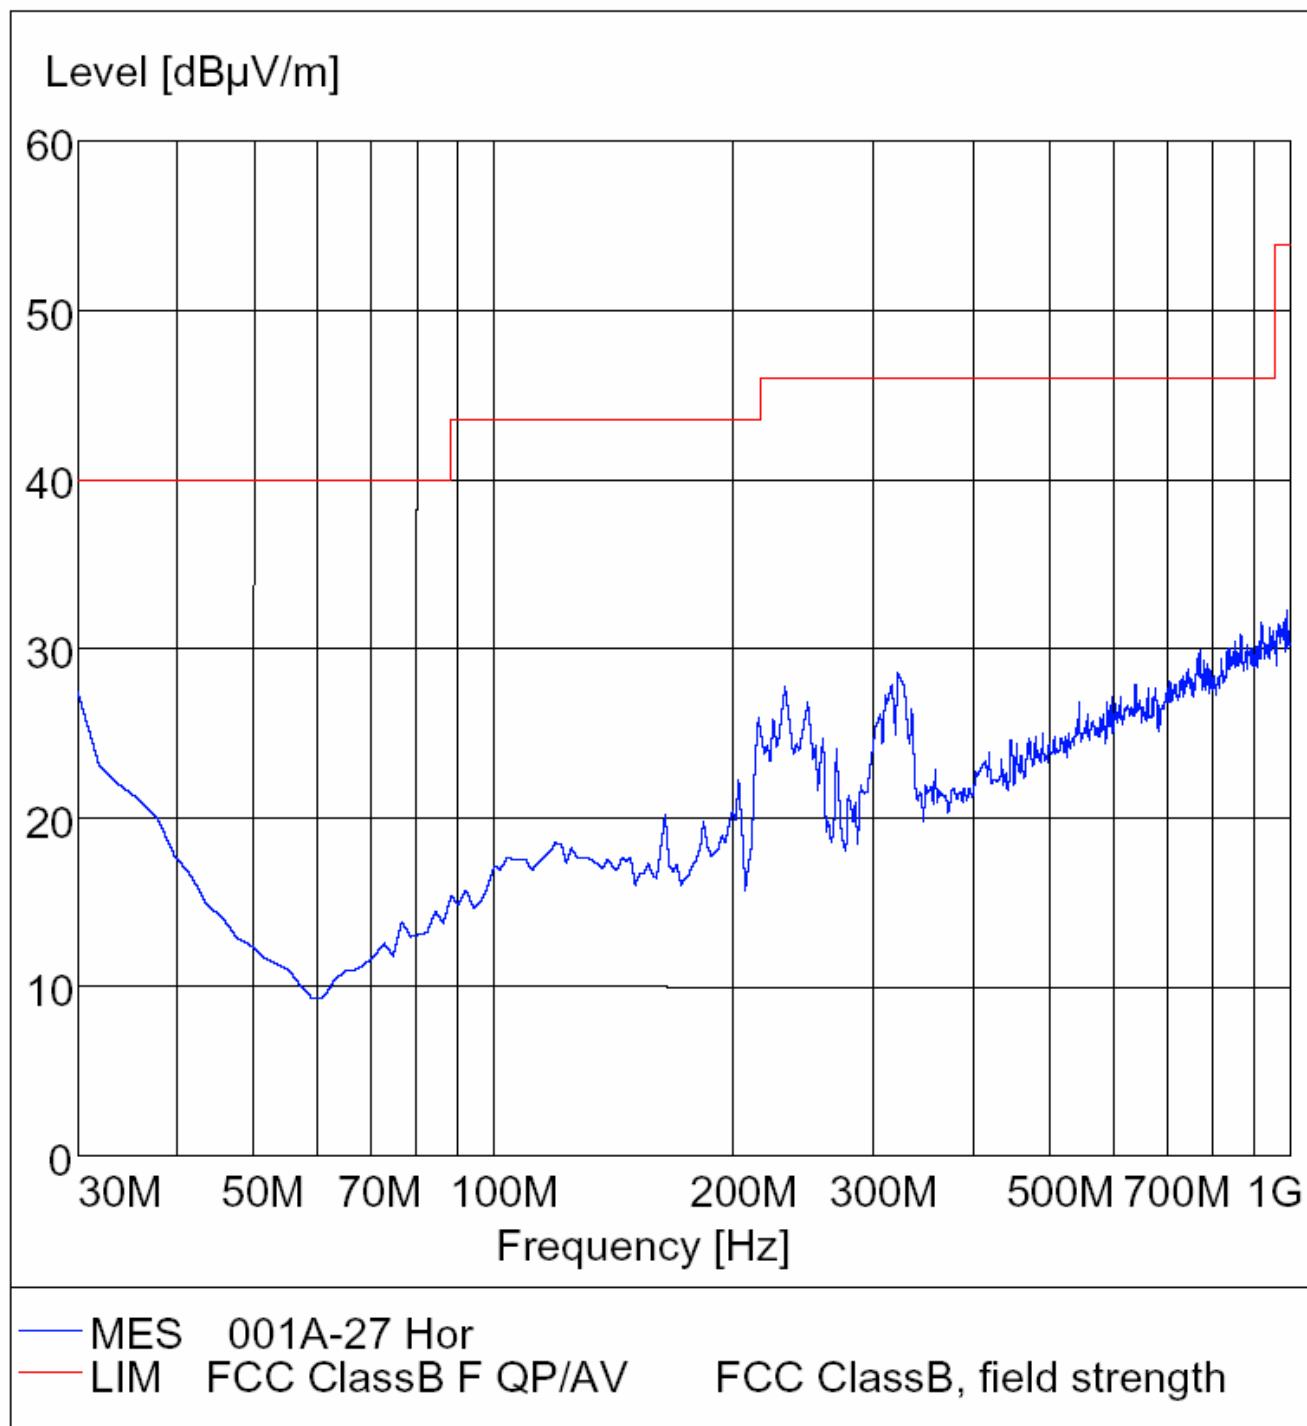

Radiated Disturbance

FCC PART15

EUT: Remote Control Car Transmitter
Manufacturer: Camke Development Ltd.
Operating Condition: TX
Test Site: ATC EMC Lab.SAC
Operator: Andy
Test Specification: Vertical
Comment: DC 9V
;

M/N: 001A-27

