# FCC CERTIFICATION On Behalf of Camke Development Ltd.

Remote Control Car Transmitter Model No.: 001A-49, 001B-49

**FCC ID: TQWCAR49** 

Prepared for : Camke Development Ltd.

Address : Rm 1103-1105 Silvercord, Tower 2, 30 Canton Road,

Tsimshatsui, Kowloon, Hongkong

Prepared by : ACCURATE TECHNOLOGY CO. LTD

Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.

Science & Industry Park, Nanshan, Shenzhen, Guangdong

P.R. China

Tel: (0755) 26503290 Fax: (0755) 26503396

Report Number : ATE20051875
Date of Test : November 3, 2005
Date of Report : November 8, 2005

#### TABLE OF CONTENTS

D	escrip	otion	Page
T	est Re	port Certification	
1.	GE	NERAL INFORMATION	4
	1.1.	Description of Device (EUT)	4
	1.2.	Description of Test Facility	4
	1.3.	Measurement Uncertainty	4
2.	ME	ASURING DEVICE AND TEST EQUIPMENT	5
3.	RA	DIATED EMISSION FOR FCC PART 15 SECTION 15.235(B)	6
	3.1.	Block Diagram of Test Setup	6
	3.2.	The Field Strength of Radiation Emission Measurement Limits	6
	3.3.	Configuration of EUT on Measurement	
	3.4.	Operating Condition of EUT	7
	3.5.	Test Procedure	
	3.6.	The Field Strength of Radiation Emission Measurement Results	8
4.	FU	NDAMENTAL RADIATED EMISSION FOR FCC PART 15 SECTION 15.235(A	)9
	4.1.	Block Diagram of Test Setup	9
	4.2.	The Emission Limit For Section 15.235(a)	9
	4.3.	EUT Configuration on Measurement	10
	4.4.	Operating Condition of EUT	
	4.5.	Test Procedure	
	4.6.	The Emission Measurement Result	11
5.	BA	ND EDGES FOR FCC PART 15 SECTION 15.235(B)	12
	5.1.	The Requirement For Section 15.235(b)	12
	5.2.	Configuration of EUT on Measurement	12
	5.3.	Operating Condition of EUT	
	5.4.	Test Procedure	13
	5.5.	The Field Strength of Radiation Emission Measurement Results	14
	APPI	ENDIX I ( TEST CURVES) (6pages)	

### **Test Report Certification**

Applicant : Camke Development Ltd.

Manufacturer : Chaoda Plastic Toys Factory

EUT Description : Remote Control Car Transmitter

(A) MODEL NO.: 001A-49, 001B-49

(B) SERIAL NO.: N/A

(C) POWER SUPPLY: 9V DC ("6F22" batteries 1×)

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.235: 2004 & ANSI C63.4: 2003

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.235 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test:	November 3, 2005	
Prepared by :	sky Long	
	(Engineer)	
Reviewer:	Seemle	
	(Quality Manager)	
Approved & Authorized Signer:	Martinh	
	(Manager)	

#### 1. GENERAL INFORMATION

1.1.Description of Device (EUT)

EUT : Remote Control Car Transmitter

Model Number : 001A-49, 001B-49

(Note: The samples are same except the appearance color are different, So

we prepare 001A-49 for test only.)

Power Supply : 9V DC ("6F22" batteries  $1 \times$ )

Applicant : Camke Development Ltd.

Address : Rm 1103-1105 Silvercord, Tower 2, 30 Canton Road,

Tsimshatsui, Kowloon, Hongkong

Manufacturer : Chaoda Plastic Toys Factory

Address : Fengxiang Industrial Zone, Chenghai District, Shantou

Guangdong, P.R.China

Date of sample received: October 30, 2005 Date of Test: November 3, 2005

1.2.Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen, May 10, 2004

Accredited by FCC, May 10, 2004

The Certificate Registration Number is 253065

Accredited by Industry Canada, May 18, 2004 The Certificate Registration Number is IC 5077

Name of Firm : ACCURATE TECHNOLOGY CO. LTD

Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.

Science & Industry Park, Nanshan, Shenzhen, Guangdong

P.R. China

1.3. Measurement Uncertainty

Conducted Emission Uncertainty =  $\pm 2.66$ dB

Radiated Emission Uncertainty =  $\pm 4.26$ dB

### 2. MEASURING DEVICE AND TEST EQUIPMENT

**Table 1: List of Test and Measurement Equipment** 

Kind of equipment	Manufacturer	Туре	S/N	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	01.02.2006
EMI Test Receiver	Rohde&Schwarz	ESI26	838786/013	01.02.2006
Bilog Antenna	Schwarzbeck	VULB9163	9163-194	01.02.2006
Horn Antenna	Rohde&Schwarz	HF906	100013	01.02.2006
Spectrum Analyzer	Anritsu	MS2651B	6200238856	01.02.2006
Pre-Amplifier	Agilent	8447D	2944A10619	01.02.2006
Signal Generator	GW	GAG-810	0913317	01.02.2006

#### 3. RADIATED EMISSION FOR FCC PART 15 SECTION 15.235(B)


#### 3.1.Block Diagram of Test Setup

3.1.1.Block diagram of connection between the EUT and simulators

EUT

(EUT: Remote Control Car Transmitter)

3.1.2. Anechoic Chamber Test Setup Diagram

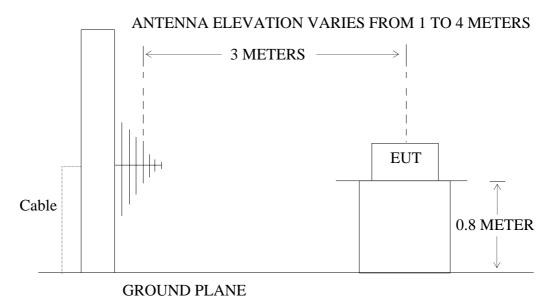

(EUT: Remote Control Car Transmitter)

#### 3.2. The Field Strength of Radiation Emission Measurement Limits

3.2.1. The field strength of any emissions appearing between the band edges and up to 10kHz above and below the band edges shall not exceed the general radiated emission limits in section 15.209. The field strength of any emissions removed by more than 10KHz from the band edges shall not exceed the general radiated emission limits in section 15.209.

Radiation Emission Measurement Limits According to Section 15.209(a)

		Limit,	
Frequency	Field Strength of	Field Strength of	The final measurement
(MHz)	Quasi-peak Value	Quasi-peak Value	in band 9-90kHz,
, ,	(microvolts/m)	$(dB\mu V/m)$	110-490kHz and
30 - 88	100	40	above 1000MHz is performed with

88 - 216	150	43.5	Average detector. Except those frequency bands
216 - 960	200	46	mention above, the final measurement for
Above 960	500	54	final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

#### 3.3. Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 3.3.1. Remote Control Car Transmitter (EUT)

Model Number : 001A-49 Serial Number : N/A

Manufacturer : Chaoda Plastic Toys Factory

#### 3.4. Operating Condition of EUT

- 3.4.1. Setup the EUT and simulator as shown as Section 3.1.
- 3.4.2. Turn on the power of all equipment.
- 3.4.3. Let the EUT work in TX modes(on) measure it.

#### 3.5.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to FCC Part 15 Subpart C on radiated emission measurement.

The bandwidth of test receiver (R&S ESI26) is set at 120kHz in 30-1000MHz. The frequency range from 30MHz to 1000MHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

## 3.6. The Field Strength of Radiation Emission Measurement Results **PASS.**

The frequency range 30MHz to 1000MHz is investigated.

Date of Test:November 3, 2005Temperature:20°CEUT:Remote Control Car TransmitterHumidity:50%Model No.:001A-49Power Supply:9V DC ("6F22" battery 1×)Test Mode:TXTest Engineer:Andy

Polarization	Frequency (MHz)	Reading(dBμV/m)  QP	Factor Corr.( dB)	Result(dBμV/m) QP	Limits(dBµV/m) QP	Margin(dBμV/m) QP
Horizontal	*	*	*	*	*	*
Vertical	*	*	*	*	*	*

#### \* Disturbances are small or not detectable.

The spectral diagrams in appendix 1 display the measurement of un-weighted peak values.

The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Amplifier Gain

Reviewer: Seal

# 4. FUNDAMENTAL RADIATED EMISSION FOR FCC PART 15 SECTION 15.235(A)

#### 4.1.Block Diagram of Test Setup


4.1.1.Block diagram of connection between the EUT and simulators

EUT

(EUT: Remote Control Car Transmitter)

4.1.2. Anechoic Chamber Test Setup Diagram

#### ANTENNA ELEVATION VARIES FROM 1 TO 4 METERS

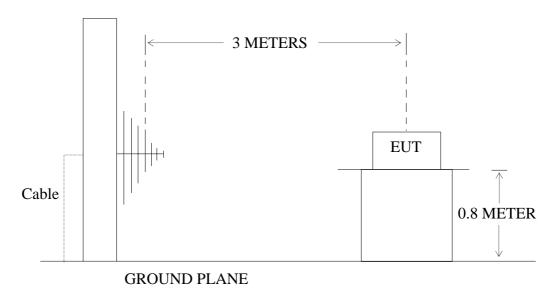

(EUT: Remote Control Car Transmitter)

#### 4.2. The Emission Limit For Section 15.235(a)

4.2.1 The field strength of any emission within this band shall not exceed 10,000microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in Section 15.35 for limiting peak emission apply.

#### 4.3.EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 4.3.1. Remote Control Car Transmitter (EUT)

Model Number : 001A-49 Serial Number : N/A

Manufacturer : Chaoda Plastic Toys Factory

#### 4.4. Operating Condition of EUT

4.4.1. Setup the EUT and simulator as shown as Section 4.1.

4.4.2. Turn on the power of all equipment.

4.4.3.Let the EUT work in TX mode (On) measure it.

#### 4.5.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to FCC Part 15 Subpart C on radiated emission measurement.

The bandwidth of test receiver (R&S ESI26) is set at 120KHz in 30-1000MHz.

#### 4.6. The Emission Measurement Result

#### PASS.

Date of Test:	November 3, 2005	Temperature:	20°C
EUT:	Remote Control Car Transmitter	Humidity:	50%
Model No.:	001A-49	Power Supply:	9V DC ("6F22" battery 1×)
Test Mode:	TX	Test Engineer:	Andy

#### **Fundamental Radiated Emissions**

Test	conditions	Fundamental	Fundamental Frequency		
		49.8621	MHz		
	Unit	$(dB\mu V/m)/(\mu V/m)$	$(dB\mu V/m)/(\mu V/m)$		
$T_{\text{nom}}(20^{\circ}\text{C})$		AV	PEAK		
	Vertical	70.5/3,350	83.5/14,963		
Horizontal		55.5/596	67.5/2,372		
limit		80/10,000	100/100,000		

Note: Measurement was performed with modulated signal with average detector and peak detector.

The spectral diagrams in appendix 1.

Reviewer:	Reviewer :	Sean (2)	
-----------	------------	----------	--

### 5. BAND EDGES FOR FCC PART 15 SECTION 15.235(B)

#### 5.1. The Requirement For Section 15.235(b)

5.1.1. The field strength of any emission appearing between the band edges and up to 10kHz above and below the band edges shall be attenuated at least 26dB below the level of the unmodulated carrier or to the general limits in Section 15.209,

Radiation Emission Measurement Limits According to Section 15.209(a)

		Limit,	
Frequency (MHz)	Field Strength of Quasi-peak Value (microvolts/m)	Field Strength of Quasi-peak Value (dBµV/m)	The final measurement in band 9-90kHz, 110-490kHz and
30 - 88	100	40	above 1000MHz is performed with
88 - 216	150	43.5	Average detector. Except those
216 - 960	200	46	frequency bands mention above, the
Above 960	500	54	final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

#### 5.2. Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 5.2.1. Remote Control Car Transmitter (EUT)

Model Number : 001A-49 Serial Number : N/A

Manufacturer : Chaoda Plastic Toys Factory

#### 5.3. Operating Condition of EUT

- 5.3.1. Setup the EUT and simulator as shown as Section 3.1.
- 5.3.2. Turn on the power of all equipment.
- 5.3.3. Let the EUT work in TX modes(on) measure it.

#### 5.4. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to FCC Part 15 Subpart C on radiated emission measurement.

The bandwidth of test receiver (R&S ESI26) is set at 200Hz.

The frequency range from 49.81MHz to 49.82MHz, from 49.90MHz to 49.91MHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

## 5.5. The Field Strength of Radiation Emission Measurement Results **PASS.**

The frequency range 30MHz to 1000MHz is investigated.

Date of Test:	November 3, 2005	Temperature:	20°C
EUT:	Remote Control Car Transmitter	Humidity:	50%
Model No.:	001A-49	Power Supply:	9V DC ("6F22" battery 1×)
Test Mode:	TX	Test Engineer:	Andy

Polarization	Frequency (MHz)	Reading(dBµV/m)  QP	Factor Corr.( dB)	Result(dBμV/m) QP	Limits(dBµV/m) QP	Margin(dBμV/m) QP
Horizontal	49.82	9.7	12.0	21.7	40	18.3
Horizontal	49.90246	11.2	12.1	23.3	40	16.7
Vertical	49.82	21.4	12.0	33.4	40	6.6
Vertical	49.90258	18.8	12.1	30.9	40	9.1

The spectral diagrams in appendix I page 18 to page 21.

The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Amplifier Gain

	1	
Reviewer:	Searl:	0

# APPENDIX I (Test Curves)

#### Radiated Disturbance

FCC PART15

EUT: Remote Control Car Transmitter M/N:001A-49

Manufacturer: Camke Development Ltd.


Operating Condition: TX

Test Site: ATC EMC Lab.SAC Operator: Andy

Test Specification: Horizontal

Comment: DC 9V

:

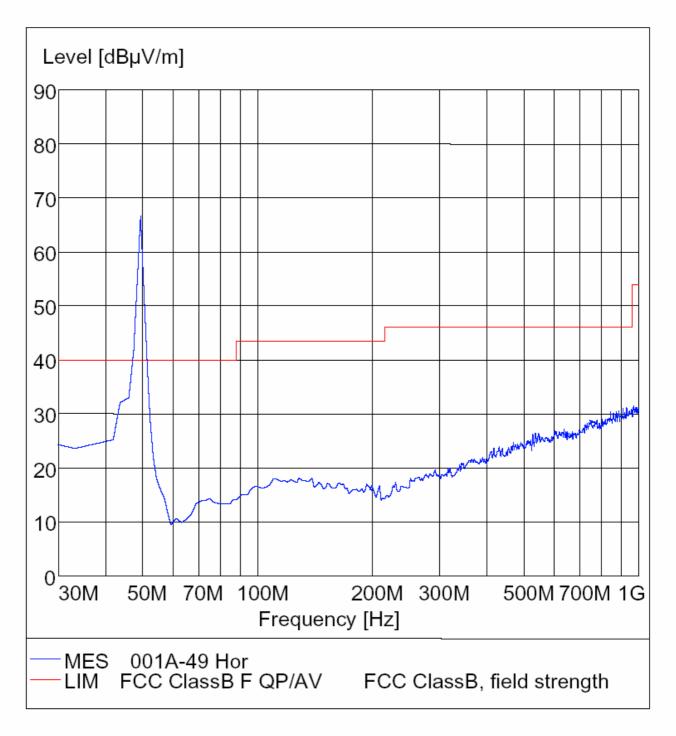

#### Radiated Disturbance

FCC PART15

EUT: Remote Control Car Transmitter M/N:001A-49


Manufacturer: Camke Development Ltd.


Operating Condition: TX

Test Site: ATC EMC Lab.SAC Operator: Andy


Operator: Andy
Test Specification: Vertical
Comment: DC 9V

:

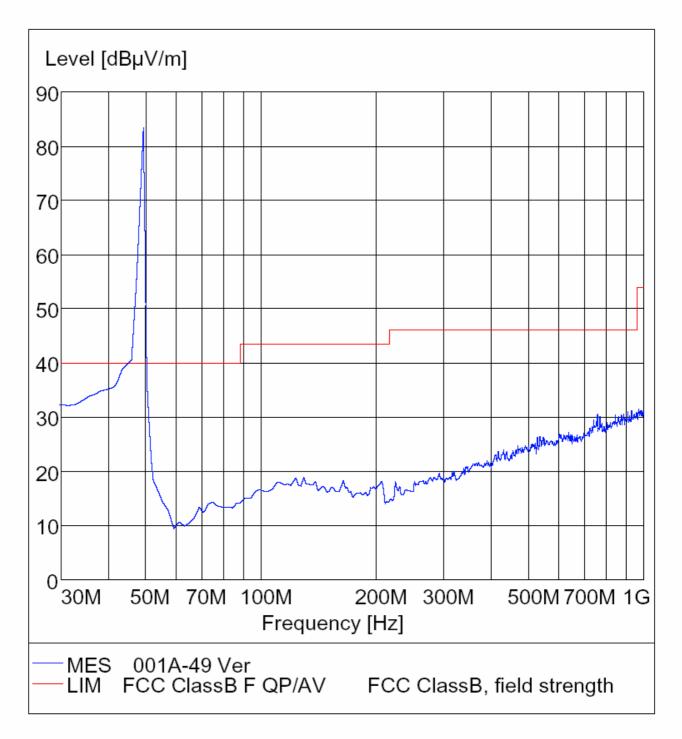


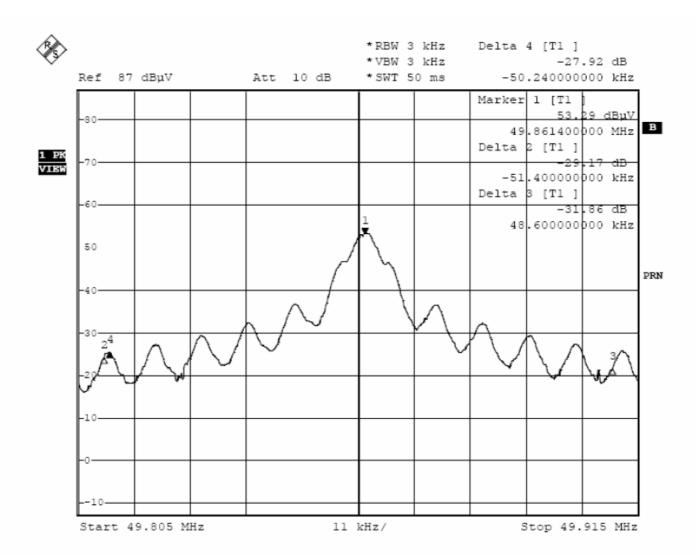

- ♦ Mark 2 is 10kHz point below the lower band edge: 49.81MHz. At the frequency the emission level is 29.17 dB lower than the level of 49.86MHz fundamental.
- ♦ Mark 3 is 10kHz point above the upper band edge: 49.91MHz. At the frequency the emission level is 31.86 dB lower than the level of 49.86MHz fundamental.
- Mark 4 is frequency point: 49.81116MHz. At the frequency the emission level is 27.92 dB lower than the level of 49.86MHz fundamental.

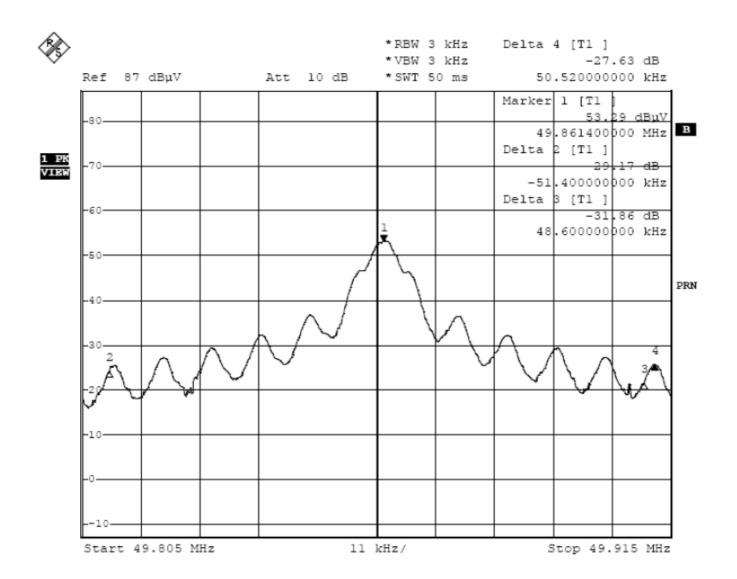


♦ Mark 4 is at the frequency 49.91192MHz. At the frequency the emission level is 27.63 dB lower than the level of 49.86MHz fundamental.

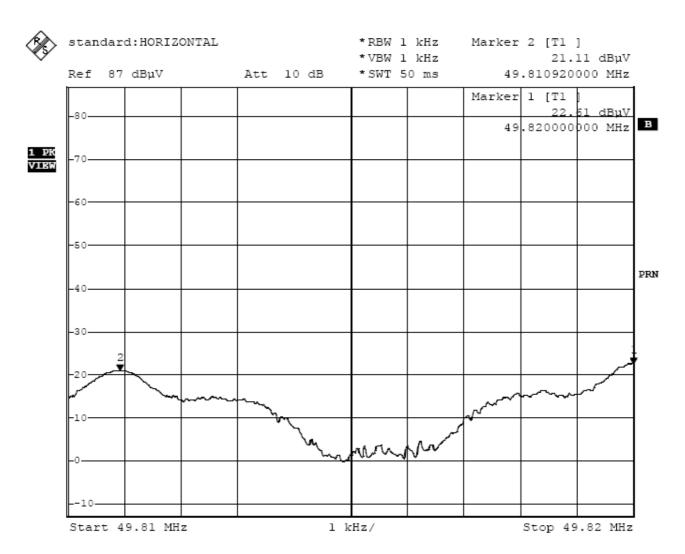


Antenna polarization: Horizontal

The frequency at maximum emission level: 49.82MHz Max. emission level QP: 21.7 dB $\mu$ V/m < 40 dB $\mu$ V/m

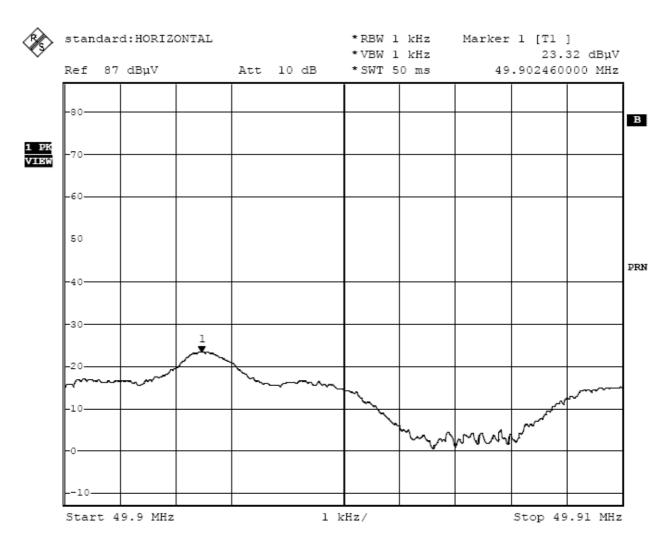


Antenna polarization: Horizontal

The frequency at maximum emission level: 49.90246MHz Max. emission level QP:  $23.3~dB\mu V/m < 40~dB\mu V/m$ 

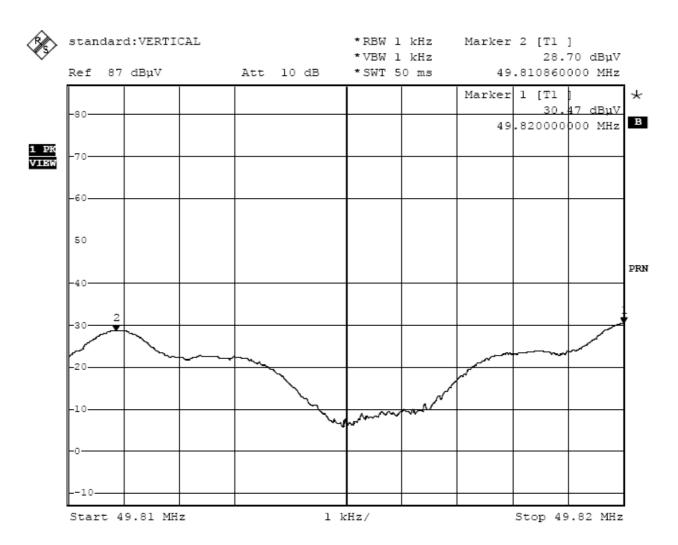

Antenna polarization: Vertical

The frequency at maximum emission level: 49.82MHz Max. emission level QP:  $33.4 \ dB\mu V/m < 40 \ dB\mu V/m$ 

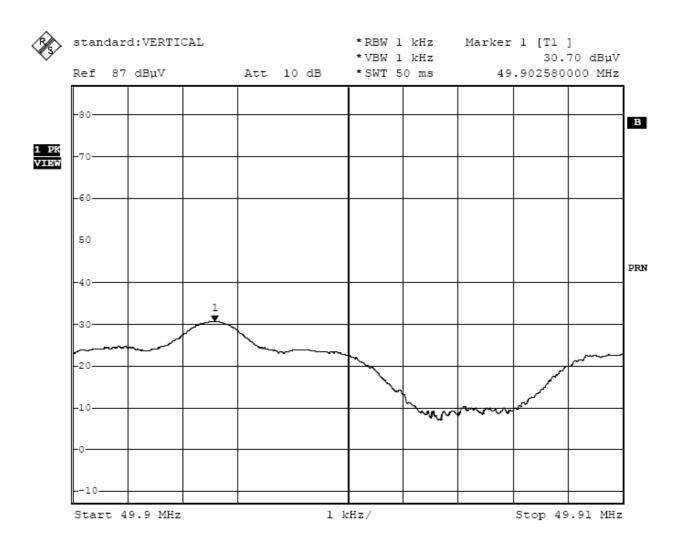

Antenna polarization: Vertical

The frequency at maximum emission level: 49.90258MHz Max. emission level QP:  $30.9 \ dB\mu V/m < 40 \ dB\mu V/m$