



Neutron Engineering Inc.

Radio Test Report

FCC ID: TQYBSJS6303WA00

This report concerns (check one) : Original Grant Class II Change

Issued Date : Aug. 08, 2013
Project No. : 1307318
Equipment : Home Theatre System
Model Name : JS6303WA
(Part No.: JS6303WA Subwoofer)

Applicant : JAZZ HIPSTER CORPORATION
Address : 2FD, NO.512, YUAN-SAN RD.,
CHUNG-HO DISTRICT, NEW TAIPEI
CITY, TAIWAN.

Tested by: Neutron Engineering Inc. EMC Laboratory

Date of Receipt: Aug. 01, 2013

Date of Test: Aug. 01, 2013 ~ Aug. 07, 2013

Testing Engineer: Gary Chou
(Rush Kao)

Technical Manager: Jeff Yang
(Jeff Yang)

Authorized Signatory: Andy Chiu
(Andy Chiu)

Neutron Engineering Inc.
B1, No. 37, Lane 365, YangGuang St.,
NeiHu District 114, Taipei, Taiwan.
TEL: +886-2-2657-3299
FAX: +886-2-2657-3331





Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

Neutron's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron's** authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



Table of Contents

REPORT ISSUED HISTORY	6
1 CERTIFICATION	7
2 . SUMMARY OF TEST RESULTS	8
2.1 TEST FACILITY	9
2.2 MEASUREMENT UNCERTAINTY	9
3 GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	11
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
3.4 DESCRIPTION OF SUPPORT UNITS	13
4 CONDUCTED EMISSION	14
4.1 LIMIT	14
4.2 MEASUREMENT INSTRUMENTS LIST	14
4.3 TEST PROCEDURES	15
4.4 TEST SETUP LAYOUT	15
4.5 DEVIATION FROM TEST STANDARD	15
4.6 EUT OPERATING CONDITIONS	16
4.7 TEST RESULTS	17
5 ANTENNA CONDUCTED SPURIOUS EMISSION	19
5.1 LIMIT	19
5.2 MEASUREMENT INSTRUMENTS LIST	19
5.3 TEST PROCEDURES	19
5.4 TEST SETUP LAYOUT	19
5.5 DEVIATION FROM TEST STANDARD	19
5.6 EUT OPERATING CONDITIONS	19
5.7 TEST RESULTS	20
6 6 DB BANDWIDTH	24
6.1 LIMIT	24
6.2 MEASUREMENT INSTRUMENTS LIST	24
6.3 TEST PROCEDURES	24
6.4 TEST SETUP LAYOUT	24
6.5 DEVIATION FROM TEST STANDARD	24
6.6 EUT OPERATING CONDITIONS	24
6.7 TEST RESULTS	25
7 MAXIMUM PEAK CONDUCTED OUTPUT POWER	27
7.1 LIMIT	27
7.2 MEASUREMENT INSTRUMENTS LIST	27
7.3 TEST PROCEDURES	27



Table of Contents

7.4	TEST SETUP LAYOUT	27
7.5	DEVIATION FROM TEST STANDARD	27
7.6	EUT OPERATING CONDITIONS	27
7.7	TEST RESULTS	28
8	RADIATED SPURIOUS EMISSION (9 KHZ TO 1 GHZ)	29
8.1	LIMIT	29
8.2	MEASUREMENT INSTRUMENTS LIST	30
8.3	MEASURING INSTRUMENTS SETTING	30
8.4	TEST PROCEDURES	31
8.5	DEVIATION FROM TEST STANDARD	31
8.6	TEST SETUP LAYOUT	31
8.7	EUT OPERATING CONDITIONS	32
8.8	TEST RESULTS	33
9	RADIATED SPURIOUS EMISSION (ABOVE 1 GHZ)	35
9.1	LIMIT	35
9.2	MEASUREMENT INSTRUMENTS LIST	36
9.3	MEASURING INSTRUMENTS SETTING	36
9.4	TEST PROCEDURES	37
9.5	DEVIATION FROM TEST STANDARD	37
9.6	TEST SETUP LAYOUT	37
9.7	EUT OPERATING CONDITIONS	38
9.8	TEST RESULTS	39
9.9	TEST RESULTS (RESTRICTED BANDS)	51
10	POWER SPECTRAL DENSITY	55
10.1	LIMIT	55
10.2	MEASUREMENT INSTRUMENTS LIST	55
10.3	TEST PROCEDURES	55
10.4	TEST SETUP LAYOUT	55
10.5	DEVIATION FROM TEST STANDARD	55
10.6	EUT OPERATING CONDITIONS	55
10.7	TEST RESULTS	56
11	RF EXPOSURE COMPLIANCE	58
11.1	LIMIT	58
11.2	MEASUREMENT INSTRUMENTS LIST	58
11.3	MPE CALCULATION METHOD	58
11.4	TEST SETUP LAYOUT	59
11.5	DEVIATION FROM TEST STANDARD	59
11.6	EUT OPERATING CONDITIONS	59



Table of Contents

11.7	TEST RESULTS	60
12	EUT TEST PHOTO	61



REPORT ISSUED HISTORY

Revised Version No.	Description	Issued Date
-	Initial Issue.	Aug. 08, 2013



1 CERTIFICATION

Equipment : Home Theatre System

Brand Name : JS

Model Name : JS6303WA (Part No.: JS6303WA Subwoofer)

Applicant : JAZZ HIPSTER CORPORATION

Date of Test : Aug. 01, 2013 ~ Aug. 07, 2013

Standards : FCC Part 15, Subpart C: 2012

ANSI C63.4: 2009

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-3-1307318) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).



2. SUMMARY OF TEST RESULTS

Standard Clause	Test Item	Result
15.207	Conducted Emission	PASS
15.247 (c)	Antenna conducted Spurious Emission	PASS
15.247 (a)(2)	6dB Bandwidth	PASS
15.247 (b)	Maximum Peak Conducted Output Power	PASS
15.247 (c)	Radiated Spurious Emission	PASS
15.247 (d)(e)	Power Spectral Density	PASS
15.205	Restricted Bands	PASS
15.203	Antenna Requirement	PASS
1.1307 1.1310 2.1091 2.1093	RF Exposure Compliance	PASS

NOTE:

- (1) N/A: denotes test is not applicable in this Test Report
- (2) Portable device; SAR report is required.



2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

Conducted emission Test:

C03: B1, No. 37, Lane 365, YangGuang St., NeiHu District 114, Taipei, Taiwan.

Radiated emission Test (Below 1 GHz):

CB08: (FCC RN: 614388; FCC DN: TW1054; IC Assigned Code: 4428C-1)
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

Radiated emission Test (Above 1 GHz):

CB08: (VCCI RN: G-91; FCC RN: 614388; FCC DN: TW1054; IC Assigned Code: 4428C-1)
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty is not specified by FCC rules and for reference only.

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2.

A. Conducted emission test:

Test Site	Measurement Frequency Range	U, (dB)	NOTE
C03	150 kHz ~ 30 MHz	1.94	

B. Radiated emission test:

Test Site	Item	Measurement Frequency Range	Uncertainty	NOTE
CB08	Radiated emission at 3m	Horizontal Polarization	30 - 200MHz	3.35 dB
			200 - 1000MHz	3.11 dB
			1 - 18GHz	3.97 dB
			18 - 40GHz	4.01 dB
	Vertical Polarization		30 - 200MHz	3.22 dB
			200 - 1000MHz	3.24 dB
			1 - 18GHz	4.05 dB
			18 - 40GHz	4.04 dB

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our U_{lab} values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called U_{CISPR} , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz: 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) –
30 MHz – 1000 MHz: 5.2 dB

It can be seen that our U_{lab} values are smaller than U_{CISPR} .

If U_{lab} is less than or equal to U_{CISPR} , then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{CISPR} , then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{CISPR})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{CISPR})$, exceeds the disturbance limit.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Home Theatre System	
Brand Name	JS	
Model Name	JS6303WA (Part No.: JS6303WA Subwoofer)	
OEM Brand/Model Name	N/A	
Model Difference	N/A	
Product Description	The EUT is a Home Theatre System.	
	Operation Frequency	2405.376 MHz ~ 2466.816 MHz
	Modulation Type	GFSK
	Bit Rate of Transmitter	1 Mbps
	Number Of Channel	Please refer to the Note 2.
	Antenna Designation	Please refer to the Note 3.
	Antenna Gain(Peak)	Please refer to the Note 3.
Product Description	Maximum Peak Conducted Output Power:	15.12 dBm
	More details of EUT technical specification, please refer to the User's Manual.	
Power Source	AC Mains.	
Power Rating	I/P: AC 100-240V 50-60Hz	
Connecting I/O Port(s)	Please refer to the User's Manual	
Products Covered	1 * RF Module	
EUT Modification(s)	N/A	

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2405.376	04	2433.024	07	2460.672
02	2414.592	05	2442.24	08	2466.816
03	2423.808	06	2451.456		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Printed	N/A	2.32



3.2 DESCRIPTION OF TEST MODES


To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Items	Mode	Data Rate	Channel	Note
Conducted Emission	GFSK	1 Mbps	04	
Antenna conducted Spurious Emission	GFSK	1 Mbps	01/04/08	
6 dB Bandwidth	GFSK	1 Mbps	01/04/08	
Maximum Peak Conducted Output Power	GFSK	1 Mbps	01/04/08	
Radiated Spurious Emission (30 MHz to 1 GHz)	GFSK	1 Mbps	04	
Radiated Spurious Emission (above 1 GHz)	GFSK	1 Mbps	01/04/08	
Restricted Bands	GFSK	1 Mbps	01/04/08	
Antenna Requirement	-----	-----	-----	
RF Exposure Compliance	-----	-----	-----	

NOTE: The measurements are performed at the highest, middle, lowest available channels.



3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

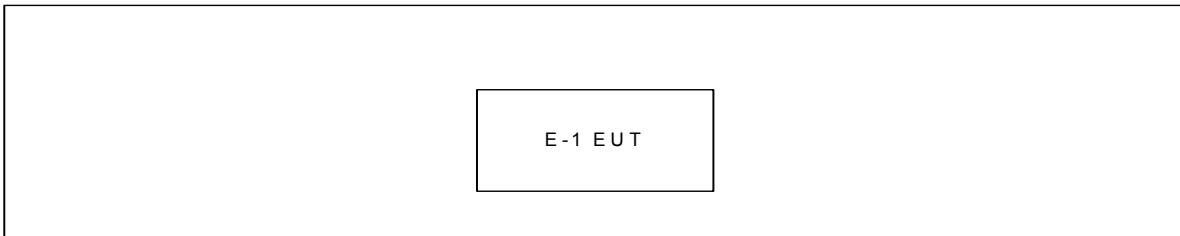



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	Home Theatre System	JS	JS6303WA (Part No.: JS6303WA Subwoofer)	TQYBSJS6303WA00	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note
N/A	-	-	-	-

NOTE: The support equipment was authorized by Declaration of Conformity (DOC).



4 CONDUCTED EMISSION

4.1 LIMIT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 - 5.0	73.00	60.00	56.00	46.00
5.0 - 30.0	73.00	60.00	60.00	50.00

NOTE:

1. The tighter limit applies at the band edges.
2. The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
3. The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value – Limit Value

4.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	101050	Apr. 22, 2014
2	Test Cable	TIMES	LMR-400	C01	Aug. 16, 2013
3	EMI Test Receiver	R&S	ESCI	100082	Mar. 21, 2014
4	Measurement Software	EZ	EZ_EMCA (Version NB-03A)	N/A	N/A

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.


4.3 TEST PROCEDURES

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

NOTE:

- a. Reading in which marked as Peak, QP or AVG means measurements by using are Quasi-Peak or Average Mode with Detector BW=9 kHz (6 dB Bandwidth).
- b. All readings are Peak Mode value unless otherwise stated QP or AVG in column of Note. If the Peak or QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only Peak or QP Mode was measured, but AVG Mode didn't perform.

4.4 TEST SETUP LAYOUT

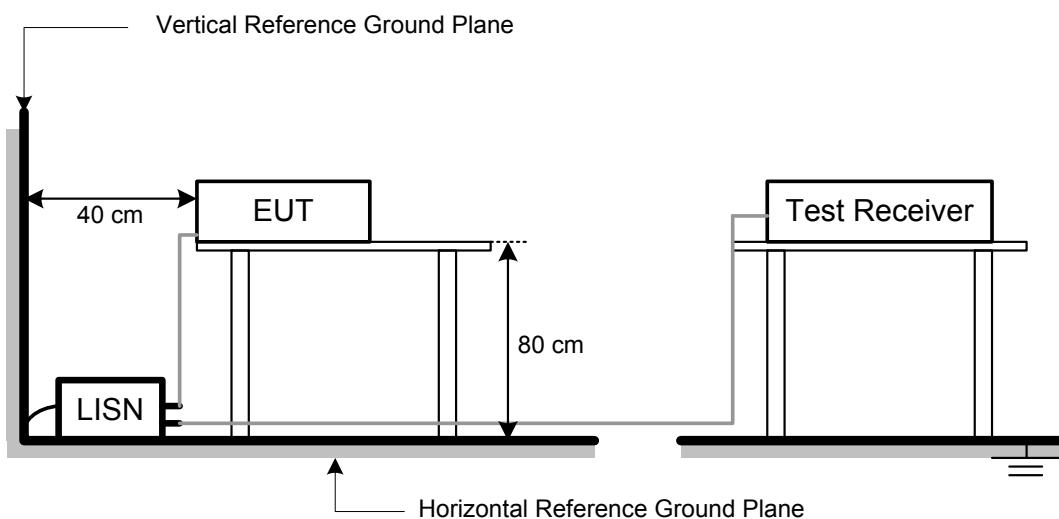

4.5 DEVIATION FROM TEST STANDARD

No deviation




4.6 EUT OPERATING CONDITIONS

The EUT used during radiated and/or conducted emission measurement was designed to exercise in a manner similar to a typical use.



4.7 TEST RESULTS


E.U.T	Home Theatre System	Model Name	JS6303WA (Part No.: JS6303WA Subwoofer)
Temperature	24°C	Relative Humidity	48%
Test Voltage	AC 120V/60Hz		
Test Mode	2433.024 MHz		

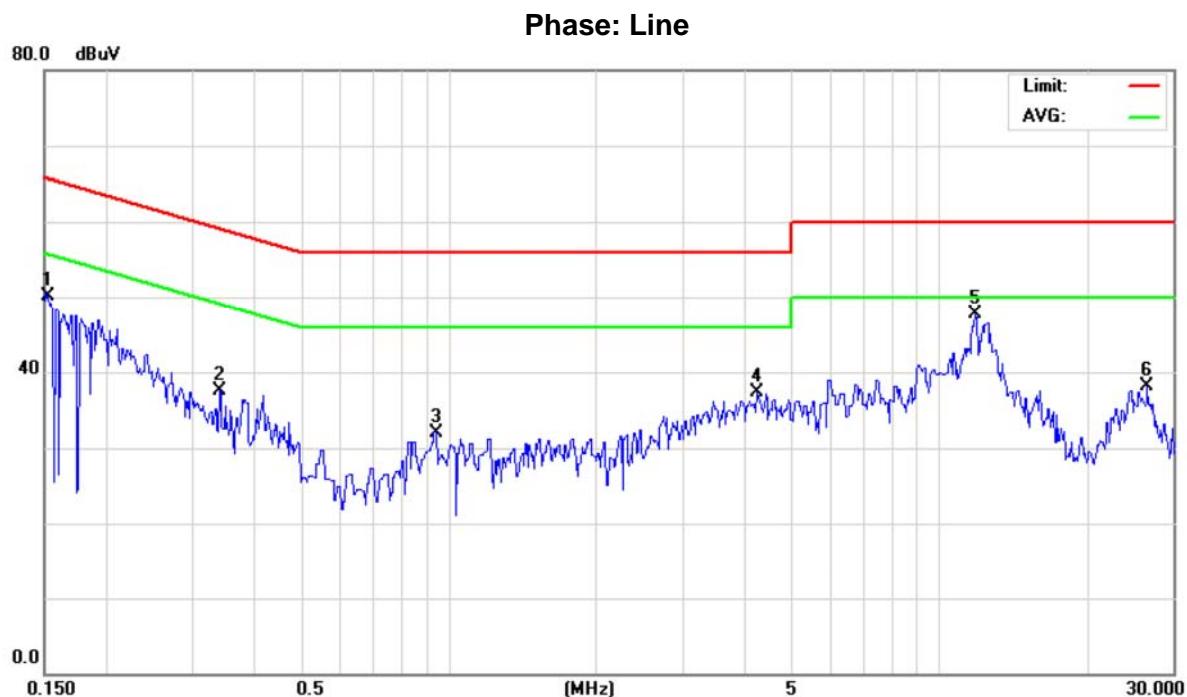

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		0.1521	40.41	9.65	50.06	65.88	-15.82	peak	
2		0.3410	27.95	9.61	37.56	59.18	-21.62	peak	
3		0.9410	22.39	9.61	32.00	56.00	-24.00	peak	
4		4.2350	27.79	9.59	37.38	56.00	-18.62	peak	
5	*	11.8500	37.97	9.66	47.63	60.00	-12.37	peak	
6		26.5500	28.32	9.87	38.19	60.00	-21.81	peak	



E.U.T	Home Theatre System	Model Name	JS6303WA (Part No.: JS6303WA Subwoofer)
Temperature	24°C	Relative Humidity	48%
Test Voltage	AC 120V/60Hz		
Test Mode	2433.024 MHz		

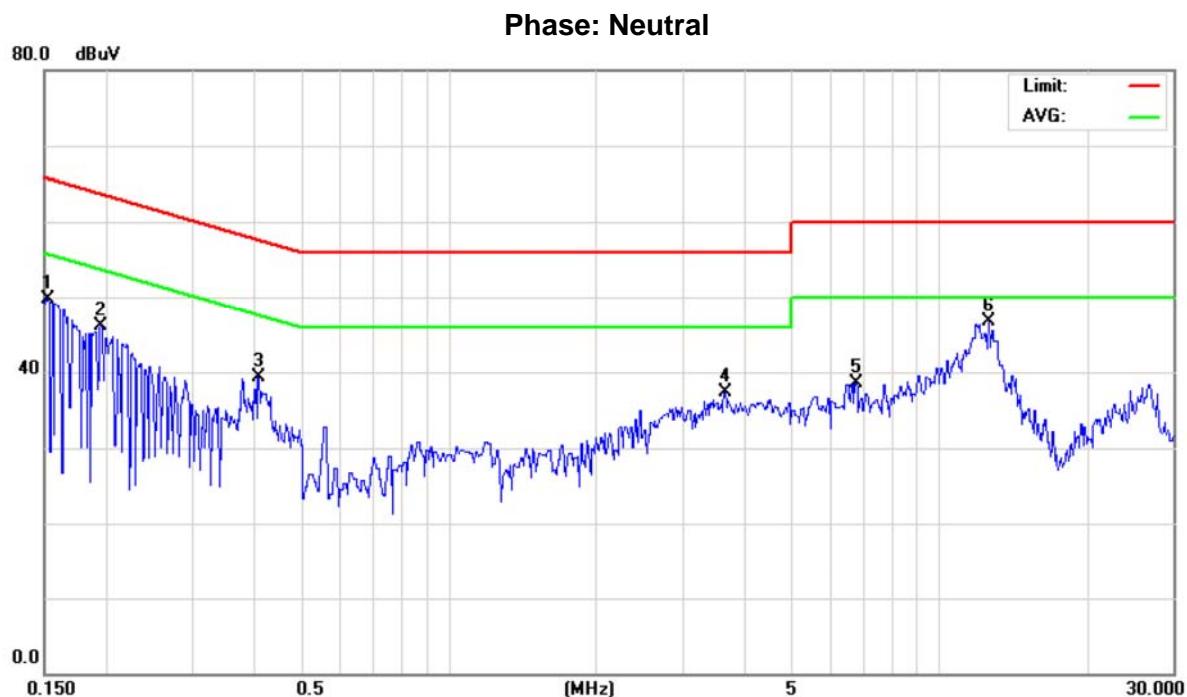

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		0.1521	40.04	9.72	49.76	65.88	-16.12	peak	
2		0.1955	36.01	10.13	46.14	63.80	-17.66	peak	
3		0.4090	29.60	9.73	39.33	57.67	-18.34	peak	
4		3.6500	27.62	9.65	37.27	56.00	-18.73	peak	
5		6.7500	28.78	9.68	38.46	60.00	-21.54	peak	
6	*	12.6000	36.99	9.73	46.72	60.00	-13.28	peak	



5 ANTENNA CONDUCTED SPURIOUS EMISSION

5.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Antenna conducted Spurious Emission	30-25000	20 dB less than the peak value of fundamental frequency

5.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

5.3 TEST PROCEDURES

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

5.4 TEST SETUP LAYOUT



5.5 DEVIATION FROM TEST STANDARD

No deviation

5.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.




5.7 TEST RESULTS

E.U.T	Home Theatre System	Model Name	JS6303WA (Part No.: JS6303WA Subwoofer)
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	2405.376 MHz/2466.816 MHz		


Channel of Worst Data			
The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2399.25	-46.09	2486.00	-57.96
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest lever of the desired power.			



The max. radio frequency power in any 100kHz bandwidth outside the frequency band

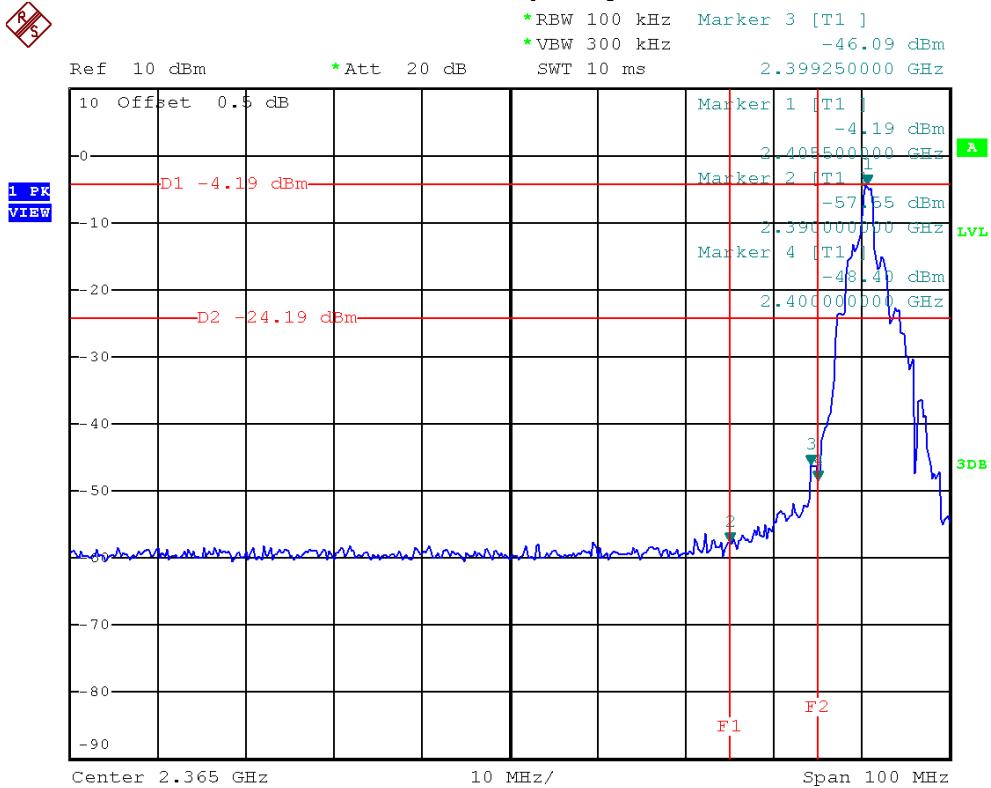


The max. radio frequency power in any 100 kHz bandwidth within the frequency band

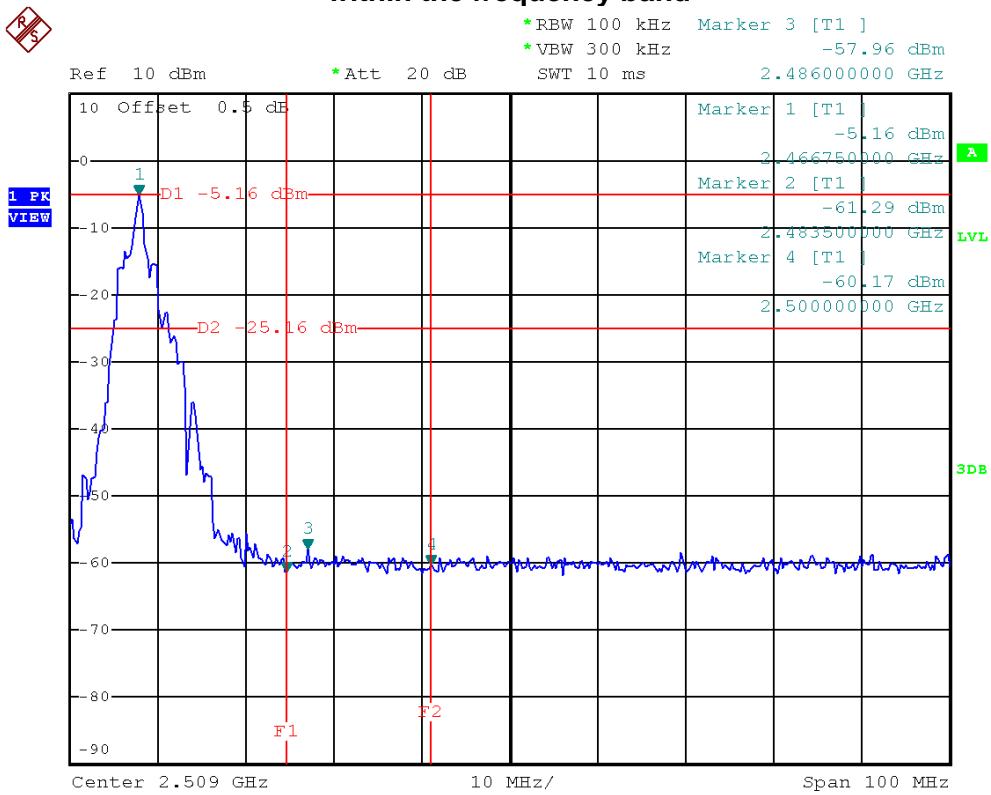




2405.376 MHz/10 Harmonic of the frequency

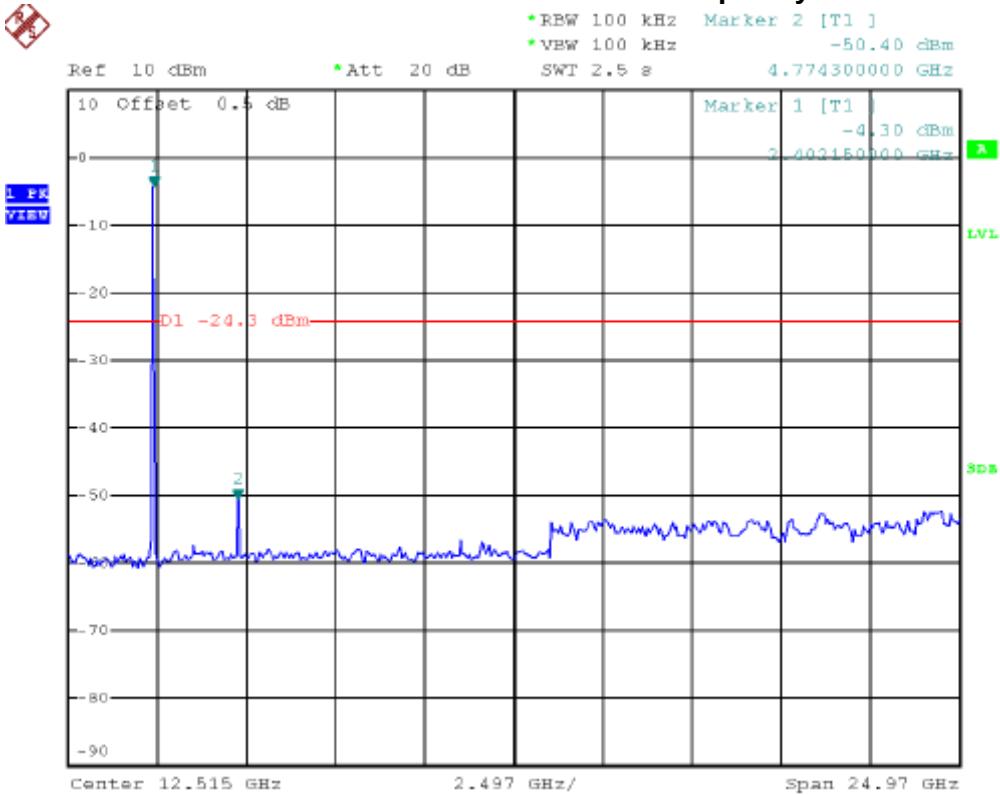


2433.024 MHz/10 Harmonic of the frequency

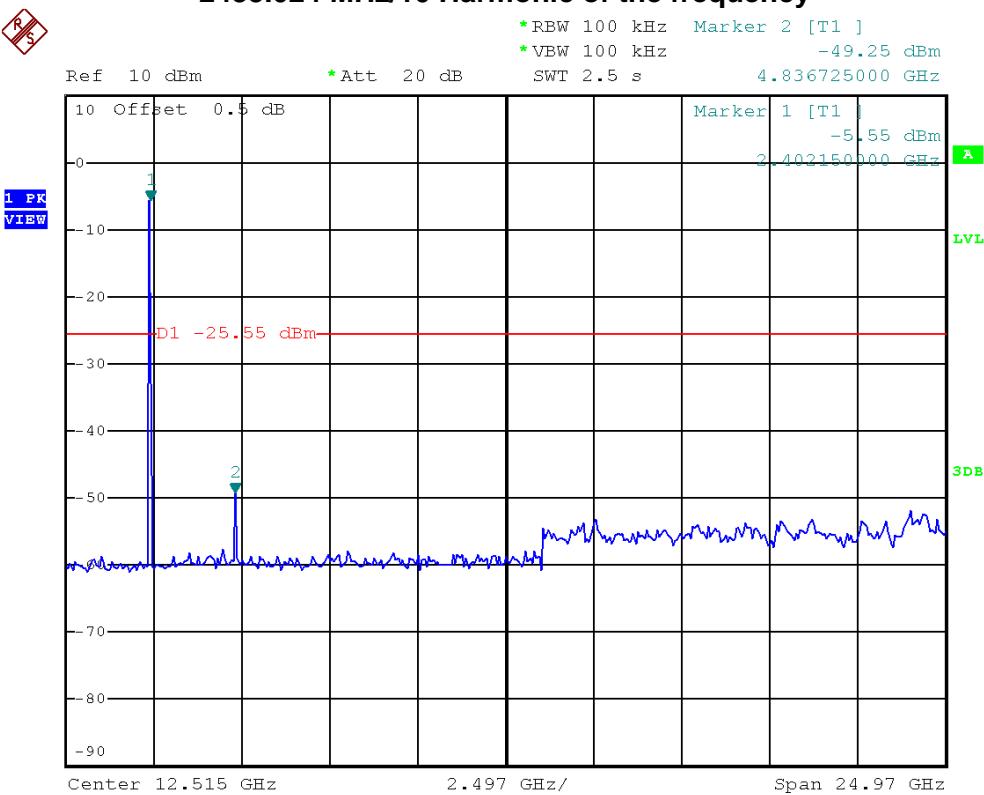



2466.816 MHz/10 Harmonic of the frequency

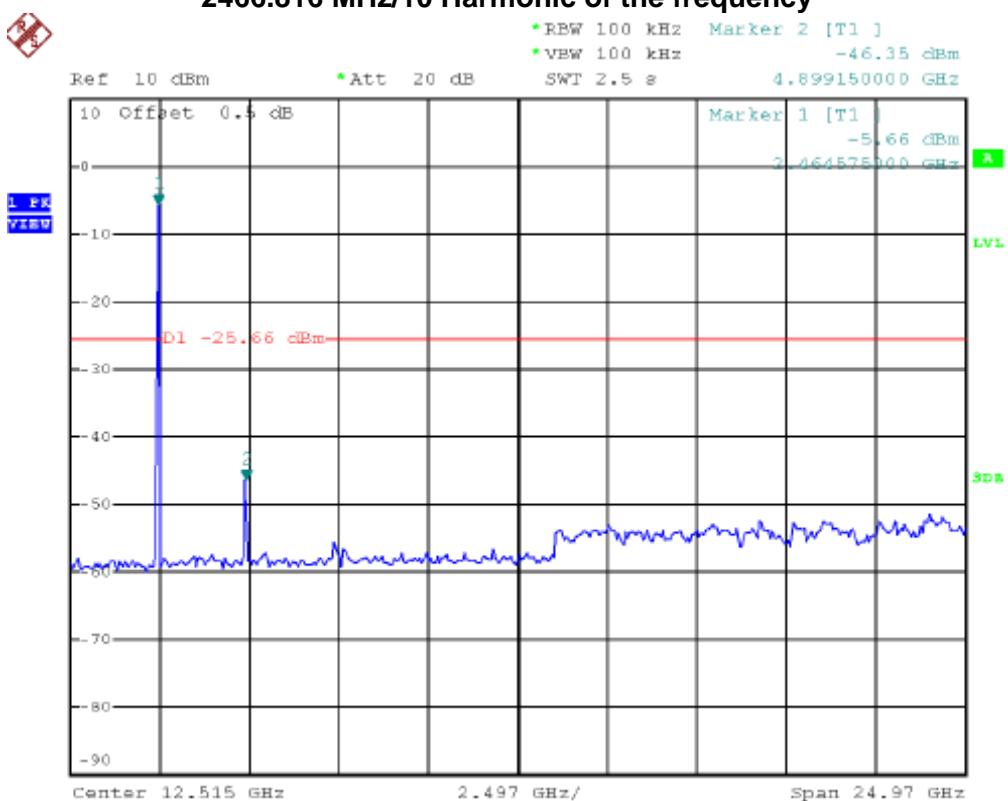



6 6 DB BANDWIDTH

6.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Bandwidth	2400-2483.5	>= 500KHz (6 dB bandwidth)

6.2 MEASUREMENT INSTRUMENTS LIST


Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

6.3 TEST PROCEDURES

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

6.4 TEST SETUP LAYOUT

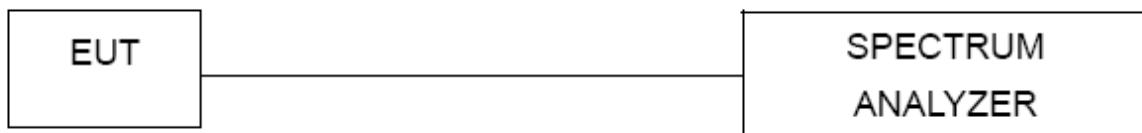

6.5 DEVIATION FROM TEST STANDARD

No deviation

6.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.




6.7 TEST RESULTS

E.U.T	Home Theatre System	Model Name	JS6303WA (Part No.: JS6303WA Subwoofer)
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	2405.376 MHz, 2433.024 MHz, 2466.816 MHz		


Frequency	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit	Result
2405.376 MHz	1.16	4.31	>=500 kHz	PASS
2433.024 MHz	1.13	4.34	>=500 kHz	PASS
2466.816 MHz	1.10	4.36	>=500 kHz	PASS

2405.376 MHz/6 dB and 99% Occupied Bandwidth

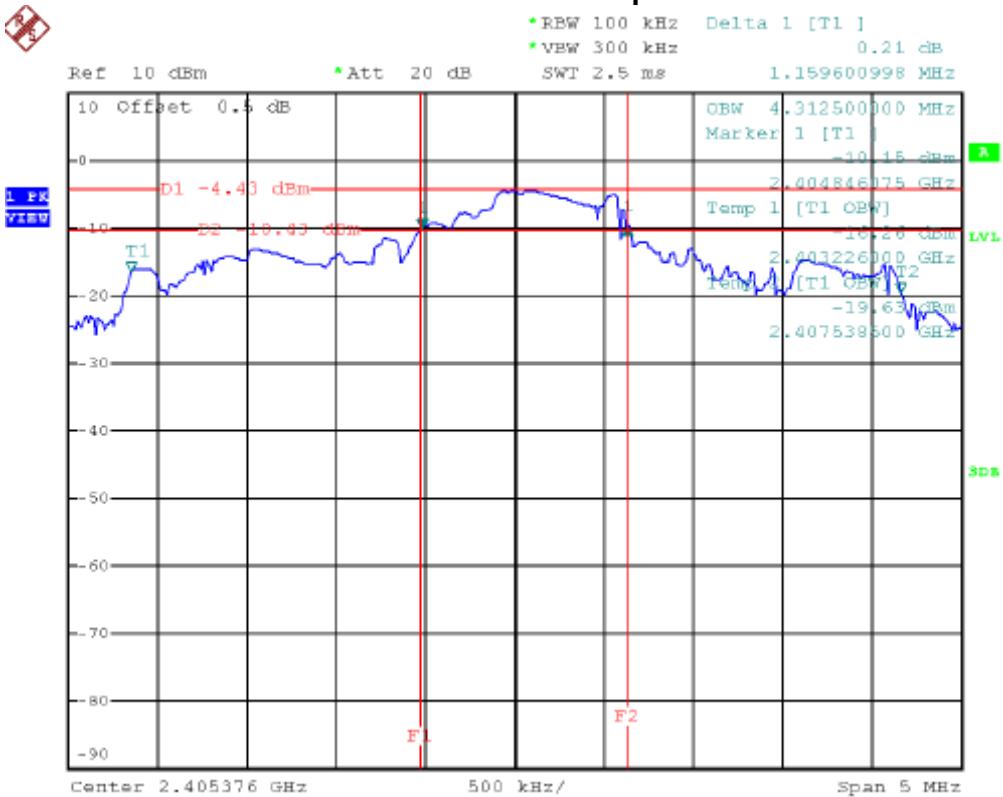




2433.024 MHz/6 dB and 99% Occupied Bandwidth

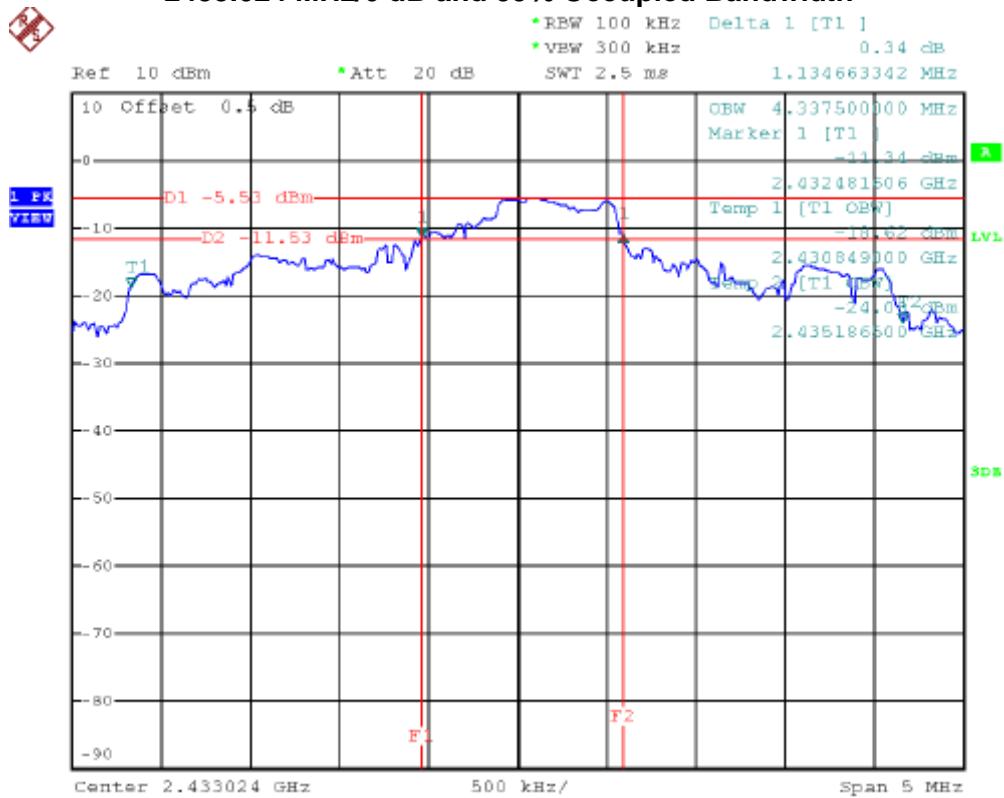

2466.816 MHz/6 dB and 99% Occupied Bandwidth

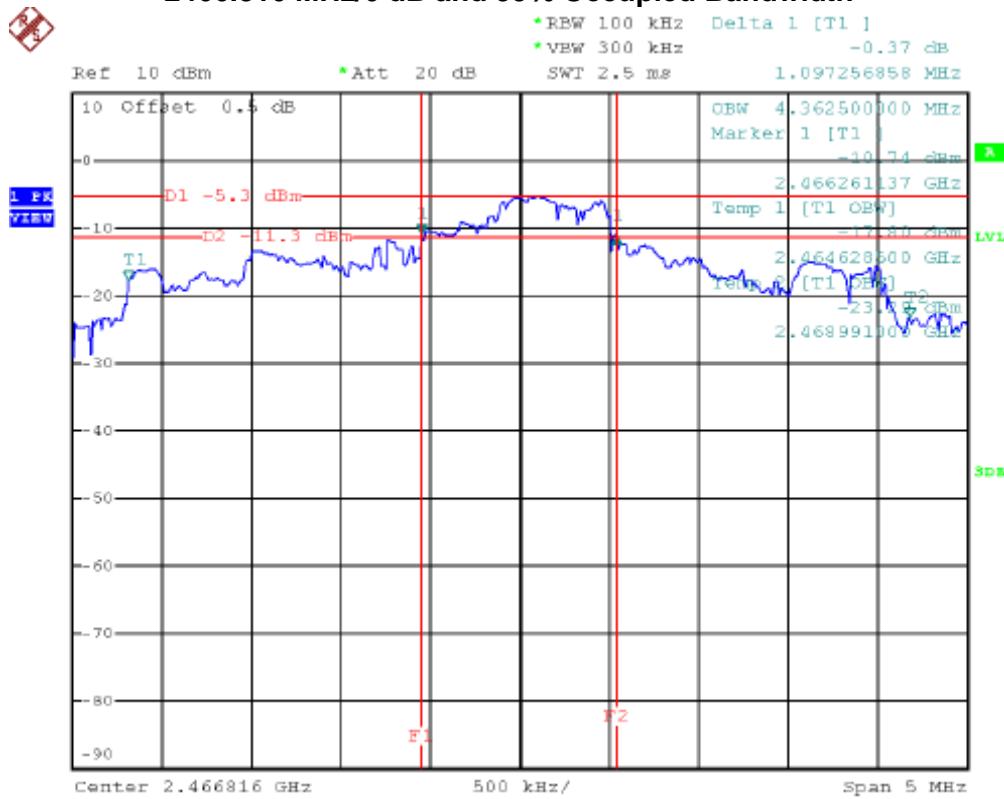



7 MAXIMUM PEAK CONDUCTED OUTPUT POWER

7.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Maximum Peak Conducted Output Power	2400-2483.5	1 watt or 30 dBm

7.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2495A	1128008	Feb,26,2014
2	Power Meter Sensor	Anritsu	MA2411B	1126001	Feb,26,2014

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

7.3 TEST PROCEDURES

The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.

7.4 TEST SETUP LAYOUT



7.5 DEVIATION FROM TEST STANDARD

No deviation

7.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.



7.7 TEST RESULTS

E.U.T	Home Theatre System	Model Name	JS6303WA (Part No.: JS6303WA Subwoofer)
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	2405.376 MHz, 2433.024 MHz, 2466.816 MHz		

Frequency	Peak Output Power (dBm)	LIMIT (dBm)	Result
2405.376 MHz	15.12	30	PASS
2433.024 MHz	14.43	30	PASS
2466.816 MHz	14.32	30	PASS

**8 RADIATED SPURIOUS EMISSION (9 KHZ TO 1 GHZ)****8.1 LIMIT**

20 dB in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency Range: 9 kHz to 1 GHz		
FREQUENCY (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Frequency Range: above 1 GHz				
FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
above 1 GHz	80	60	74	54

NOTE:

1. The limit for radiated test was performed according to FCC PART 15B.

2. The tighter limit applies at the band edges.

3. Emission level (dBuV/m)=20log Emission level (uV/m).

4. The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain(if use)

Margin Level = Measurement Value – Limit Value



8.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Apr. 15, 2014
3	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 16, 2014
4	Microflex Cable	N/A	27478LL142	1m	May. 14, 2014
5	Microflex Cable	AISI	S104-SMAP-1	8m	May. 14, 2014
6	Microflex Cable	N/A	27478LL142	3m	May. 14, 2014
7	Test Cable	N/A	LMR-400	966_12m	May. 14, 2014
8	Test Cable	N/A	LMR-400	966_3m	May. 14, 2014
9	Pre-Amplifier	EMC	EMC-330	980001	Jul. 06, 2014
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jun. 11, 2014

Remark: "N/A" denotes No Model Name, No Serial No. or No Calibration specified.

8.3 MEASURING INSTRUMENTS SETTING

EMI Test Receiver	Parameter Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



8.4 TEST PROCEDURES

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1 GHz. For frequencies above 1 GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m Semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. The testing follows the guidelines in ANSI C63.4 and FCC Public Notice DA 00-705 Measurement Guidelines. In case the emission is fail due to the used RBW/VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.


NOTE:

- a. Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode with Detector BW=120 kHz; SPA setting in RBW=100 kHz, VBW =100 kHz, Swp. Time = 0.3 sec./ MHz.
- b. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.

8.5 DEVIATION FROM TEST STANDARD

No deviation

8.6 TEST SETUP LAYOUT

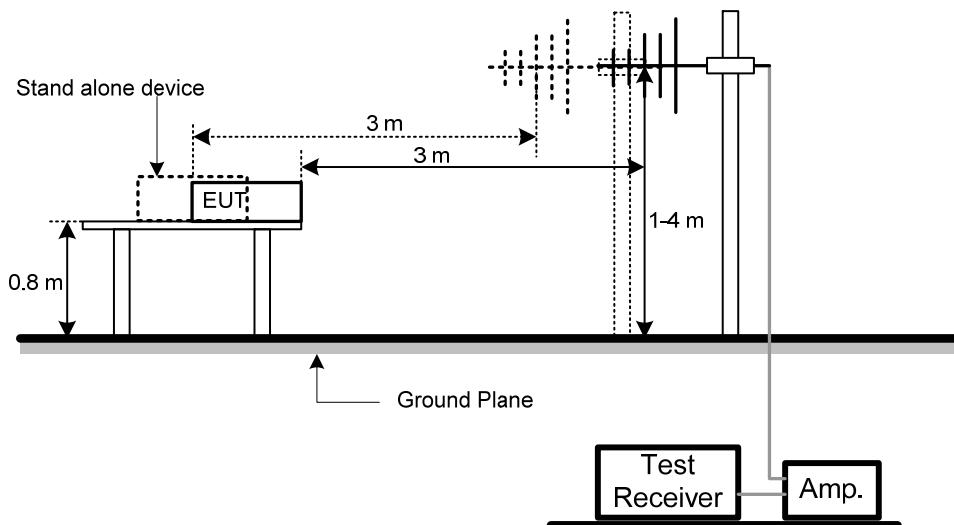




8.7 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.



8.8 TEST RESULTS

E.U.T	Home Theatre System	Model Name	JS6303WA (Part No.: JS6303WA Subwoofer)
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	2433.024 MHz		

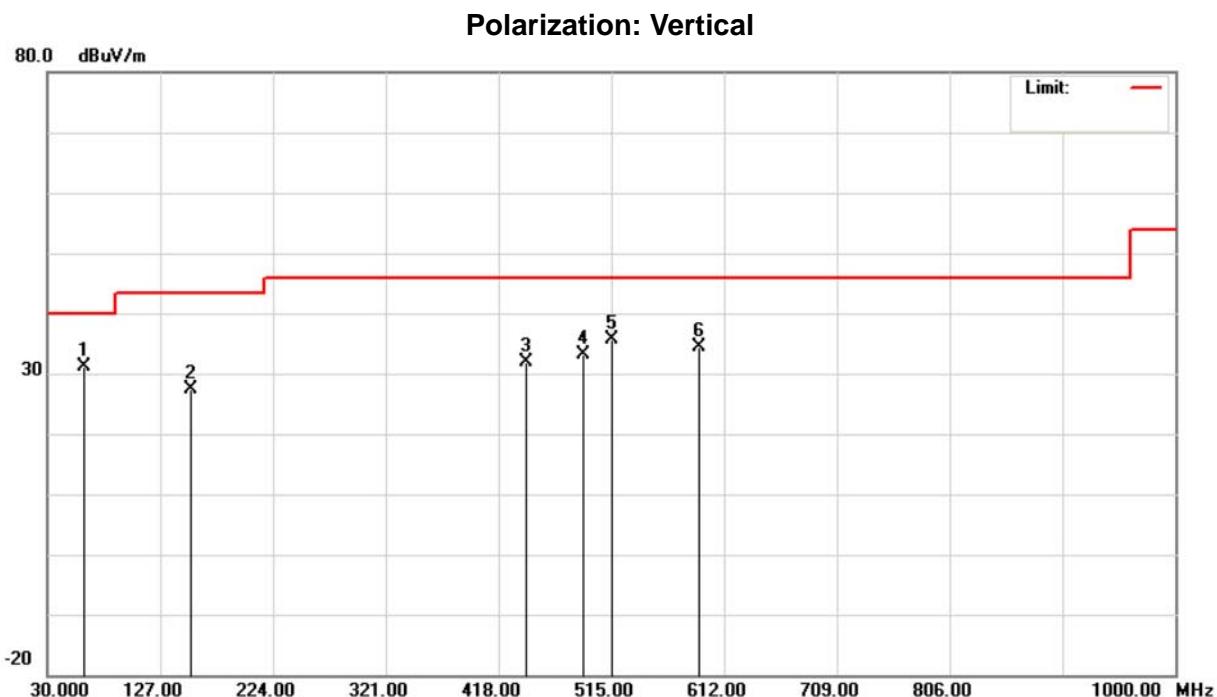


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1	*	61.5250	45.49	-14.45	31.04	40.00	-8.96	peak	
2		153.6750	41.52	-14.21	27.31	43.50	-16.19	peak	
3		442.2500	41.86	-9.98	31.88	46.00	-14.12	peak	
4		490.7500	42.68	-9.54	33.14	46.00	-12.86	peak	
5		515.0000	44.80	-9.11	35.69	46.00	-10.31	peak	
6		590.1749	41.41	-7.05	34.36	46.00	-11.64	peak	



E.U.T	Home Theatre System	Model Name	JS6303WA (Part No.: JS6303WA Subwoofer)
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	2433.024 MHz		

Polarization: Horizontal

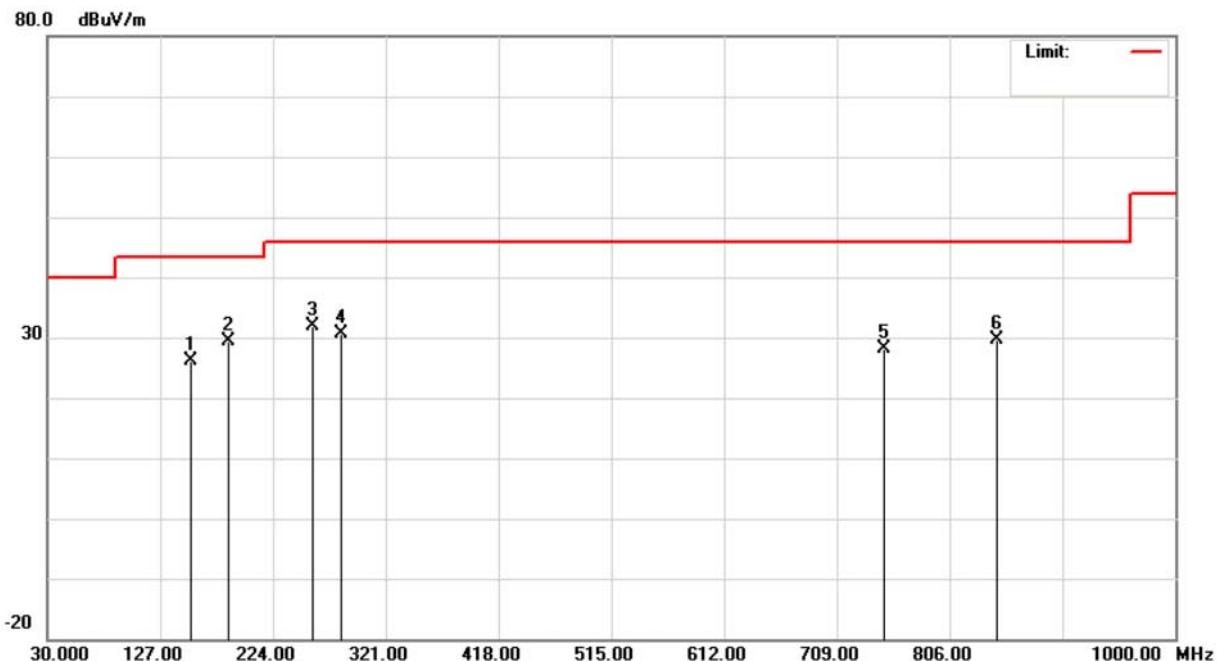

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		153.6750	40.38	-14.21	26.17	43.50	-17.33	peak	
2	*	185.1999	45.69	-16.35	29.34	43.50	-14.16	peak	
3		257.9500	46.45	-14.61	31.84	46.00	-14.16	peak	
4		282.2000	44.89	-14.30	30.59	46.00	-15.41	peak	
5		750.2249	33.45	-5.35	28.10	46.00	-17.90	peak	
6		847.2249	33.81	-4.07	29.74	46.00	-16.26	peak	

**9 RADIATED SPURIOUS EMISSION (ABOVE 1 GHZ)****9.1 LIMIT**

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency Range: 9 kHz to 1 GHz		
FREQUENCY (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Frequency Range: above 1 GHz				
FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
above 1 GHz	80	60	74	54

NOTE:

(1) The limit for radiated test was performed according to FCC PART 15B.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

(4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain(if use)

Margin Level = Measurement Value – Limit Value



9.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Apr. 15, 2014
3	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 16, 2014
4	Microflex Cable	N/A	27478LL142	1m	May. 14, 2014
5	Microflex Cable	AISI	S104-SMAP-1	8m	May. 14, 2014
6	Microflex Cable	N/A	27478LL142	3m	May. 14, 2014

Remark: "N/A" denotes No Model Name, No Serial No. or No Calibration specified.

9.3 MEASURING INSTRUMENTS SETTING

Spectrum Analyzer	Parameter Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (other emission)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average



9.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m Semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- d. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- f. The testing follows the guidelines in ANSI C63.4 and FCC Public Notice DA 00-705 Measurement Guidelines. In case the emission is fail due to the used RBW/VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.


NOTE:

- a. Reading in which marked as Peak means measurements by using are Peak Mode with instrument setting in RBW= 1 MHz, VBW= 1 MHz, Swp. Time = Auto.
Reading in which marked as AVG means measurements by using are Average Mode with instrument setting in RBW= 1 MHz, VBW= 10 Hz, Swp. Time = Auto.
- b. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform.

9.5 DEVIATION FROM TEST STANDARD

No deviation

9.6 TEST SETUP LAYOUT

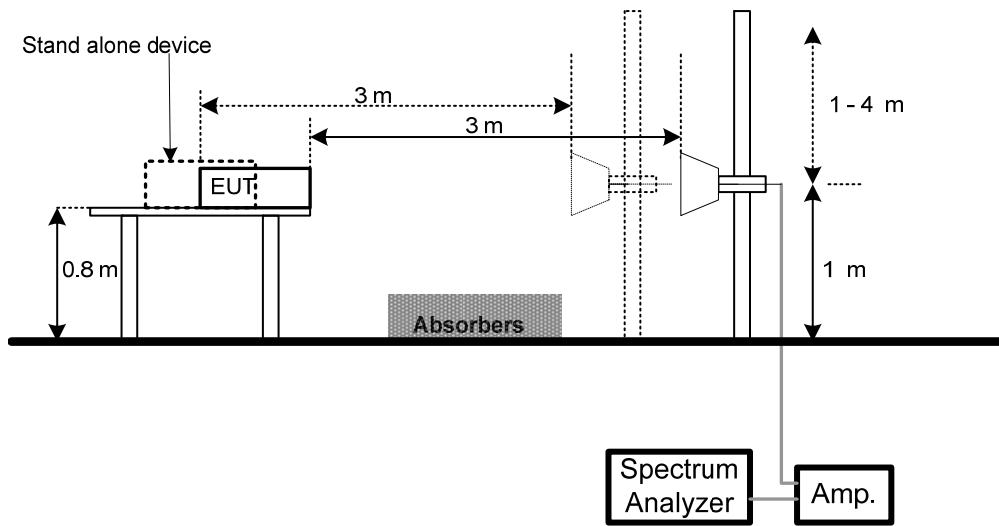




9.7 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.



9.8 TEST RESULTS

E.U.T	Home Theatre System	Model Name	JS6303WA (Part No.: JS6303WA Subwoofer)
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	2405.376 MHz		

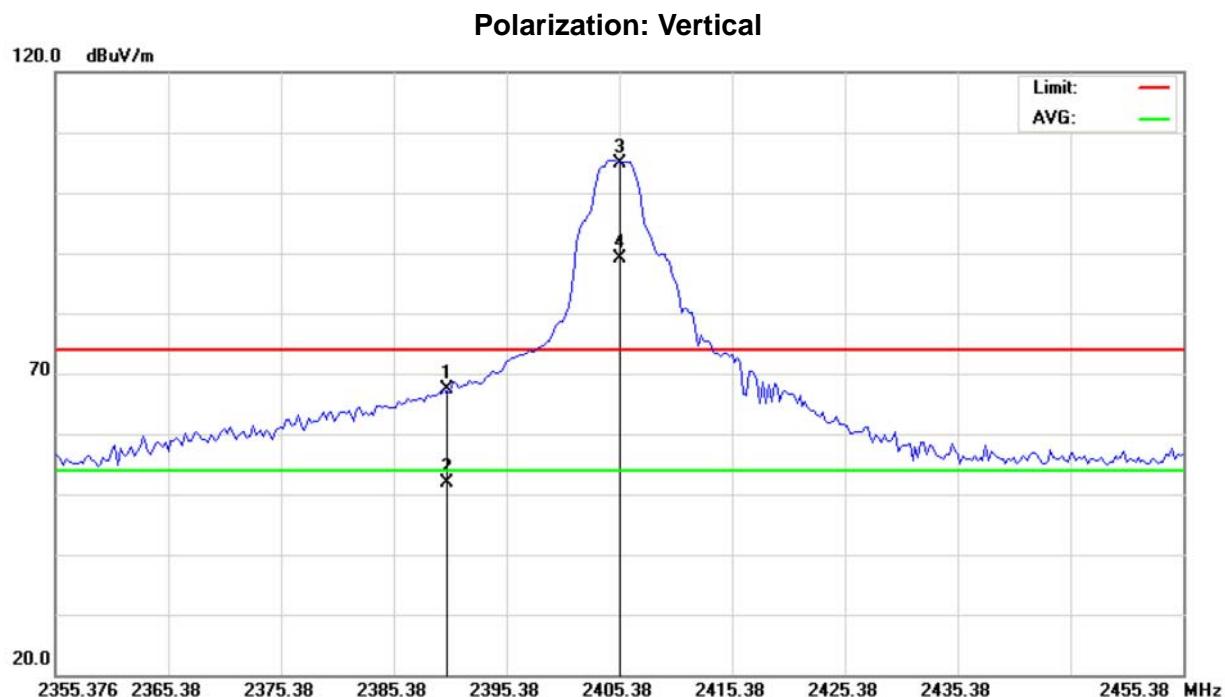


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	35.75	31.67	67.42	74.00	-6.58	peak	
2		2390.000	20.16	31.67	51.83	54.00	-2.17	Avg	
3	X	2405.326	73.10	31.74	104.84	74.00	30.84	peak	
4	*	2405.326	57.51	31.74	89.25	54.00	35.25	Avg	



E.U.T	Home Theatre System	Model Name	JS6303WA (Part No.: JS6303WA Subwoofer)
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	2405.376 MHz		

Polarization: Vertical

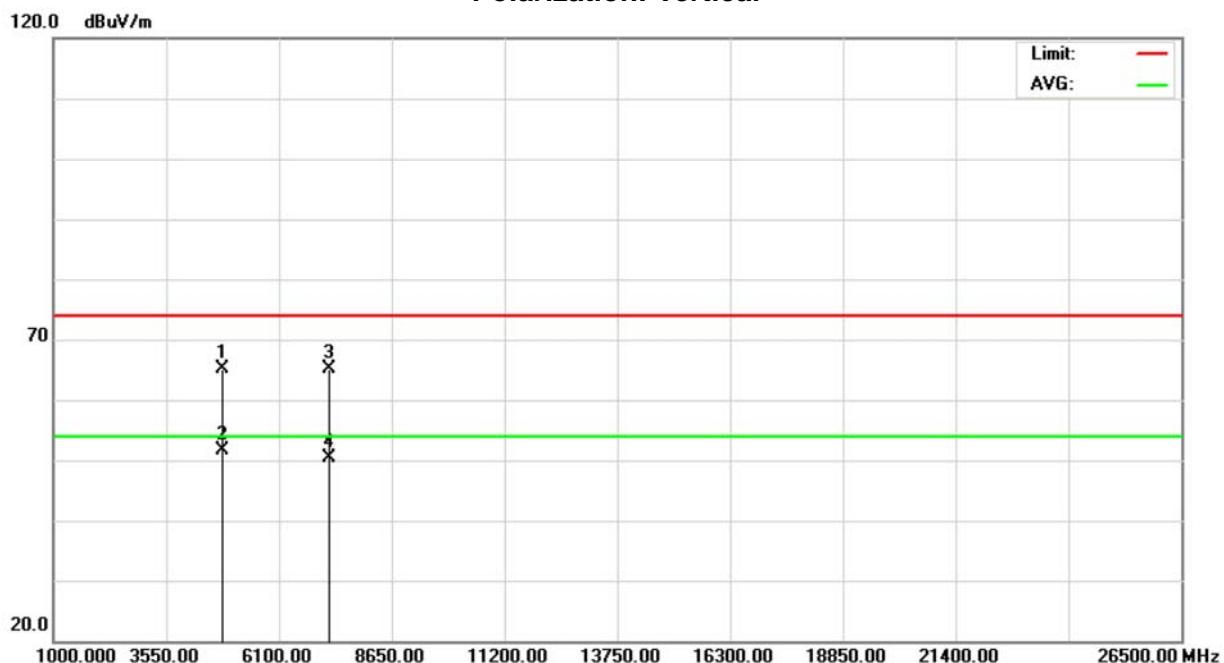

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		4810.752	59.31	5.70	65.01	74.00	-8.99	peak	
2	*	4810.752	45.92	5.70	51.62	54.00	-2.38	AVG	
3		7216.128	52.94	12.21	65.15	74.00	-8.85	peak	
4		7216.128	38.13	12.21	50.34	54.00	-3.66	AVG	



E.U.T	Home Theatre System	Model Name	JS6303WA (Part No.: JS6303WA Subwoofer)
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	2405.376 MHz		

Polarization: Horizontal




No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	35.75	31.67	67.42	74.00	-6.58	peak	
2		2390.000	20.16	31.67	51.83	54.00	-2.17	AVG	
3	X	2404.876	73.21	31.73	104.94	74.00	30.94	peak	
4	*	2404.876	57.62	31.73	89.35	54.00	35.35	AVG	



E.U.T	Home Theatre System	Model Name	JS6303WA (Part No.: JS6303WA Subwoofer)
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	2405.376 MHz		

Polarization: Horizontal

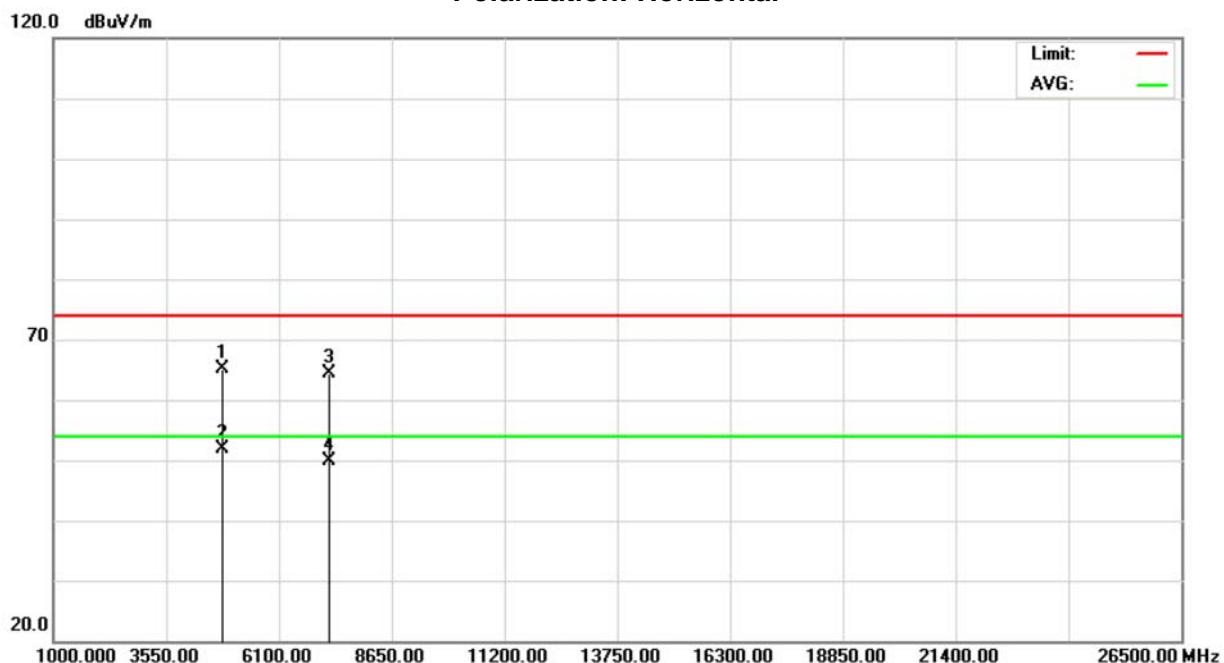


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		4810.752	59.37	5.70	65.07	74.00	-8.93	peak	
2	*	4810.752	46.28	5.70	51.98	54.00	-2.02	AVG	
3		7216.128	52.08	12.21	64.29	74.00	-9.71	peak	
4		7216.128	37.76	12.21	49.97	54.00	-4.03	AVG	



E.U.T	Home Theatre System	Model Name	JS6303WA (Part No.: JS6303WA Subwoofer)
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	2433.024 MHz		

Polarization: Vertical

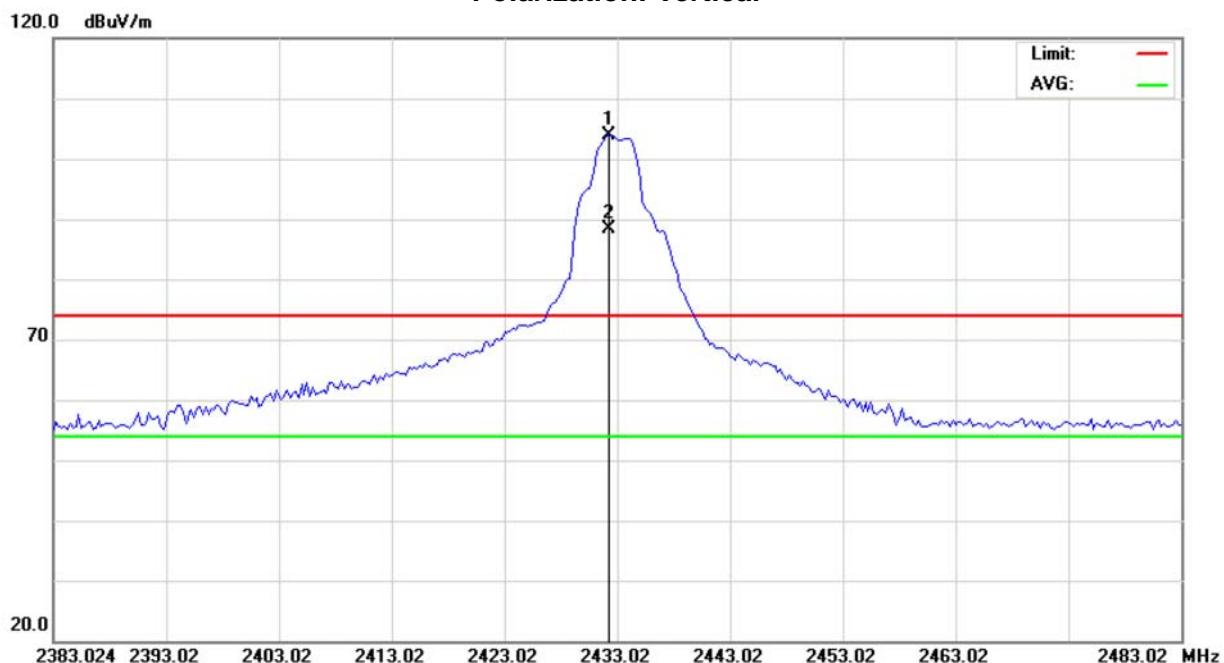

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2432.274	71.99	31.86	103.85	74.00	29.85	peak	
2	*	2432.274	56.40	31.86	88.26	54.00	34.26	AVG	



E.U.T	Home Theatre System	Model Name	JS6303WA (Part No.: JS6303WA Subwoofer)
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	2433.024 MHz		

Polarization: Vertical




No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		4866.048	60.37	5.77	66.14	74.00	-7.86	peak	
2	*	4866.048	45.98	5.77	51.75	54.00	-2.25	AVG	
3		7299.072	52.94	12.52	65.46	74.00	-8.54	peak	
4		7299.072	38.04	12.52	50.56	54.00	-3.44	AVG	



E.U.T	Home Theatre System	Model Name	JS6303WA (Part No.: JS6303WA Subwoofer)
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	2433.024 MHz		

Polarization: Horizontal

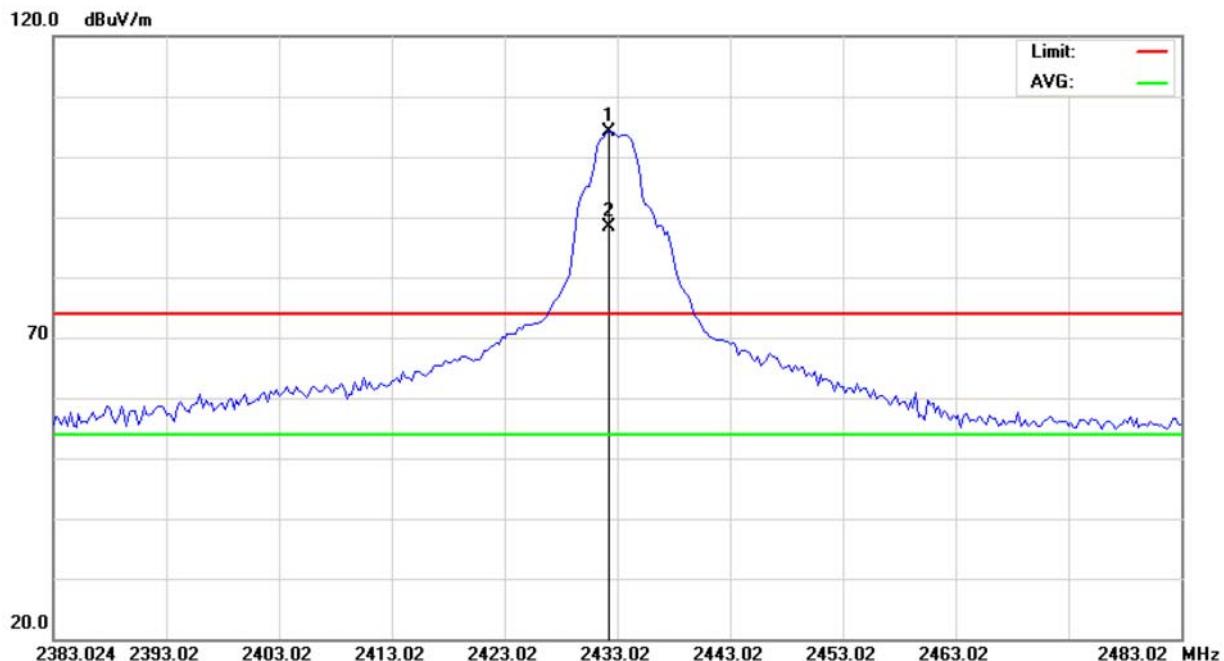

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2432.274	72.21	31.86	104.07	74.00	30.07	peak	
2	*	2432.274	56.62	31.86	88.48	54.00	34.48	AVG	



E.U.T	Home Theatre System	Model Name	JS6303WA (Part No.: JS6303WA Subwoofer)
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	2433.024 MHz		

Polarization: Horizontal




No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		4866.048	60.36	5.77	66.13	74.00	-7.87	peak	
2	*	4866.048	45.93	5.77	51.70	54.00	-2.30	AVG	
3		7299.072	52.36	12.52	64.88	74.00	-9.12	peak	
4		7299.072	37.16	12.52	49.68	54.00	-4.32	AVG	



E.U.T	Home Theatre System	Model Name	JS6303WA (Part No.: JS6303WA Subwoofer)
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	2466.816 MHz		

Polarization: Vertical

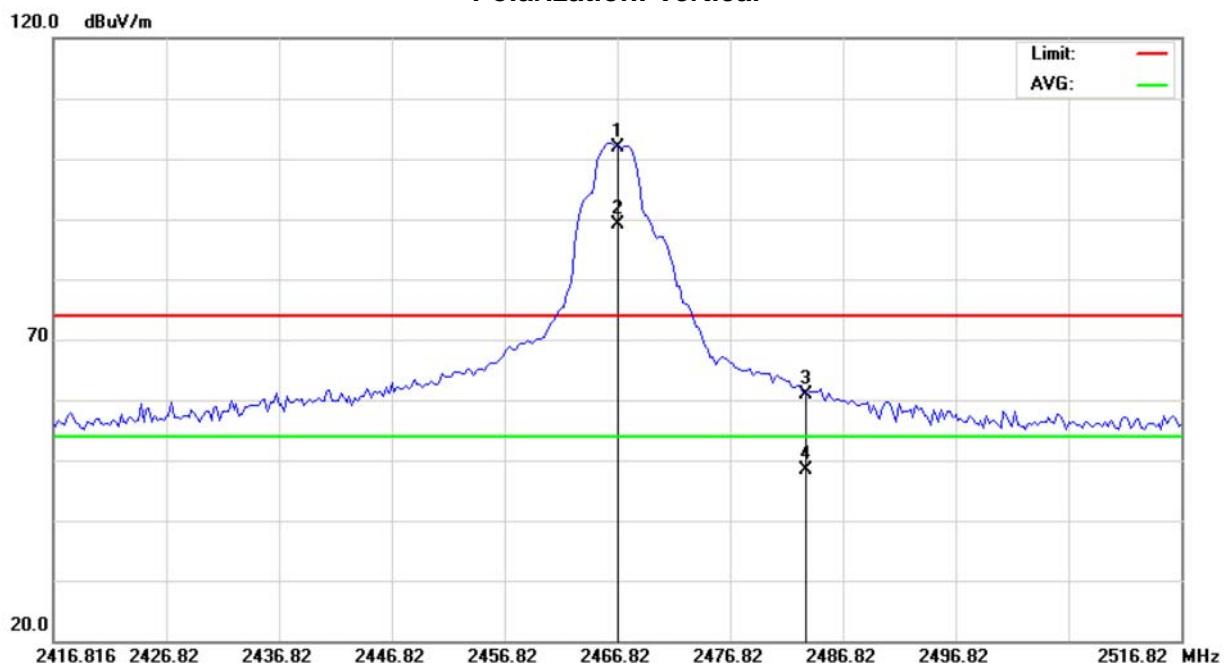


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2466.766	69.77	32.01	101.78	74.00	27.78	peak	
2	*	2466.766	57.22	32.01	89.23	54.00	35.23	AVG	
3		2483.500	28.82	32.09	60.91	74.00	-13.09	peak	
4		2483.500	16.27	32.09	48.36	54.00	-5.64	AVG	



E.U.T	Home Theatre System	Model Name	JS6303WA (Part No.: JS6303WA Subwoofer)
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	2466.816 MHz		

Polarization: Vertical

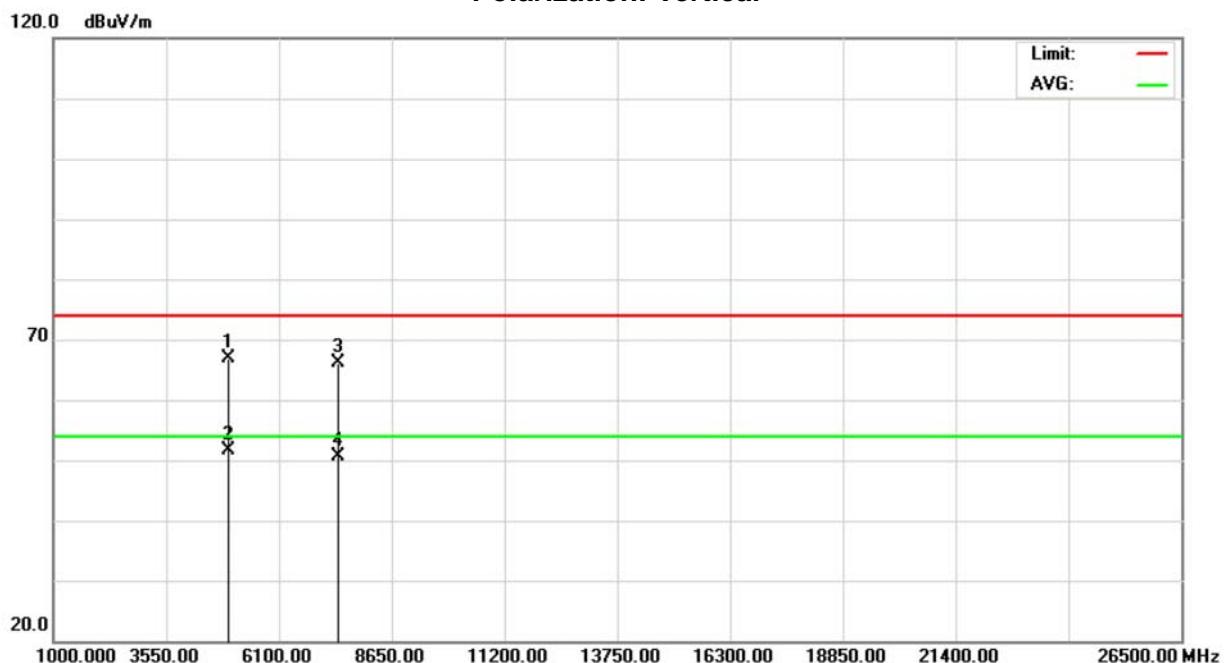


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		4931.882	61.14	5.85	66.99	74.00	-7.01	peak	
2	*	4931.882	45.82	5.85	51.67	54.00	-2.33	AVG	
3		7398.548	53.36	12.89	66.25	74.00	-7.75	peak	
4		7398.548	37.81	12.89	50.70	54.00	-3.30	AVG	



E.U.T	Home Theatre System	Model Name	JS6303WA (Part No.: JS6303WA Subwoofer)
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	2466.816 MHz		

Polarization: Horizontal

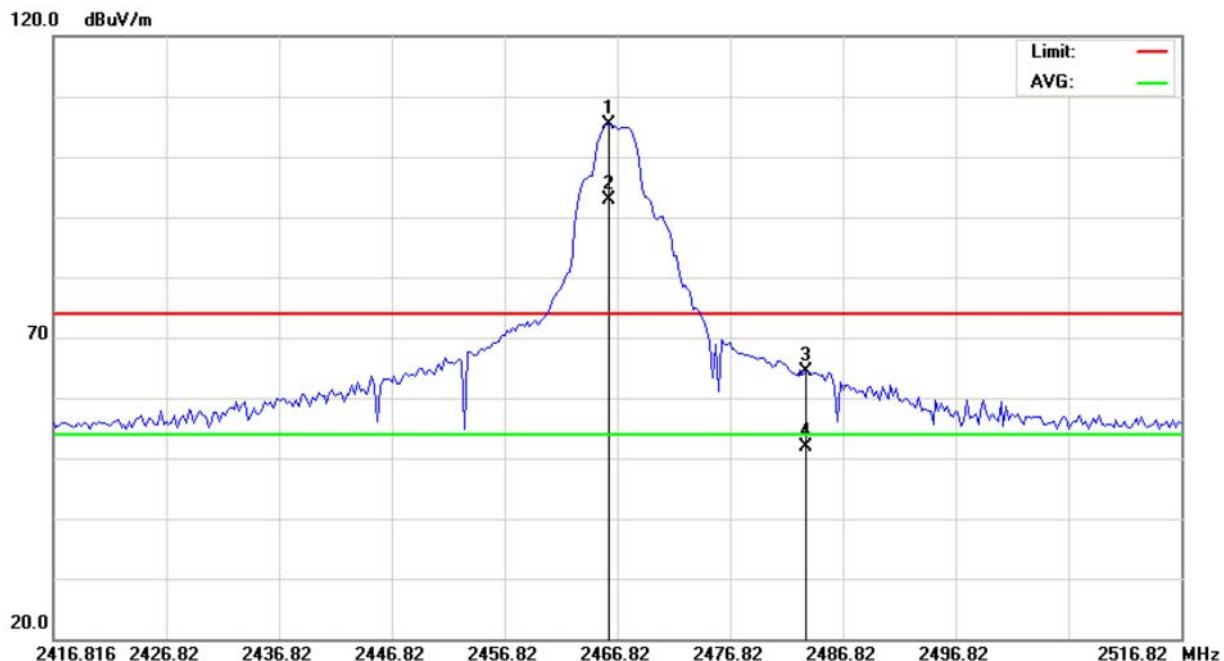

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2466.066	73.36	32.01	105.37	74.00	31.37	peak	
2	*	2466.066	60.81	32.01	92.82	54.00	38.82	AVG	
3		2483.500	32.35	32.09	64.44	74.00	-9.56	peak	
4		2483.500	19.80	32.09	51.89	54.00	-2.11	AVG	



E.U.T	Home Theatre System	Model Name	JS6303WA (Part No.: JS6303WA Subwoofer)
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	2466.816 MHz		


Polarization: Horizontal



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		4931.832	58.37	5.85	64.22	74.00	-9.78	peak	
2	*	4931.832	43.18	5.85	49.03	54.00	-4.97	AVG	
3		7398.598	50.34	12.89	63.23	74.00	-10.77	peak	
4		7398.598	34.10	12.89	46.99	54.00	-7.01	AVG	

**9.9 TEST RESULTS (RESTRICTED BANDS)**

E.U.T	Home Theatre System	Model Name	JS6303WA (Part No.: JS6303WA Subwoofer)
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	2405.376 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 2310-2390 MHz.		

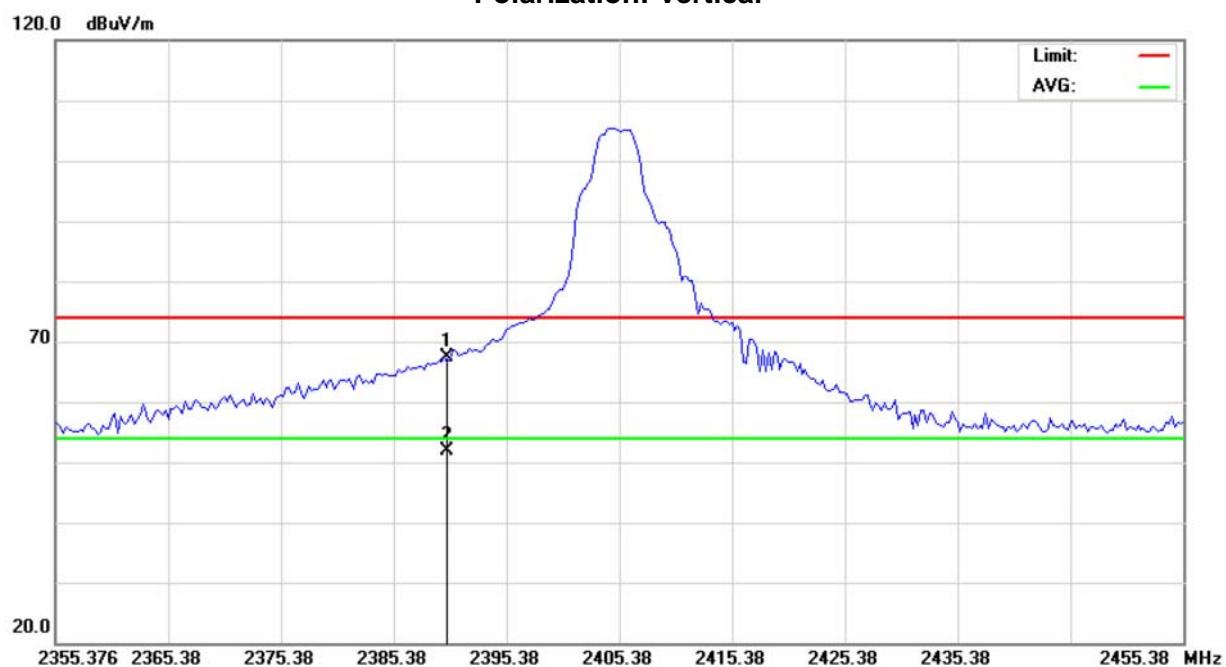
Polarization: Vertical

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		2390.000	35.75	31.67	67.42	74.00	-6.58	peak	
2	*	2390.000	20.16	31.67	51.83	54.00	-2.17	AVG	



E.U.T	Home Theatre System	Model Name	JS6303WA (Part No.: JS6303WA Subwoofer)
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	2405.376 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 2310-2390 MHz.		

Polarization: Horizontal

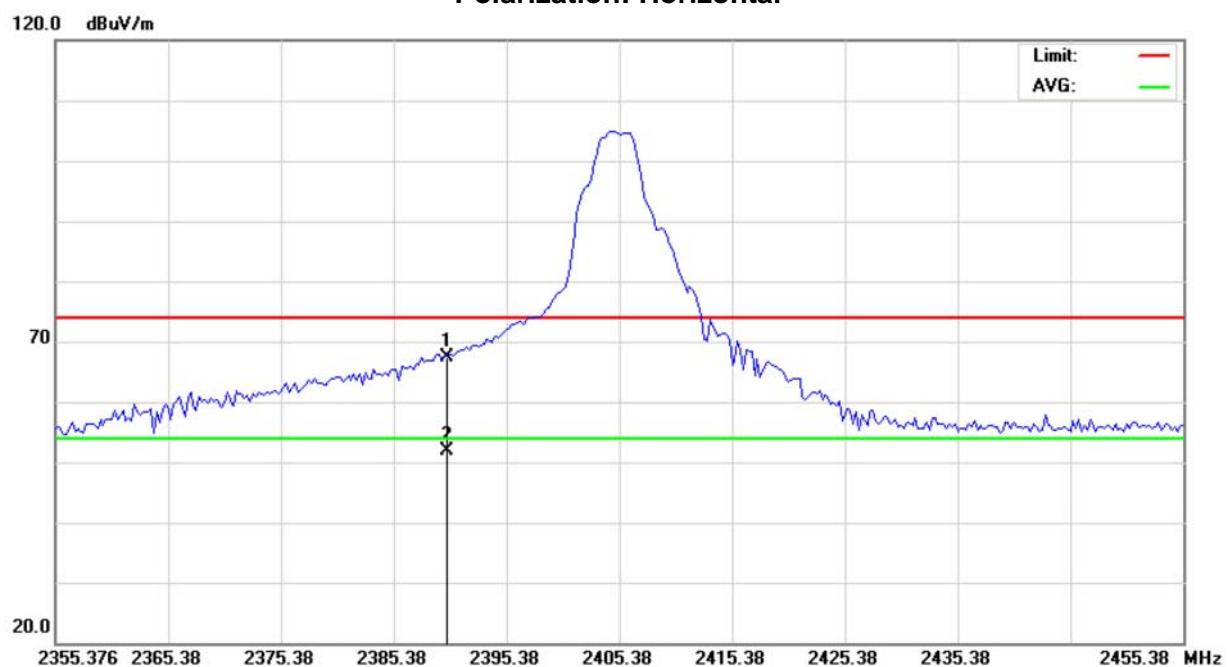


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		2390.000	35.75	31.67	67.42	74.00	-6.58	peak	
2	*	2390.000	20.16	31.67	51.83	54.00	-2.17	AVG	



E.U.T	Home Theatre System	Model Name	JS6303WA (Part No.: JS6303WA Subwoofer)
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	2466.816 MHz		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 2483.5-2500 MHz.		

Polarization: Vertical

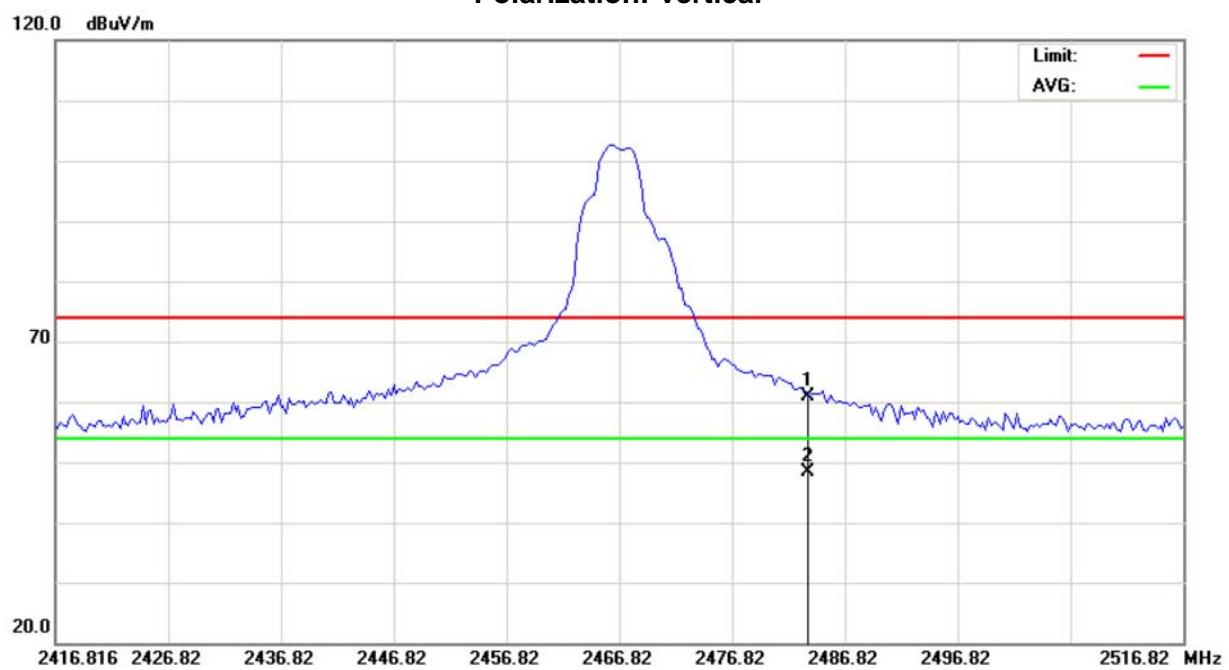


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		2483.500	28.82	32.09	60.91	74.00	-13.09	peak	
2	*	2483.500	16.27	32.09	48.36	54.00	-5.64	AVG	



E.U.T	Home Theatre System	Model Name	JS6303WA (Part No.: JS6303WA Subwoofer)
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	2466.816 MHz		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 2483.5-2500 MHz.		

Polarization: Horizontal

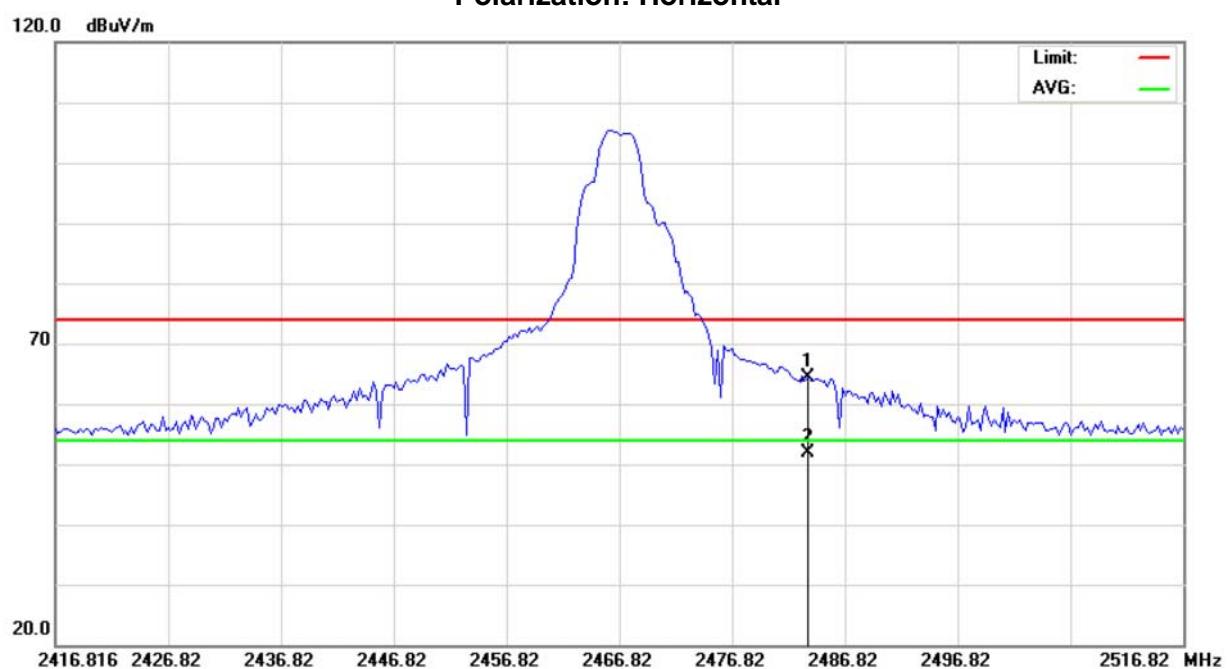

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		2483.500	32.35	32.09	64.44	74.00	-9.56	peak	
2	*	2483.500	19.80	32.09	51.89	54.00	-2.11	AVG	



10 POWER SPECTRAL DENSITY

10.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Power Spectral Density	2400-2483.5	8 dBm (in any 3 kHz)

10.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

NOTE: **N/A:** denotes No Model Name, No Serial No. or No Calibration specified.

10.3 TEST PROCEDURES

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW=3 kHz, VBW=30 kHz, Sweep time = 500s.

10.4 TEST SETUP LAYOUT



10.5 DEVIATION FROM TEST STANDARD

No deviation

10.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.




10.7 TEST RESULTS

E.U.T	Home Theatre System	Model Name	JS6303WA (Part No.: JS6303WA Subwoofer)
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	2405.376 MHz, 2433.024 MHz, 2466.816 MHz		


Frequency	Power Density (dBm)	Limit (dBm)	Result
2405.376 MHz	-7.56	8	PASS
2433.024 MHz	-8.45	8	PASS
2466.816 MHz	-8.22	8	PASS

2405.376 MHz/Power Sepctral Density

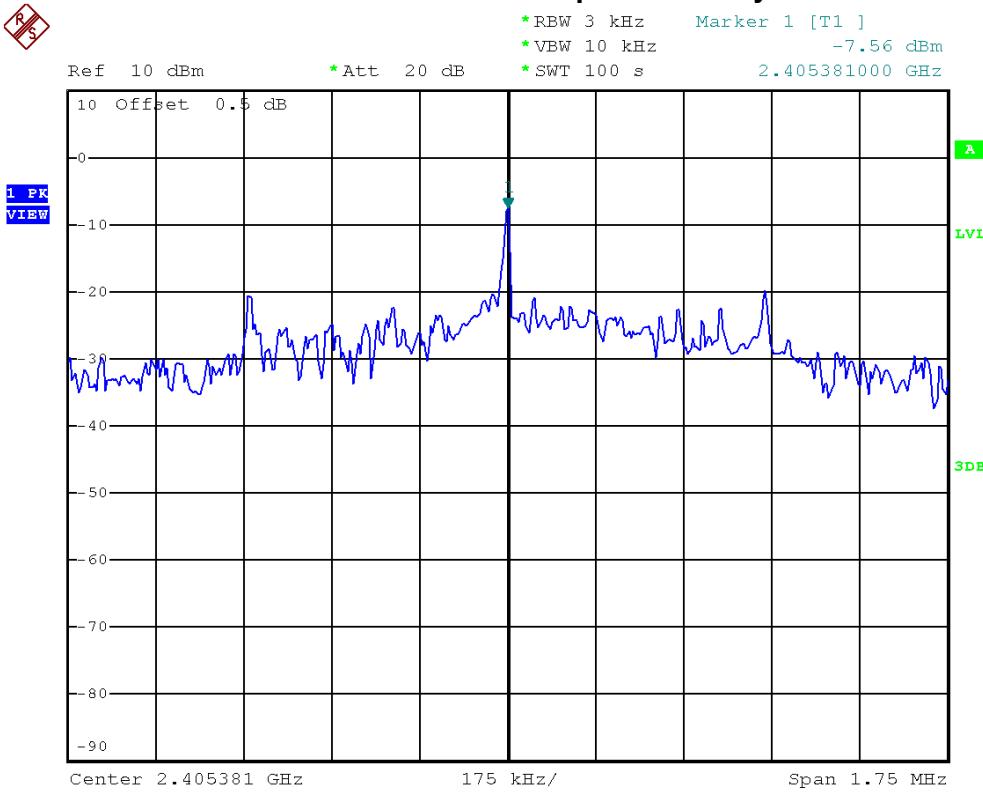




2433.024 MHz/Power Sepctral Density

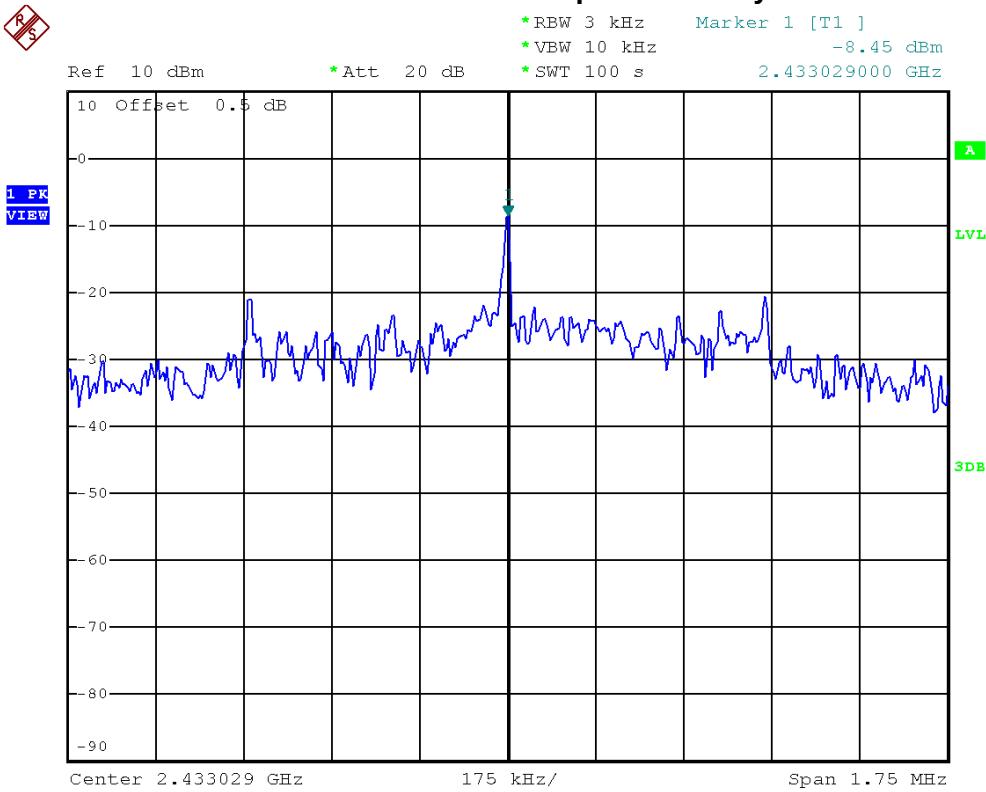

2466.816 MHz/Power Sepctral Density

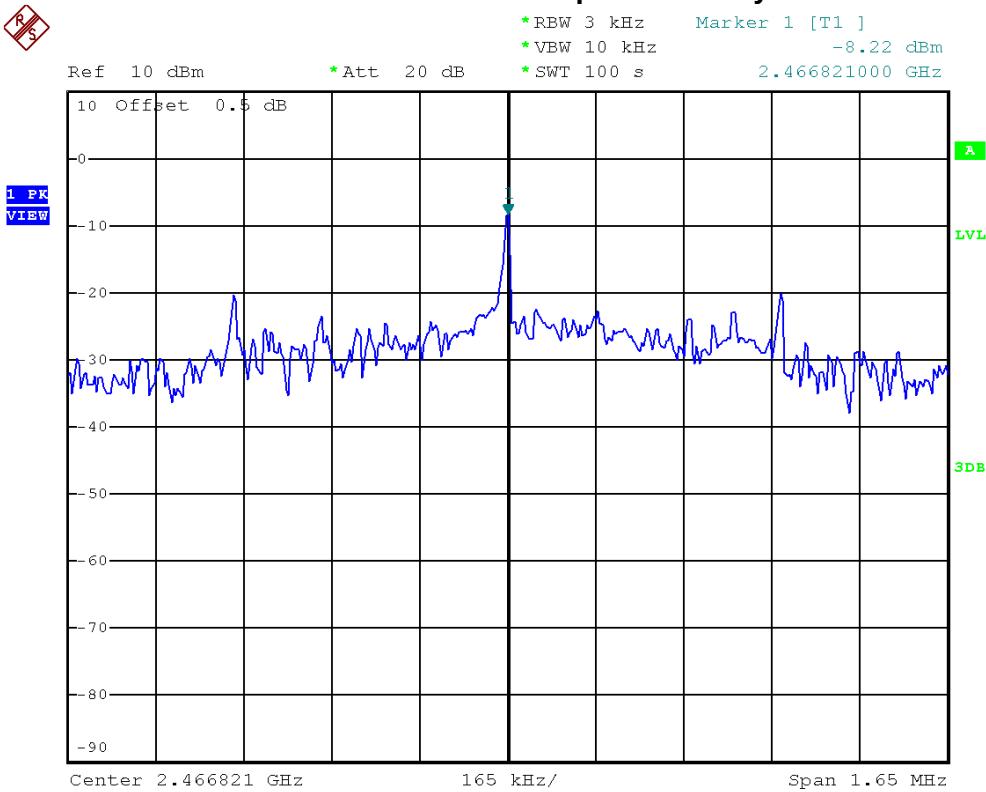



11 RF EXPOSURE COMPLIANCE

11.1 LIMIT

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

NOTE: f = frequency in MHz ; *Plane-wave equivalent power density.

11.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2495A	1128008	Feb,26,2014
2	Power Meter Sensor	Anritsu	MA2411B	1126001	Feb,26,2014

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

11.3 MPE CALCULATION METHOD

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

$$\text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained



11.4 TEST SETUP LAYOUT



11.5 DEVIATION FROM TEST STANDARD

No deviation

11.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.



11.7 TEST RESULTS

E.U.T	Home Theatre System	Model Name	JS6303WA (Part No.: JS6303WA Subwoofer)
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz		
Test Mode	2405.376 MHz, 2433.024 MHz, 2466.816 MHz		

Frequency	Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Result
2405.376 MHz	2.32	1.7061	15.1200	32.5087	0.011040	1	PASS
2433.024 MHz	2.32	1.7061	14.4300	27.7332	0.009418	1	PASS
2466.816 MHz	2.32	1.7061	14.3200	27.0396	0.009182	1	PASS