

Tehama Wireless

TEST REPORT FOR

**900 MHz transceiver
Model: MDT TW113**

Tested to The Following Standards:

FCC Part 15 Subpart C Section(s)

**15.247
(FHSS 902-928 MHz)**

Report No.: 102436-7

Date of issue: June 10, 2019



Test Certificate # 803.01

This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

TABLE OF CONTENTS

Administrative Information	3
Test Report Information	3
Report Authorization	3
Test Facility Information	4
Software Versions.....	4
Site Registration & Accreditation Information	4
Summary of Results	5
Modifications During Testing.....	5
Conditions During Testing.....	5
Equipment Under Test.....	6
General Product Information.....	6
FCC Part 15 Subpart C	7
15.247(a) Transmitter Characteristics	7
15.247(a)(1) 20 dB Bandwidth.....	7
15.247(a)(1) Carrier Separation.....	12
15.247(a)(1)(iii) Number of Hopping Channels.....	14
15.247(a)(1)(iii) Time of Occupancy	18
15.247(b)(1) Output Power	22
15.247(d) RF Conducted Emissions & Band Edge	28
15.247(d) Radiated Emissions & Band Edge	51
Supplemental Information.....	94
Measurement Uncertainty	94
Emissions Test Details.....	94

ADMINISTRATIVE INFORMATION

Test Report Information

REPORT PREPARED FOR:

Tehama Wireless
2607 7th St, Suite G
Berkeley, CA 94710

Representative: Laurence Plouvier
Customer Reference Number: 2238

REPORT PREPARED BY:

Morgan Tramontin
CKC Laboratories, Inc.
5046 Sierra Pines Drive
Mariposa, CA 95338

Project Number: 102436

DATE OF EQUIPMENT RECEIPT:

May 16, 2019

DATE(S) OF TESTING:

May 16 - 21, 2019

Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the equipment provided by the client, tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.



Steve Behm
Director of Quality Assurance & Engineering Services
CKC Laboratories, Inc.

Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable and affordable test results.

TEST LOCATION(S):
CKC Laboratories, Inc.
1120 Fulton Place
Fremont, CA 94539

Software Versions

CKC Laboratories Proprietary Software	Version
EMITest Emissions	5.03.12

Site Registration & Accreditation Information

Location	*NIST CB #	FCC	Japan
Canyon Park, Bothell, WA	US0081	US1022	A-0136
Brea, CA	US0060	US1025	A-0136
Fremont, CA	US0082	US1023	A-0136
Mariposa, CA	US0103	US1024	A-0136

*CKC's list of NIST designated countries can be found at: <https://standards.gov/cabs/designations.html>

SUMMARY OF RESULTS

Standard / Specification: FCC Part 15 Subpart C - 15.247 (FHSS 902-928MHz)

Test Procedure	Description	Modifications	Results
15.247(a)(1)(i)	Occupied Bandwidth	NA	Pass
15.247(a)(1)	Carrier Separation	NA	Pass
15.247(a)(1)(i)	Number of Hopping Channels	NA	Pass
15.247(a)(1)(i)	Average Time of Occupancy	NA	Pass
15.247(b)(2)	Output Power	NA	Pass
15.247(d)	RF Conducted Emissions & Band Edge	NA	Pass
15.247(d)	Radiated Emissions & Band Edge	NA	Pass
15.207	AC Conducted Emissions	NA	NA1

NA = Not Applicable

NA1 = Not applicable because the EUT is operated by an internal battery.

ISO/IEC 17025 Decision Rule

The declaration of pass or fail herein is based upon assessment to the specification(s) listed above, including where applicable, assessment of measurement uncertainties. For performance related tests, equipment was monitored for specified criteria identified in that section of testing.

Modifications During Testing

This list is a summary of the modifications made to the equipment during testing.

Summary of Conditions

No modifications were made during testing.

Modifications listed above must be incorporated into all production units.

Conditions During Testing

This list is a summary of the conditions noted to the equipment during testing.

Summary of Conditions

The EUT is wired to present the worst case wiring configuration during testing.

EQUIPMENT UNDER TEST (EUT)

During testing, numerous configurations may have been utilized. The configurations listed below support compliance to the standard(s) listed in the Summary of Results section.

Configuration 1

Equipment Tested:

Device	Manufacturer	Model #	S/N
900 MHz transceiver	Tehama Wireless	MDT TW113	1

Support Equipment:

Device	Manufacturer	Model #	S/N
AC/DC Adapter for Laptop	HP	PA-1121-12HN	PPP017L
Laptop	HP	EliteBook 8470p	N9193475

Configuration 2

Equipment Tested:

Device	Manufacturer	Model #	S/N
900 MHz transceiver	Tehama Wireless	MDT TW113	2

Support Equipment:

Device	Manufacturer	Model #	S/N
AC/DC Adapter for Laptop	HP	PA-1121-12HN	PPP017L
Laptop	HP	EliteBook 8470p	N9193475

General Product Information:

Product Information	Manufacturer-Provided Details
Equipment Type:	Stand-Alone Equipment
Type of Wideband System:	FHSS
Operating Frequency Range:	906-924MHz
Number of Hopping Channels:	60
Modulation Type(s):	FSK and Lora
Maximum Duty Cycle:	100%
Number of TX Chains:	1
Antenna Type(s) and Gain:	2dBi
Beamforming Type:	NA
Antenna Connection Type:	Integral
Nominal Input Voltage:	3.6VDC
Software used for Test:	Super Term V2.21

FCC Part 15 Subpart C

15.247(a) Transmitter Characteristics

Test Setup/Conditions

Test Location:	Fremont Lab C3	Test Engineer:	Hieu Song Nguyenpham
Test Method:	ANSI C63.10 (2013)	Test Date(s):	5/16/2019
Configuration:	2		
Test Setup:	The EUT is placed on non-conductive table. It is operated and set as intended.		

Environmental Conditions

Temperature (°C)	22.7	Relative Humidity (%):	47
------------------	------	------------------------	----

Test Equipment

Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
P07192	Cable	Astro	32022-29094K-29094K-48TC	10/9/2017	10/9/2019
P05411	Attenuator	Weinschel	54A-10	1/19/2018	1/19/2020
02660	Spectrum Analyzer	Agilent	E4446A	10/19/2018	10/19/2020

15.247(a)(1) 20 dB Bandwidth

Test Data Summary


Frequency (MHz)	Antenna Port	Modulation	Measured (kHz)	Limit (kHz)	Results
906	1	FSK	154.127	≤500	Pass
915.049	1	FSK	154.198		
924	1	FSK	154.191		

Test Data Summary


Frequency (MHz)	Antenna Port	Modulation	Measured (kHz)	Limit (kHz)	Results
906	1	Lora	140.513	≤500	Pass
915.049	1	Lora	139.755		
924	1	Lora	145.197		

Plot(s)


FSK

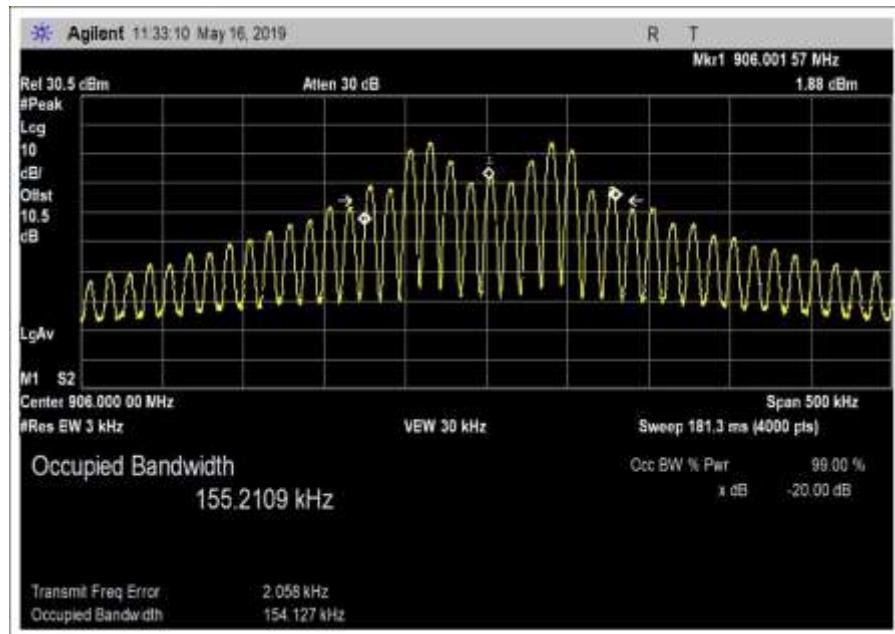

Low Channel

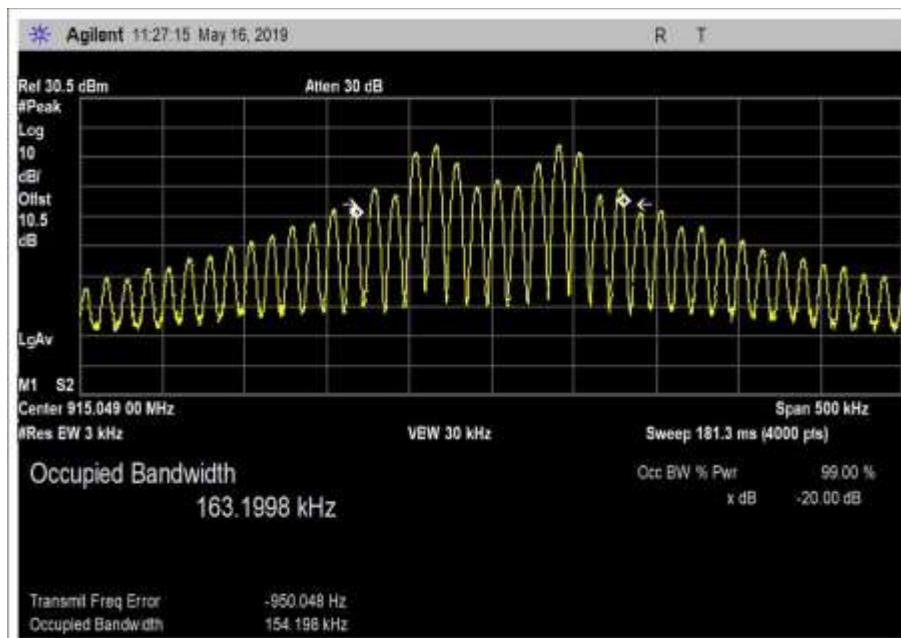


Middle Channel

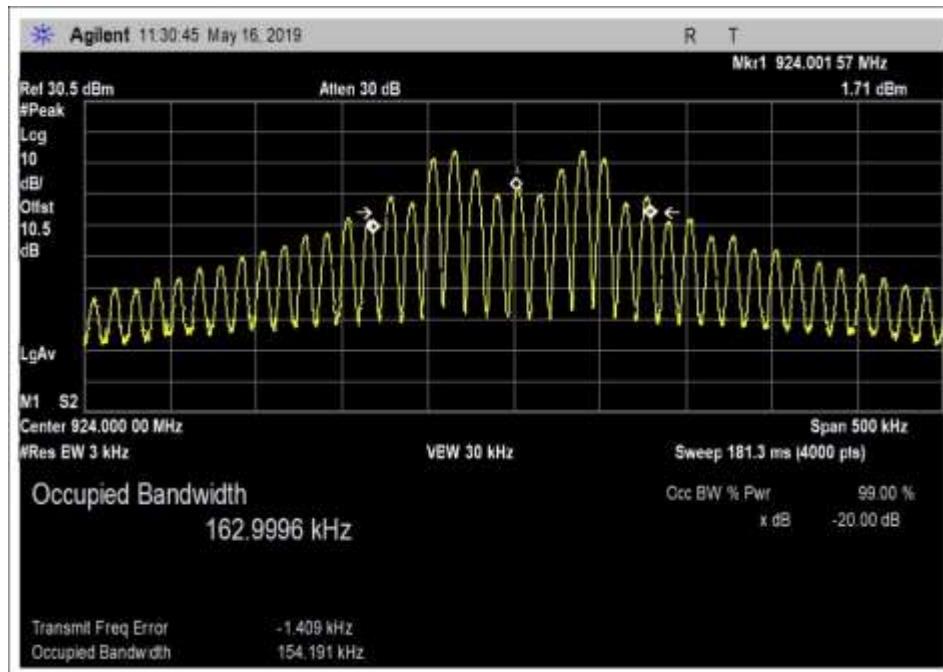


High Channel


Lora

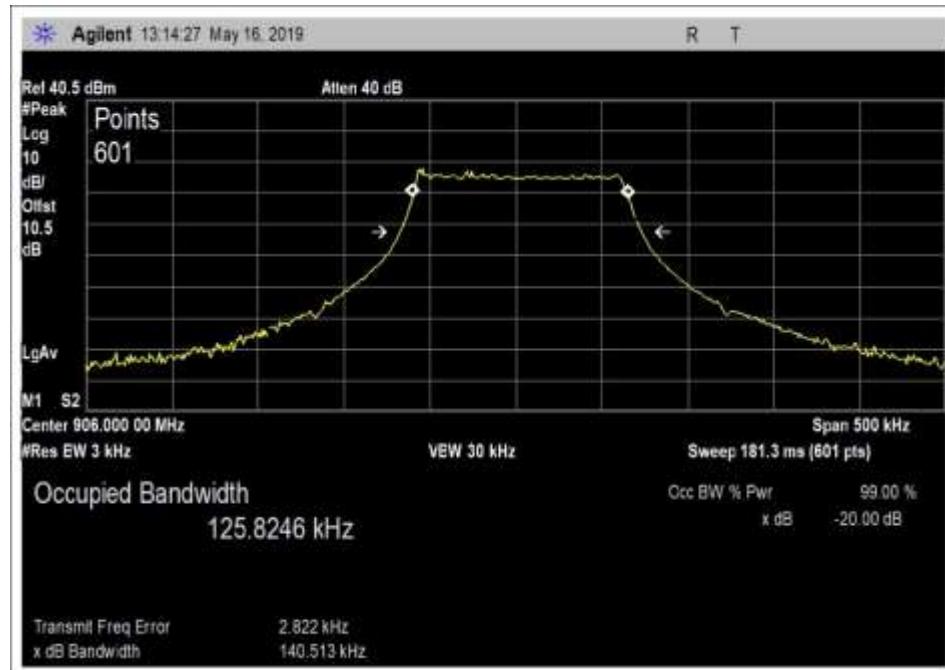

Low Channel

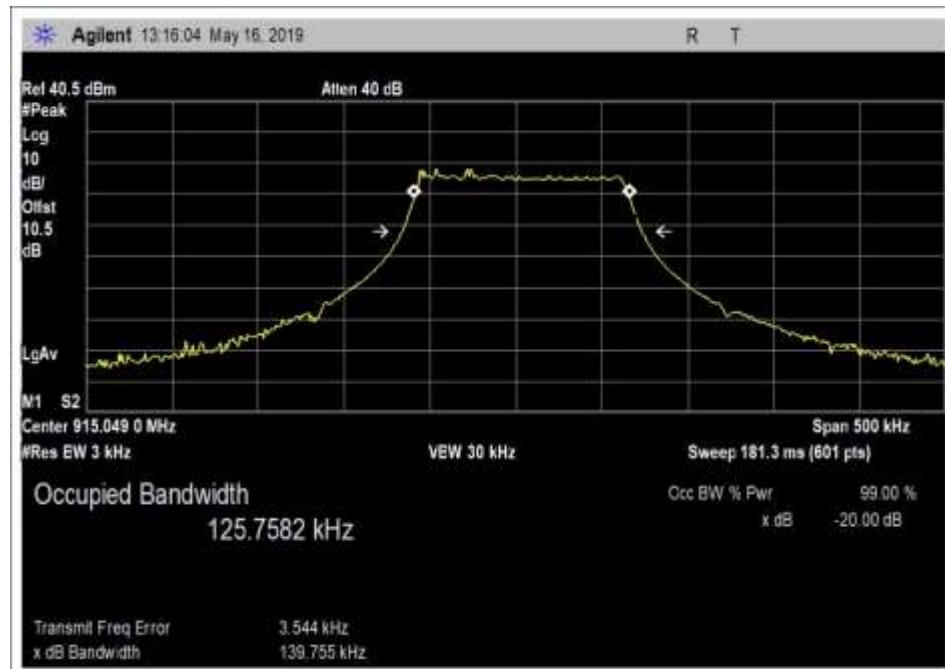

Middle Channel

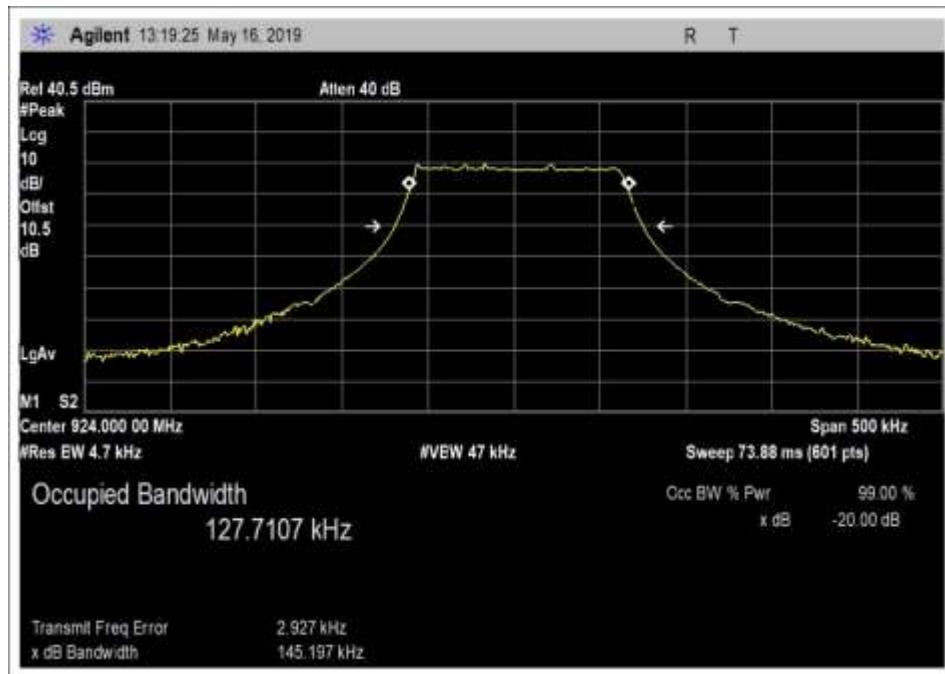


15.247(a)(1) Carrier Separation

Test Data Summary


Limit applied: 20dB bandwidth of the hopping channel.

Antenna Port	Operational Mode	Measured (kHz)	Limit (kHz)	Results
1	Hopping/ FSK	276.6	>154.198	Pass
1	Hopping/Lora	275.1	>145.197	Pass

Plot(s)

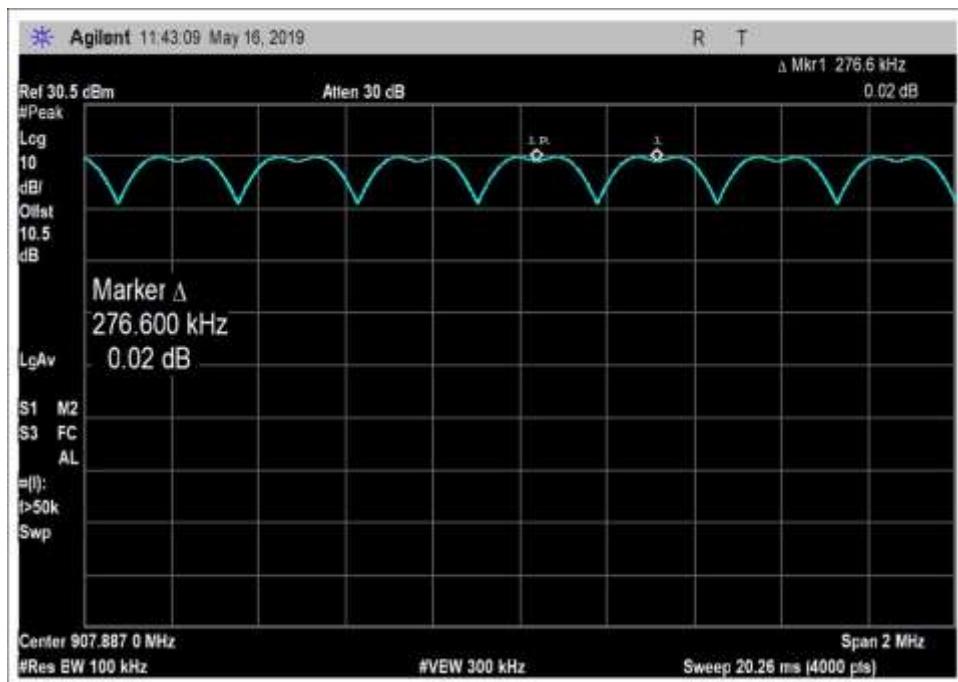

FSK

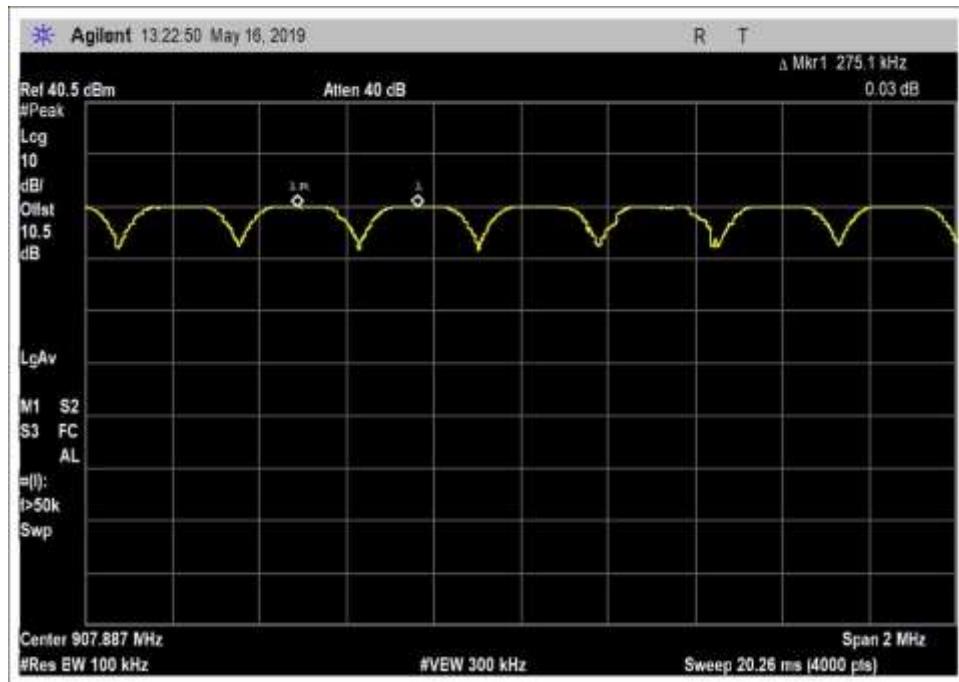


Lora

15.247(a)(1)(iii) Number of Hopping Channels


Test Data Summary				
$Limit = \begin{cases} 50 \text{ Channels} & 20 \text{ dB BW} < 250 \text{ kHz} \\ 25 \text{ Channels} & 20 \text{ dB BW} \geq 250 \text{ kHz} \end{cases}$				
Antenna Port	Operational Mode	Measured (Channels)	Limit (Channels)	Results
1	Hopping/FSK	60	≥50	Pass
1	Hopping/Lora	60	≥50	Pass

Plot(s)


FSK

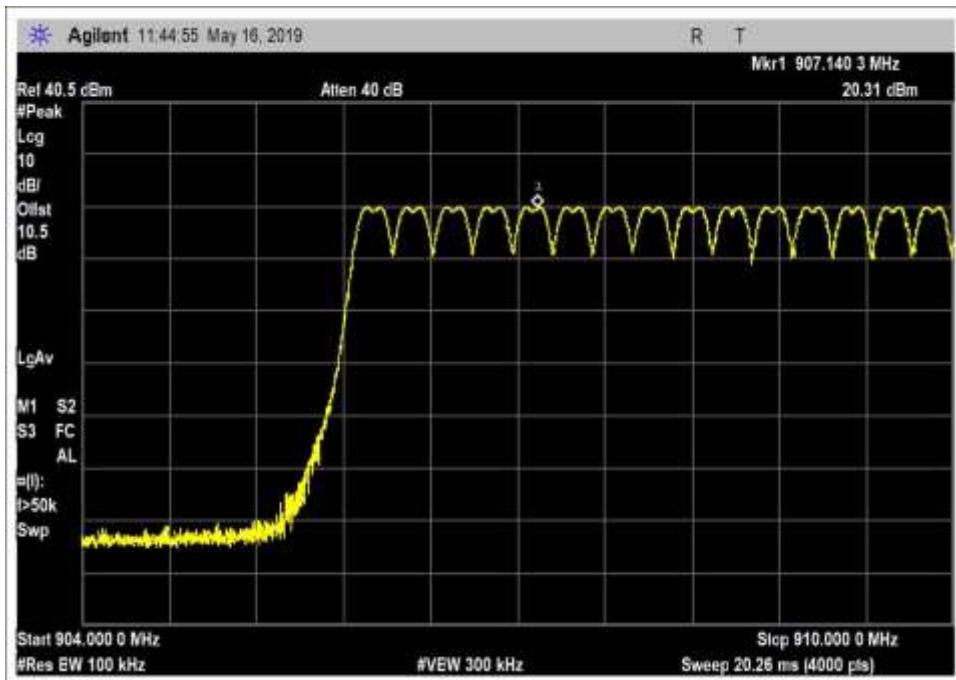

Number of Channels 1

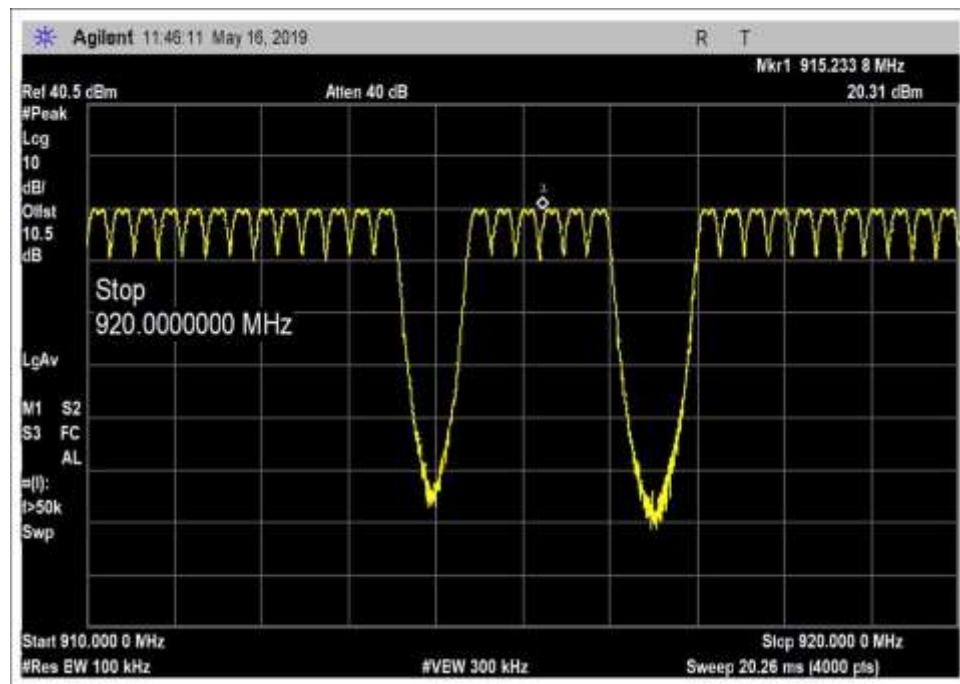


Number of Channels 2

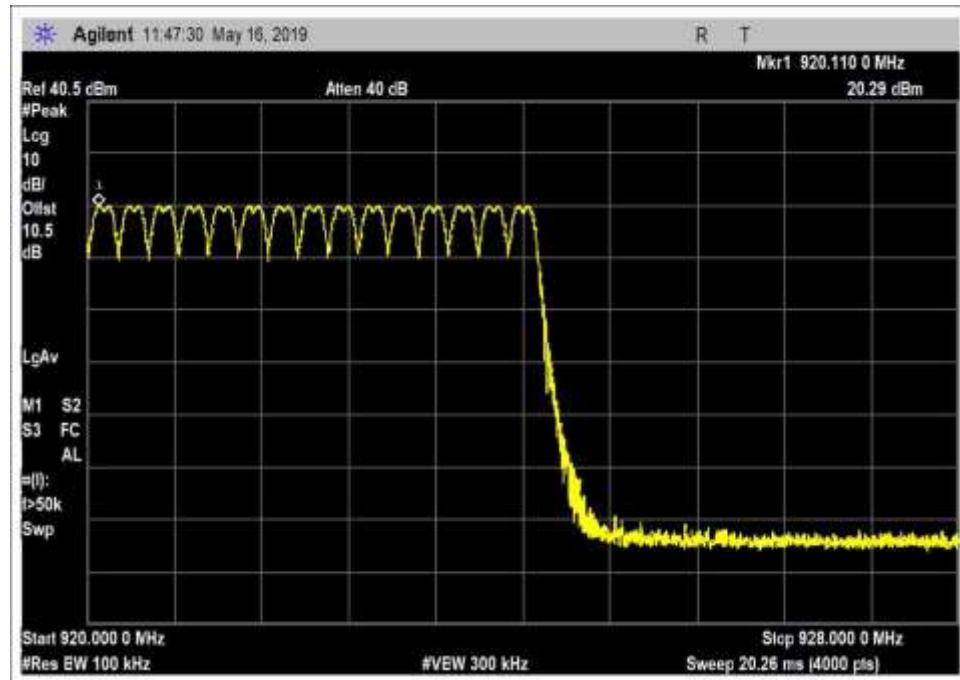


Number of Channels 3


Lora

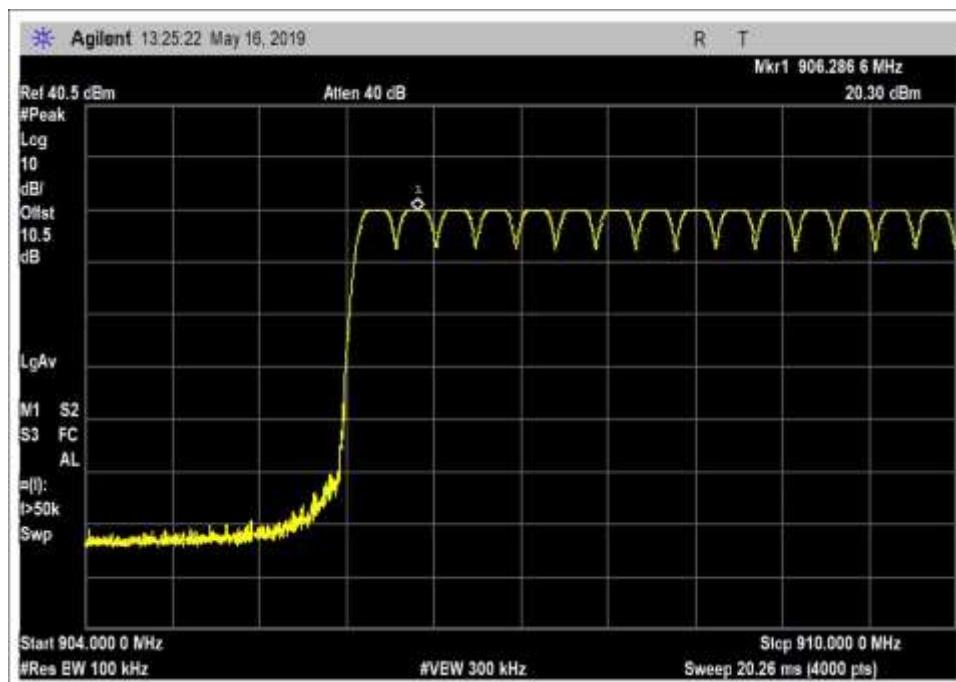

Number of Channels 1

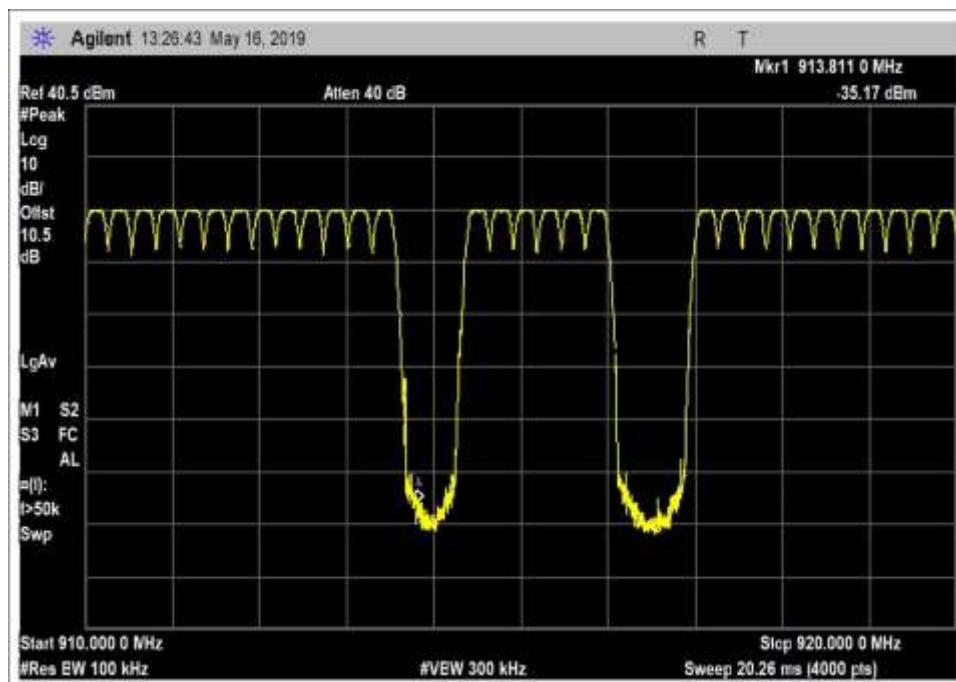

Number of Channels 2

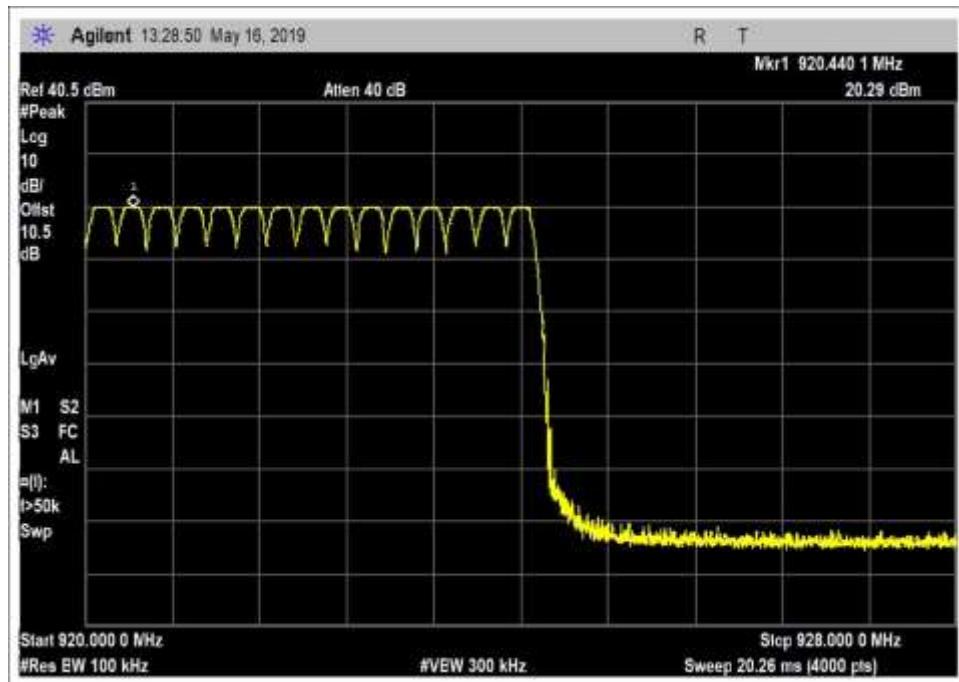

Number of Channels 3

15.247(a)(1)(iii) Time of Occupancy

Test Data Summary				
Observation Period, P _{obs} is derived from the following:				
Antenna Port	Operational Mode	Measured (ms)	Limit (ms/P _{obs})	Results
1	Hopping/FSK	11.0043	≤400	Pass
1	Hopping/Lora	112.056	≤400	Pass

Measured results are calculated as follows:

$$Dwell\ time = \left(\sum_{Bursts} RF\ Burst\ On\ Time + \sum_{Control} Control\ Signal\ On\ time \right) \Big|_{P_{obs}}$$

Actual Calculated Values: **FSK Modulation**


Parameter	Value
Observation Period (P _{obs}):	20s
Number of RF Bursts / P _{obs} :	1
On time of RF Burst:	11.0043ms
Number of Control or other signals / P _{obs} :	0
On time of Control or other Signals:	0
Total Measured On Time:	11.0043ms

Actual Calculated Values: **Lora Modulation**


Parameter	Value
Observation Period (P _{obs}):	20s
Number of RF Bursts / P _{obs} :	1
On time of RF Burst:	112.056ms
Number of Control or other signals / P _{obs} :	0
On time of Control or other Signals:	0
Total Measured On Time:	112.056ms

Plot(s)


FSK

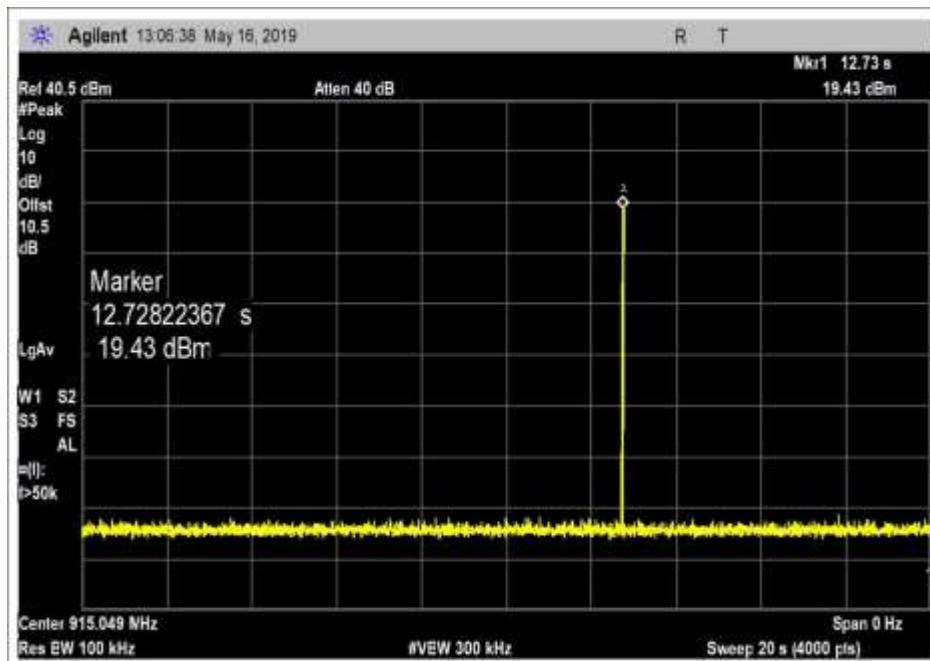


Average Occupancy

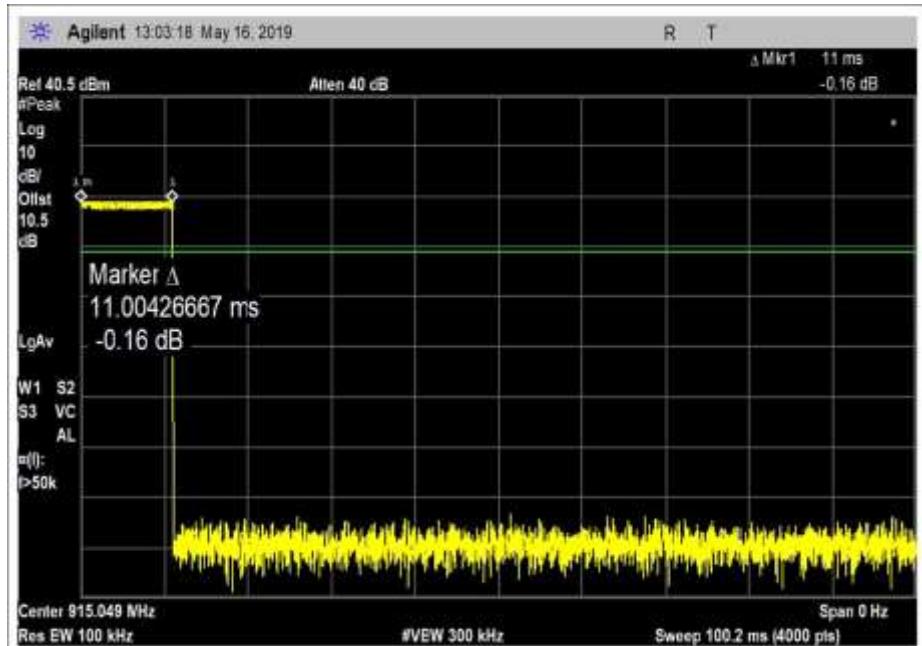

Dwell Time

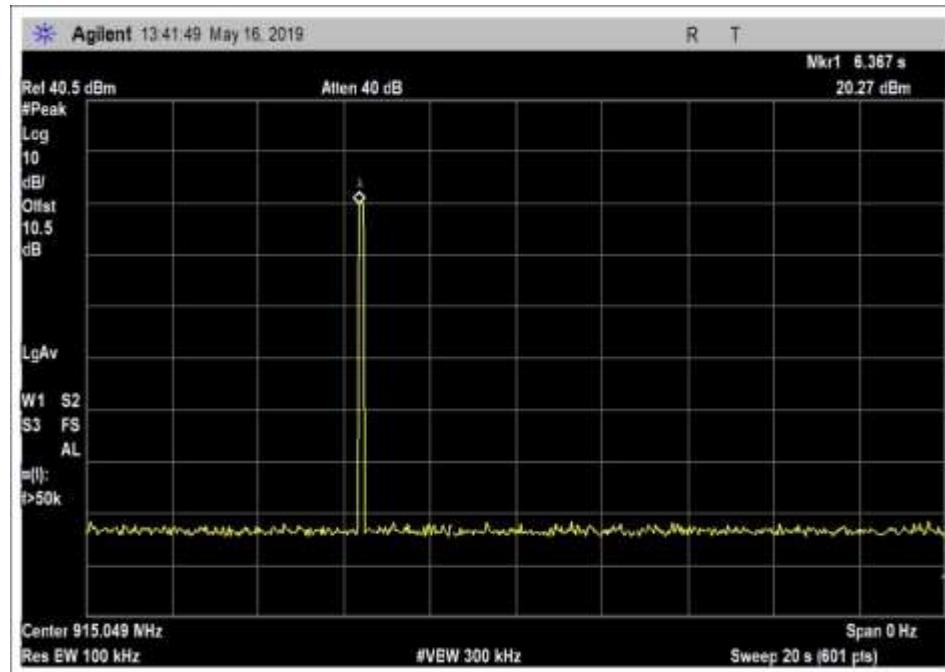Lora


Average Occupancy

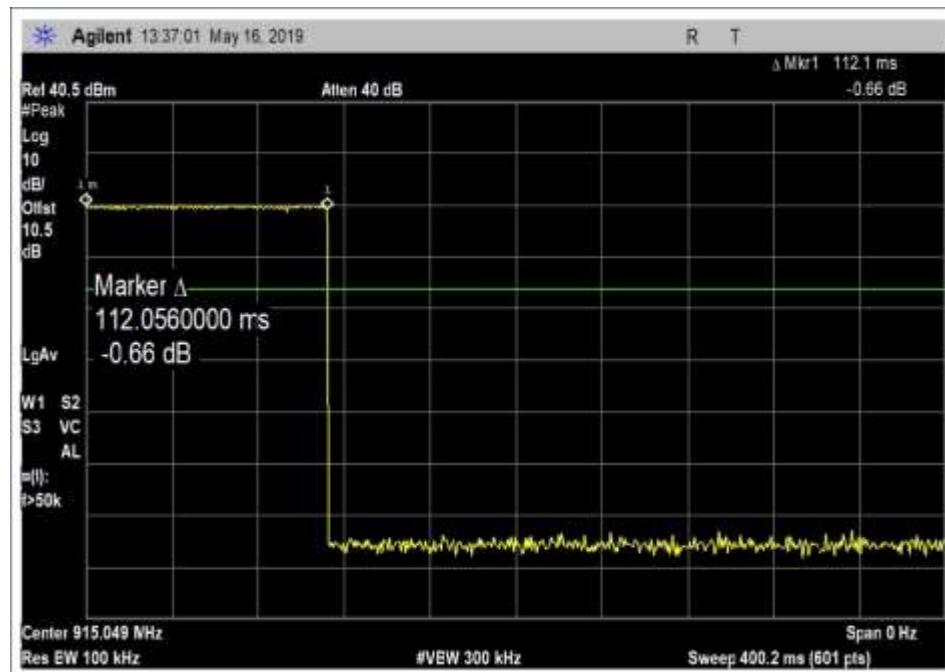

Dwell Time

Test Setup Photo(s)



15.247(b)(1) Output Power

Test Setup/Conditions			
Test Location:	Fremont Lab C3	Test Engineer:	Hieu Song Nguyenpham
Test Method:	ANSI C63.10 (2013)	Test Date(s):	5/16/2019
Configuration:	2		
Test Setup:	The EUT is placed on non-conductive table. It is operated and set as intended.		

Environmental Conditions			
Temperature (°C)	22.7	Relative Humidity (%):	47

Test Equipment					
Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
P07192	Cable	Astro	32022-29094K-29094K-48TC	10/9/2017	10/9/2019
P05411	Attenuator	Weinschel	54A-10	1/19/2018	1/19/2020
02660	Spectrum Analyzer	Agilent	E4446A	10/19/2018	10/19/2020


Test Data Summary - Voltage Variations

This equipment is battery powered. Power output tests were performed using a fresh battery.


Test Data Summary - RF Conducted Measurement					
Frequency (MHz)	Modulation	Ant. Type / Gain (dBi)	Measured (dBm)	Limit (dBm)	Results
906	FSK	Integral/2	20.23	≤30	Pass
915.049	FSK	Integral/2	20.21	≤30	Pass
924	FSK	Integral/2	20.17	≤30	Pass
906	Lora	Integral/2	20.26	≤30	Pass
915.046	Lora	Integral/2	20.27	≤30	Pass
924	Lora	Integral/2	20.25	≤30	Pass

Plots


FSK

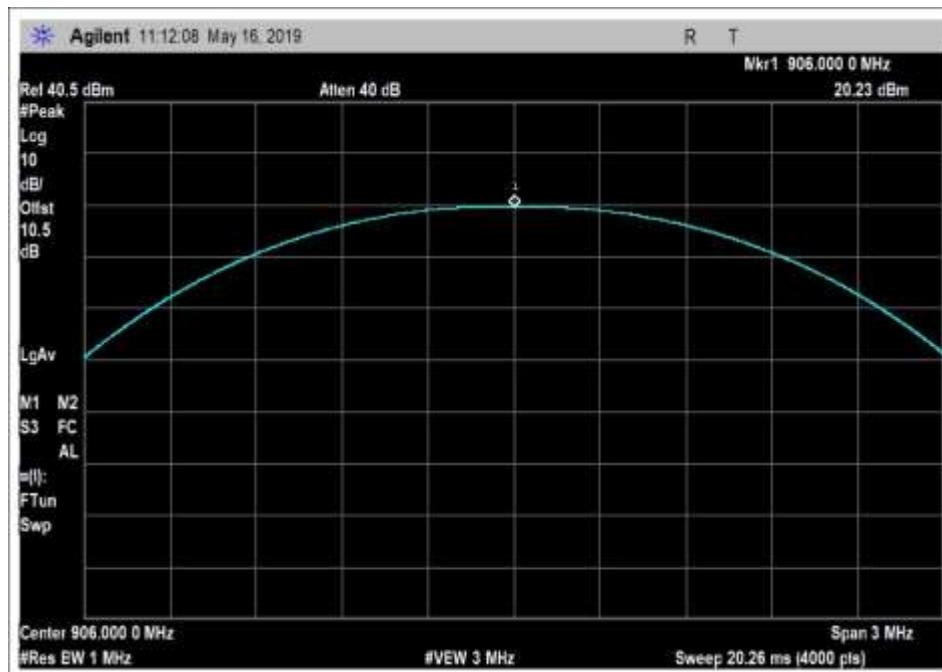

Low Channel

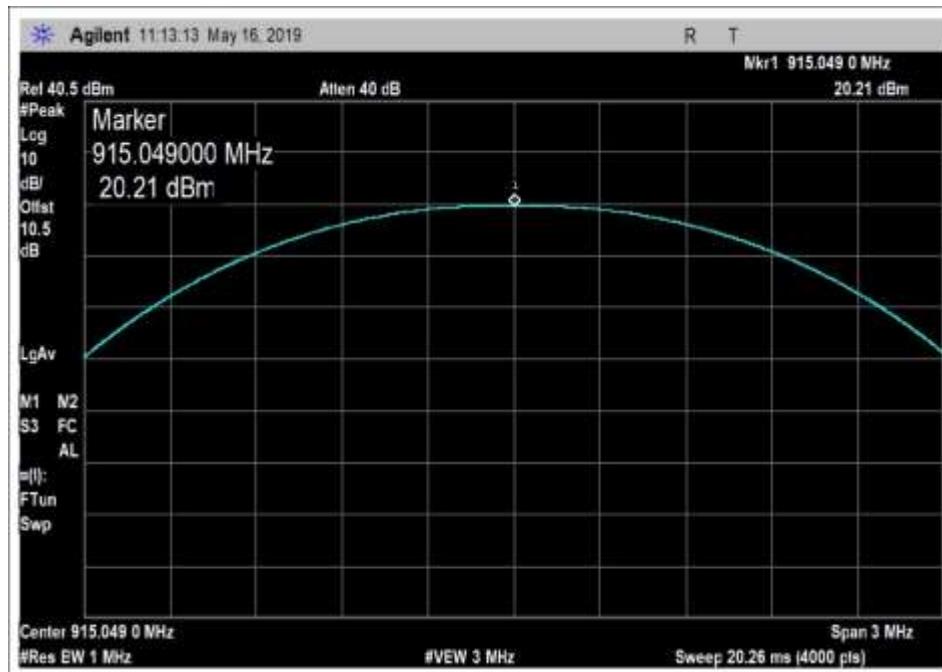


Middle Channel

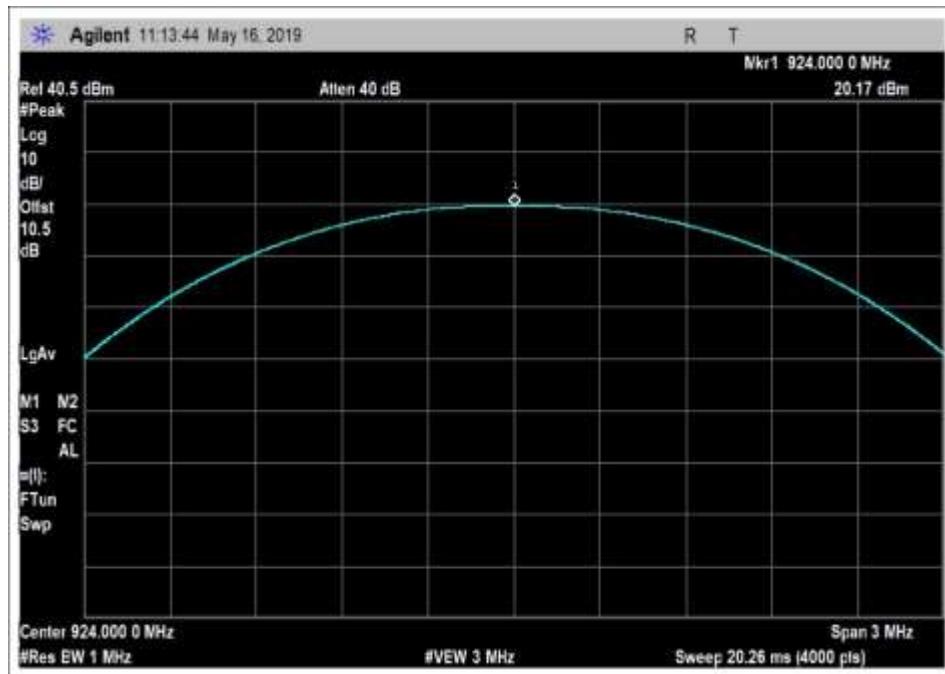


High Channel


Lora

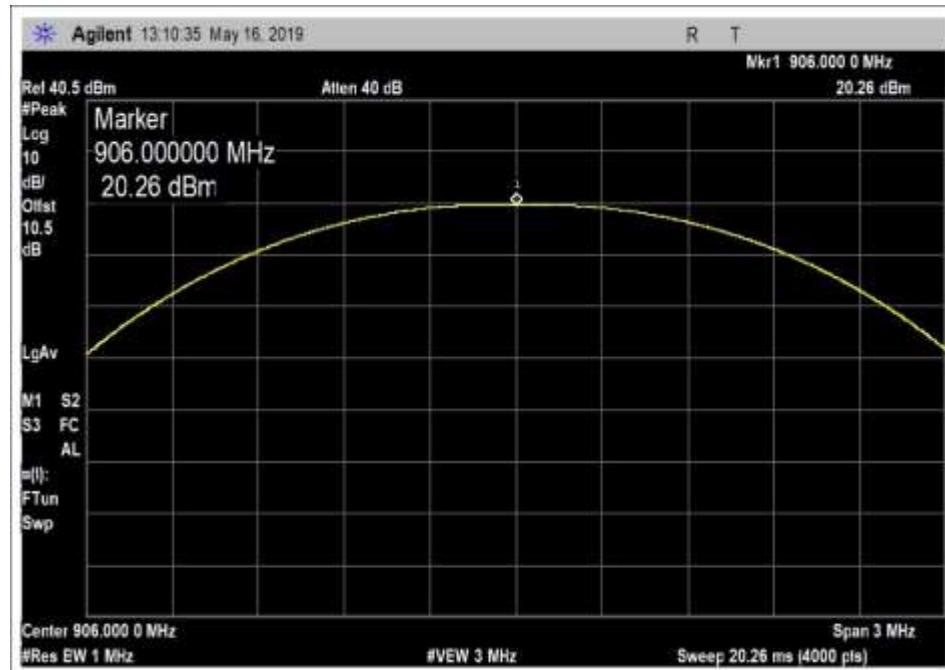

Low Channel

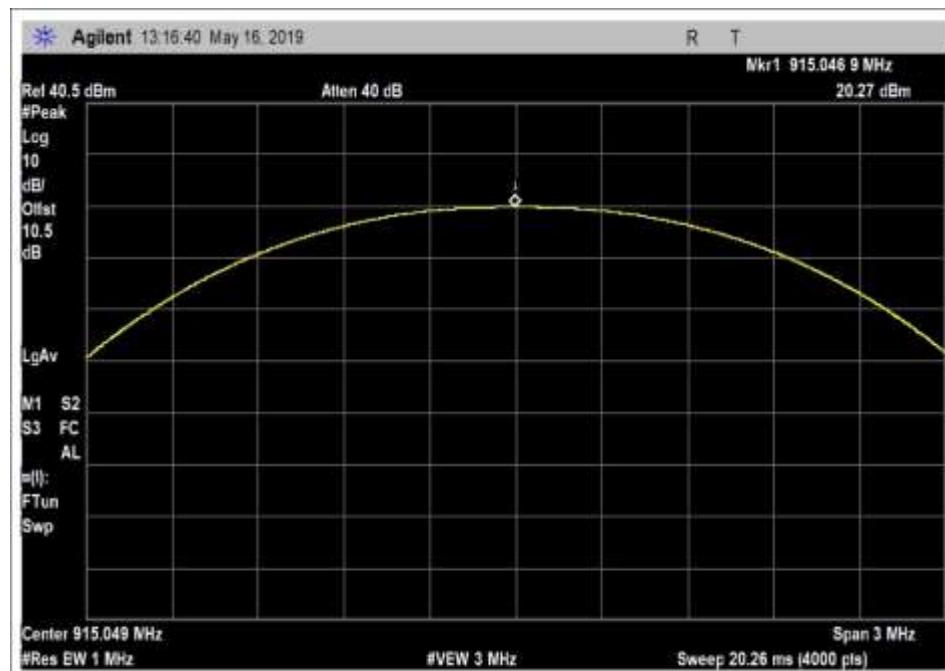

Middle Channel

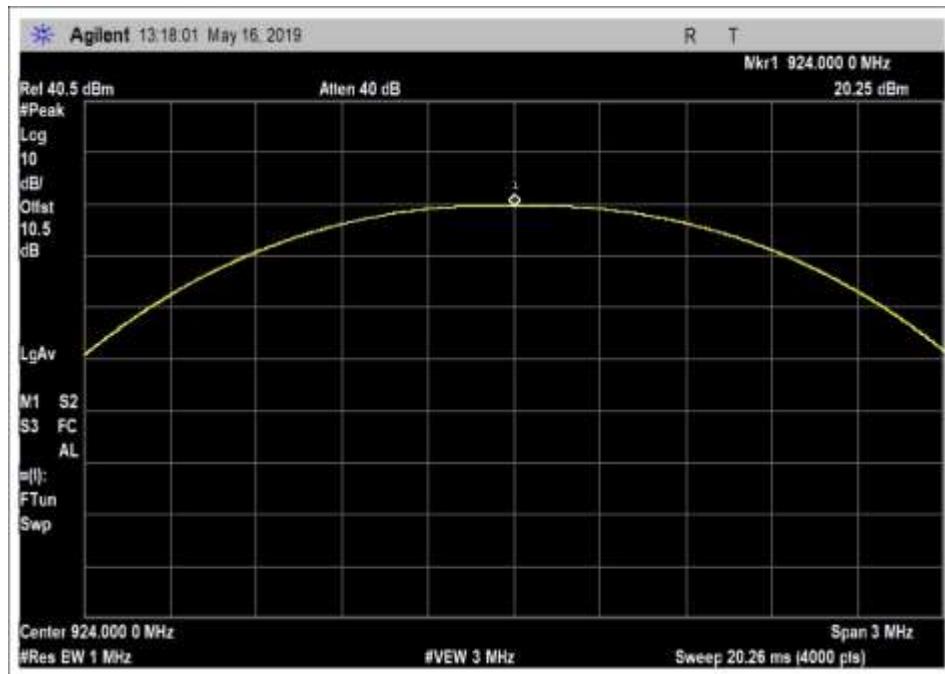

High Channel

Test Setup Photo(s)



15.247(d) RF Conducted Emissions & Band Edge

Test Setup / Conditions / Data

Test Location: CKC Laboratories Inc. • 1120 Fulton Place • Fremont, CA 94539 • 510 249-1170
 Customer: Tehama Wireless
 Specification: 15.247(d) Conducted Spurious Emissions
 Work Order #: 102436 Date: 5/16/2019
 Test Type: Conducted Spurious Emission Time: 3:14:08 PM
 Tested By: Hieu Song Nguyenpham Sequence#: 1
 Software: EMITest 5.03.12

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 2			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 2			

Test Conditions / Notes:

Conducted Emission
 Frequency Range: 9kHz to 10000MHz


Application: Super Term V2.21
 Temperature: 22.7°C
 Humidity: 47 %
 Atmospheric Pressure: 101.0kPa
 Highest Generation Frequency: 924MHz
 Method: ANSI C 63.10 2013
 Antenna Gain: 2dBi

RBW=100kHz
 VBW=300kHz

The EUT is placed on a non-conductive table and set continuously transmitting as intended.

FHSS FSK
 Low Channel

Tehama Wireless WO#: 102436 Sequence#: 1 Date: 5/16/2019
15.247(d) Conducted Spurious Emissions Test Distance: None None

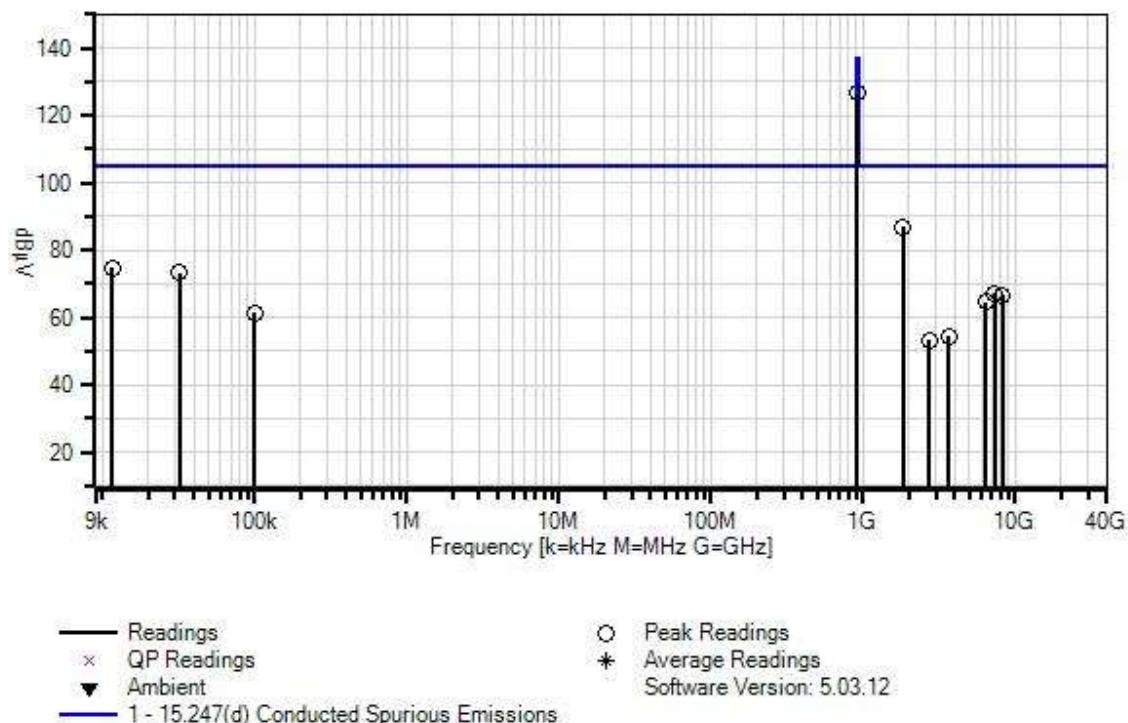

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP05411	Attenuator	54A-10	1/19/2018	1/19/2020
T2	ANP07192	Cable	32022-29094K-29094K-48TC	10/9/2017	10/9/2019
	AN02660	Spectrum Analyzer	E4446A	10/19/2018	10/19/2020

Measurement Data:

Reading listed by margin.

Test Distance: None

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	dB	Dist Table	Corr dB μ V	Spec dB μ V	Margin dB	Polar Ant
1	905.870M	116.8	+9.3	+0.5		+0.0	126.6	137.0	-10.4	None
2	1812.288M	77.0	+9.3	+0.7		+0.0	87.0	105.0	-18.0	None
3	11.577k	65.6	+9.2	+0.0		+0.0	74.8	105.0	-30.2	None
4	32.033k	64.0	+9.2	+0.0		+0.0	73.2	105.0	-31.8	None
5	7248.876M	56.2	+9.4	+1.5		+0.0	67.1	105.0	-37.9	None
6	8157.032M	55.6	+9.5	+1.5		+0.0	66.6	105.0	-38.4	None
7	6340.719M	54.0	+9.4	+1.3		+0.0	64.7	105.0	-40.3	None
8	100.864k	52.3	+9.2	+0.0		+0.0	61.5	105.0	-43.5	None
9	3622.736M	44.1	+9.3	+1.0		+0.0	54.4	105.0	-50.6	None
10	2718.970M	43.0	+9.3	+0.9		+0.0	53.2	105.0	-51.8	None



Test Location: CKC Laboratories Inc. • 1120 Fulton Place • Fremont, CA 94539 • 510 249-1170
Customer: **Tehama Wireless**
Specification: **15.247(d) Conducted Spurious Emissions**
Work Order #: **102436** Date: 5/16/2019
Test Type: **Conducted Spurious Emission** Time: 3:23:36 PM
Tested By: Hieu Song Nguyenpham Sequence#: 2
Software: EMITest 5.03.12

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 2			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 2			

Test Conditions / Notes:

Conducted Emission
Frequency Range: 9kHz to 10000MHz
Application: Super Term V2.21
Temperature: 22.7°C
Humidity: 47 %
Atmospheric Pressure: 101.0kPa
Highest Generation Frequency: 924MHz
Method: ANSI C 63.10 2013
Antenna Gain: 2dBi
RBW=100kHz
VBW=300kHz
The EUT is placed on a non-conductive table and set continuously transmitting as intended.
FHSS FSK
Middle Channel

Tehama Wireless WO#: 102436 Sequence#: 2 Date: 5/16/2019
15.247(d) Conducted Spurious Emissions Test Distance: None None

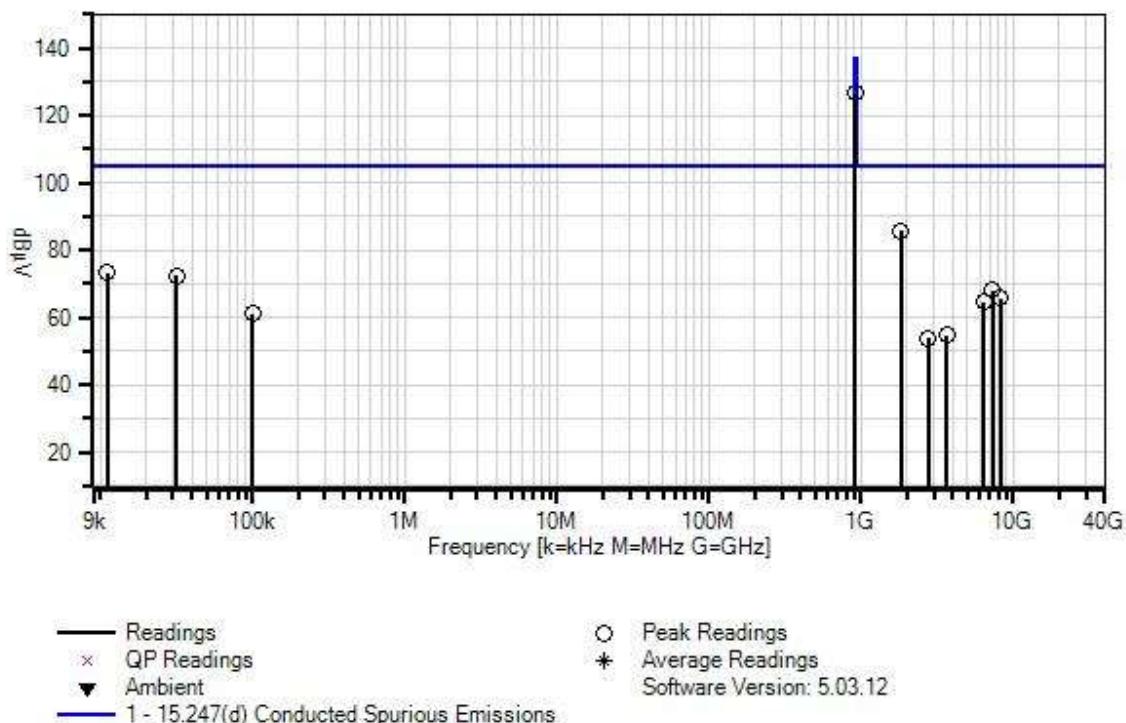

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP05411	Attenuator	54A-10	1/19/2018	1/19/2020
T2	ANP07192	Cable	32022-29094K-29094K-48TC	10/9/2017	10/9/2019
	AN02660	Spectrum Analyzer	E4446A	10/19/2018	10/19/2020

Measurement Data: Reading listed by margin.

Test Distance: None

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	dB	Dist Table	Corr dB μ V	Spec dB μ V	Margin dB	Polar Ant
1	914.952M	116.8	+9.3	+0.5		+0.0	126.6	137.0	-10.4	None
2	1830.749M	75.8	+9.3	+0.7		+0.0	85.8	105.0	-19.2	None
3	11.209k	64.0	+9.2	+0.0		+0.0	73.2	105.0	-31.8	None
4	31.623k	63.1	+9.2	+0.0		+0.0	72.3	105.0	-32.7	None
5	7320.231M	57.0	+9.4	+1.5		+0.0	67.9	105.0	-37.1	None
6	8234.874M	54.6	+9.5	+1.6		+0.0	65.7	105.0	-39.3	None
7	6405.587M	53.8	+9.4	+1.3		+0.0	64.5	105.0	-40.5	None
8	100.000k	51.9	+9.2	+0.0		+0.0	61.1	105.0	-43.9	None
9	3661.657M	44.5	+9.3	+1.0		+0.0	54.8	105.0	-50.2	None
10	2745.637M	43.7	+9.3	+0.9		+0.0	53.9	105.0	-51.1	None



Test Location: CKC Laboratories Inc. • 1120 Fulton Place • Fremont, CA 94539 • 510 249-1170
Customer: **Tehama Wireless**
Specification: **15.247(d) Conducted Spurious Emissions**
Work Order #: **102436** Date: 5/16/2019
Test Type: **Conducted Spurious Emission** Time: 3:29:49 PM
Tested By: Hieu Song Nguyenpham Sequence#: 3
Software: EMITest 5.03.12

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 2			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 2			

Test Conditions / Notes:

Conducted Emission
Frequency Range: 9kHz to 10000MHz
Application: Super Term V2.21
Temperature: 22.7°C
Humidity: 47 %
Atmospheric Pressure: 101.0kPa
Highest Generation Frequency: 924MHz
Method: ANSI C 63.10 2013
Antenna Gain: 2dBi
RBW=100kHz
VBW=300kHz
The EUT is placed on a non-conductive table and set continuously transmitting as intended.
FHSS FSK
High Channel

Tehama Wireless WO#: 102436 Sequence#: 3 Date: 5/16/2019
15.247(d) Conducted Spurious Emissions Test Distance: None None

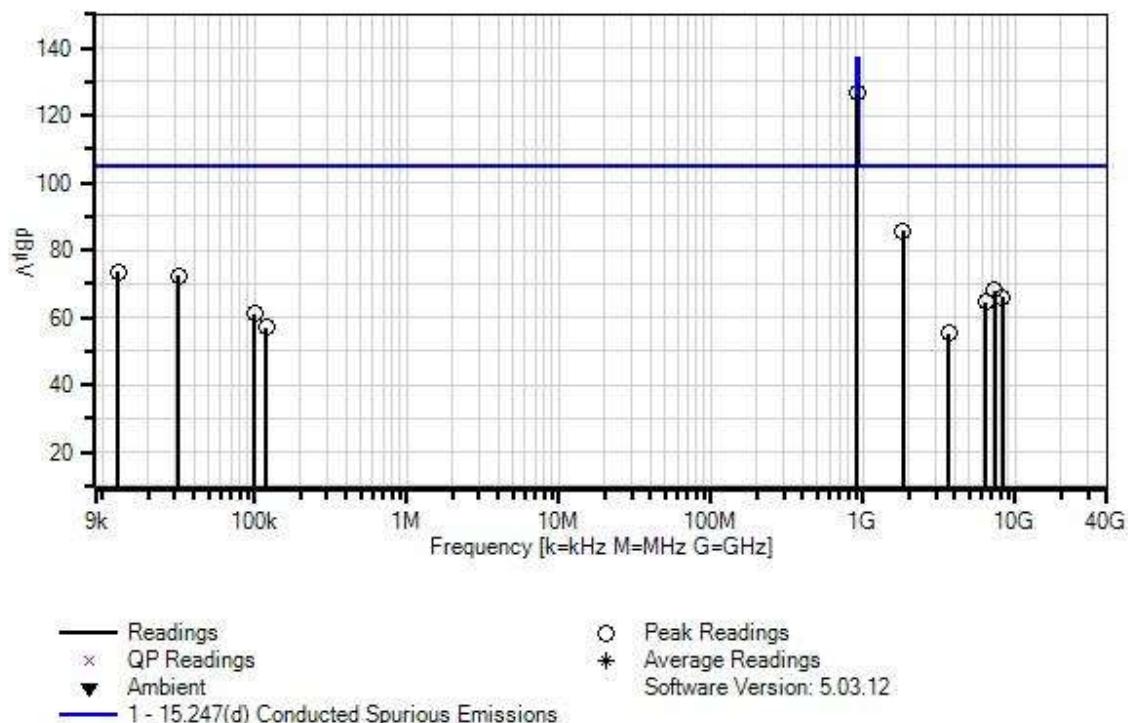

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP05411	Attenuator	54A-10	1/19/2018	1/19/2020
T2	ANP07192	Cable	32022-29094K-29094K-48TC	10/9/2017	10/9/2019
	AN02660	Spectrum Analyzer	E4446A	10/19/2018	10/19/2020

Measurement Data: Reading listed by margin.

Test Distance: None

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	dB	Dist Table	Corr dB μ V	Spec dB μ V	Margin dB	Polar Ant
1	914.952M	116.8	+9.3	+0.5		+0.0	126.6	137.0	-10.4	None
2	1830.749M	75.8	+9.3	+0.7		+0.0	85.8	105.0	-19.2	None
3	12.723k	64.4	+9.2	+0.0		+0.0	73.6	105.0	-31.4	None
4	31.623k	63.2	+9.2	+0.0		+0.0	72.4	105.0	-32.6	None
5	7320.231M	57.1	+9.4	+1.5		+0.0	68.0	105.0	-37.0	None
6	8234.874M	54.8	+9.5	+1.6		+0.0	65.9	105.0	-39.1	None
7	6405.587M	53.9	+9.4	+1.3		+0.0	64.6	105.0	-40.4	None
8	100.216k	51.9	+9.2	+0.0		+0.0	61.1	105.0	-43.9	None
9	120.325k	47.9	+9.2	+0.0		+0.0	57.1	105.0	-47.9	None
10	3661.657M	45.1	+9.3	+1.0		+0.0	55.4	105.0	-49.6	None



Test Location: CKC Laboratories Inc. • 1120 Fulton Place • Fremont, CA 94539 • 510 249-1170
Customer: **Tehama Wireless**
Specification: **15.247(d) Conducted Spurious Emissions**
Work Order #: **102436** Date: 5/16/2019
Test Type: **Conducted Spurious Emission** Time: 3:38:50 PM
Tested By: Hieu Song Nguyenpham Sequence#: 4
Software: EMITest 5.03.12

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 2			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 2			

Test Conditions / Notes:

Conducted Emission
Frequency Range: 9kHz to 10000MHz
Application: Super Term V2.21
Temperature: 22.7°C
Humidity: 47 %
Atmospheric Pressure: 101.0kPa
Highest Generation Frequency: 924MHz
Method: ANSI C 63.10 2013
Antenna Gain: 2dBi
RBW=100kHz
VBW=300kHz
The EUT is placed on a non-conductive table and set continuously transmitting as intended.
FHSS Lora
Low Channel

Tehama Wireless WO#: 102436 Sequence#: 4 Date: 5/16/2019
15.247(d) Conducted Spurious Emissions Test Distance: None None

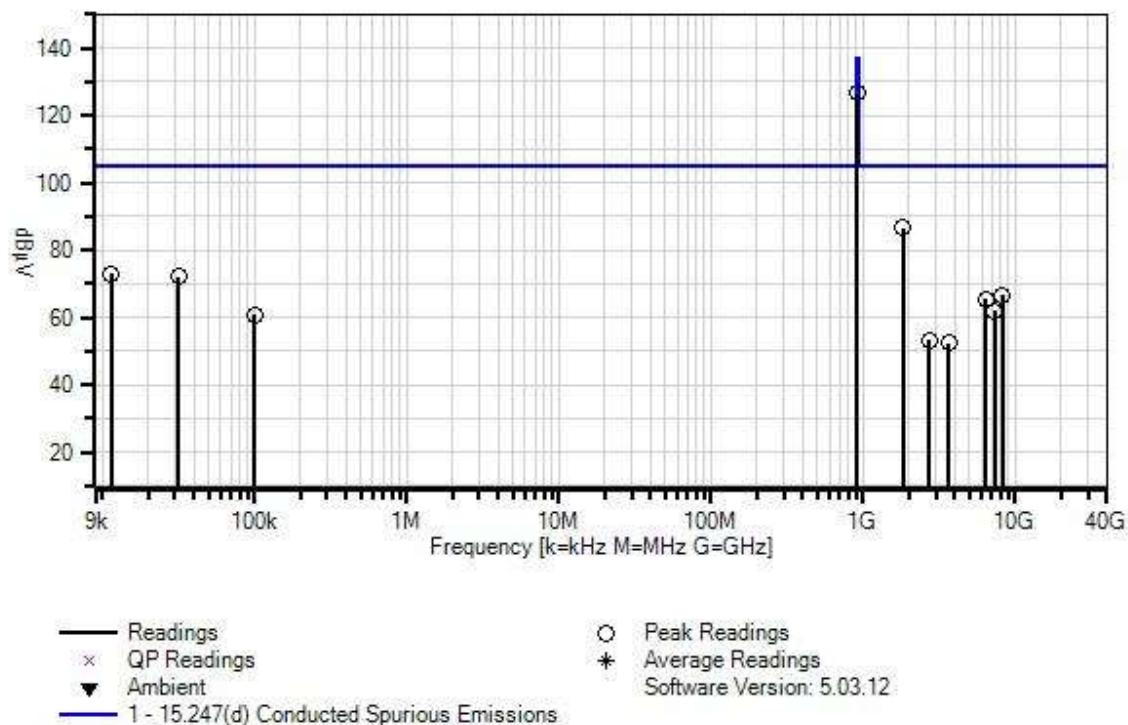

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP05411	Attenuator	54A-10	1/19/2018	1/19/2020
T2	ANP07192	Cable	32022-29094K-29094K-48TC	10/9/2017	10/9/2019
	AN02660	Spectrum Analyzer	E4446A	10/19/2018	10/19/2020

Measurement Data: Reading listed by margin.

Test Distance: None

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	dB	Dist Table	Corr dB μ V	Spec dB μ V	Margin dB	Polar Ant
1	905.870M	116.8	+9.3	+0.5		+0.0	126.6	137.0	-10.4	None
2	1812.288M	76.5	+9.3	+0.7		+0.0	86.5	105.0	-18.5	None
3	11.426k	63.9	+9.2	+0.0		+0.0	73.1	105.0	-31.9	None
4	31.691k	62.8	+9.2	+0.0		+0.0	72.0	105.0	-33.0	None
5	8150.545M	55.7	+9.5	+1.5		+0.0	66.7	105.0	-38.3	None
6	6340.719M	54.7	+9.4	+1.3		+0.0	65.4	105.0	-39.6	None
7	7248.876M	51.0	+9.4	+1.5		+0.0	61.9	105.0	-43.1	None
8	100.648k	51.5	+9.2	+0.0		+0.0	60.7	105.0	-44.3	None
9	2716.918M	42.9	+9.3	+0.9		+0.0	53.1	105.0	-51.9	None
10	3622.736M	42.2	+9.3	+1.0		+0.0	52.5	105.0	-52.5	None



Test Location: CKC Laboratories Inc. • 1120 Fulton Place • Fremont, CA 94539 • 510 249-1170
Customer: **Tehama Wireless**
Specification: **15.247(d) Conducted Spurious Emissions**
Work Order #: **102436** Date: 5/16/2019
Test Type: **Conducted Spurious Emission** Time: 3:45:40 PM
Tested By: Hieu Song Nguyenpham Sequence#: 5
Software: EMITest 5.03.12

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 2			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 2			

Test Conditions / Notes:

Conducted Emission Frequency Range: 9kHz to 10000MHz
Application: Super Term V2.21
Temperature: 22.7°C
Humidity: 47 %
Atmospheric Pressure: 101.0kPa
Highest Generation Frequency: 924MHz
Method: ANSI C 63.10 2013
Antenna Gain: 2dBi
RBW=100kHz
VBW=300kHz
The EUT is placed on a non-conductive table and set continuously transmitting as intended.
FHSS Lora Middle Channel

Tehama Wireless WO#: 102436 Sequence#: 5 Date: 5/16/2019
15.247(d) Conducted Spurious Emissions Test Distance: None None

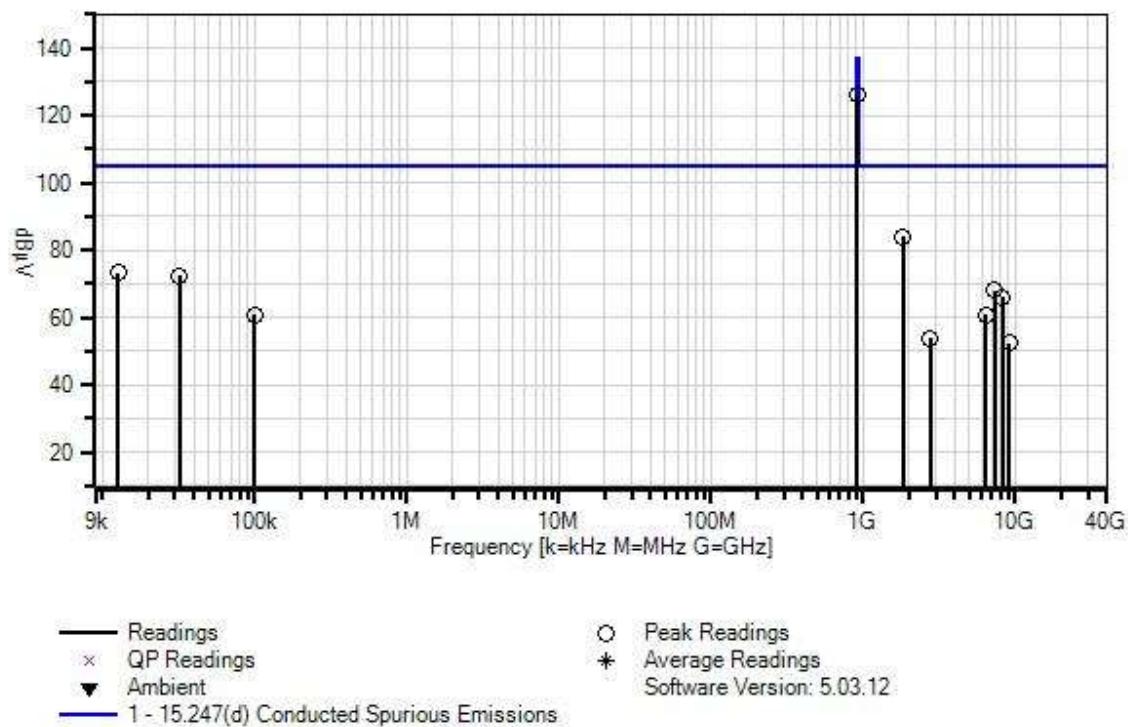

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP05411	Attenuator	54A-10	1/19/2018	1/19/2020
T2	ANP07192	Cable	32022-29094K-29094K-48TC	10/9/2017	10/9/2019
	AN02660	Spectrum Analyzer	E4446A	10/19/2018	10/19/2020

Measurement Data: Reading listed by margin.

Test Distance: None

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	dB	Dist Table	Corr dB μ V	Spec dB μ V	Margin dB	Polar Ant
1	914.952M	116.6	+9.3	+0.5		+0.0	126.4	137.0	-10.6	None
2	1830.749M	73.9	+9.3	+0.7		+0.0	83.9	105.0	-21.1	None
3	12.702k	64.2	+9.2	+0.0		+0.0	73.4	105.0	-31.6	None
4	32.033k	63.1	+9.2	+0.0		+0.0	72.3	105.0	-32.7	None
5	7320.231M	57.0	+9.4	+1.5		+0.0	67.9	105.0	-37.1	None
6	8234.874M	54.8	+9.5	+1.6		+0.0	65.9	105.0	-39.1	None
7	6405.587M	50.1	+9.4	+1.3		+0.0	60.8	105.0	-44.2	None
8	100.000k	51.5	+9.2	+0.0		+0.0	60.7	105.0	-44.3	None
9	2745.637M	43.5	+9.3	+0.9		+0.0	53.7	105.0	-51.3	None
10	9149.518M	41.3	+9.5	+1.6		+0.0	52.4	105.0	-52.6	None



Test Location: CKC Laboratories Inc. • 1120 Fulton Place • Fremont, CA 94539 • 510 249-1170
Customer: **Tehama Wireless**
Specification: **15.247(d) Conducted Spurious Emissions**
Work Order #: **102436** Date: 5/16/2019
Test Type: **Conducted Spurious Emission** Time: 3:51:17 PM
Tested By: Hieu Song Nguyenpham Sequence#: 6
Software: EMITest 5.03.12

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 2			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 2			

Test Conditions / Notes:

Conducted Emission Frequency Range: 9kHz to 10000MHz
Application: Super Term V2.21
Temperature: 22.7°C
Humidity: 47 %
Atmospheric Pressure: 101.0kPa
Highest Generation Frequency: 924MHz
Method: ANSI C 63.10 2013
Antenna Gain: 2dBi
RBW=100kHz
VBW=300kHz
The EUT is placed on a non-conductive table and set continuously transmitting as intended.
FHSS Lora High Channel

Tehama Wireless WO#: 102436 Sequence#: 6 Date: 5/16/2019
15.247(d) Conducted Spurious Emissions Test Distance: None None

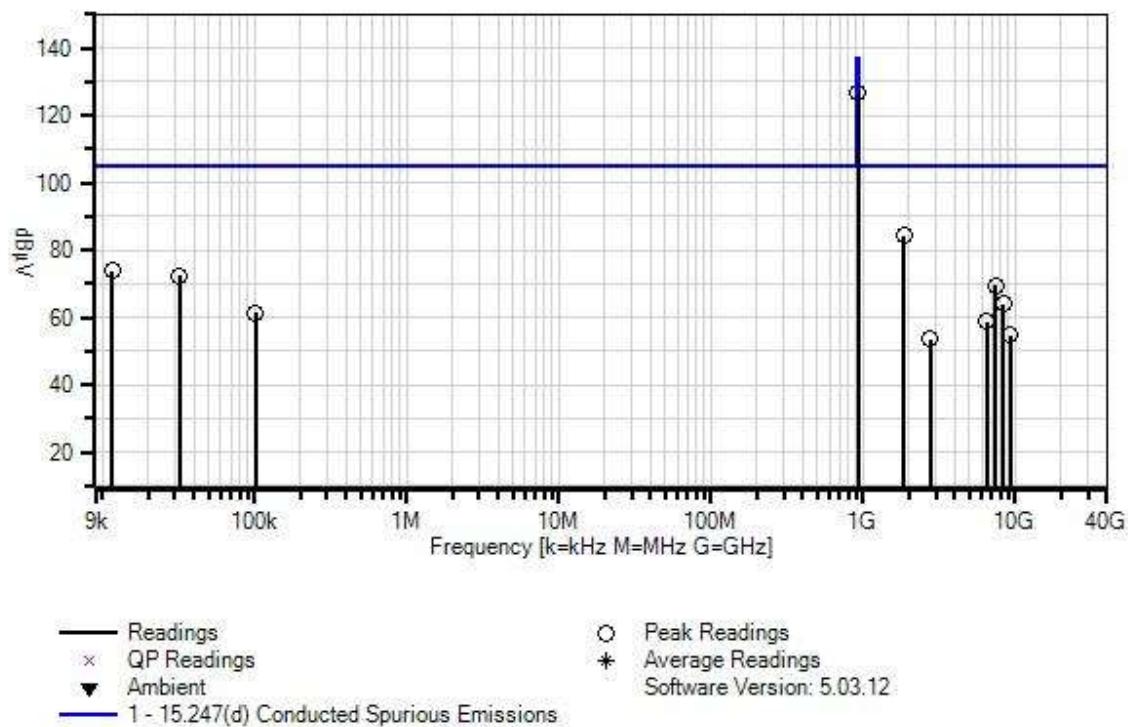

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP05411	Attenuator	54A-10	1/19/2018	1/19/2020
T2	ANP07192	Cable	32022-29094K-29094K-48TC	10/9/2017	10/9/2019
	AN02660	Spectrum Analyzer	E4446A	10/19/2018	10/19/2020

Measurement Data:

Reading listed by margin.

Test Distance: None

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	dB	Dist Table	Corr dB μ V	Spec dB μ V	Margin dB	Polar Ant
1	924.033M	116.8	+9.3	+0.5		+0.0	126.6	137.0	-10.4	None
2	1847.160M	74.4	+9.3	+0.7		+0.0	84.4	105.0	-20.6	None
3	11.685k	64.5	+9.2	+0.0		+0.0	73.7	105.0	-31.3	None
4	32.238k	63.3	+9.2	+0.0		+0.0	72.5	105.0	-32.5	None
5	7391.586M	58.7	+9.4	+1.5		+0.0	69.6	105.0	-35.4	None
6	8312.716M	53.0	+9.5	+1.6		+0.0	64.1	105.0	-40.9	None
7	101.513k	52.2	+9.2	+0.0		+0.0	61.4	105.0	-43.6	None
8	6470.456M	48.0	+9.4	+1.4		+0.0	58.8	105.0	-46.2	None
9	9240.333M	43.7	+9.5	+1.6		+0.0	54.8	105.0	-50.2	None
10	2772.304M	43.2	+9.3	+0.9		+0.0	53.4	105.0	-51.6	None


Band Edge



Band Edge Summary



Limit applied: Max Power/100kHz - 20dB.


Frequency (MHz)	Modulation	Measured (dB μ V)	Limit (dB μ V)	Results
902	FSK	64.8077	<105	Pass
928	FSK	64.6237	<105	Pass
902	Lora	63.9317	<105	Pass
928	Lora	64.2007	<105	Pass

Band Edge Plots

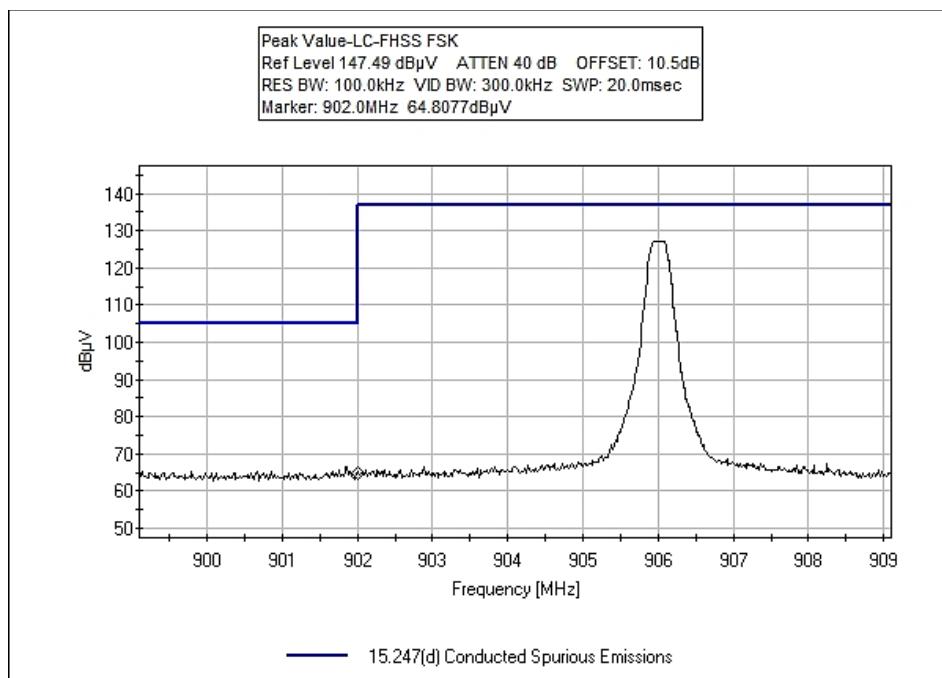


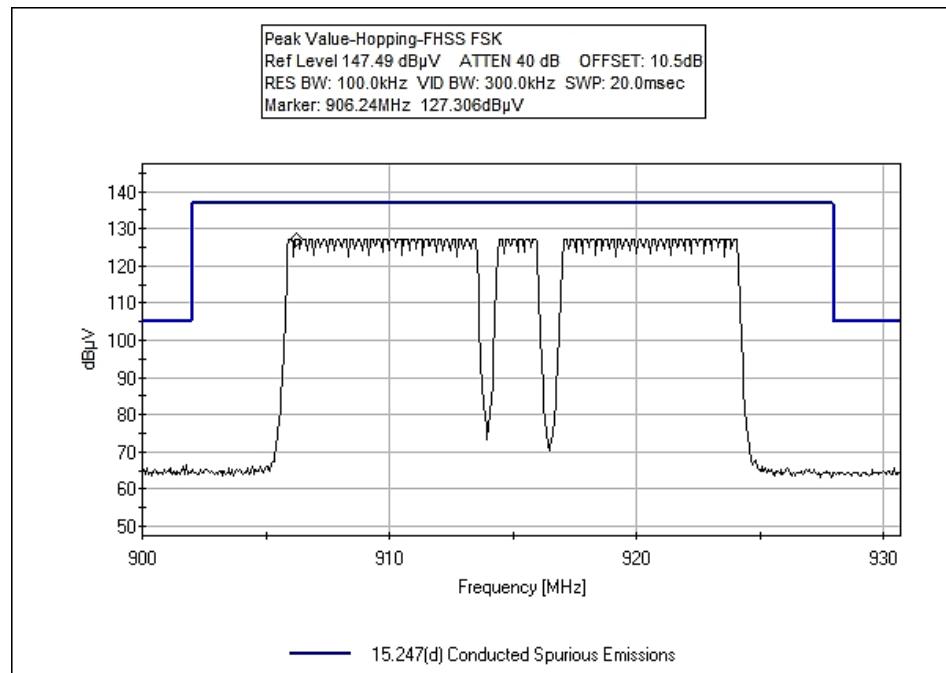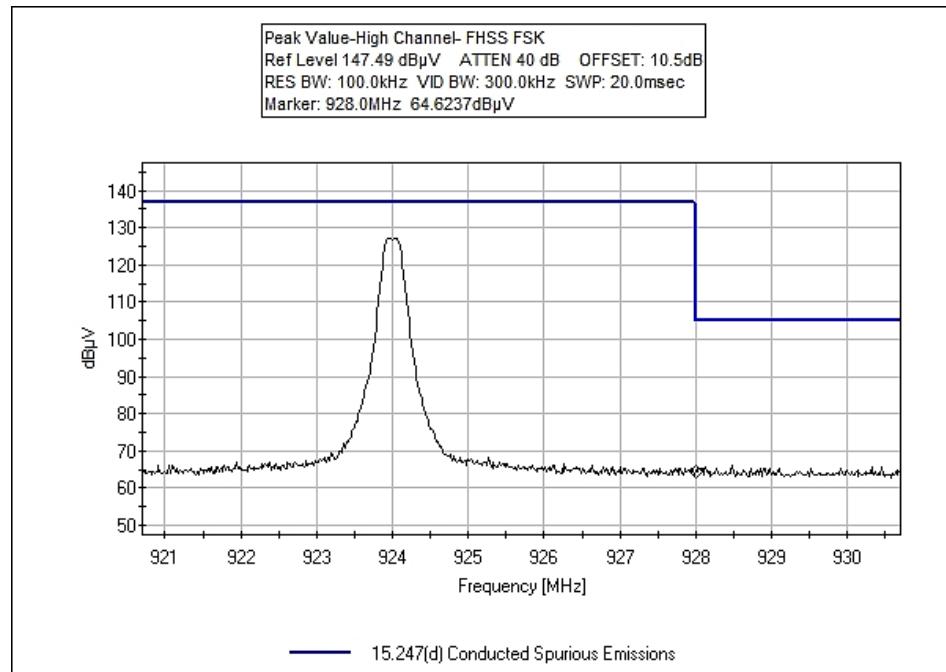

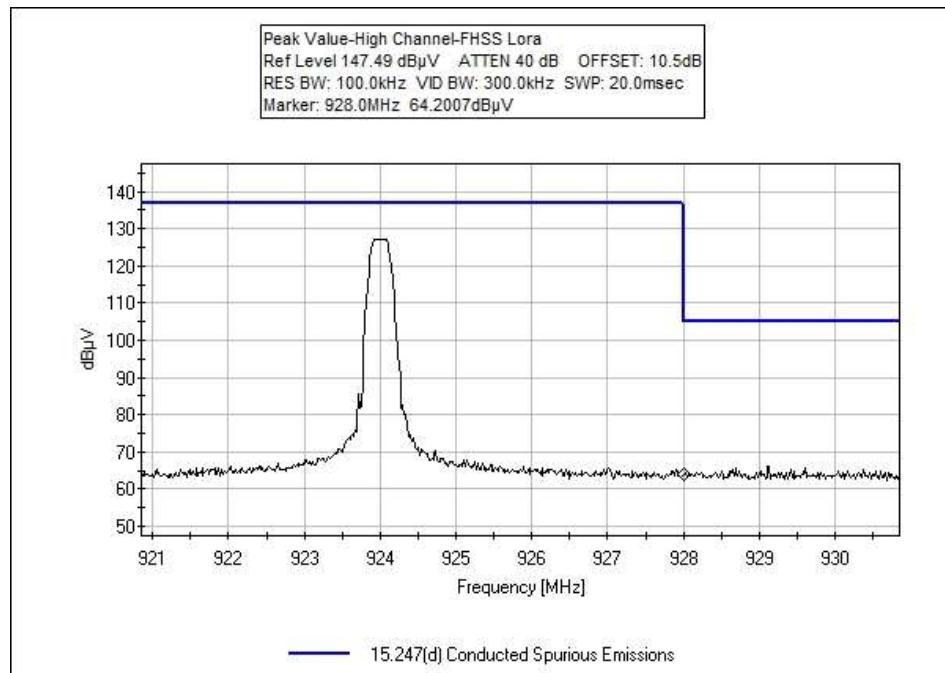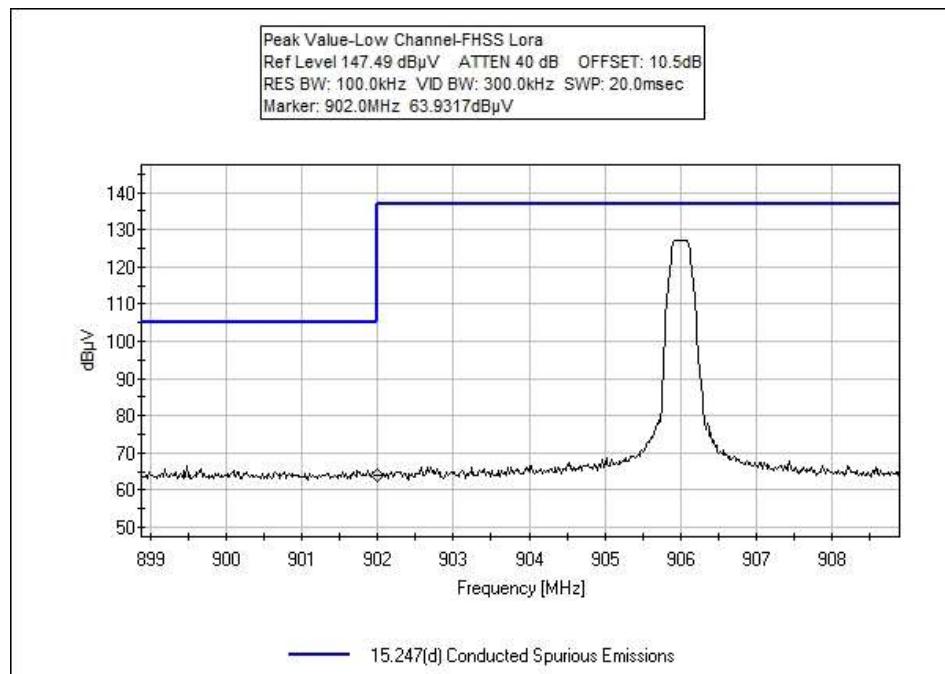

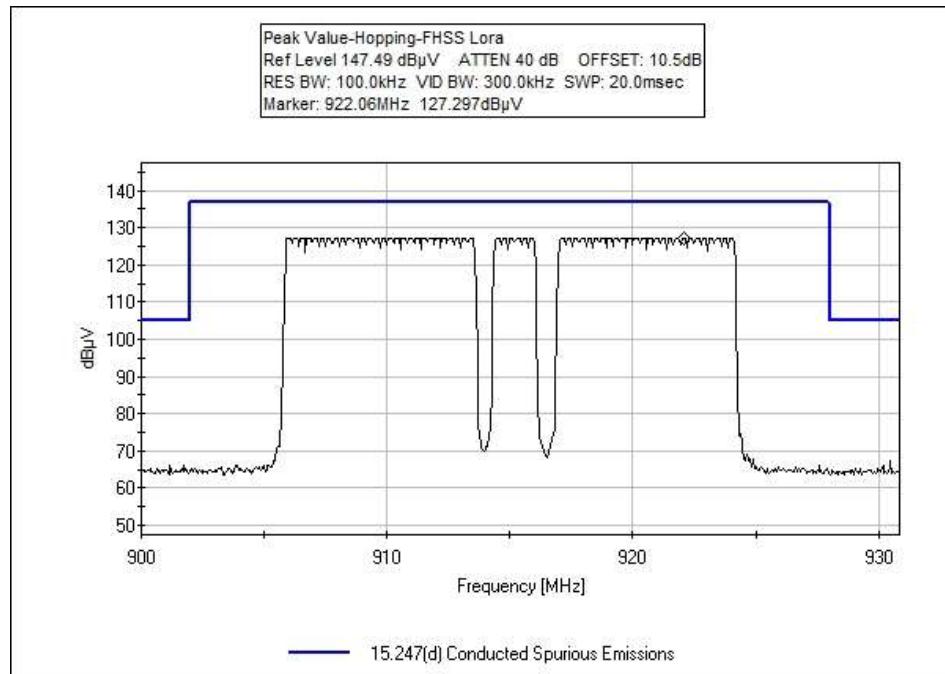

Test Setup Photo(s)

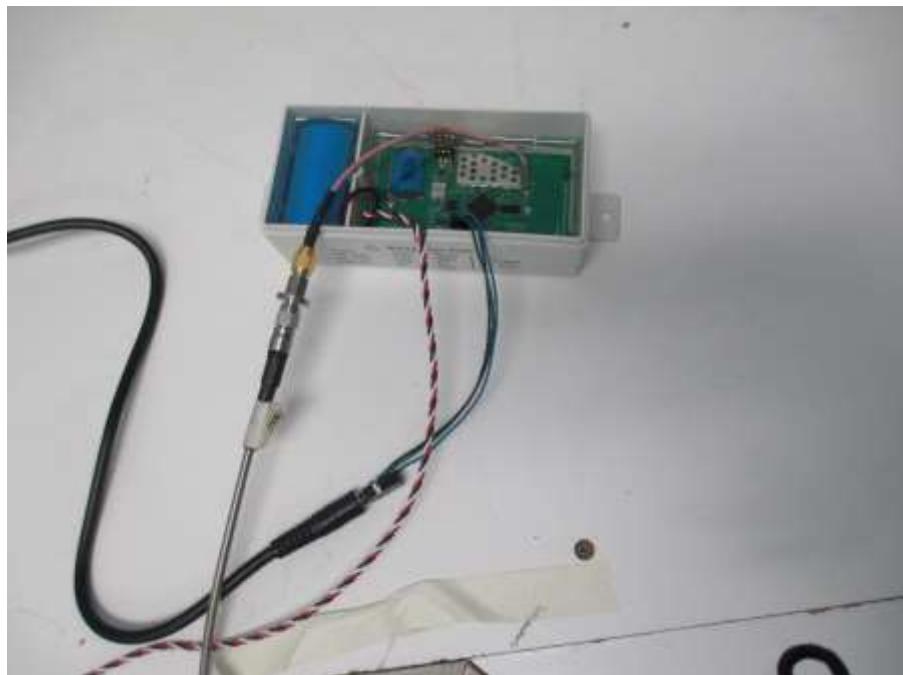

15.247(d) Radiated Emissions & Band Edge

Test Setup / Conditions / Data

Test Location: CKC Laboratories Inc. • 1120 Fulton Place • Fremont, CA 94539 • 510 249-1170
 Customer: **Tehama Wireless**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **102436** Date: 5/21/2019
 Test Type: **Radiated Scan** Time: 09:15:22
 Tested By: Hieu Song Nguyenpham Sequence#: 40
 Software: EMITest 5.03.12

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Radiated Emission Frequency Range: 9kHz to 1GHz Application: Super Term V2.21 Temperature: 21.8°C Humidity: 43 % Atmospheric Pressure: 101.4kPa Highest Generation Frequency: 924MHz Method: ANSI C 63.10 2013 Antenna Gain: 2dBi
The EUT is placed on the table and continuously receiving as intended. It is powered by an internal battery at 3.6VDC. FHSS FSK Low Channel The EUT is placed on the table per installation position and continuously transmitting as intended. It is powered by an internal battery at 3.6VDC.

Tehama Wireless WO#: 102436 Sequence#: 40 Date: 5/21/2019
15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

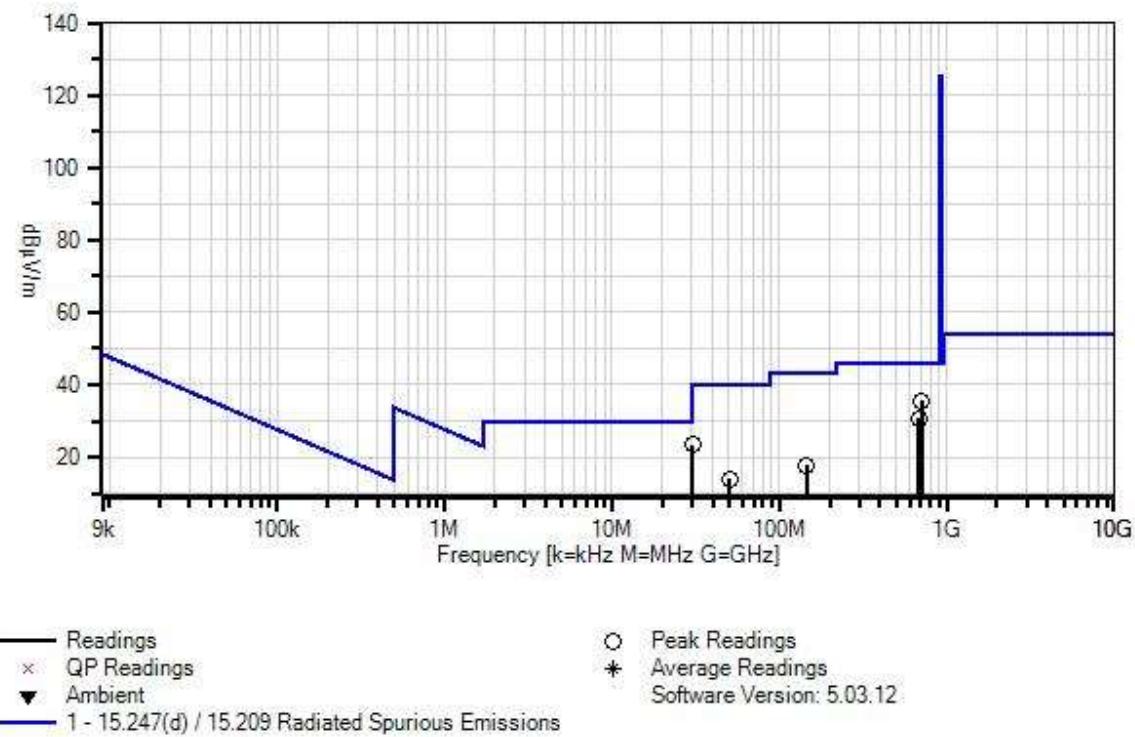

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02660	Spectrum Analyzer	E4446A	10/19/2018	10/19/2020
T1	ANP07508	Preamp	310N	10/15/2018	10/15/2020
T2	ANP06049	Attenuator	PE7002-6	5/14/2018	5/14/2020
T3	ANP00880	Cable	RG214U	5/14/2018	5/14/2020
T4	ANP01187	Cable	CNT-195	8/20/2018	8/20/2020
T5	ANP06691	Cable	PE3062-180	5/14/2018	5/14/2020
T6	AN00852	Biconilog Antenna	CBL 6111C	5/1/2018	5/1/2020
	AN00432	Loop Antenna	6502	2/19/2019	2/19/2021

Measurement Data: Reading listed by margin. Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
	MHz	dB μ V	T5	T6			Table	dB μ V/m	dB μ V/m		
1	704.837M	36.7	-32.3	+6.0	+2.9	+0.7	+0.0	35.5	46.0	-10.5	Vert
			+1.1	+20.4							
2	677.089M	32.3	-32.2	+6.0	+2.8	+0.6	+0.0	30.7	46.0	-15.3	Horiz
			+1.0	+20.2							
3	30.266M	30.0	-32.1	+5.9	+0.5	+0.1	+0.0	23.4	40.0	-16.6	Horiz
			+0.2	+18.8							
4	145.678M	30.6	-32.1	+6.0	+1.1	+0.2	+0.0	17.8	43.5	-25.7	Horiz
			+0.4	+11.6							
5	50.697M	30.2	-32.1	+6.0	+0.6	+0.1	+0.0	14.1	40.0	-25.9	Horiz
			+0.2	+9.1							



Test Location: CKC Laboratories Inc. • 1120 Fulton Place • Fremont, CA 94539 • 510 249-1170
Customer: **Tehama Wireless**
Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
Work Order #: **102436** Date: 5/17/2019
Test Type: **Radiated Scan** Time: 09:38:30
Tested By: Hieu Song Nguyenpham Sequence#: 12
Software: EMITest 5.03.12

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Conducted Emission Frequency Range: 1GHz to 10GHz
Application: Super Term V2.21 Temperature: 22.9°C Humidity: 44 % Atmospheric Pressure: 102.0kPa Highest Generation Frequency: 924MHz Method: ANSI C 63.10 2013 Antenna Gain: 2dBi
The EUT is placed on the table and continuously receiving as intended. It is powered by an internal battery at 3.6VDC.
FHSS FSK Low Channel
The EUT is placed on the table per installation position and continuously transmitting as intended. It is powered by an internal battery at 3.6VDC.

Tehama Wireless WO#: 102436 Sequence#: 12 Date: 5/17/2019
15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

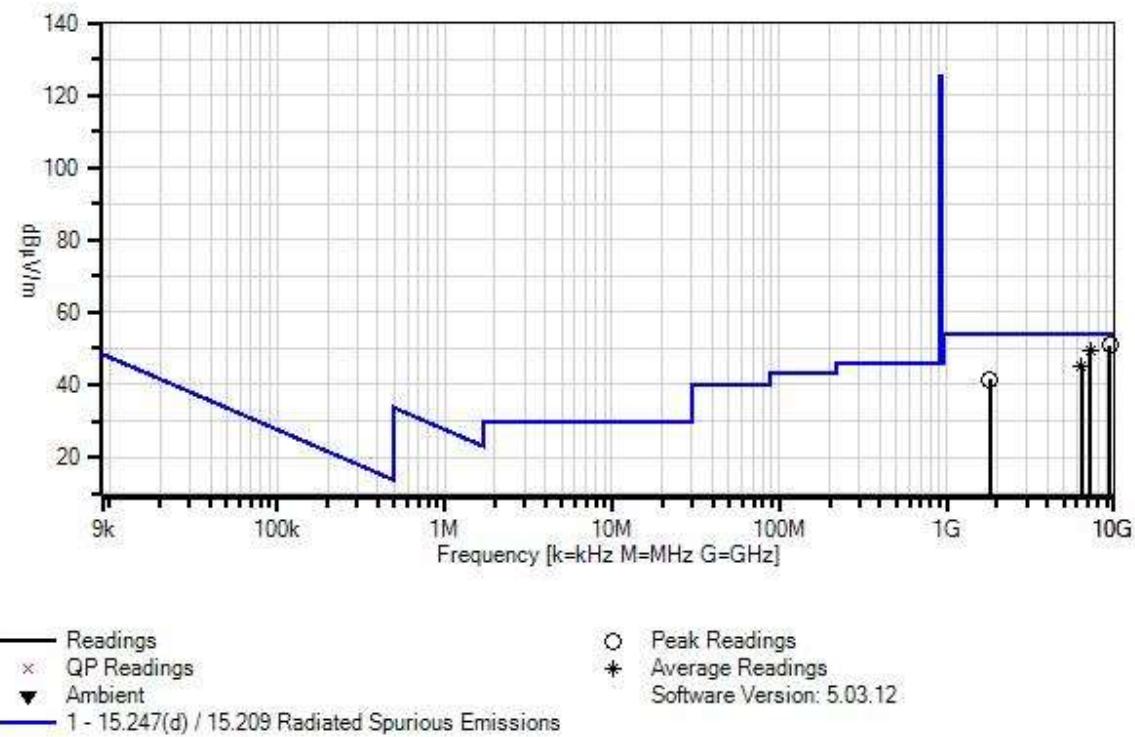

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02660	Spectrum Analyzer	E4446A	10/19/2018	10/19/2020
T1	AN03013	Cable	32022-2-2909K-36TC	6/25/2018	6/25/2020
T2	AN03607	Preamp	AMF-7D-00101800-30-10P	6/6/2017	6/6/2019
T3	AN02157	Horn Antenna-ANSI C63.5	3115	1/15/2019	1/15/2021
T4	AN03302	Cable	32026-29094K-29094K-72TC	1/15/2018	1/15/2020
T5	ANP01210	Cable	FSJ1P-50A-4A	12/18/2018	12/18/2020
T6	AN03172	High Pass Filter	HM1155-11SS	4/5/2018	4/5/2020

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6			Table	dB μ V/m	dB μ V/m		
	MHz	dB μ V	dB	dB	dB	dB				dB	Ant
1	9472.256M	61.2	+1.3	-59.1	+39.1	+2.7	+0.0	50.8	54.0	-3.2	Horiz
			+5.5	+0.1							
2	7247.997M	64.4	+1.1	-59.2	+36.2	+2.3	+0.0	49.7	54.0	-4.3	Horiz
	Ave		+4.8	+0.1							
^	7247.997M	69.9	+1.1	-59.2	+36.2	+2.3	+0.0	55.2	54.0	+1.2	Horiz
			+4.8	+0.1							
4	6341.971M	62.5	+1.0	-59.5	+34.5	+2.1	+0.0	45.1	54.0	-8.9	Horiz
	Ave		+4.4	+0.1							
^	6341.971M	68.6	+1.0	-59.5	+34.5	+2.1	+0.0	51.2	54.0	-2.8	Horiz
			+4.4	+0.1							
6	1812.030M	69.5	+0.5	-58.1	+26.1	+1.1	+0.0	41.6	54.0	-12.4	Horiz
			+2.2	+0.3							



Test Location: CKC Laboratories Inc. • 1120 Fulton Place • Fremont, CA 94539 • 510 249-1170
Customer: **Tehama Wireless**
Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
Work Order #: **102436** Date: 5/21/2019
Test Type: **Radiated Scan** Time: 09:53:26
Tested By: Hieu Song Nguyenpham Sequence#: 43
Software: EMITest 5.03.12

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Radiated Emission Frequency Range: 9kHz to 1GHz Application: Super Term V2.21 Temperature: 21.8°C Humidity: 43 % Atmospheric Pressure: 101.4kPa Highest Generation Frequency: 924MHz Method: ANSI C 63.10 2013 Antenna Gain: 2dBi The EUT is placed on the table and continuously receiving as intended. It is powered by an internal battery at 3.6VDC. FHSS FSK Middle Channel The EUT is placed on the table per installation position and continuously transmitting as intended. It is powered by an internal battery at 3.6VDC.

Tehama Wireless WO#: 102436 Sequence#: 43 Date: 5/21/2019
15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

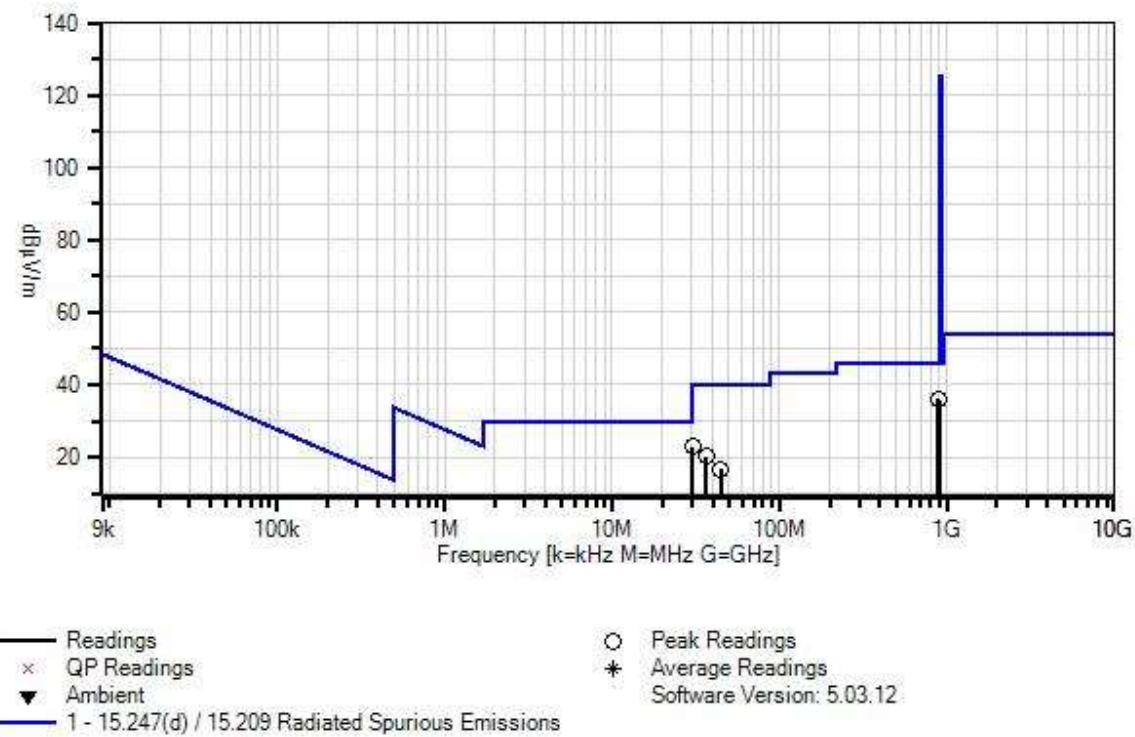

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02660	Spectrum Analyzer	E4446A	10/19/2018	10/19/2020
T1	ANP07508	Preamp	310N	10/15/2018	10/15/2020
T2	ANP06049	Attenuator	PE7002-6	5/14/2018	5/14/2020
T3	ANP00880	Cable	RG214U	5/14/2018	5/14/2020
T4	ANP01187	Cable	CNT-195	8/20/2018	8/20/2020
T5	ANP06691	Cable	PE3062-180	5/14/2018	5/14/2020
T6	AN00852	Biconilog Antenna	CBL 6111C	5/1/2018	5/1/2020
	AN00432	Loop Antenna	6502	2/19/2019	2/19/2021

Measurement Data: Reading listed by margin. Test Distance: 3 Meters

#	Freq MHz	Rdng dB μ V	T1 T5				T2 T6				Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
			T1 dB	T5 dB	T2 dB	T6 dB	T3 dB	T4 dB							
1	883.236M	33.7	-31.9 +1.4	+5.9 +22.7	+3.3	+0.9	+0.0	36.0	46.0	-10.0	Horiz				
2	900.750M	33.3	-31.8 +1.4	+5.9 +22.8	+3.3	+0.9	+0.0	35.8	46.0	-10.2	Horiz				
3	30.084M	29.4	-32.1 +0.2	+5.9 +18.9	+0.5	+0.1	+0.0	22.9	40.0	-17.1	Horiz				
4	36.481M	29.7	-32.1 +0.2	+5.9 +16.0	+0.5	+0.1	+0.0	20.3	40.0	-19.7	Horiz				
5	44.477M	29.6	-32.1 +0.2	+6.0 +12.2	+0.6	+0.1	+0.0	16.6	40.0	-23.4	Horiz				

Test Location: CKC Laboratories Inc. • 1120 Fulton Place • Fremont, CA 94539 • 510 249-1170
 Customer: **Tehama Wireless**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **102436** Date: **5/17/2019**
 Test Type: **Radiated Scan** Time: **10:16:51**
 Tested By: **Hieu Song Nguyenpham** Sequence#: **15**
 Software: **EMITest 5.03.12**

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Conducted Emission Frequency Range: 1GHz to 10GHz
Application: Super Term V2.21
Temperature: 22.9°C
Humidity: 44 %
Atmospheric Pressure: 102.0kPa
Highest Generation Frequency: 924MHz
Method: ANSI C 63.10 2013
Antenna Gain: 2dBi
The EUT is placed on the table and continuously receiving as intended. It is powered by an internal battery at 3.6VDC.
FHSS FSK Middle Channel
The EUT is placed on the table per installation position and continuously transmitting as intended. It is powered by an internal battery at 3.6VDC.

Tehama Wireless WO#: 102436 Sequence#: 15 Date: 5/17/2019
15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

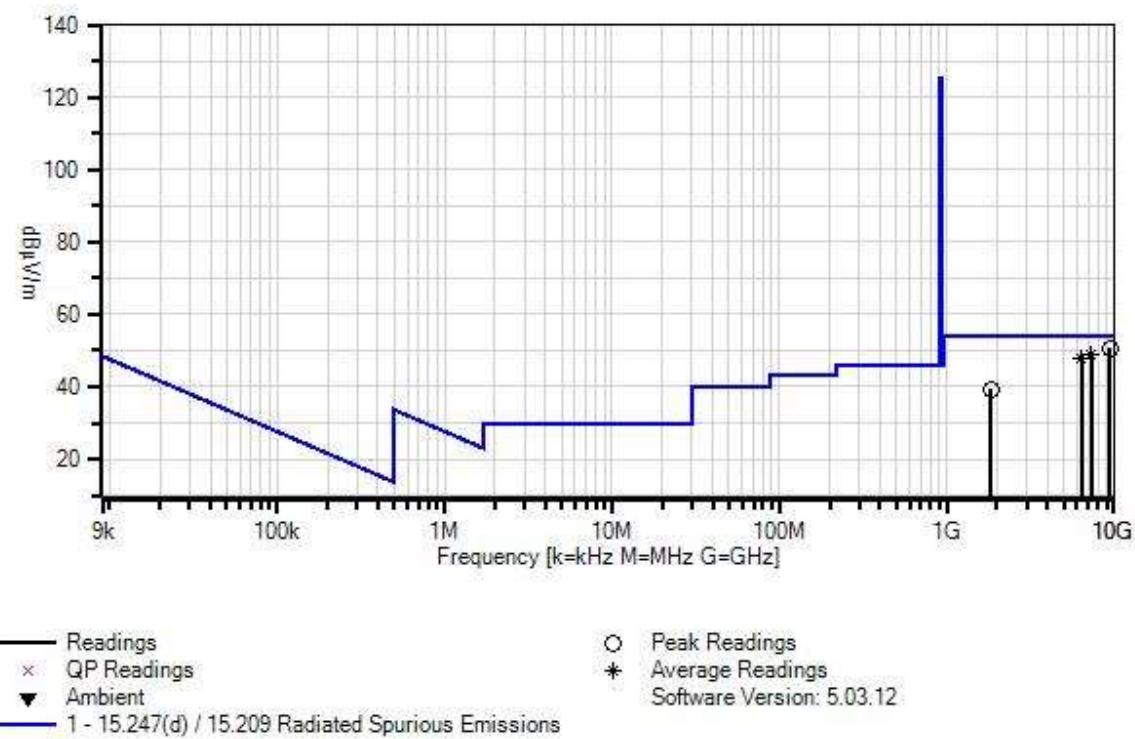

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02660	Spectrum Analyzer	E4446A	10/19/2018	10/19/2020
T1	AN03013	Cable	32022-2-2909K-36TC	6/25/2018	6/25/2020
T2	AN03607	Preamp	AMF-7D-00101800-30-10P	6/6/2017	6/6/2019
T3	AN02157	Horn Antenna-ANSI C63.5	3115	1/15/2019	1/15/2021
T4	AN03302	Cable	32026-29094K-29094K-72TC	1/15/2018	1/15/2020
T5	ANP01210	Cable	FSJ1P-50A-4A	12/18/2018	12/18/2020
T6	AN03172	High Pass Filter	HM1155-11SS	4/5/2018	4/5/2020

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6			Table	dB μ V/m	dB μ V/m		
	MHz	dB μ V	dB	dB	dB	dB				dB	Ant
1	9452.927M	61.1	+1.3	-59.1	+39.0	+2.7	+0.0	50.6	54.0	-3.4	Horiz
			+5.5	+0.1							
2	7320.389M	63.5	+1.1	-59.4	+36.4	+2.3	+0.0	48.8	54.0	-5.2	Horiz
	Ave		+4.8	+0.1							
^	7320.389M	69.2	+1.1	-59.4	+36.4	+2.3	+0.0	54.5	54.0	+0.5	Horiz
			+4.8	+0.1							
4	6405.362M	64.6	+1.0	-59.2	+34.5	+2.2	+0.0	47.6	54.0	-6.4	Horiz
	Ave		+4.4	+0.1							
^	6405.362M	69.9	+1.0	-59.2	+34.5	+2.2	+0.0	52.9	54.0	-1.1	Horiz
			+4.4	+0.1							
6	1830.070M	67.2	+0.5	-58.1	+26.2	+1.1	+0.0	39.4	54.0	-14.6	Horiz
			+2.2	+0.3							

Test Location: CKC Laboratories Inc. • 1120 Fulton Place • Fremont, CA 94539 • 510 249-1170
 Customer: **Tehama Wireless**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **102436** Date: 5/21/2019
 Test Type: **Radiated Scan** Time: 10:13:12
 Tested By: Hieu Song Nguyenpham Sequence#: 46
 Software: EMITest 5.03.12

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Radiated Emission Frequency Range: 9kHz to 1GHz Application: Super Term V2.21 Temperature: 21.8°C Humidity: 43 % Atmospheric Pressure: 101.4kPa Highest Generation Frequency: 924MHz Method: ANSI C 63.10 2013 Antenna Gain: 2dBi
The EUT is placed on the table and continuously receiving as intended. It is powered by an internal battery at 3.6VDC. FHSS FSK High Channel The EUT is placed on the table per installation position and continuously transmitting as intended. It is powered by an internal battery at 3.6VDC.

Tehama Wireless WO#: 102436 Sequence#: 46 Date: 5/21/2019
15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

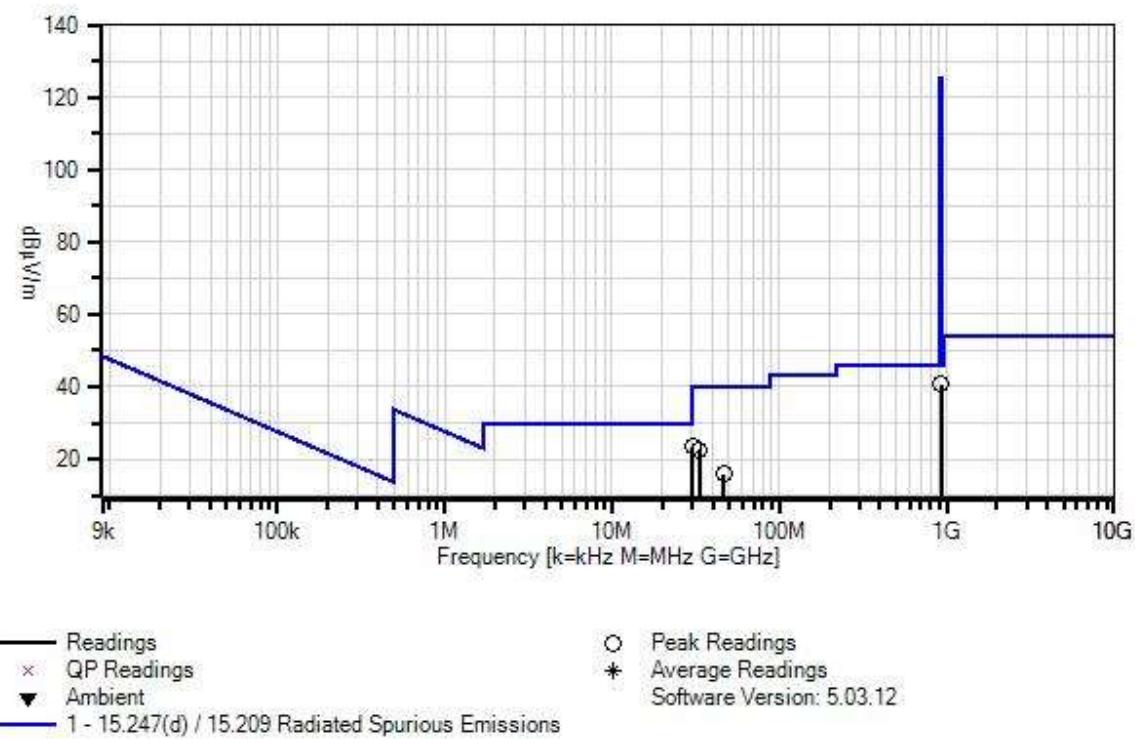

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02660	Spectrum Analyzer	E4446A	10/19/2018	10/19/2020
T1	ANP07508	Preamp	310N	10/15/2018	10/15/2020
T2	ANP06049	Attenuator	PE7002-6	5/14/2018	5/14/2020
T3	ANP00880	Cable	RG214U	5/14/2018	5/14/2020
T4	ANP01187	Cable	CNT-195	8/20/2018	8/20/2020
T5	ANP06691	Cable	PE3062-180	5/14/2018	5/14/2020
T6	AN00852	Biconilog Antenna	CBL 6111C	5/1/2018	5/1/2020
	AN00432	Loop Antenna	6502	2/19/2019	2/19/2021

Measurement Data: Reading listed by margin. Test Distance: 3 Meters

#	Freq MHz	Rdng dB μ V	T1 T5				T2 T6				Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
			T1 dB	T5 dB	T2 dB	T6 dB	T3 dB	T4 dB							
1	928.190M	37.7	-31.6 +1.3	+5.9 +23.2	+3.3	+0.9	+0.0	40.7	46.0	-5.3	Horiz				
2	30.421M	30.0	-32.1 +0.2	+5.9 +18.7	+0.5	+0.1	+0.0	23.3	40.0	-16.7	Horiz				
3	33.367M	30.8	-32.1 +0.2	+5.9 +17.3	+0.5	+0.1	+0.0	22.7	40.0	-17.3	Horiz				
4	46.750M	30.1	-32.1 +0.2	+6.0 +11.0	+0.6	+0.1	+0.0	15.9	40.0	-24.1	Horiz				



Test Location: CKC Laboratories Inc. • 1120 Fulton Place • Fremont, CA 94539 • 510 249-1170
Customer: **Tehama Wireless**
Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
Work Order #: **102436** Date: 5/17/2019
Test Type: **Radiated Scan** Time: 10:47:16
Tested By: Hieu Song Nguyenpham Sequence#: 18
Software: EMITest 5.03.12

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Conducted Emission Frequency Range: 1GHz to 10GHz
Application: Super Term V2.21 Temperature: 22.9°C Humidity: 44 % Atmospheric Pressure: 102.0kPa Highest Generation Frequency: 924MHz Method: ANSI C 63.10 2013 Antenna Gain: 2dBi
The EUT is placed on the table and continuously receiving as intended. It is powered by an internal battery at 3.6VDC.
FHSS FSK High Channel
The EUT is placed on the table per installation position and continuously transmitting as intended. It is powered by an internal battery at 3.6VDC.

Tehama Wireless WO#: 102436 Sequence#: 18 Date: 5/17/2019
15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

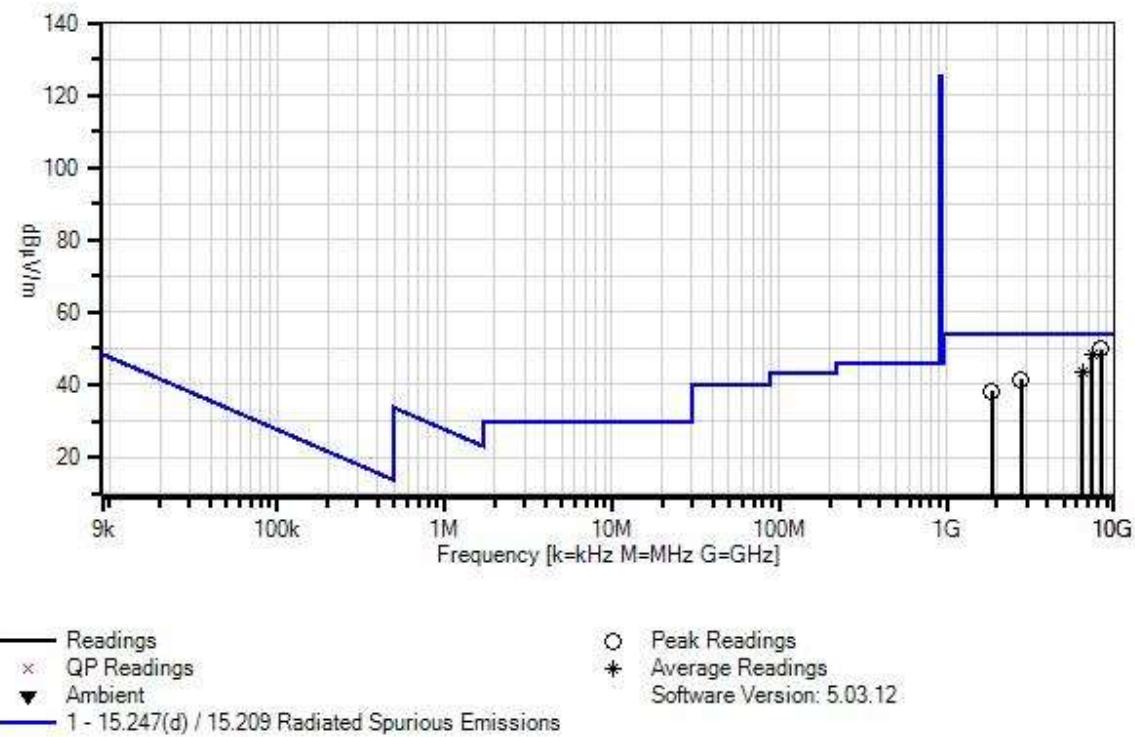

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02660	Spectrum Analyzer	E4446A	10/19/2018	10/19/2020
T1	AN03013	Cable	32022-2-2909K-36TC	6/25/2018	6/25/2020
T2	AN03607	Preamp	AMF-7D-00101800-30-10P	6/6/2017	6/6/2019
T3	AN02157	Horn Antenna-ANSI C63.5	3115	1/15/2019	1/15/2021
T4	AN03302	Cable	32026-29094K-29094K-72TC	1/15/2018	1/15/2020
T5	ANP01210	Cable	FSJ1P-50A-4A	12/18/2018	12/18/2020
T6	AN03172	High Pass Filter	HM1155-11SS	4/5/2018	4/5/2020

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6			Table	dB μ V/m	dB μ V/m		
			MHz	dB μ V	dB	dB				dB	Ant
1	8316.340M	63.2	+1.2	-59.3	+37.0	+2.5	+0.0	49.9	54.0	-4.1	Horiz
			+5.2	+0.1							
2	7392.000M	62.8	+1.1	-59.3	+36.7	+2.3	+0.0	48.5	54.0	-5.5	Horiz
	Ave		+4.8	+0.1							
^	7392.000M	68.6	+1.1	-59.3	+36.7	+2.3	+0.0	54.3	54.0	+0.3	Horiz
			+4.8	+0.1							
4	6468.010M	60.6	+1.0	-59.2	+34.5	+2.2	+0.0	43.6	54.0	-10.4	Horiz
	Ave		+4.4	+0.1							
^	6468.010M	67.2	+1.0	-59.2	+34.5	+2.2	+0.0	50.2	54.0	-3.8	Horiz
			+4.4	+0.1							
6	2772.140M	65.2	+0.6	-58.5	+29.7	+1.4	+0.0	41.4	54.0	-12.6	Horiz
			+2.8	+0.2							
7	1847.960M	65.8	+0.5	-58.0	+26.3	+1.1	+0.0	38.2	54.0	-15.8	Horiz
			+2.2	+0.3							



Test Location: CKC Laboratories Inc. • 1120 Fulton Place • Fremont, CA 94539 • 510 249-1170
Customer: **Tehama Wireless**
Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
Work Order #: **102436** Date: 5/21/2019
Test Type: **Radiated Scan** Time: 10:58:20
Tested By: Hieu Song Nguyenpham Sequence#: 49
Software: EMITest 5.03.12

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Radiated Emission Frequency Range: 9kHz to 1GHz Application: Super Term V2.21 Temperature: 21.8°C Humidity: 43 % Atmospheric Pressure: 101.4kPa Highest Generation Frequency: 924MHz Method: ANSI C 63.10 2013 Antenna Gain: 2dBi The EUT is placed on the table and continuously receiving as intended. It is powered by an internal battery at 3.6VDC. FHSS Lora Low Channel The EUT is placed on the table per installation position and continuously transmitting as intended. It is powered by an internal battery at 3.6VDC.

Tehama Wireless WO#: 102436 Sequence#: 49 Date: 5/21/2019
15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

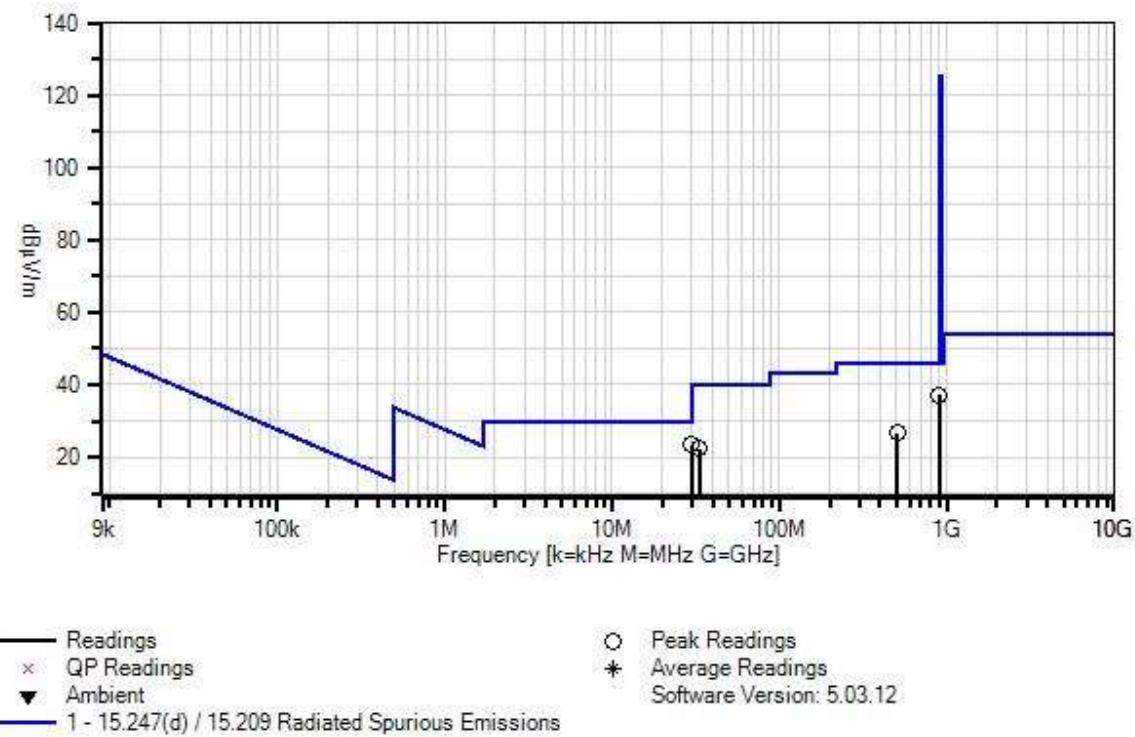

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02660	Spectrum Analyzer	E4446A	10/19/2018	10/19/2020
T1	ANP07508	Preamp	310N	10/15/2018	10/15/2020
T2	ANP06049	Attenuator	PE7002-6	5/14/2018	5/14/2020
T3	ANP00880	Cable	RG214U	5/14/2018	5/14/2020
T4	ANP01187	Cable	CNT-195	8/20/2018	8/20/2020
T5	ANP06691	Cable	PE3062-180	5/14/2018	5/14/2020
T6	AN00852	Biconilog Antenna	CBL 6111C	5/1/2018	5/1/2020
	AN00432	Loop Antenna	6502	2/19/2019	2/19/2021

Measurement Data: Reading listed by margin. Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
	MHz	dB μ V	T5	T6			Table	dB μ V/m	dB μ V/m		Ant
1	895.496M	34.8	-31.8	+5.9	+3.3	+0.9	+0.0	37.3	46.0	-8.7	Horiz
			+1.4	+22.8							
2	30.042M	30.0	-32.1	+5.9	+0.5	+0.1	+0.0	23.5	40.0	-16.5	Horiz
			+0.2	+18.9							
3	33.367M	30.5	-32.1	+5.9	+0.5	+0.1	+0.0	22.4	40.0	-17.6	Horiz
			+0.2	+17.3							
4	504.920M	30.7	-32.0	+6.0	+2.4	+0.6	+0.0	26.6	46.0	-19.4	Horiz
			+0.9	+18.0							

Test Location: CKC Laboratories Inc. • 1120 Fulton Place • Fremont, CA 94539 • 510 249-1170
 Customer: **Tehama Wireless**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **102436** Date: **5/17/2019**
 Test Type: **Radiated Scan** Time: **11:11:18**
 Tested By: **Hieu Song Nguyenpham** Sequence#: **21**
 Software: **EMITest 5.03.12**

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Conducted Emission
Frequency Range: 1GHz to 10GHz
Application: Super Term V2.21
Temperature: 22.9°C
Humidity: 44 %
Atmospheric Pressure: 102.0kPa
Highest Generation Frequency: 924MHz
Method: ANSI C 63.10 2013
Antenna Gain: 2dBi
The EUT is placed on the table and continuously receiving as intended. It is powered by an internal battery at 3.6VDC.
FHSS Lora
Low Channel
The EUT is placed on the table per installation position and continuously transmitting as intended.
It is powered by an internal battery at 3.6VDC.

Tehama Wireless WO#: 102436 Sequence#: 21 Date: 5/17/2019
15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

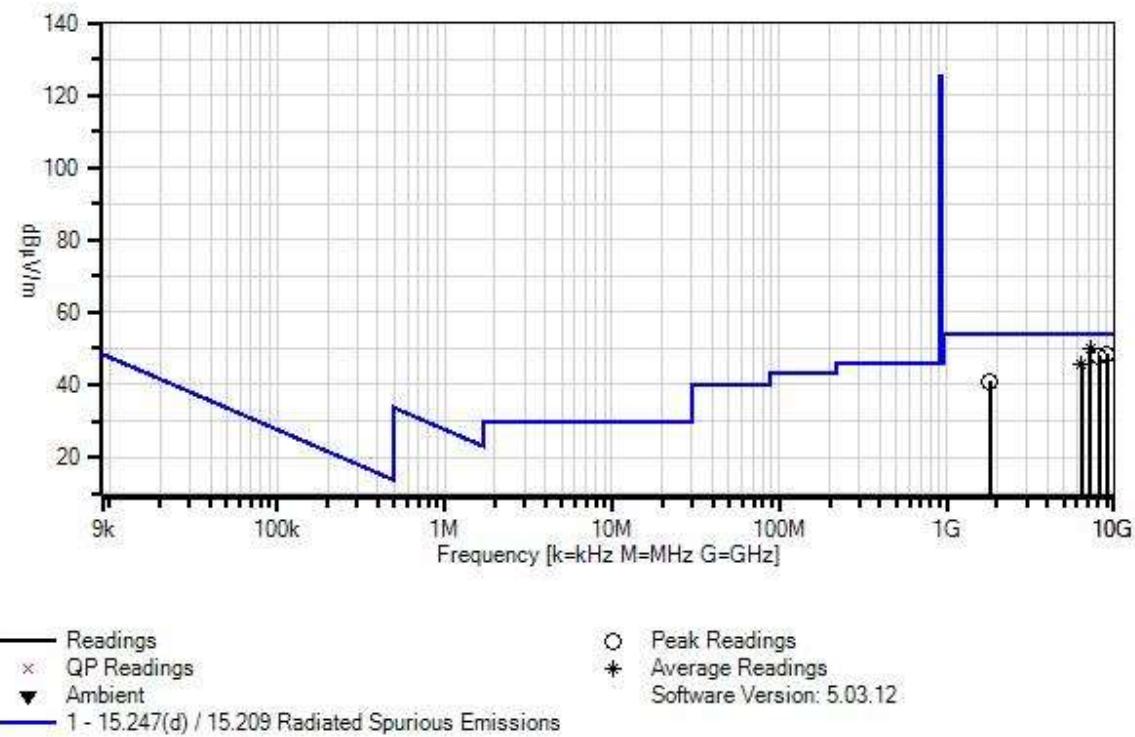

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02660	Spectrum Analyzer	E4446A	10/19/2018	10/19/2020
T1	AN03013	Cable	32022-2-2909K-36TC	6/25/2018	6/25/2020
T2	AN03607	Preamp	AMF-7D-00101800-30-10P	6/6/2017	6/6/2019
T3	AN02157	Horn Antenna-ANSI C63.5	3115	1/15/2019	1/15/2021
T4	AN03302	Cable	32026-29094K-29094K-72TC	1/15/2018	1/15/2020
T5	ANP01210	Cable	FSJ1P-50A-4A	12/18/2018	12/18/2020
T6	AN03172	High Pass Filter	HM1155-11SS	4/5/2018	4/5/2020

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6			Table	dB μ V/m	dB μ V/m		
			MHz	dB μ V	dB	dB				dB	Ant
1	7247.995M	64.6	+1.1	-59.2	+36.2	+2.3	+0.0	49.9	54.0	-4.1	Horiz
	Ave		+4.8	+0.1							
^	7247.995M	70.0	+1.1	-59.2	+36.2	+2.3	+0.0	55.3	54.0	+1.3	Horiz
			+4.8	+0.1							
3	9059.785M	60.0	+1.2	-59.3	+38.6	+2.6	+0.0	48.6	54.0	-5.4	Horiz
			+5.4	+0.1							
4	8154.037M	61.5	+1.2	-59.3	+36.8	+2.5	+0.0	47.9	54.0	-6.1	Horiz
			+5.1	+0.1							
5	6342.010M	62.9	+1.0	-59.5	+34.5	+2.1	+0.0	45.5	54.0	-8.5	Horiz
	Ave		+4.4	+0.1							
^	6342.010M	68.6	+1.0	-59.5	+34.5	+2.1	+0.0	51.2	54.0	-2.8	Horiz
			+4.4	+0.1							
7	1811.960M	68.9	+0.5	-58.1	+26.1	+1.1	+0.0	41.0	54.0	-13.0	Horiz
			+2.2	+0.3							

Test Location: CKC Laboratories Inc. • 1120 Fulton Place • Fremont, CA 94539 • 510 249-1170
 Customer: **Tehama Wireless**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **102436** Date: 5/21/2019
 Test Type: **Radiated Scan** Time: 11:33:29
 Tested By: Hieu Song Nguyenpham Sequence#: 52
 Software: EMITest 5.03.12

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Radiated Emission Frequency Range: 9kHz to 1GHz Application: Super Term V2.21 Temperature: 21.8°C Humidity: 43 % Atmospheric Pressure: 101.4kPa Highest Generation Frequency: 924MHz Method: ANSI C 63.10 2013 Antenna Gain: 2dBi
The EUT is placed on the table and continuously receiving as intended. It is powered by an internal battery at 3.6VDC. FHSS Lora Middle Channel The EUT is placed on the table per installation position and continuously transmitting as intended. It is powered by an internal battery at 3.6VDC.

Tehama Wireless WO#: 102436 Sequence#: 52 Date: 5/21/2019
15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

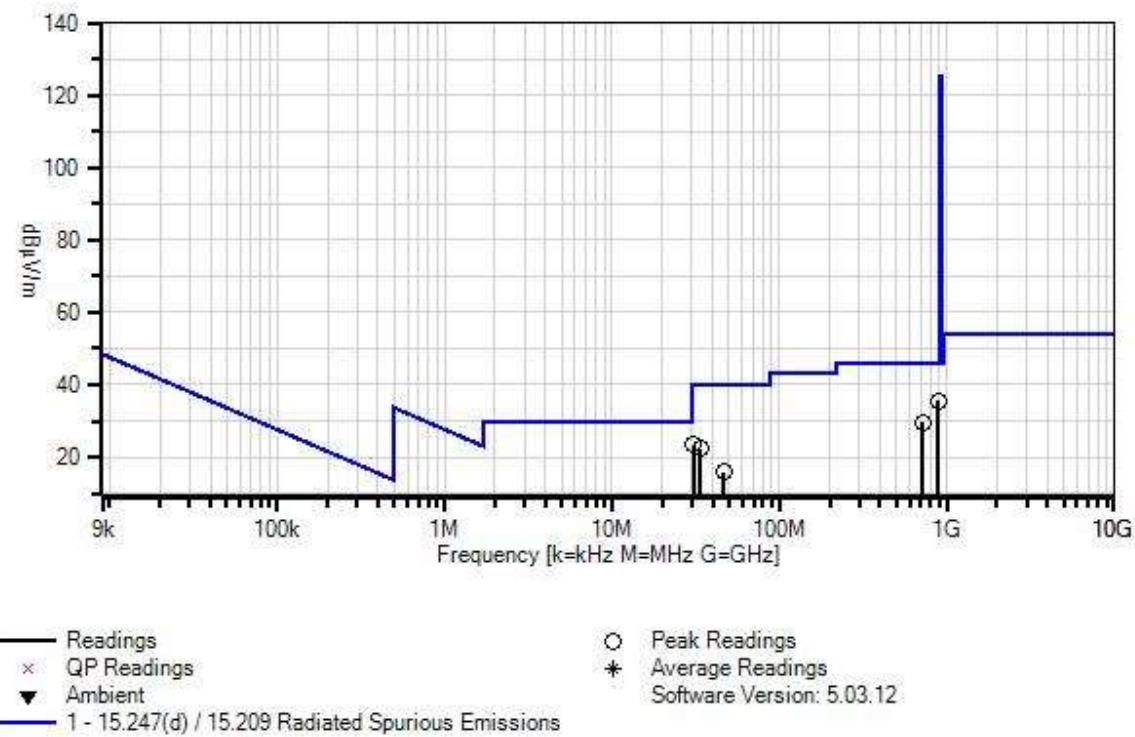

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02660	Spectrum Analyzer	E4446A	10/19/2018	10/19/2020
T1	ANP07508	Preamp	310N	10/15/2018	10/15/2020
T2	ANP06049	Attenuator	PE7002-6	5/14/2018	5/14/2020
T3	ANP00880	Cable	RG214U	5/14/2018	5/14/2020
T4	ANP01187	Cable	CNT-195	8/20/2018	8/20/2020
T5	ANP06691	Cable	PE3062-180	5/14/2018	5/14/2020
T6	AN00852	Biconilog Antenna	CBL 6111C	5/1/2018	5/1/2020
	AN00432	Loop Antenna	6502	2/19/2019	2/19/2021

Measurement Data: Reading listed by margin. Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
	MHz	dB μ V	T5	T6			Table	dB μ V/m	dB μ V/m		Ant
1	883.236M	33.3	-31.9	+5.9	+3.3	+0.9	+0.0	35.6	46.0	-10.4	Horiz
			+1.4	+22.7							
2	30.589M	30.3	-32.1	+5.9	+0.5	+0.1	+0.0	23.5	40.0	-16.5	Horiz
			+0.2	+18.6							
3	719.766M	30.4	-32.3	+6.0	+2.9	+0.7	+0.0	29.5	46.0	-16.5	Horiz
			+1.1	+20.7							
4	33.619M	30.5	-32.1	+5.9	+0.5	+0.1	+0.0	22.3	40.0	-17.7	Horiz
			+0.2	+17.2							
5	46.623M	30.0	-32.1	+6.0	+0.6	+0.1	+0.0	15.8	40.0	-24.2	Horiz
			+0.2	+11.0							

Test Location: CKC Laboratories Inc. • 1120 Fulton Place • Fremont, CA 94539 • 510 249-1170
 Customer: **Tehama Wireless**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **102436** Date: **5/17/2019**
 Test Type: **Radiated Scan** Time: **11:28:44**
 Tested By: **Hieu Song Nguyenpham** Sequence#: **24**
 Software: **EMITest 5.03.12**

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Conducted Emission Frequency Range: 1GHz to 10GHz
Application: Super Term V2.21
Temperature: 22.9°C
Humidity: 44 %
Atmospheric Pressure: 102.0kPa
Highest Generation Frequency: 924MHz
Method: ANSI C 63.10 2013
Antenna Gain: 2dBi
The EUT is placed on the table and continuously receiving as intended. It is powered by an internal battery at 3.6VDC.
FHSS Lora Middle Channel
The EUT is placed on the table per installation position and continuously transmitting as intended. It is powered by an internal battery at 3.6VDC.

Tehama Wireless WO#: 102436 Sequence#: 24 Date: 5/17/2019
15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

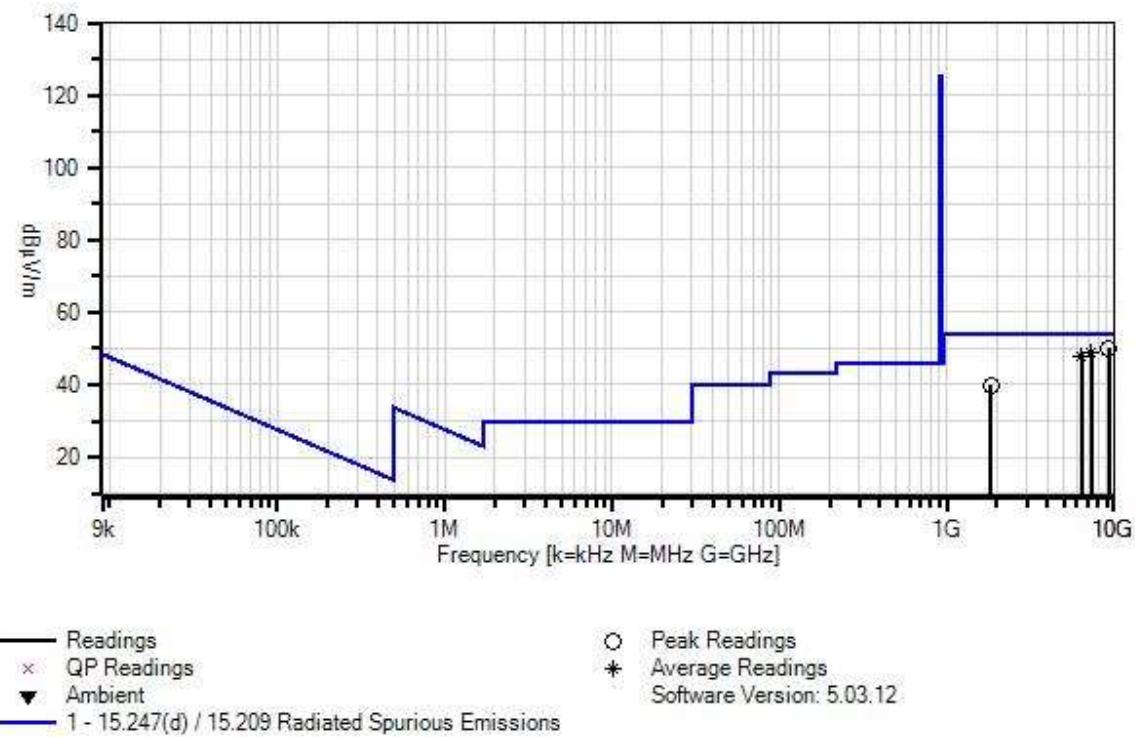

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02660	Spectrum Analyzer	E4446A	10/19/2018	10/19/2020
T1	AN03013	Cable	32022-2-2909K-36TC	6/25/2018	6/25/2020
T2	AN03607	Preamp	AMF-7D-00101800-30-10P	6/6/2017	6/6/2019
T3	AN02157	Horn Antenna-ANSI C63.5	3115	1/15/2019	1/15/2021
T4	AN03302	Cable	32026-29094K-29094K-72TC	1/15/2018	1/15/2020
T5	ANP01210	Cable	FSJ1P-50A-4A	12/18/2018	12/18/2020
T6	AN03172	High Pass Filter	HM1155-11SS	4/5/2018	4/5/2020

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6			Table	dB μ V/m	dB μ V/m		
	MHz	dB μ V	dB	dB	dB	dB				dB	Ant
1	9260.357M	61.2	+1.3	-59.3	+38.8	+2.6	+0.0	50.2	54.0	-3.8	Horiz
			+5.5	+0.1							
2	7320.529M	63.4	+1.1	-59.4	+36.4	+2.3	+0.0	48.7	54.0	-5.3	Horiz
	Ave		+4.8	+0.1							
^	7320.529M	69.6	+1.1	-59.4	+36.4	+2.3	+0.0	54.9	54.0	+0.9	Horiz
			+4.8	+0.1							
4	6405.362M	64.6	+1.0	-59.2	+34.5	+2.2	+0.0	47.6	54.0	-6.4	Horiz
	Ave		+4.4	+0.1							
^	6405.362M	69.8	+1.0	-59.2	+34.5	+2.2	+0.0	52.8	54.0	-1.2	Horiz
			+4.4	+0.1							
6	1830.107M	67.6	+0.5	-58.1	+26.2	+1.1	+0.0	39.8	54.0	-14.2	Horiz
			+2.2	+0.3							

Test Location: CKC Laboratories Inc. • 1120 Fulton Place • Fremont, CA 94539 • 510 249-1170
 Customer: **Tehama Wireless**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **102436** Date: 5/21/2019
 Test Type: **Radiated Scan** Time: 11:51:42
 Tested By: Hieu Song Nguyenpham Sequence#: 55
 Software: EMITest 5.03.12

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Radiated Emission Frequency Range: 9kHz to 1GHz Application: Super Term V2.21 Temperature: 21.8°C Humidity: 43 % Atmospheric Pressure: 101.4kPa Highest Generation Frequency: 924MHz Method: ANSI C 63.10 2013 Antenna Gain: 2dBi
The EUT is placed on the table and continuously receiving as intended. It is powered by an internal battery at 3.6VDC. FHSS Lora High Channel The EUT is placed on the table per installation position and continuously transmitting as intended. It is powered by an internal battery at 3.6VDC.

Tehama Wireless WO#: 102436 Sequence#: 55 Date: 5/21/2019
15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

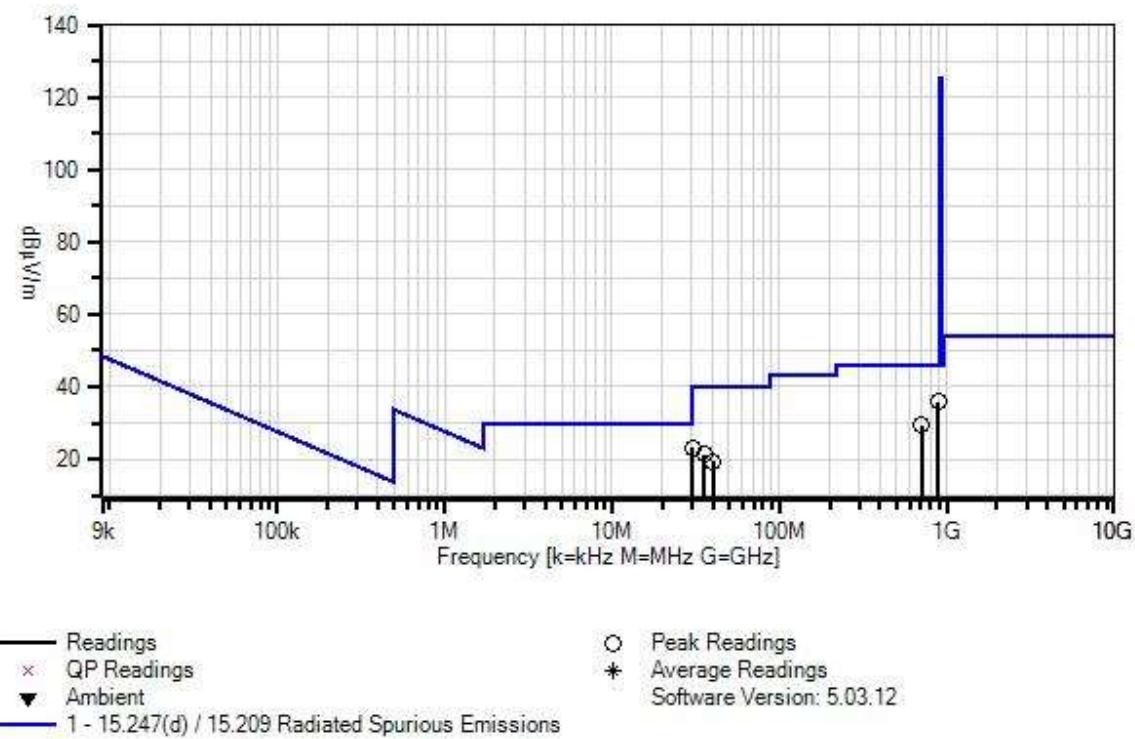

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02660	Spectrum Analyzer	E4446A	10/19/2018	10/19/2020
T1	ANP07508	Preamp	310N	10/15/2018	10/15/2020
T2	ANP06049	Attenuator	PE7002-6	5/14/2018	5/14/2020
T3	ANP00880	Cable	RG214U	5/14/2018	5/14/2020
T4	ANP01187	Cable	CNT-195	8/20/2018	8/20/2020
T5	ANP06691	Cable	PE3062-180	5/14/2018	5/14/2020
T6	AN00852	Biconilog Antenna	CBL 6111C	5/1/2018	5/1/2020
	AN00432	Loop Antenna	6502	2/19/2019	2/19/2021

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
	MHz	dB μ V	T5	T6			Table	dB μ V/m	dB μ V/m		Ant
1	891.993M	33.4	-31.9	+5.9	+3.3	+0.9	+0.0	35.7	46.0	-10.3	Horiz
			+1.4	+22.7							
2	708.673M	30.4	-32.3	+6.0	+2.9	+0.7	+0.0	29.3	46.0	-16.7	Horiz
			+1.1	+20.5							
3	30.295M	29.8	-32.1	+5.9	+0.5	+0.1	+0.0	23.2	40.0	-16.8	Horiz
			+0.2	+18.8							
4	35.387M	30.3	-32.1	+5.9	+0.5	+0.1	+0.0	21.3	40.0	-18.7	Horiz
			+0.2	+16.4							
5	40.184M	30.1	-32.1	+5.9	+0.5	+0.1	+0.0	19.3	40.0	-20.7	Horiz
			+0.2	+14.6							

Test Location: CKC Laboratories Inc. • 1120 Fulton Place • Fremont, CA 94539 • 510 249-1170
 Customer: **Tehama Wireless**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **102436** Date: **5/17/2019**
 Test Type: **Radiated Scan** Time: **13:42:50**
 Tested By: **Hieu Song Nguyenpham** Sequence#: **27**
 Software: **EMITest 5.03.12**

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Conducted Emission Frequency Range: 1GHz to 10GHz
Application: Super Term V2.21
Temperature: 22.9°C
Humidity: 44 %
Atmospheric Pressure: 102.0kPa
Highest Generation Frequency: 924MHz
Method: ANSI C 63.10 2013
Antenna Gain: 2dBi
The EUT is placed on the table and continuously receiving as intended. It is powered by an internal battery at 3.6VDC.
FHSS Lora High Channel
The EUT is placed on the table per installation position and continuously transmitting as intended. It is powered by an internal battery at 3.6VDC.

Tehama Wireless WO#: 102436 Sequence#: 27 Date: 5/17/2019
15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

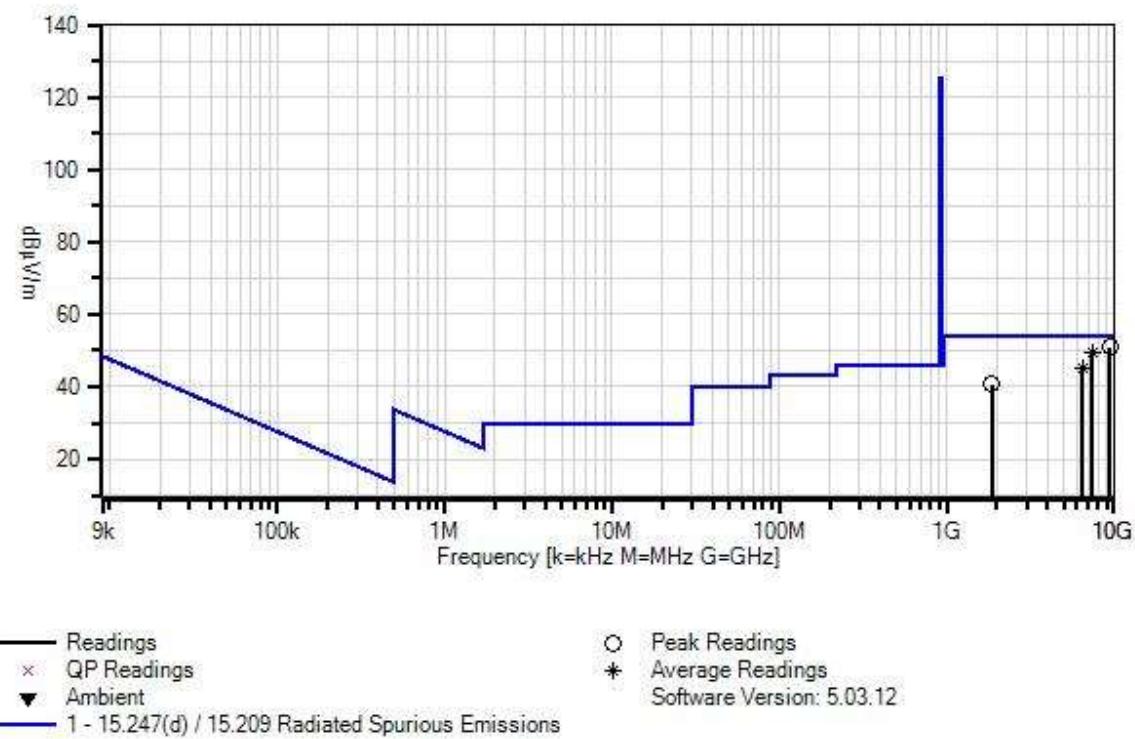

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02660	Spectrum Analyzer	E4446A	10/19/2018	10/19/2020
T1	AN03013	Cable	32022-2-2909K-36TC	6/25/2018	6/25/2020
T2	AN03607	Preamp	AMF-7D-00101800-30-10P	6/6/2017	6/6/2019
T3	AN02157	Horn Antenna-ANSI C63.5	3115	1/15/2019	1/15/2021
T4	AN03302	Cable	32026-29094K-29094K-72TC	1/15/2018	1/15/2020
T5	ANP01210	Cable	FSJ1P-50A-4A	12/18/2018	12/18/2020
T6	AN03172	High Pass Filter	HM1155-11SS	4/5/2018	4/5/2020

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6			Table	dB μ V/m	dB μ V/m		
			MHz	dB μ V	dB	dB				dB	Ant
1	9400.408M	61.5	+1.3	-59.1	+39.0	+2.6	+0.0	50.9	54.0	-3.1	Horiz
			+5.5	+0.1							
2	7392.079M	63.7	+1.1	-59.3	+36.7	+2.3	+0.0	49.4	54.0	-4.6	Horiz
	Ave		+4.8	+0.1							
^	7392.079M	69.3	+1.1	-59.3	+36.7	+2.3	+0.0	55.0	54.0	+1.0	Horiz
			+4.8	+0.1							
4	6468.094M	61.9	+1.0	-59.2	+34.5	+2.2	+0.0	44.9	54.0	-9.1	Horiz
	Ave		+4.4	+0.1							
^	6468.094M	68.4	+1.0	-59.2	+34.5	+2.2	+0.0	51.4	54.0	-2.6	Horiz
			+4.4	+0.1							
6	1847.994M	68.3	+0.5	-58.0	+26.3	+1.1	+0.0	40.7	54.0	-13.3	Horiz
			+2.2	+0.3							


Band Edge

Band Edge Summary


Frequency (MHz)	Modulation	Ant. Type	Field Strength (dBuV/m @3m)	Limit (dBuV/m @3m)	Results
614	FSK	Integral	30.0251	<46	Pass
902	FSK	Integral	44.5577	<93	Pass
928	FSK	Integral	46.4287	< 93	Pass
960	FSK	Integral	33.2563	<54	Pass
614	Lora	Integral	30.0234	<46	Pass
902	Lora	Integral	46.2377	<93	Pass
928	Lora	Integral	45.7267	< 93	Pass
960	Lora	Integral	35.1256	<54	Pass

Band Edge Plots


FSK

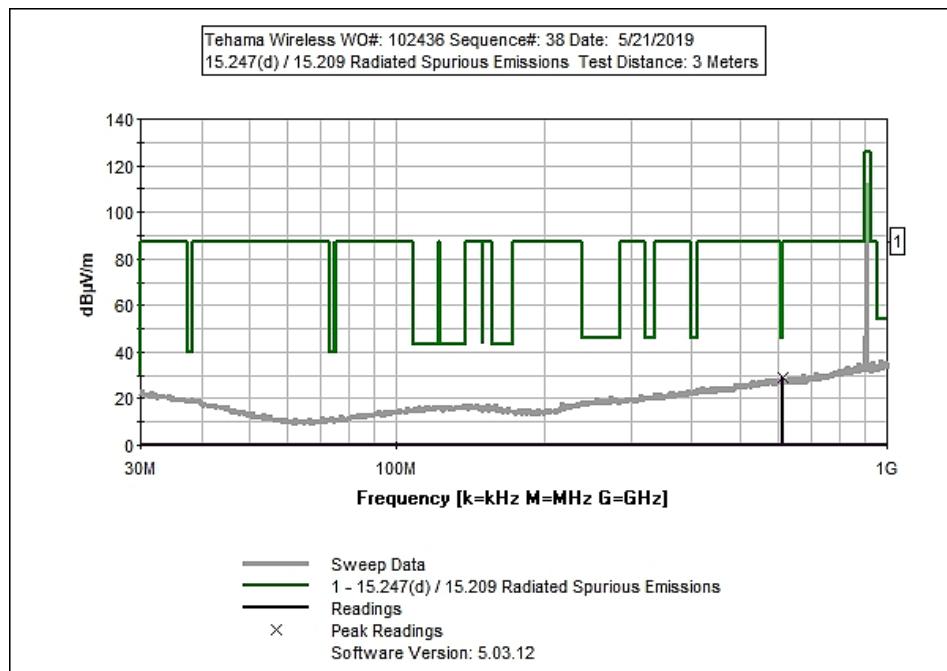


614MHz

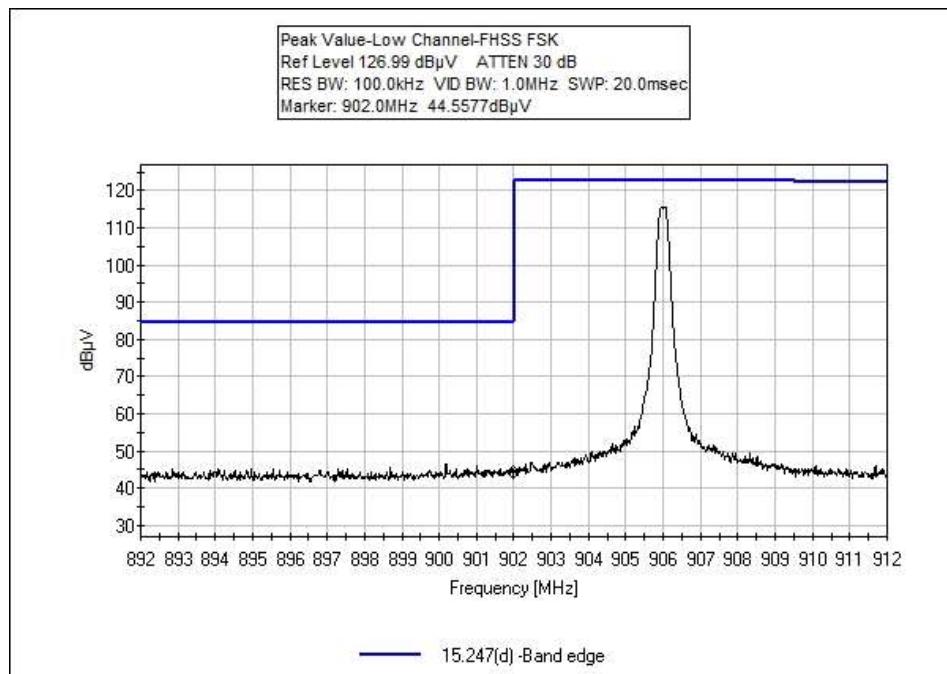

902MHz

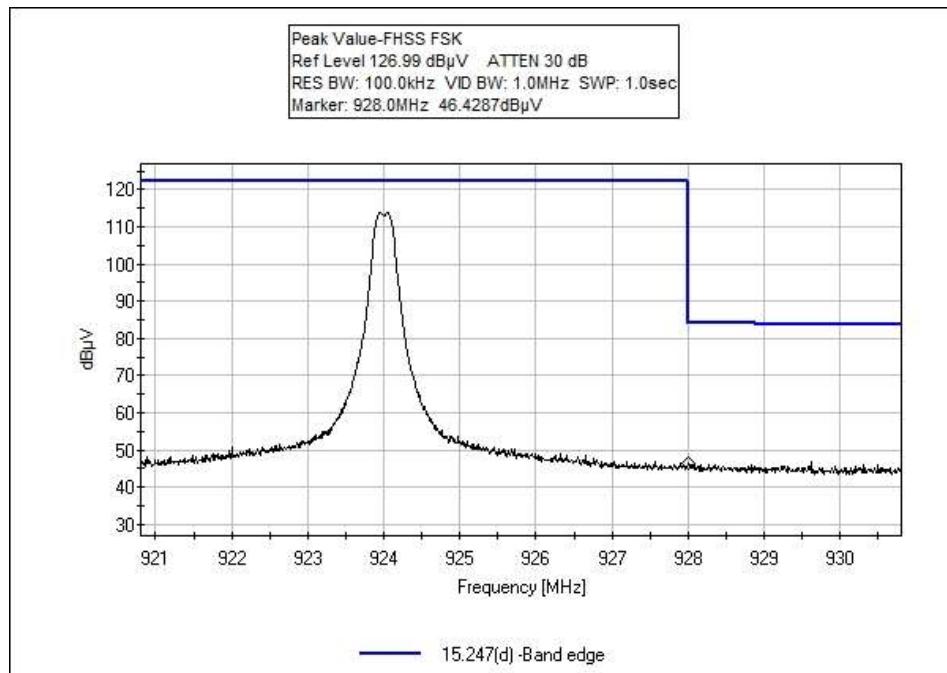


928MHz

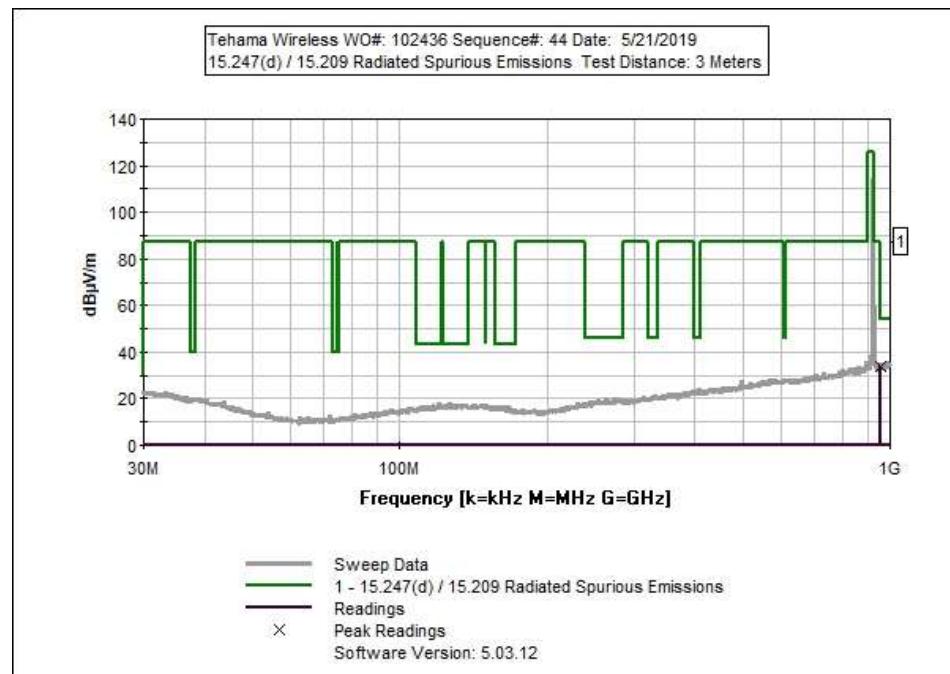


960MHz


Lora

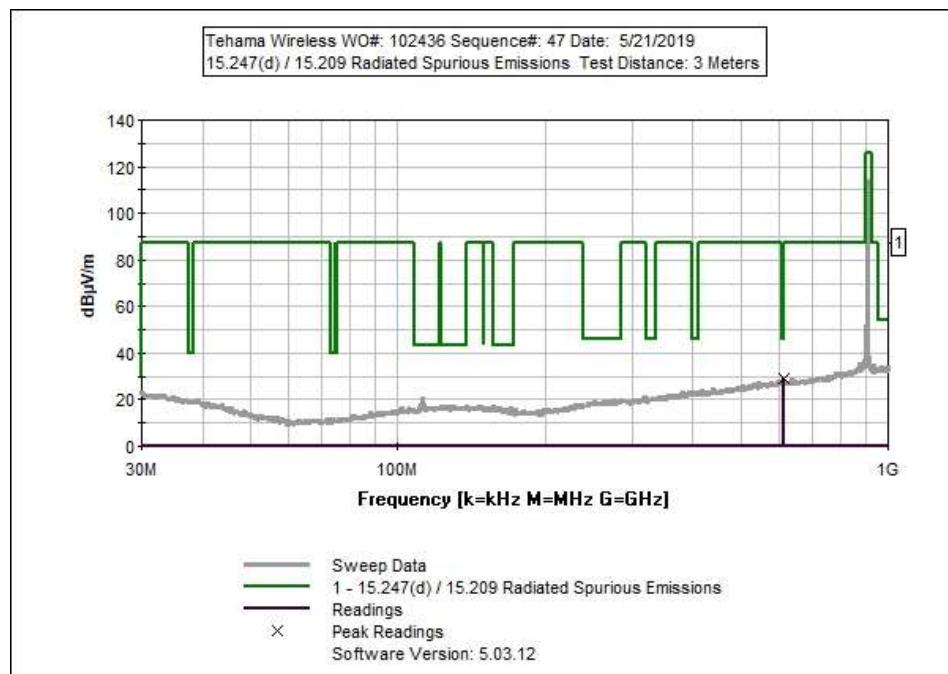


614MHz

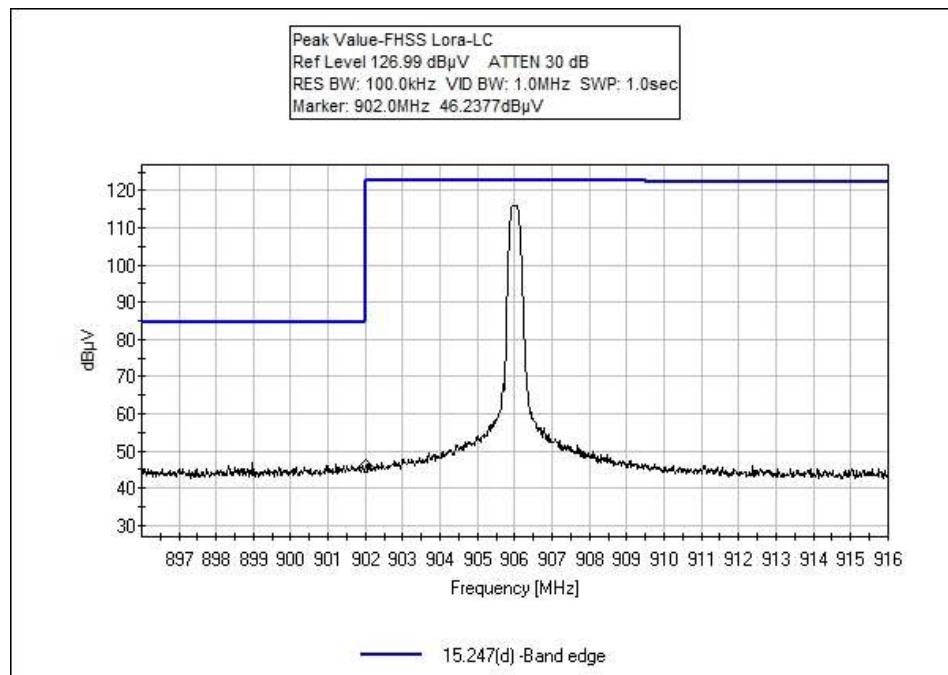

902MHz

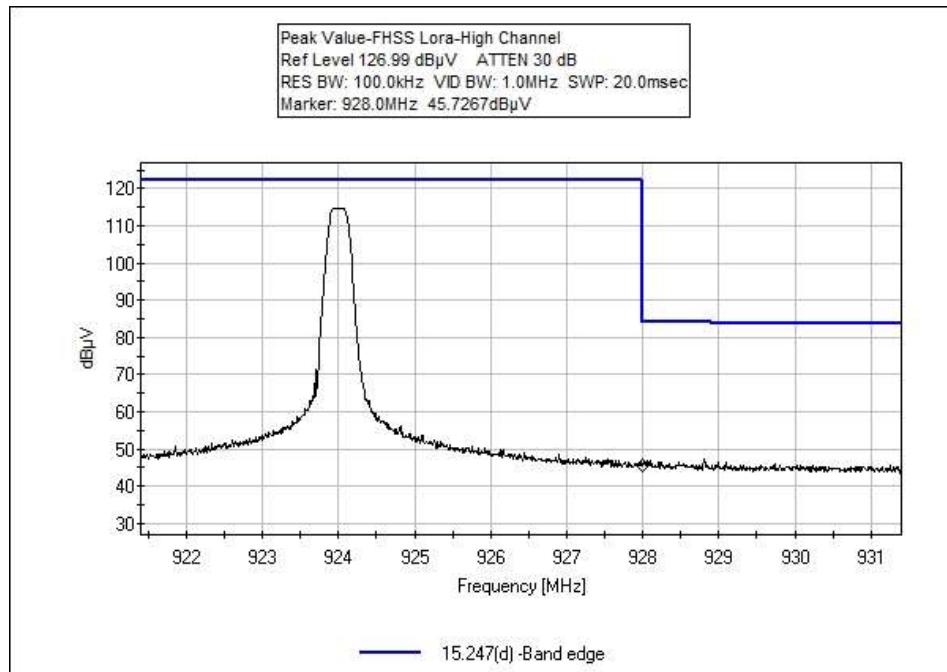

928MHz

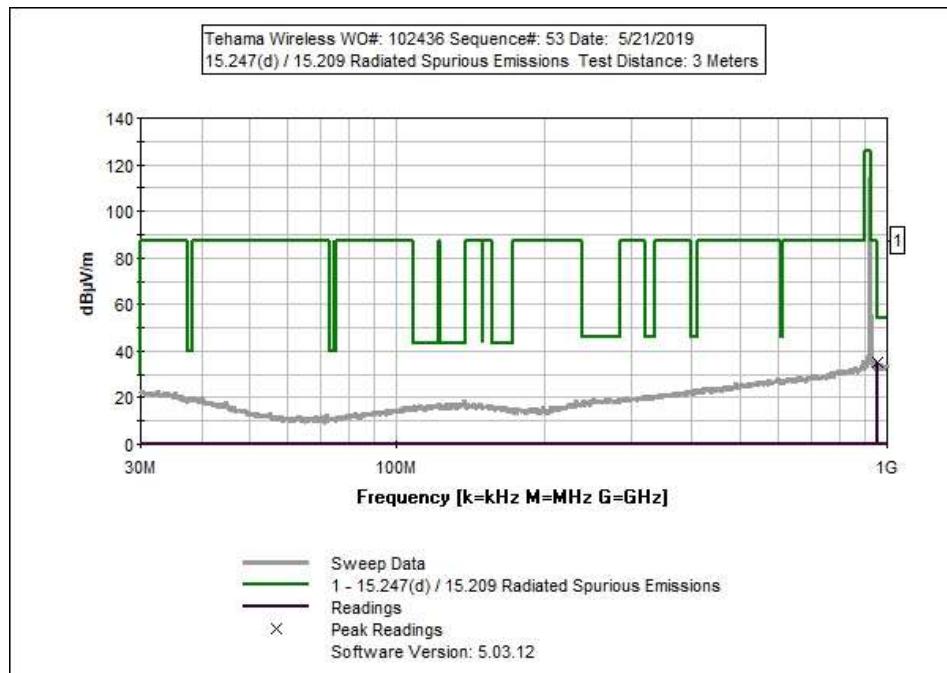

960MHz

Test Setup Photo(s)



Below 1GHz



Below 1GHz



Above 1GHz



Above 1GHz

SUPPLEMENTAL INFORMATION

Measurement Uncertainty

Uncertainty Value	Parameter
4.73 dB	Radiated Emissions
3.34 dB	Mains Conducted Emissions
3.30 dB	Disturbance Power

Uncertainties reported are worst case for all CKC Laboratories' sites and represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of $k=2$. Compliance is deemed to occur provided measurements are below the specified limits.

Emissions Test Details

TESTING PARAMETERS

Unless otherwise indicated, the following configuration parameters are used for equipment setup: The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in $\text{dB}\mu\text{V}/\text{m}$, the spectrum analyzer reading in $\text{dB}\mu\text{V}$ was corrected by using the following formula. This reading was then compared to the applicable specification limit. Individual measurements were compared with the displayed limit value in the margin column. The margin was calculated based on subtracting the limit value from the corrected measurement value; a positive margin represents a measurement exceeding the limit, while a negative margin represents a measurement less than the limit.

SAMPLE CALCULATIONS	
Meter reading	($\text{dB}\mu\text{V}$)
+ Antenna Factor	(dB/m)
+ Cable Loss	(dB)
- Distance Correction	(dB)
- Preamplifier Gain	(dB)
= Corrected Reading	($\text{dB}\mu\text{V}/\text{m}$)

TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. Unless otherwise specified, the following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used.

MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	9 kHz	150 kHz	200 Hz
RADIATED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	>1 GHz	1 MHz

SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "positive peak" detector mode. Whenever a "quasi-peak" or "average" reading was recorded, the measurement was annotated with a "QP" or an "Ave" on the appropriate rows of the data sheets. In cases where quasi-peak or average limits were employed and data exists for multiple measurement types for the same frequency then the peak measurement was retained in the report for reference, however the numbering for the affected row was removed and an arrow or caret ("^") was placed in the far left-hand column indicating that the row above takes precedence for comparison to the limit. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

Peak

In this mode, the spectrum analyzer or receiver recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature called "peak hold," the measurement device had the ability to measure intermittent or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

Quasi-Peak

Quasi-peak measurements were taken using the quasi-peak detector when the true peak values exceeded or were within 2 dB of a quasi-peak specification limit. Additional QP measurements may have been taken at the discretion of the operator.

Average

Average measurements were taken using the average detector when the true peak values exceeded or were within 2 dB of an average specification limit. Additional average measurements may have been taken at the discretion of the operator. If the specification or test procedure requires trace averaging, then the averaging was performed using 100 samples or as required by the specification. All other average measurements are performed using video bandwidth averaging. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point, the measuring device is set into the linear mode and the scan time is reduced.