



Product Service

RF - TEST REPORT

Report Number : **68.850.10.078.01** Date of Issue: 18 September 2010

Model : **K830BT**

Product Type : Bluetooth Headphone

Applicant : Fujikon Industrial Co., Ltd.

Address : 16/F., Tower 1, Grand Central Plaza, 138 Shatin Rural committee
Road, Shatin, N.T., Hong Kong

Production Facility : Fujikon Industrial Co., Ltd.

Address : 16/F., Tower 1, Grand Central Plaza, 138 Shatin Rural committee
Road, Shatin, N.T., Hong Kong

Test Result : Positive Negative

Total pages including
Appendices : 51

Jiangsu TÜV Product Service Ltd. – Shenzhen Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

Jiangsu TÜV Product Service Ltd. – Shenzhen Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. Jiangsu TÜV Product Service Ltd. – Shenzhen Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from Jiangsu TÜV Product Service Ltd. – Shenzhen Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval

1 Table of Contents

1	Table of Contents	2
2	Details about the Test Laboratory	3
3	Description of the Equipment Under Test	4
4	Summary of Test Standards	5
5	Summary of Test Results	6
6	General Remarks	7
7	Technical Requirements	8
7.1	Conducted Emission AC Power Port	8
7.2	Conducted Peak Power	12
7.3	Band edge compliance of RF emission	14
7.4	Spurious RF Conducted emission	20
7.5	Spurious radiated emissions	25
7.6	20dB Bandwidth	29
7.7	Carrier Frequency Separation	35
7.8	Number of Hopping Frequencies	39
7.9	Dwell Time	43
8	System Measurement Uncertainty	51

2 Details about the Test Laboratory

Details about the Test Laboratory

Company name: Jiangsu TÜV Product Service Ltd. – Shenzhen Branch
6th Floor, H Hall,
Century Craftwork Culture Square,
No. 4001, Fuqiang Road,
Futian District 518048,
Shenzhen, P.R.C.

Telephone: 86 755 8828 6998
Fax: 86 755 8828 5299

Company name: Audix Technology (shenzhen) Co.,Ltd
Block Shenzhen, Science & Industry Park,
Nantou, Shenzhen,
Guangdong,
China

Telephone: 86 755 2663 9496
Fax: 86 755 2663 2877

3 Description of the Equipment Under Test

Description of the Equipment Under Test

Product: Bluetooth Headphone

Model no.: K830BT

Brand Name: Fujikon

Options and accessories: NIL

Rating: 3.7VDC (supplied by Battery)
(or supplied by USB port of PC via USB cable)

RF Transmission

Frequency: 2402-2480MHz

Description of the EUT: NIL

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.(SHIELD)	S/N(LENGTH)
Laptop	IBM	T410	----



Product Service

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

5 Summary of Test Results

Technical Requirements					
FCC Part 15 Subpart C	Test Condition	Pages	Test Result		
			Pass	Fail	N/A
15.207 Conducted Emission AC Power Port	8		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
15.247 (b) (1) Conducted peak output power	12		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
15.247(d) Band edge compliance of RF emissions	14		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
15.247(d) Spurious RF conducted emissions	20		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
15.247(d) 15.209 Spurious radiated emissions	25		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
15.247(a)(1) 20dB bandwidth	29		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
15.247(a)(1) Carrier frequency separation	35		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
15.247(a)(1)(iii) Number of hopping frequencies	39		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
15.247(a)(1)(iii) Dwell Time	43		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: TTC-BT-K830 complies with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C Rules.

All the configurations of the product were tested and only the worst test results are listed in the report.

SUMMARY:

All tests according to the regulations cited on page 5 were

- Performed

- **Not** Performed

The Equipment Under Test

- **Fulfills** the general approval requirements.

- **Does not** fulfill the general approval requirements.

Sample Received Date: 8 September 2010

Testing Start Date: 10 September 2010

Testing End Date: 19 September 2010

- Jiangsu TÜV Product Service Ltd. – Shenzhen Branch -

Reviewed by: Prepared by:



Paul Yu
Assistant EMC Manager



Phoebe Hu
Senior EMC Project Engineer

7 Technical Requirement

7.1 Conducted Emission

Test Method

- 1 The EUT was placed on a table, which is 0.8m above ground plane
- 2 The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
- 3 Maximum procedure was performed to ensure EUT compliance
- 4 A EMI test receiver is used to test the emissions from both sides of AC line


Limit

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

Decreasing linearly with logarithm of the frequency

Remark: This test was carried out in all the test modes, here only the worst test result was shown.

Conducted Emission

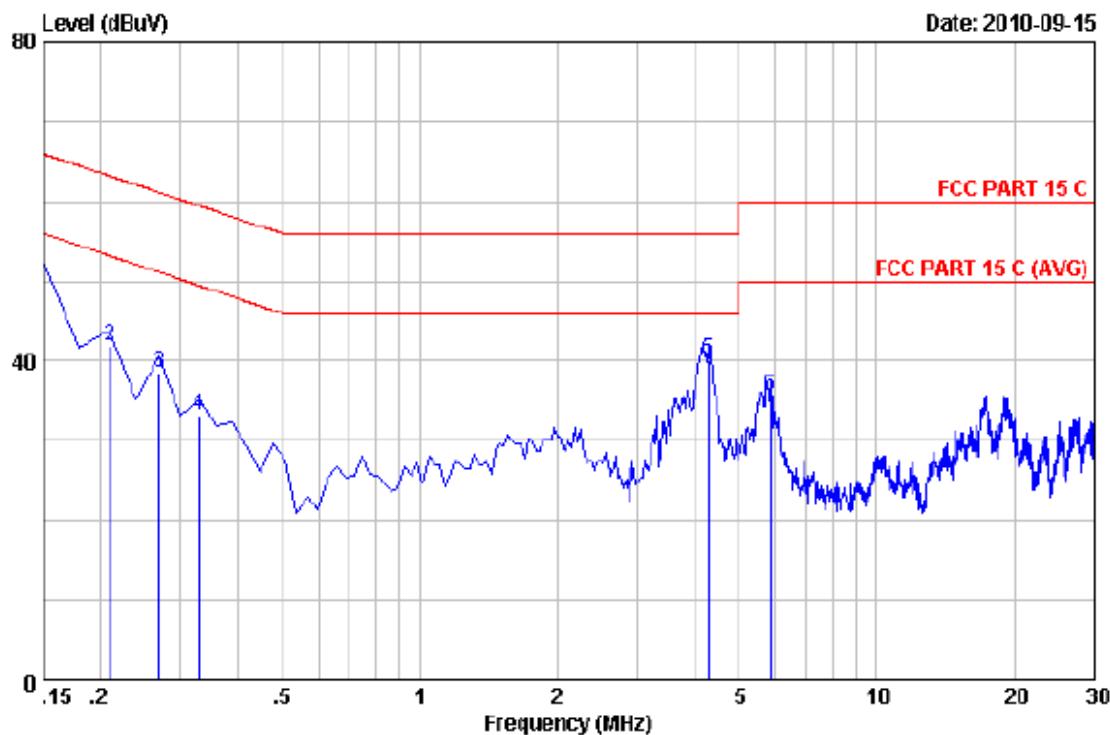


Site no : 1#conduction Data No : 4
 Dis./Ant. : ** 2010 ESH2-Z5 LINE
 Limit : FCC PART 15 C
 Env./Ins. : Temp:23' Humi:54% ESH910 Engineer : Paul Tian
 EUT : Bluetooth Headset With Microphone
 Power Rating :
 Test Mode : Tx
 :

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Emission				
				Reading (dBuV)	Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15000	0.23	9.88	38.49	48.60	66.00	17.40	QP
2	0.20970	0.22	9.88	31.87	41.97	63.22	21.25	QP
3	0.26940	0.22	9.88	28.42	38.52	61.14	22.62	QP
4	0.32910	0.23	9.88	23.01	33.12	59.47	26.35	QP
5	4.269	0.27	9.94	29.80	40.01	56.00	15.99	QP
6	5.851	0.29	9.95	25.42	35.66	60.00	24.34	QP

Remarks: 1. Emission Level=LISN Factor+Cable Loss (Include 10dB pulse limit)
 +Reading.
 2. If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

Conducted Emission

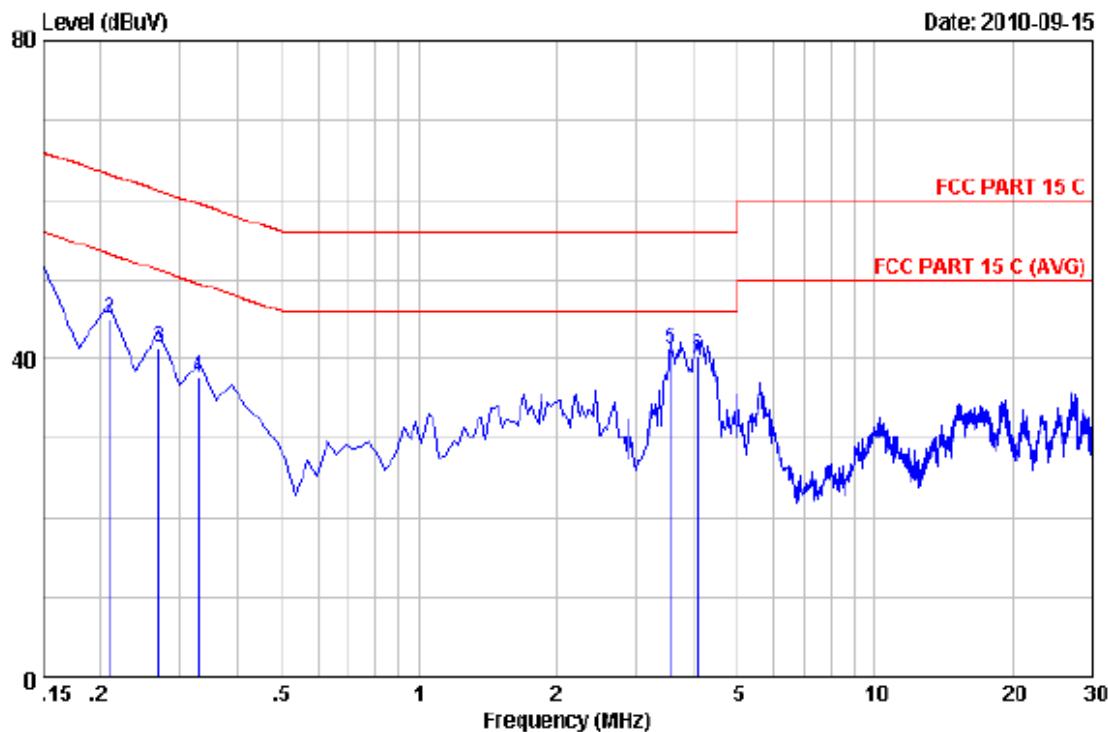

Site no : 1#conduction Data No : 3
 Dis./Ant. : ** 2010 ESH2-Z5 NEUTRAL
 Limit : FCC PART 15 C
 Env./Ins. : Temp:23' Humi:54% ESH310 Engineer : Paul Tian
 EUT : Bluetooth Headset With Microphone
 Power Rating :
 Test Mode : Tx
 :

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission			
					Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15000	0.21	9.88	35.74	45.83	66.00	20.17	QP
2	0.20970	0.21	9.88	34.91	45.00	63.22	18.22	QP
3	0.26940	0.21	9.86	31.39	41.48	61.14	19.66	QP
4	0.32910	0.22	9.88	27.67	37.77	59.47	21.70	QP
5	3.553	0.27	9.93	31.04	41.24	56.00	14.76	QP
6	4.090	0.26	9.94	30.14	40.36	56.00	15.64	QP

Remarks: 1. Emission Level=LISN Factor+Cable Loss (Include 10dB pulse limit)
 +Reading.
 2. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.



Product Service

Test Equipment List

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
Test Receiver	Rohde & Schwarz	ESHS10	838693/001	Dec.18, 10
L.I.S.N.#1	Rohde & Schwarz	ESH2-Z5	834066/011	Mar.30, 11
L.I.S.N.#3	Kyoritsu	KNW-242C	8-1920-1	May.08, 11
Terminator	Hubersuhner	50Ω	No. 1	May.08, 11
Terminator	Hubersuhner	50Ω	No. 2	May.08, 11
RF Cable	Fujikura	3D-2W	LISN Cable 1#	May.08, 11
Coaxial Switch	Anritsu	MP59B	M55367	May.08, 11
Passive Probe	Rohde & Schwarz	ESH2-Z3	299.7810.52	May.08, 11
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100341	May.08, 11

7.2 Conducted peak output power

Test Method

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.

Limits for conducted peak output power measurements

Frequency Range MHz	Limit W	Limit dBm
2400-2483	≤1	≤30

Conducted peak output power

Bluetooth Mode GFSK modulation Test Result

Frequency MHz	Conducted Peak		Result
	Output Power	dBm	
CH3 2402MHz	4.65		Pass
CH6 2441MHz	4.96		Pass
CH9 2480MHz	4.63		Pass

Bluetooth Mode 8DPSK modulation Test Result

Frequency MHz	Conducted Peak		Result
	Output Power	dBm	
CH3 2402MHz	4.19		Pass
CH6 2441MHz	4.43		Pass
CH9 2480MHz	3.77		Pass



Product Service

Test Equipment

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL DUE DATE
Spectrum Analyzer	Agilent	E4446A	US44300459	May 08, 2011

7.3 Band edge compliance of RF emissions

Test Method

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.4 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW and VBW to 1MHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength.

The conducted RF band edge was measured by using a spectrum analyzer. Set span wide enough to capture the highest in-band emission and the emission at the band edge. Set RBW and VBW to 100kHz, to measure the conducted peak band edge.

Limits

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Frequency MHz	Limit Average dBuV/m	Limit Peak dBuV/m
Below 2390 Above 2483.5	54	74




Product Service

Band edge compliance of RF emissions

Bluetooth Mode GFSK Modulation Test Result:

Lower edge peak Plot:

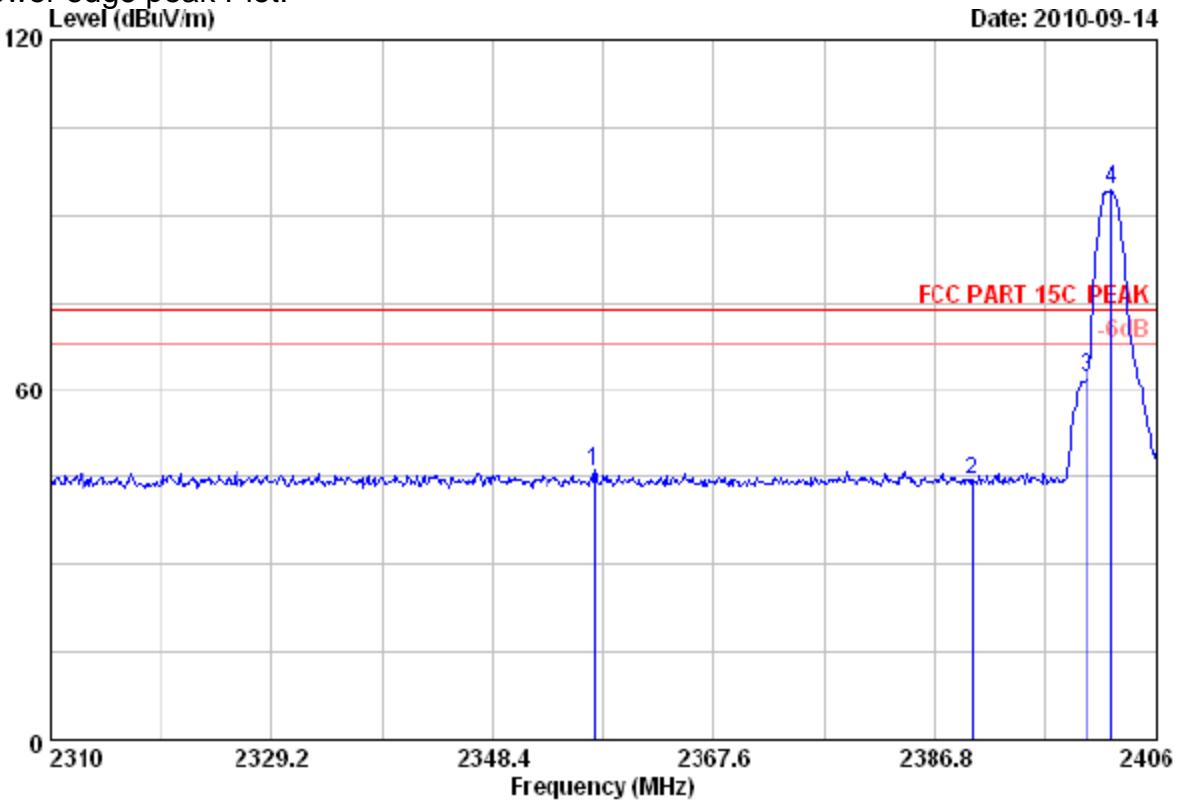


Site no.	: 3m Chamber	Data no. :	6
Dis. / Ant.	: 3m 3115(0911)	Ant. pol. :	HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24.2°/49%	Engineer :	Leo-Li
EUT	: Bluetooth Headset With Microphone		
Power	: DC 3.7V		
Test mode	: GFSK Tx 2402MHz		
M/N	: K830BT		

Freq. (MHz)	Ant. Factor (dB/m)	Cable		Amp.		Emission			
		loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark	
1 2357.232	29.42	7.31	36.63	45.99	46.09	74.00	27.91	Peak	
2 2390.000	29.44	7.39	36.62	44.20	44.41	74.00	29.59	Peak	
3 2400.000	29.44	7.43	36.62	61.81	62.06	74.00	11.94	Peak	
4 2402.160	29.44	7.43	36.62	93.87	94.12	74.00	-20.12	Peak	

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Upper edge peak Plot:

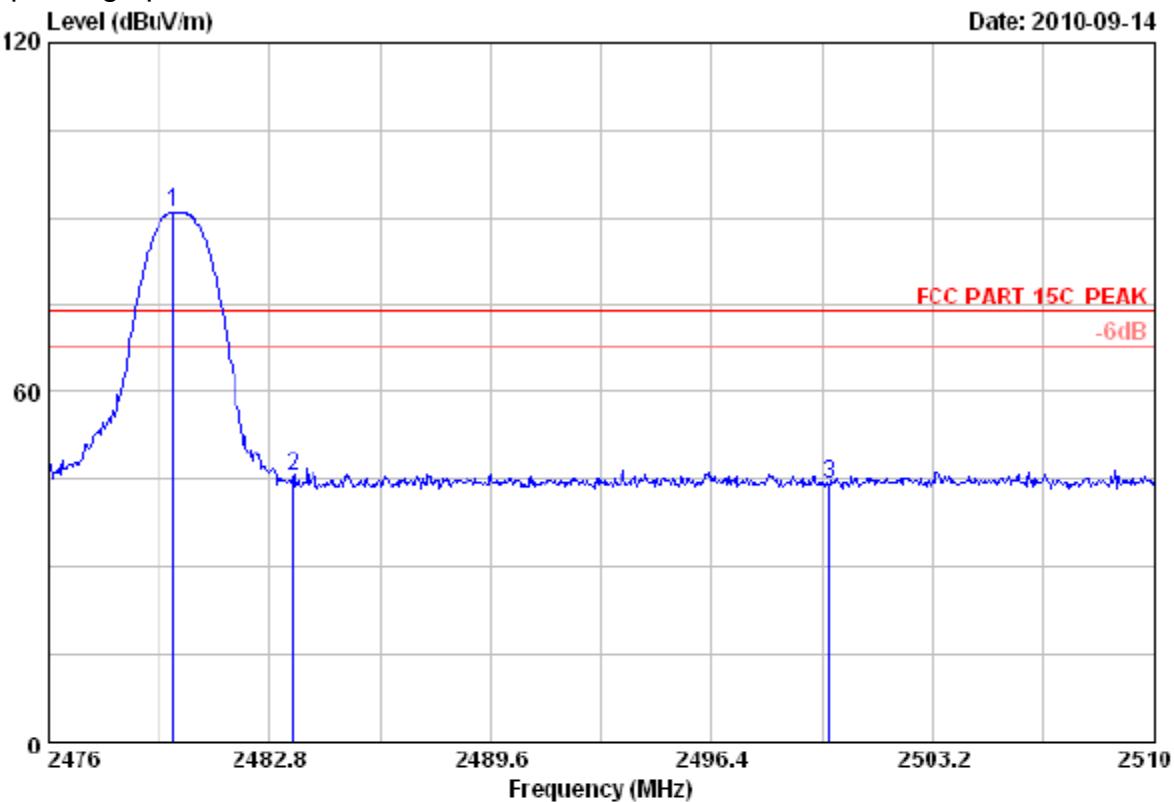

Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24.2°/49% Engineer : Leo-Li
 EUT : Bluetooth Headset With Microphone
 Power : DC 3.7V
 Test mode : GFSK Tx 2480MHz
 M/N : K830BT

	Ant.	Cable	Amp.	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2479.842	29.49	7.58	36.60	90.44	90.91	74.00	-16.91 Peak
2	2483.500	29.49	7.58	36.60	45.00	45.47	74.00	28.53 Peak
3	2500.000	29.50	7.62	36.60	43.65	44.17	74.00	29.83 Peak

Remarks:

1. Emission Level = Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




Product Service

Band edge compliance of RF emissions

Bluetooth Mode 8DPSK Modulation Test Result:

Lower edge peak Plot:

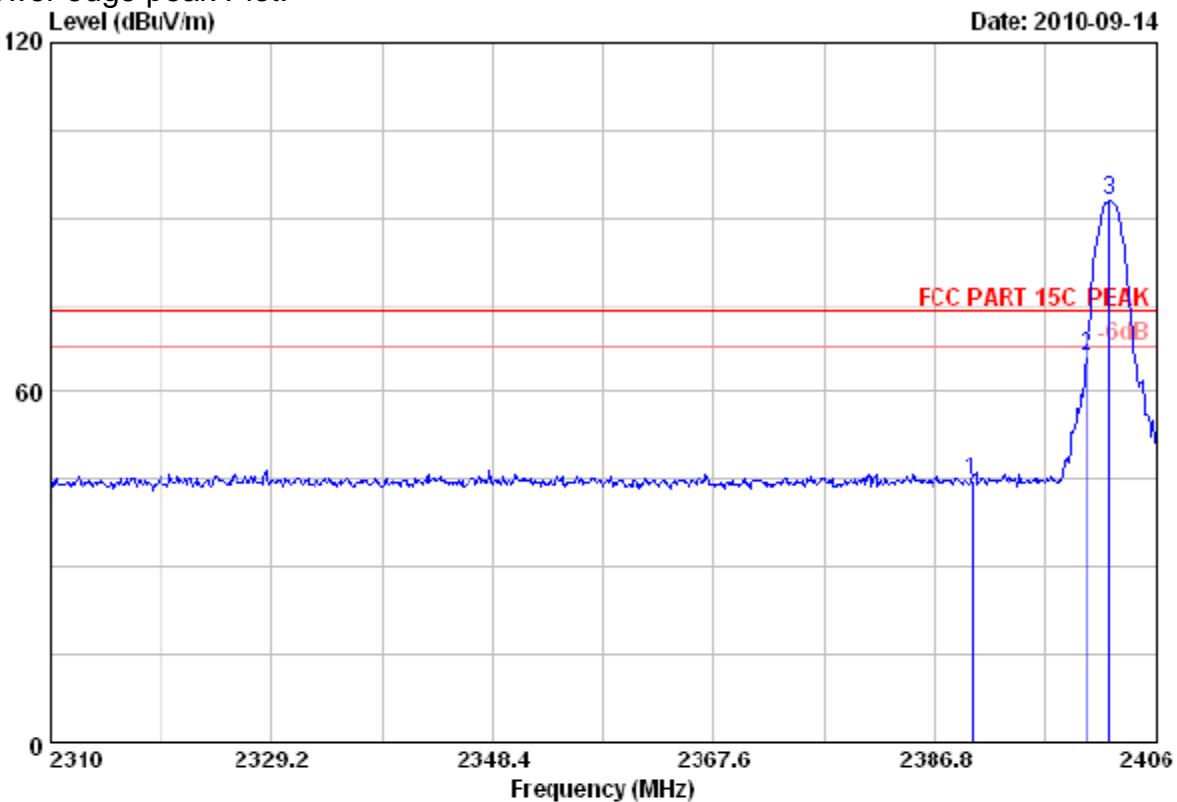


Site no.	: 3m Chamber	Data no. :	32
Dis. / Ant.	: 3m 3115(0911)	Ant. pol. :	HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24.2'/49%	Engineer :	Leo-Li
EUT	: Bluetooth Headset With Microphone		
Power	: DC 3.7V		
Test mode	: 8DPSK Tx 2402MHz		
M/N	: K830BT		

Ant.	Cable Amp.			Emission					
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	
1 2390.000	29.44	7.39	36.62	44.69	44.90	74.00	29.10	Peak	
2 2400.000	29.44	7.43	36.62	66.03	66.28	74.00	7.72	Peak	
3 2401.960	29.44	7.43	36.62	92.59	92.84	74.00	-10.84	Peak	

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Upper edge peak Plot:

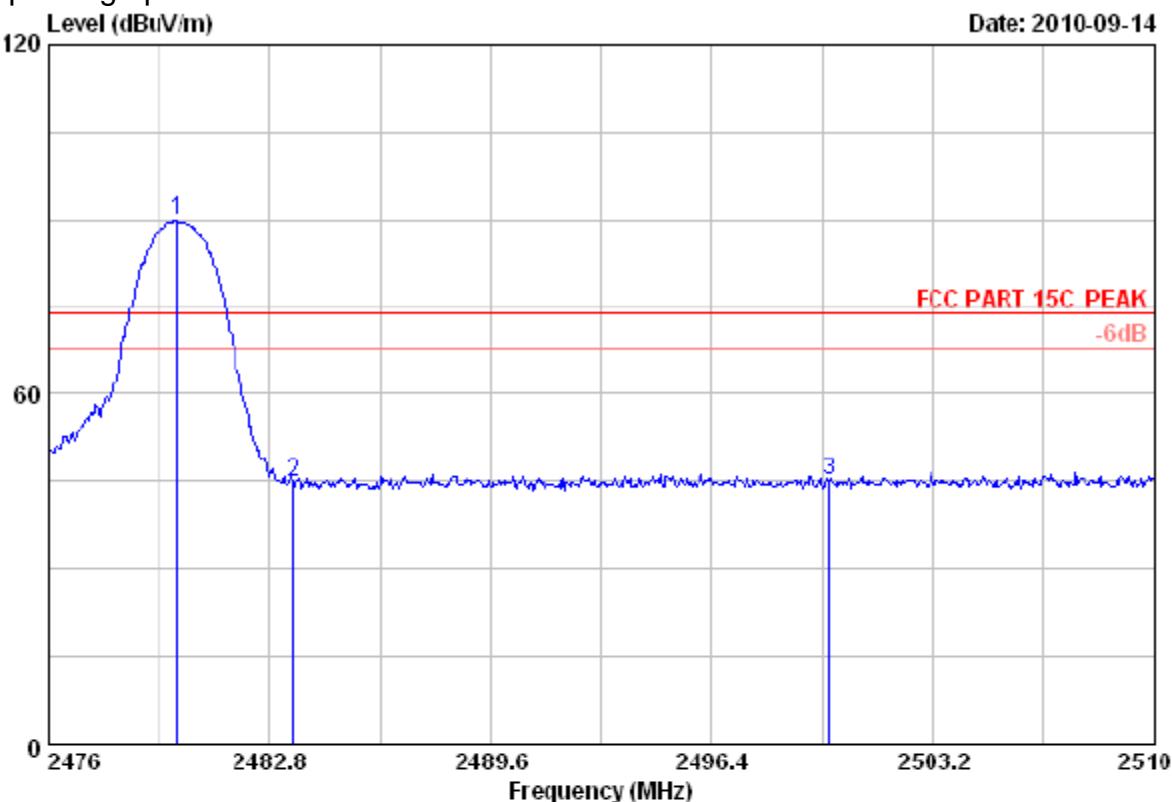

Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24.2°/49% Engineer : Leo-Li
 EUT : Bluetooth Headset With Microphone
 Power : DC 3.7V
 Test mode : 8DPSK Tx 2480MHz
 M/N : K830BT

	Ant.	Cable	Amp.	Emission				
Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2479.978	29.49	7.58	36.60	89.44	89.91	74.00	-15.91 Peak
2	2483.500	29.49	7.58	36.60	44.25	44.72	74.00	29.28 Peak
3	2500.000	29.50	7.62	36.60	44.70	45.22	74.00	28.78 Peak

Remarks:

1. Emission Level = Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



Product Service

Test Equipment List

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL DUE DATE
Spectrum	Agilent	E4446A	US44300459	May 08, 2011
Amp	HP	8449B	3008A02495	May 08, 2011
Antenna	EMCO	3115	9607-4877	May 17, 2011
Bilog Antenna	Schaffner	CBL6111C	2598	Dec.14, 2010
HF Cable	Hubersuhne	Sucoflex104	---	May 08, 2011

7.4 Spurious RF conducted emissions

Test Method

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.


The resolution bandwidth(RBW) and the video bandwidth (VBW) of the spectrum analyzer were respectively set to 100kHz and 100kHz.

Limit


Frequency Range MHz	Limit (dBc)
1000-25000	-20

Spurious RF conducted emissions

Bluetooth Mode GFSK Modulation Test Result:
2402MHz

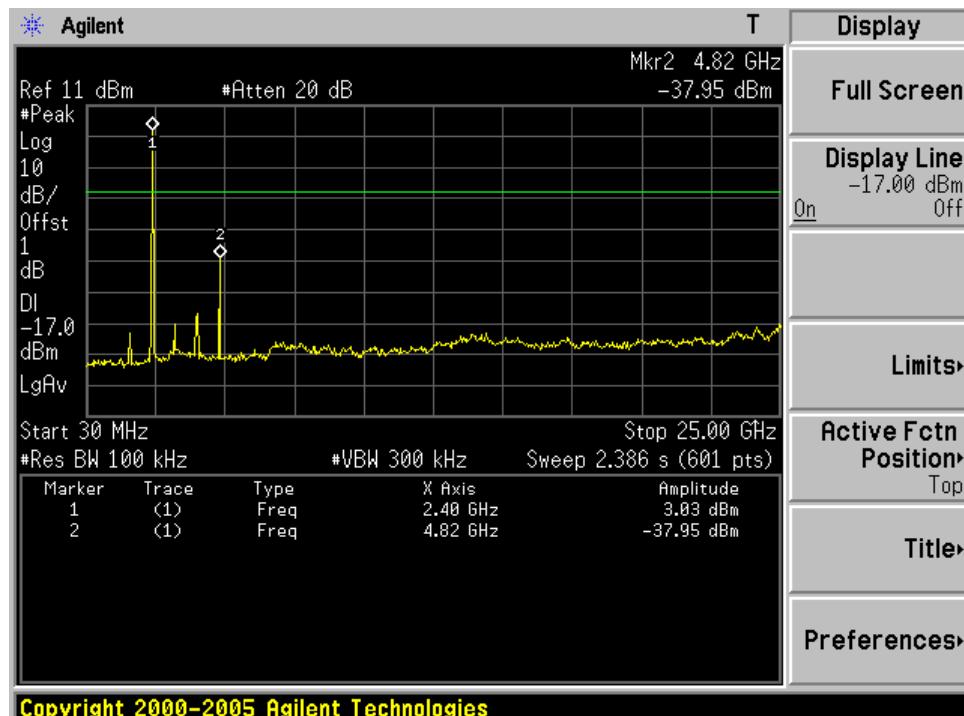


2441MHz

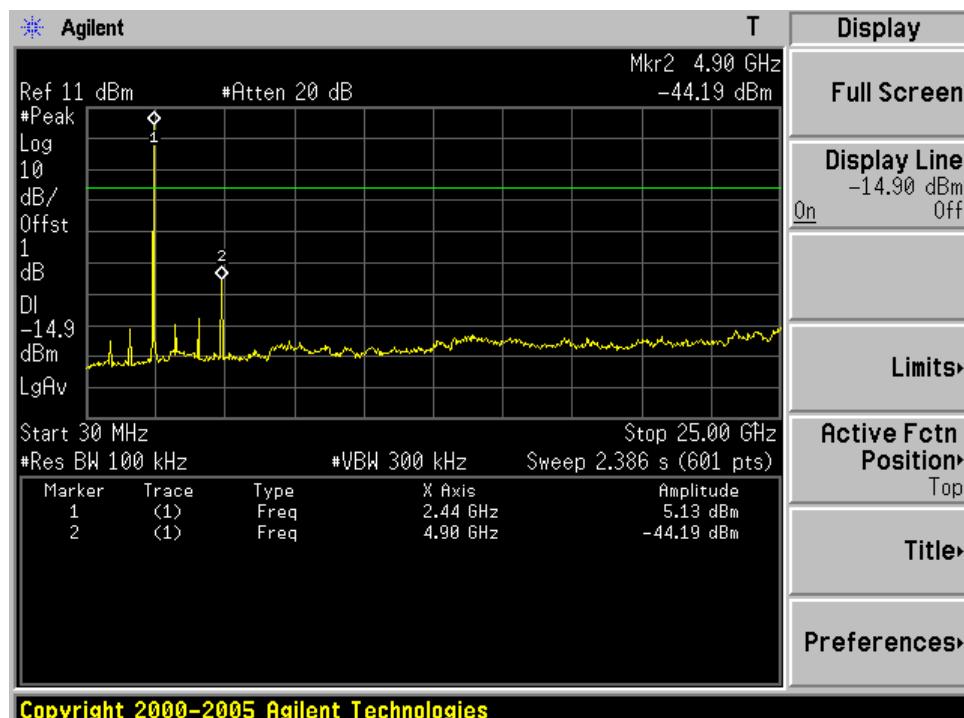


Spurious RF conducted emissions

2480MHz

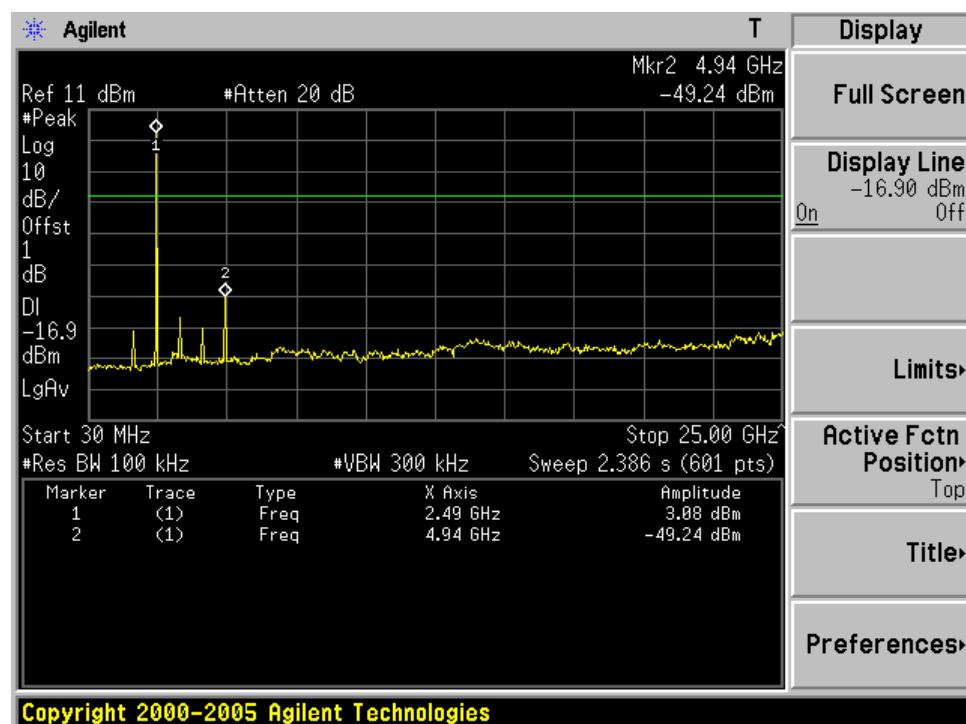


Bluetooth Mode 8DPSK Modulation Test Result:

2402MHz

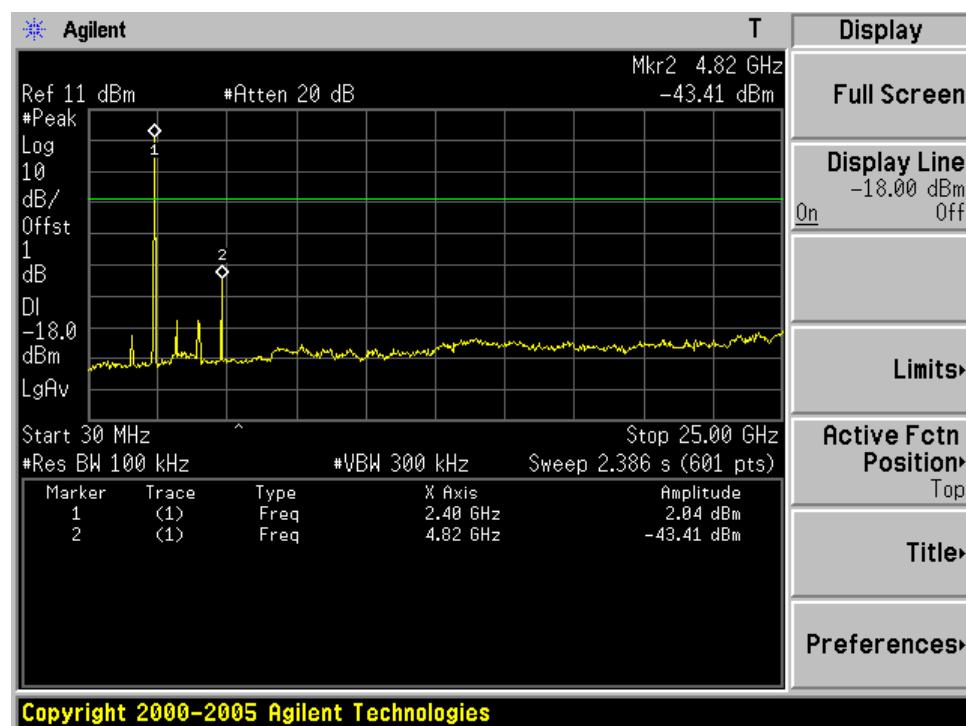


Spurious RF conducted emissions

2441MHz

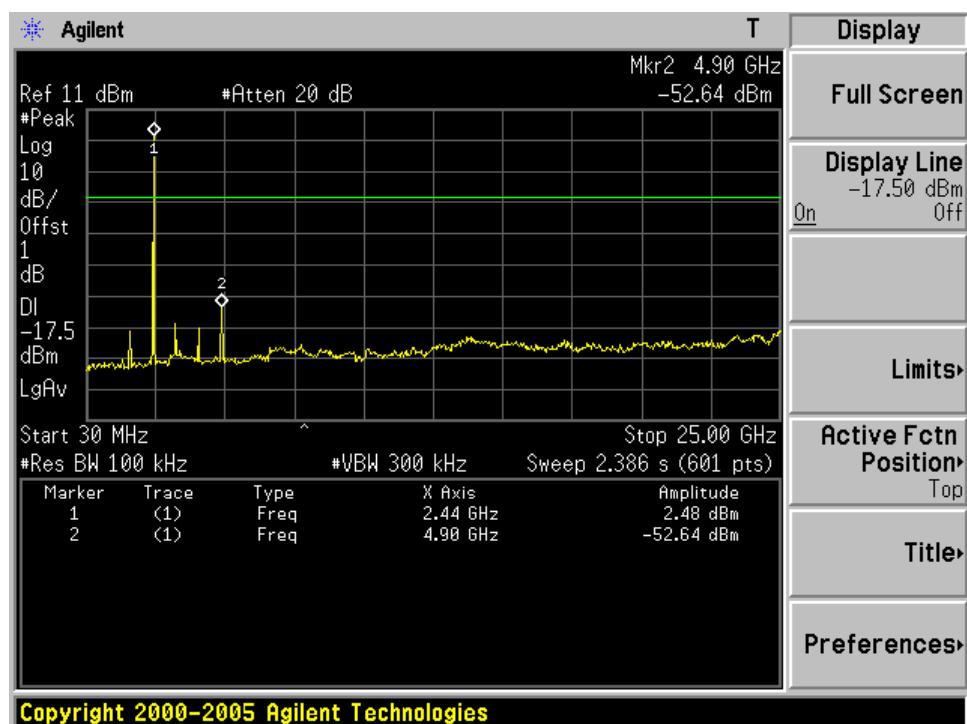

2480MHz

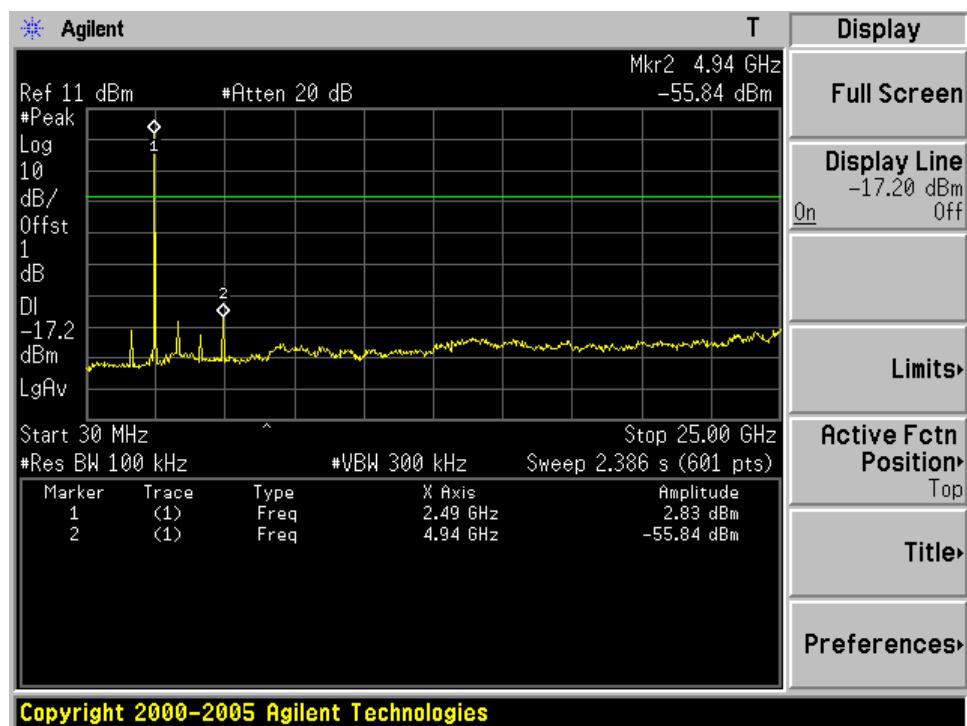



Product Service

Test Equipment List

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL.DUE.DATE
Spectrum Analyzer	Agilent	E4446A	US44300459	May 08, 2011

7.5 Spurious radiated emissions

Test Method

- 1 The EUT is placed on a turntable, which is 0.8m above ground plane.
- 2 The turntable shall be rotated for 360 degrees to determine the position of maximum emission level
- 3 EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 4 Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5 Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

Limit

Frequency MHz	Field Strength uV/m	Field Strength dB μ V/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK

Radiated Emission

Bluetooth Mode GFSK Modulation 2402MHz Test Result

Frequency	Antenna Factor	Cable Loss	Amp. Factor	Reading	Emission Level	Polarization	Limit	Detector	Result
MHz	dB/m	dB	dB	dBuV	dBuV/m		dB μ V/m		
30.000	20.00	0.61	-	36.07	28.68	Vertical	40	QP	Pass
57.160	6.66	0.83	-	14.29	21.78	Horizontal	40	QP	Pass
4804.000	34.30	10.62	35.10	52.16	61.98	Horizontal	74	PK	Pass
4804.000	34.30	10.62	35.10	43.16	52.98	Horizontal	54	AV	Pass
4804.000	34.30	10.62	35.10	51.56	61.38	Vertical	74	PK	Pass
4804.000	34.30	10.62	35.10	42.56	52.38	Vertical	54	AV	Pass
7206.000	-	-	-	-	-	-	-	-	-
7206.000	-	-	-	-	-	-	-	-	-

Bluetooth Mode GFSK Modulation 2441MHz Test Result

Frequency	Antenna Factor	Cable Loss	Amp. Factor	Reading	Emission Level	Polarization	Limit	Detector	Result
MHz	dB/m	dB	dB	dBuV	dBuV/m		dB μ V/m		
4882.000	34.41	10.71	35.03	49.77	59.86	Horizontal	74	PK	Pass
4882.000	34.41	10.71	35.03	40.77	50.86	Horizontal	54	AV	Pass
4882.000	34.41	10.71	35.03	49.02	59.11	Vertical	74	PK	Pass
4882.000	34.41	10.71	35.03	40.02	50.11	Vertical	54	AV	Pass
7323.000	-	-	-	-	-	-	-	-	-
7323.000	-	-	-	-	-	-	-	-	-

Bluetooth Mode GFSK Modulation 2480MHz Test Result

Frequency	Antenna Factor	Cable Loss	Amp. Factor	Reading	Emission Level	Polarization	Limit	Detector	Result
MHz	dB/m	dB	dB	dBuV	dBuV/m		dB μ V/m		
4960.000	34.54	10.80	34.95	46.15	56.54	Horizontal	74	PK	Pass
4960.000	34.54	10.80	34.95	37.15	47.54	Horizontal	54	AV	Pass
4960.000	34.54	10.80	34.95	45.57	55.96	Vertical	74	PK	Pass
4960.000	34.54	10.80	34.95	36.57	46.96	Vertical	54	AV	Pass
7440.000	-	-	-	-	-	-	-	-	-
7440.000	-	-	-	-	-	-	-	-	-

Remark:

- (1) Emission Level= Antenna Factor +Cable Loss - Amp. factor + Reading
- (2) Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.

Radiated Emission

Bluetooth Mode 8DPSK Modulation 2402MHz Test Result

Frequency	Antenna Factor	Cable Loss	Amp. Factor	Reading	Emission Level	Polarization	Limit	Detector	Result
MHz	dB/m	dB	dB	dBuV	dBuV/m		dB μ V/m		
385.020	16.00	2.85	-	5.38	24.23	Horizontal	46.0	QP	Pass
146.400	11.84	1.14	-	32.06	17.04	Vertical	43.5	QP	Pass
4804.000	34.30	10.62	35.10	48.74	58.56	Horizontal	74	PK	Pass
4804.000	34.30	10.62	35.10	39.80	49.62	Horizontal	54	AV	Pass
4804.000	34.30	10.62	35.10	50.38	60.20	Vertical	74	PK	Pass
4804.000	34.30	10.62	35.10	41.48	51.30	Vertical	54	AV	Pass
7206.000	-	-	-	-	-	-	-	-	-
7206.000	-	-	-	-	-	-	-	-	-

Bluetooth Mode 8DPSK Modulation 2441MHz Test Result

Frequency	Antenna Factor	Cable Loss	Amp. Factor	Reading	Emission Level	Polarization	Limit	Detector	Result
MHz	dB/m	dB	dB	dBuV	dBuV/m		dB μ V/m		
4882.000	34.41	10.71	35.03	46.52	56.61	Horizontal	74	PK	Pass
4882.000	34.41	10.71	35.03	37.62	47.71	Horizontal	54	AV	Pass
4882.000	34.41	10.71	35.03	46.88	56.97	Vertical	74	PK	Pass
4882.000	34.41	10.71	35.03	38.00	48.09	Vertical	54	AV	Pass
7323.000	-	-	-	-	-	-	-	-	-
7323.000	-	-	-	-	-	-	-	-	-

Bluetooth Mode 8DPSK Modulation 2480MHz Test Result

Frequency	Antenna Factor	Cable Loss	Amp. Factor	Reading	Emission Level	Polarization	Limit	Detector	Result
MHz	dB/m	dB	dB	dBuV	dBuV/m		dB μ V/m		
4960.000	34.54	10.80	34.95	44.05	54.44	Horizontal	74	PK	Pass
4960.000	34.54	10.80	34.95	35.15	45.54	Horizontal	54	AV	Pass
4960.000	34.54	10.80	34.95	45.17	55.56	Vertical	74	PK	Pass
4960.000	34.54	10.80	34.95	36.27	46.66	Vertical	54	AV	Pass
7440.000	-	-	-	-	-	-	-	-	-
7440.000	-	-	-	-	-	-	-	-	-

Remark:

- (1) Emission Level= Antenna Factor +Cable Loss - Amp. factor + Reading
- (2) Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.



Product Service

Test Equipment List

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL DUE DATE
Spectrum	Agilent	E4446A	US44300459	May 08, 2011
Amp	HP	8449B	3008A02495	May 08, 2011
Antenna	EMCO	3115	9607-4877	May 17, 2011
Bilog Antenna	Schaffner	CBL6111C	2598	Dec.14, 2010
HF Cable	Hubersuhne	Sucoflex104	---	May 08, 2011

7.6 20 dB bandwidth

Test Method

- 1 Place the EUT on the table and set it in the transmitting mode.
- 2 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3 Mark the peak frequency and -20dB (upper and lower) frequency.

Limit


Limit [kHz]

N/A



20 dB bandwidth

Bluetooth Mode GFSK Modulation test result

Frequency	Bandwidth	Result
MHz	kHz	
2402	831	Pass
2441	833	Pass
2480	831	Pass

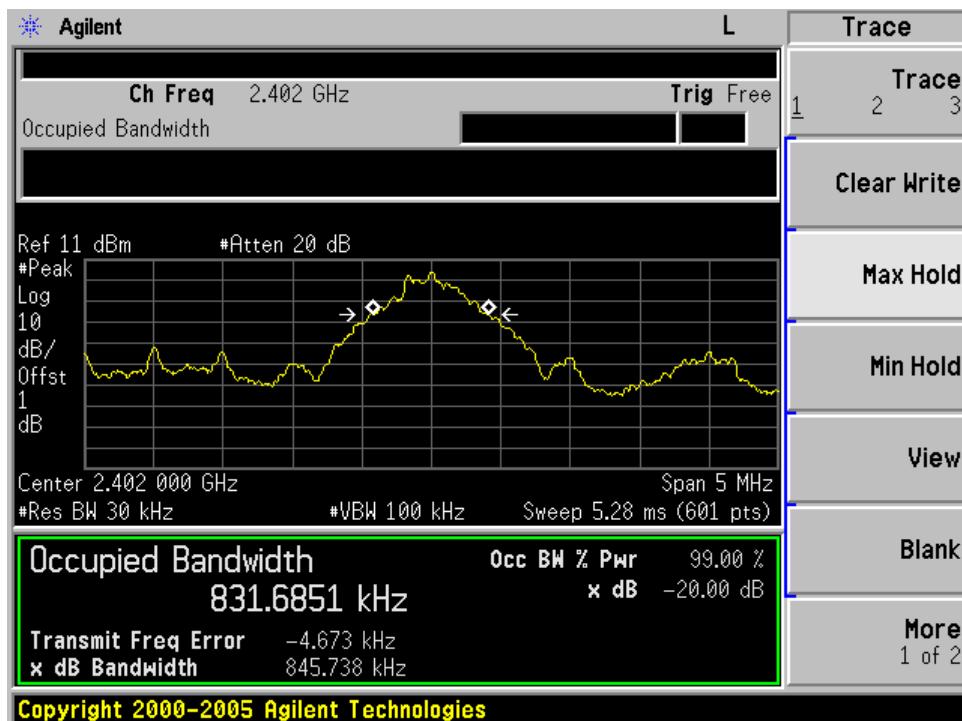


20 dB bandwidth

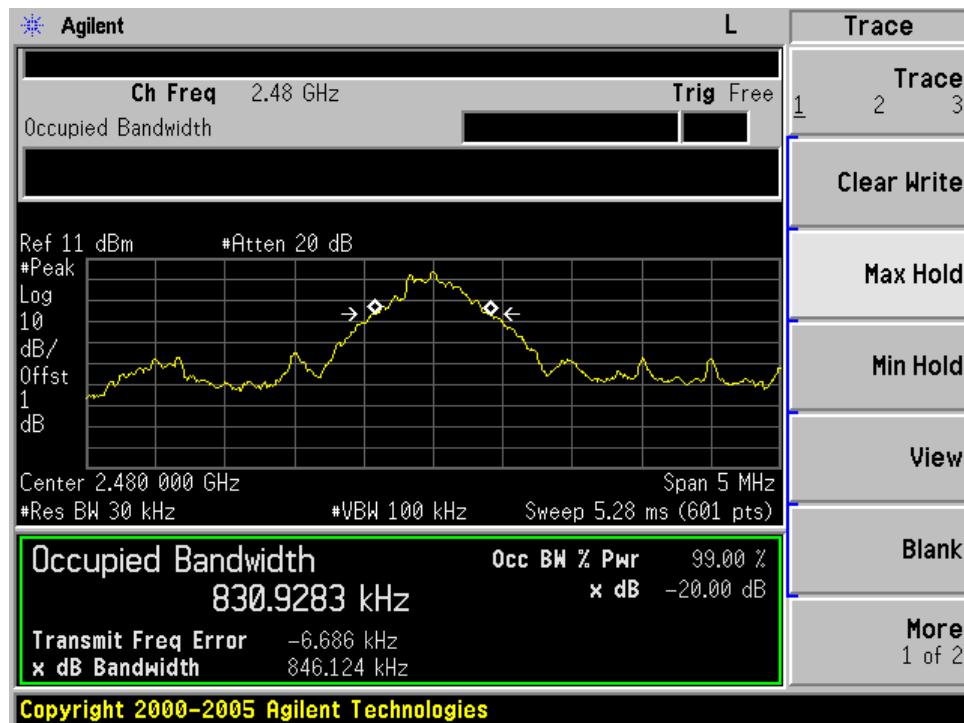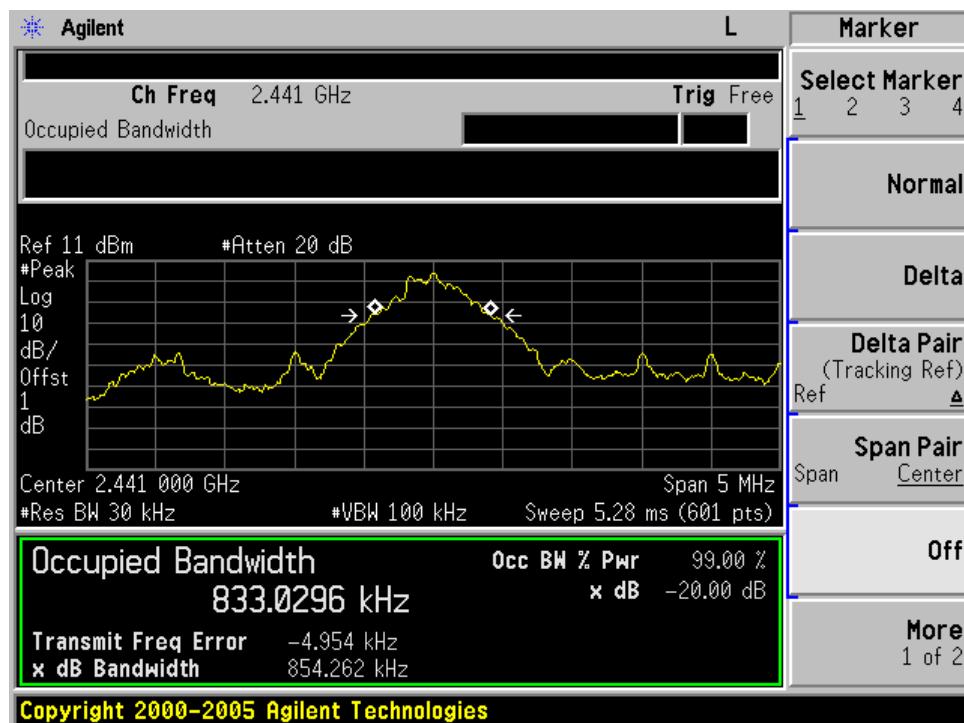



20 dB bandwidth

Bluetooth Mode 8DPSK Modulation test result

Frequency	Bandwidth	Result
MHz	kHz	
2402	834	Pass
2441	834	Pass
2480	829	Pass

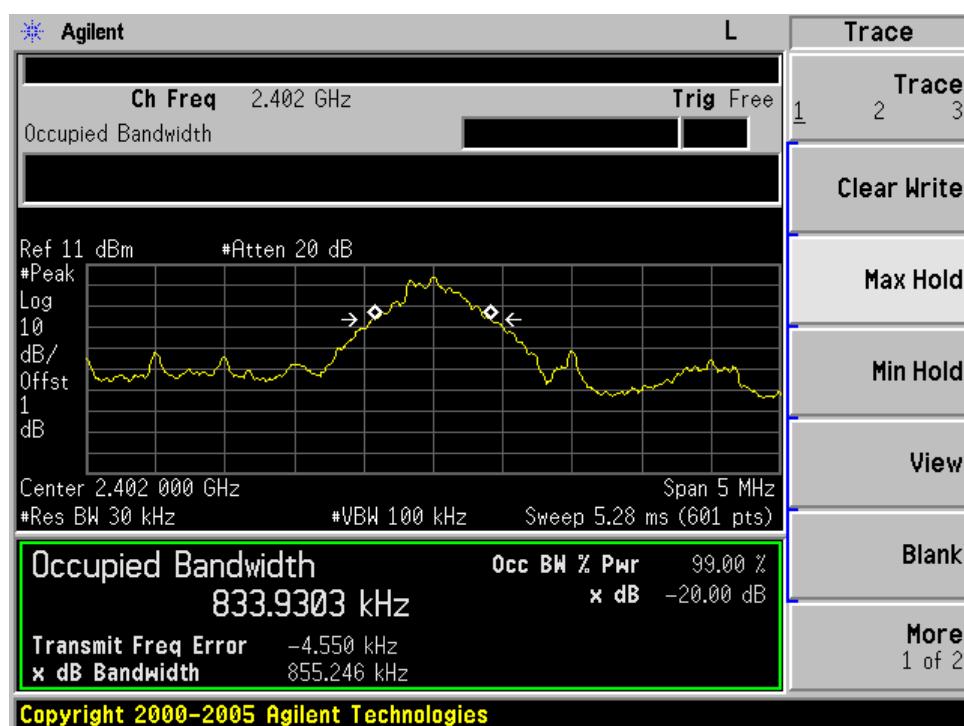

20 dB bandwidth

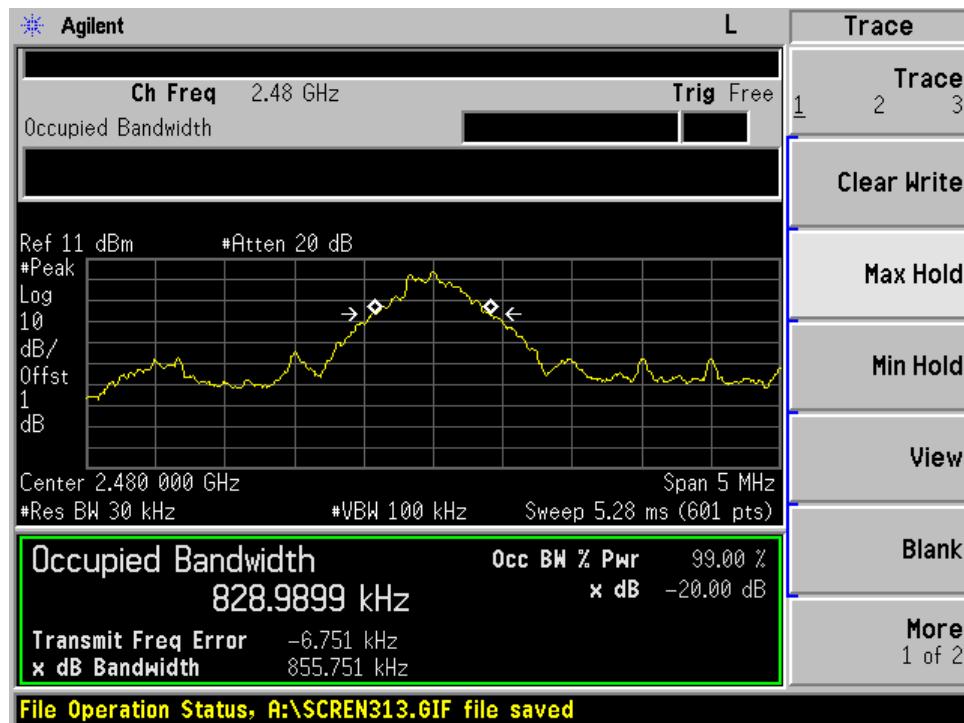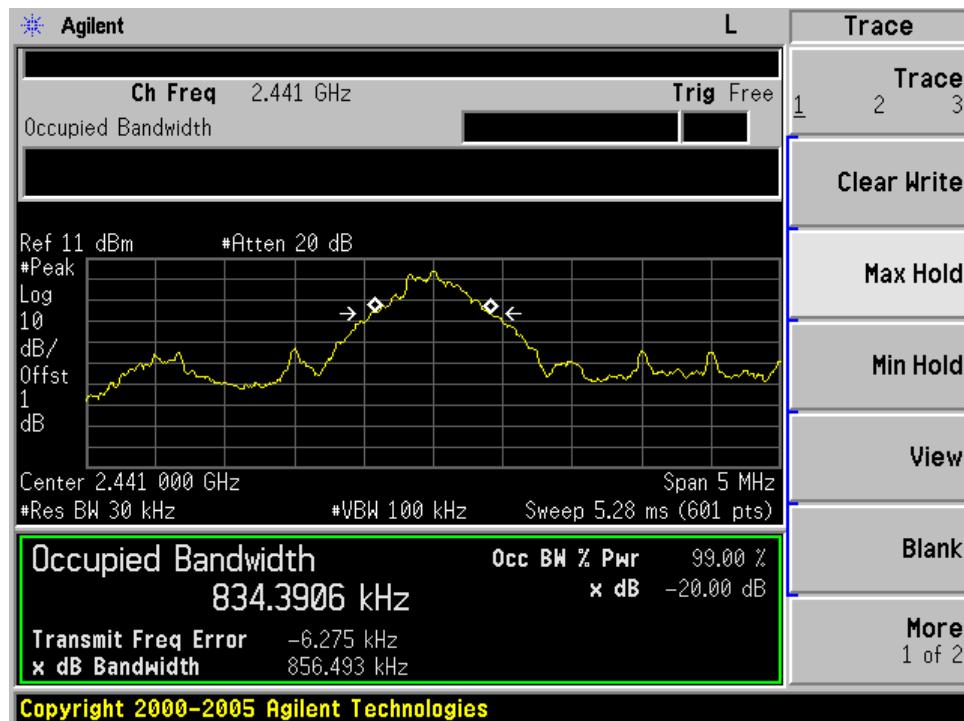



Product Service

Test Equipment

20 dB bandwidth Test

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL.DUE.DATE
Spectrum Analyzer	Agilent	E4446A	US44300459	May 08, 2011

7.7 Carrier Frequency Separation

Test Method

1. Connect EUT antenna terminal to the spectrum analyzer with a low loss cable.
Equipment mode: Spectrum analyzer
RBW: 100KHz; VBW: 300KHz; SPAN:3MHz
2. By using the Max-Hold function record the separation of two adjacent channels.
3. Measure the frequency difference of these two adjacent channels by spectrum analyzer Marker function.
4. Repeat above procedures until all frequencies measured were complete.

Limit

Limit kHz
≥25 or 2/3 of the 20 dB bandwidth which is greater

GFSK Modulation Limit

Frequency MHz	2/3 of 20 dB Bandwidth kHz
2402	627
2441	629
2480	627


8DPSK Modulation Limit

Frequency MHz	2/3 of 20 dB Bandwidth kHz
2402	772
2441	772
2480	772

Carrier Frequency Separation

GFSK Modulation test result


Frequency MHz	Carrier Frequency Separation kHz	Result
2402	1000	Pass
2441	1000	Pass
2480	1000	Pass

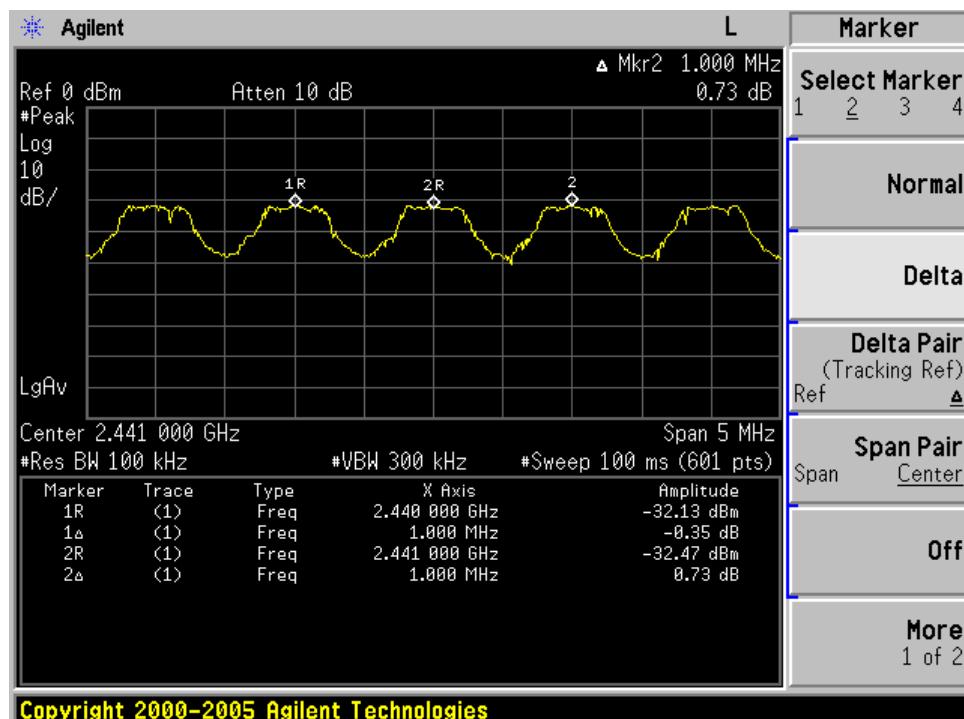

Carrier Frequency Separation

8DPSK Modulation test result

Frequency MHz	Carrier Frequency Separation kHz	Result
2402	1000	Pass
2441	1000	Pass
2480	1000	Pass

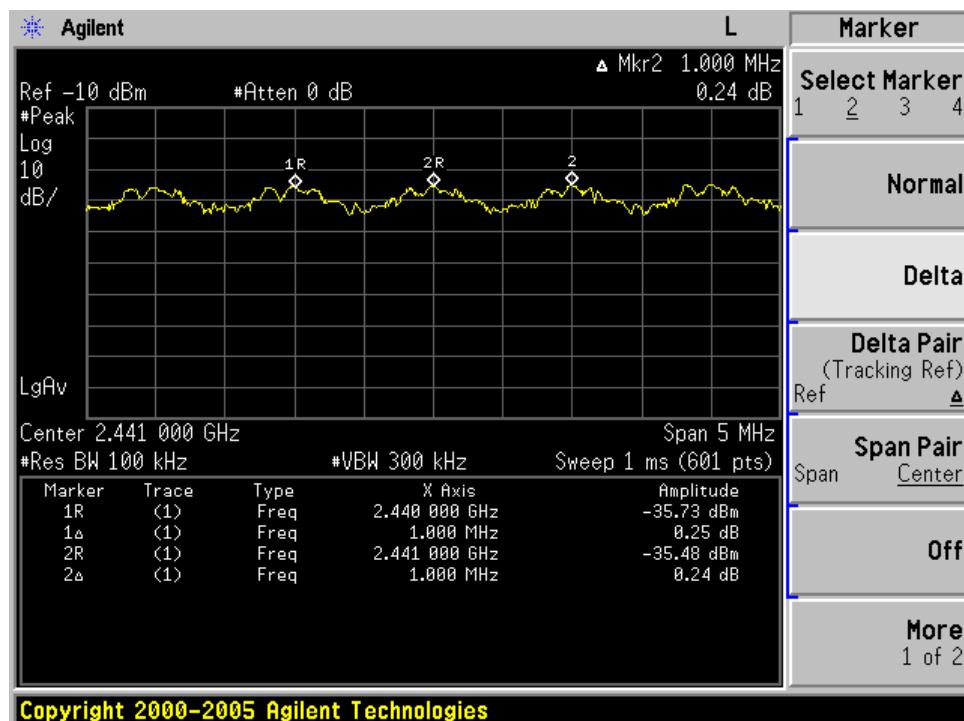



Product Service

Test Equipment

Carrier Frequency Separation Test

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL.DUE.DATE
Spectrum Analyzer	Agilent	E4446A	US44300459	May 08, 2011

7.8 Number of hopping frequencies

Test Method

1. Connect EUT antenna terminal to the spectrum analyzer with a low loss cable.
Equipment mode: Spectrum analyzer
RBW: 300KHz; VBW: 1MHz
2. Set the spectrum analyzer on Max-Hold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
3. Repeat above procedures until all frequencies measured were complete.



Limit

Limit number
≥ 15

Number of hopping frequencies

Bluetooth Mode GFSK Modulation test result:



Number of hopping frequencies	Result
79	Pass

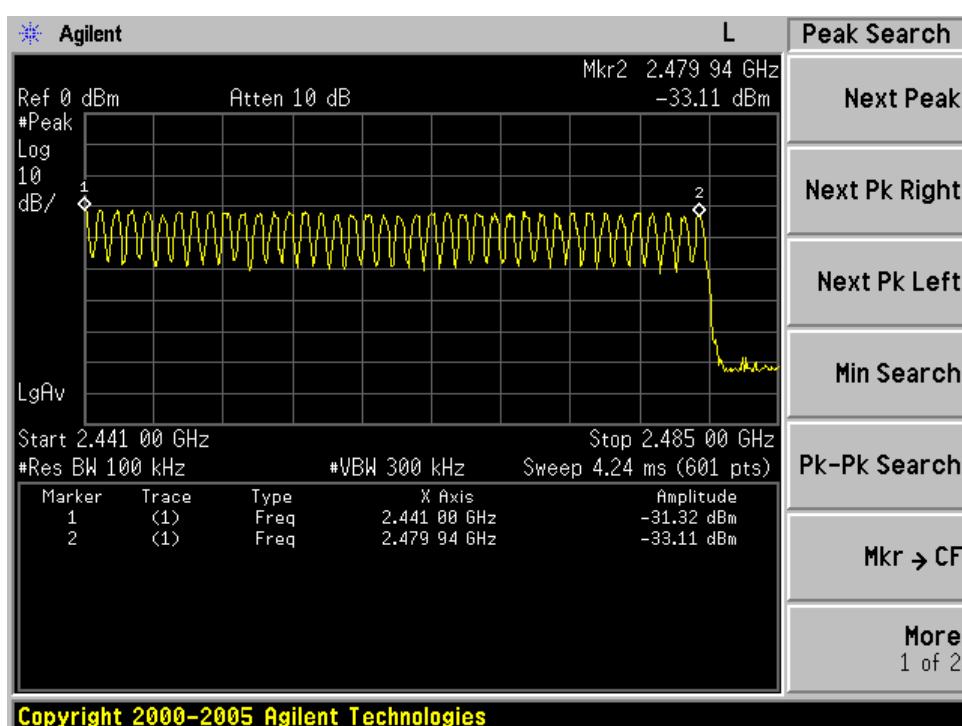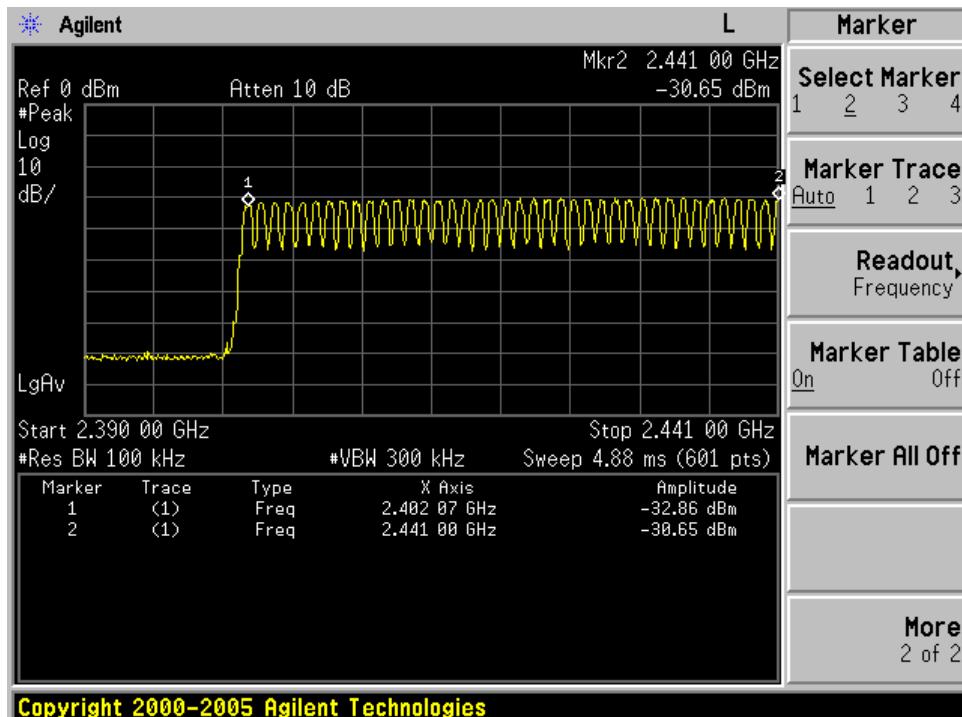

Number of hopping frequencies

Bluetooth Mode 8DPSK Modulation test result:

Number of hopping frequencies	Result
79	Pass

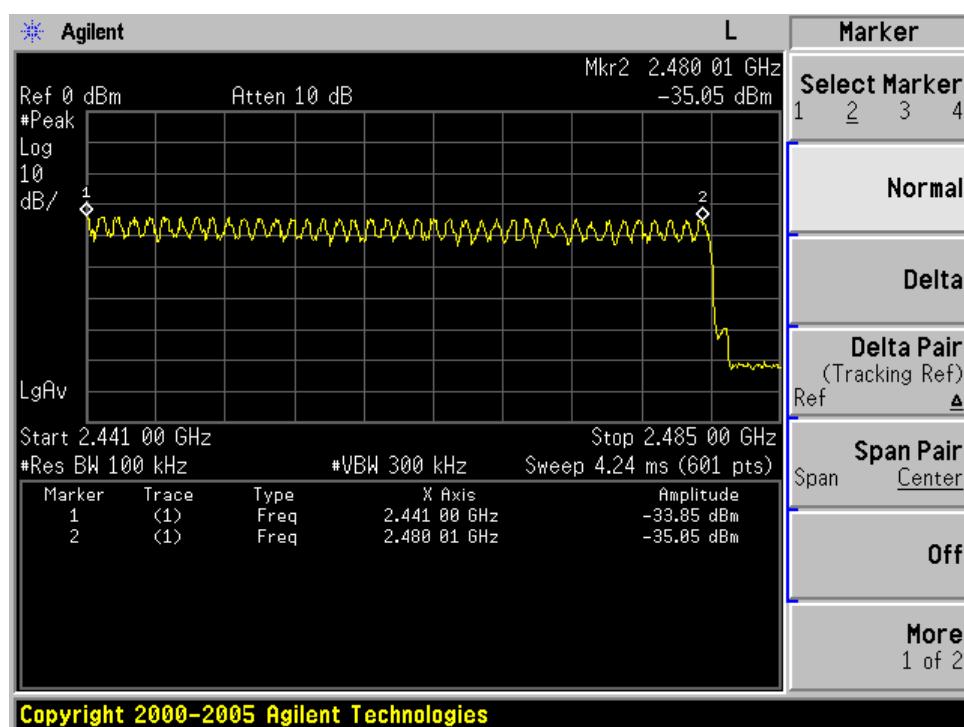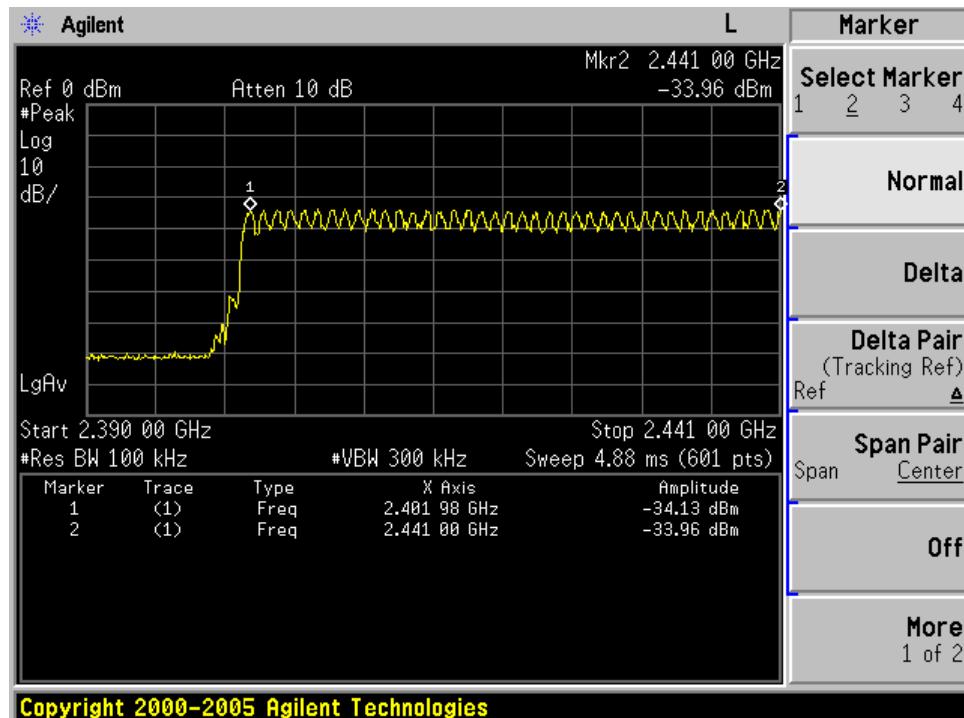



Product Service

Test Equipment

Number of hopping frequencies Test

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL.DUE.DATE
Spectrum Analyzer	Agilent	E4446A	US44300459	May 08, 2011

7.9 Dwell Time

Test Method

1. Connect EUT antenna terminal to the spectrum analyzer with a low loss cable.
Equipment mode: Spectrum analyzer
RBW: 1MHz; VBW: 1MHz; SPAN: Zero Span
2. Adjust the center frequency of spectrum analyzer on any frequency be measured.
3. Measure the Dwell Time by spectrum analyzer Marker function.
4. Repeat above procedures until all frequencies measured were complete.

Limit

The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Dwell Time


Dwell time

The maximum dwell time shall be 0,4 s.


Bluetooth Mode GFSK Modulation:

Test Result



Mode	Reading (μs)	Test Result (ms)	Limit (ms)	Result
DH1	426.7	137.53	< 400	Pass
DH3	1783	281.71	< 400	Pass
DH5	2947	316.62	< 400	Pass

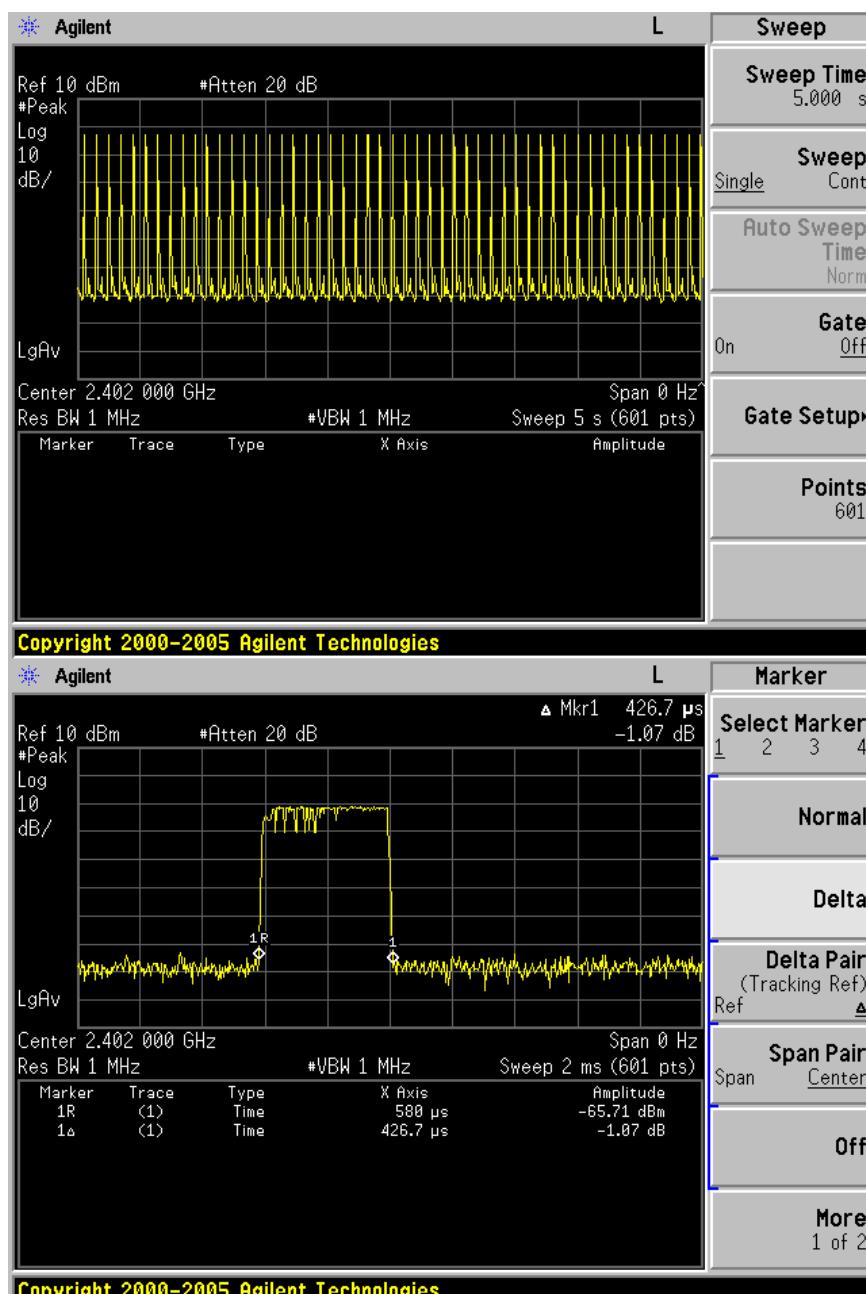

DH1

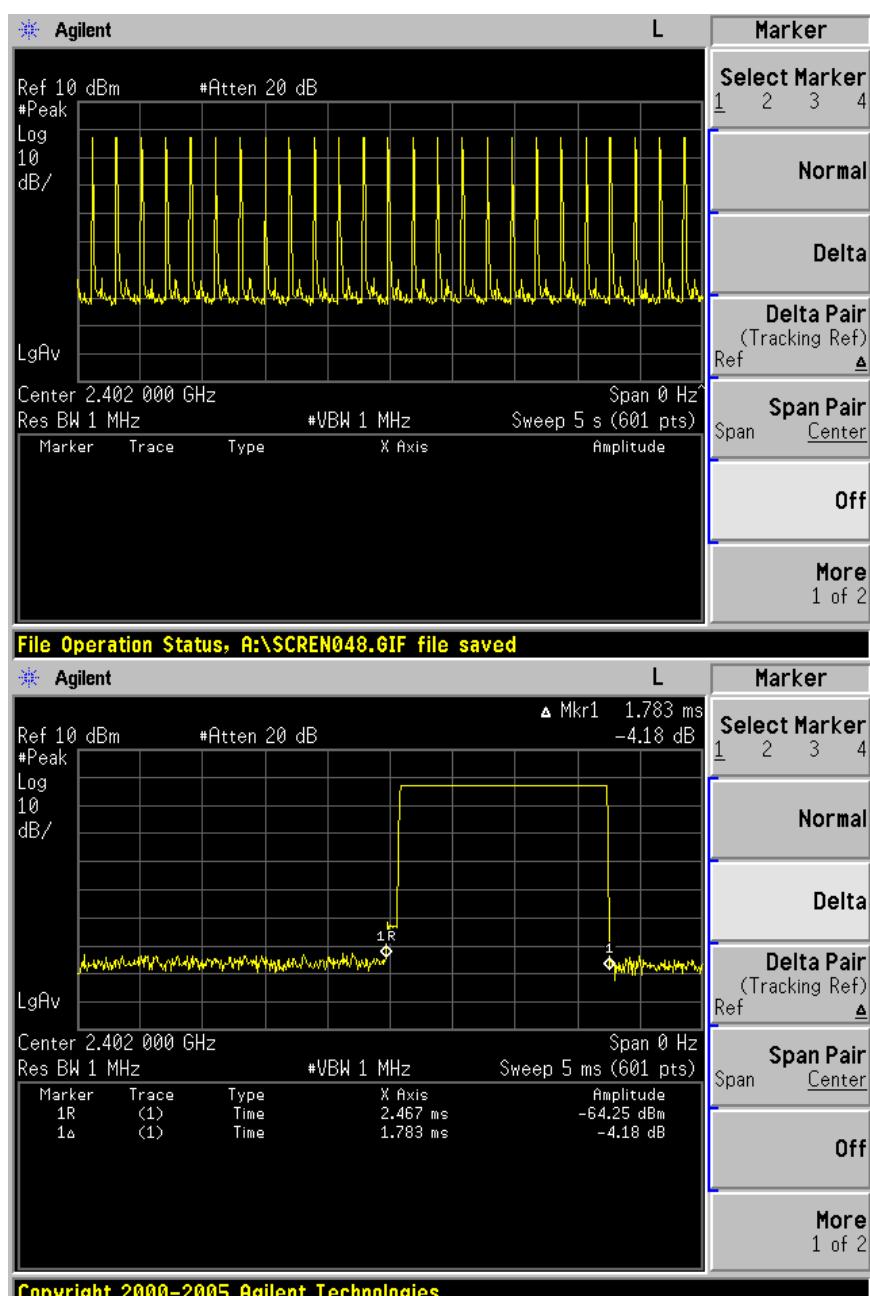

DH3

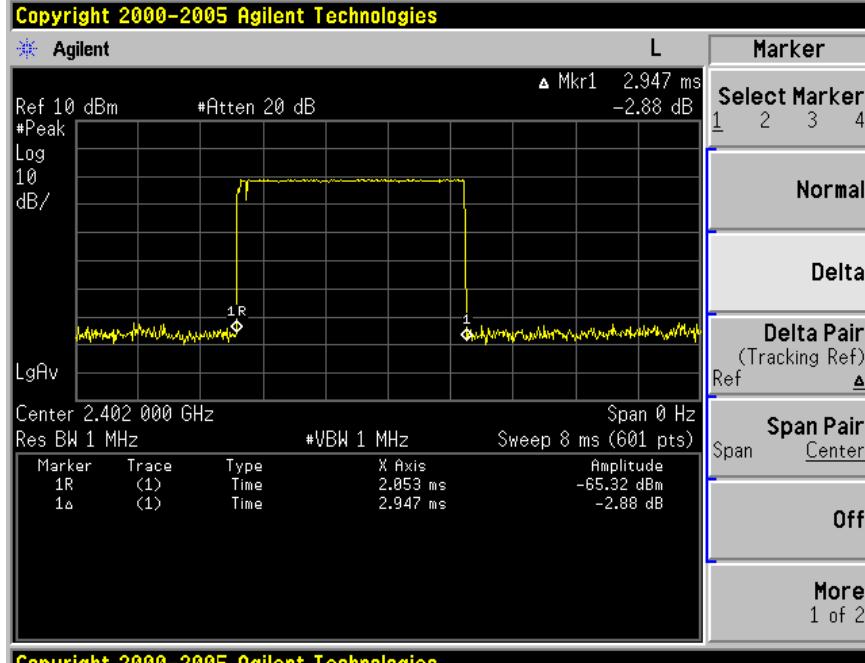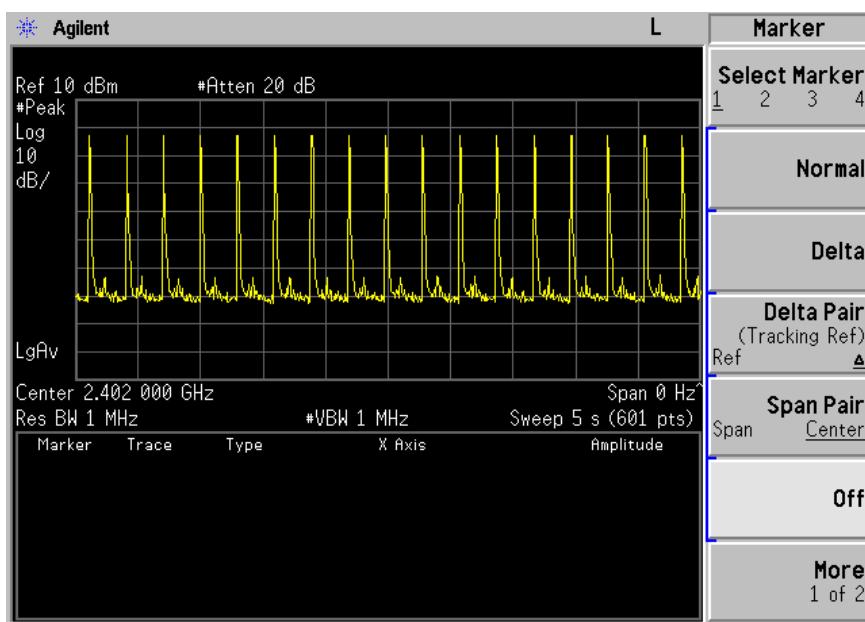

DH5

Note:


A period time=79x0.4(s)=31.6(s)


DH1	time slot= 51(times)/5(s) *426.7 (μs) *31.6(s)= 137.53 (ms)
DH3	time slot= 25(times)/5(s) *1783 (μs) *31.6(s)= 281.71 (ms)
DH5	time slot= 17(times)/5(s) *2947 (μs) *31.6(s)= 316.62 (ms)

Bluetooth Mode 8DPSK Modulation:


Test Result

Mode	Reading (μ s)	Test Result (ms)	Limit (ms)	Result
DH1	443.3	142.88	< 400	Pass
DH3	1800	295.77	< 400	Pass
DH5	2973	319.41	< 400	Pass

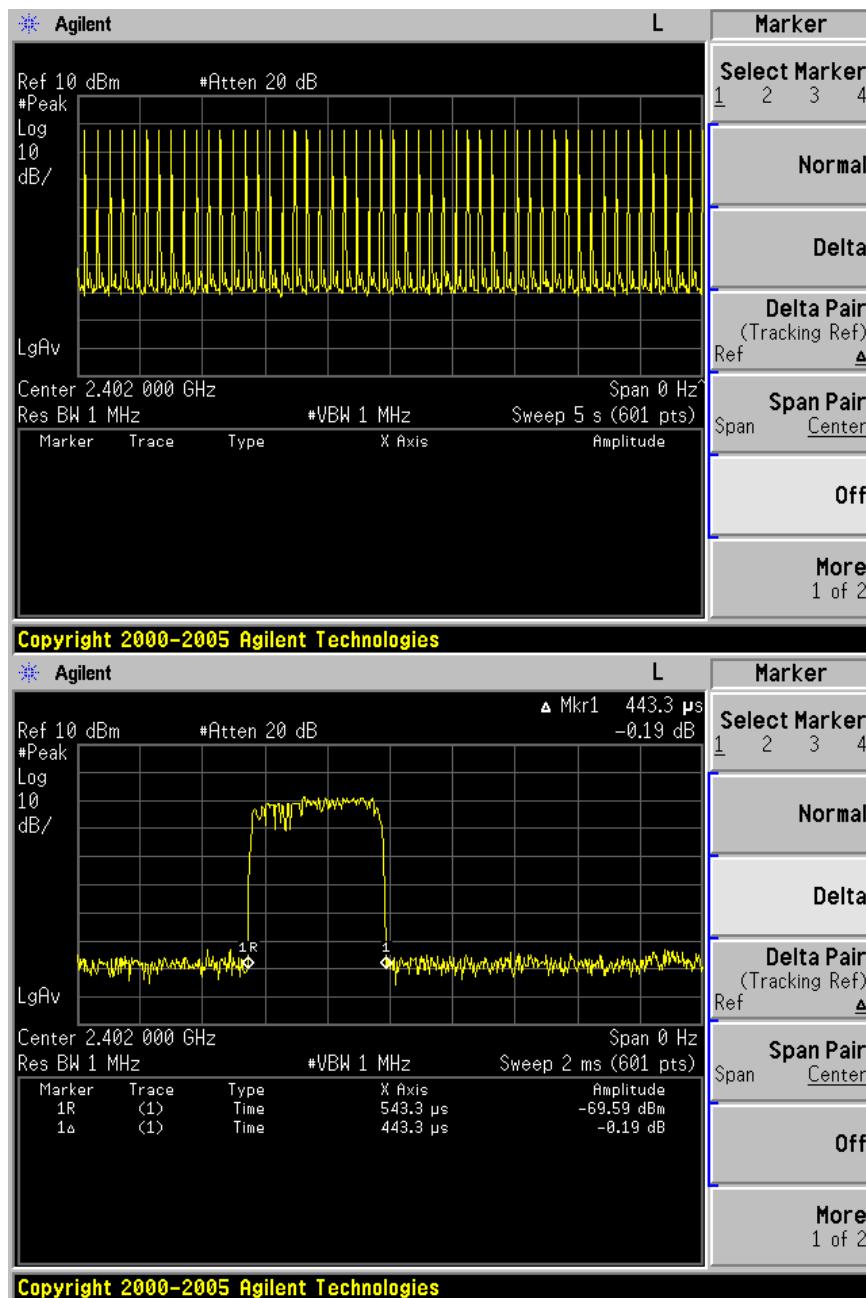

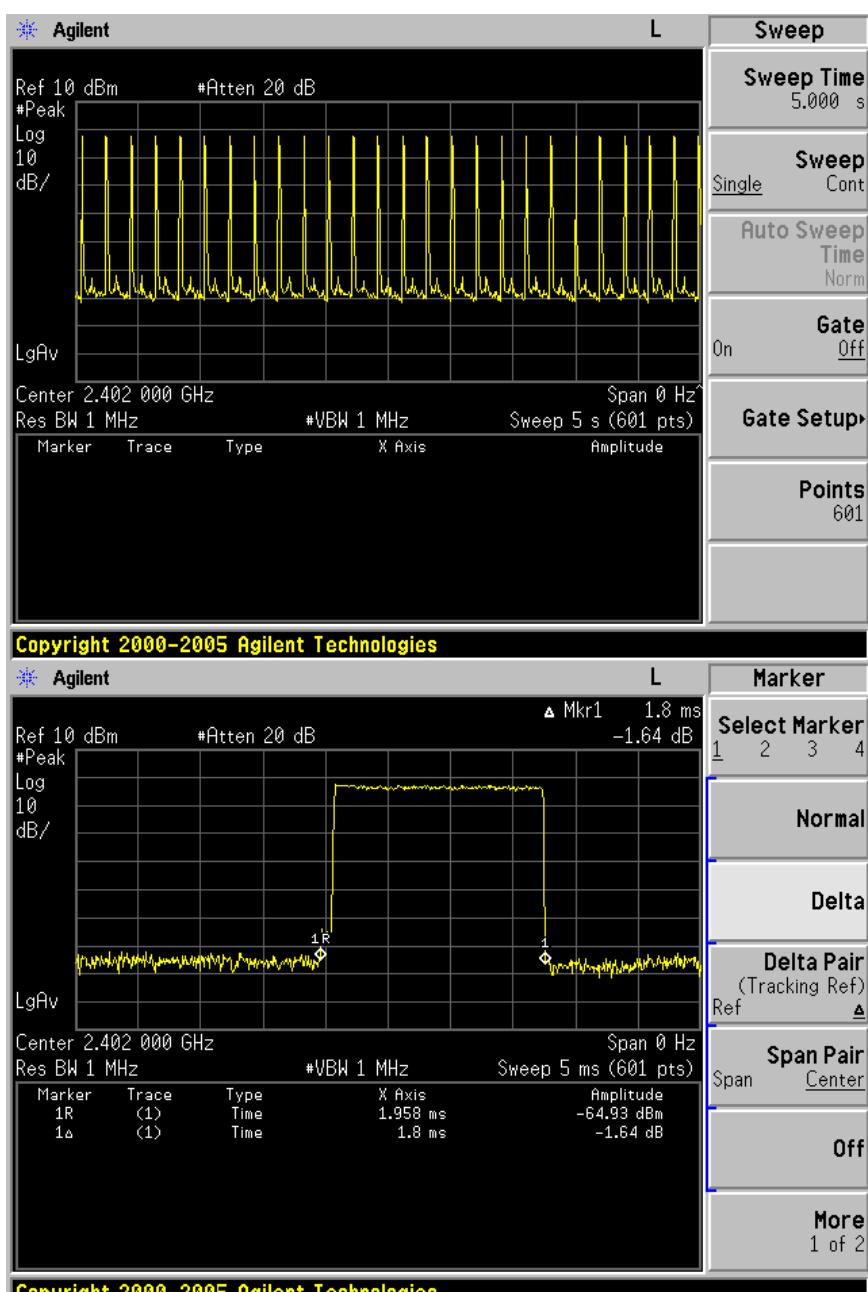

DH3

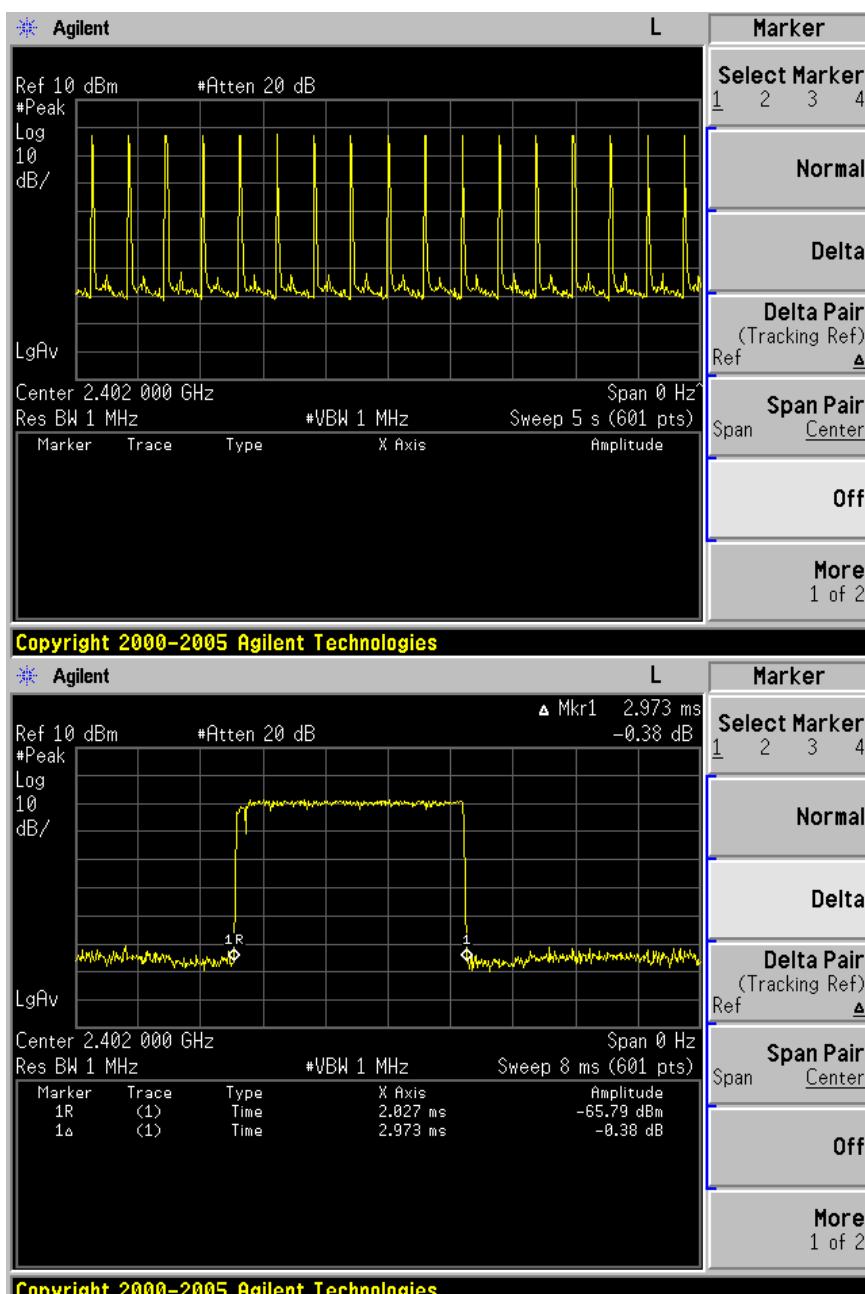

DH5

Note:

A period time=79x0.4(s)=31.6(s)

DH1	time slot= 51(times)/5(s) *443.3 (μs) *31.6(s)= 142.88 (ms)
DH3	time slot= 26(times)/5(s) *1800 (μs) *31.6(s)= 295.77 (ms)
DH5	time slot= 17(times)/5(s) *2973 (μs) *31.6(s)= 319.41 (ms)



Product Service

Test Equipment

Dwell Time Test

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL.DUE.DATE
Spectrum Analyzer	Agilent	E4446A	US44300459	May 08, 2011

8 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty

Items		Extended Uncertainty
RE	Field strength (dB μ V/m)	U=4.32dB (30MHz-25GHz)
CE	Disturbance Voltage (dB μ V)	U=2.4dB