



Accredited testing-laboratory

DAR registration number: DAT-P-176/94-D1

Federal Motor Transport Authority (KBA)
DAR registration number: KBA-P 00070-97

Recognized by the Federal Communications Commission

Anechoic chamber registration no.: 90462 (FCC)

Anechoic chamber registration no.: 3463C-1 (IC)

Certification ID: DE 0001

Accreditation ID: DE 0002

Accredited Bluetooth® Test Facility (BQTF)

The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Cetecom ICT is under license

Test report no. : 1-1099-01-03/09

Type identification : Wireless Ethernet Bridge SL60-401 / SL60-501

Applicant : Huber + Suhner AG

FCC ID : TTDSL60401 / TTDSL60501

IC Certification No : 6318A-SL60401 / 6318A-SL60501

Test standards : FCC CFR 47 Part 15.255

RSS-210

Table of contents

1 General information.....	3
1.1 Notes	3
1.2 Testing laboratory	4
1.3 Details of applicant	4
1.4 Application details	4
2 Test standard/s	5
3 Technical tests	6
3.1 Details of manufacturer.....	6
3.1.1 Test item.....	6
3.1.2 EUT operating modes.....	7
3.1.3 Nominal conditions for testing	7
4 Summary of Measurement Results and list of all performed test cases	8
5 RF measurement testing	9
5.1 Description of test set-up.....	9
5.1.1 Radiated measurements.....	9
5.2 Referenced Documents	16
5.3 Additional comments	16
5.4 Power Density §15.255(b)(1).....	16
5.5 Conducted Spurious Emissions §15.207	18
5.6 Radiated Spurious Emissions §15.255 (c).....	21
5.7 Total Peak Transmitter Output Power §15.255 (e)	35
5.8 Fundamental Emissions under Extreme Conditions §15.255 (f).....	36
5.9 Occupied Bandwidth.....	37
6 Photographs of the Test Set-up.....	39
7 Photographs of the EUT, interior view.....	43
8 Photographs of the EUT, exterior view	47

Annex 1 Antenna Compact Range Farfield Measurement Results

Annex 2 Additional EUT information for Industry Canada

Annex 3 RF Technical Brief Cover Sheet acc. to RSS-102

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 3.1.1. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

Responsible for the test report:

2009-07-16 **Nicolas Stamber**
Date Name

N. Stamber
Signature

Test laboratory manager:

2009-07-16 **Karsten Gerald**
Date Name

Gerald Karsten
Signature



1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

e-mail: info@ICT.cetecom.de

Internet: <http://www.cetecom-ict.de>

State of accreditation: The test laboratory (area of testing) is accredited according to
DIN EN ISO/IEC 17025
DAR registration number: DAT-P-176/94-D1

Accredited by: Federal Motor Transport Authority (KBA)
DAR registration number: KBA-P 00070-97

Testing location, if different from CETECOM ICT Services GmbH:

Name :

Street :

Town :

Country :

Phone :

Fax :

1.3 Details of applicant

Name:	Huber + Suhner AG
Street:	Degersheimer Str. 14
Town:	9100 Herisau
Country:	Switzerland
Telephone:	+41 (0) 71 353 41 11
Fax:	+41 (0) 71 353 47 80
Contact:	Mr. Dieter Merk
E-mail:	dieter.merk@hubersuhner.com
Telephone:	+41 (0) 71 353 41 11

1.4 Application details

Date of receipt of order: 2009-01-27

Date of receipt of test item: 2009-07-07

Date of start test: 2009-07-07

Date of end test 2009-07-16

Persons(s) who have been present during the test: Mr. Dieter Merk

2 Test standard/s

FCC 47 CFR Part 15.255	2008-07	Radio Frequency Devices, Subpart C - Intentional Radiators, Operation within the band 57 - 64 GHz
RSS-210	2007-06	Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

3 Technical tests

3.1 Details of manufacturer

Name:	Huber + Suhner AG
Street:	Degersheimer Str. 14
Town:	9100 Herisau
Country:	Switzerland

3.1.1 Test item

Kind of test item:	Point to point, Digital Microwave Fixed Link
Type identification:	Wireless Ethernet Bridge SL60-401 / SL60-501
Model / S/N serial number:	Terminal A: 84078833 / A3 Terminal B: 84079168 / B3
Frequency:	Terminal A: Tx: 59.500 GHz, Rx: 62.000 GHz Terminal B: Tx: 62.000 GHz, Rx: 59.500 GHz
Type of Modulation:	SBPSK, SQPSK
Number of channels:	2
Antenna :	Slot array antenna 59.500 GHz: 40.0 dBi 62.000 GHz: 40.0 dBi
Power Supply:	48VDC according to POE+ standard
Temperature Range:	-30 °C to +60 °C Note: in forced airflow climatic chamber

FCC ID: **TTDSL60401 / TTDSL60501**

IC: **6318A-SL60401 / 6318A-SL60501**

The difference between the units SL60-401 and SL60-501 is only the software. There is no influence on the measurement results.

Not more than two units of the transceiver type SL60-401 / SL60-501 provides a wireless link. The transceivers are designed for operation according FCC rules Part 15.255(i).

Transceiver A (Terminal A) and transceiver B (Terminal B) operate on two different fix frequencies: $f_1 = 59.500 \text{ GHz}$ and $f_2 = 62.000 \text{ GHz}$. Whereas transceiver A transmits on f_1 and receives on f_2 , transceiver B transmits on f_2 and receives on f_1 . The hardware of both transceivers is absolutely identical except a rearrangement of the Topology by mirroring and rotation.

As soon as the equipment is powered up, TX and RX start operation simultaneously. There is no receive-only mode applicable.

The transceivers do not provide any feature allowing beam-forming arrays. (FCC rules Part 15.255(h))

The microwave unit is realized with Two Monolytic Integrated Circuits (MMIC), which are connected by a waveguide transition structure with the diplexer. The diplexer and the microwave unit are stuck together. The interface between diplexer and the integrated antenna is a unique waveguide structure which is not suitable to connect commercially available antennas. (FCC rules Part 15.203)

3.1.2 EUT operating modes

EUT operating mode no.*)	Description of operating modes	Additional information
Op. 0	Normal mode	Normal temperature and power source conditions
Op. 1		low temperature, nominal power source conditions
Op. 2		high temperature, nominal power source conditions

*) EUT operating mode no. is used to simplify the test plan

3.1.3 Nominal conditions for testing

Description	Shortcut	Unit	Value
Nominal Temperature	T _{nom}	°C	23
Nominal Humidity	H _{nom}	%	45
Nominal Power Source	V _{nom}	Vac	110

Type of power source: 100 - 250 V AC adaptor to 48 V DC power over Ethernet

Extreme conditions are reported in chapter 5.9.

4 Summary of Measurement Results and list of all performed test cases

- No deviations from the technical specifications were ascertained**
- There were deviations from the technical specifications ascertained

TC identifier	Description	verdict	date	Remark
RF-Testing	FCC CFR 47 Part 15 §15.255 RSS-210, Annex 13	PASS	2009-07-16	

Test Specification Clause	Test Case	Pass	Fail	Not applicable	Not performed
§ 15.255 (b)(1)	Power Density	X			
§ 15.207	Conducted Spurious Emissions < 30 MHz	X			
§ 15.255 (c)	Radiated Spurious Emissions	X			
§ 15.255 (e)	Total Peak Transmitter Output Power	X			
§ 15.255 (f)	Fundamental Emissions Under Extreme Conditions	X			
§ 15.255 (f)	Occupied Bandwidth	X			


5 RF measurement testing

5.1 Description of test set-up

5.1.1 Radiated measurements

Field strength of spurious radiation in the frequency range 12 GHz to 40 GHz

Frequency stability of wanted signals

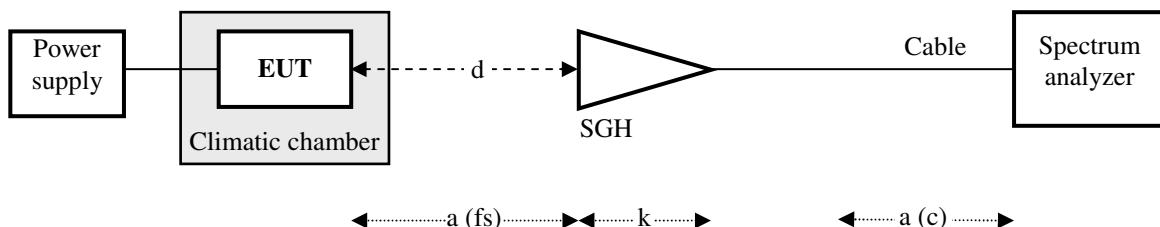


Frequency f [GHz]	Distance d [m]	Standard gain Horn ant. (SGH)	Dist. correction. dc (3m/Xm) [dB]	Antenna factor k [dB 1/m]	Cable loss a [dB]	Amplifier gain g(amp)[dB]
12 ... 18	0.375	narda 639	-18.0	34.0	3.1	35.0
18 ... 26	0.375	narda 638	-18.0	40.2	3.3	33.0
26 ... 40	0.375	narda V637	-18.0	44.0	4.2	19.0
40 ... 50	0.375	Flann 2324-20	-18.0	42.0	4.7	14.0

Calculation: Field strength = Analyser reading + Cable loss + Antenna factor + Distance correction – Amp. gain

$$E = u + a + k + dc - g(amp)$$

Frequency stability and power density of wanted signal and spurious radiation in the frequency range 50 to 200 GHz

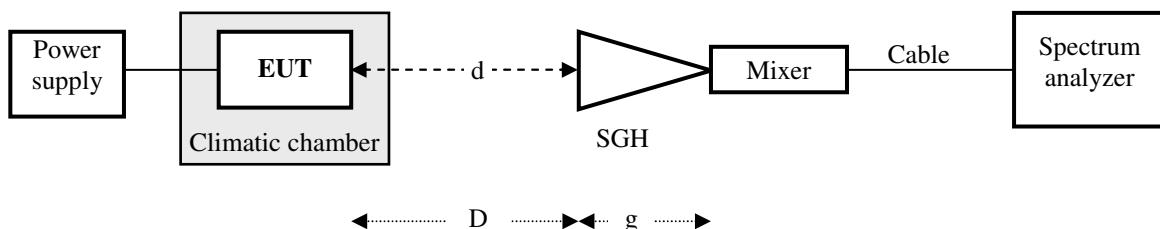

Frequency f [GHz]	Distance d [m]	Free space attenuation D [dB]	Antenna gain g [dBi] or antenna factor k [dB/m]	System Attenuation [dB]
59.500	3(10)		$k = 40.67$	
62.000	3(10)		$k = 40.67$	
50 ... 75	0.125	48.4 ... 51.9	25.5 (62 GHz)	24.9
75 ... 110	0.125	51.9 ... 55.3	24.4 (92 GHz)	29.4
110 ... 170	0.125	55.3 ... 59.0	22.0 (140 GHz)	35.0
170 ... 200	0.125	59.0 ... 60.5	19.5 (185 GHz)	40.0

A minimum test distance of 0.125 m was used for detecting spurious radiations. 3.0 m was adjusted to measure wanted signal levels in field strength or EIRP. Results were verified in 10 m distance to be sure that the measurement is performed in the far field.


Calculation : Power density = EIRP /($4\pi d^2$) = EIRP / 1130973.4 cm² (for 3 m evaluation distance)

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	Climatic box VUK 04/500	Heraeus Vötsch	32678	300000297	29.07.2008	24	27.07.2010
2	Spectrum Analyser 8565E	HP	3738A00773	300001665	08.01.2008	24	08.01.2010
3	Spectrum Analyser FSU 50	R&S	200012	300003443	05.06.2008	24	05.06.2010
4	Spectrum Analyzer 2782	Tektronix		300001665	28.08.2008	24	28.08.2010
5	Power Supply 6032A			300002115	15.05.2007		
6	SGH 12 ... 18 GHz	narda	01005	300000787	cyclic verification		
7	SGH 18 ... 27 GHz	narda	01005	300000487	cyclic verification		
8	SGH 27 ... 40 GHz	narda	82016	300000510	cyclic verification		
9	SGH 3350 GHz	Thomson		300000812	visual inspection		
10	Adapter WG/SMA	narda	64088	-/-	cyclic verification		
11	Adapter WG/SMA	flann	213	-/-	cyclic verification		
12	Adapter WG/SMA	HP	00231	-/-	cyclic verification		
13	SGH 50 ... 75GHz	Thomson	-/-	300000813	visual inspection		
14	Mixer 50 ... 75 GHz	HP	-/-	30000781m	07.08.2007	24	07.08.2009
15	SGH 75 ... 110 GHz	Thomson	-/-	30000798b	visual inspection		
16	Mixer 75 ... 110 GHz	HP	-/-	30000781c	07.08.2007	24	07.08.2009
17	SGH 110 ... 170 GHz	Flann	-/-	300001999	visual inspection		
18	Mixer 110 ... 170 GHz	Tektronix	B010186	300001685d	n.a.		
19	SGH 170 ... 325 GHz	Flann	-/-	300002000	visual inspection		
20	Mixer 170 ... 325 GHz	Tektronix	B010241	300001685j	n.a.		

Measurement uncertainties

Test parameter	Measurement uncertainty
Power supply	±0.1 VDC
Temperature	±0.2 °C
Frequency	±0.01 ppm
eirp	±2.0 dB (up to 50 GHz)
eirp	±3.0 dB (above 50 GHz)

Field strength of spurious radiation in the frequency ranges 9 kHz to 30 MHz and 1 to 12 GHz
 Set-up for radiated measurements (FAC "Chamber C")

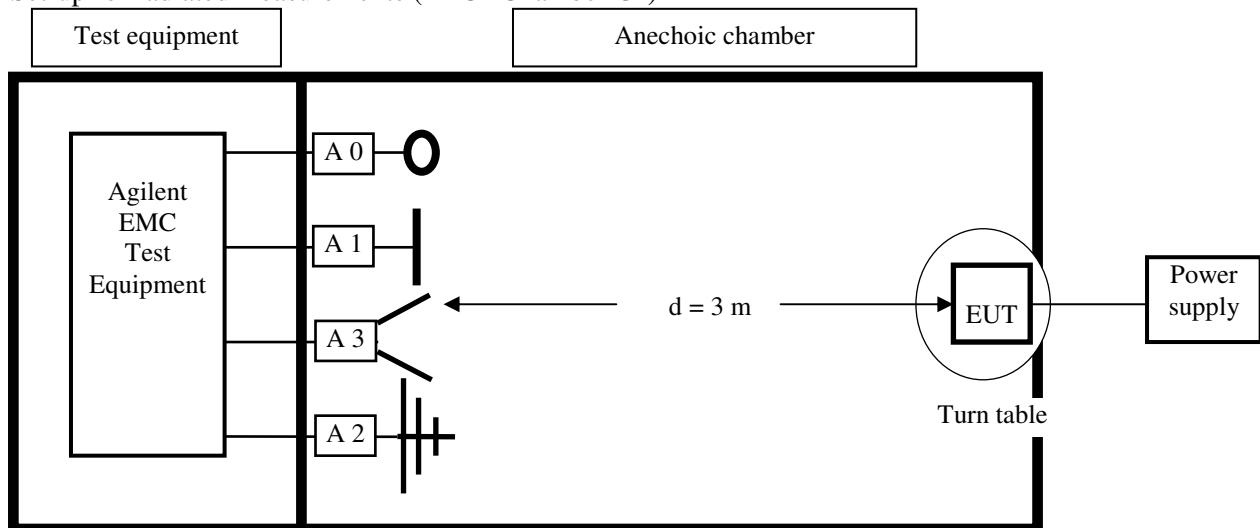


No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	Anechoic chamber	MWB	87400/02	300000996	Monthly verification		
2	System-Rack 85900	HP I.V.	*	300000222	n.a.		
3	Measurement System 1						
4	PSA-Spektrumanalysator 3 Hz - 26.5 GHz (E4440A)	Agilent	MY48250080	300003812	05.08.2008	24	05.08.2010
5	EMI Preselector 9 kHz - 1 GHz (N9039A)	Agilent	MY48260003	300003825	19.08.2008	24	19.08.2010
6	Microwave Analog Signal Generator (N5183A)	Agilent	MY47420220	300003813	06.08.2008	24	06.08.2010
7	PC	F+W			n.a.		
8	TILE	TILE			n.a.		
9	TRILOG Super Broadband Antenna (VULB9163)	Schwarzbeck	371	300003854	Monthly verification (System cal.)		
10	Double Ridged Antenna 3115	EMCO	3088	300001032	Monthly verification (System cal.)		
11	Active Loop Antenna 6502	EMCO	2210	300001015	Monthly verification (System cal.)		
12	Switch / Control Unit 3488A	HP	2719A15013	300001156	n.a.		
13	Power Supply 6032A	HP	2818A03450	300001040	08.01.2009	36	08.01.2012
14	Busisolator	Kontron		300001056	n.a.		
15	Leitungsteiler 11850C	HP		300000997	Monthly verification (System cal.)		
16	Power attenuator 8325	Byrd	1530	300001595	Monthly verification (System cal.)		
17	Band reject filter WRCG1855/1910	Wainwright	7	300003350	Monthly verification (System cal.)		
18	Band reject filter WRCG2400/2483	Wainwright	11	300003351	Monthly verification (System cal.)		
19	Hochpassfilter WHK1.1/15G-10SS	Wainwright	3	300003255	Monthly verification (System cal.)		
20	Hochpassfilter WHKX2.9/18G-12SS	Wainwright	1	300003492	Monthly verification (System cal.)		
21	Hochpassfilter WHKX7.0/18G-8SS	Wainwright	18	300003789	Monthly verification (System cal.)		
22	Switch / Control Unit 3488A	HP	2605e08770	300001443	n.a.		
23	Trenntrafo RT5A	Grundig	9242	300001263	n.a.		
24	Relais Matrix PSU	R&S	890167/024	300001168	n.a.		
25	Netznachbildung ESH3-Z5	R&S	828576/020	300001210	n.a.		

Measurement uncertainties

Test Parameter	Measurement uncertainty
Input power (DC)	±0.1 V
Temperature	±0.2 °C
Frequency	±0.01 ppm
RF-power	±2.0 dB

Field strength of spurious radiation in the frequency ranges 30 to 1000 MHz
 Set-up for radiated measurements at test distances 3m and 10m (SAC "Chamber F")

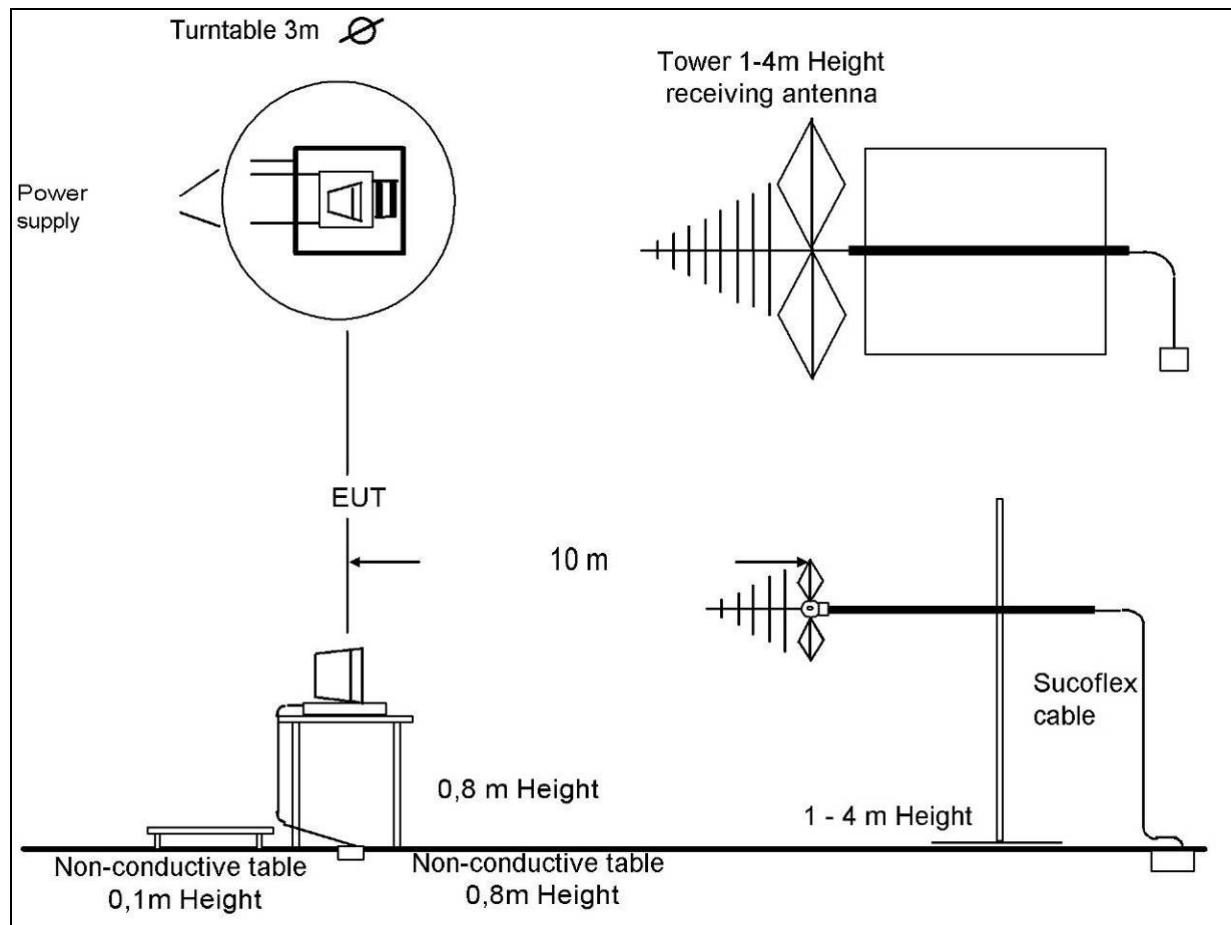

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	Control Computer	F+W	FW0502032	300003303	-/-	-/-	-/-
2	Trilog Antenna VULB 9163	Schwarzbeck	9163-295	300003787	30.04.2008	24	30.04.2010
3	Amplifier - 0518C-138	Veritech Micro-wave Inc.	-/-	-/-	-/-	-/-	-/-
4	Switch - 3488A	HP		300000368	-/-	-/-	-/-
5	EMI Test receiver - ESCI	R&S	100083	300003312	31.01.2009	24	31.01.2011
6	Turntable Controller - 1061 3M	EMCO	1218	300000661	-/-	-/-	-/-
7	Tower Controller 1051 Controller	EMCO	1262	300000625	-/-	-/-	-/-
8	Tower - 1051	EMCO	1262	300000625	-/-	-/-	-/-
10	Ultra Notch-Filter Rejected band Ch. 62	WRCD	9	-/-	-/-	-/-	-/-

Measurement uncertainties:

The uncertainty of the measurement equipment fulfils CISPR 16 and the related European and international standards. The semi anechoic chamber fulfils the requirements of CISPR 16-1 (ANSI C63.4) for a test volume of 1.5m Ø.

Remarks on methods of measurements

1. General

The device under test is positioned on a non-conductive fixture and can be rotated and tilted relative to the measurement antenna.

The measurements of radiated emissions in the frequency range from 30 MHz to 1 GHz are performed in vertical and horizontal plane in a semi-anechoic chamber, compliant to CISPR 16-1 for test distances of 3m and 10m. The EUT is positioned on a non-conductive support at a height of 0.80 m above the conductive ground plane covering the whole chamber. The measuring antennas can be moved over a height range from 1.0 m to 4.0 m in order to detect the maximum field strength emitted from the EUT. These antennas are compliant with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2003 clause 4.1.5.

Radiated emissions measurements in the frequency ranges from 9 kHz to 30 MHz and 1 GHz to 12 GHz are carried out in a fully-anechoic chamber, compliant to CISPR 16-1, providing test distances up to 5 m. EUT and receiving antennas are positioned 1.5 m above the tips of the absorbers.

Measurements between 12 GHz and 200 GHz are performed in certain test laboratory environments, where analyzers up to 50 GHz, without using mixers, and harmonic mixer modules and standard gain horns are available up to 320 GHz.

The measurement distances between EUT and receiving antennas are indicated in the test set-ups for the various frequency ranges. For each measurement, the EUT is three-dimensional rotated until the maximum field strength is received for both polarisations of the measuring antennas.

The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths (RBW) over various frequency ranges are set according to requirement ANSI C63.4-2003 clause 4.2.

Test equipment and ancillaries used for tests

Calibrations occur according to the EN/ISO/IEC 17025 standard. Calibrations are performed by an accredited external calibration laboratory. Additional to these calibrations, the laboratory performs comparison measurements with other calibrated systems and regular chamber inspections. All used devices are connected to a 10 MHz external reference.

2. Measurements of the EIRP and power density (PD) at fundamental frequency

The measurements are conducted according to FCC rules and, if appropriate to the guideline "Millimeter Wave Test Procedure" with a spectrum analyser (SA), harmonic mixer covering appropriate frequency range and a rectangular standard gain horn antenna (SGH) with matching wave guide dimensions. The conversion loss of the external mixer is taken into account in the SA power level reading automatically.

The radiated power measurements are performed with resolution bandwidth filter (RBW) of 1.0 MHz and a video filter of 1 MHz. Tests are repeated with different RBW, eg. 2.0 MHz and Video bandwidth filter (VBW) 3.0 MHz in order to evaluate whether a calculated bandwidth correction may be performed.

The evaluation distance for fundamental power measurement is 3.0 m. To meet the far field requirements, 10 m is usually used and compliance with the 3 m requirement is proved by corresponding calculation, which is a worst case scenario. The SA level scale is set to the dimension dBm. With the appropriate antenna aperture area the power density can be calculated from the equation:

$$\begin{array}{rclcl} \text{Power Density} & = & \text{EIRP} & / & \text{Antenna aperture area} \quad [\text{mW/cm}^2] \\ \text{pd} & = & \text{eirp} & - & \text{a} \quad [\text{dB}(\text{mW/cm}^2)] \end{array}$$

Field strength measurements in 3m distance are performed in the case of too large far field distances ($R=2*L^2/\lambda$, R = far field distance in meters, L = largest dimension of either measuring horn or transmitting EUT antenna).

3. Measurements of frequency stability

The frequency stability of the EUT under normal and extreme test conditions is measured in CW-mode (unmodulated).

Frequency measurements are performed under normal test conditions (normal power supply voltage and normal temperature).

Then the test is repeated with extreme test conditions. For extreme test conditions the EUT is placed in a climatic chamber where the front door is made of stable polystyrene. The EUT can radiate through the front door without any additional path losses. The climatic chamber together with the EUT is cooled down to -30 °C for 1 hour. Then frequency and power density measurements are carried out with power supply set to minimum and maximum values.

The climatic chamber together with the EUT is warmed up at a rate of + 1°C/minute. During warming-up time the frequency stability and the eirp is monitored constantly. After 2 hours the temperature stability at 60 °C is reached. Then frequency and power density measurements are carried out with minimum and maximum power supply.

4. Measurements of field strength and power density at spurious frequencies

Spurious frequencies are produced by transmitter and receiver when the EUT is active.

According to FCC requirements 15.209 and 15.255, spurious emissions have to be investigated as maximum field strength values in the frequency range from 9 kHz to 40 GHz, and as maximum power density in the frequency range above 40 GHz up to 240 GHz. Where possible, the measurement distance shall be 3 m.

In the low frequency range (9 kHz to 30 MHz), the receiving antenna is an active loop antenna which is positioned at 3 m distance in a shielded, anechoic chamber. In case of required measuring distances greater than 3 m, a distance correction factor is used to calculate the received field strength.


Spurious field strength measurements in the frequency range 1 to 12GHz are carried out in shielded semi-anechoic test chambers. The measurement distance is 3 m.

In the frequency range 12 to 200 GHz, spurious field strength measurements are performed in a certain test laboratory environments with rectangular SGH's. The test distance is 3 m for tests up to 40 GHz.

In the frequency range 40 to 200 GHz, spurious frequencies are measured as power densities. The EUT is operating with its specified modulation. The RBW and VBW are set to such a value that spurious power levels are clearly readable above the fundamental noise level of spectrum analyzer. The measurement distance is chosen up to 0.125 m, depending on the test system noise floor for detecting spurious emission signals.

5. Measurements of maximum safe level for radiated power density

According to FCC § 1.1307, § 1.1310, § 2.1091 and § 2.1093 measurements are carried out in order to evaluate the impact of human exposure to RF radiation.

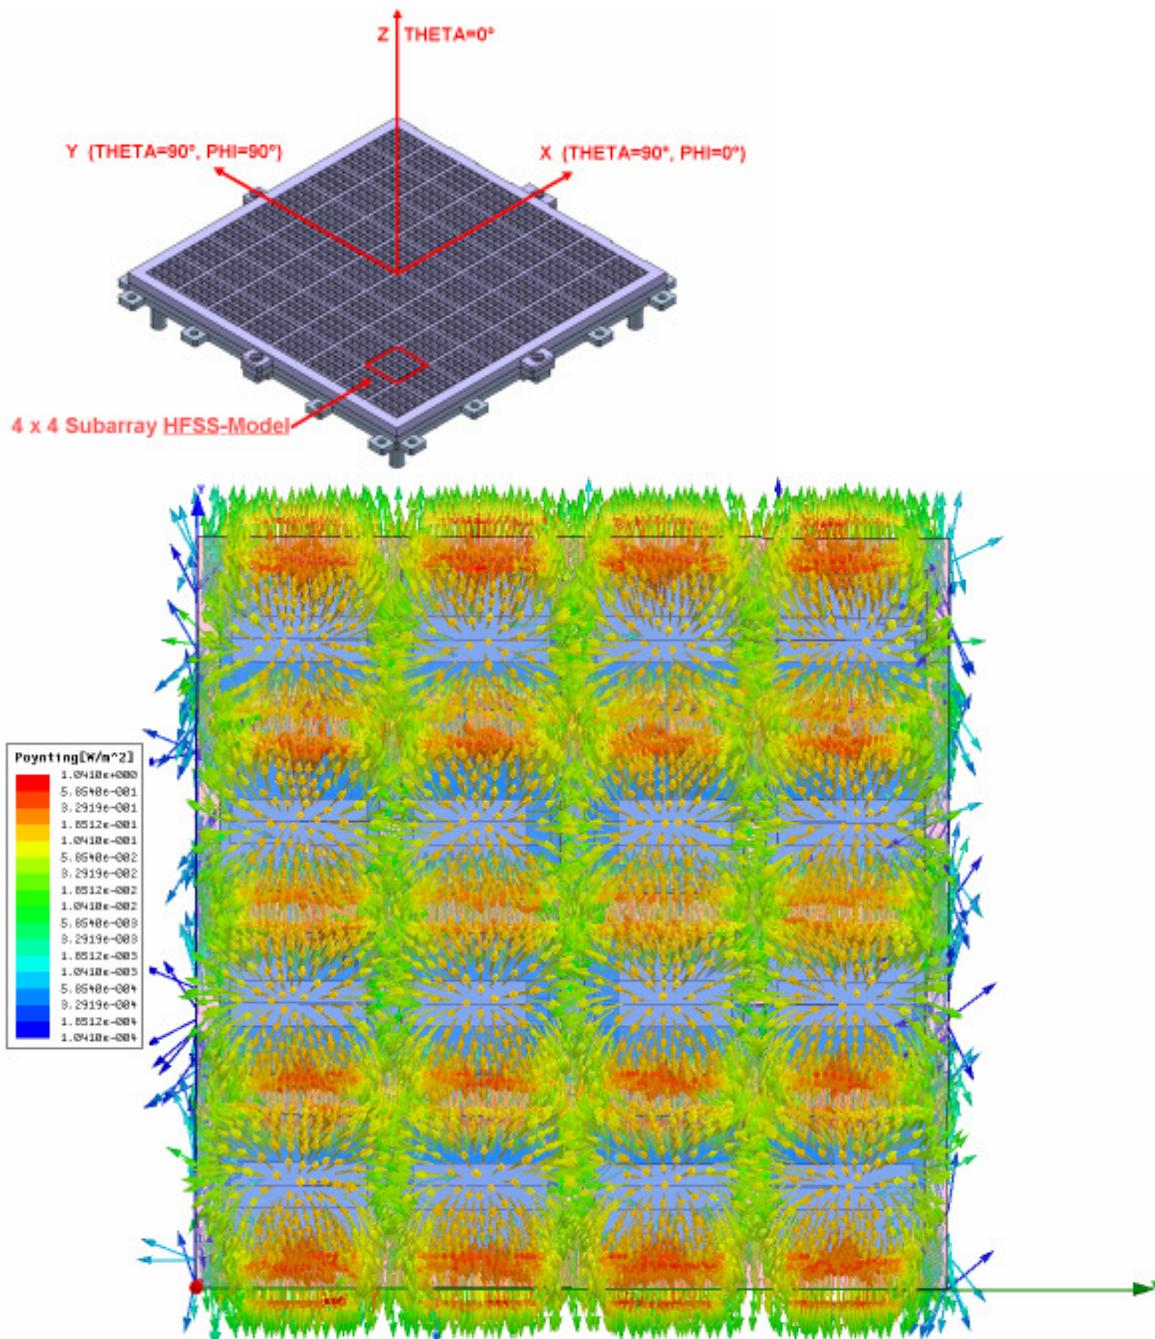

The simulation shows a maximum power density of 1.04 W/m² directly at the antenna.
Therefore the limits are kept at any distance from the radiating structure

Limit of maximum permissible exposure (MPE) for uncontrolled environment: $1.0 \text{ mW/cm}^2 = 10 \text{ W/m}^2$.
See FCC § 1.1310.

5.2 Referenced Documents

none

5.3 Additional comments

EIRP / Power Density measurements were performed in a special testmode (IQ CW Testmode with 1 MHz offset single tone).


Due to that fact, a spectrum analyzer RBW of 1 MHZ can be used and no bandwidth correction is needed.

An unmodulated carrier was used for the Frequency Stability measurements.

Spurious Emissions were tested with SQPSK modulation.

5.4 Power Density §15.255(b)(1)


Plot 1: (Terminal A) Power Density

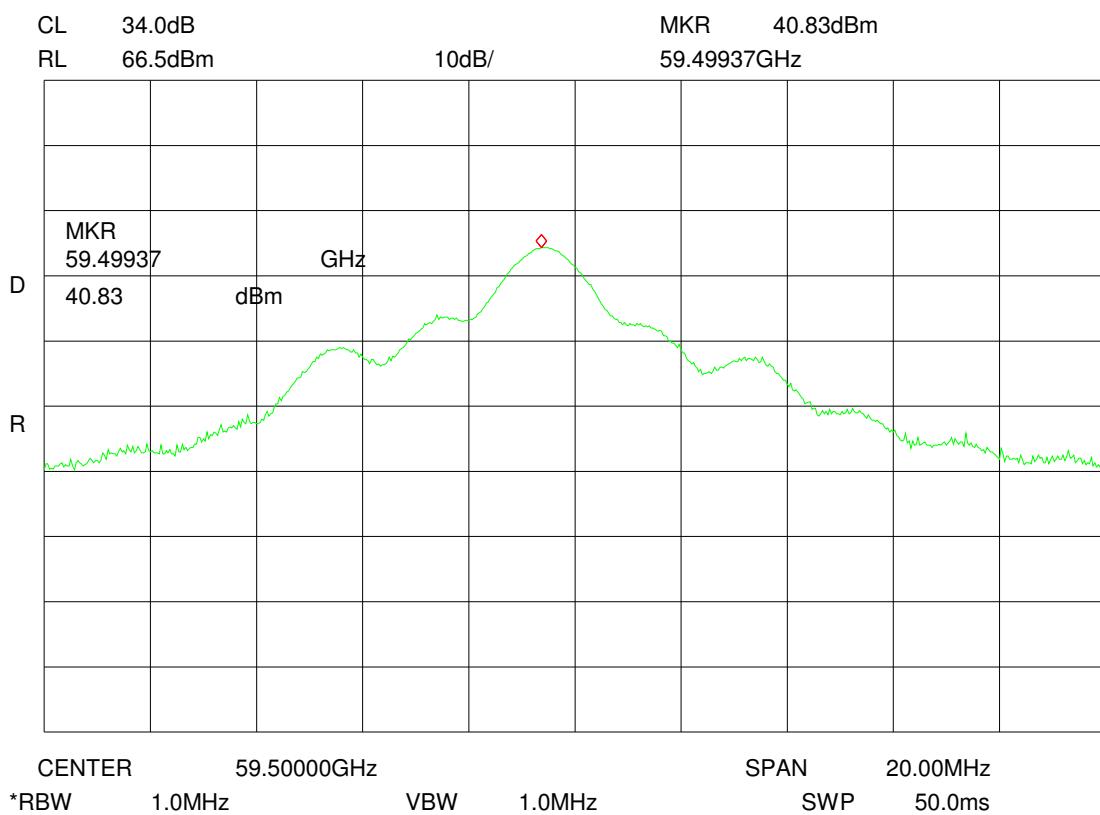

The plot shows the measured EIRP

Peak Power density [μ W/cm ²]	=	EIRP [μ W]	/	$4 \pi 300$ [cm ²]
		12105981 μ W	/	1130973.4 cm ²
	=	10.7 [μ W/cm ²]		

Plot 2: (Terminal B) Power Density

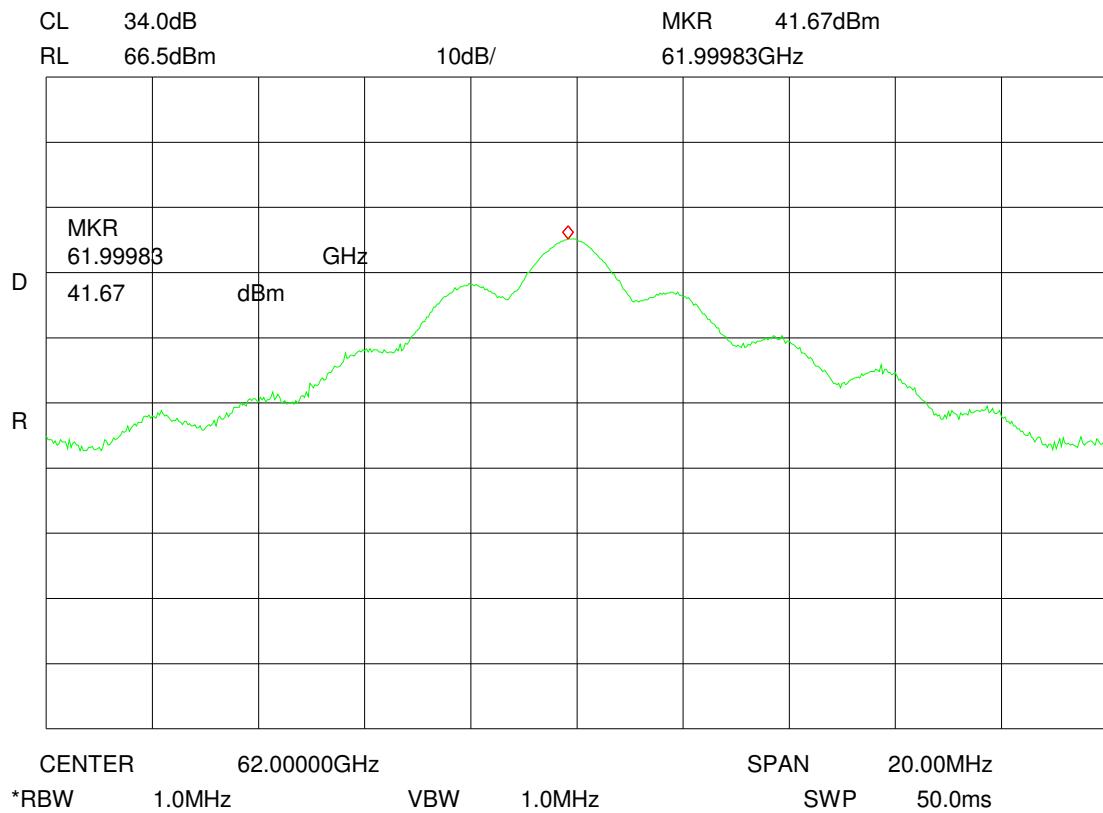


The plot shows the measured EIRP

Peak Power density [μ W/cm ²]	=	EIRP [μ W]	/	$4 \pi 300$ [cm ²]
		14689262 μ W	/	1130973.4 cm ²
	=	12.99 [μ W/cm ²]		


Test Result: pass

5.5 Conducted Spurious Emissions §15.207


Plot 3a: 150 kHz - 30 MHz (Terminal A) Phase Line

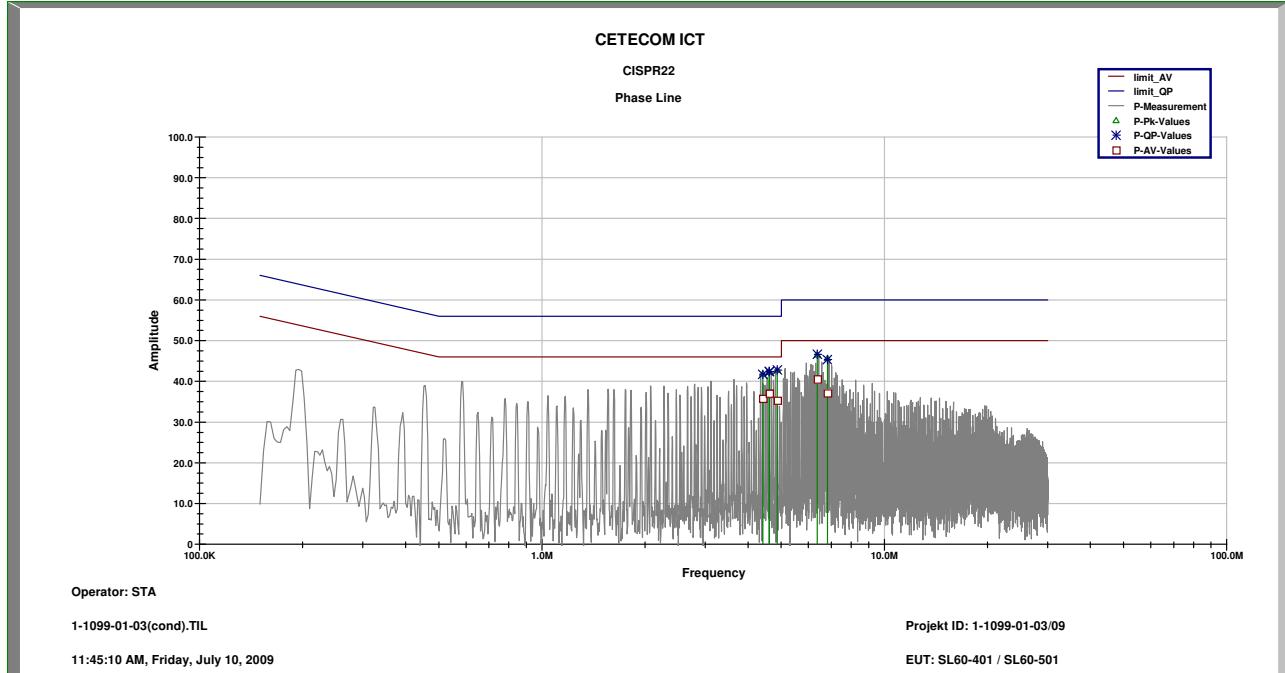


Plot 3b: 150 kHz - 30 MHz (Terminal A) Neutral Line

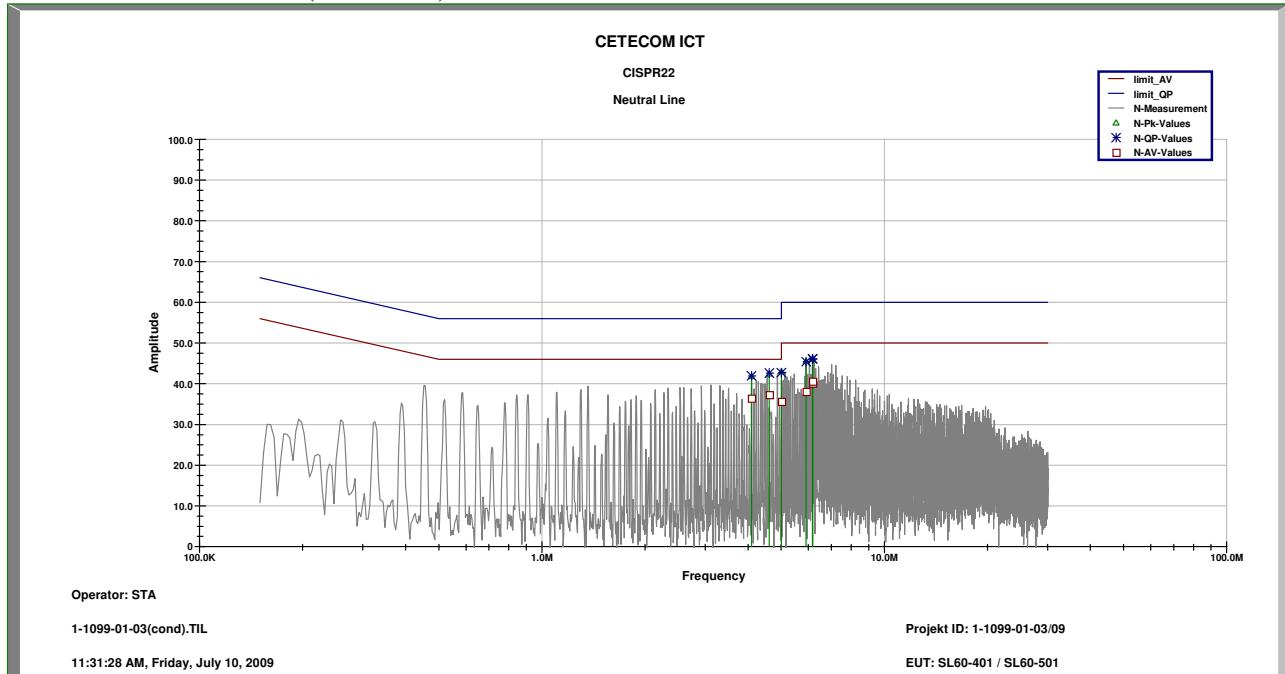

Plot 4a: 150 kHz - 30 GHz (Terminal B) Phase Line

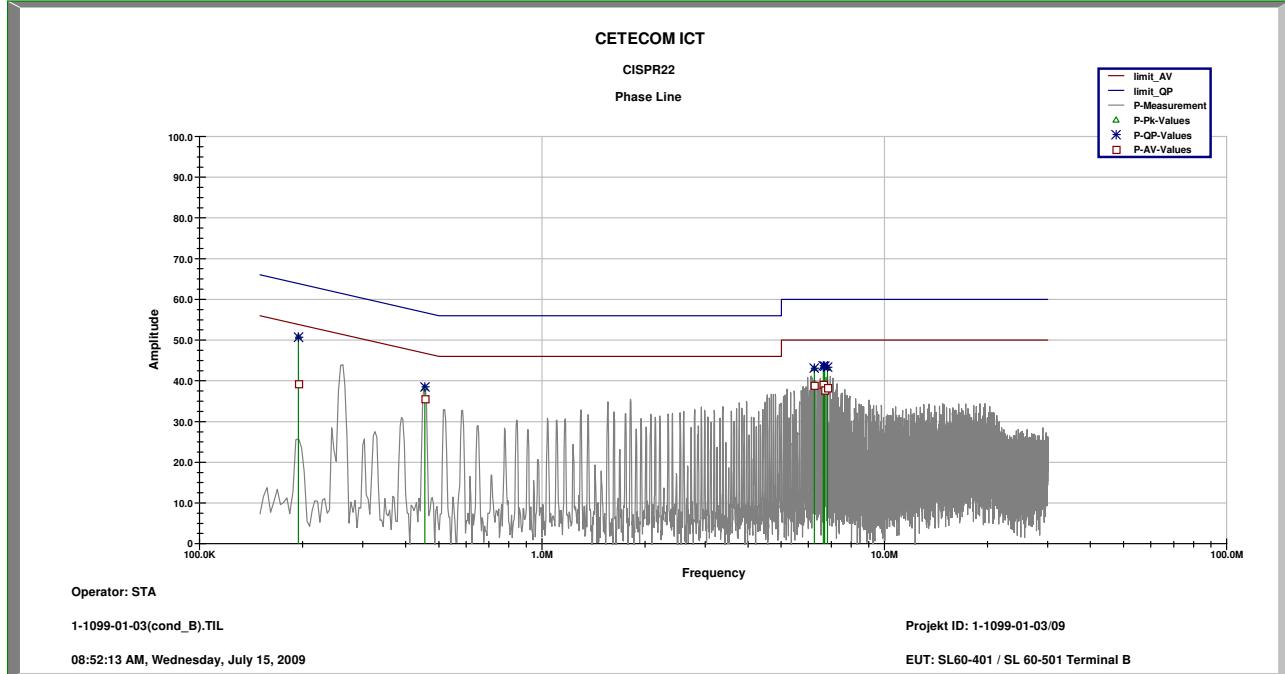

Plot 4b: 150 kHz - 30 GHz (Terminal B) Neutral Line

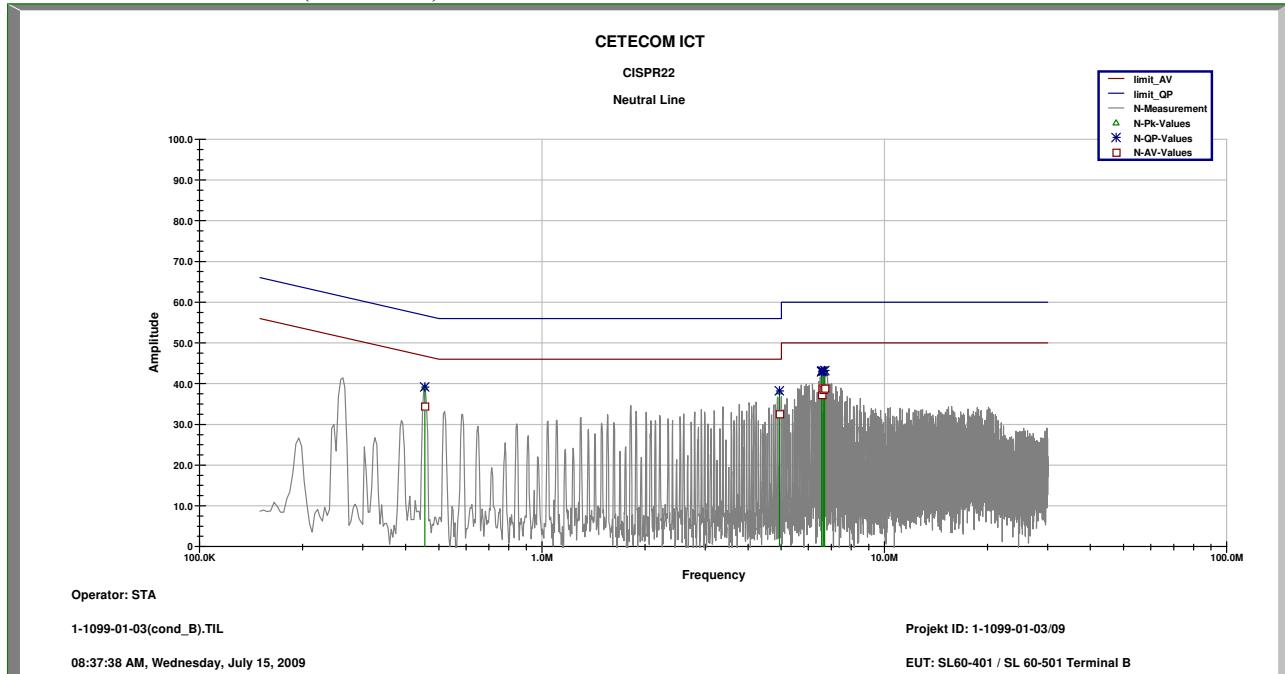


Limits: § 15.207

Frequency (MHz)	Conducted Emission (dB μ V) Quasi-Peak	Conducted Emission (dB μ V) Average
0.15 -0.5	66 to 56	56 to 46
0.5 - 5	56	46
5 - 30	60	50


Test Result: pass

5.6 Radiated Spurious Emissions §15.255 (c)

Plot 5: 9 kHz - 30 MHz (Terminal A)

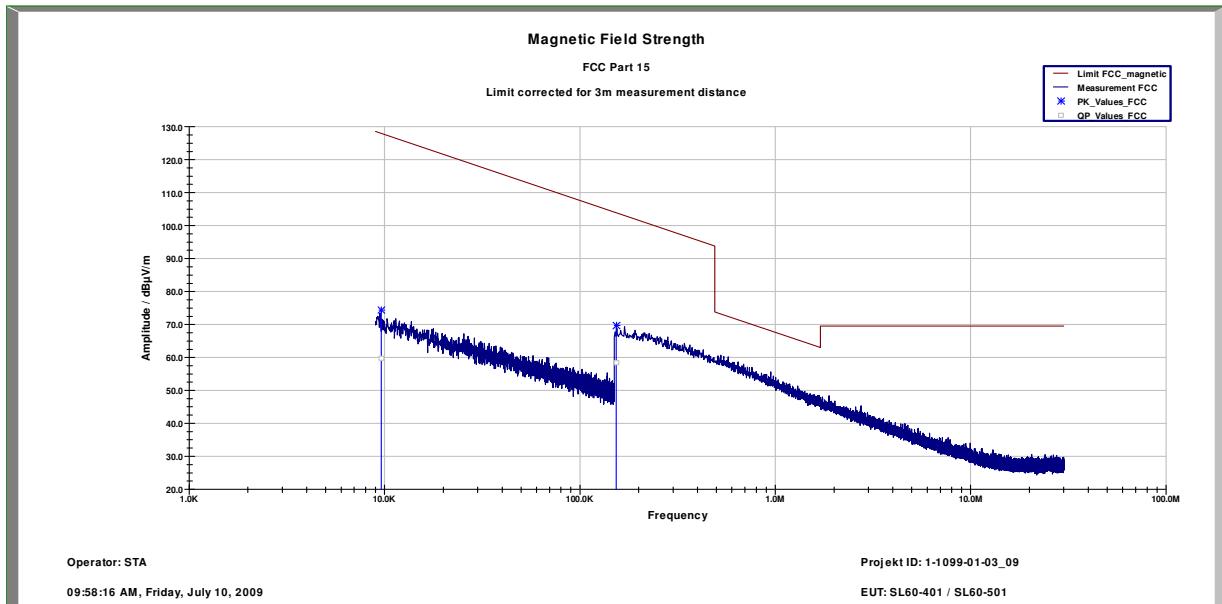


Plot 6: 30 MHz - 1 GHz (Terminal A+B)

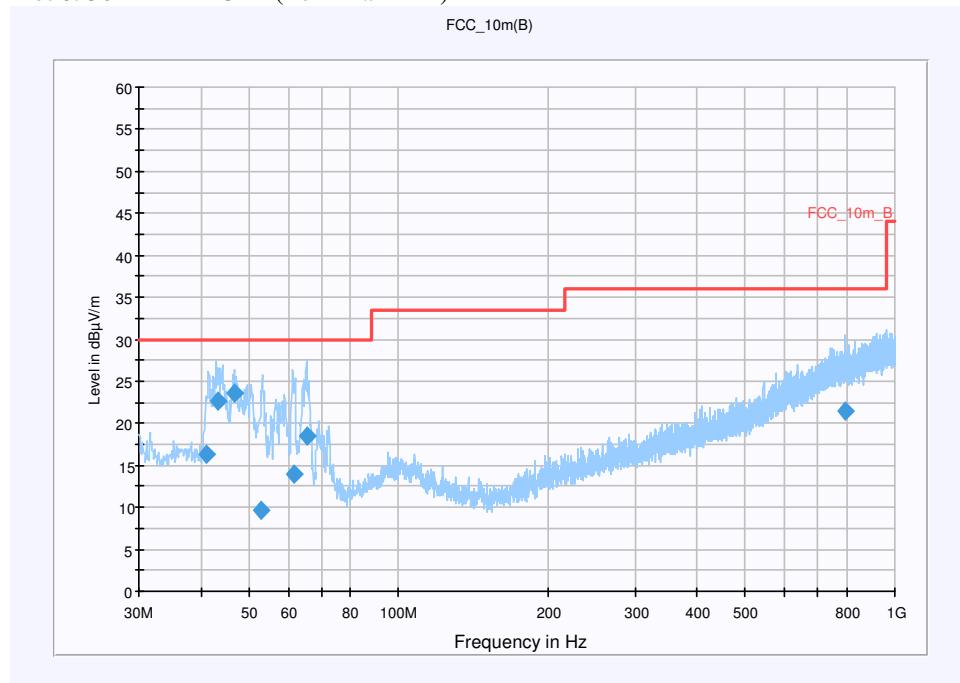


Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
41.074150	16.3	15000.000	120.000	165.0	V	40.0	13.5	13.7	30.0	
43.320400	22.6	15000.000	120.000	184.0	V	49.0	13.5	7.4	30.0	
46.649550	23.5	15000.000	120.000	156.0	V	88.0	13.5	6.5	30.0	
52.840900	9.6	15000.000	120.000	198.0	V	7.0	13.3	20.4	30.0	
61.740600	13.9	15000.000	120.000	152.0	V	-5.0	11.4	16.1	30.0	
65.746350	18.5	15000.000	120.000	171.0	V	-4.0	10.5	11.5	30.0	
795.833000	21.5	15000.000	120.000	198.0	V	316.0	24.3	14.5	36.0	


Plot 7: 1 - 12 GHz (Terminal A)

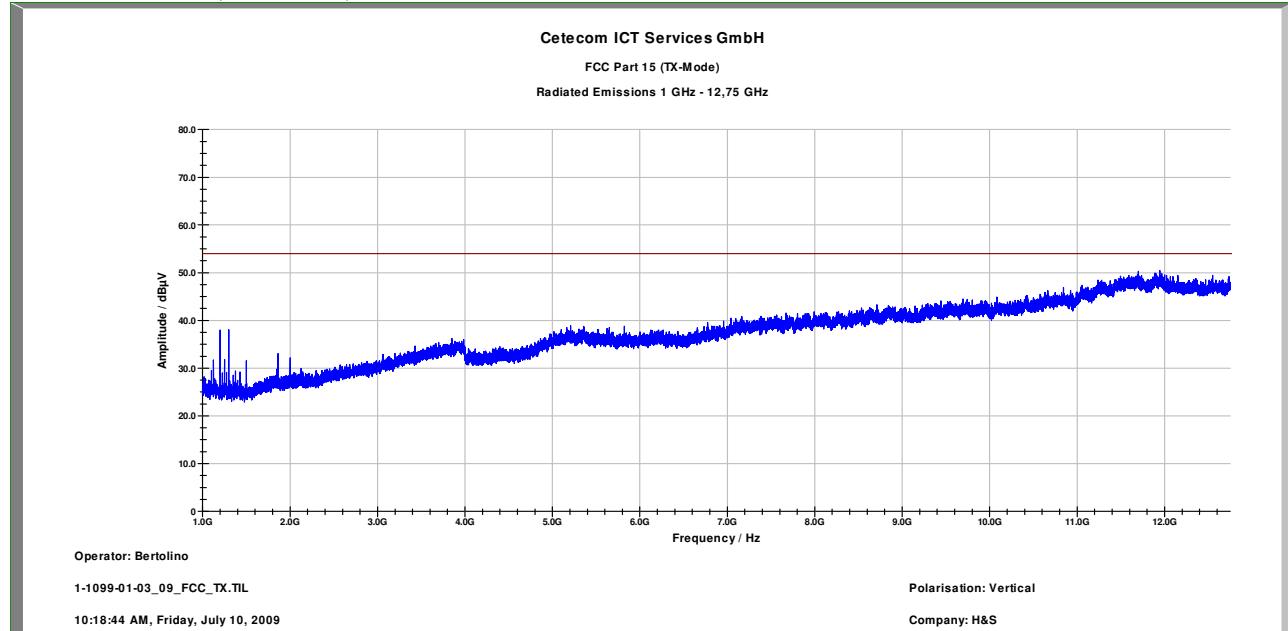


Plot 8: 12 - 18 GHz (Terminal A)

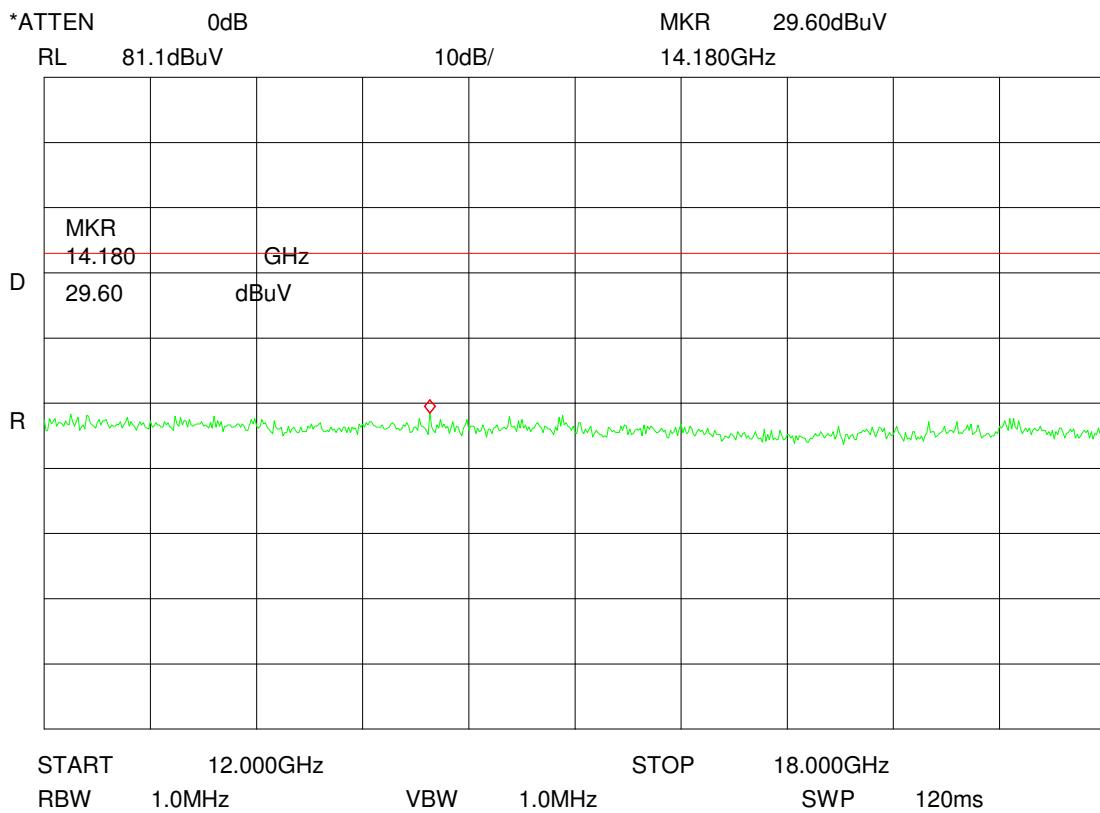


Plot 9: 18 – 27 GHz (Terminal A)

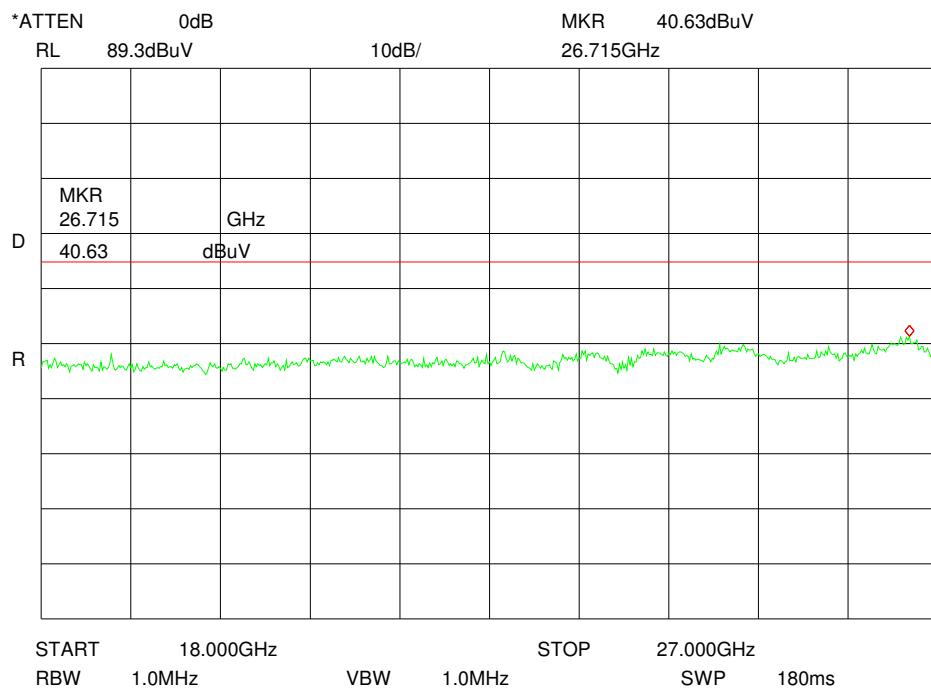


Plot 10: 27 - 40 GHz (Terminal A)

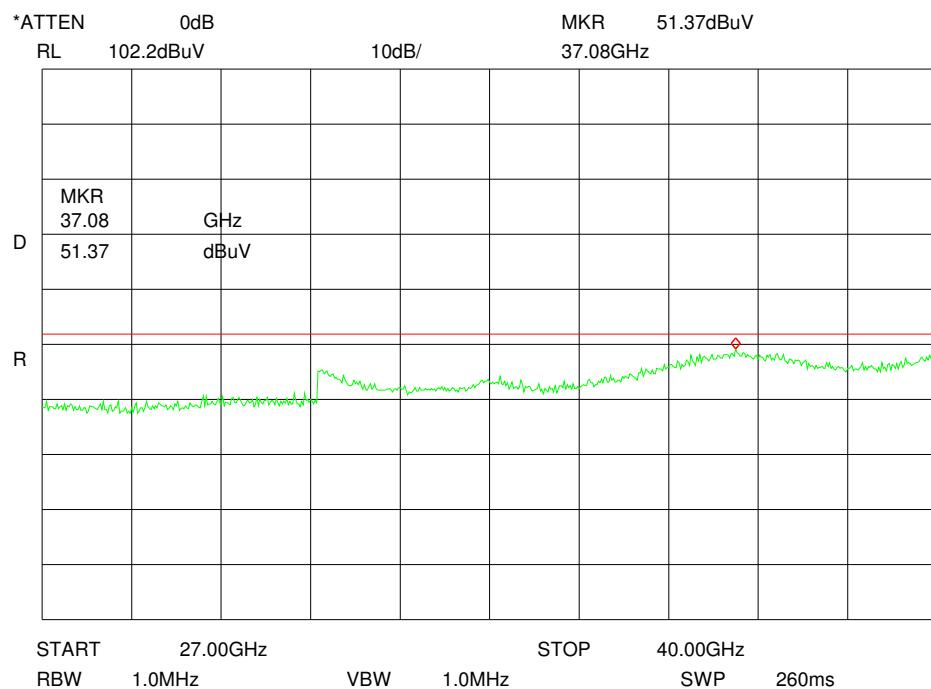

Plot 11: 40 - 50 GHz (Terminal A)

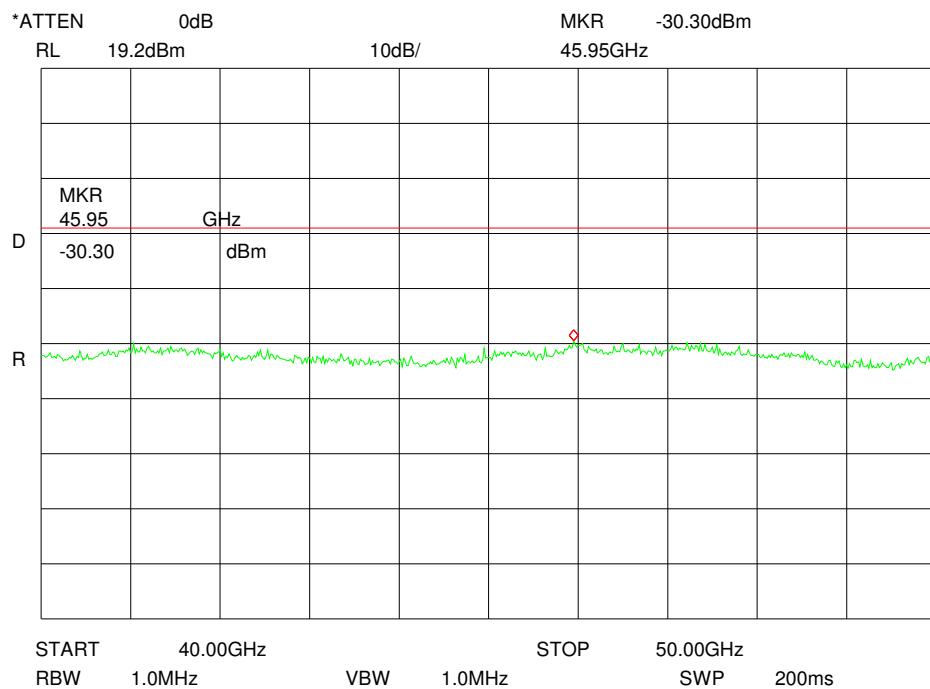


Plot 12: 50 - 57 GHz (Terminal A)

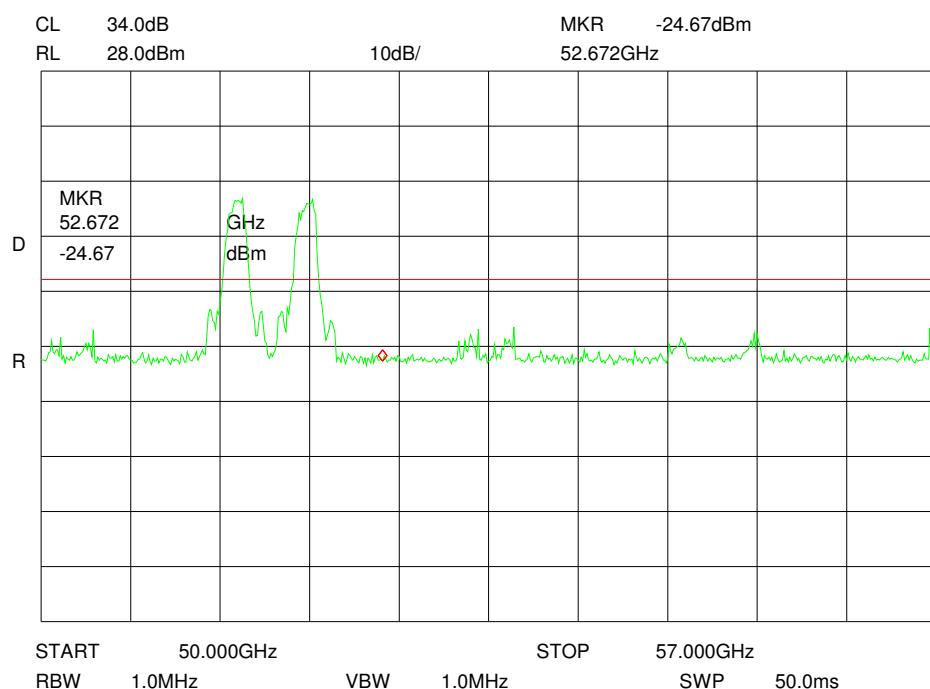


The plot shows peaks caused by the harmonic mixer.

Plot 13: 57 - 64 GHz (Terminal A)

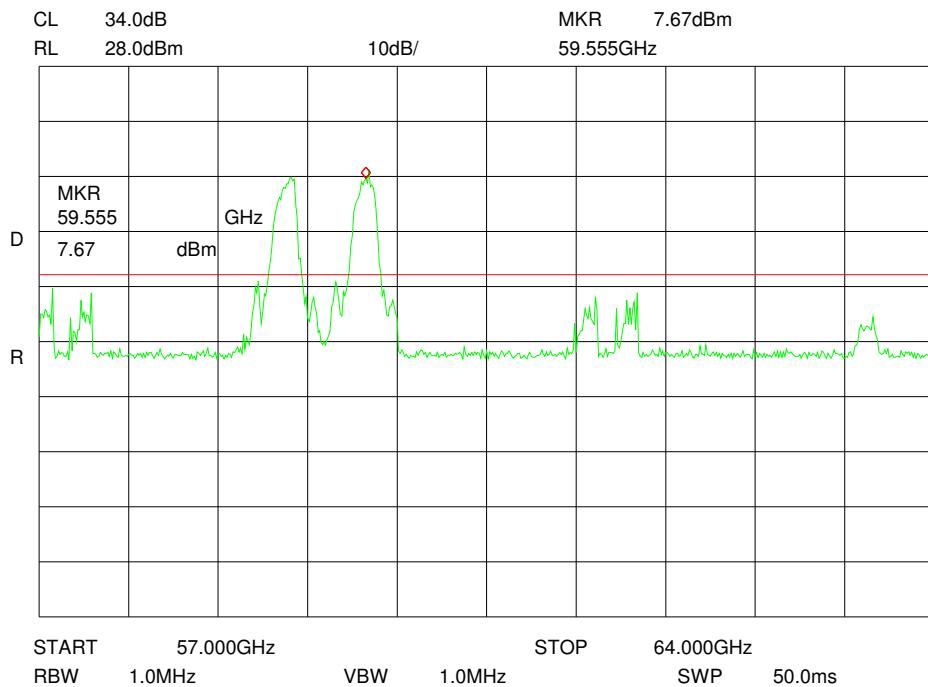


The left peak is caused by the harmonic mixer. The right peak is the wanted signal at 59.5 GHz.

Plot 14: 64 - 75 GHz (Terminal A)

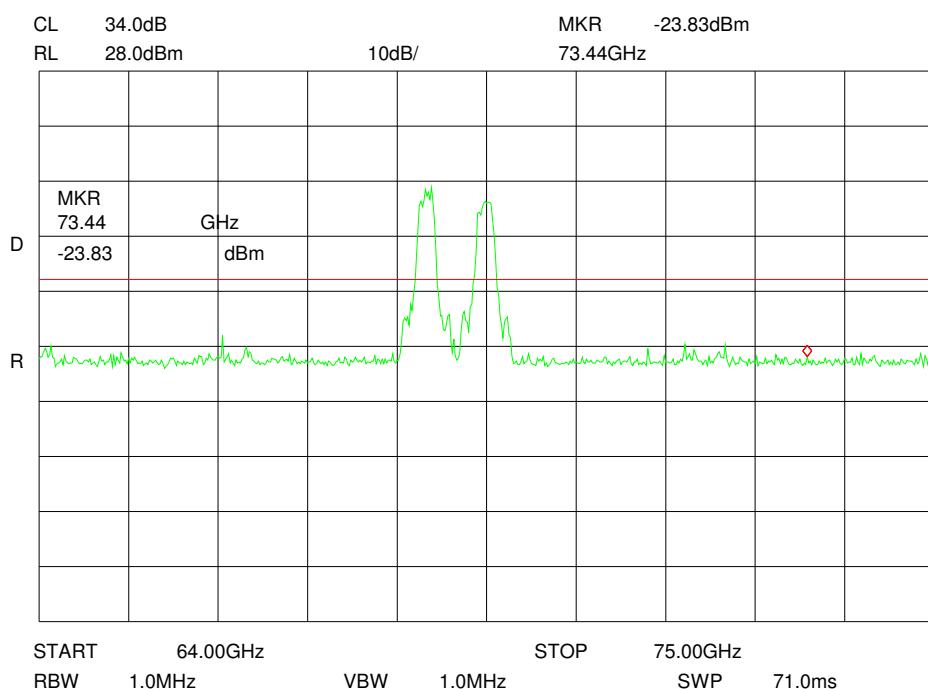


The plot shows peaks caused by the harmonic mixer.

Plot 15: 75 - 110 GHz (Terminal A)

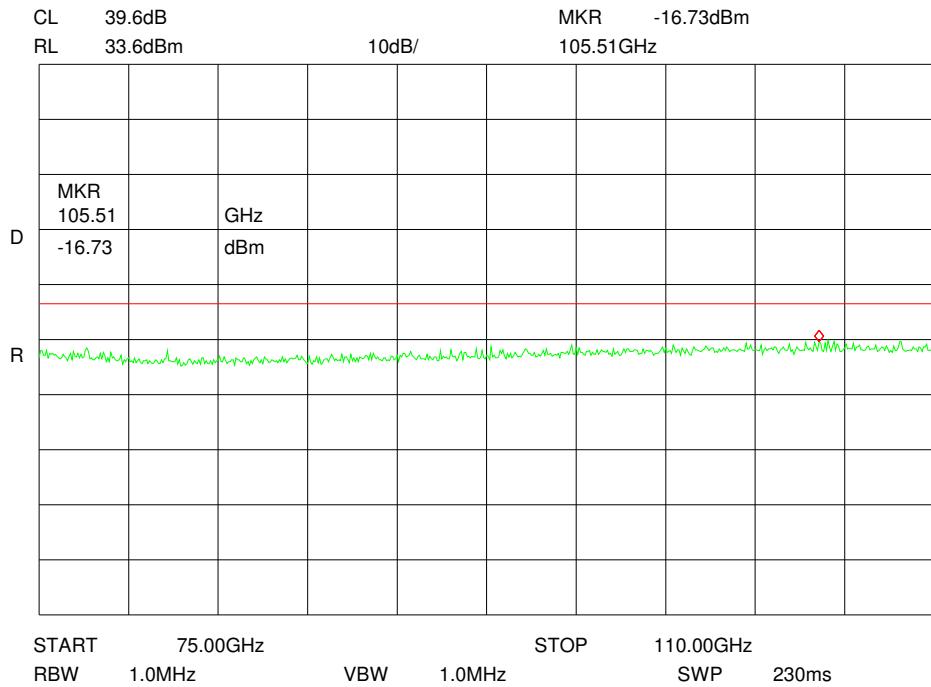


Plot 16: 110 - 170 GHz (Terminal A)

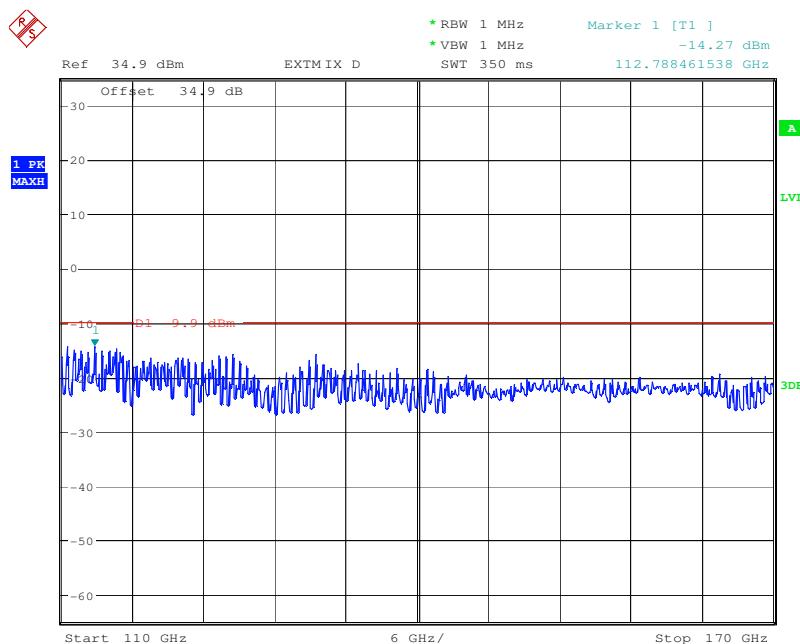


Date: 8.JUL.2009 11:12:03


Plot 17: 170 - 200 GHz (Terminal A)

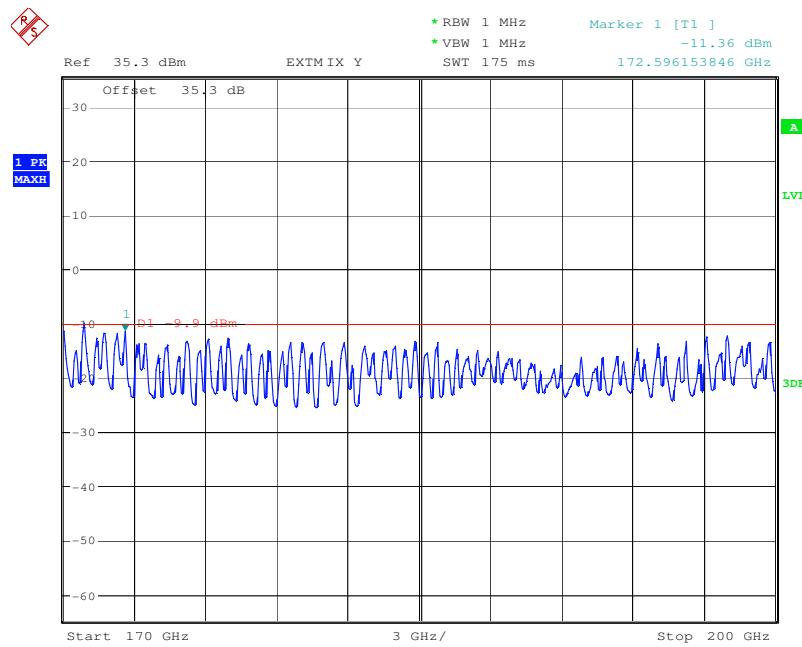

Plot 18: 9 kHz - 30 MHz (Terminal B)

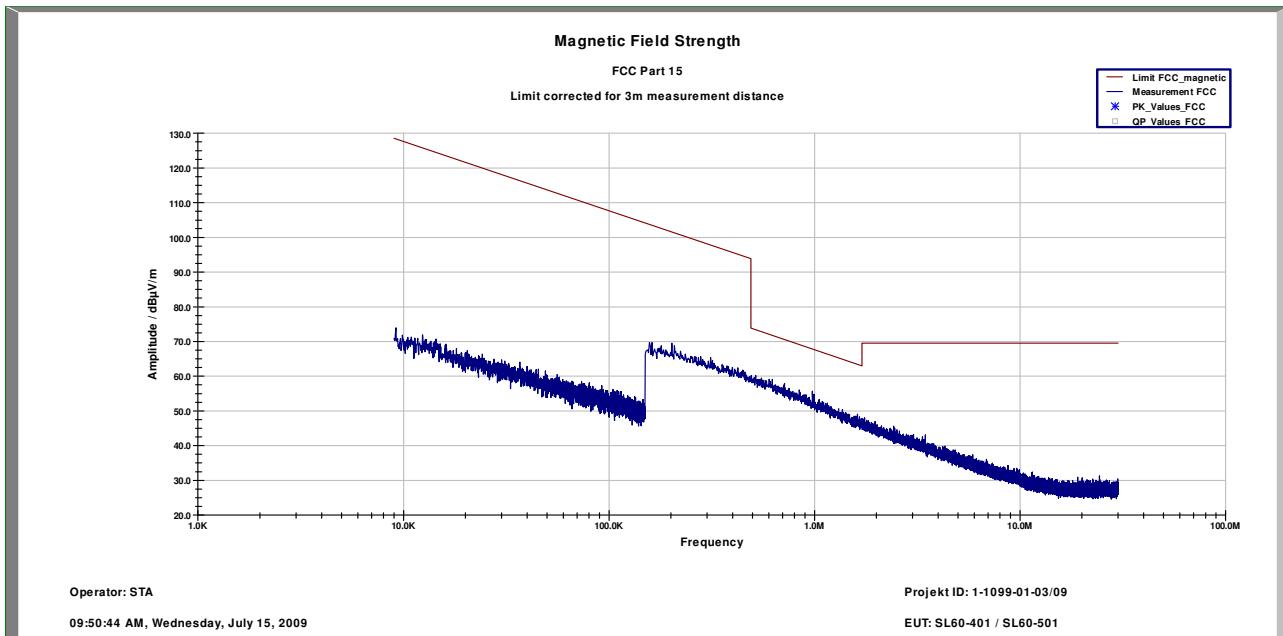


Plot 19: 30 MHz - 1 GHz (Terminal A+B)

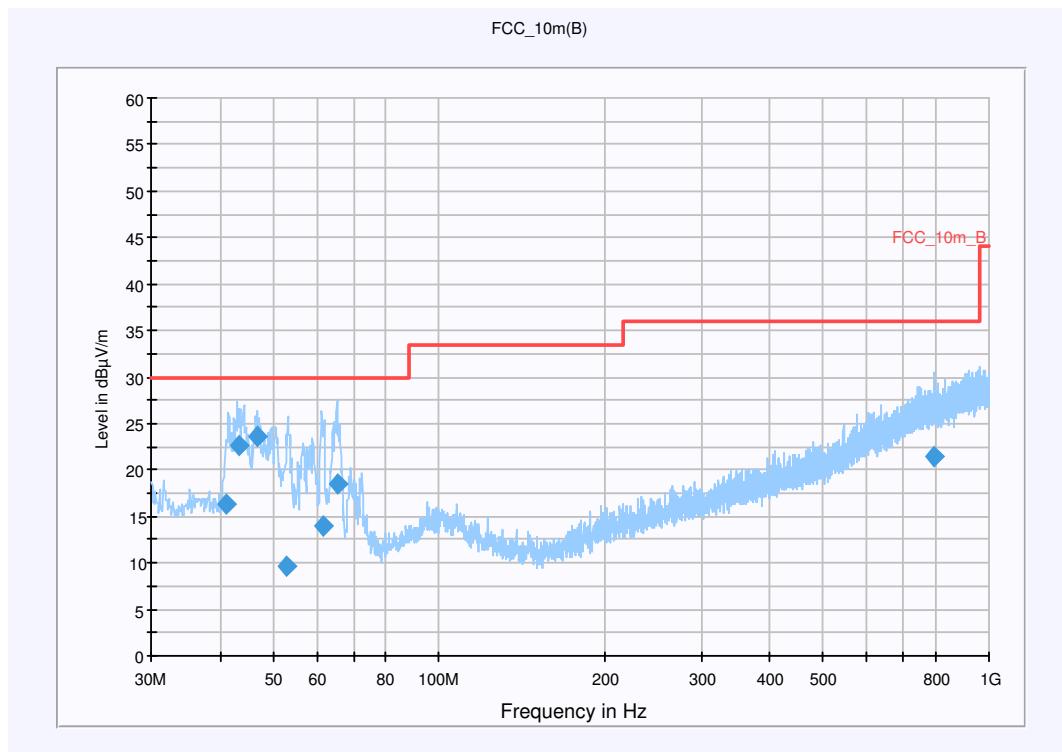


Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
41.074150	16.3	15000.000	120.000	165.0	V	40.0	13.5	13.7	30.0	
43.320400	22.6	15000.000	120.000	184.0	V	49.0	13.5	7.4	30.0	
46.649550	23.5	15000.000	120.000	156.0	V	88.0	13.5	6.5	30.0	
52.840900	9.6	15000.000	120.000	198.0	V	7.0	13.3	20.4	30.0	
61.740600	13.9	15000.000	120.000	152.0	V	-5.0	11.4	16.1	30.0	
65.746350	18.5	15000.000	120.000	171.0	V	-4.0	10.5	11.5	30.0	
795.833000	21.5	15000.000	120.000	198.0	V	316.0	24.3	14.5	36.0	


Plot 20: 1 GHz - 12 GHz (Terminal B)

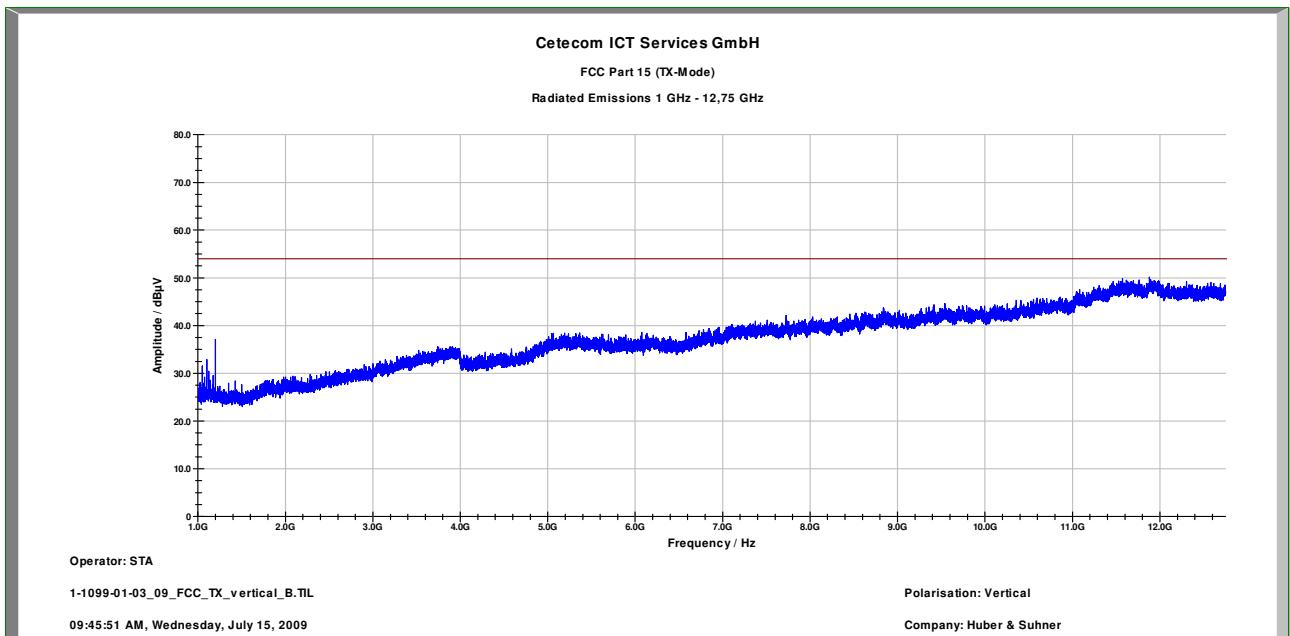


Plot 21: 12 - 18 GHz (Terminal B)

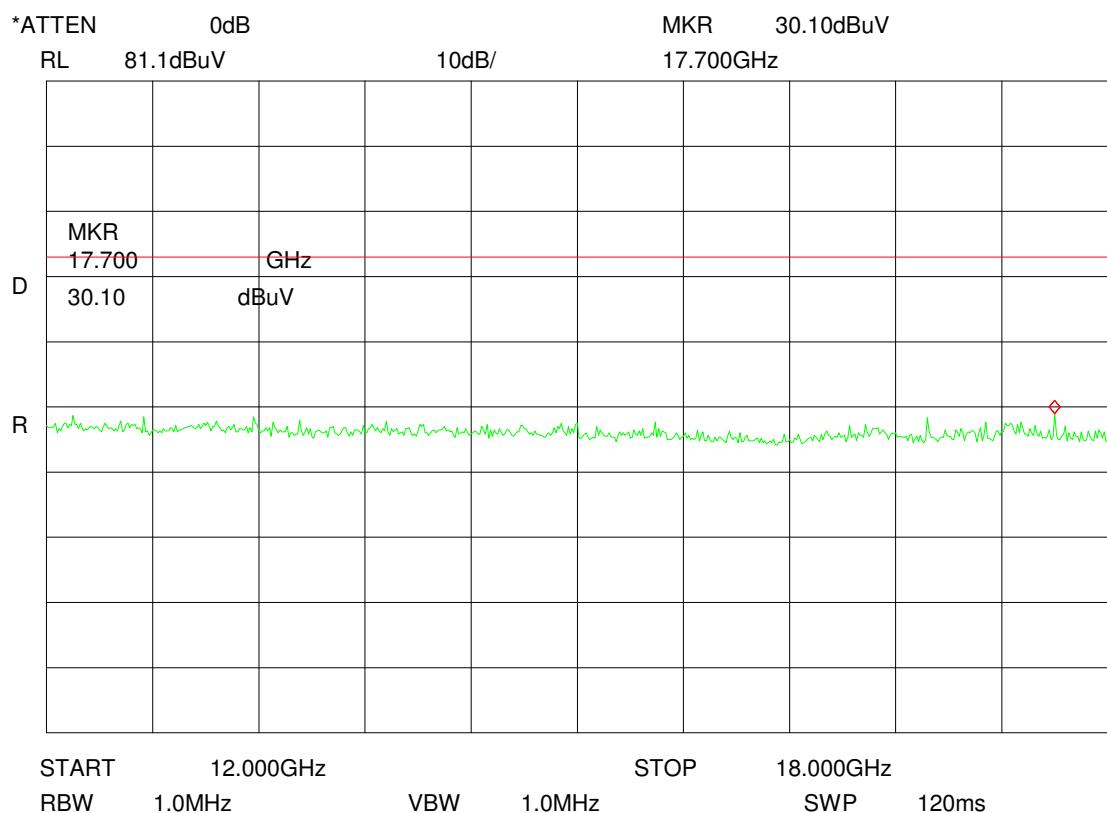


Plot 22: 18 - 27 GHz (Terminal B)

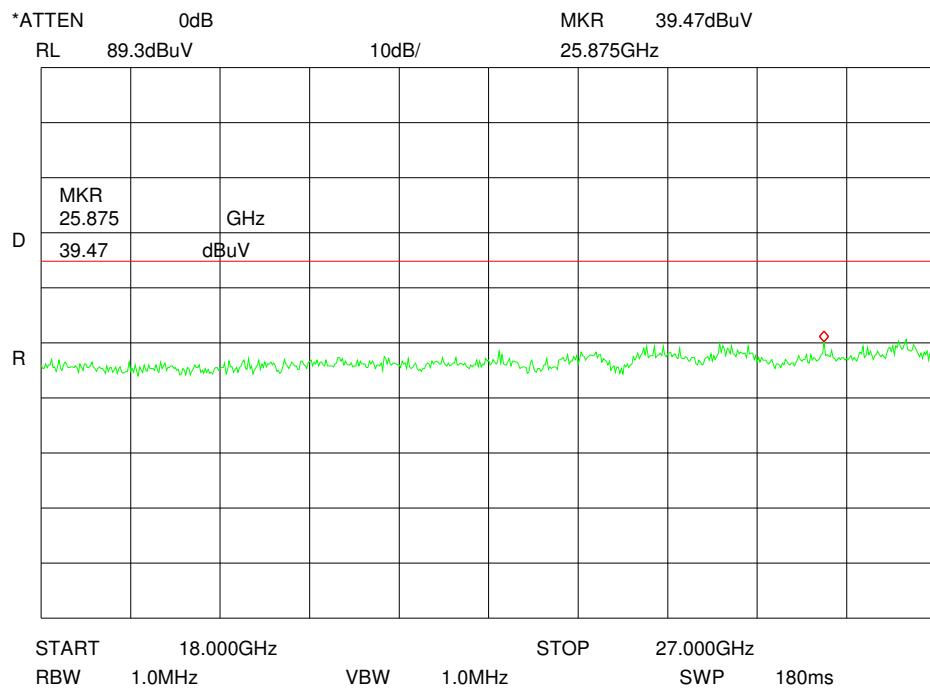


Plot 23: 27 – 40 GHz (Terminal B)

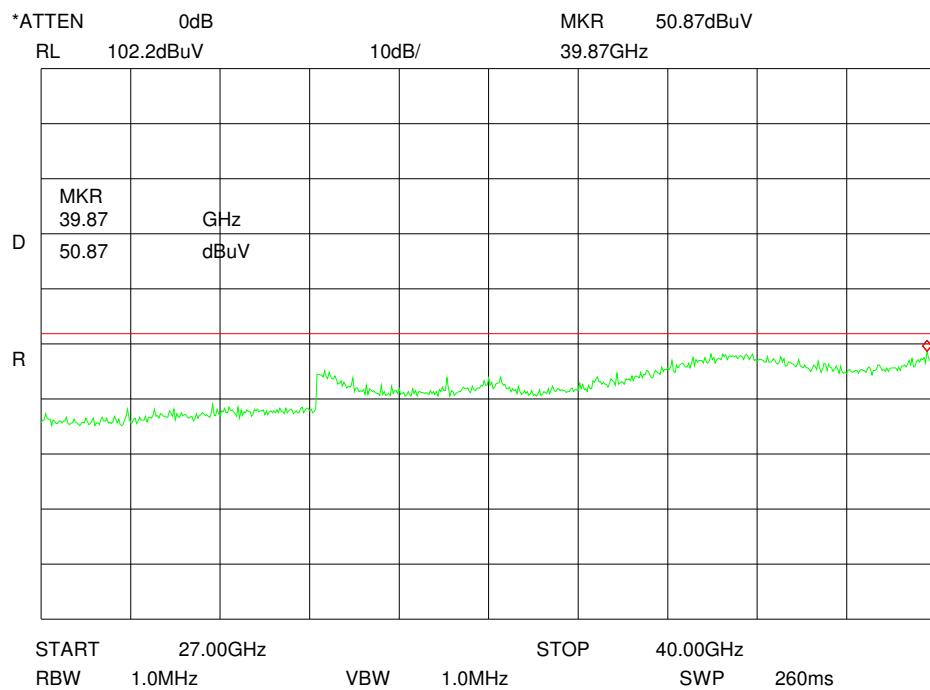

Plot 24: 40 - 50 GHz (Terminal B)

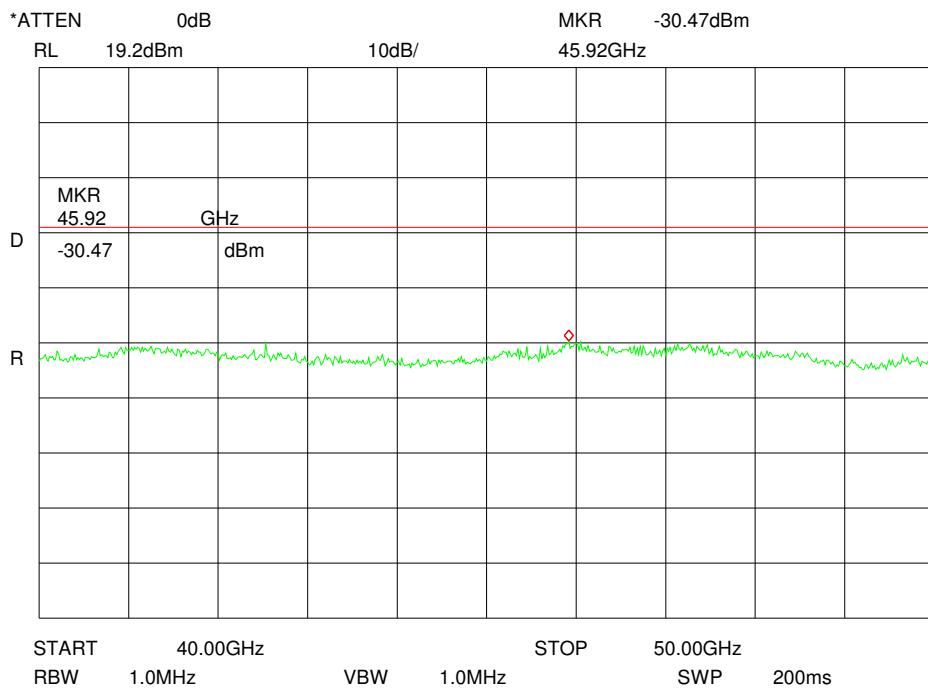


Plot 25: 50 - 57 GHz (Terminal B)

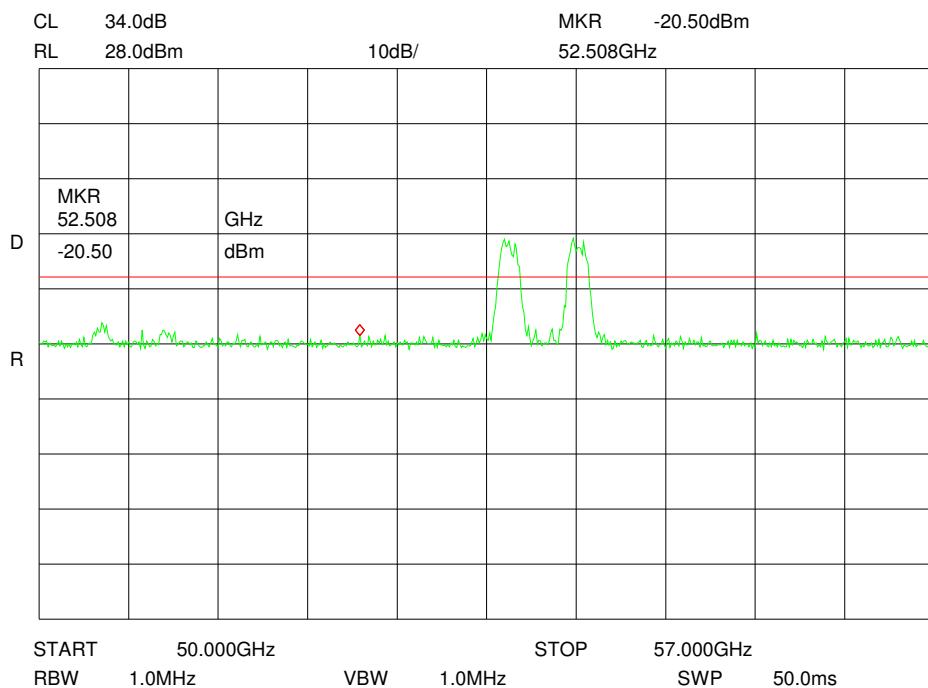


The plot shows peaks caused by the harmonic mixer.

Plot 26: 57 - 64 GHz (Terminal B)

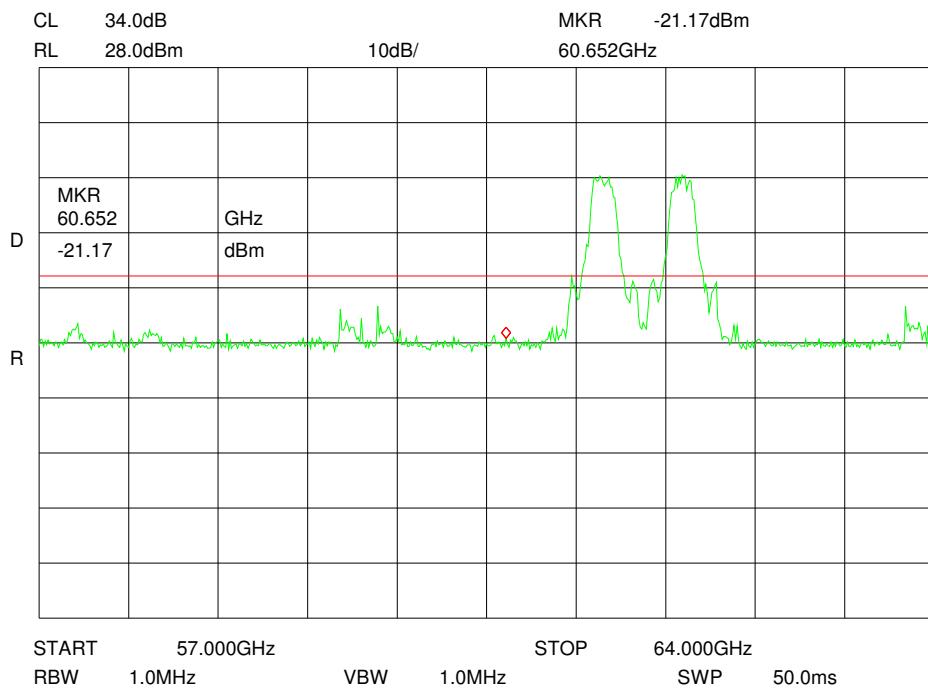


The left peak is caused by the harmonic mixer. The right peak is the wanted signal at 62.0 GHz

Plot 27: 64 - 75 GHz (Terminal B)

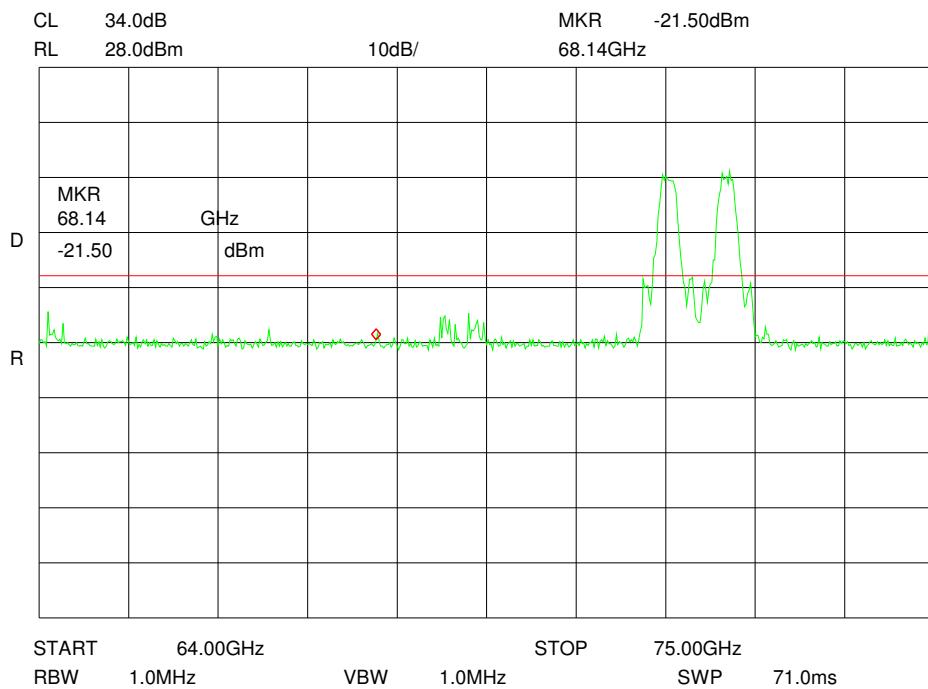


The plot shows peaks caused by the harmonic mixer.

Plot 28: 75 - 110 GHz (Terminal B)

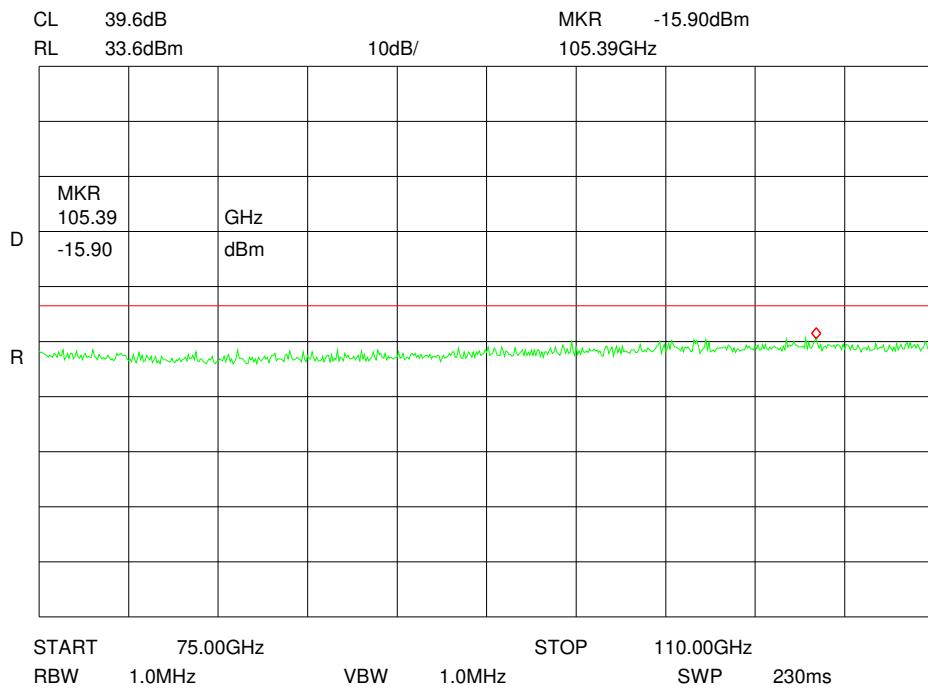


Plot 29: 110 - 170 GHz (Terminal B)

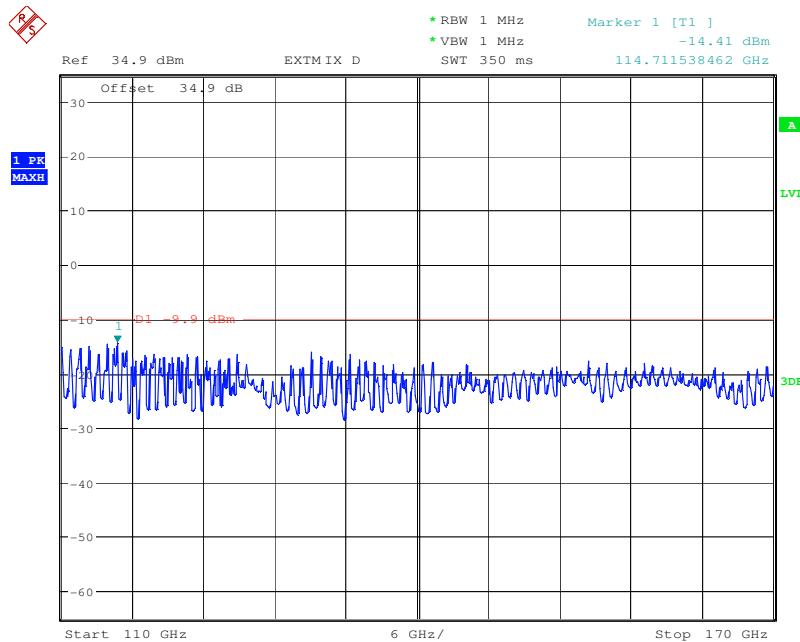

Date: 15.JUL.2009 14:51:58

Plot 30: 170 - 200 GHz (Terminal B)

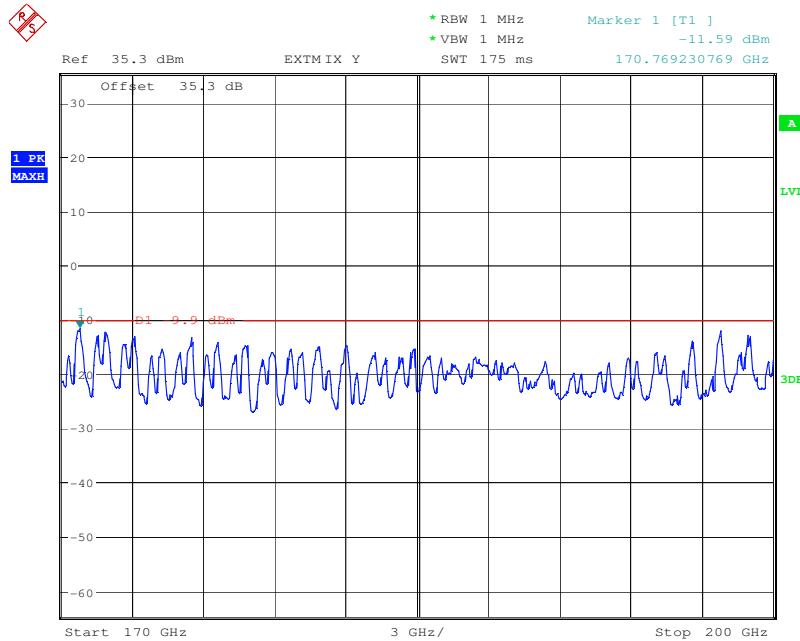

Date: 15.JUL.2009 14:55:28

All spurious emissions detected are lower in level than the fundamental signal.

Limits: § 15.255 (c)

(c) Limits on spurious emissions:

- (1) The power density of any emissions outside the 57-64 GHz band shall consist solely of spurious emissions.
- (2) Radiated emissions below 40 GHz shall not exceed the general limits in Section 15.209 of this part.
- (3) Between 40 GHz and 200 GHz, the level of these emissions shall not exceed 90 pW/cm² at a distance of 3 meters. [Equivalent to an EIRP of 102 μW.]
- (4) The levels of the spurious emissions shall not exceed the level of the fundamental emission.

Limit line:

Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30.0 μV/m / 29.5 dBμV/m	30
30 - 88	100 μV/m / 40.0 dBμV/m	3
88 - 216	150 μV/m / 43.5 dBμV/m	3
216 - 960	200 μV/m / 46.0 dBμV/m	3
above 960 up to 40 GHz	500 μV/m / 54.0 dBμV/m	3
40 GHz - 200 GHz	90 pW/cm ²	3

Remark:

90 pW/cm² measured at a distance of 3m corresponds to an EIRP of 102 μW / -9.9 dBm.

Test Result: pass

5.7 Total Peak Transmitter Output Power §15.255 (e)

Terminal A:

The maximum peak power density PD in $r = 3$ m distance is determined as

$$10.7 \text{ } [\mu\text{W/cm}^2]$$

Peak Power (EIRP)

$$\text{EIRP} = \text{PD} * 4\pi * r^2 = \text{PD} * 1130973.4 \text{ cm}^2$$

$$\text{EIRP} = 12.106 \text{ W}$$

$$\text{EIRP} = 10.83 \text{ dBW}$$

$$\text{EIRP} = 40.83 \text{ dBm}$$

Terminal B:

The maximum peak power density PD in $r = 3$ m distance is determined as

$$12.99 \text{ } [\mu\text{W/cm}^2]$$

Peak Power (EIRP)

$$\text{EIRP} = \text{PD} * 4\pi * r^2 = \text{PD} * 1130973.4 \text{ cm}^2$$

$$\text{EIRP} = 14.689 \text{ W}$$

$$\text{EIRP} = 11.67 \text{ dBW}$$

$$\text{EIRP} = 41.67 \text{ dBm}$$

Results:

	radiated power [dBm]	antenna gain [dBi]	conducted power [dBm]	conducted power [mW]
Terminal A	40.83	40.0	0.83	1.21
Terminal B	41.67	40.0	1.67	1.47

Remark:

Antenna gain was specified by the manufacturer. Antenna patterns are available (see Annex 1).

Limits: § 15.255 (e)

(e) Except as specified below, the total peak transmitter output power shall not exceed 500 mW.
 (1) Transmitters with an emission bandwidth of less than 100 MHz must limit their peak transmitter output power to the product of 500 mW times their emission bandwidth divided by 100 MHz. For the purposes of this paragraph, emission bandwidth is defined as the instantaneous frequency range occupied by a steady state radiated signal with modulation, outside which the radiated power spectral density never exceeds 6 dB below the maximum radiated power spectral density in the band, as measured with a 100 kHz resolution bandwidth spectrum analyzer. The center frequency must be stationary during the measurement interval, even if not stationary during normal operation (e.g. for frequency hopping devices).

Test Result: pass

5.8 Fundamental Emissions under Extreme Conditions §15.255 (f)

Terminal A:

U _{AC} [V]	Temperature [°C]	Carrier frequency [GHz]	Measured frequency [GHz]	Difference [kHz]	Difference [ppm]
110	-30.0	59.500 000	59.499 831	-169	-2.8
110	-20.0	59.500 000	59.499 681	-319	-5.4
110	-10.0	59.500 000	59.499 468	-532	-8.9
110	0.0	59.500 000	59.499 215	-785	-13.2
110	+10.0	59.500 000	59.498 941	-1059	-17.8
94	+20.0	59.500 000	59.498 680	-1320	-22.2
110	+20.0	59.500 000	59.498 680	-1320	-22.2
126	+20.0	59.500 000	59.498 680	-1320	-22.2
110	+30.0	59.500 000	59.498 467	-1533	-25.8
110	+40.0	59.500 000	59.498 314	-1686	-28.3
110	+50.0	59.500 000	59.498 315	-1685	-28.3
110	+60.0	59.500 000	59.498 474	-1526	-25.6

Terminal B:

U _{AC} [V]	Temperature [°C]	Carrier frequency [GHz]	Measured frequency [GHz]	Difference [kHz]	Difference [ppm]
110	-30.0	62.000 000	62.000 322	+322	+5.2
110	-20.0	62.000 000	62.000 144	+143	+2.3
110	-10.0	62.000 000	61.999 896	-104	-1.7
110	0.0	62.000 000	61.999 605	-395	-6.4
110	+10.0	62.000 000	61.999 304	-696	-11.2
94	+20.0	62.000 000	61.998 999	-1001	-16.1
110	+20.0	62.000 000	61.998 999	-1001	-16.1
126	+20.0	62.000 000	61.998 999	-1001	-16.1
110	+30.0	62.000 000	61.998 760	-1240	-20.0
110	+40.0	62.000 000	61.998 616	-1384	-22.3
110	+50.0	62.000 000	61.998 606	-1394	-22.5
110	+60.0	62.000 000	61.998 744	-1256	-20.3


Limits: §15.255 (f)

(f) Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range -20 to +50 degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.


Test Result: pass

5.9 Occupied Bandwidth § 15.255 (f)


Plot 31a: 6dB Bandwidth (Terminal A)

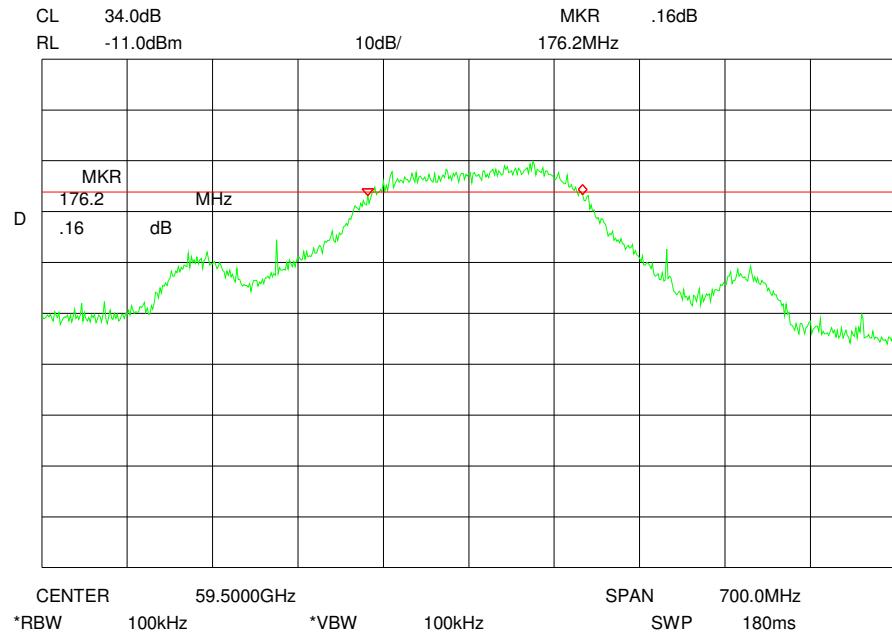


Plot 30b: 20dB Bandwidth (Terminal A)

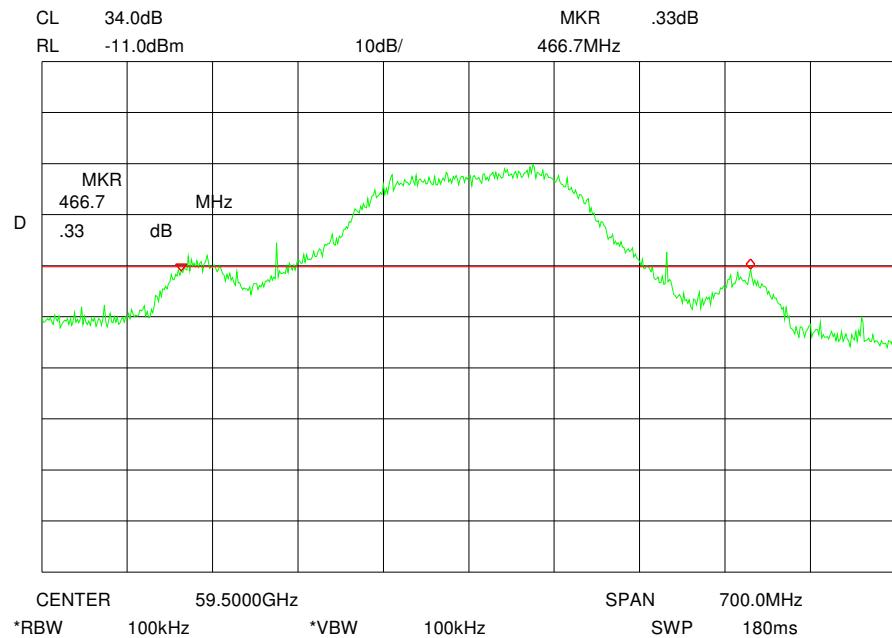

Plot 32a: 6dB Bandwidth (Terminal B)

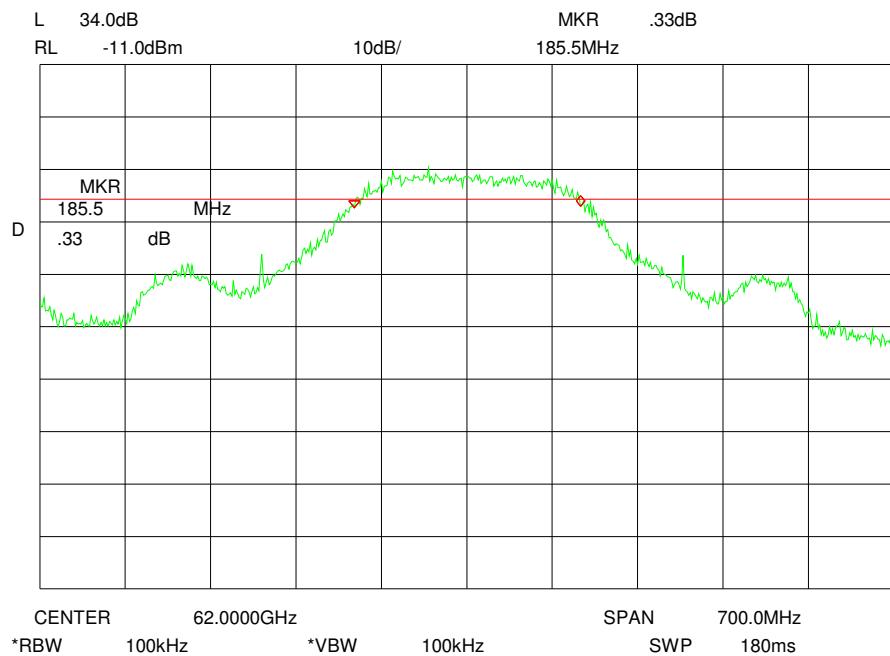

Plot 29b: 20dB Bandwidth (Terminal B)

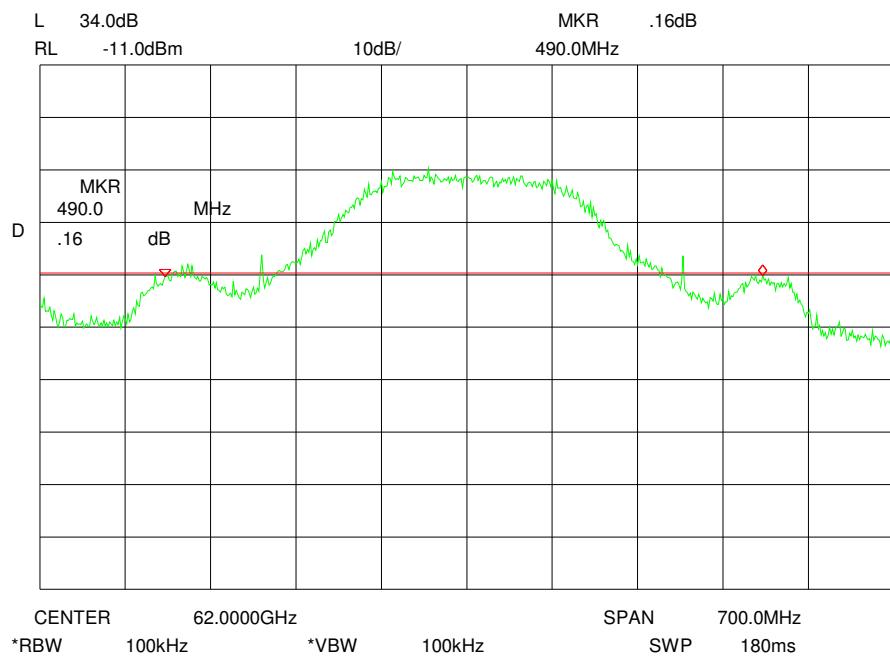**Limits: §15.255 (f)**

(f) Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range -20 to +50 degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.

Test Result: pass

6 Photographs of the Test Set-up

Photo No. 1

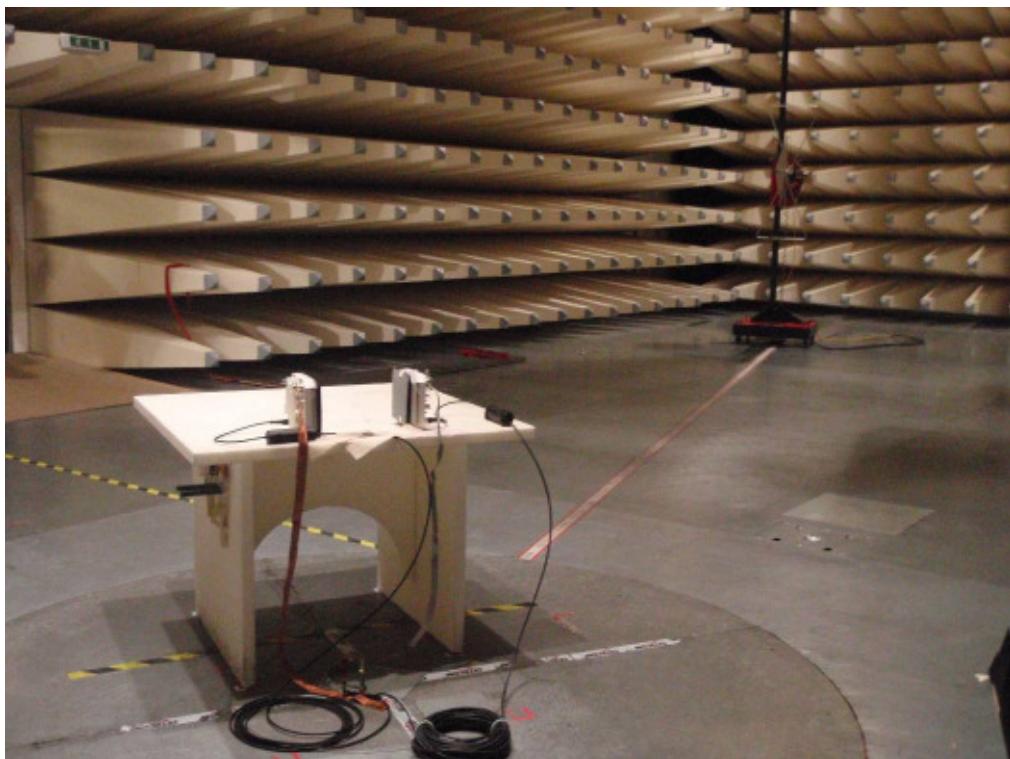


Photo No. 2



Photo No. 3

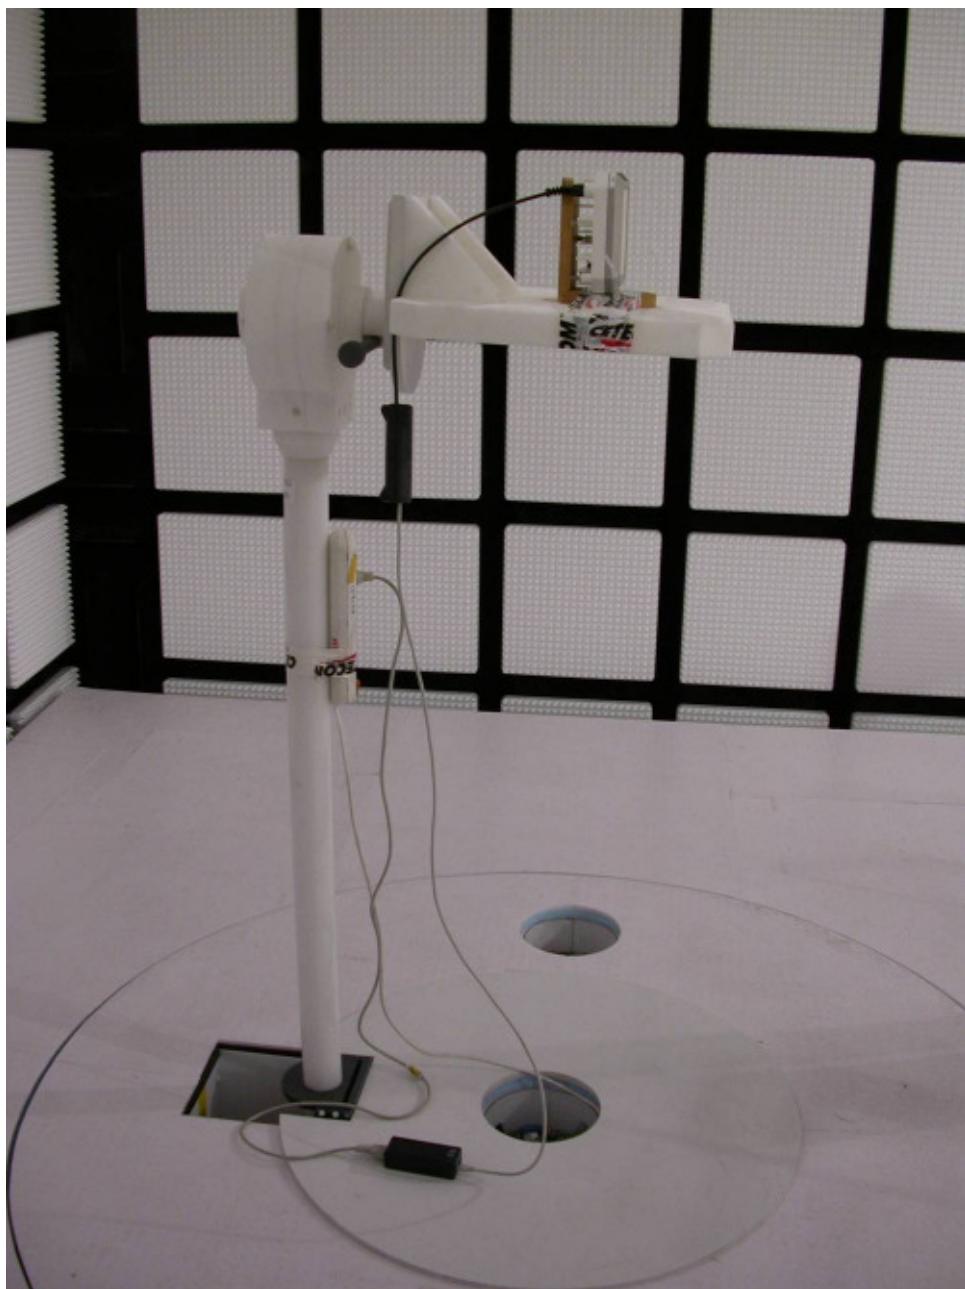


Photo No. 4



Photo No. 5

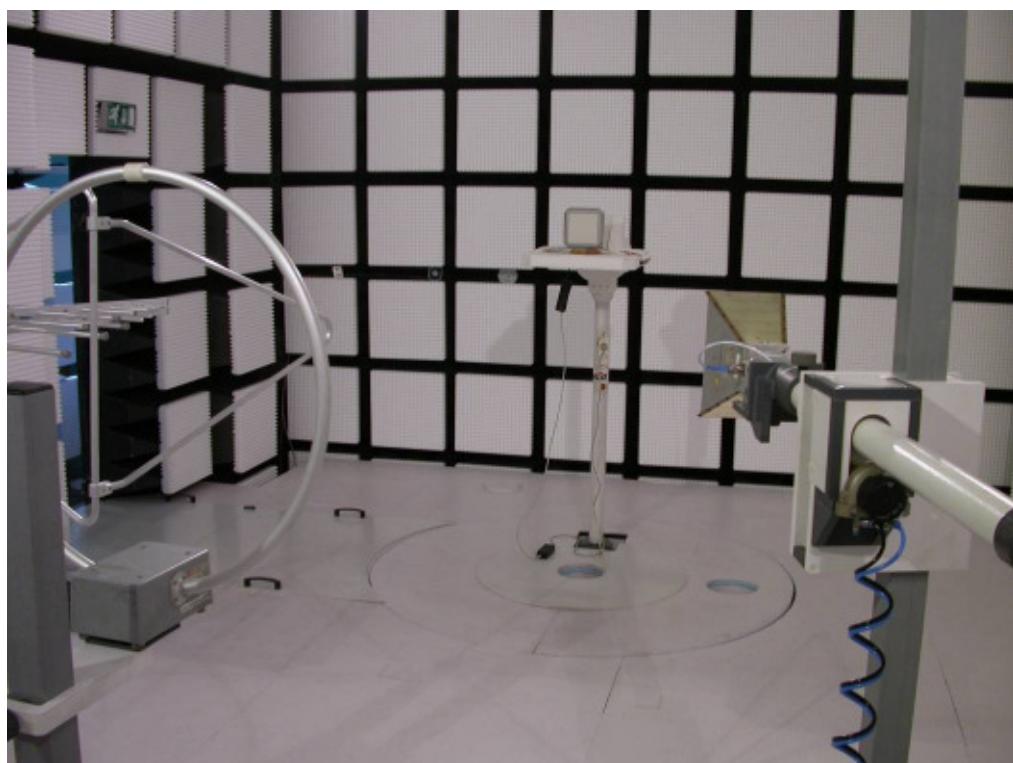
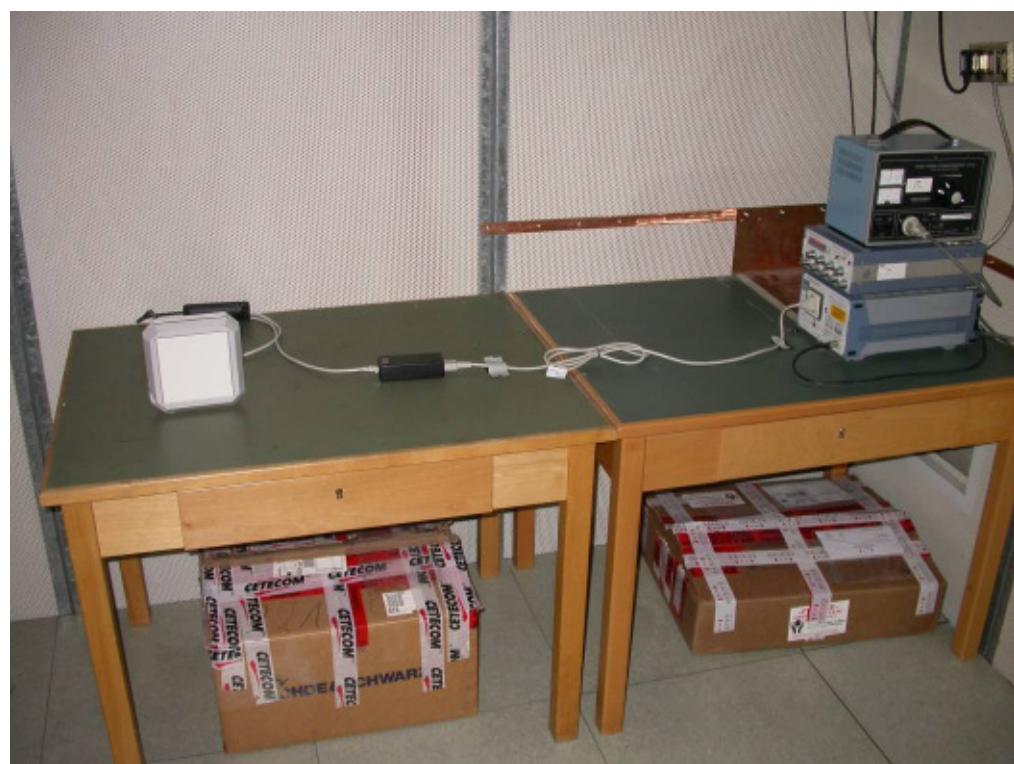


Photo No. 5

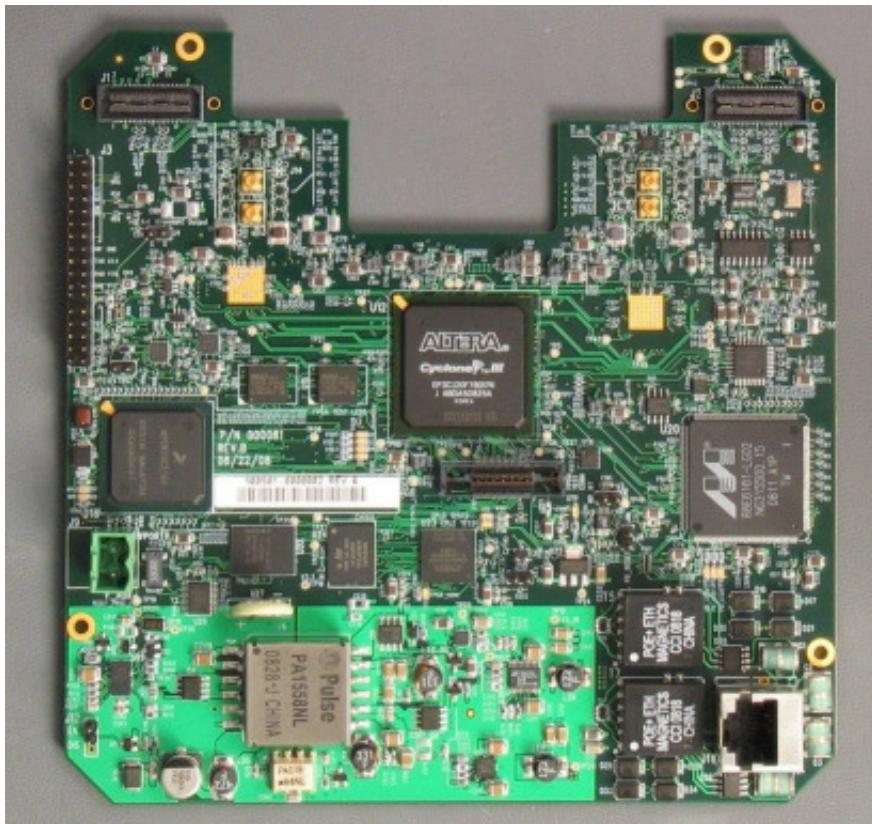


Photo No. 6




7 Photographs of the EUT, interior view

Photo No. 1




Top view of the mainboard

Photo No. 2

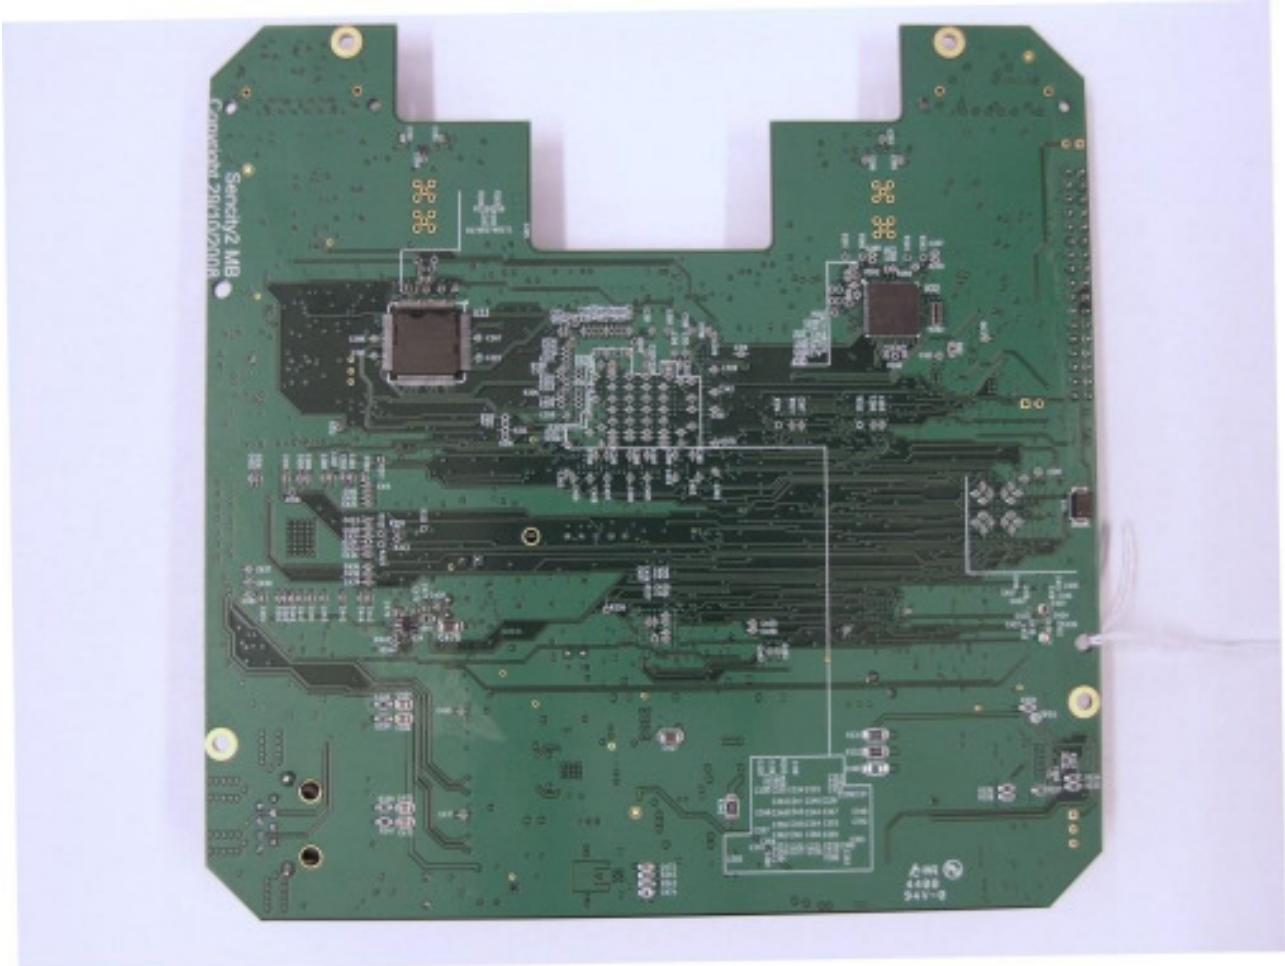


Bottom view of the mainboard

Photo No. 3

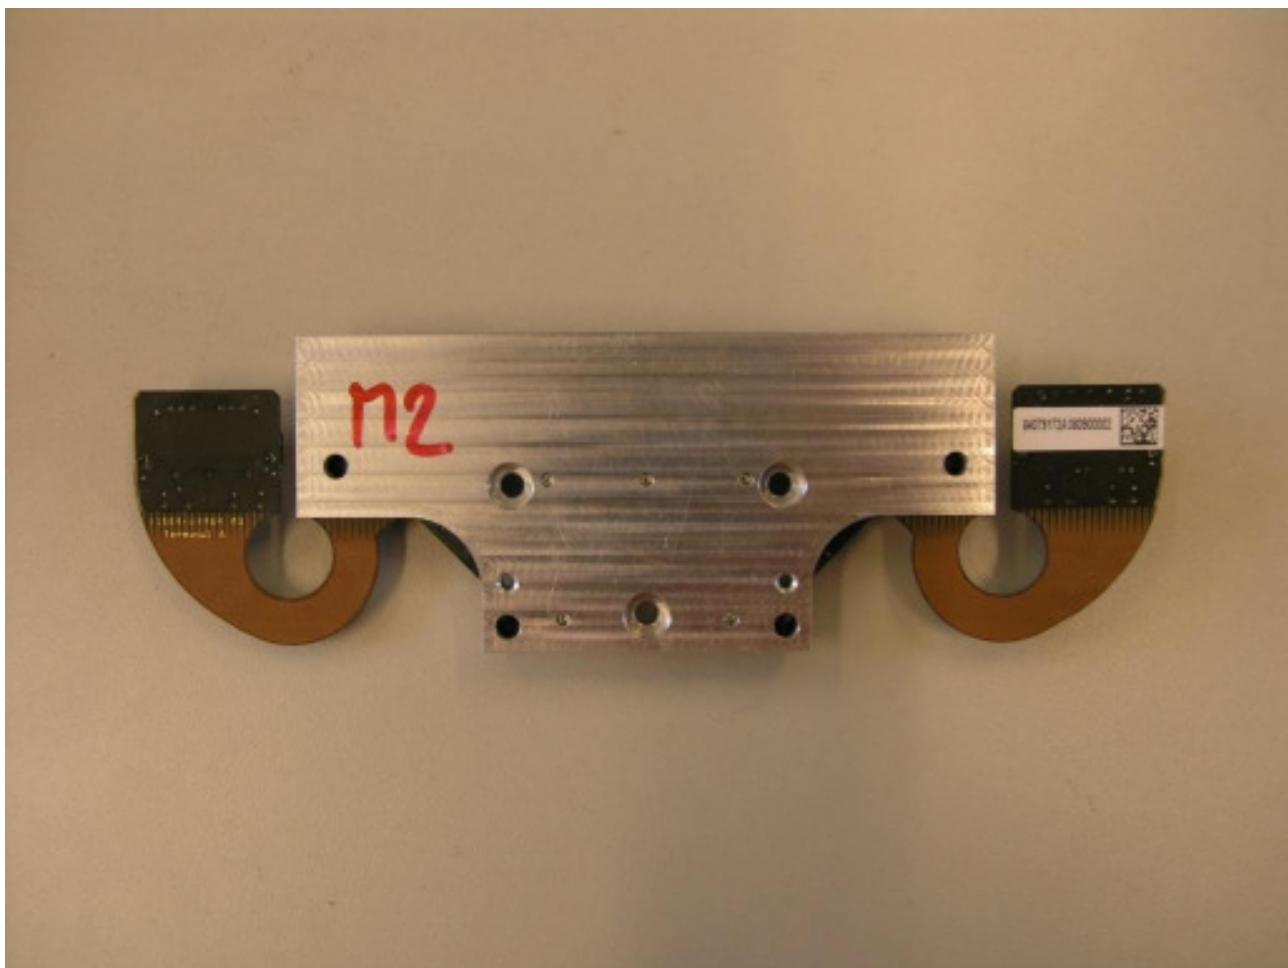

Top view of the microwave unit

Photo No. 4

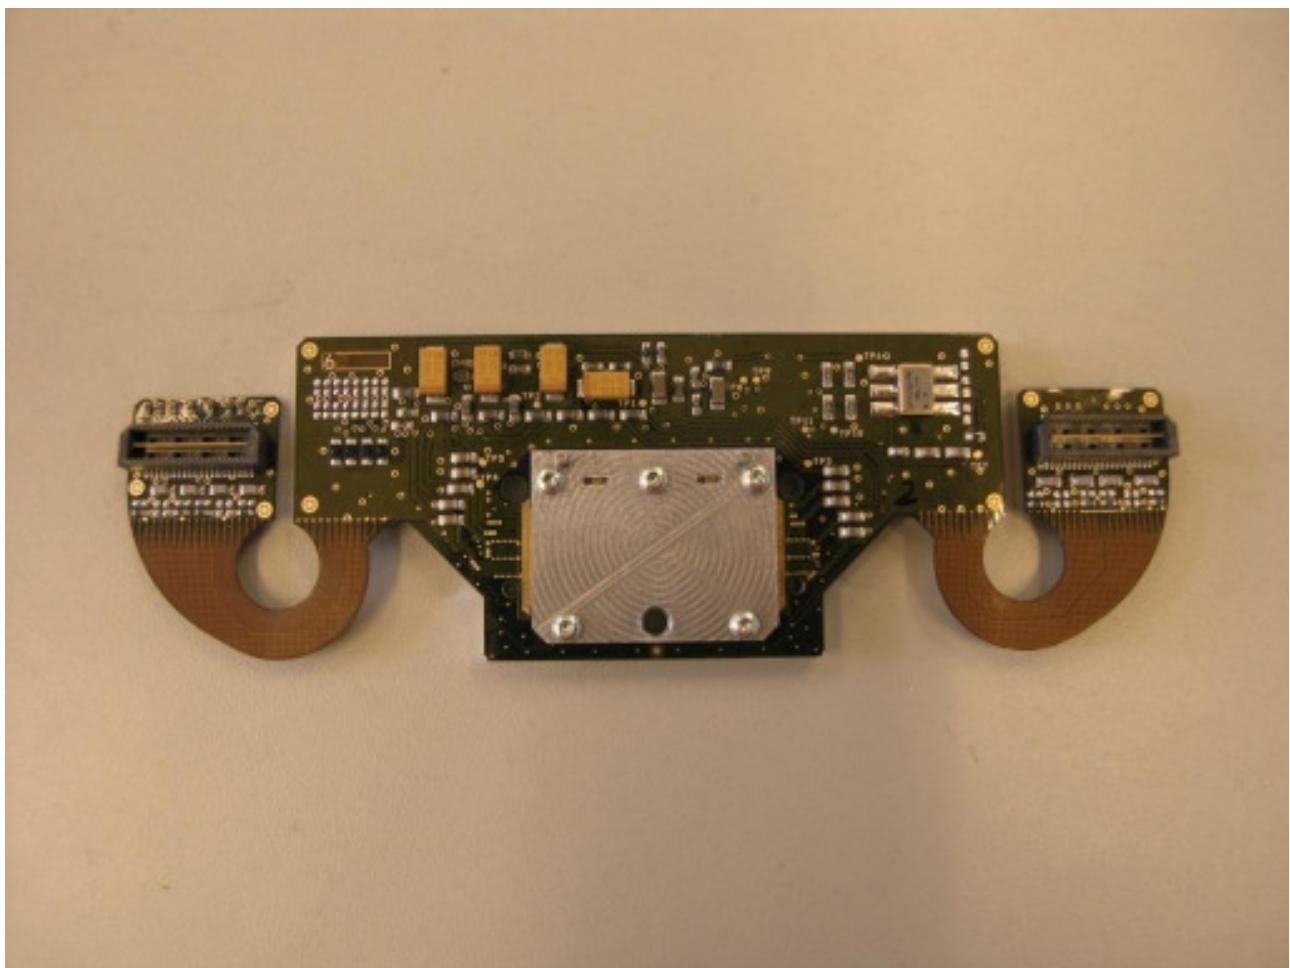

Bottom view of the microwave unit

8 Photographs of the EUT, exterior view

Photo No. 1



Photo No. 2



Photo No. 3

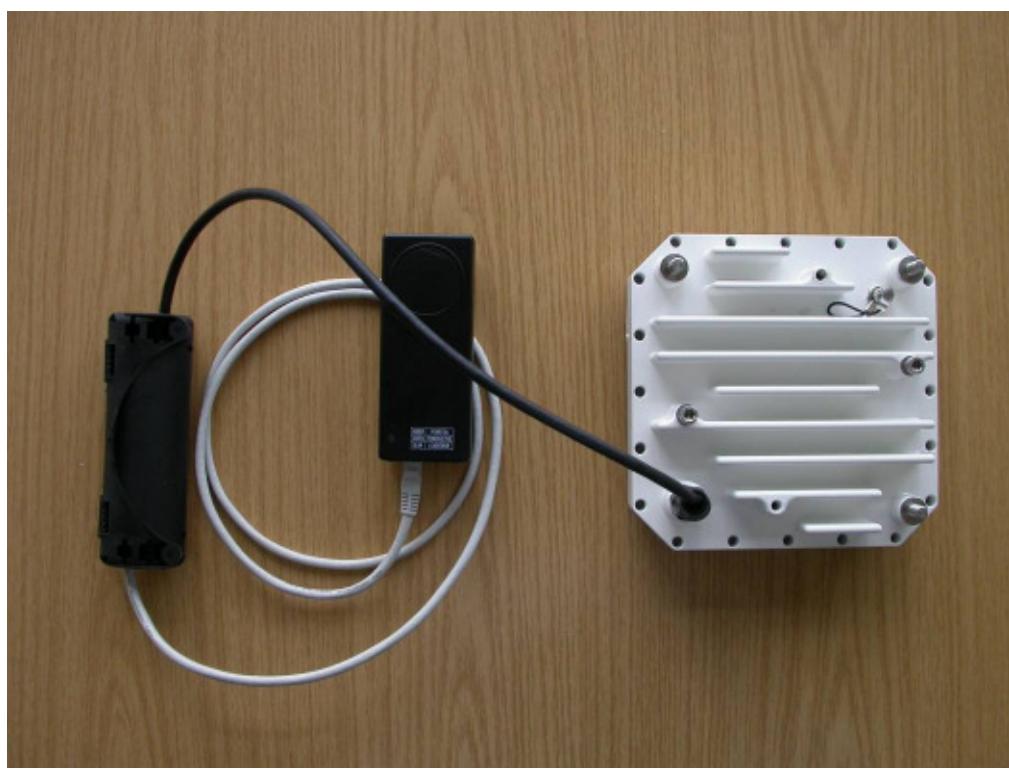


Photo No. 4



Photo No. 5


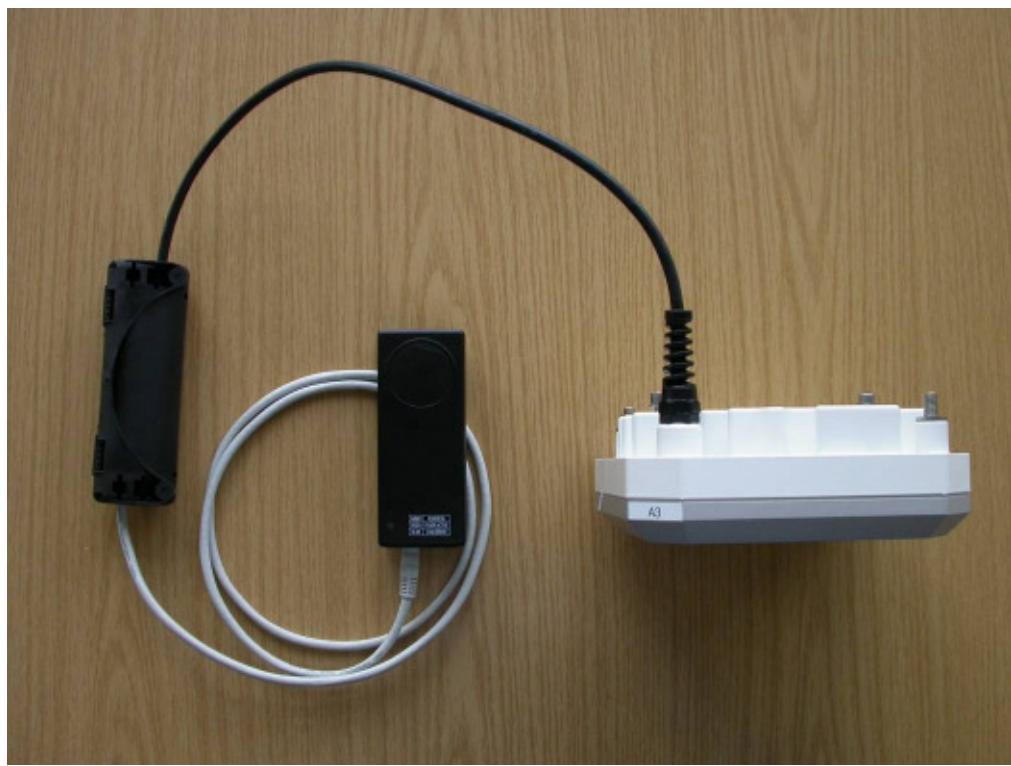



Photo No. 6

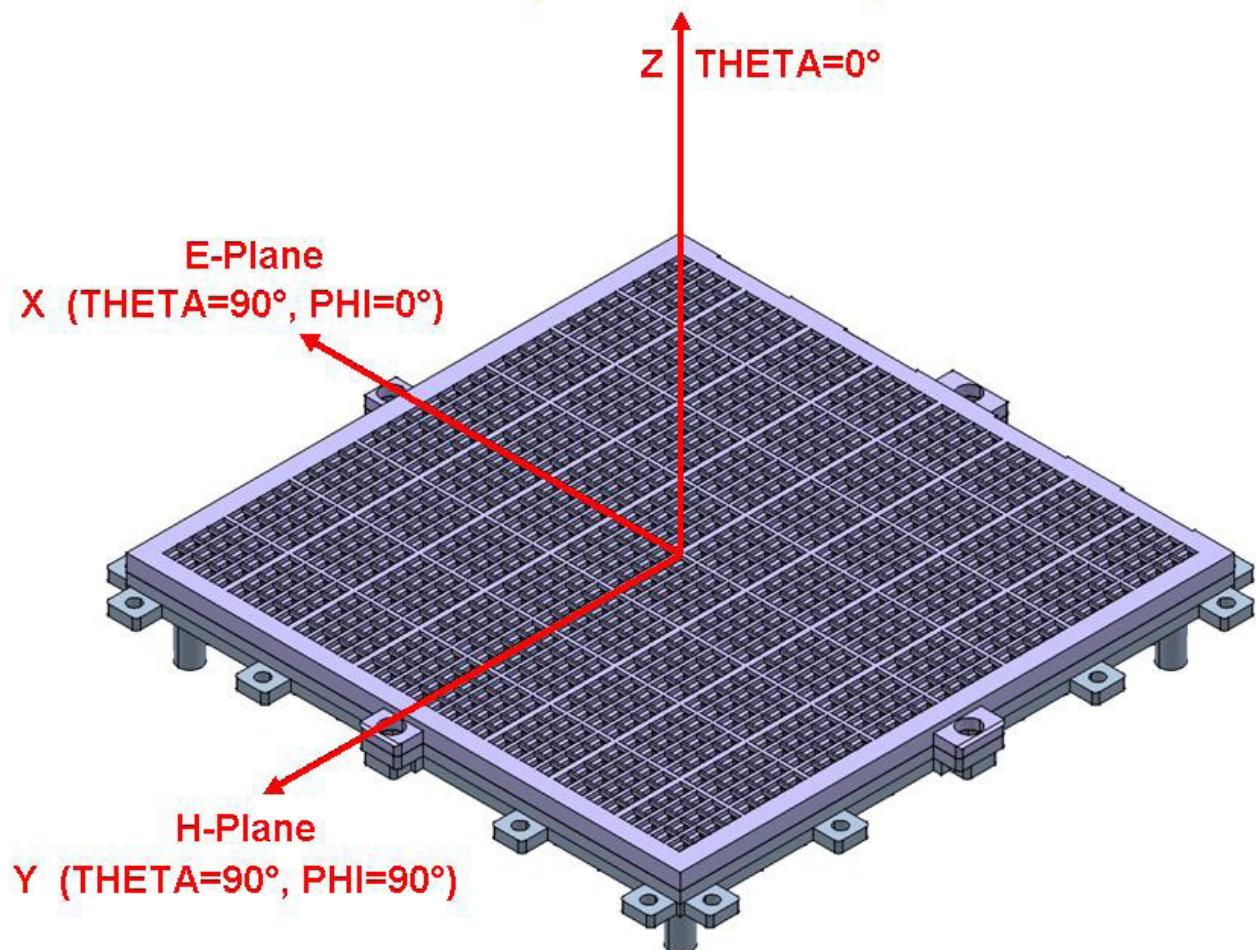

Annex 1 Antenna Compact Range Farfield Measurement Results**Polar Coordinates, THETA +/- 90°, PHI = 0° - 180°**


Antenna Gain H-Plane Co-Pol Pattern @ 62GHz

ETSI EN 302 217-4-2 V1.3.1

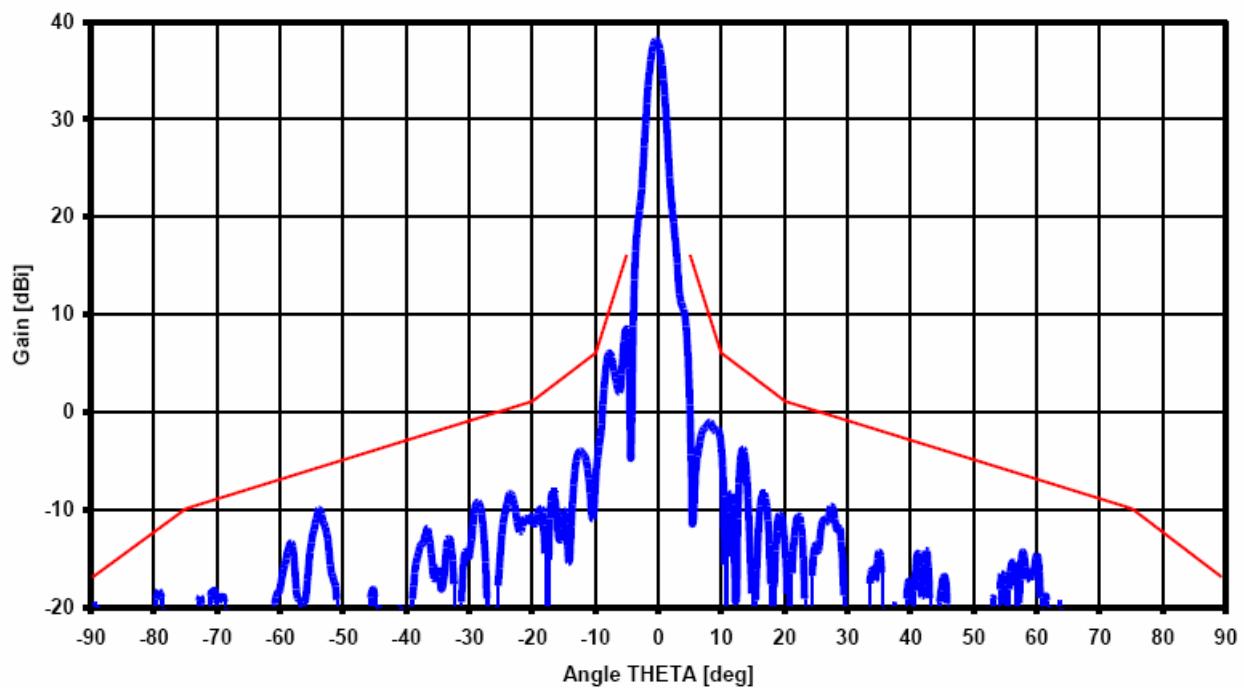


Antenna Gain H-Plane Pattern @ 62GHz

ETSI EN 302 217-4-2 V1.3.1

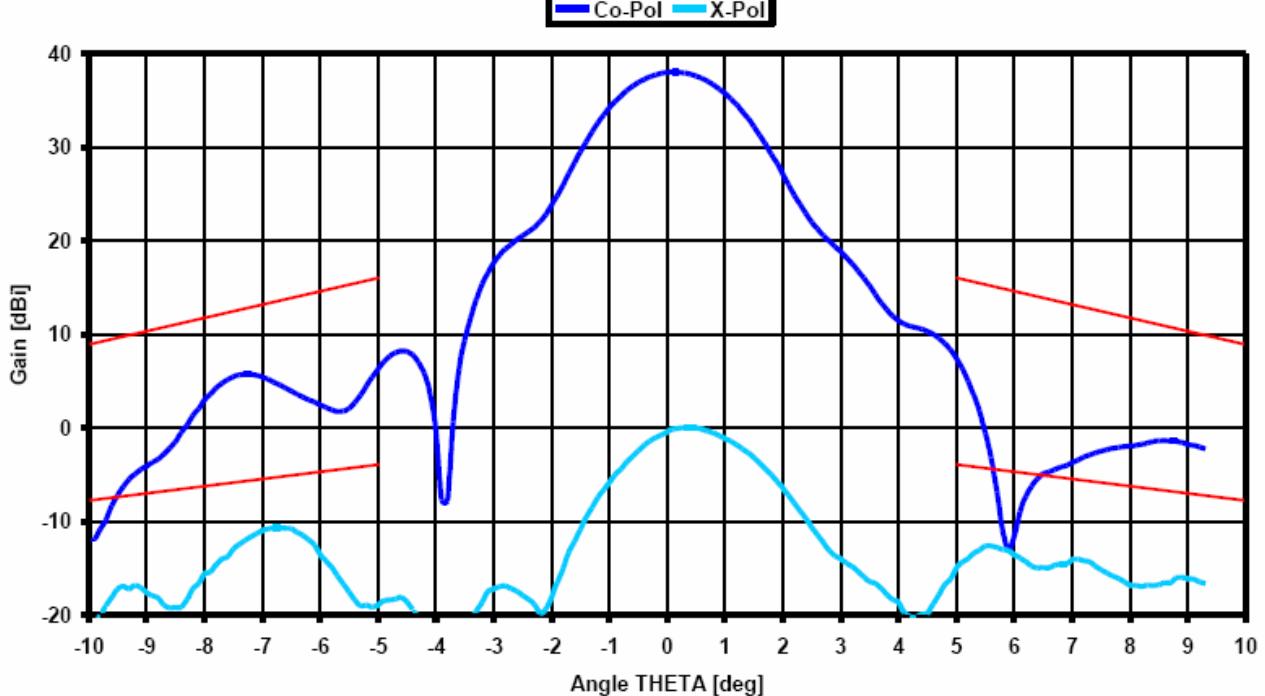


Antenna Gain V-Plane Co-Pol Pattern @ 62GHz

ETSI EN 302 217-4-2 V1.3.1

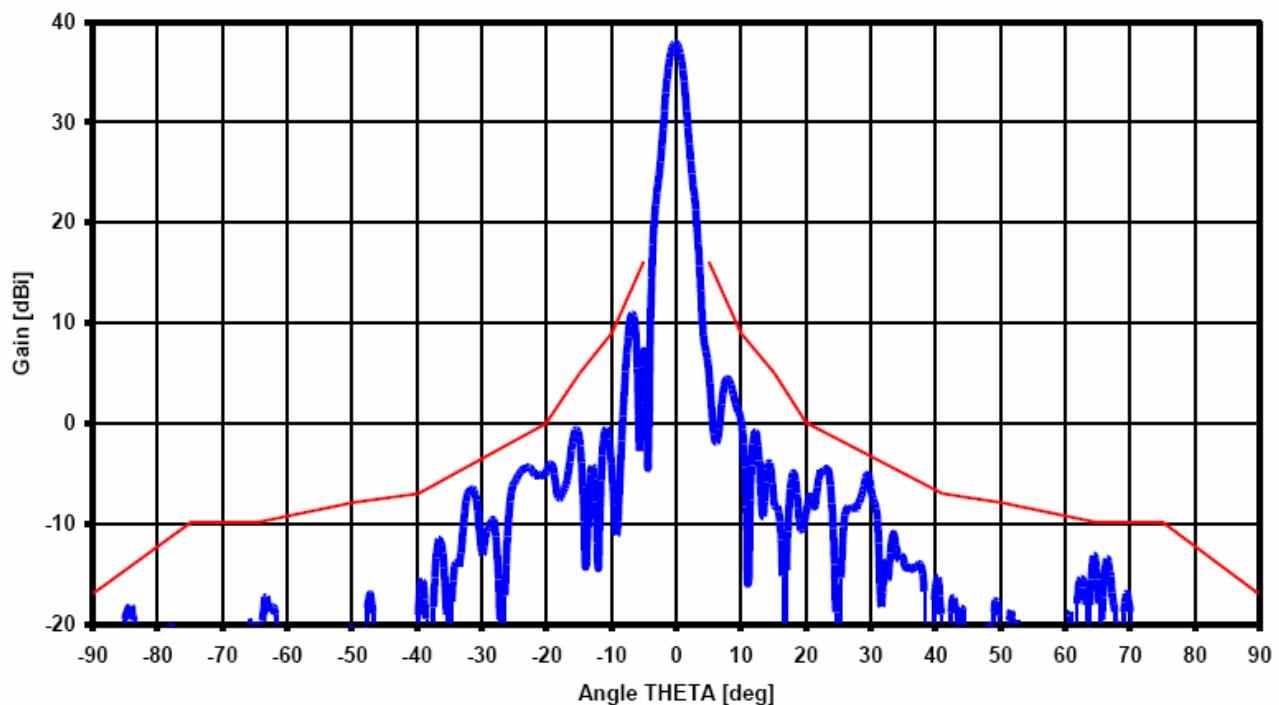

Antenna Gain V-Plane Pattern @ 62GHz


ETSI EN 302 217-4-2 V1.3.1

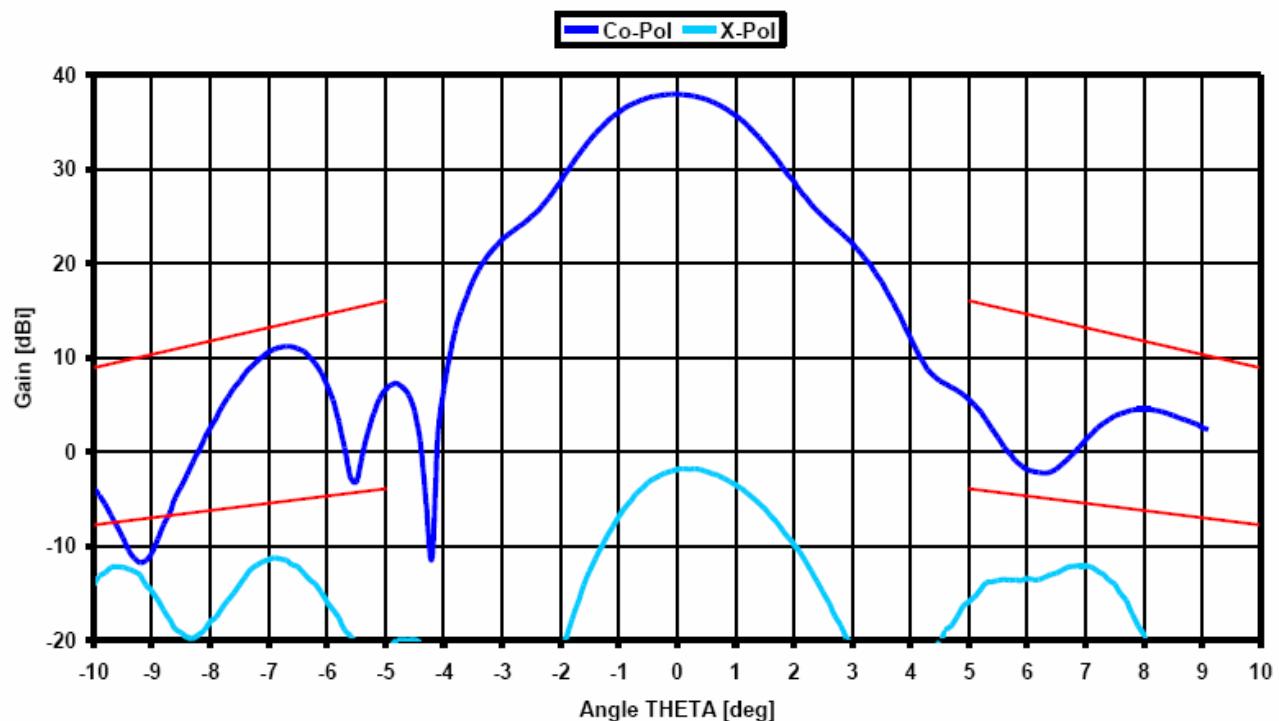

Antenna Gain versus frequency:

Gain of the integrated antenna in relation to a 25 dBi reference dipole.

This means that 25 dB have to be added to the graph below to get the absolute antenna gain of 40 dBi at 59 GHz and 62 GHz.

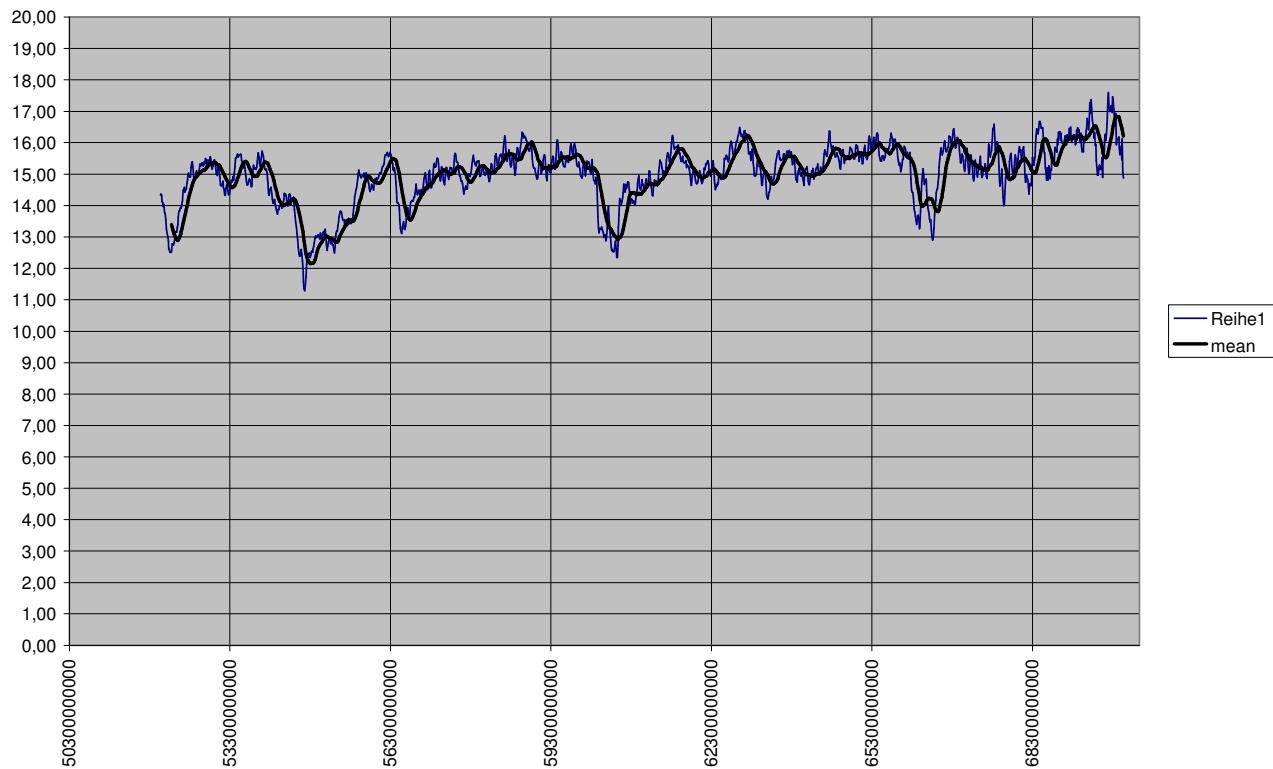

Annex 2 Additional EUT information for Industry Canada

IC Registration Number:	6318A-SL60401 / 6318A-SL60501
Model Name:	Wireless Ethernet Bridge SL60-401 / SL60-501
Manufacturer (complete Address):	Huber + Suhner AG Degersheimer Str. 14 9100 Herisau Switzerland
Tested to Radio Standards Specification (RSS) No.:	RSS-210 Issue 7
Open Area Test Site Industry Canada Number:	IC 3463A-1
Frequency Range (or fixed frequency) [MHz]:	Terminal A: Tx: 59.500 GHz, Rx: 62.000 GHz Terminal B: Tx: 62.000 GHz, Rx: 59.500 GHz
RF: Power [W] (max):	Rad. EIRP: 41.67 dBm / 14.69 W
Antenna Type:	Slott array antenna
Peak Power Density [μ W/cm ² in 3m]:	12.99 μW/cm² = 0.1299 W/m²
Occupied Bandwidth (6 dB BW):	185.5 MHz
Type of Modulation:	SBPSK, SQPSK
Emission Designator (TRC-43):	185M5G1D
Transmitter Spurious (worst case) [μ V/m in 3m]:	51.4 μV/m
Receiver Spurious (worst case) [μ V/m in 3m]:	receive-only not applicable (TX+RX operate simultaneously)

ATTESTATION:

I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned departmental standard(s), and that the radio equipment identified in this application has been subject to all applicable test conditions specified in the departmental standards and all of the requirements of the standards have been met.

Signature:



Test engineer: Nicolas Stamber Date: 2009-07-16

Annex 3 RF Technical Brief Cover Sheet acc. to RSS-102**RF Technical Brief Cover Sheet acc. to RSS-102**

All Fields must be completed with the requested information or the following codes: N/A for Not Applicable, N/P for Not Performed or N/V for Not Available. Where applicable, check appropriate box.

1. COMPANY NUMBER: 6318A

2. MODEL NUMBER: Wireless Ethernet Bridge SL60-4010 / SL60-501

3. MANUFACTURER: Huber + Suhner AG

4. TYPE OF EVALUATION: **(c) RF Evaluation**

- Evaluated against exposure limits: General Public Use Controlled Use
- Duty cycle used in evaluation: 100%
- Standard used for evaluation: RSS-102 Issue 2 (2005-11)
- Measurement distance: 3 m
- RF value: 0.13 W/m²

Measured Computed Calculated

Declaration of RF Exposure Compliance**ATTESTATION:**

I attest that the information provided in this test report are correct; that a Technical Brief was prepared and the information it contains is correct; that the device evaluation was performed or supervised by me; that applicable measurement methods and evaluation methodologies have been followed and that the device meets the SAR and/or RF exposure limits of RSS-102.



Name: Nicolas Stamber
Company: Cetecom ICT Services GmbH