

FCC TEST REPORT

FCC ID : TTO120-8141626

Applicant : **MYLAR ELECTRONIC (HUIZHOU) CO., LTD**
TaLin Trading Centre 30M RD HuiTon Country HuiZhou GuangDong,
China

Equipment Under Test (EUT) :

Product description : Electronic Ballast

Model No. : 120-814,120-1626

Standards : FCC Part18

Date of Test : June 06, 2006

Test Engineer : Tiger Su

Reviewed By : 

PERPARED BY:
Waltek Services (Shenzhen) Co., Ltd.

8C,West Tower, Aidi Building, No.5003 Binhe Rd, Futian District, Shenzhen518045,
Guangdong, China.

Tel: 86-755-83551033

Fax: 86-755-83552400

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS	2
3 TEST SUMMARY.....	3
4 GENERAL INFORMATION.....	4
4.1 CLIENT INFORMATION	4
4.2 GENERAL DESCRIPTION OF E.U.T.....	4
4.3 DETAILS OF E.U.T.	4
4.4 DESCRIPTION OF SUPPORT UNITS	4
4.5 STANDARDS APPLICABLE FOR TESTING.....	4
4.6 TEST METHODOLOGY	4
4.7 TEST FACILITY.....	5
4.8 TEST LOCATION.....	5
5 EQUIPMENT USED DURING TEST	6
6 CONDUCTED EMISSION TEST	7
6.1 TEST EQUIPMENT.....	7
6.2 TEST PROCEDURE	7
6.3 CONDUCTED TEST SETUP	8
6.4 EUT OPERATING CONDITION	8
6.5 CONDUCTED EMISSION LIMITS	9
6.6 SPECTRUM ANALYZER.....	9
6.7 FREQUENCY RANGE OF MEASUREMENTS.....	10
6.8 CONDUCTED EMISSION TEST RESULT.....	10
6.8.1 <i>Measurement Data</i>	10
6.8.2 <i>Conducted Emissions Test Data</i>	13
7 PHOTOGRAPHS OF TESTING.....	14
7.1 CONDUCTED EMISSION TEST VIEW FOR 120-814	14
7.2 CONDUCTED EMISSION TEST VIEW FOR 120-1626	14
8 PHOTOGRAPHS-CONSTRUCTIONAL DETAILS	15
8.1 EUT-FRONT VIEW FOR 120-814.....	15
8.2 EUT-BACK VIEW FOR 120-814	15
8.3 EUT-FRONT VIEW FOR 120-1626.....	16
8.4 EUT-BACK VIEW FOR 120-1626	16
8.5 PCB-FRONT VIEW FOR 120-814.....	17
8.6 PCB-BACK VIEW FOR 120-814	17
8.7 PCB-FRONT VIEW FOR 120-1626.....	18
8.8 PCB-BACK VIEW FOR 120-1626	18
9 FCC ID LABEL.....	19

3 Test Summary

Test	Test Requirement	Test Method	Class / Severity	Result
Radiated Emission (30MHz to 1GHz)	FCC PART 18: 2003	ANSI C63.4:2003	Class B	N/A
Conducted Emission (150KHz to 30MHz)	FCC PART 18: 2003	ANSI C63.4:2003	Class B	PASS

4 General Information

4.1 Client Information

Applicant: **MYLAR ELECTRONIC (HUIZHOU) CO., LTD**
Address of Applicant: TaLin Trading Centre 30M RD HuiTon Country HuiZhou
GangDong, China

4.2 General Description of E.U.T.

Product description: Electronic Ballast
Model No.: 120-814,120-1626

4.3 Details of E.U.T.

Power Supply: 120VAC / 60Hz

4.4 Description of Support Units

The EUT has been tested as an independent unit.

4.5 Standards Applicable for Testing

The customer requested FCC tests for an Electronic Ballast. The standards used were FCC Part18.

4.6 Test Methodology

All measurements contained in this report are conducted with FCC Measurement Procedure MP-5, technical requirements for Methods of Measurement of Radio-Noise Emission from ISM Equipment.

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC – Registration No.: 759357**

Solid Industrial (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 759357, November 04, 2003.

4.8 Test Location

All Emissions tests were performed at:-

Solid Industrial (Shenzhen) Co., Ltd. at 333 Bulong Highway Buji Longgang, Shenzhen, Guangdong, China.

Its' VCCI – Registration No.: 2153..

5 Equipment Used during Test

Conducted Emission Test						
Item	Test Equipment	Manufacturer	Model No.	Series No.	Specification	Last Cal.
1	EMI Test Receiver	Rohde&schwarz	ESCS30	100038	9 kHz to 2750 MHz	2005.11.05
2	Artificial Mains	Rohde&schwarz	ESH2-Z5	100028	9kHz-30 MHz, Continous Current 4*25 A	2005.11.05
3	Pulse Limiter	Rohde&schwarz	ESHSZ2	100044		2005.11.05
4	EMI Test Software	Rohde&schwarz	ESK1	N/A	Version1.60	N/A

6 Conducted Emission Test

Product Name:	Electronic Ballast
Test Requirement:	FCC Part 18
Test Method:	Based on FCC Part 18
Test Date:	June 06, 2006
Frequency Range:	150kHz to 30MHz
Class:	Class B
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

6.1 Test Equipment

Please refer to Section 5 this report.

6.2 Test Procedure


1. During the conducted emission test, the power cord of the EUT is connected to the auxiliary outlet of the LISN.
2. The EUT was tested according to FCC MP-5. The frequency spectrum from 150kHz to 30MHz was investigated.
3. The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.3 Conducted Test Setup

The conducted emission tests were performed using the setup accordance with the FCC MP-5 measurement procedure.

The EUT is tested independently.


The power supply used by the EUT is connected to a 120VAC / 60Hz power source.

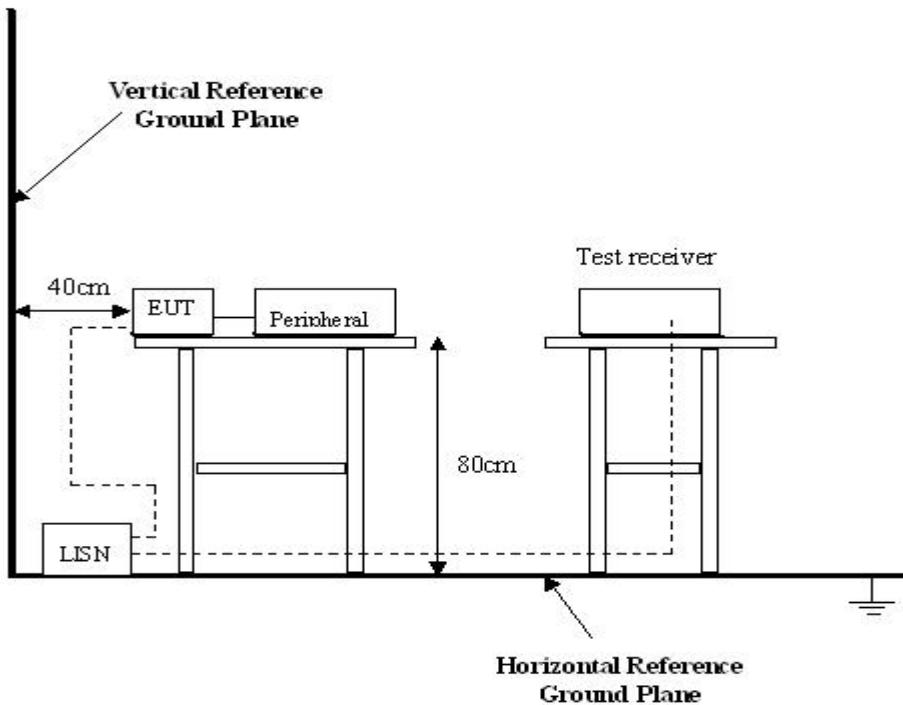

6.4 EUT Operating Condition

Operating condition is according to FCC MP-5.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

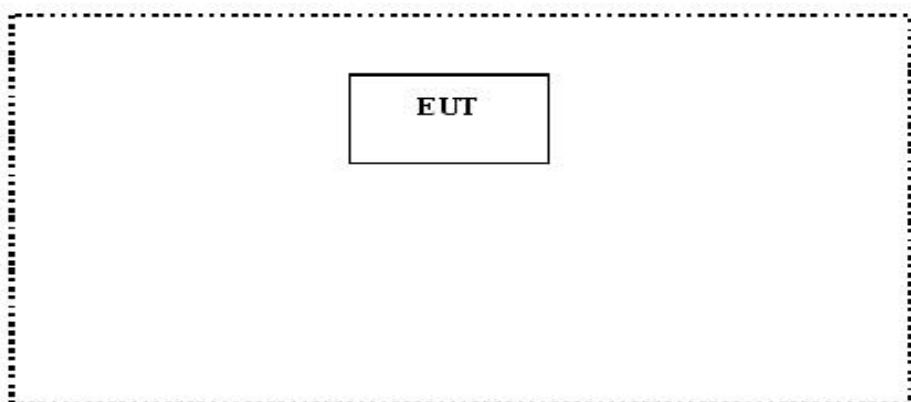

6.5 Conducted Emission Limits

Frequency of Emission (MHz)	Conducted Limit (dBuV)- Quasi-peak
0.15— 0.5	66-56
0.5 — 5.0	56
5.0 — 30	60

Note: In the above limits, the tighter limit applies at the band edges.

6.6 Spectrum Analyzer

The spectrum analyzer is configured during the conduction test is as follows:

Start Frequency..... 150 kHz
Stop Frequency..... 30 MHz
Sweep Speed..... Auto
IF Bandwidth..... 9 kHz
Video Bandwidth..... 100 kHz
Quasi-Peak Adaptor Bandwidth..... 9 kHz
Quasi-Peak Adaptor Mode..... Normal

6.7 Frequency Range Of Measurements

Frequency band in which device operates (MHz)	Range of frequency measurements	
	Lowest frequency	Highest frequency
Below 1.705	Lowest frequency generated in the device, but not lower than 9 kHz.	30MHz.
1.705 to 30	Lowest frequency generated in the device, but not lower than 9 kHz.	400MHz.
30 to 500	Lowest frequency generated in the device or 25MHz, whichever is lower.	Tenth harmonic or 1,000MHz, whichever is higher.
500 to 1,000	Lowest frequency generated in the device or 100MHz, whichever is lower.	Tenth harmonic.
Above 1,000	do	Tenth harmonic or highest detectable emission.

6.8 Conducted Emission Test Result


Test Item:	Conducted Emission Test
Test Voltage:	120VAC / 60Hz
Test Mode:	Normal
Temperature:	24 °C
Humidity:	52%RH
Test Result:	PASS

6.8.1 Measurement Data


An initial pre-scan was performed on the live and neutral lines.

No further quasi-peak or average measurements were performed since no peak emissions were detected within 10dB line below the average limit.

Please refer to the following peak scan graph for reference.

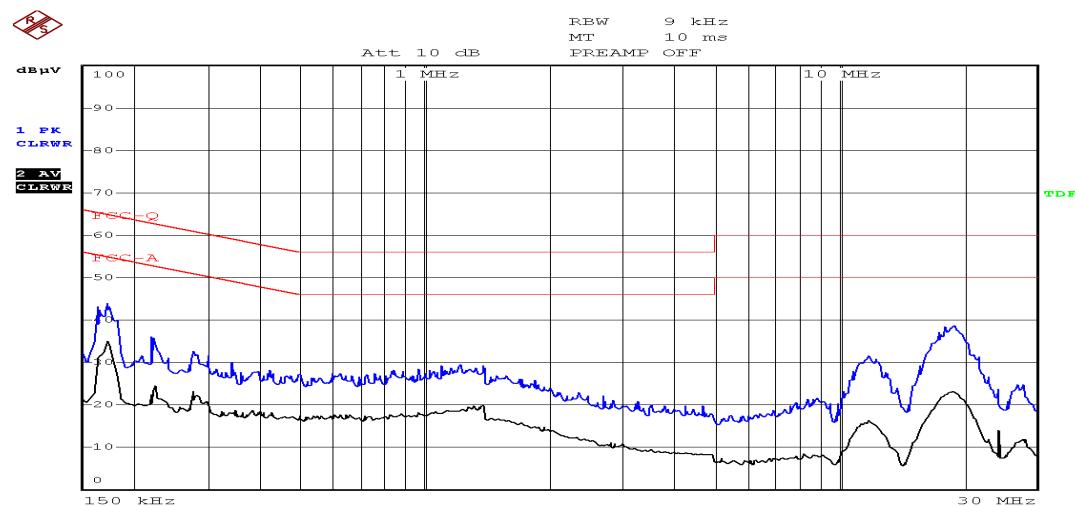
Live Line for 120-814

1
Date: 5.JUN.2006 20:02:38

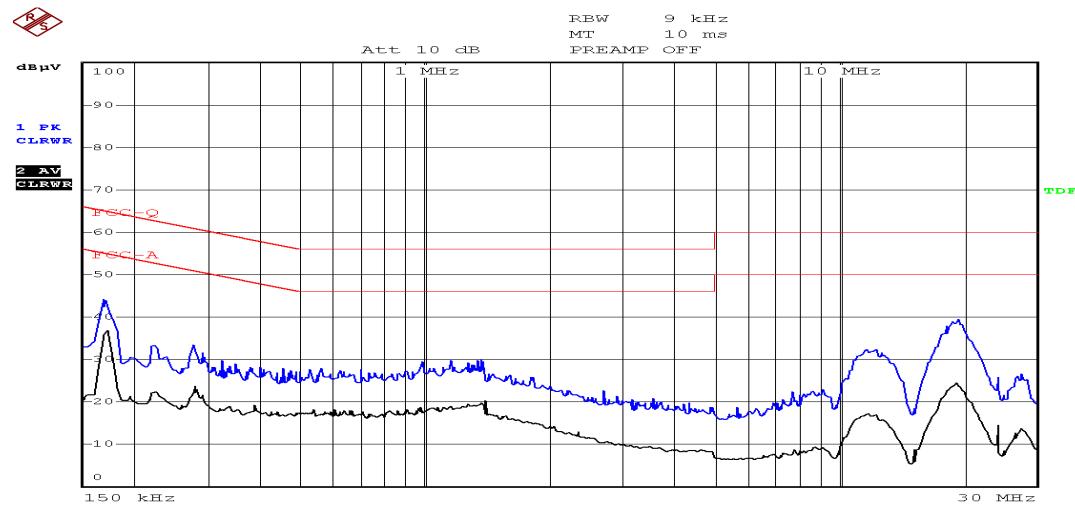Neutral Line for 120-814


1
Date: 5.JUN.2006 20:07:06

Live Line for 120-1626

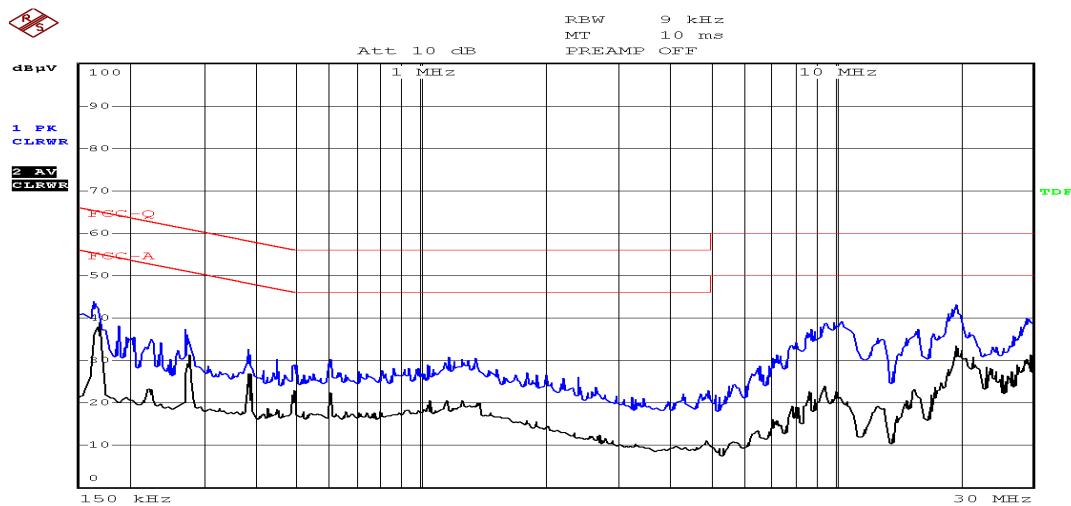

1
Date: 5.JUN.2006 16:43:17

Neutral Line for 120-1626

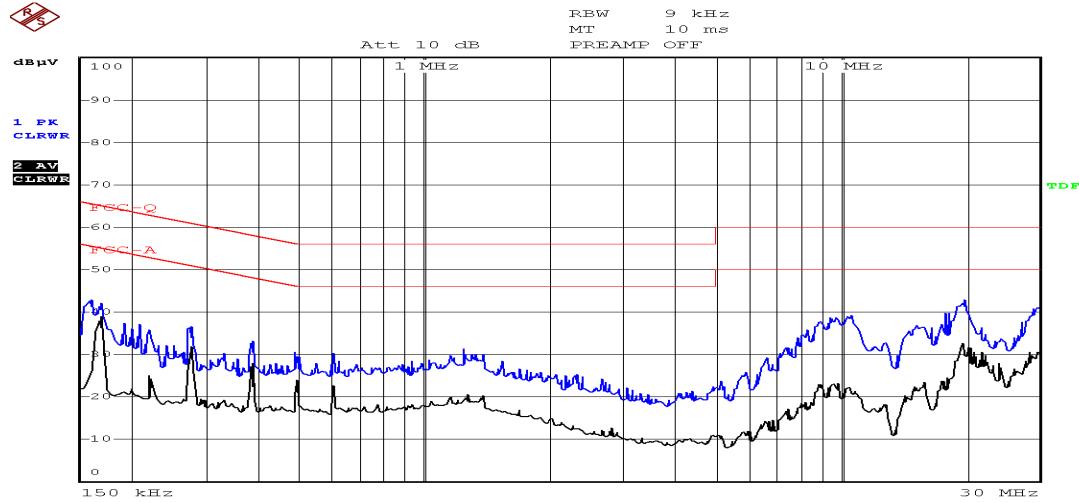

1
Date: 5.JUN.2006 16:46:06

6.8.2 Conducted Emissions Test Data

120-814

Freq. MHz	Line	QP Reading dBuV	Limit dBuV	Margin dB	AV Reading dBuV	Limit dBuV	Margin dB
0.170000	Live	41.3	64.9	23.6	30.8	54.9	24.1
18.60000	Live	36.2	60.0	23.8	21.1	50.0	28.9
0.170000	Neutral	40.6	64.9	24.3	31.8	54.9	23.1
18.90000	Neutral	38.8	60.0	21.2	20.1	50.0	29.9

120-1626

Freq. MHz	Line	QP Reading dBuV	Limit dBuV	Margin dB	AV Reading dBuV	Limit dBuV	Margin dB
0.168000	Live	29.5	65.0	35.5	24.5	55.0	30.5
10.10000	Live	38.5	60.0	21.5	27.1	50.0	22.9
0.160000	Neutral	28.9	65.0	36.1	25.5	55.0	29.5
19.60000	Neutral	34.1	60.0	25.9	28.1	50.0	21.9

7 Photographs of Testing

7.1 Conducted Emission Test View for 120-814



7.2 Conducted Emission Test View for 120-1626




8 Photographs-Constructional Details

8.1 EUT-Front View for 120-814




8.2 EUT-Back View for 120-814

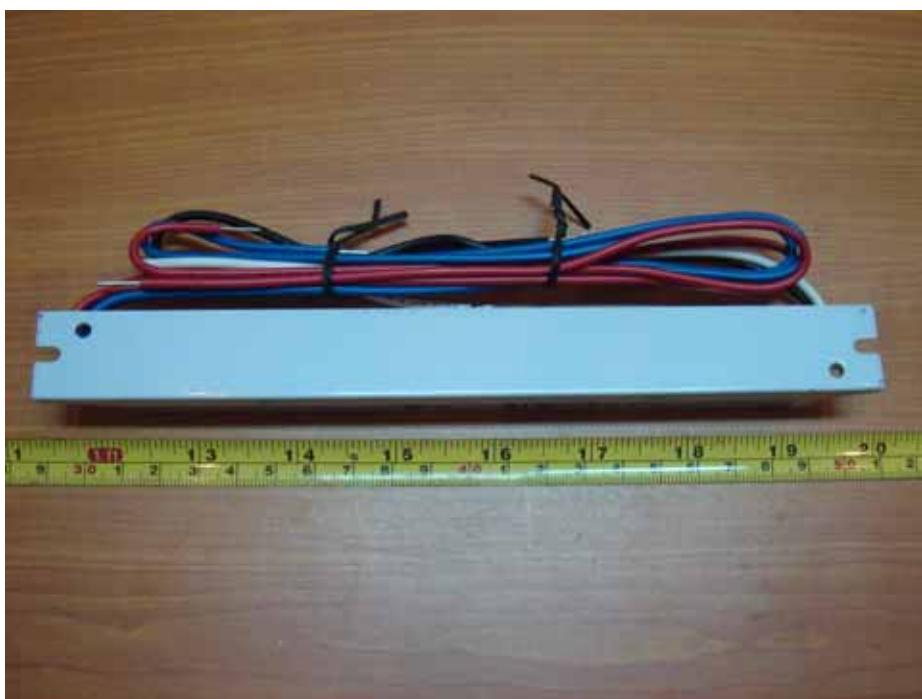

8.3 EUT-Front View for 120-1626




8.4 EUT-Back View for 120-1626

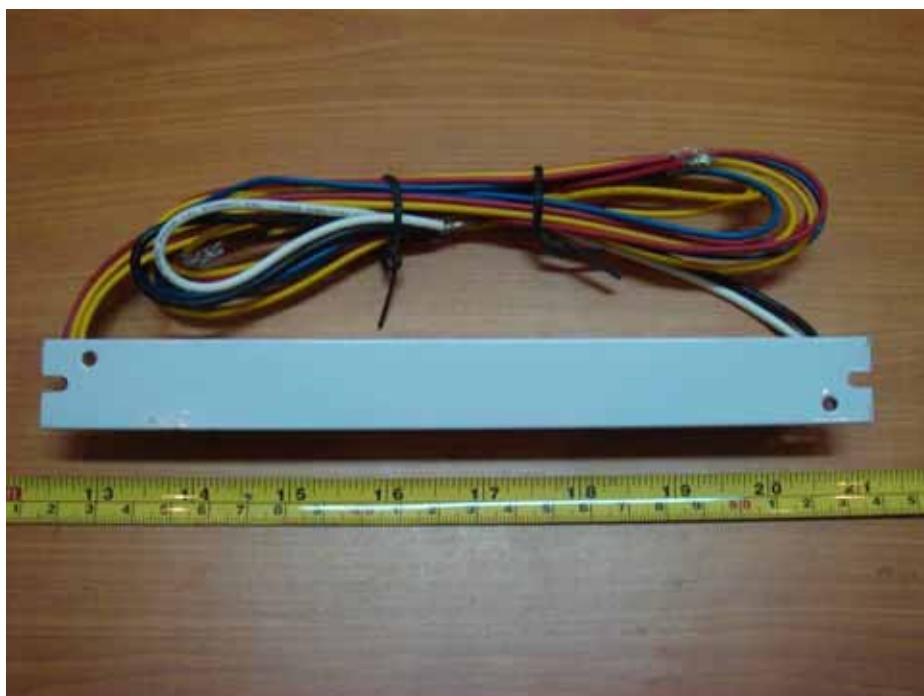

8.5 PCB-Front View for 120-814



8.6 PCB-Back View for 120-814

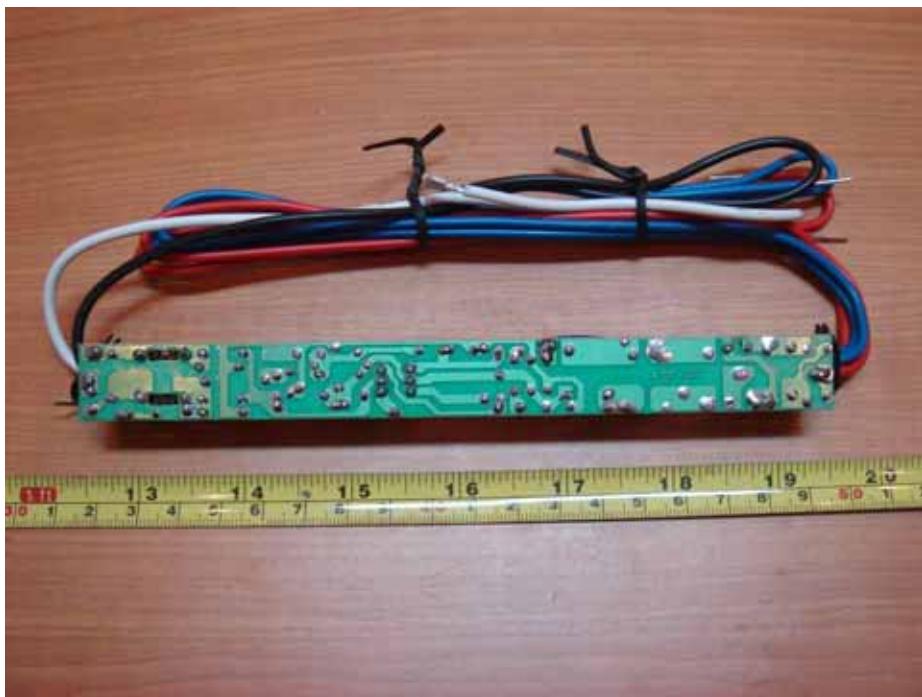

8.7 PCB-Front View for 120-1626



8.8 PCB-Back View for 120-1626



9 FCC ID Label

This device complies with Part 18 of the FCC Rules. Operation is subject to the following two conditions:(1)this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT
EUT Top View/ proposed FCC Mark Location

