


TEST REPORT

Applicant: Bang & Olufsen a/s
Address: Bang og Olufsen Alle 1, 7600 Struer, Denmark
Equipment Type: Wireless Speaker
Model Name: Beolab 8
Brand Name: Bang & Olufsen
FCC ID: TTUBEOLAB8
Test Standard: 47 CFR Part 15 Subpart F
(refer to section 3.1)
Sample Arrival Date: Aug. 14, 2023
Test Date: Aug. 22, 2023 - Sep. 11, 2023
Date of Issue: Oct. 12, 2023

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Julie Zhu**Checked by:** Ye Hongji**Approved by:** Liao Jianming
(Technical Director)

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Oct. 09, 2023</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Oct. 12, 2023</u>	<u>Add the frequency of the maximum emission level observed f(M) in Chapter A.2</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Test Laboratory	4
1.2	Test Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	General Description for Equipment under Test (EUT)	5
2.4	Technical Information	5
3	SUMMARY OF TEST RESULTS	6
3.1	Test Standards	6
3.2	Test Verdict	6
4	GENERAL TEST CONFIGURATIONS	7
4.1	Test Environments	7
4.2	Test Equipment List	7
4.3	Measurement Uncertainty	8
4.4	Description of Test Setup	8
5	TEST ITEMS	11
5.1	Antenna Requirements	11
5.2	Conducted Emission	12
5.3	UWB Bandwidth	13
5.4	Radiated Emissions	14
5.5	Radiated Emissions in GPS Bands	16
5.6	Peak Emissions within a 50MHz Bandwidth	17

ANNEX A	TEST RESULT	18
A.1	Conducted Emissions.....	18
A.2	UWB Bandwidth	22
A.3	Radiated Emissions.....	23
A.4	Radiated Emissions in GPS Bands	31
A.5	Peak Emissions within a 50MHz Bandwidth	35
ANNEX B	TEST SETUP PHOTOS	39
ANNEX C	EUT EXTERNAL PHOTOS	39
ANNEX D	EUT INTERNAL PHOTOS	39

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Bang & Olufsen a/s
Address	Bang og Olufsen Alle 1, 7600 Struer, Denmark

2.2 Manufacturer Information

Manufacturer	Bang & Olufsen a/s
Address	Bang og Olufsen Alle 1, 7600 Struer, Denmark

2.3 General Description for Equipment under Test (EUT)

EUT Name	Wireless Speaker
Model Name Under Test	Beolab 8
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	2.0.0
Software Version	3.3.1.4
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Technical Information

Network and Wireless connectivity	UWB
-----------------------------------	-----

The requirement for the following technical information of the EUT was tested in this report:

Modulation Type	BPM-BPSK
Product Type	☒ Mobile ☐ Portable ☐ Fix Location
Operating Frequency	3100MHz - 10600MHz
Antenna Type	PIFA Antenna
Antenna Gain	4.5 dBi

All channel was listed on the following table:

Channel Number	Frequency
CH5	6489.6MHz
CH9	7987.2MHz

Note: The above EUT information in section 2.3 was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart F	Ultra - Wideband Operation
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
3	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Test Verdict

No.	Description	FCC Part No.	Test Result	Verdict	Remark
1	Antenna Requirement	15.203	--	Pass	Note
2	Conducted Emission	15.207	ANNEX A.1	Pass	--
3	UWB Bandwidth	15.517(b)	ANNEX A.2	Pass	--
4	Radiated Emissions	15.517(c)/15.209	ANNEX A.3	Pass	--
5	Radiated Emissions in GPS Bands	15.517(d)	ANNEX A.4	Pass	--
6	Peak Emissions within a 50 MHz Bandwidth	15.517(e)	ANNEX A.5	Pass	--

Note: Please refer to section 5.1.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	46% to 52%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+24.2°C to +26.9°C
Working Voltage of the EUT	NV (Normal Voltage)	120 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-40	101544	2022.12.28	2023.12.27
Spectrum Analyzer	KEYSIGHT	N9020A	MY52510065	2022.09.06	2023.09.05
				2023.09.05	2024.09.04
Signaling Unit	ROHDE&SCHWARZ	CMW500	171150	2023.06.19	2024.06.18
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	01631	2022.02.03	2025.02.02
Test Antenna-Horn	A-INFO	LB-180400KF	J211060273	2021.07.02	2024.07.01
Anechoic Chamber	RAINFORD	9m*6m*6m	144	2022.02.19	2024.09.03
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2022.09.06	2023.09.05
				2023.09.05	2024.09.04
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9168	00883	2022.04.01	2025.03.31
Test Antenna-Loop	SCHWARZBECK	FMZB 1519	1519-037	2021.04.16	2024.04.15
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	130	2021.08.15	2024.08.14
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2022.09.06	2023.09.05
				2023.09.05	2024.09.04
LISN	SCHWARZBECK	NSLK 8127	8127-687	2023.05.16	2024.05.15
Shielded Enclosure	YiHeng Electronic Co., Ltd	3.5m*3.1m*2.8m	112	2022.02.19	2025.02.18

4.3 Measurement Uncertainty


The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.8°C
Humidity	4%


4.4 Description of Test Setup

4.4.1 For AC Power Supply Port Test

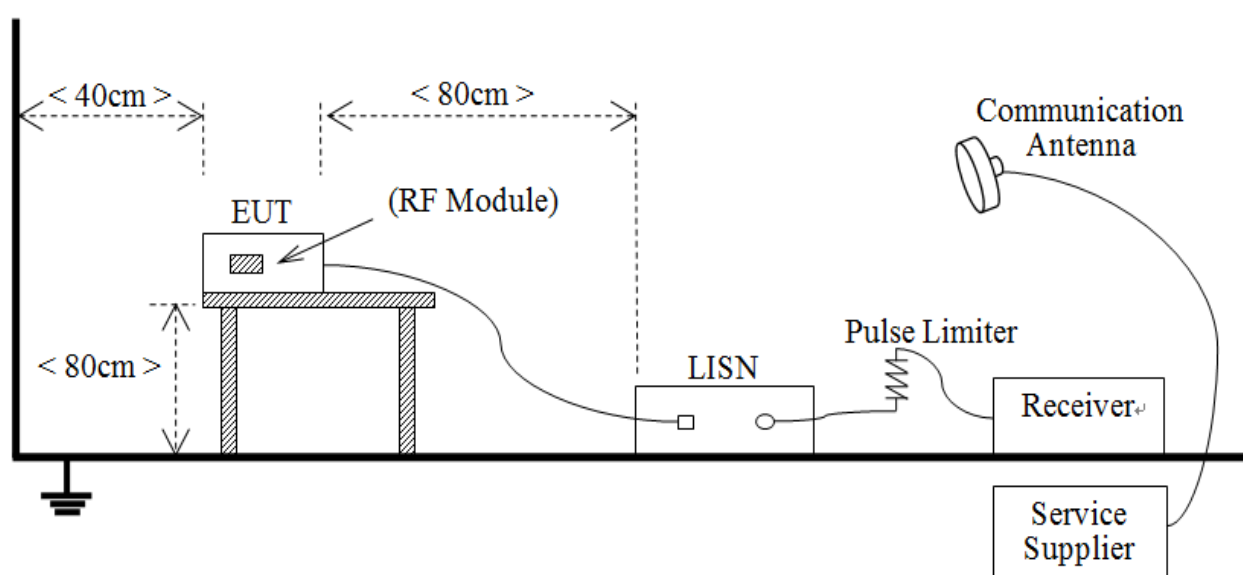


(Diagram 1)

4.4.2 For Radiated Test (Below 30 MHz)

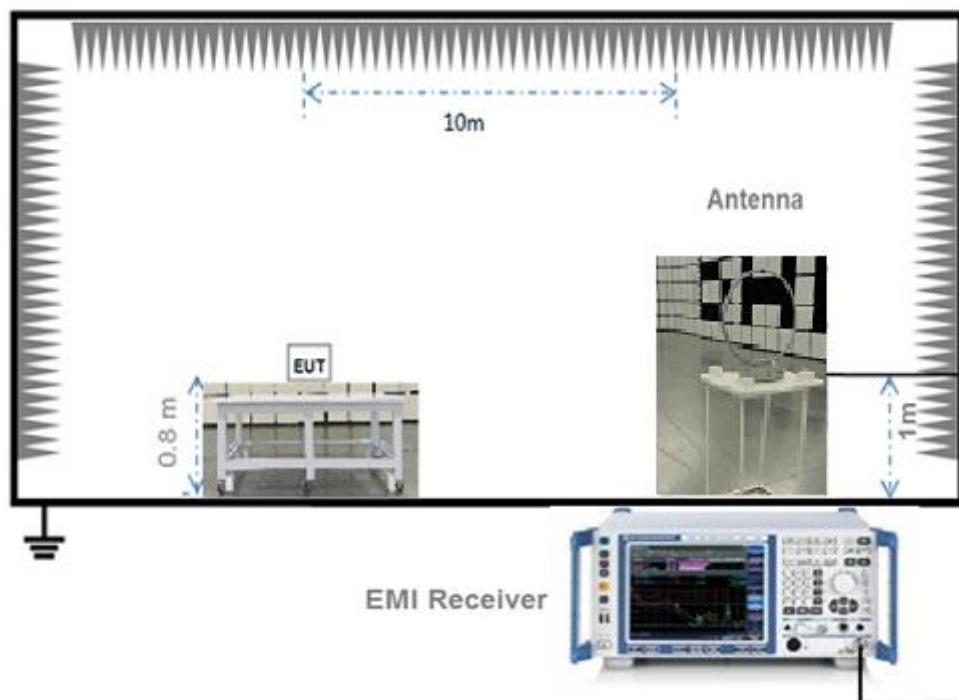


(Diagram 2)

4.4.3 For Radiated Test (30 MHz-1 GHz)

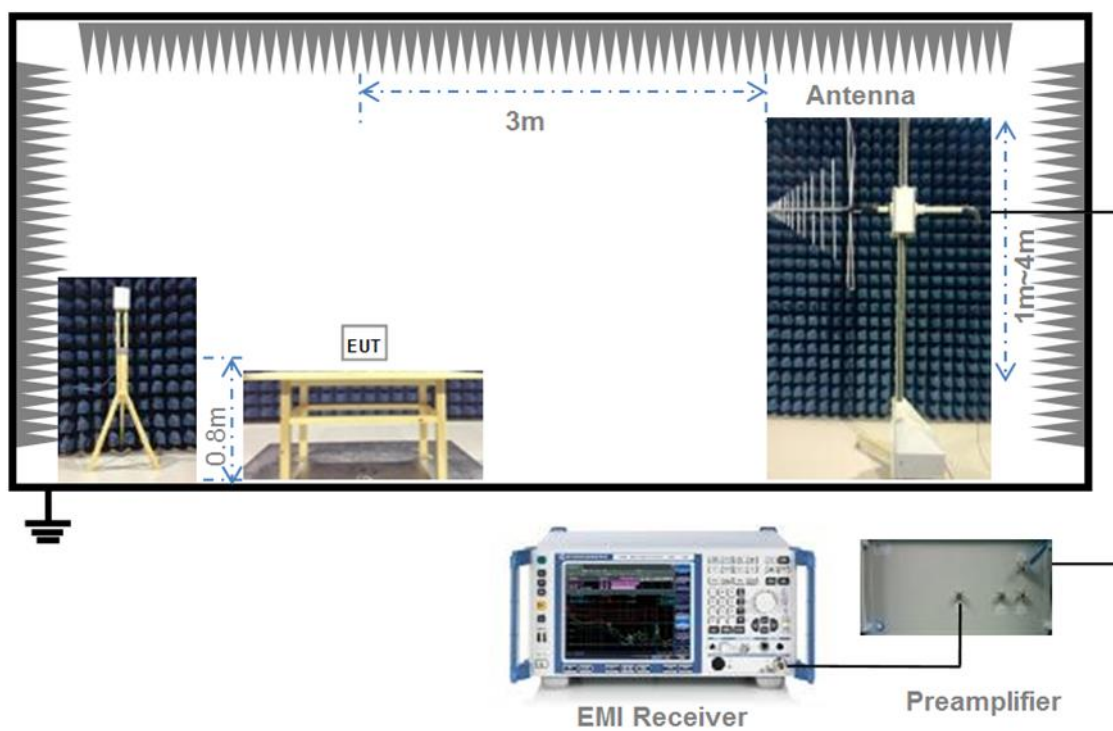

(Diagram 3)

4.4.4 For Radiated Test (Above 960MHz)

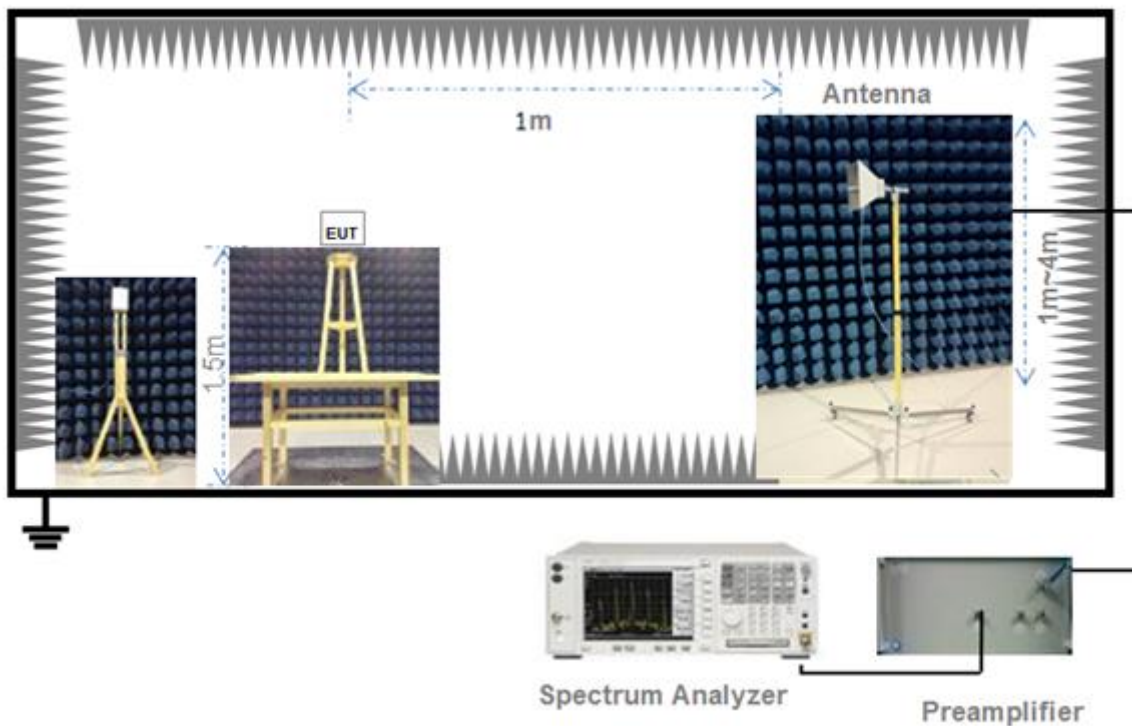

(Diagram 4)

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.2 Conducted Emission

5.2.1 Limit

FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.2.2 Test Setup

See section 4.4.1 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 UWB Bandwidth

5.3.1 Limit

FCC §15.503(d)

Ultra-wideband (UWB) transmitter. An intentional radiator that, at any point in time, has a fractional bandwidth equal to or greater than 0.20 or has a UWB bandwidth equal to or greater than 500 MHz, regardless of the fractional bandwidth.

FCC §15.517(b)

The UWB bandwidth of a UWB system operating under the provisions of this section must be contained between 3100 MHz and 10,600 MHz.

5.3.2 Test Setups

See section 4.4.4 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Use the following spectrum analyzer settings:

RBW = 1 MHz

VBW $\geq$ 3 MHz

Sweep = auto

Detector function = RMS

Trace = max hold

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Radiated Emissions

5.4.1 Limit

FCC §15.517(c)

The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209. The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency in MHz	EIPR in dBm
960–1610	-75.3
1610–1990	-53.3
1990–3100	-51.3
3100–10600	-41.3
Above 10600	-51.3

FCC §15.209

Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency(MHz)	Field Strength (μV/m)	Measurement Distance(m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

5.4.2 Test Setups

See section 4.4.2 to 4.4.4 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The height of the antenna was varied from 1 to 4 meters. For each suspected emissions, the antenna tower was scan (from 1m to 4m) and the the turntables was turned (from 0° to 360°) to find the maximum reading.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

9 kHz to 960 MHz:

Span = wide enough to fully capture the emission being measured

RBW = 100 kHz

VBW = 300 kHz

Sweep time = auto

Detector function = peak(Margin which is less than 3 dB will be repeated one by one using the quasi-peak)

Trace = max hold

960 MHz to 40 GHz:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

VBW = 3 MHz

Sweep time = 1s

Detector function = RMS

Trace = max hold

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Radiated Emissions in GPS Bands

5.5.1 Limit

FCC §15.517(d)

In addition to the radiated emission limits specified in the table in paragraph (c) of this section, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz:

Frequency in MHz	EIPR in dBm
1164–1240	-85.3
1559–1610	-85.3

5.5.2 Test Setups

See section 4.4.4 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The height of the antenna was varied from 1 to 4 meters. For each suspected emissions, the antenna tower was scan (from 1m to 4m) and the the turntables was turned (from 0° to 360°) to find the maximum reading.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 kHz

VBW = 3 kHz

Sweep time = 1s

Detector function = RMS

Trace = max hold

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Peak Emissions within a 50MHz Bandwidth

5.6.1 Limit

FCC §15.517(e)

There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, fM. That limit is 0 dBm EIRP. It is acceptable to employ a different resolution bandwidth, and a correspondingly different peak emission limit, following the procedures described in §15.521.

It is acceptable to employ an RBW of less than 50 MHz (but no less than 1 MHz) when performing the required peak power measurements. When this approach is employed, the peak emissions EIRP limit (0 dBm / 50 MHz) is converted to a limit commensurate with the RBW by employing a $[20 \log (RBW/50 \text{ MHz})]$ relationship. For example, the peak power limit could be expressed in a 1 MHz bandwidth as follows in Equation :

$$\text{EIRP}_{1 \text{ MHz}} = \text{EIRP}_{50 \text{ MHz}} + 20 \log (1 \text{ MHz} / 50 \text{ MHz}) = 0 \text{ dBm} + (- 34 \text{ dBm}) = -34 \text{ dBm}$$

5.6.2 Test Setups

See section 4.4.4 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The height of the antenna was varied from 1 to 4 meters. For each suspected emissions, the antenna tower was scan (from 1m to 4m) and the the turntables was turned (from 0° to 360°) to find the maximum reading.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

VBW = 3 MHz

Sweep = auto

Detector function = peak

Trace = max hold

5.6.4 Test Result

Please refer to ANNEX A.5.

ANNEX A TEST RESULT


A.1 Conducted Emissions

Note ¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Note ²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.


Test Data and Plots

6489.6MHz, PHASE L

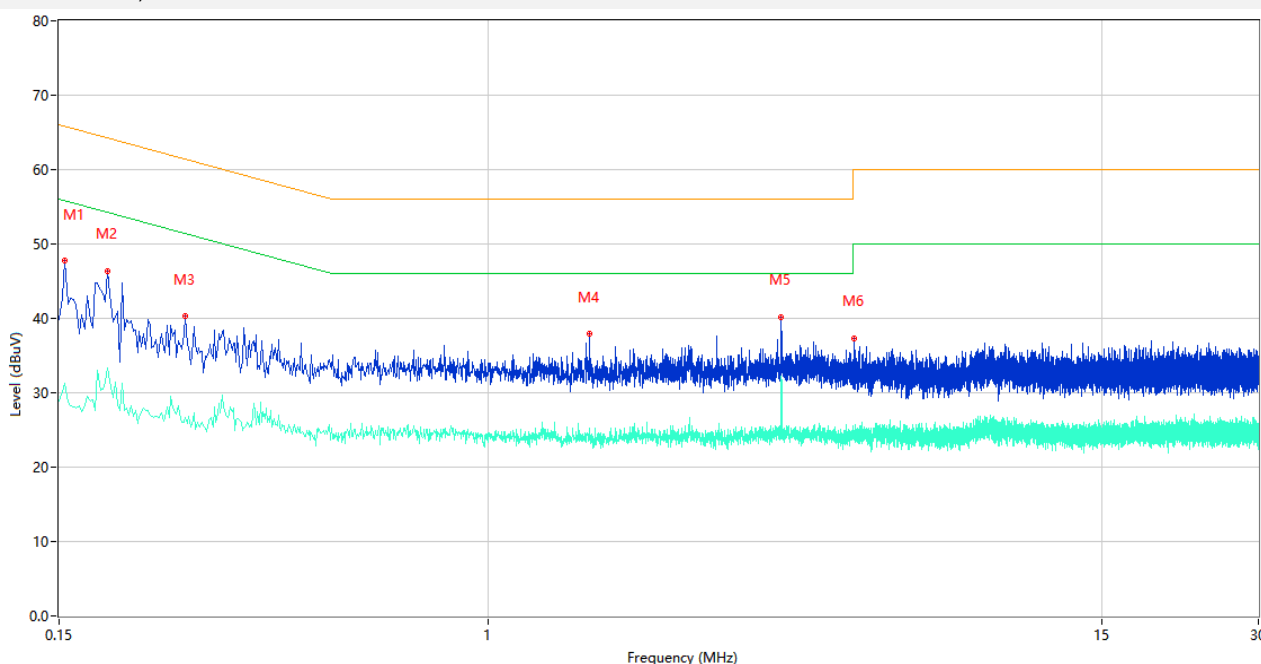


No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.154	47.76	9.78	65.78	18.02	Peak	L	Pass
1**	0.154	31.26	9.78	55.78	24.52	AV	L	Pass
2	0.186	46.39	9.78	64.21	17.82	Peak	L	Pass
2**	0.186	33.28	9.78	54.21	20.93	AV	L	Pass
3	0.262	40.30	9.76	61.37	21.07	Peak	L	Pass
3**	0.262	26.72	9.76	51.37	24.65	AV	L	Pass
4	1.564	37.92	10.06	56.00	18.08	Peak	L	Pass
4**	1.564	24.55	10.06	46.00	21.45	AV	L	Pass
5	3.648	40.23	10.40	56.00	15.77	Peak	L	Pass
5**	3.648	32.20	10.40	46.00	13.80	AV	L	Pass
6	5.036	37.38	10.34	60.00	22.62	Peak	L	Pass
6**	5.036	24.56	10.34	50.00	25.44	AV	L	Pass

6489.6MHz, PHASE N

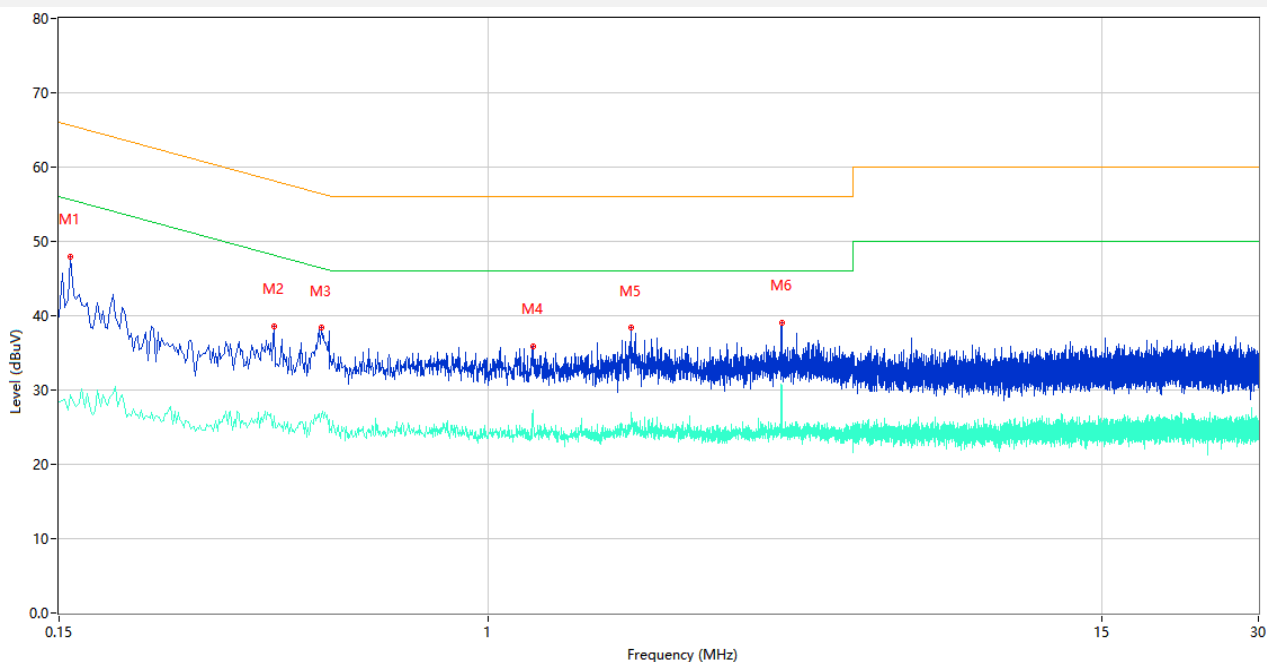


No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.158	48.01	9.78	65.57	17.56	Peak	N	Pass
1**	0.158	29.44	9.78	55.57	26.13	AV	N	Pass
2	0.388	38.59	10.60	58.11	19.52	Peak	N	Pass
2**	0.388	26.56	10.60	48.11	21.55	AV	N	Pass
3	0.478	38.40	10.00	56.37	17.97	Peak	N	Pass
3**	0.478	26.65	10.00	46.37	19.72	AV	N	Pass
4	1.218	35.89	10.11	56.00	20.11	Peak	N	Pass
4**	1.218	26.71	10.11	46.00	19.29	AV	N	Pass
5	1.880	38.39	10.52	56.00	17.61	Peak	N	Pass
5**	1.880	26.93	10.52	46.00	19.07	AV	N	Pass
6	3.650	39.08	10.39	56.00	16.92	Peak	N	Pass
6**	3.650	30.67	10.39	46.00	15.33	AV	N	Pass

7987.2MHz, PHASE L

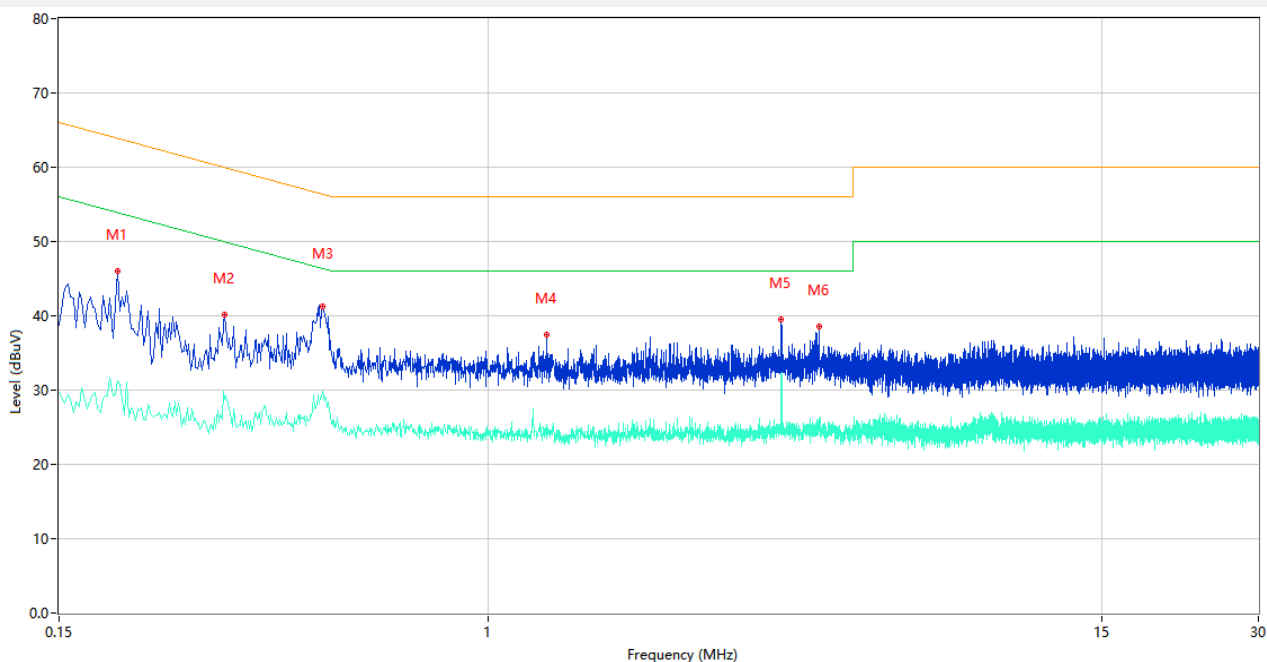

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.194	45.96	9.77	63.86	17.90	Peak	L	Pass
1**	0.194	31.23	9.77	53.86	22.63	AV	L	Pass
2	0.312	40.09	10.00	59.92	19.83	Peak	L	Pass
2**	0.312	28.81	10.00	49.92	21.11	AV	L	Pass
3	0.480	41.27	10.00	56.34	15.07	Peak	L	Pass
3**	0.480	29.80	10.00	46.34	16.54	AV	L	Pass
4	1.292	37.39	10.50	56.00	18.61	Peak	L	Pass
4**	1.292	25.34	10.50	46.00	20.66	AV	L	Pass
5	3.648	39.50	10.40	56.00	16.50	Peak	L	Pass
5**	3.648	31.90	10.40	46.00	14.10	AV	L	Pass
6	4.310	38.54	10.30	56.00	17.46	Peak	L	Pass
6**	4.310	25.01	10.30	46.00	20.99	AV	L	Pass

7987.2MHz, PHASE N

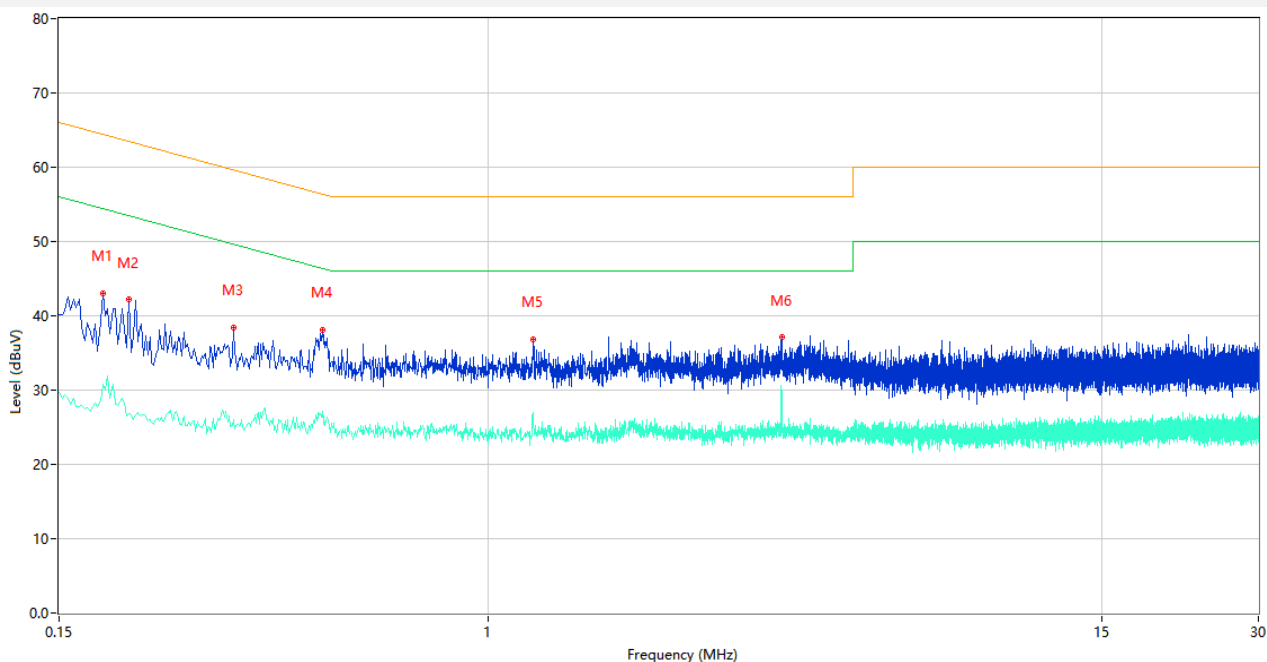

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.182	43.09	9.78	64.39	21.30	Peak	N	Pass
1**	0.182	30.82	9.78	54.39	23.57	AV	N	Pass
2	0.204	42.16	9.77	63.45	21.29	Peak	N	Pass
2**	0.204	26.78	9.77	53.45	26.67	AV	N	Pass
3	0.324	38.44	10.24	59.60	21.16	Peak	N	Pass
3**	0.324	25.96	10.24	49.60	23.64	AV	N	Pass
4	0.480	38.12	10.00	56.34	18.22	Peak	N	Pass
4**	0.480	27.16	10.00	46.34	19.18	AV	N	Pass
5	1.220	36.84	10.13	56.00	19.16	Peak	N	Pass
5**	1.220	25.42	10.13	46.00	20.58	AV	N	Pass
6	3.652	37.08	10.39	56.00	18.92	Peak	N	Pass
6**	3.652	29.34	10.39	46.00	16.66	AV	N	Pass

A.2 UWB Bandwidth

Test Data

Channel	F _M (MHz)	F _L (MHz)	F _H (MHz)	UWB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)	Verdict
CH5	6584	6198	6772	574	860.31	UWB Bandwidth ≥ 500 MHz 10 dB bandwidth contained between 3100 to 10600 MHz	Pass
CH9	8181.7	7667.2	8299.7	632.5	907.32		Pass


Test Plots

10 dB Bandwidth

6489.6MHz




7987.2MHz

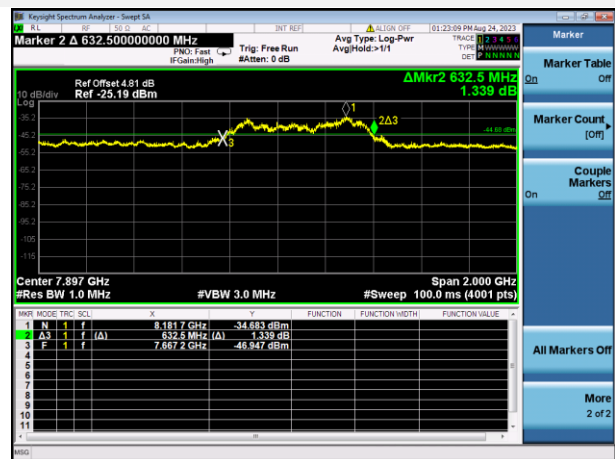


99% Bandwidth

6489.6MHz

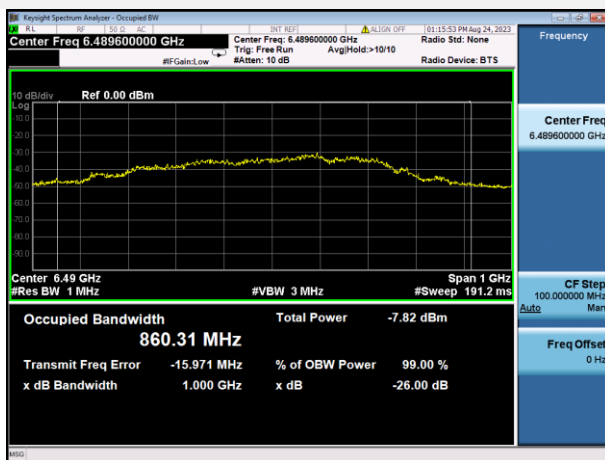

7987.2MHz

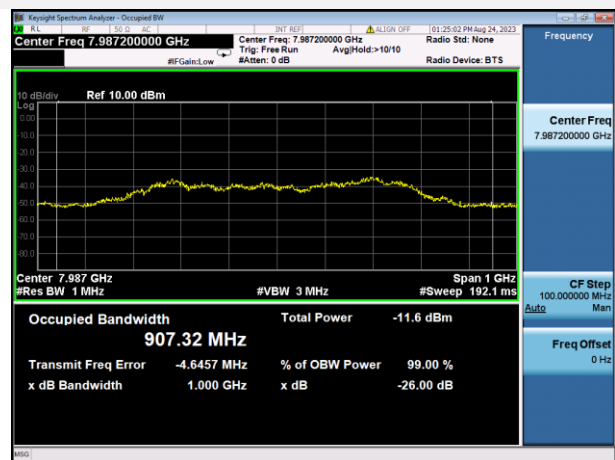


A.3 Radiated Emissions

Note: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.209 was not reported.


Test Data and Plots

6489.6MHz, 30 MHz to 1 GHz, ANT H

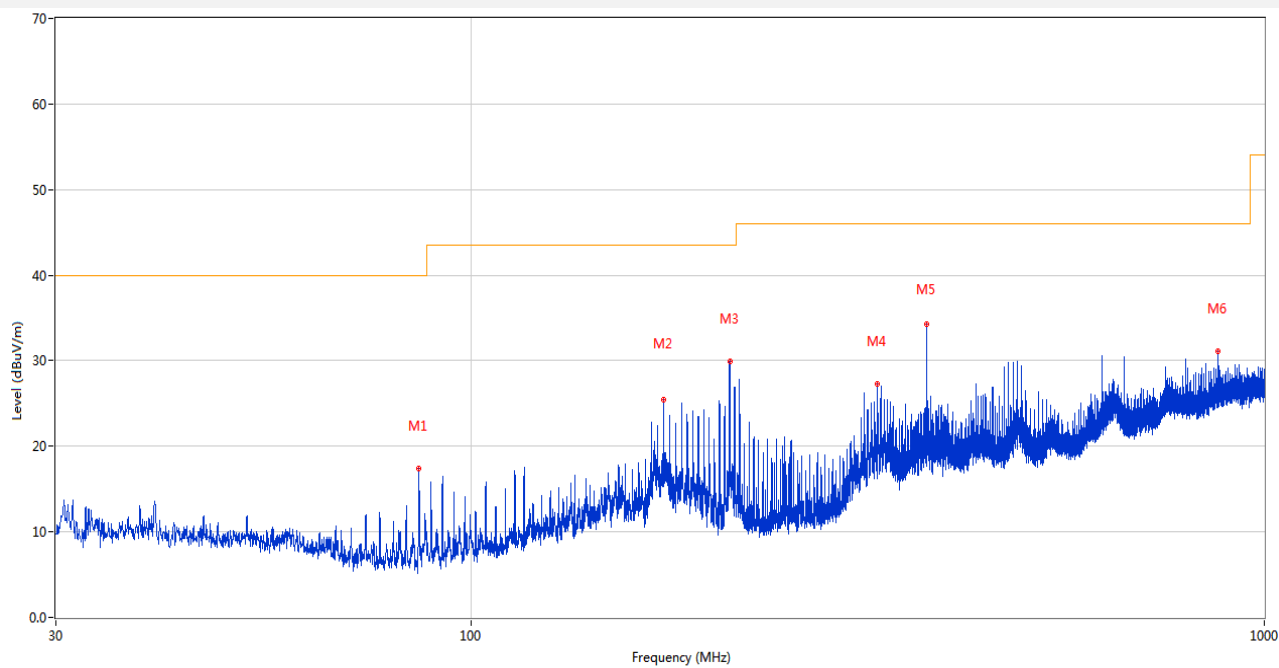


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	86.018	17.42	-30.27	40.0	22.58	Peak	270.00	200	Horizontal	Pass
2	175.112	25.43	-26.28	43.5	18.07	Peak	247.00	100	Horizontal	Pass
3	211.972	29.98	-28.08	43.5	13.52	Peak	168.00	200	Horizontal	Pass
4	325.608	27.34	-23.28	46.0	18.66	Peak	78.00	100	Horizontal	Pass
5	374.981	34.28	-21.84	46.0	11.72	Peak	89.00	100	Horizontal	Pass
6	874.967	31.06	-11.96	46.0	14.94	Peak	325.00	100	Horizontal	Pass

6489.6MHz, 30 MHz to 1 GHz, ANT V

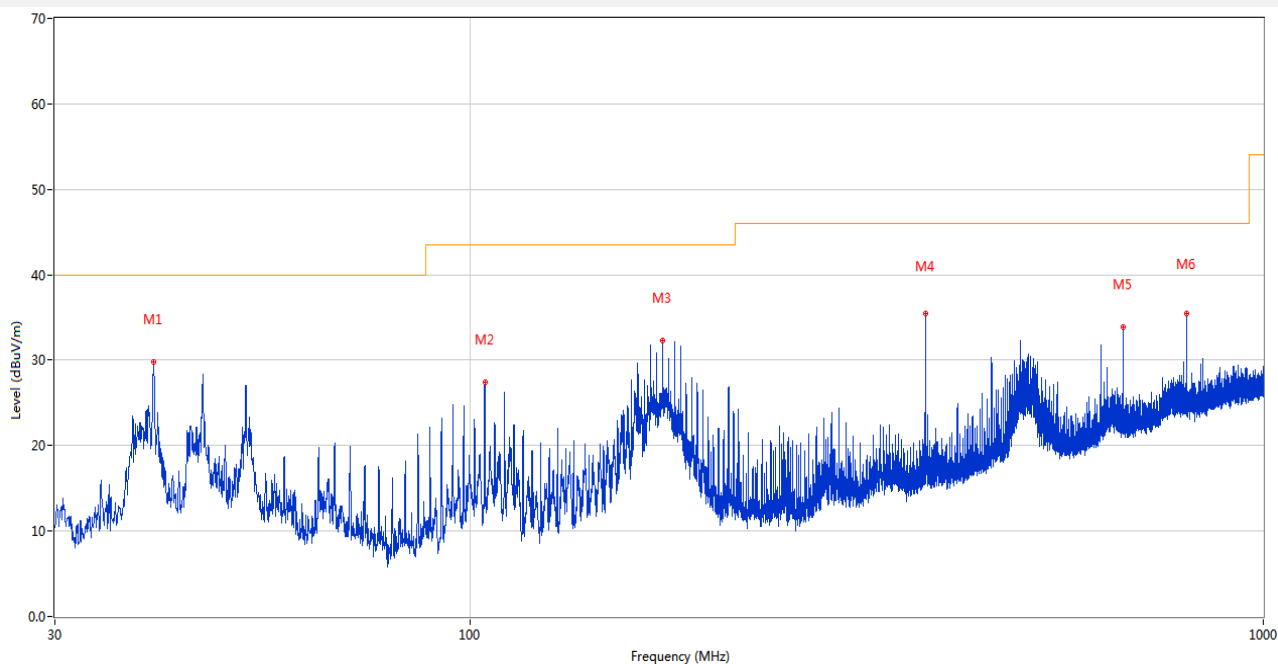


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	39.991	29.79	-26.18	40.0	10.21	Peak	171.00	100	Vertical	Pass
2	104.448	27.45	-28.70	43.5	16.05	Peak	0.00	100	Vertical	Pass
3	175.112	32.34	-26.28	43.5	11.16	Peak	348.00	100	Vertical	Pass
4	374.981	35.41	-21.84	46.0	10.59	Peak	126.00	200	Vertical	Pass
5	666.611	33.83	-14.92	46.0	12.17	Peak	360.00	200	Vertical	Pass
6	800.083	35.50	-12.85	46.0	10.50	Peak	178.00	100	Vertical	Pass

7987.2MHz, 30 MHz to 1 GHz, ANT H

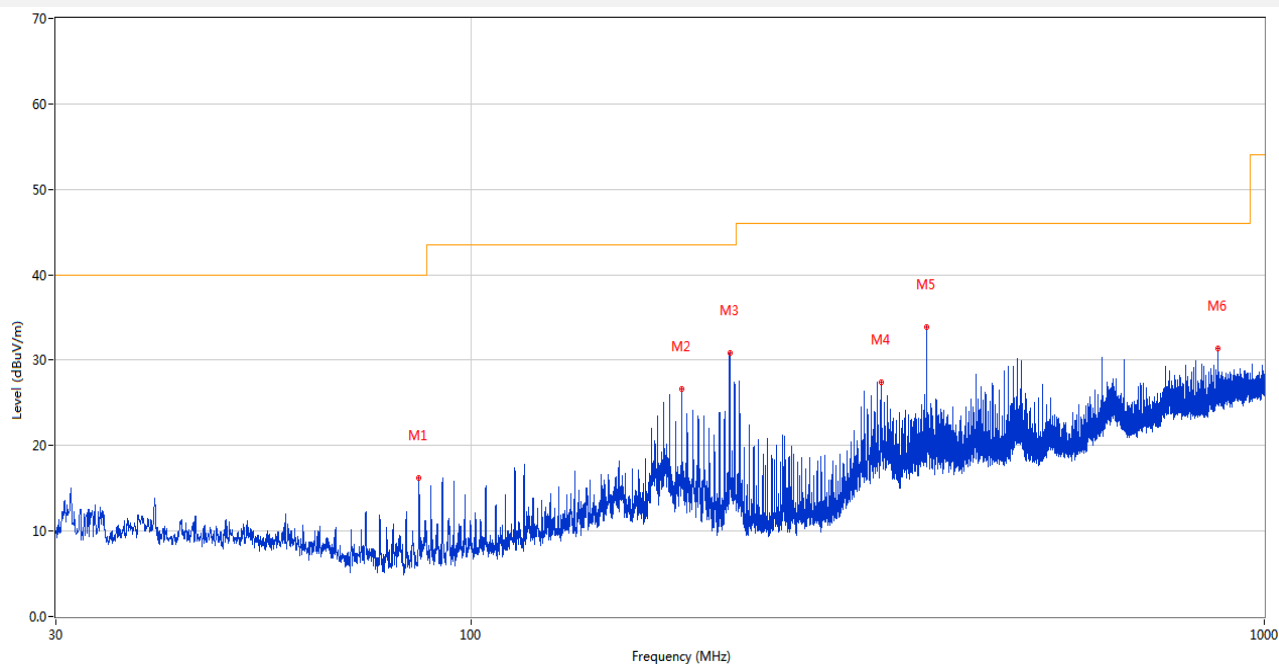

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	86.018	16.26	-30.27	40.0	23.74	Peak	266.00	200	Horizontal	Pass
2	184.327	26.65	-27.45	43.5	16.85	Peak	271.00	100	Horizontal	Pass
3	211.972	30.90	-28.08	43.5	12.60	Peak	159.00	100	Horizontal	Pass
4	328.760	27.45	-23.53	46.0	18.55	Peak	97.00	100	Horizontal	Pass
5	375.029	33.90	-21.84	46.0	12.10	Peak	93.00	100	Horizontal	Pass
6	875.015	31.34	-11.97	46.0	14.66	Peak	336.00	100	Horizontal	Pass

7987.2MHz, 30 MHz to 1 GHz, ANT V

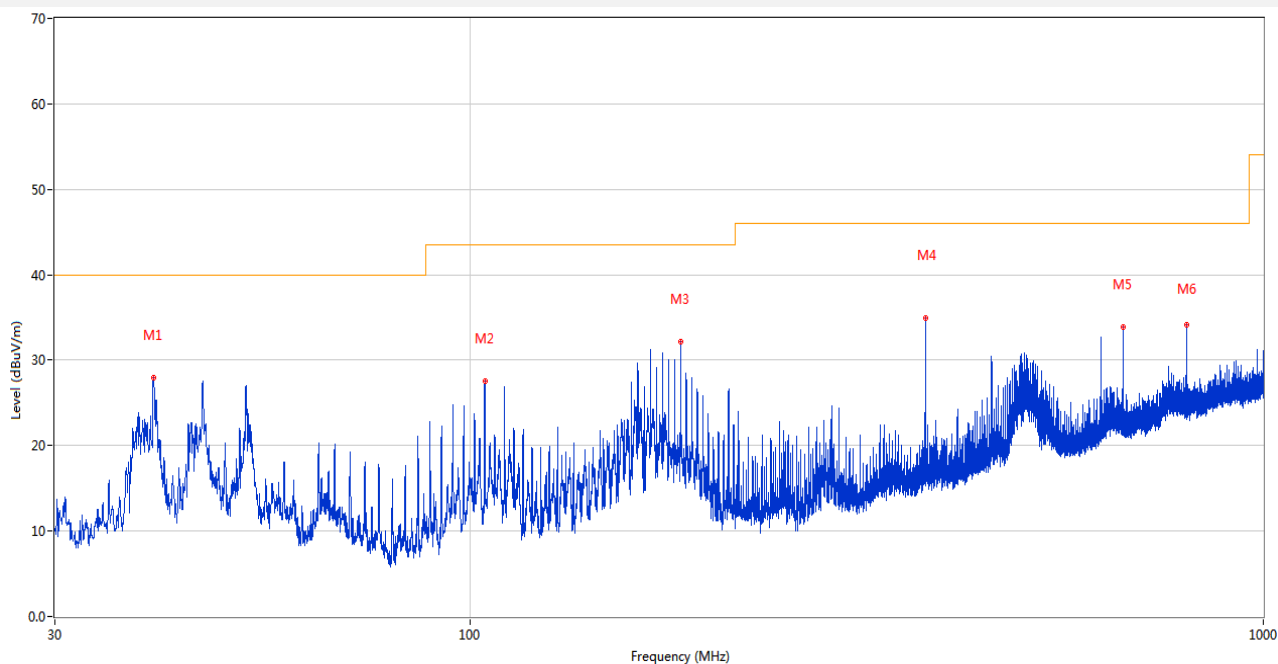


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	39.943	27.93	-26.18	40.0	12.07	Peak	1.00	100	Vertical	Pass
2	104.448	27.53	-28.70	43.5	15.97	Peak	360.00	100	Vertical	Pass
3	184.327	32.17	-27.45	43.5	11.33	Peak	356.00	100	Vertical	Pass
4	374.981	34.95	-21.84	46.0	11.05	Peak	102.00	200	Vertical	Pass
5	666.659	33.91	-14.92	46.0	12.09	Peak	360.00	200	Vertical	Pass
6	800.083	34.12	-12.85	46.0	11.88	Peak	134.00	100	Vertical	Pass

Note: The spurious above 18G is noise only, do not show on the report.

6489.6MHz, 960 MHz to 18 GHz, ANT H


RE Test case_FCC Part 15F_FCC PART 15.517(c)

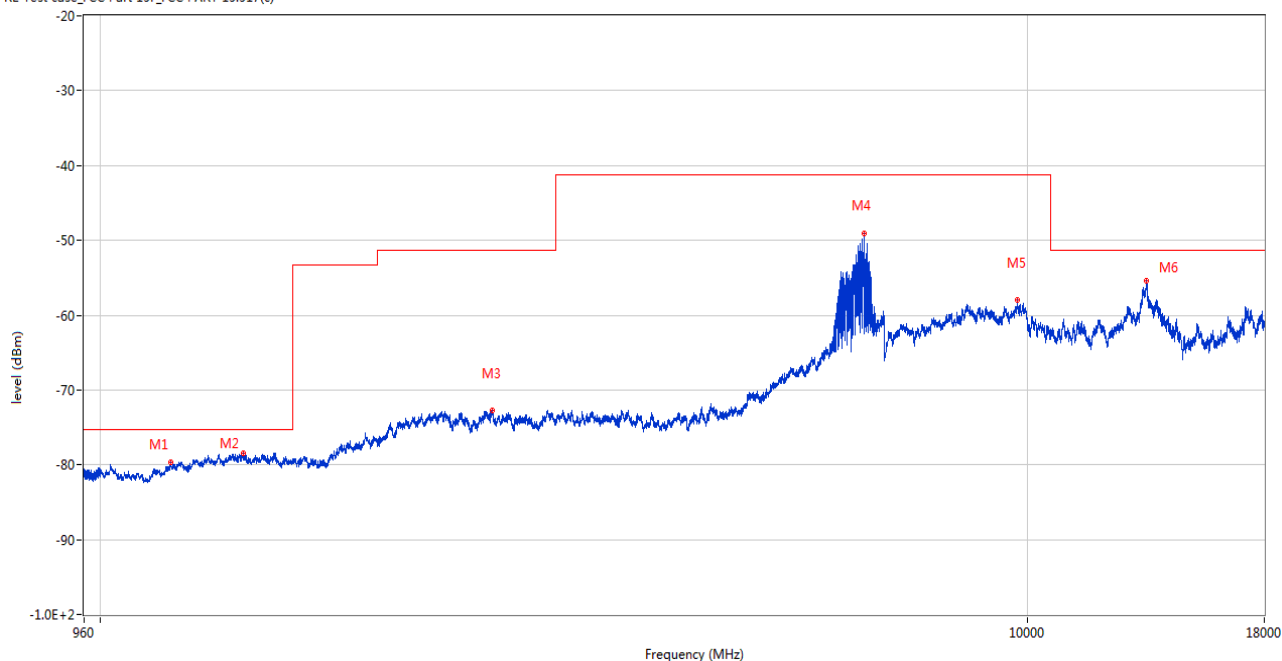

Frequency (MHz)	Result (dBm)	Factor (dB)	Limit (dBm)	Margin (dB)	Table (o)	ANT	EUT	Verdict
1190.500	-79.70	-18.12	-75.3	4.40	139.00	Horizontal	Horizontal	Pass
1426.500	-78.48	-17.34	-75.3	3.18	359.00	Horizontal	Horizontal	Pass
2644.000	-72.72	-10.57	-51.3	21.42	102.00	Horizontal	Horizontal	Pass
6665.000	-49.09	1.09	-41.3	7.79	268.00	Horizontal	Horizontal	Pass
9747.063	-57.96	7.36	-41.3	16.66	0.00	Horizontal	Horizontal	Pass
13432.500	-55.36	6.18	-51.3	4.06	254.00	Horizontal	Horizontal	Pass

6489.6MHz, 960 MHz to 18 GHz, ANT V


RE Test case_FCC Part 15F_FCC PART 15.517(c)

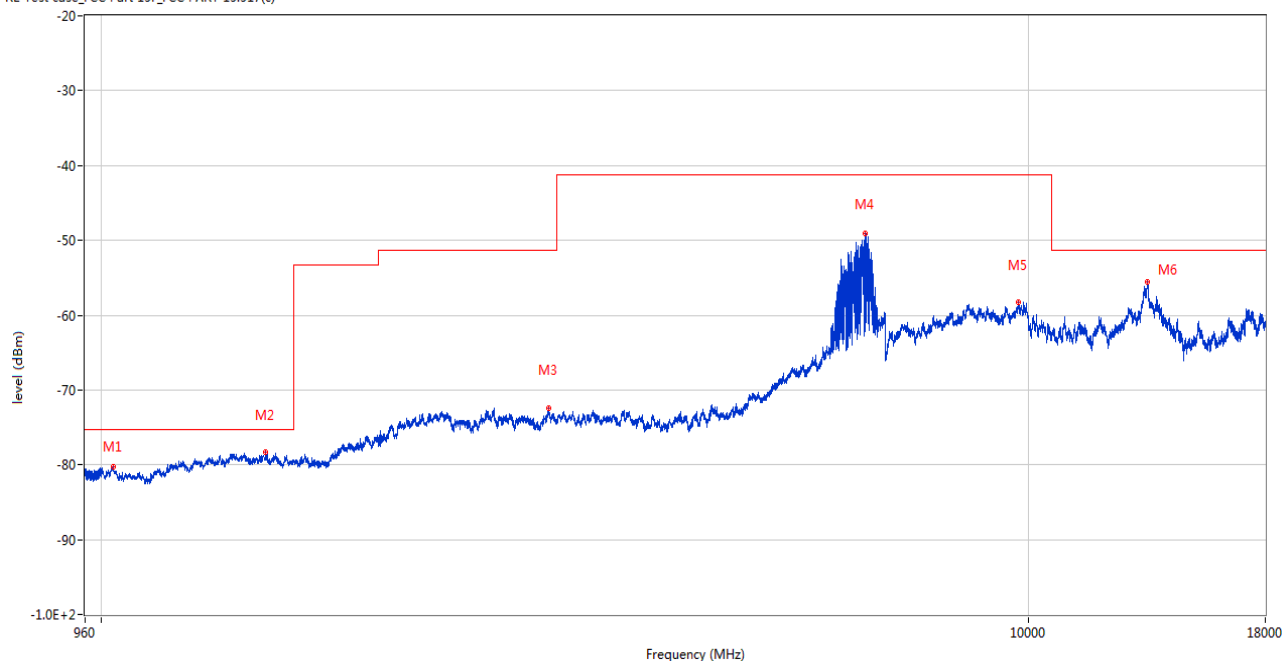

Frequency (MHz)	Result (dBm)	Factor (dB)	Limit (dBm)	Margin (dB)	Table (o)	ANT	EUT	Verdict
1028.500	-80.30	-18.00	-75.3	5.00	360.00	Vertical	Horizontal	Pass
1504.500	-78.37	-17.26	-75.3	3.07	24.00	Vertical	Horizontal	Pass
3033.000	-72.36	-9.85	-51.3	21.06	199.00	Vertical	Horizontal	Pass
6669.000	-49.14	1.37	-41.3	7.84	37.00	Vertical	Horizontal	Pass
9748.500	-58.26	7.38	-41.3	16.96	271.00	Vertical	Horizontal	Pass
13445.625	-55.55	6.42	-51.3	4.25	9.00	Vertical	Horizontal	Pass

7987.2MHz, 960 MHz to 18 GHz, ANT H


RE Test case_FCC Part 15F_FCC PART 15.517(c)

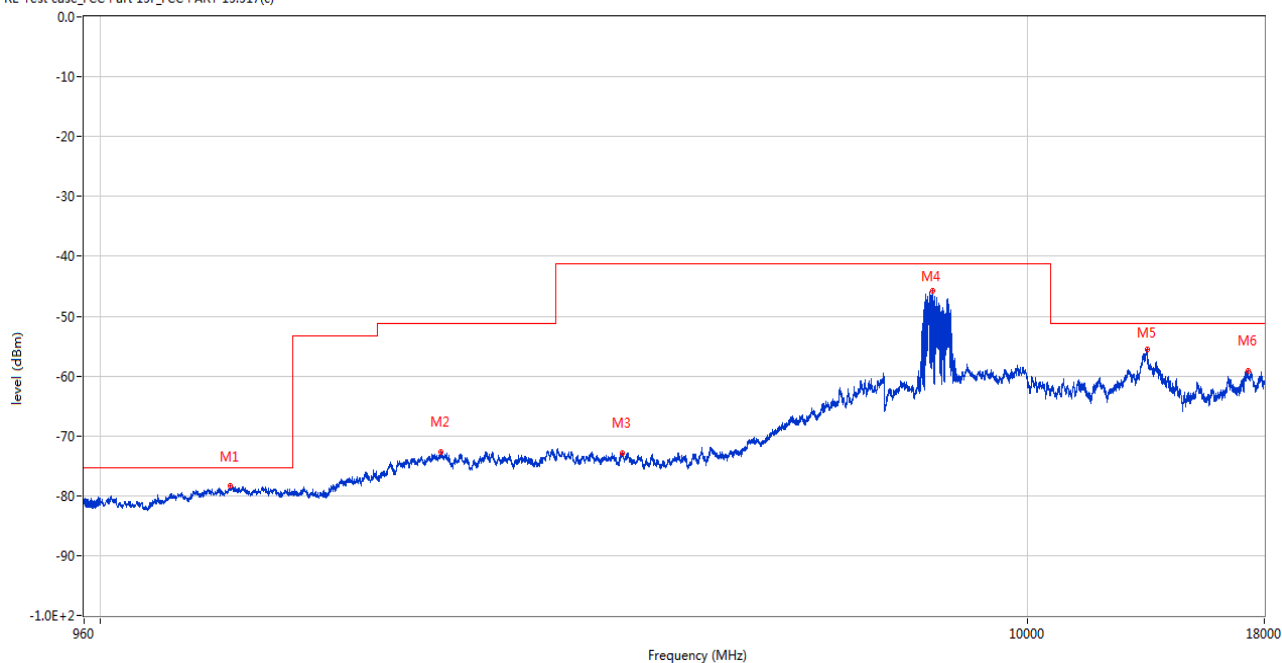

Frequency (MHz)	Result (dBm)	Factor (dB)	Limit (dBm)	Margin (dB)	Table (o)	ANT	EUT	Verdict
1379.500	-78.39	-17.24	-75.3	3.09	315.00	Horizontal	Horizontal	Pass
2329.500	-72.62	-11.17	-51.3	21.32	148.00	Horizontal	Horizontal	Pass
3652.000	-72.82	-8.86	-41.3	31.52	320.00	Horizontal	Horizontal	Pass
7891.250	-45.85	3.96	-41.3	4.55	272.00	Horizontal	Horizontal	Pass
13452.188	-55.63	6.50	-51.3	4.33	112.00	Horizontal	Horizontal	Pass
17278.124	-59.05	3.46	-51.3	7.75	120.00	Horizontal	Horizontal	Pass

7987.2MHz, 960 MHz to 18 GHz, ANT V

RE Test case_FCC Part 15F_FCC PART 15.517(c)

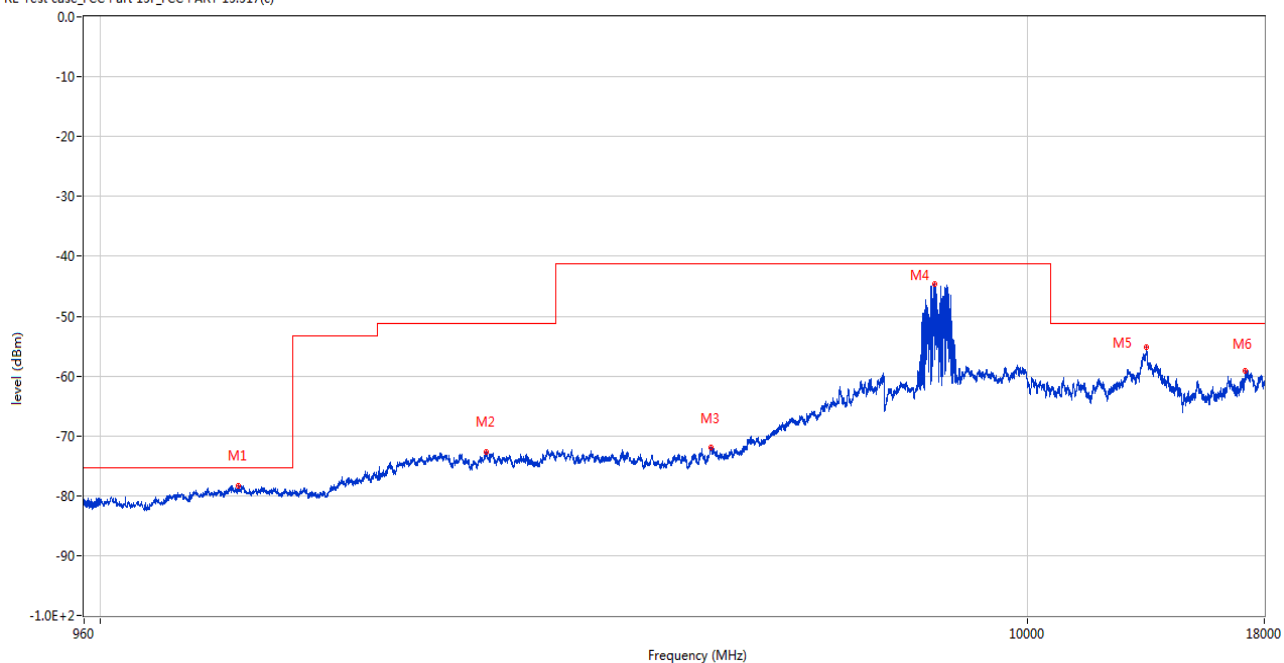


Frequency (MHz)	Result (dBm)	Factor (dB)	Limit (dBm)	Margin (dB)	Table (o)	ANT	EUT	Verdict
1406.500	-78.28	-17.04	-75.3	2.98	110.00	Vertical	Horizontal	Pass
2609.000	-72.62	-10.95	-51.3	21.32	152.00	Vertical	Horizontal	Pass
4552.000	-71.97	-8.32	-41.3	30.67	186.00	Vertical	Horizontal	Pass
7943.000	-44.62	3.86	-41.3	3.32	310.00	Vertical	Horizontal	Pass
13444.312	-55.17	6.39	-51.3	3.87	241.00	Vertical	Horizontal	Pass
17177.062	-59.13	3.54	-51.3	7.83	244.00	Vertical	Horizontal	Pass

A.4 Radiated Emissions in GPS Bands

Test Data and Plots

6489.6MHz, 1.164 GHz to 1.61 GHz, ANT H


RE Test case_FCC Part 15F_FCC PART 15.517(d)

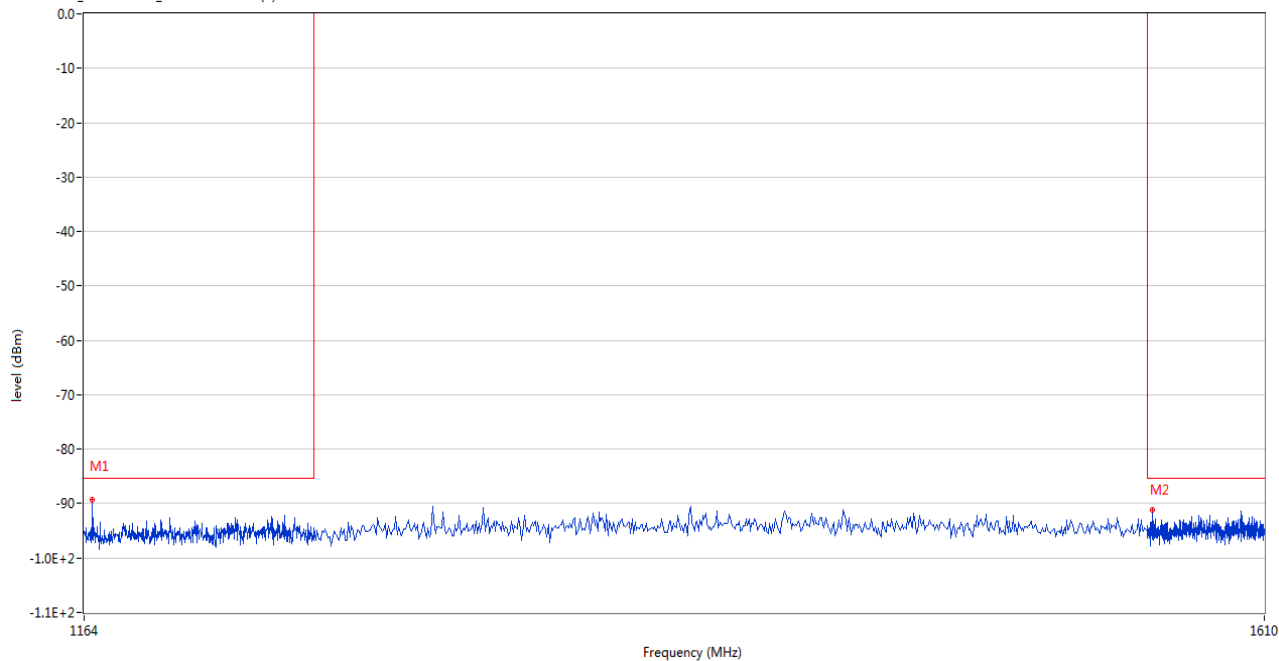

Frequency (MHz)	Result (dBm)	Factor (dB)	Limit (dBm)	Margin (dB)	Table (o)	ANT	EUT	Verdict
1166.660	-89.35	-6.57	-85.3	4.05	285.00	Horizontal	Horizontal	Pass
1561.210	-91.14	-5.99	-85.3	5.84	1.00	Horizontal	Horizontal	Pass

6489.6MHz, 1.164 GHz to 1.61 GHz, ANT V


RE Test case_FCC Part 15F_FCC PART 15.517(d)

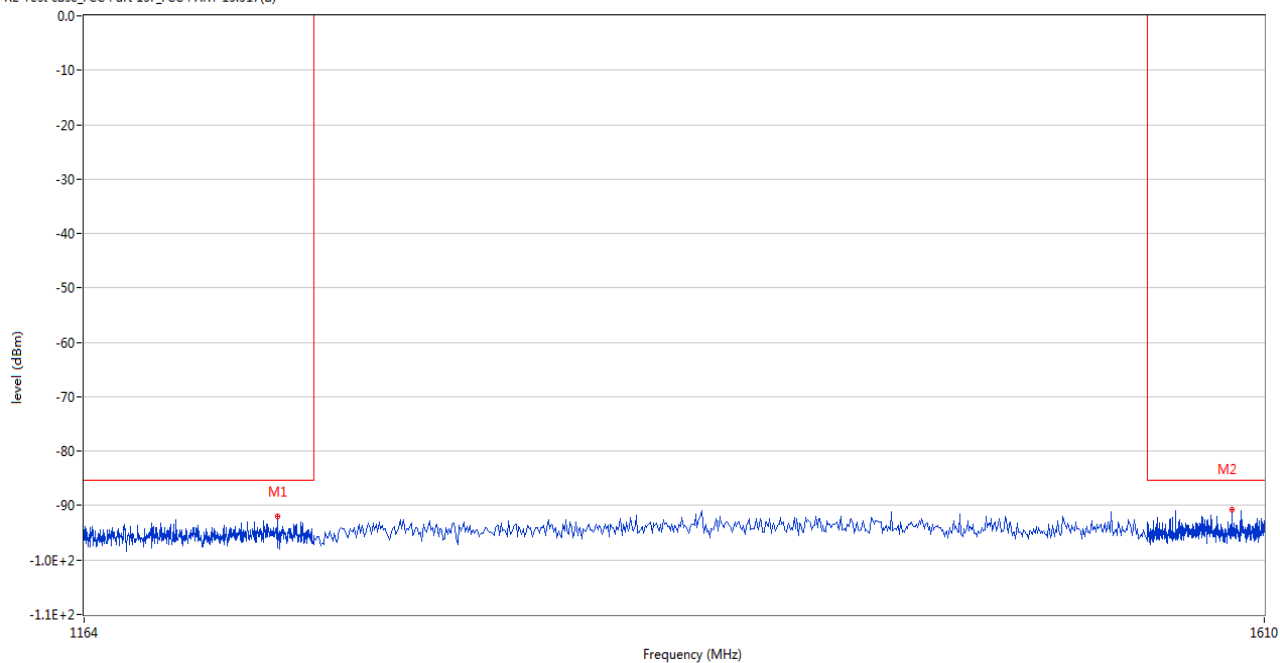

Frequency (MHz)	Result (dBm)	Factor (dB)	Limit (dBm)	Margin (dB)	Table (o)	ANT	EUT	Verdict
1227.460	-91.95	-6.41	-85.3	6.65	159.00	Vertical	Horizontal	Pass
1595.805	-90.67	-6.24	-85.3	5.37	161.00	Vertical	Horizontal	Pass

7987.2MHz, 1.164 GHz to 1.61 GHz, ANT H


RE Test case_FCC Part 15F_FCC PART 15.517(d)

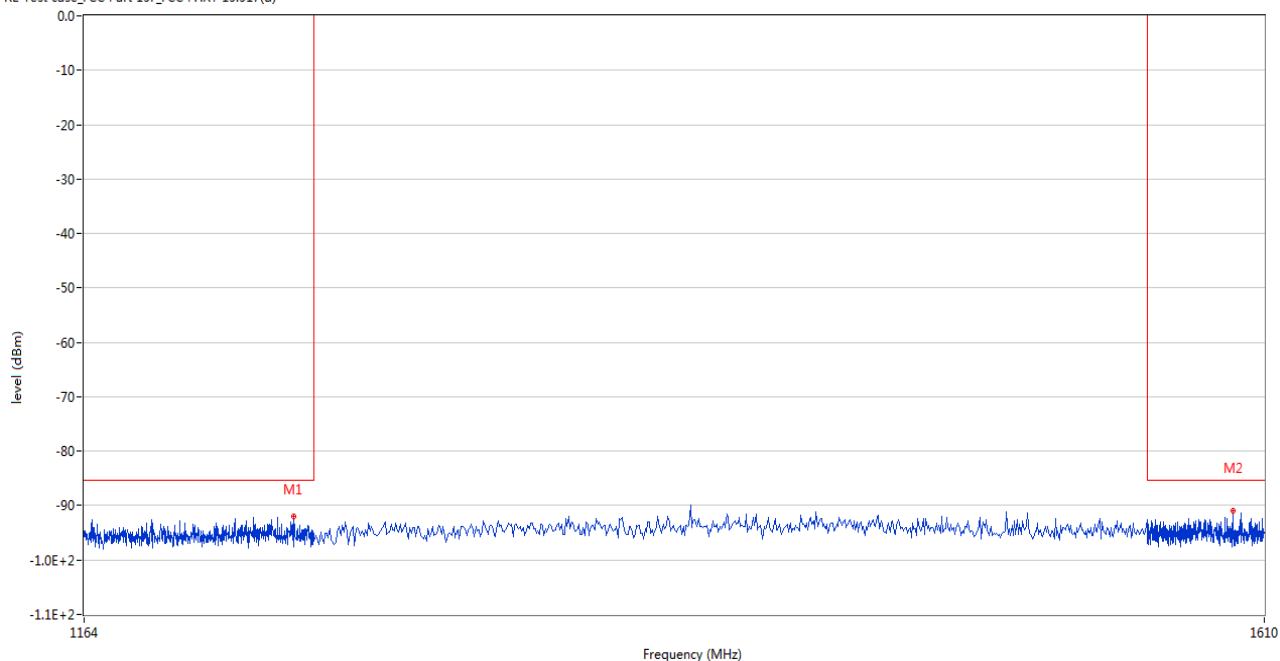

Frequency (MHz)	Result (dBm)	Factor (dB)	Limit (dBm)	Margin (dB)	Table (o)	ANT	EUT	Verdict
1233.160	-91.93	-6.07	-85.3	6.63	318.00	Horizontal	Horizontal	Pass
1596.145	-90.99	-6.24	-85.3	5.69	347.00	Horizontal	Horizontal	Pass

7987.2MHz, 1.164 GHz to 1.61 GHz, ANT V

RE Test case_FCC Part 15F_FCC PART 15.517(d)

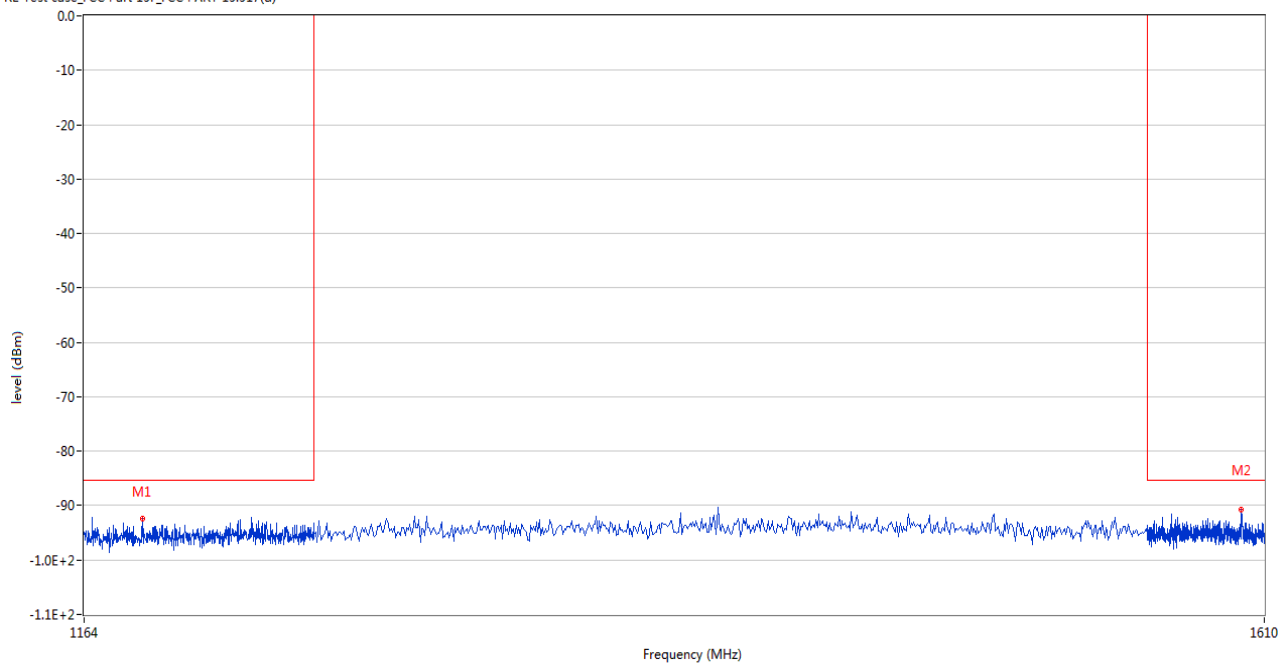


Frequency (MHz)	Result (dBm)	Factor (dB)	Limit (dBm)	Margin (dB)	Table (o)	ANT	EUT	Verdict
1182.747	-92.39	-6.78	-85.3	7.09	8.00	Vertical	Horizontal	Pass
1599.970	-90.82	-6.32	-85.3	5.52	5.00	Vertical	Horizontal	Pass

A.5 Peak Emissions within a 50MHz Bandwidth

Test Data and Plot

6489.6MHz, 3 GHz to 10 GHz, ANT H

RE Test case_FCC Part 15F_FCC PART 15.517(c) - PSD

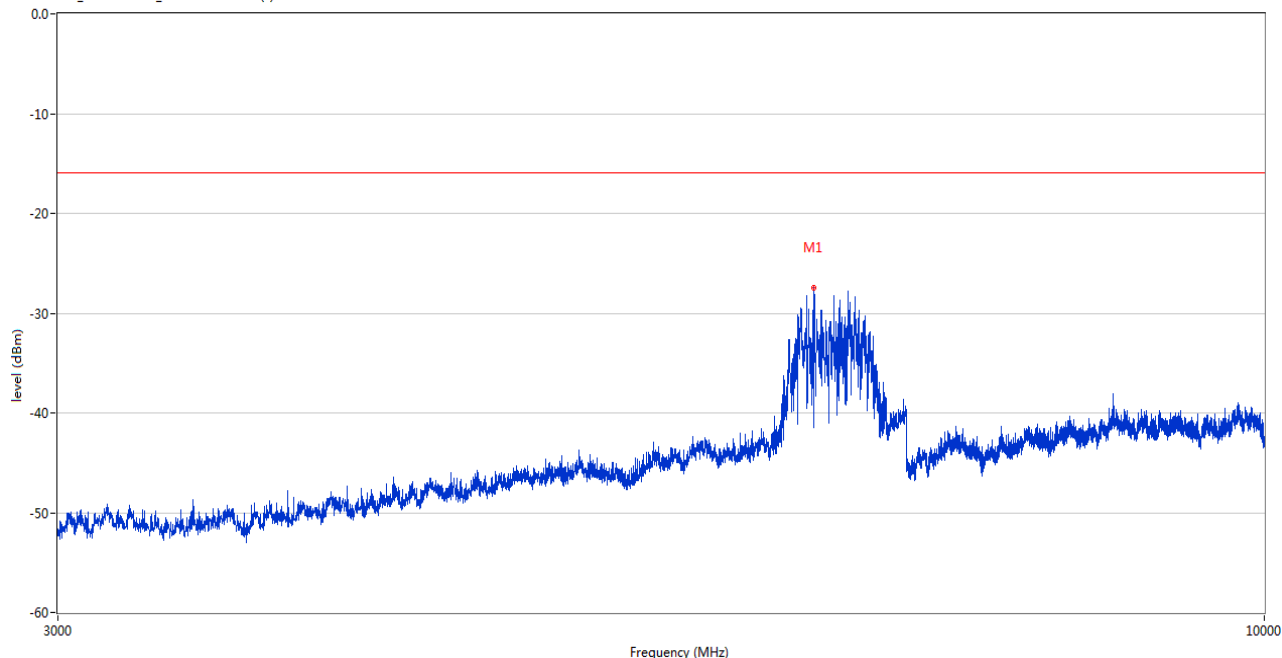


Frequency (MHz)	Result (dBm)	Factor (dB)	Limit (dBm)	Margin (dB)	Table (o)	ANT	EUT	Verdict
6382.000	-27.41	2.86	-15.9	11.51	95.00	Horizontal	Horizontal	Pass

Note: $EIRP_{50\text{ MHz}} = EIRP_{8\text{ MHz}} + 20\log(8\text{ MHz}/50\text{ MHz})$

Frequency (MHz)	Result (dBm)	Factor (dB)	Limit (dBm/50 MHz)	Margin (dB)	Table (o)	ANT	EUT	Verdict
6382.000	-11.51	2.86	0	11.51	95.00	Horizontal	Horizontal	Pass

6489.6MHz, 3 GHz to 10 GHz, ANT V

RE Test case_FCC Part 15F_FCC PART 15.517(c) - PSD

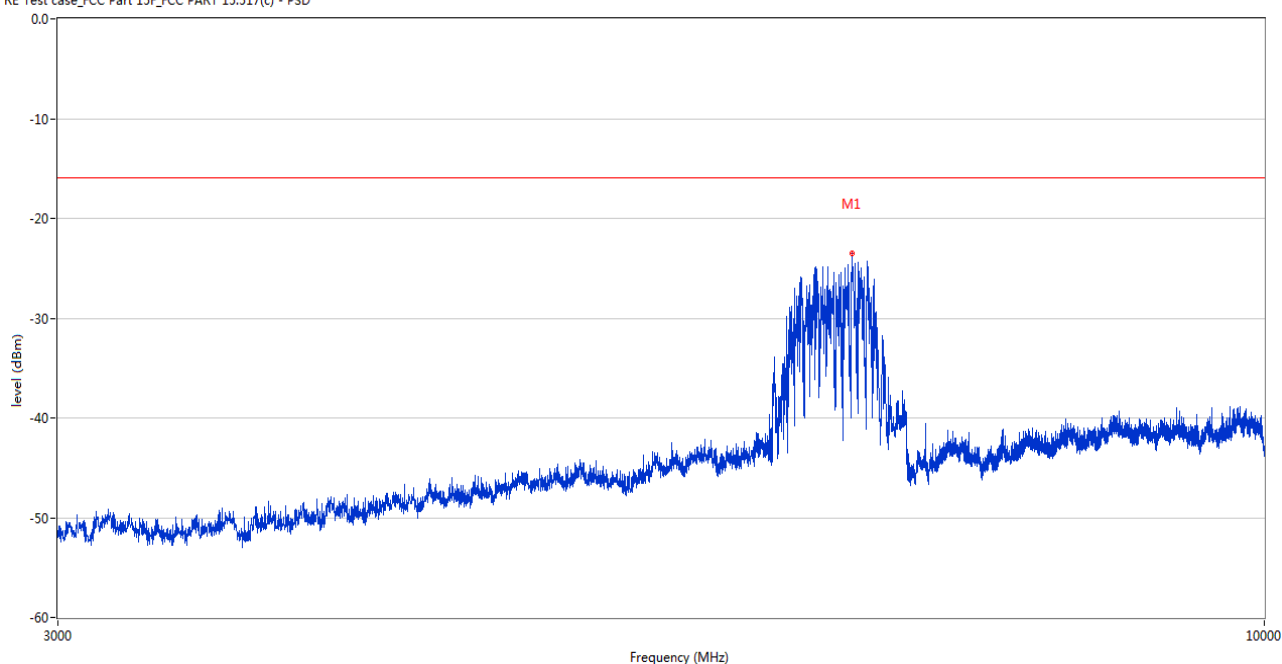


Frequency (MHz)	Result (dBm)	Factor (dB)	Limit (dBm)	Margin (dB)	Table (o)	ANT	EUT	Verdict
6626.000	-23.52	4.88	-15.9	7.62	229.00	Vertical	Horizontal	Pass

Note: $EIRP_{50\text{ MHz}} = EIRP_{8\text{ MHz}} + 20\log(8\text{ MHz}/50\text{ MHz})$

Frequency (MHz)	Result (dBm)	Factor (dB)	Limit (dBm/50 MHz)	Margin (dB)	Table (o)	ANT	EUT	Verdict
6626.000	-7.62	4.88	0	7.62	229.00	Vertical	Horizontal	Pass

7987.2MHz, 3 GHz to 10 GHz, ANT H

RE Test case_FCC Part 15F_FCC PART 15.517(c) - PSD

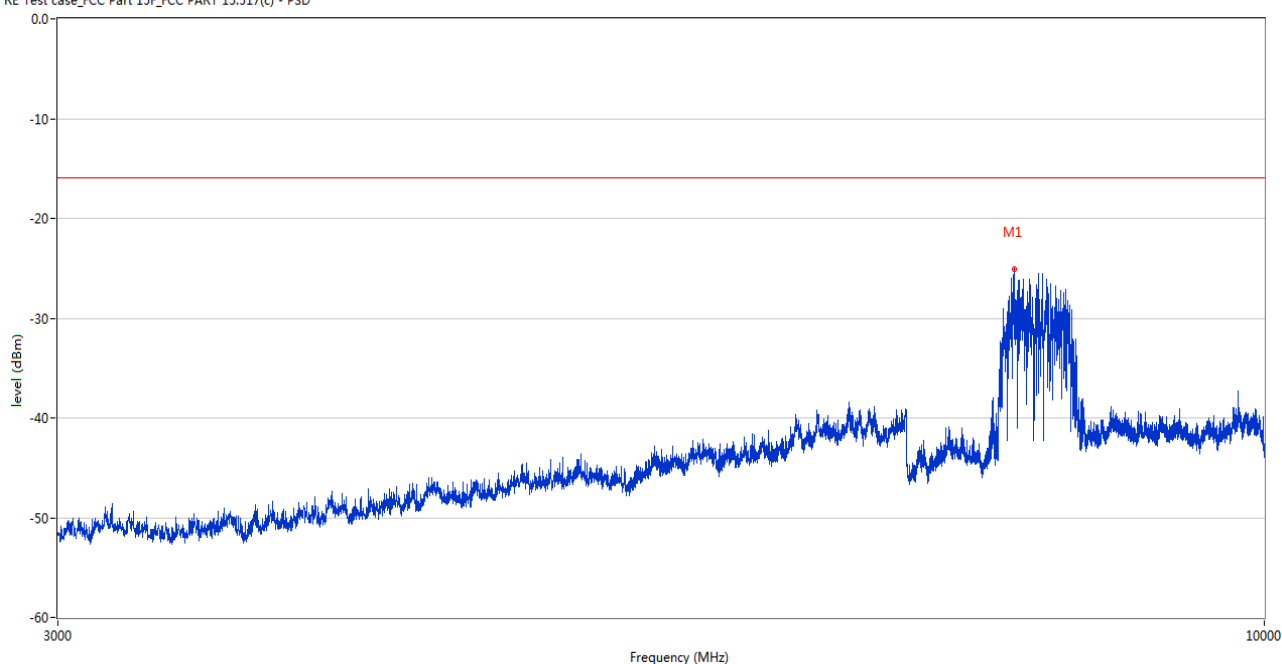


Frequency (MHz)	Result (dBm)	Factor (dB)	Limit (dBm)	Margin (dB)	Table (o)	ANT	EUT	Verdict
7789.000	-25.10	3.41	-15.9	9.20	179.00	Horizontal	Horizontal	Pass

Note: $EIRP_{50\text{ MHz}} = EIRP_{8\text{ MHz}} + 20\log(8\text{ MHz}/50\text{ MHz})$

Frequency (MHz)	Result (dBm)	Factor (dB)	Limit (dBm/50 MHz)	Margin (dB)	Table (o)	ANT	EUT	Verdict
7789.000	-9.20	3.41	0	9.20	179.00	Horizontal	Horizontal	Pass

7987.2MHz, 3 GHz to 10 GHz, ANT V

RE Test case_FCC Part 15F_FCC PART 15.517(c) - PSD

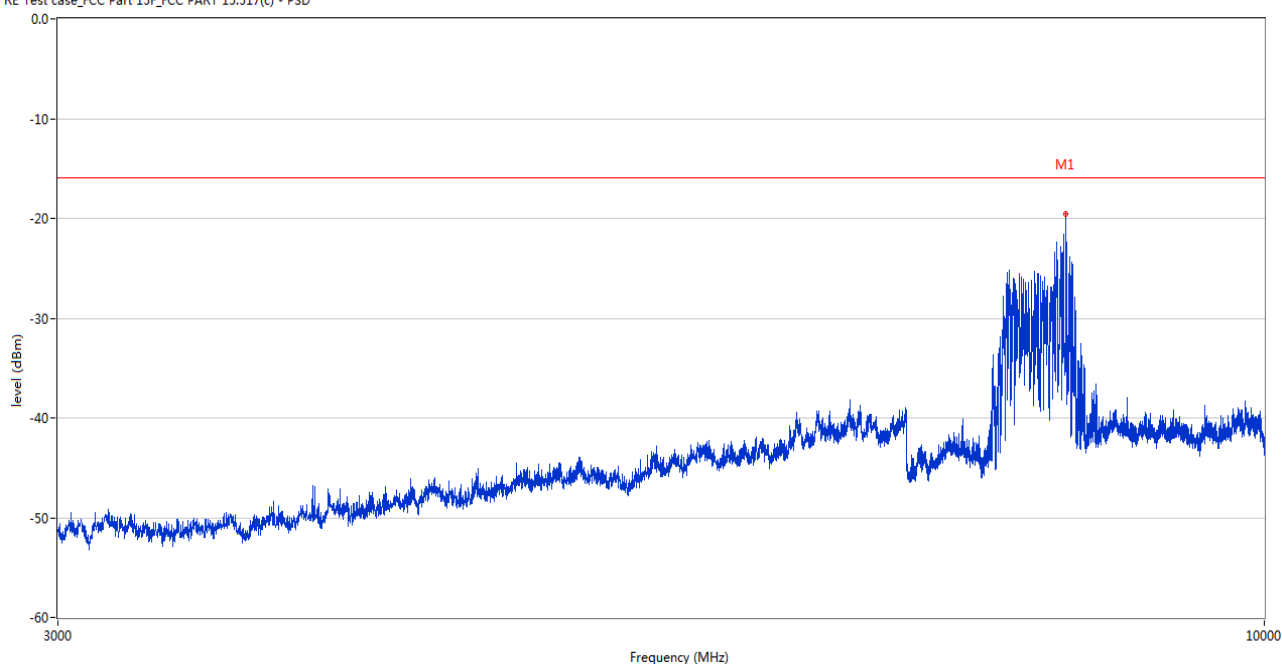

Frequency (MHz)	Result (dBm)	Factor (dB)	Limit (dBm)	Margin (dB)	Table (o)	ANT	EUT	Verdict
8204.500	-19.54	4.81	-15.9	3.64	199.00	Vertical	Horizontal	Pass

Note: $EIRP_{50\text{ MHz}} = EIRP_{8\text{ MHz}} + 20\log(8\text{ MHz}/50\text{ MHz})$

Frequency (MHz)	Result (dBm)	Factor (dB)	Limit (dBm/50 MHz)	Margin (dB)	Table (o)	ANT	EUT	Verdict
8204.500	-3.64	4.81	0	3.64	199.00	Vertical	Horizontal	Pass

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2380595-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2380595-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2380595-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--