



# FCC RADIO TEST REPORT

The product was received on Aug. 02, 2021 and testing was started from Aug. 12, 2021 and completed on Aug. 26, 2021. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

**Approved by: Louis Wu**

**Sporton International Inc. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



## Table of Contents

<b>History of this test report.....</b>	<b>3</b>
<b>Summary of Test Result.....</b>	<b>4</b>
<b>1 General Description.....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT .....	5
1.3 Testing Location .....	6
1.4 Applicable Standards.....	6
<b>2 Test Configuration of Equipment Under Test.....</b>	<b>7</b>
2.1 Carrier Frequency Channel .....	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System .....	9
2.4 EUT Operation Test Setup .....	9
2.5 Measurement Results Explanation Example.....	9
<b>3 Test Result.....</b>	<b>10</b>
3.1 6dB and 99% Bandwidth Measurement .....	10
3.2 Output Power Measurement.....	15
3.3 Power Spectral Density Measurement .....	16
3.4 Conducted Band Edges and Spurious Emission Measurement .....	21
3.5 Radiated Band Edges and Spurious Emission Measurement .....	27
3.6 Antenna Requirements .....	31
<b>4 List of Measuring Equipment .....</b>	<b>32</b>
<b>5 Uncertainty of Evaluation.....</b>	<b>33</b>
<b>Appendix A. Conducted Test Results</b>	
<b>Appendix B. Radiated Spurious Emission</b>	
<b>Appendix C. Radiated Spurious Emission Plots</b>	
<b>Appendix D. Duty Cycle Plots</b>	
<b>Appendix E. Setup Photographs</b>	



## History of this test report



## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	Under limit 0.99 dB at 2483.520 MHz
-	15.207	AC Conducted Emission	Not Required	-
3.6	15.203 & 15.247(b)	Antenna Requirement	Pass	-

**Note:** Not required means after assessing, test items are not necessary to carry out.

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by:** Lewis Ho

**Report Producer:** Cindy Liu



## 1 General Description

### 1.1 Product Feature of Equipment Under Test

Bluetooth

Product Specification is subject to this standard	
<b>Sample 1</b>	TI Sensor (DRV5032AJDMRR)
<b>Sample 2</b>	ABLIC Sensor (S-5716ANSL3-I4T1U)
<b>Sample 3</b>	ABLIC Sensor (S-5716ACDL3-I4T1U)
<b>Sample 4</b>	Rohm Sensor (BU52095GWZ-E2)
<b>Antenna Type</b>	Monopole Antenna

Antenna information		
<b>2400 MHz ~ 2483.5 MHz</b>	Peak Gain (dBi)	-2.1

**Remark:** The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

Specification of Accessory		
<b>Battery 1</b>	<b>Brand Name</b>	Varta
	<b>Model Name</b>	CP1254 A4
<b>Battery 2</b>	<b>Brand Name</b>	VDL
	<b>Model Name</b>	ZJ1254H
<b>USB Cable 1</b>	<b>Brand Name</b>	Bang & Olufsen
	<b>Model Name</b>	BHC568
	<b>Manufacturer</b>	Mingji
<b>USB Cable 2</b>	<b>Brand Name</b>	Bang & Olufsen
	<b>Model Name</b>	BHC568
	<b>Manufacturer</b>	Perfect Cable
<b>Bluetooth Earphone (R)</b>	<b>Brand Name</b>	Bang & Olufsen
	<b>Model Name</b>	EX Earbud R
<b>Charging Case</b>	<b>Brand Name</b>	Bang & Olufsen
	<b>Model Name</b>	EX Charging case

### 1.2 Modification of EUT

No modifications are made to the EUT during all test items.



## 1.3 Testing Location

<b>Test Site</b>	Sportun International Inc. EMC & Wireless Communications Laboratory
<b>Test Site Location</b>	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
<b>Test Site No.</b>	<b>Sportun Site No.</b> TH02-HY, 03CH07-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190

## 1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-




## 2.2 Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). The measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find X plane as worst plane.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	<b>Bluetooth – LE / GFSK</b> Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
Radiated Test Cases	<b>&lt;Sample 1 with Battery 1&gt;</b> Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps <b>&lt;Sample 1 with Battery 2&gt;</b> Mode 1: Bluetooth Tx CH39_2480 MHz_2Mbps

## 2.3 Connection Diagram of Test System

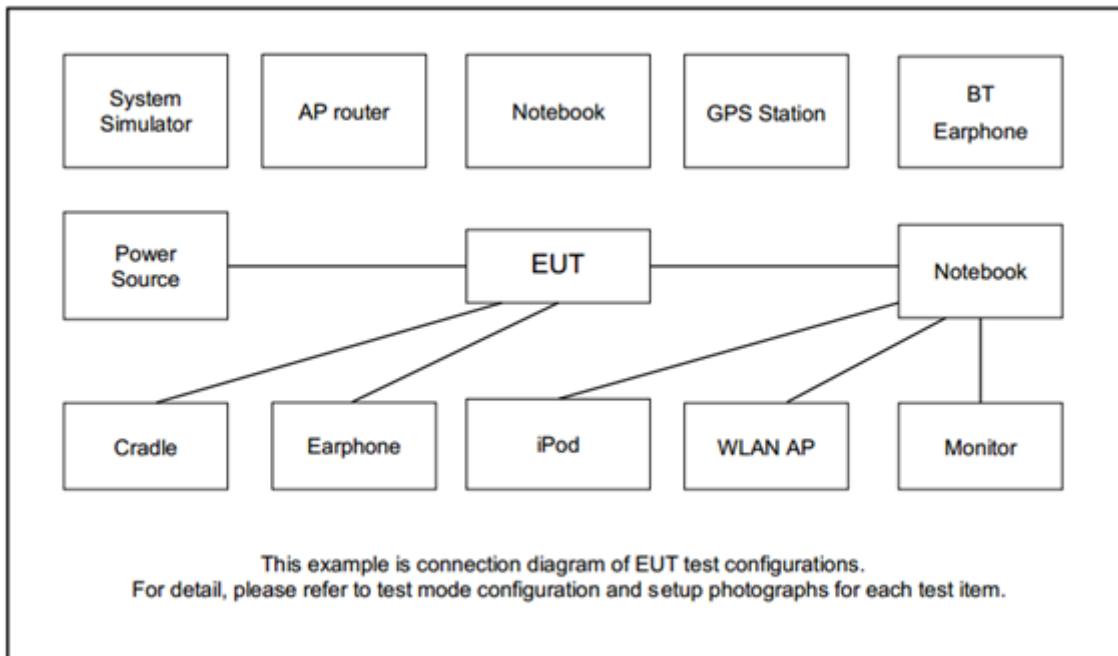

## 2.4 EUT Operation Test Setup

The RF test items, utility “Blue Test3(3.3.2)” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

## 2.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

##### 3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW)  $\geq 3 * \text{RBW}$ .
6. Measure and record the results in the test report.


##### 3.1.4 Test Setup

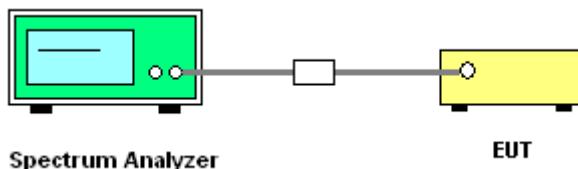

### 3.1.5 Test Result of 6dB Bandwidth


Please refer to Appendix A.

<1Mbps>

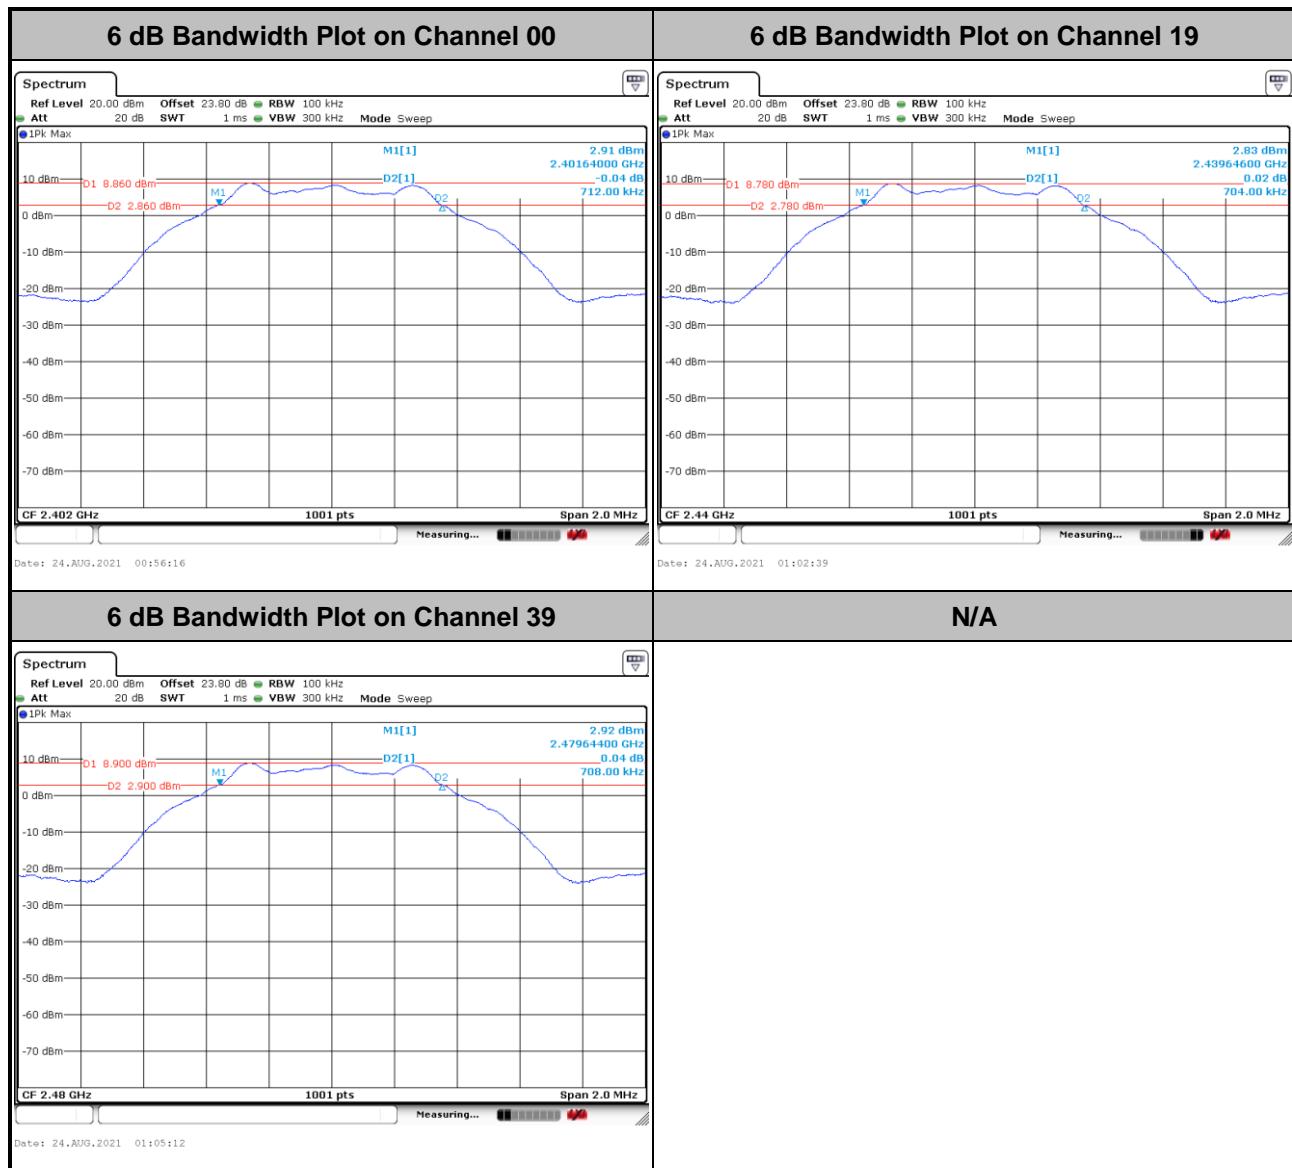



&lt;2Mbps&gt;

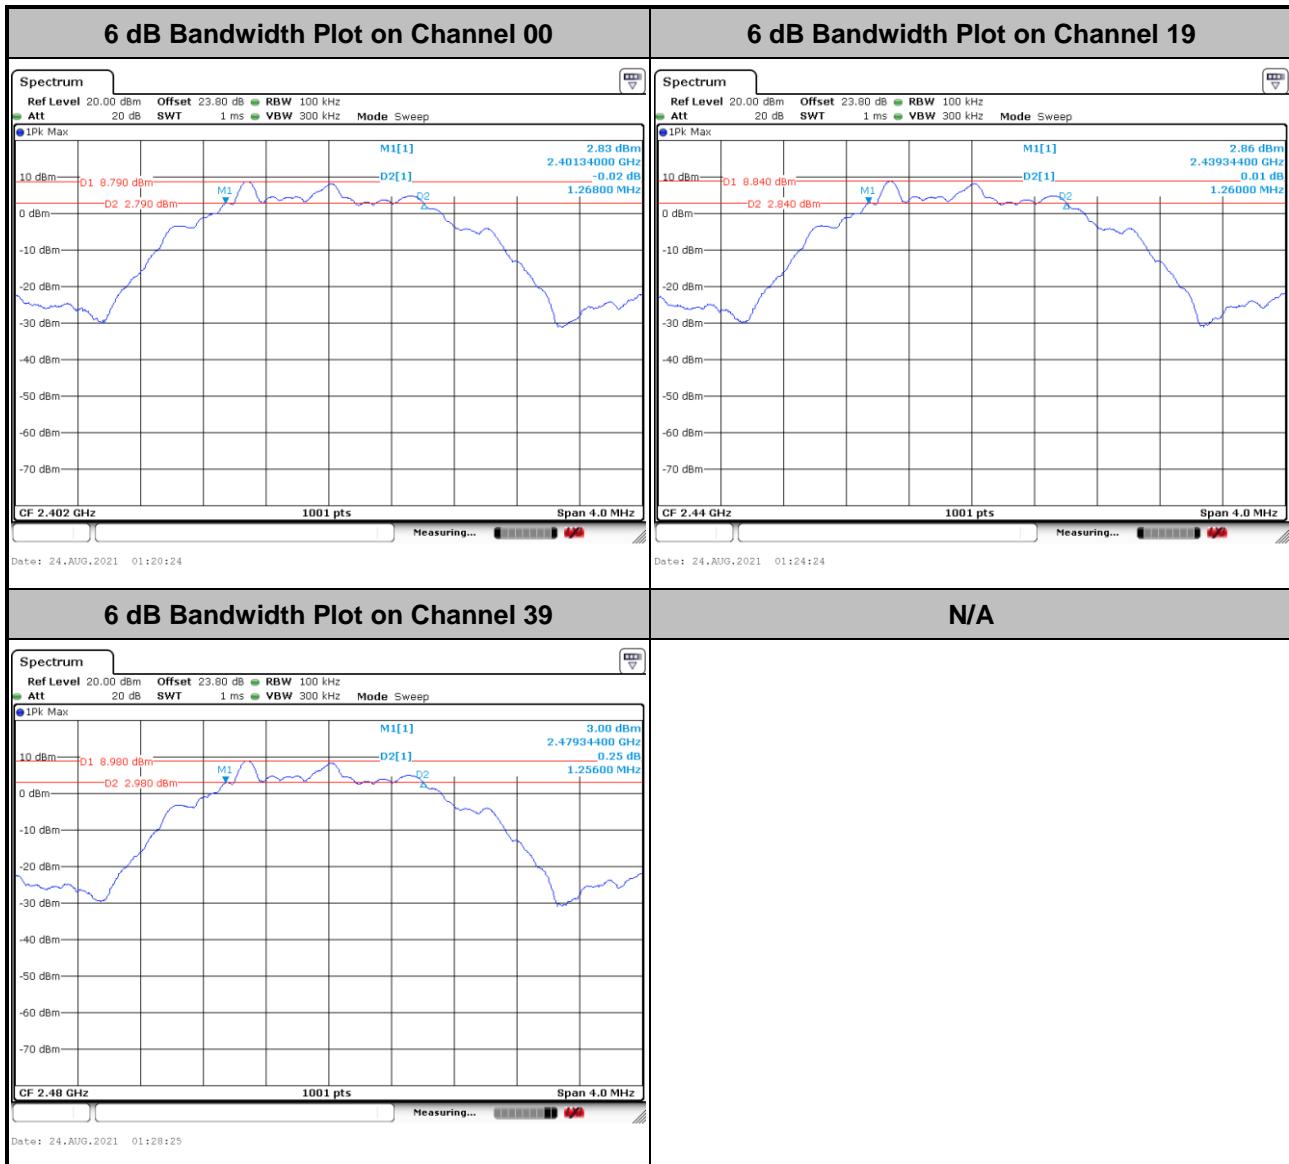




### 3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


<1Mbps>

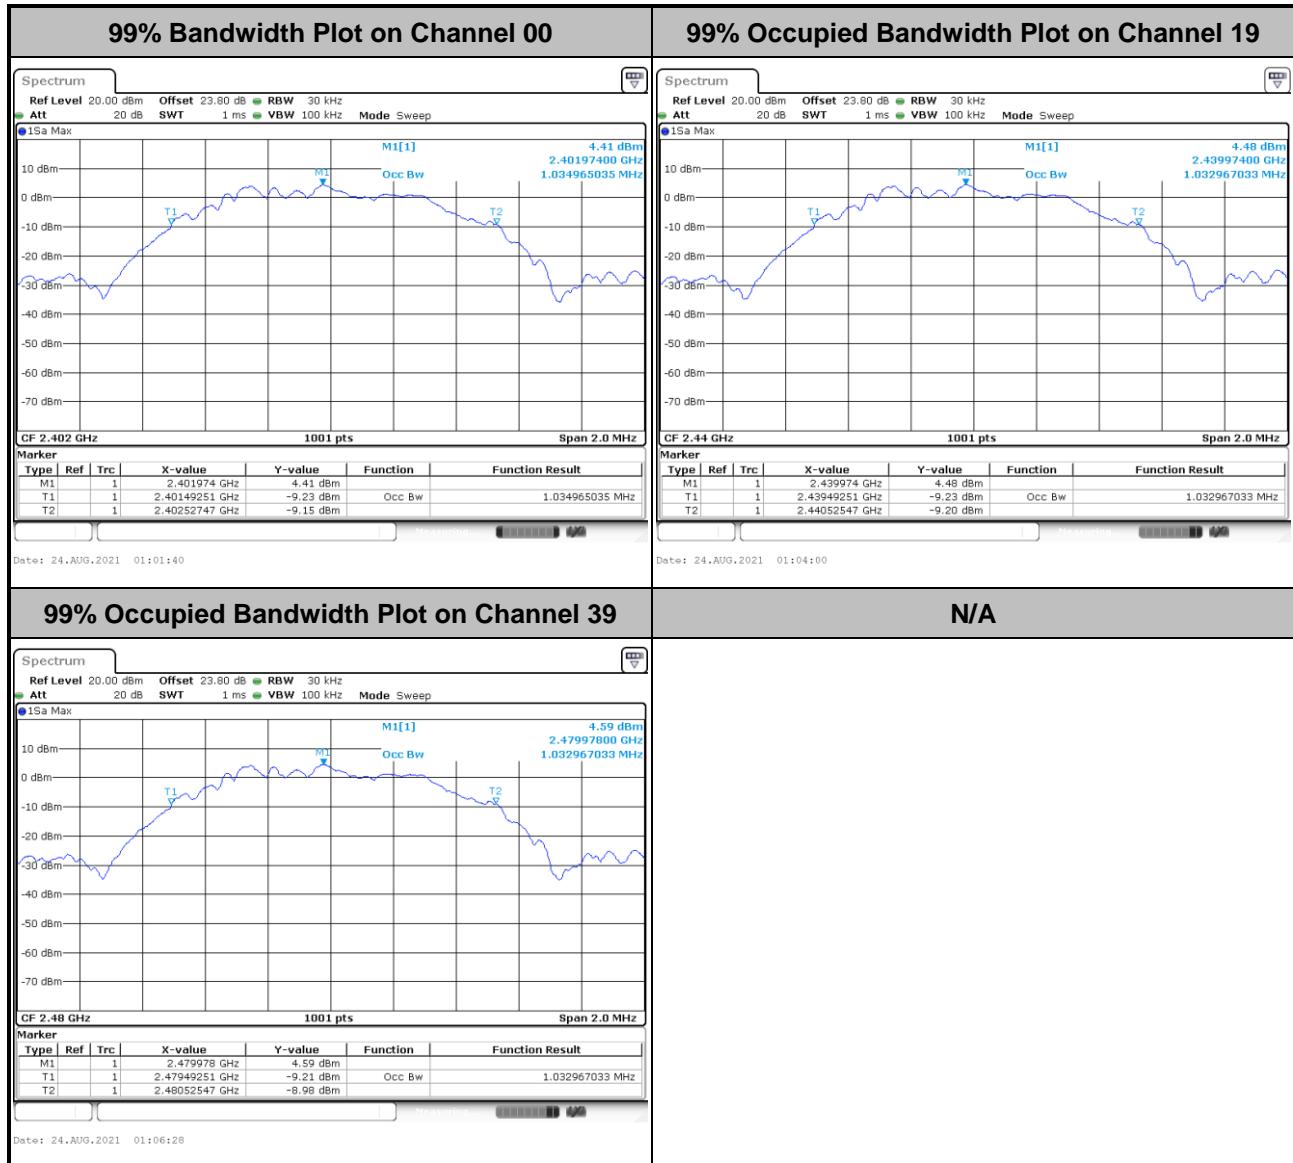

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



&lt;2Mbps&gt;

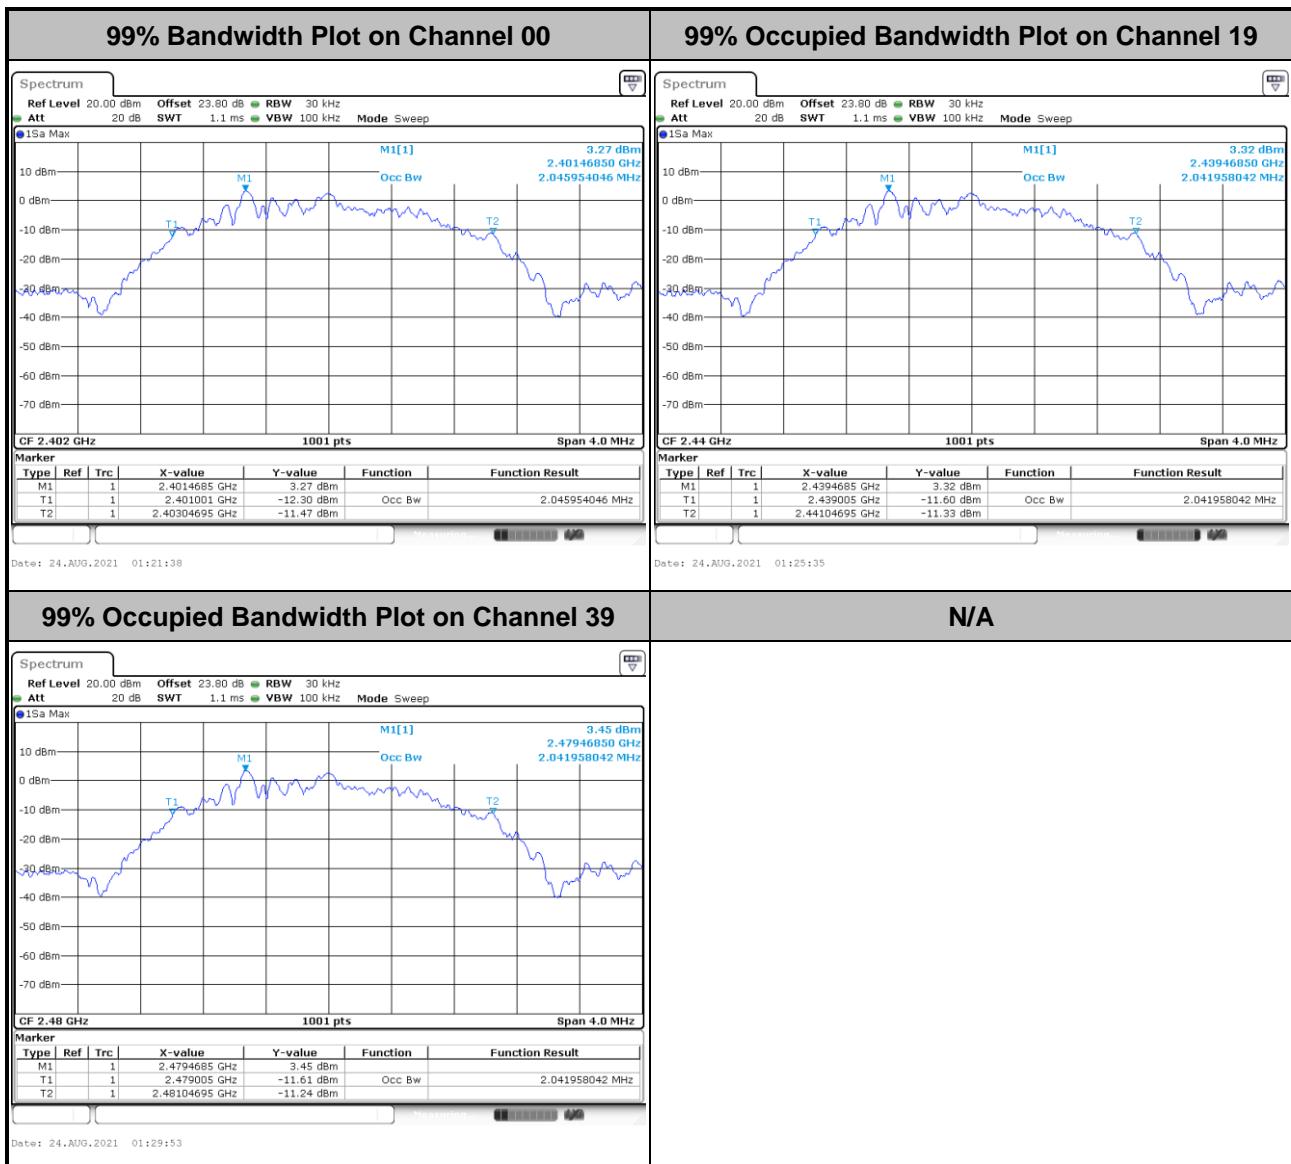

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


### 3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

### 3.2.3 Test Procedures

1. For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.3 PKPM1.
2. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
3. The RF output of EUT was connected to the power meter by RF cable and attenuator.
4. The path loss was compensated to the results for each measurement.
5. Set the maximum power setting and enable the EUT to transmit continuously.
6. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

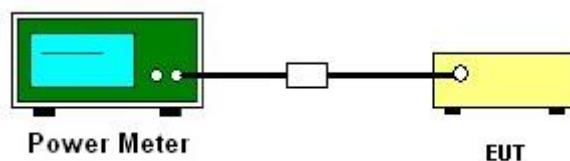

### 3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

### 3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

#### 3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

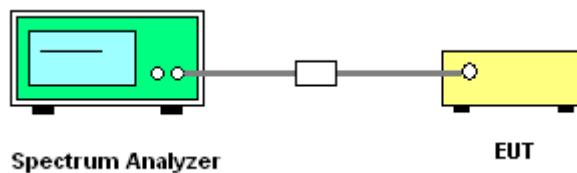


#### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.




### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)

<1Mbps>

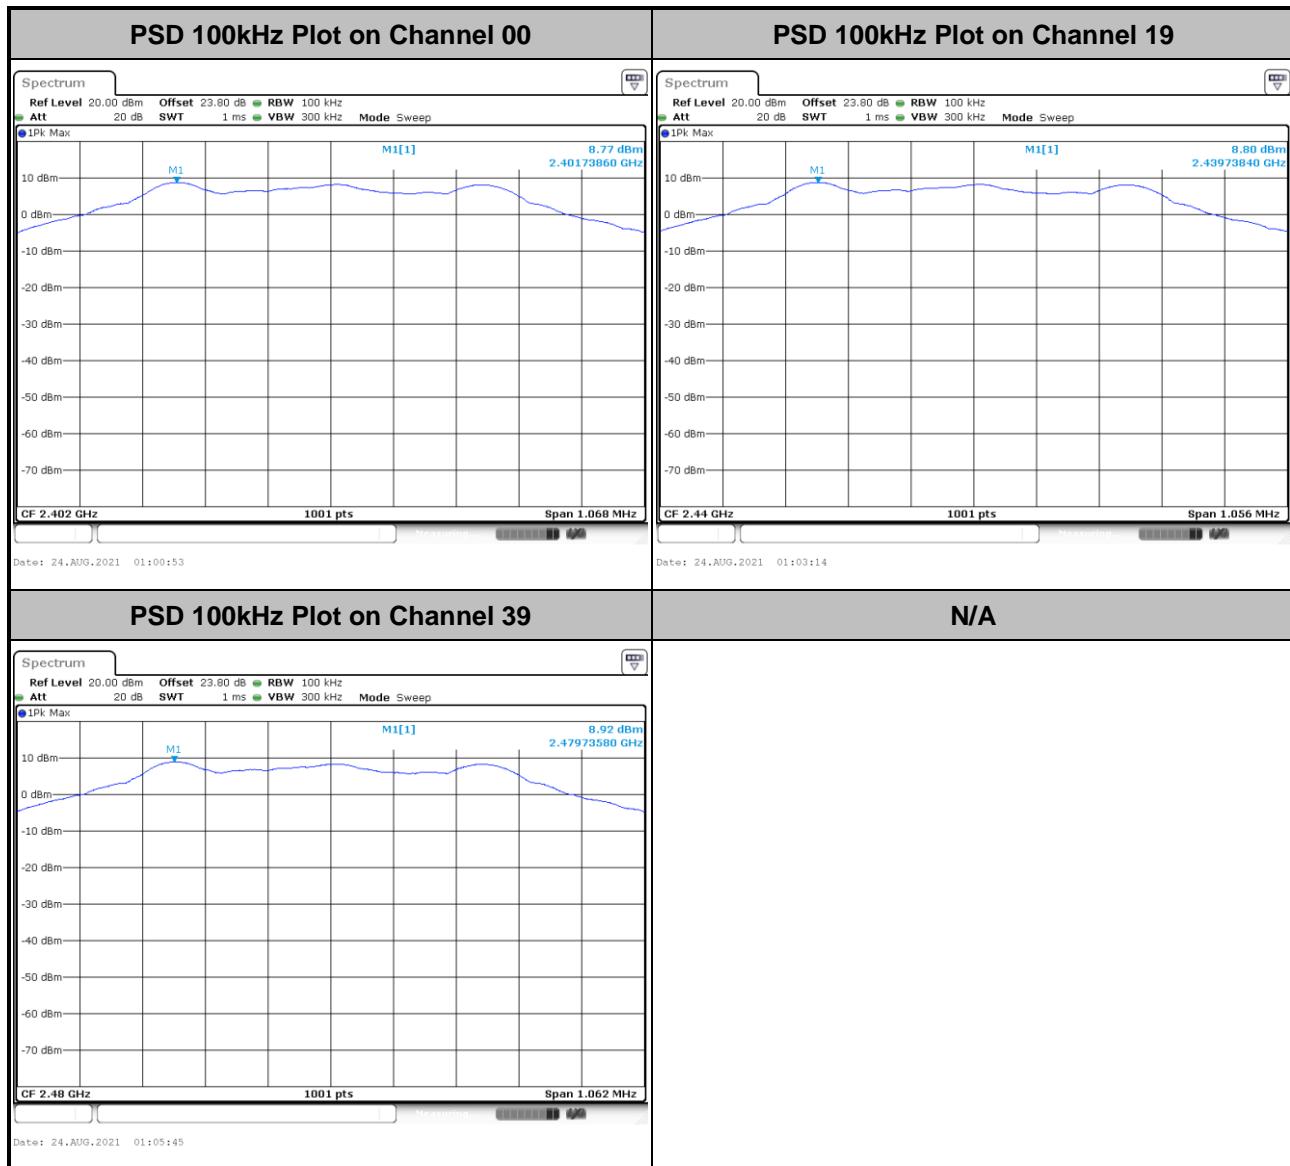




&lt;2Mbps&gt;

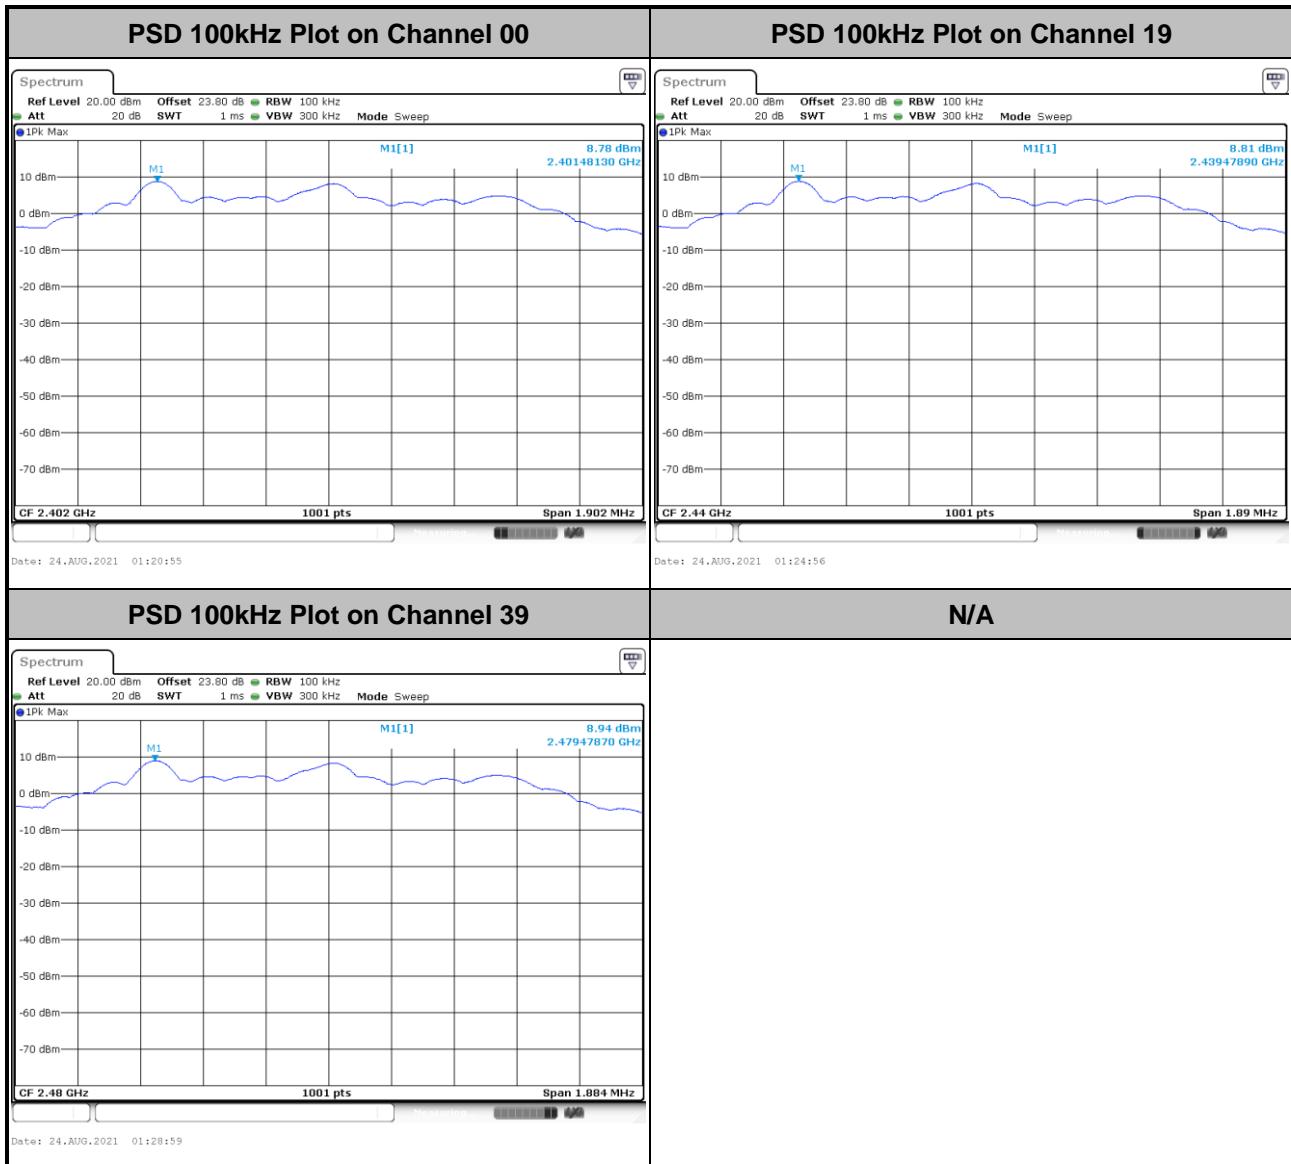




### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)

<1Mbps>

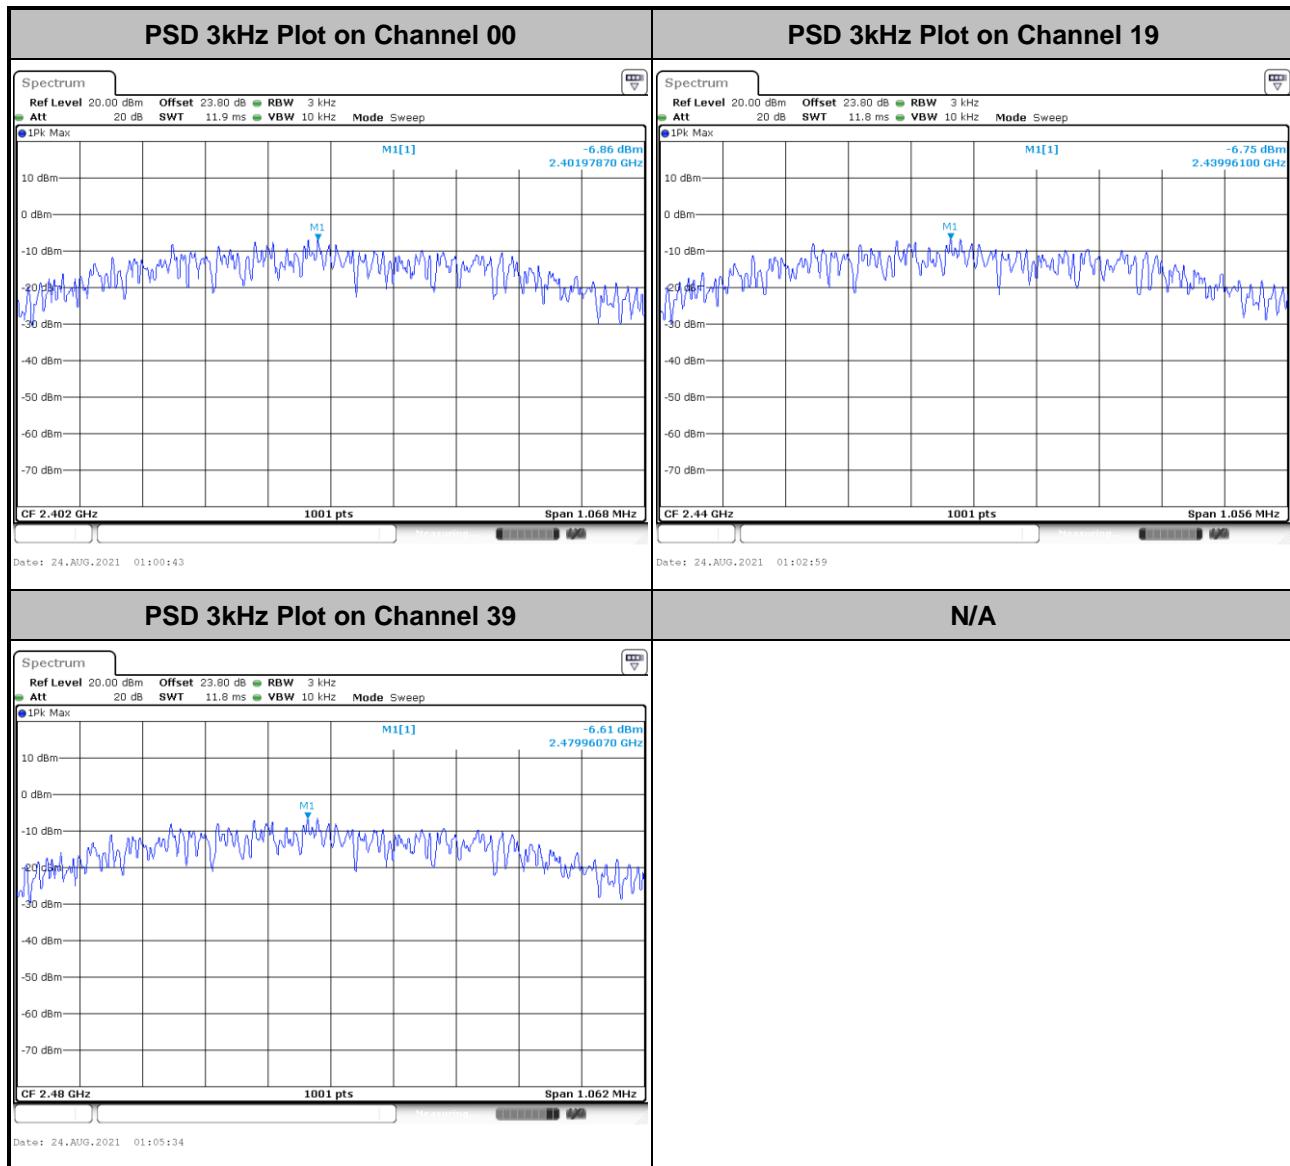



&lt;2Mbps&gt;

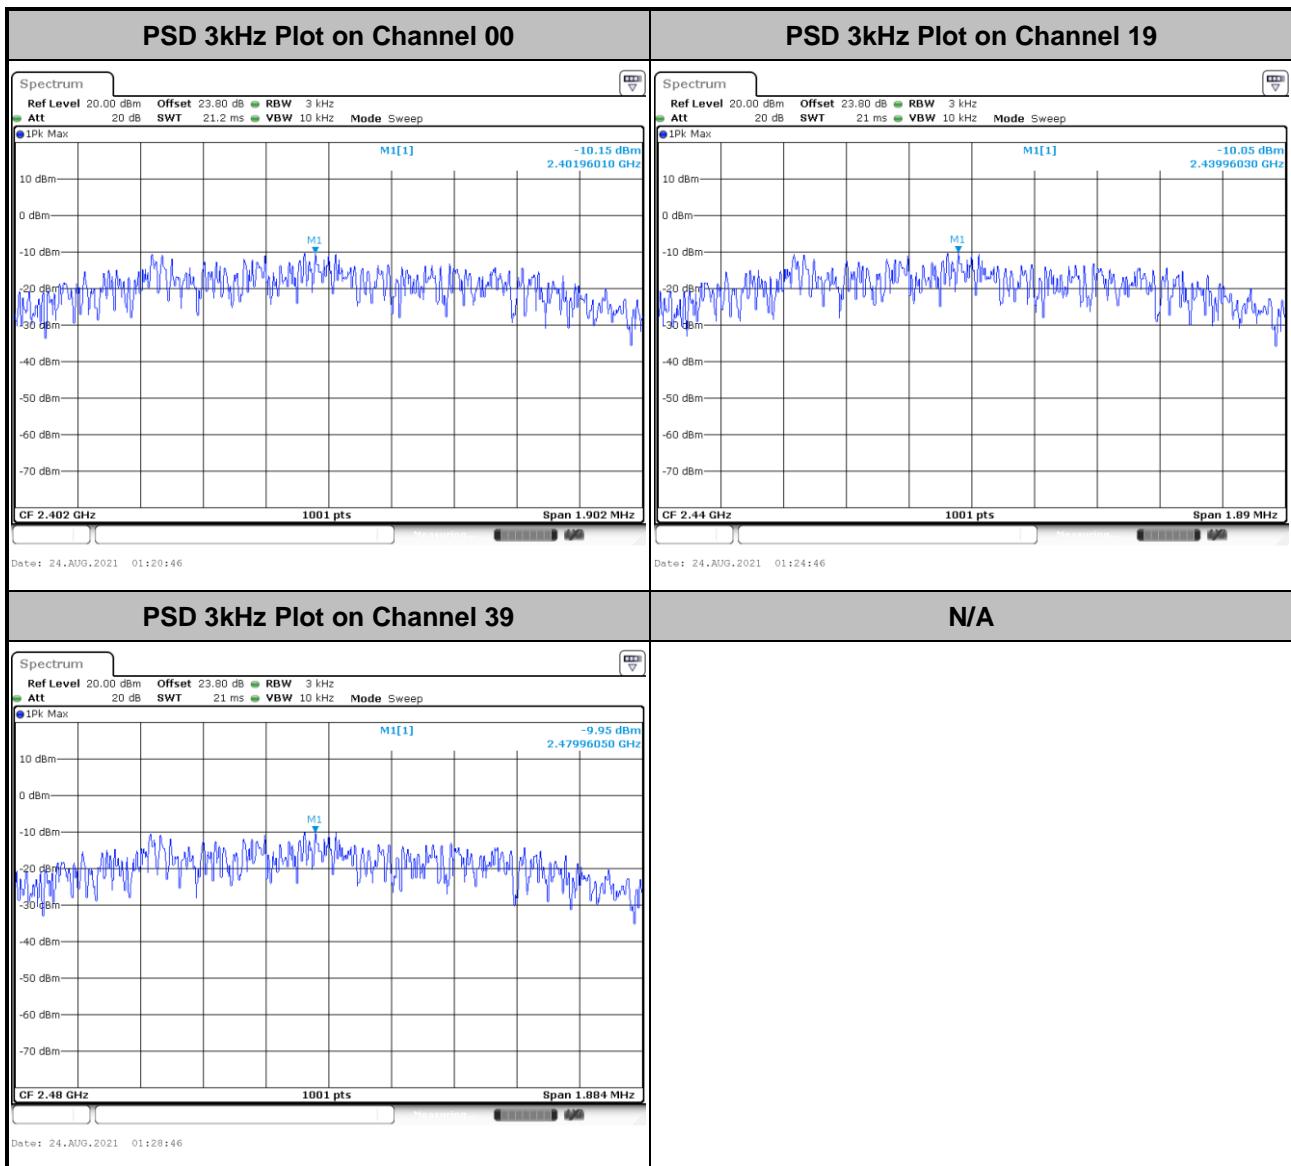



## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


### 3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

### 3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


### 3.4.4 Test Setup

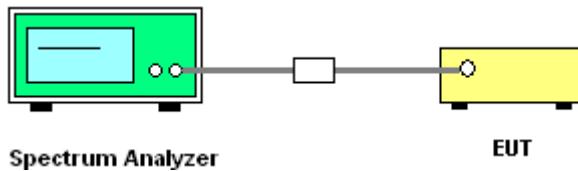




### 3.4.5 Test Result of Conducted Band Edges Plots

<1Mbps>

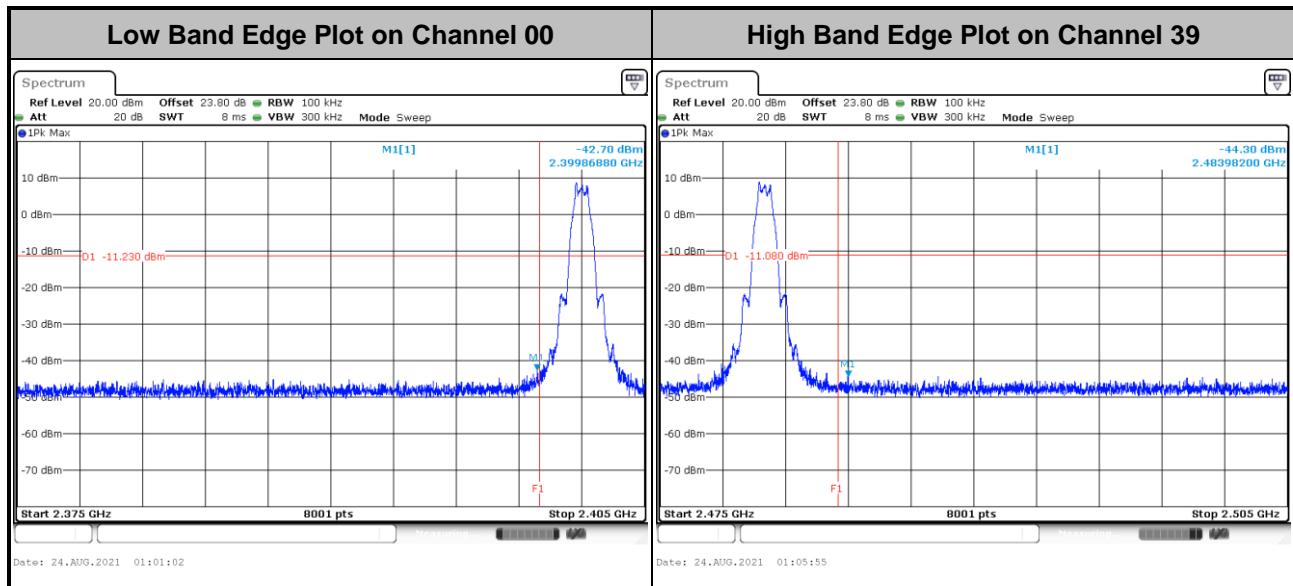


**<2Mbps>**

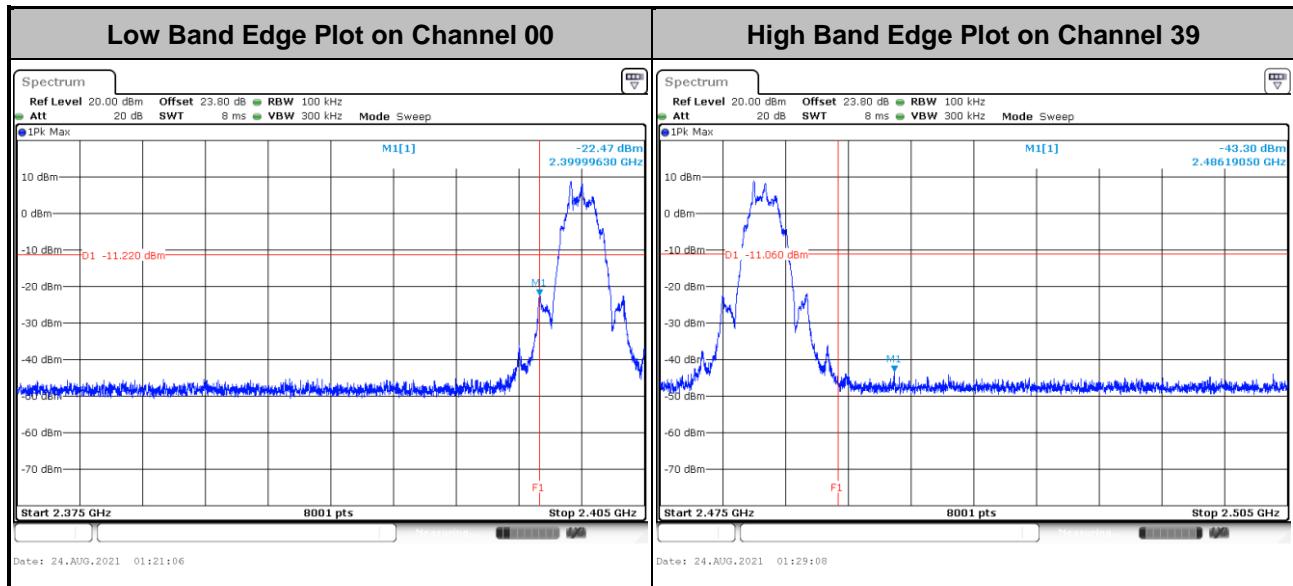




### 3.4.6 Test Result of Conducted Spurious Emission Plots


<1Mbps>

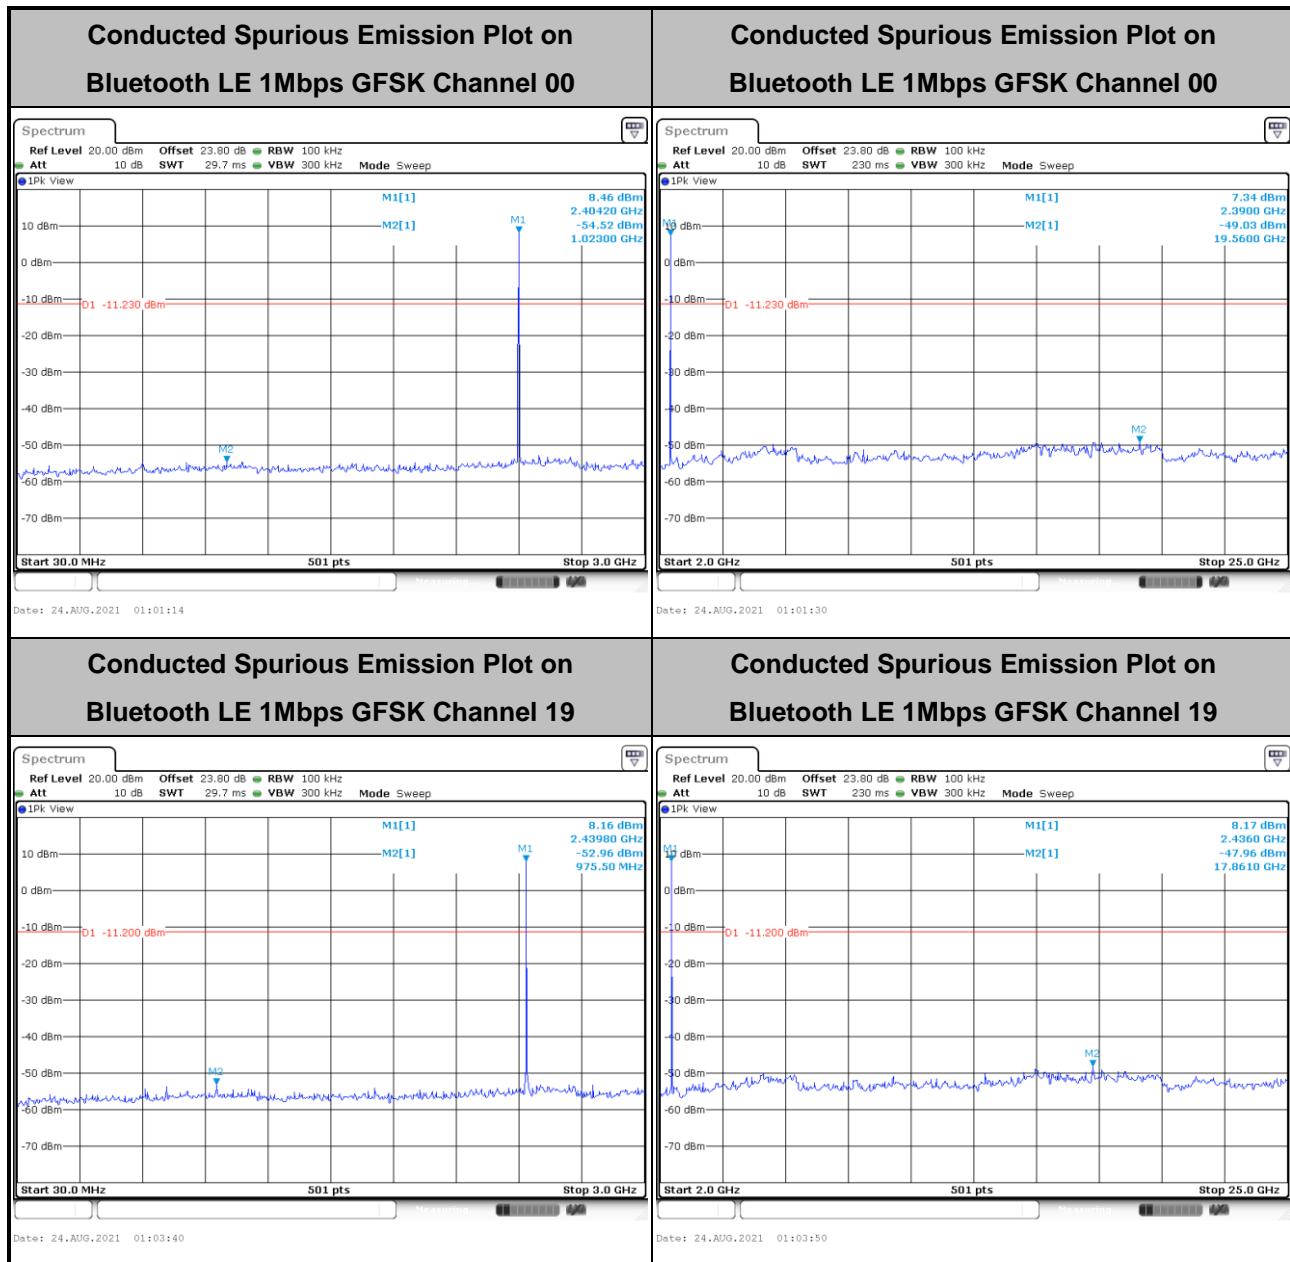


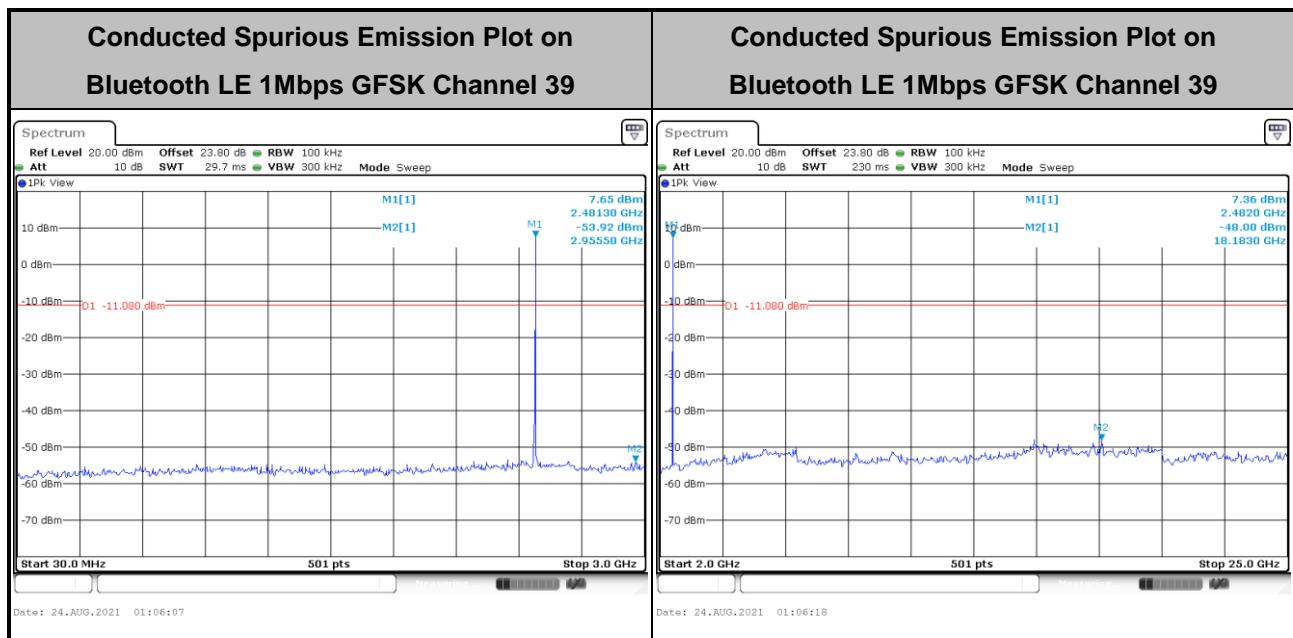



&lt;2Mbps&gt;

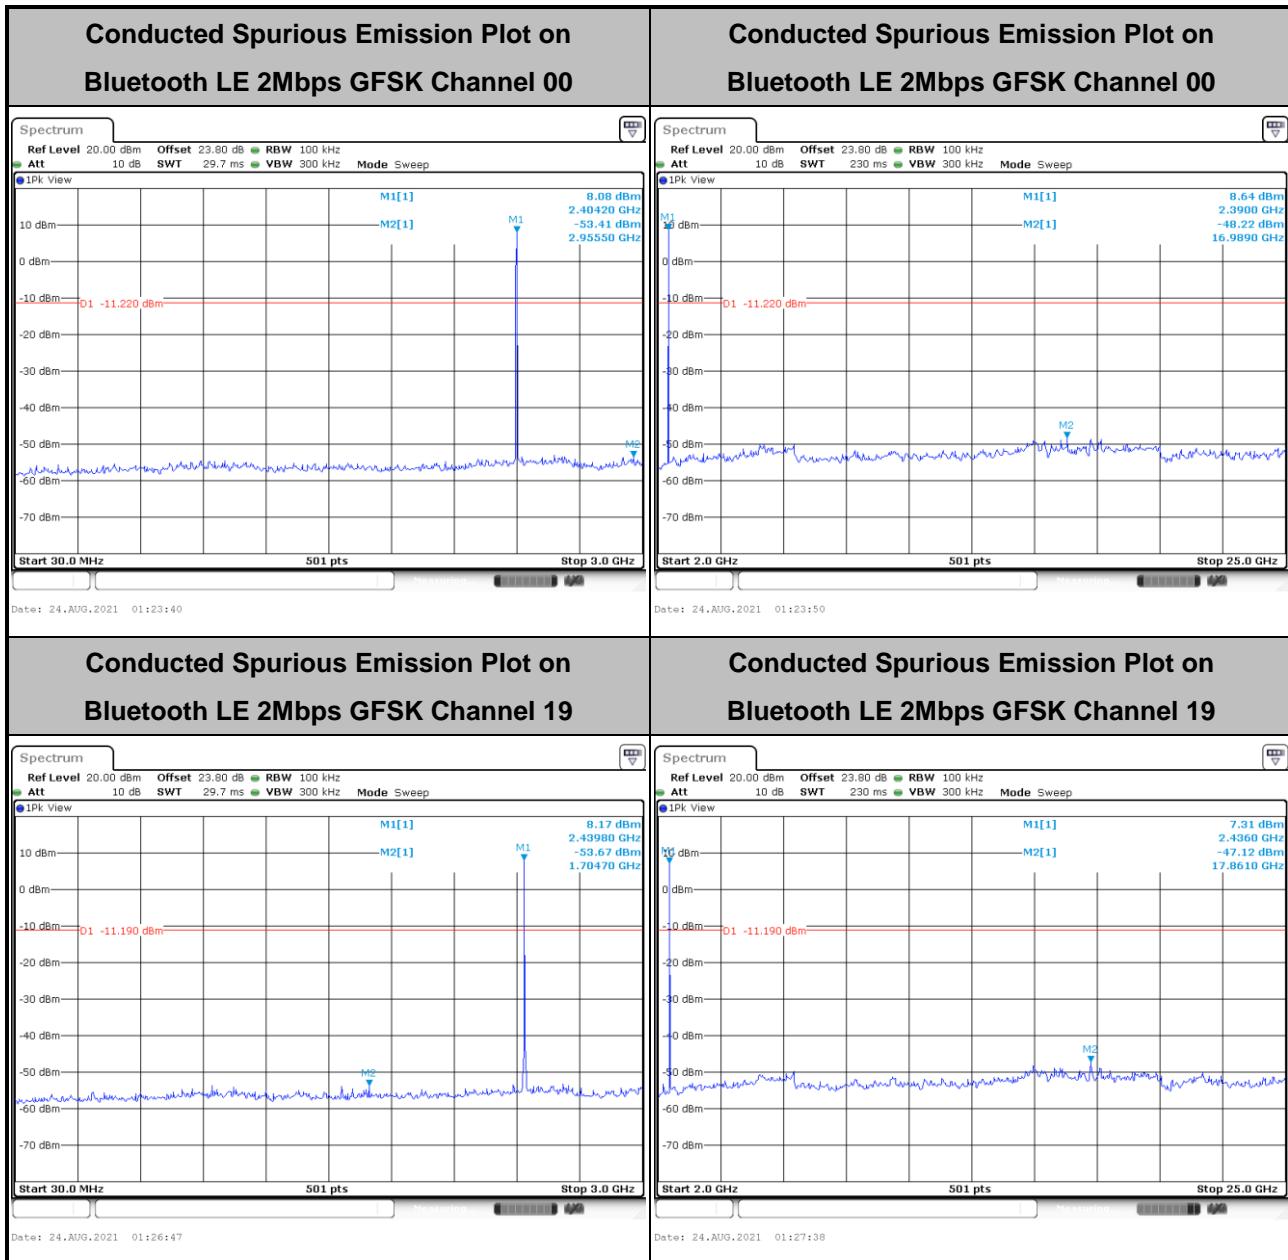

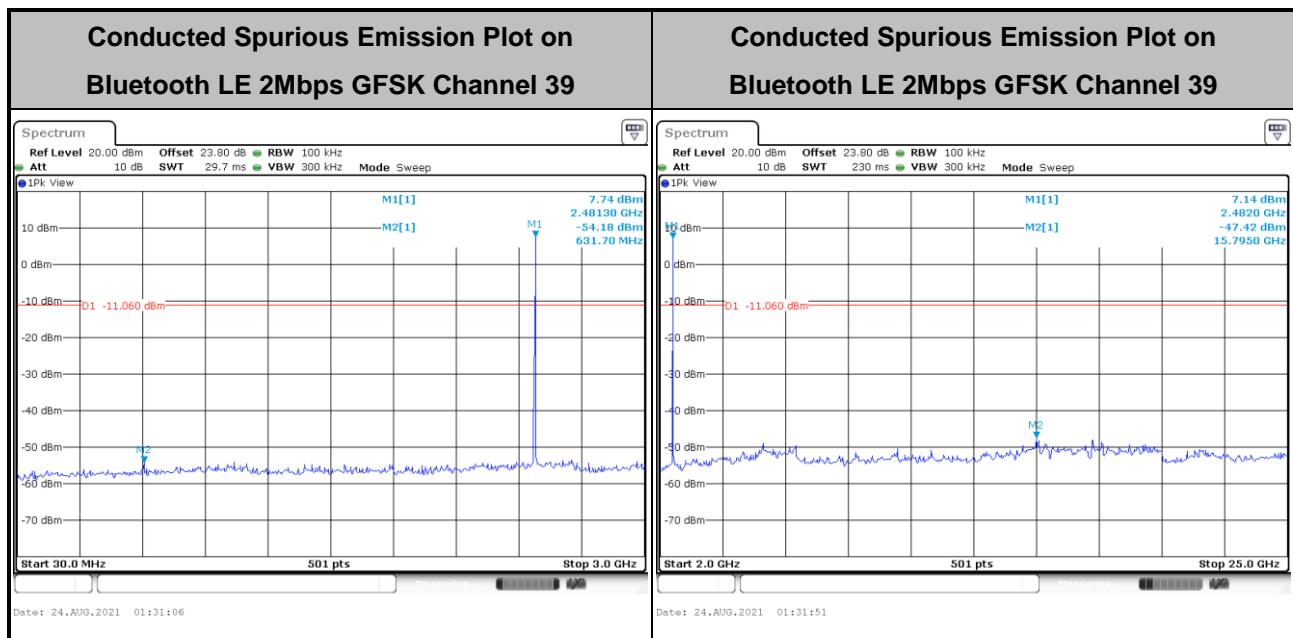



## 3.5 Radiated Band Edges and Spurious Emission Measurement

### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

### 3.5.2 Measuring Instruments

See list of measuring equipment of this test report.



### 3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW = 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW = 3 MHz for  $f \geq 1$  GHz for peak measurement.

For average measurement:


    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated test below 30MHz

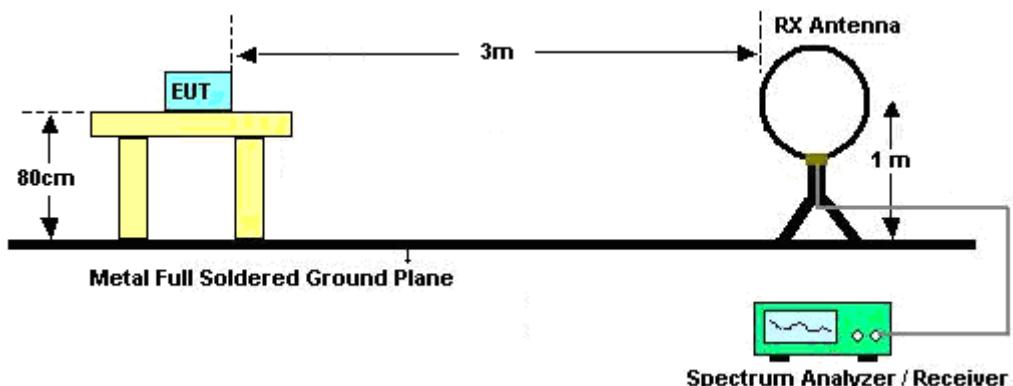


For radiated test from 30MHz to 1GHz

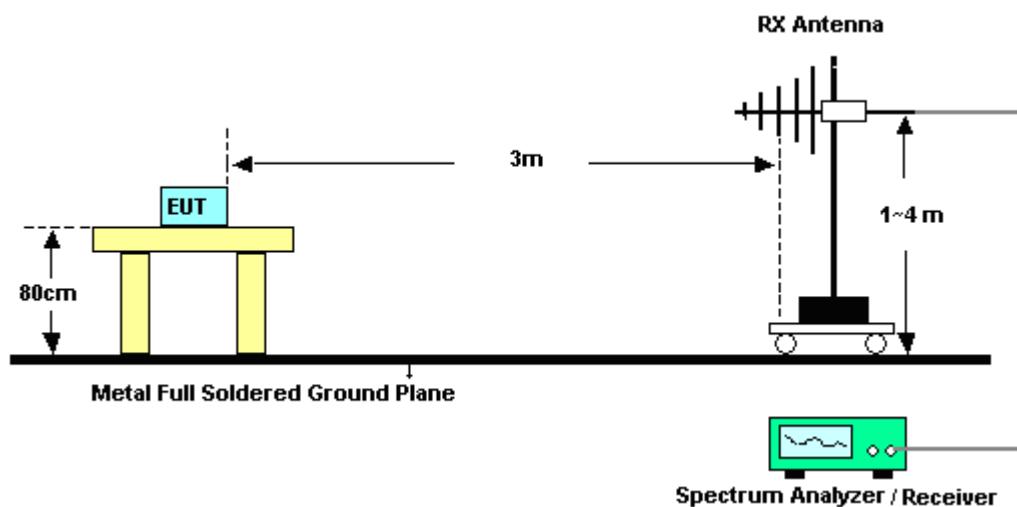

For radiated test from 1GHz to 18GHz

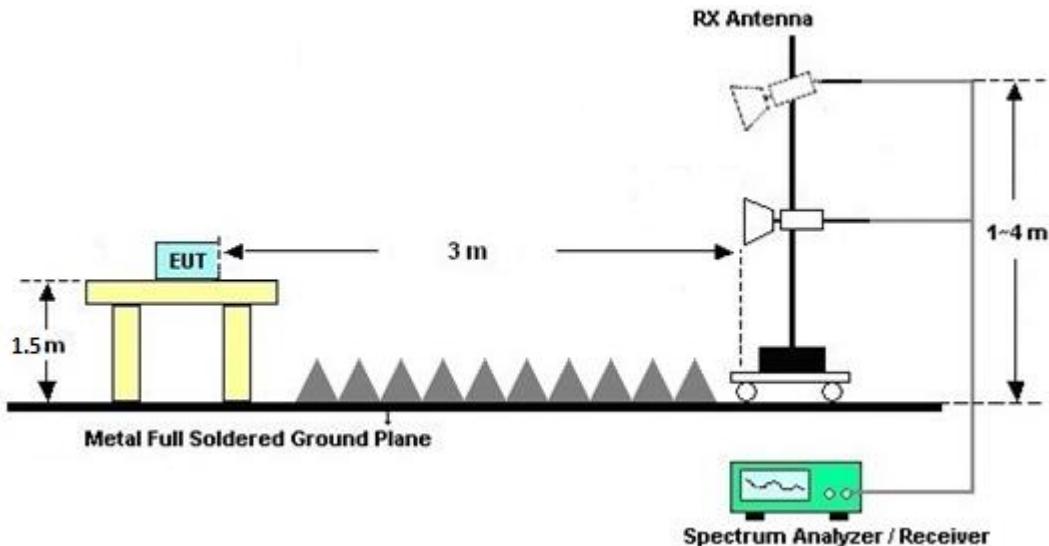

For radiated test above 18GHz

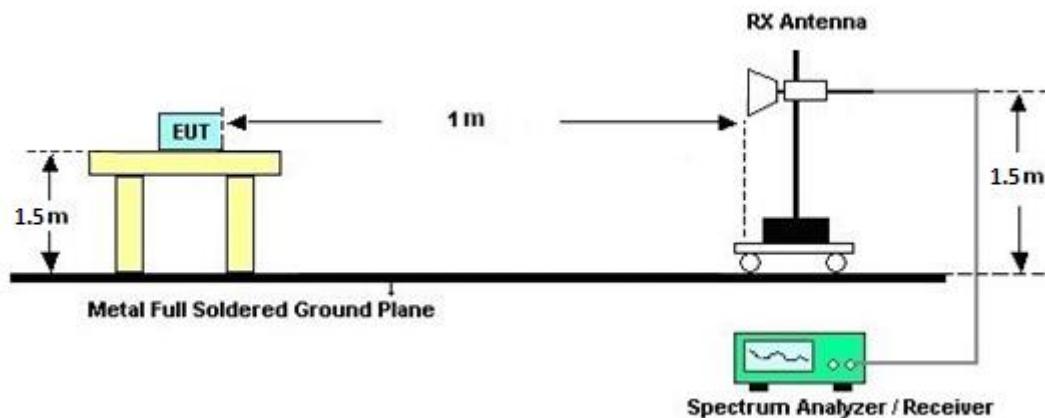

### 3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

### 3.5.7 Duty Cycle

Please refer to Appendix D.

### 3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



## 3.6 Antenna Requirements

### 3.6.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### 3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

### 3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	35419 & 03	30MHz~1GHz	Apr. 28, 2021	Aug. 24, 2021~Aug. 26, 2021	Apr. 27, 2022	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Dec. 01, 2020	Aug. 24, 2021~Aug. 26, 2021	Nov. 30, 2021	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 04, 2021	Aug. 24, 2021~Aug. 26, 2021	Jan. 03, 2022	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz~18GHz	Apr. 22, 2021	Aug. 24, 2021~Aug. 26, 2021	Apr. 21, 2022	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	May 18, 2021	Aug. 24, 2021~Aug. 26, 2021	May. 17, 2022	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~26.5GHz	Oct. 31, 2020	Aug. 24, 2021~Aug. 26, 2021	Oct. 30, 2021	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	0600789	18-40GHz	Jul. 23, 2021	Aug. 24, 2021~Aug. 26, 2021	Jul. 22, 2022	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9030A	MY52350276	3Hz~44GHz	Jul. 22, 2021	Aug. 24, 2021~Aug. 26, 2021	Jul. 21, 2022	Radiation (03CH07-HY)
Filter	Microwave	H1G013G1	SN477215	1GHz High Pass Filter	Oct. 31, 2020	Aug. 24, 2021~Aug. 26, 2021	Oct. 30, 2021	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY15682-4	30MHz to 18GHz	Feb. 24, 2021	Aug. 24, 2021~Aug. 26, 2021	Feb. 23, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24971-4	9kHz to 18GHz	Feb. 24, 2021	Aug. 24, 2021~Aug. 26, 2021	Feb. 23, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655-4	9kHz to 18GHz	Feb. 24, 2021	Aug. 24, 2021~Aug. 26, 2021	Feb. 23, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2,80 1606/2	18GHz~40GHz	Feb. 24, 2021	Aug. 24, 2021~Aug. 26, 2021	Feb. 23, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126	532078/126E	30MHz~18GHz	Sep. 18, 2020	Aug. 24, 2021~Aug. 26, 2021	Sep. 17, 2021	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801606/2	9KHz ~ 40GHz	Apr. 03, 2021	Aug. 24, 2021~Aug. 26, 2021	Apr. 02, 2022	Radiation (03CH07-HY)
Controller	EMEC	EM1000	N/A	Control Ant Mast	Apr. 28, 2021	Aug. 24, 2021~Aug. 26, 2021	Apr. 27, 2022	Radiation (03CH07-HY)
Controller	MF	MF-7802	N/A	Control Turn table	N/A	Aug. 24, 2021~Aug. 26, 2021	N/A	Radiation (03CH07-HY)
Antenna Mast	EMEC	AM-BS-4500E	N/A	Boresight mast 1M~4M	Apr. 28, 2021	Aug. 24, 2021~Aug. 26, 2021	Apr. 27, 2022	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Aug. 24, 2021~Aug. 26, 2021	N/A	Radiation (03CH07-HY)
Software	Audix	E3 6.2009-8-24	N/A	N/A	N/A	Aug. 24, 2021~Aug. 26, 2021	N/A	Radiation (03CH07-HY)
USB Data Logger	TECPTEL	TR-32	HE17XB2495	N/A	Mar. 09, 2021	Aug. 24, 2021~Aug. 26, 2021	Mar. 08, 2022	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA917025 1	18GHz~40GHz	Dec. 02, 2020	Aug. 24, 2021~Aug. 26, 2021	Dec. 01, 2021	Radiation (03CH07-HY)
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 01, 2021	Aug. 12, 2021~Aug. 24, 2021	Feb. 28, 2022	Conducted (TH02-HY)
Power Sensor	DARE	RPR3006W	16I00054SNO 12	10MHz~6GHz	Dec. 16, 2020	Aug. 12, 2021~Aug. 24, 2021	Dec. 15, 2021	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	1036004	N/A	Aug. 01, 2021	Aug. 12, 2021~Aug. 24, 2021	Jul. 31, 2022	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Aug. 01, 2021	Aug. 12, 2021~Aug. 24, 2021	Jul. 31, 2022	Conducted (TH02-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101565	10Hz ~ 40GHz	Nov. 13, 2020	Aug. 12, 2021~Aug. 24, 2021	Nov. 12, 2021	Conducted (TH02-HY)
Switch Box & RF Cable	EM Electronics	EMSW18SE	SW200302	N/A	Mar. 17, 2021	Aug. 12, 2021~Aug. 24, 2021	Mar. 16, 2022	Conducted (TH02-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

<b>Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))</b>	4.9 dB
--	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

<b>Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))</b>	6.1 dB
--	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

<b>Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))</b>	4.7 dB
--	--------

## Appendix A. Test Result of Conducted Test Items

Test Engineer:	Junyu Jhou				Temperature:	24.4~24.9		°C
Test Date:	2021/8/12~2021/8/24				Relative Humidity:	47.1~49.6		%

<b><u>TEST RESULTS DATA</u></b> <b><u>6dB and 99% Occupied Bandwidth</u></b>								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.035	0.712	0.50	Pass
BLE	1Mbps	1	19	2440	1.033	0.704	0.50	Pass
BLE	1Mbps	1	39	2480	1.033	0.708	0.50	Pass

<b><u>TEST RESULTS DATA</u></b> <b><u>Peak Power Table</u></b>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	8.76	30.00	-2.10	6.66	36.00	Pass
BLE	1Mbps	1	19	2440	8.87	30.00	-2.10	6.77	36.00	Pass
BLE	1Mbps	1	39	2480	9.07	30.00	-2.10	6.97	36.00	Pass

<b><u>TEST RESULTS DATA</u></b> <b><u>Average Power Table</u></b>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	8.60	30.00	-2.10	6.50	36.00	Pass
BLE	1Mbps	1	19	2440	8.80	30.00	-2.10	6.70	36.00	Pass
BLE	1Mbps	1	39	2480	9.00	30.00	-2.10	6.90	36.00	Pass

<b><u>TEST RESULTS DATA</u></b> <b><u>Peak Power Density</u></b>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail	
BLE	1Mbps	1	0	2402	8.77	-6.86	-2.10	8.00	Pass	
BLE	1Mbps	1	19	2440	8.80	-6.75	-2.10	8.00	Pass	
BLE	1Mbps	1	39	2480	8.92	-6.61	-2.10	8.00	Pass	

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.046	1.268	0.50	Pass
BLE	2Mbps	1	19	2440	2.042	1.260	0.50	Pass
BLE	2Mbps	1	39	2480	2.042	1.256	0.50	Pass

**TEST RESULTS DATA**  
**Peak Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	8.75	30.00	-2.10	6.65	36.00	Pass
BLE	2Mbps	1	19	2440	8.88	30.00	-2.10	6.78	36.00	Pass
BLE	2Mbps	1	39	2480	8.95	30.00	-2.10	6.85	36.00	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	8.60	30.00	-2.10	6.50	36.00	Pass
BLE	2Mbps	1	19	2440	8.80	30.00	-2.10	6.70	36.00	Pass
BLE	2Mbps	1	39	2480	8.90	30.00	-2.10	6.80	36.00	Pass

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	8.78	-10.15	-2.10	8.00	Pass
BLE	2Mbps	1	19	2440	8.81	-10.05	-2.10	8.00	Pass
BLE	2Mbps	1	39	2480	8.94	-9.95	-2.10	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.



## Appendix B. Radiated Spurious Emission

Test Engineer :	Jesse Wang and Stan Hsieh	Temperature :	23.5~25.1°C
		Relative Humidity :	51.3~55.5%

<Sample 1 with Battery 1>

<1Mbps>

**2.4GHz 2400~2483.5MHz**

**BLE (Band Edge @ 3m)**

BLE	Note	Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol.
BLE CH 00 2402MHz		2366.7	54.55	-19.45	74	40.12	31.83	18.01	35.41	135	80	P	H
		2387.805	45.53	-8.47	54	30.94	31.9	18.1	35.41	135	80	A	H
	*	2402	105.35	-	-	90.72	31.9	18.15	35.42	135	80	P	H
	*	2402	104.59	-	-	89.96	31.9	18.15	35.42	135	80	A	H
													H
		2383.92	54.59	-19.41	74	40.04	31.87	18.09	35.41	400	179	P	V
		2377.62	45.25	-8.75	54	30.73	31.87	18.06	35.41	400	179	A	V
	*	2402	100.08	-	-	85.45	31.9	18.15	35.42	400	179	P	V
	*	2402	99.33	-	-	84.7	31.9	18.15	35.42	400	179	A	V
													V
BLE CH 19 2440MHz		2348.36	54.18	-19.82	74	39.84	31.8	17.94	35.4	100	78	P	H
		2339.26	45.38	-8.62	54	31.08	31.8	17.9	35.4	100	78	A	H
	*	2440	105.03	-	-	90.07	32.2	18.19	35.43	100	78	P	H
	*	2440	104.55	-	-	89.59	32.2	18.19	35.43	100	78	A	H
		2489.43	55.68	-18.32	74	40.29	32.6	18.24	35.45	100	78	P	H
		2495.94	46.24	-7.76	54	30.86	32.6	18.24	35.46	100	78	A	H
		2384.06	54.54	-19.46	74	39.99	31.87	18.09	35.41	398	182	P	V
		2365.3	45.23	-8.77	54	30.81	31.83	18	35.41	398	182	A	V
	*	2440	100.52	-	-	85.56	32.2	18.19	35.43	398	182	P	V
	*	2440	100.02	-	-	85.06	32.2	18.19	35.43	398	182	A	V
		2483.55	55.04	-18.96	74	39.79	32.47	18.23	35.45	398	182	P	V
		2495.24	46.22	-7.78	54	30.84	32.6	18.24	35.46	398	182	A	V



BLE CH 39 2480MHz	*	2480	105.03	-	-	89.78	32.47	18.23	35.45	116	79	P	H	
	*	2480	104.53	-	-	89.28	32.47	18.23	35.45	116	79	A	H	
		2483.52	59.54	-14.46	74	44.29	32.47	18.23	35.45	116	79	P	H	
		2483.52	46.91	-7.09	54	31.66	32.47	18.23	35.45	116	79	A	H	
													H	
													H	
	*	2480	99.65	-	-	84.4	32.47	18.23	35.45	373	178	P	V	
	*	2480	99.1	-	-	83.85	32.47	18.23	35.45	373	178	A	V	
		2483.76	55.35	-18.65	74	40.1	32.47	18.23	35.45	373	178	P	V	
		2495.4	46.37	-7.63	54	30.99	32.6	18.24	35.46	373	178	A	V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



## 2.4GHz 2400~2483.5MHz

## BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	41.09	-32.91	74	52.75	34	12.33	57.99	-	-	P	H
		4980	44.66	-29.34	74	55.72	34.2	12.52	57.78	-	-	P	H
													H
													H
		4804	41.21	-32.79	74	52.87	34	12.33	57.99	-	-	P	V
		4980	52.67	-21.33	74	63.73	34.2	12.52	57.78	100	158	P	V
		4980	41.62	-12.38	54	52.68	34.2	12.52	57.78	100	158	A	V
													V
BLE CH 19 2440MHz		4880	42.89	-31.11	74	54.28	34.1	12.41	57.9	-	-	P	H
		4980	44.24	-29.76	74	55.3	34.2	12.52	57.78	-	-	P	H
		7320	41.89	-32.11	74	49.51	35.6	14.7	57.92	-	-	P	H
													H
		4880	41.92	-32.08	74	53.31	34.1	12.41	57.9	-	-	P	V
		4980	53.73	-20.27	74	64.79	34.2	12.52	57.78	100	158	P	V
		4980	42.44	-11.56	54	53.5	34.2	12.52	57.78	100	158	A	V
		7320	41.89	-32.11	74	49.51	35.6	14.7	57.92	-	-	P	V
BLE CH 39 2480MHz		4960	41.37	-32.63	74	52.48	34.2	12.5	57.81	-	-	P	H
		4980	44.15	-29.85	74	55.21	34.2	12.52	57.78	-	-	P	H
		7440	41.5	-32.5	74	49.04	35.6	14.9	58.04	-	-	P	H
													H
		4960	41.48	-32.52	74	52.59	34.2	12.5	57.81	-	-	P	V
		4980	53.87	-20.13	74	64.93	34.2	12.52	57.78	100	158	P	V
		4980	42.24	-11.76	54	53.3	34.2	12.52	57.78	100	158	A	V
		7440	41.82	-32.18	74	49.36	35.6	14.9	58.04	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



## Emission above 18GHz

## 2.4GHz BLE (SHF)



## Emission below 1GHz

## 2.4GHz BLE (LF)

BLE	Note	Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
2.4GHz BLE LF		30	23.53	-16.47	40	28.09	24.57	0.9	30.03	-	-	P	H
		48.36	16.96	-23.04	40	30.77	14.95	1.25	30.01	-	-	P	H
		106.95	19.32	-24.18	43.5	30.97	16.57	1.77	29.99	-	-	P	H
		796.3	30.45	-15.55	46	27.85	27.81	4.39	29.6	-	-	P	H
		862.1	31.57	-14.43	46	27.25	28.87	4.62	29.17	-	-	P	H
		950.3	32.77	-13.23	46	26.28	30.33	4.87	28.71	-	-	P	H
													H
													H
													H
													H
													H
													H
													V
													V
Remark	1.	No other spurious found.											
	2.	All results are PASS against limit line.											
	3.	The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.											



&lt;2Mbps&gt;

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		2381.295	53.7	-20.3	74	39.16	31.87	18.08	35.41	356	126	P	H
		2389.065	47.05	-6.95	54	32.45	31.9	18.11	35.41	356	126	A	H
	*	2402	106.1	-	-	91.47	31.9	18.15	35.42	356	126	P	H
	*	2402	104.78	-	-	90.15	31.9	18.15	35.42	356	126	A	H
													H
													H
		2388.015	53.93	-20.07	74	39.34	31.9	18.1	35.41	310	20	P	V
		2382.66	46.76	-7.24	54	32.22	31.87	18.08	35.41	310	20	A	V
	*	2402	100.47	-	-	85.84	31.9	18.15	35.42	310	20	P	V
	*	2402	99.11	-	-	84.48	31.9	18.15	35.42	310	20	A	V
													V
													V
BLE CH 19 2440MHz		2384.76	53.95	-20.05	74	39.4	31.87	18.09	35.41	342	125	P	H
		2382.24	46.67	-7.33	54	32.13	31.87	18.08	35.41	342	125	A	H
	*	2440	106.1	-	-	91.14	32.2	18.19	35.43	342	125	P	H
	*	2440	104.88	-	-	89.92	32.2	18.19	35.43	342	125	A	H
		2487.89	55.31	-18.69	74	39.93	32.6	18.23	35.45	342	125	P	H
		2499.79	48.21	-5.79	54	32.82	32.6	18.25	35.46	342	125	A	H
		2377.2	55.33	-18.67	74	40.81	31.87	18.06	35.41	271	41	P	V
		2385.32	46.93	-7.07	54	32.38	31.87	18.09	35.41	271	41	A	V
	*	2440	100.47	-	-	85.51	32.2	18.19	35.43	271	41	P	V
	*	2440	99.2	-	-	84.24	32.2	18.19	35.43	271	41	A	V
		2494.26	54.71	-19.29	74	39.33	32.6	18.24	35.46	271	41	P	V
		2498.81	47.69	-6.31	54	32.3	32.6	18.25	35.46	271	41	A	V



BLE CH 39 2480MHz	*	2480	105.53	-	-	90.28	32.47	18.23	35.45	332	126	P	H
	*	2480	104.12	-	-	88.87	32.47	18.23	35.45	332	126	A	H
		2483.6	60.64	-13.36	74	45.39	32.47	18.23	35.45	332	126	P	H
		2483.52	53.01	-0.99	54	37.76	32.47	18.23	35.45	332	126	A	H
													H
													H
	*	2480	99.38	-	-	84.13	32.47	18.23	35.45	296	27	P	V
	*	2480	98.13	-	-	82.88	32.47	18.23	35.45	296	27	A	V
		2492.68	55.77	-18.23	74	40.39	32.6	18.24	35.46	296	27	P	V
		2483.52	48.47	-5.53	54	33.22	32.47	18.23	35.45	296	27	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## 2.4GHz 2400~2483.5MHz

## BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	41.02	-32.98	74	52.68	34	12.33	57.99	-	-	P	H
		4980	45.67	-28.33	74	56.73	34.2	12.52	57.78	-	-	P	H
													H
													H
		4804	42.86	-31.14	74	54.52	34	12.33	57.99	-	-	P	V
		4980	53.72	-20.28	74	64.78	34.2	12.52	57.78	100	158	P	V
		4980	45.12	-8.88	54	56.18	34.2	12.52	57.78	100	158	A	V
													V
BLE CH 19 2440MHz		4880	42.69	-31.31	74	54.08	34.1	12.41	57.9	-	-	P	H
		4980	46.15	-27.85	74	57.21	34.2	12.52	57.78	-	-	P	H
		7320	40.77	-33.23	74	48.39	35.6	14.7	57.92	-	-	P	H
													H
		4880	43.01	-30.99	74	54.4	34.1	12.41	57.9	-	-	P	V
		4980	54.07	-19.93	74	65.13	34.2	12.52	57.78	100	158	P	V
		4980	44.72	-9.28	54	55.78	34.2	12.52	57.78	100	158	A	V
		7320	41.31	-32.69	74	48.93	35.6	14.7	57.92	-	-	P	V
BLE CH 39 2480MHz		4960	42.28	-31.72	74	53.39	34.2	12.5	57.81	-	-	P	H
		4980	44.76	-29.24	74	55.82	34.2	12.52	57.78	-	-	P	H
		7440	40.88	-33.12	74	48.42	35.6	14.9	58.04	-	-	P	H
													H
		4960	41.83	-32.17	74	52.94	34.2	12.5	57.81	-	-	P	V
		4980	54.32	-19.68	74	65.38	34.2	12.52	57.78	100	158	P	V
		4980	44.99	-9.01	54	56.05	34.2	12.52	57.78	100	158	A	V
		7440	41.55	-32.45	74	49.09	35.6	14.9	58.04	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



## Emission above 18GHz

## 2.4GHz BLE (SHF)

BLE	Note	Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level (dB $\mu$ V)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
		24580	35.13	-38.87	74	47.34	39	6.79	58	-	-	P	V
2.4GHz BLE SHF													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
Remark	1.	No other spurious found.											
	2.	All results are PASS against limit line.											
	3.	The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.											



## Emission below 1GHz

## 2.4GHz BLE (LF)

BLE	Note	Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
2.4GHz BLE LF		30.54	22.62	-17.38	40	27.56	24.17	0.92	30.03	-	-	P	H
		50.79	16.79	-23.21	40	31.56	13.95	1.29	30.01	-	-	P	H
		118.56	17.1	-26.4	43.5	27.89	17.34	1.86	29.99	-	-	P	H
		830.6	30.61	-15.39	46	27.63	27.83	4.53	29.38	-	-	P	H
		891.5	32.32	-13.68	46	27.97	28.67	4.65	28.97	-	-	P	H
		957.3	33.36	-12.64	46	26.47	30.67	4.9	28.68	-	-	P	H
													H
													H
													H
													H
													H
													H
													V
													V
													V
													V
													V
													V
													V
	1. No other spurious found. 2. All results are PASS against limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



&lt;Sample 1 with Battery 2&gt;

&lt;2Mbps&gt;

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz	*	2480	102.8	-	-	87.55	32.47	18.23	35.45	331	138	P	H
	*	2480	101.57	-	-	86.32	32.47	18.23	35.45	331	138	A	H
		2483.6	56.39	-17.61	74	41.14	32.47	18.23	35.45	331	138	P	H
		2483.52	50.31	-3.69	54	35.06	32.47	18.23	35.45	331	138	A	H
													H
													H
	*	2480	99.97	-	-	84.72	32.47	18.23	35.45	399	173	P	V
	*	2480	98.49	-	-	83.24	32.47	18.23	35.45	399	173	A	V
		2483.88	55.74	-18.26	74	40.49	32.47	18.23	35.45	399	173	P	V
		2483.68	49.23	-4.77	54	33.98	32.47	18.23	35.45	399	173	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## 2.4GHz 2400~2483.5MHz

## BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4960	41.39	-32.61	74	52.5	34.2	12.5	57.81	-	-	P	H
		4980	45.7	-28.3	74	56.76	34.2	12.52	57.78	-	-	P	H
		7440	40.79	-33.21	74	48.33	35.6	14.9	58.04	-	-	P	H
													H
		4960	41.37	-32.63	74	52.48	34.2	12.5	57.81	-	-	P	V
		4980	54.62	-19.38	74	65.68	34.2	12.52	57.78	100	159	P	V
		4980	44	-10	54	55.06	34.2	12.52	57.78	100	159	A	V
		7440	42.29	-31.71	74	49.83	35.6	14.9	58.04	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



## Emission above 18GHz

## 2.4GHz BLE (SHF)

BLE	Note	Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
		24881	35.95	-38.05	74	47.73	38.91	6.94	57.63	-	-	P	V
2.4GHz BLE SHF													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
Remark	1.	No other spurious found.											
	2.	All results are PASS against limit line.											
	3.	The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.											



## Emission below 1GHz

## 2.4GHz BLE (LF)

BLE	Note	Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
2.4GHz BLE LF		30.54	22.57	-17.43	40	27.51	24.17	0.92	30.03	-	-	P	H
		39.72	18.5	-21.5	40	27.85	19.53	1.14	30.02	-	-	P	H
		106.95	17.33	-26.17	43.5	28.98	16.57	1.77	29.99	-	-	P	H
		769.7	30.47	-15.53	46	28.06	27.75	4.31	29.65	-	-	P	H
		869.8	32.46	-13.54	46	28.19	28.76	4.63	29.12	-	-	P	H
		947.5	33.66	-12.34	46	27.42	30.1	4.86	28.72	-	-	P	H
													H
													H
													H
													H
													H
													H
													V
													V
Remark	1.	No other spurious found.											
	2.	All results are PASS against limit line.											
	3.	The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.											

**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak or Average</b>
H/V	<b>Horizontal or Vertical</b>



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
<b>BLE CH 00 2402MHz</b>		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dB $\mu$ V/m) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dB $\mu$ V) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dB $\mu$ V/m) - Limit Line(dB $\mu$ V/m)

**For Peak Limit @ 2390MHz:**

1. Level(dB $\mu$ V/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dB $\mu$ V) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dB $\mu$ V) - 35.86 (dB)  
= 55.45 (dB $\mu$ V/m)
2. Over Limit(dB)  
= Level(dB $\mu$ V/m) - Limit Line(dB $\mu$ V/m)  
= 55.45(dB $\mu$ V/m) - 74(dB $\mu$ V/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dB $\mu$ V/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dB $\mu$ V) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dB $\mu$ V) - 35.86 (dB)  
= 43.54 (dB $\mu$ V/m)
2. Over Limit(dB)  
= Level(dB $\mu$ V/m) - Limit Line(dB $\mu$ V/m)  
= 43.54(dB $\mu$ V/m) - 54(dB $\mu$ V/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is "PASS".



## Appendix C. Radiated Spurious Emission Plots

<b>Test Engineer :</b>	Jesse Wang and Stan Hsieh	<b>Temperature :</b>	23.5~25.1°C
		<b>Relative Humidity :</b>	51.3~55.5%

### Note symbol

-L	Low channel location
-R	High channel location





<Sample 1 with Battery 1>


<1Mbps>

2.4GHz 2400~2483.5MHz



BLE (Band Edge @ 3m)

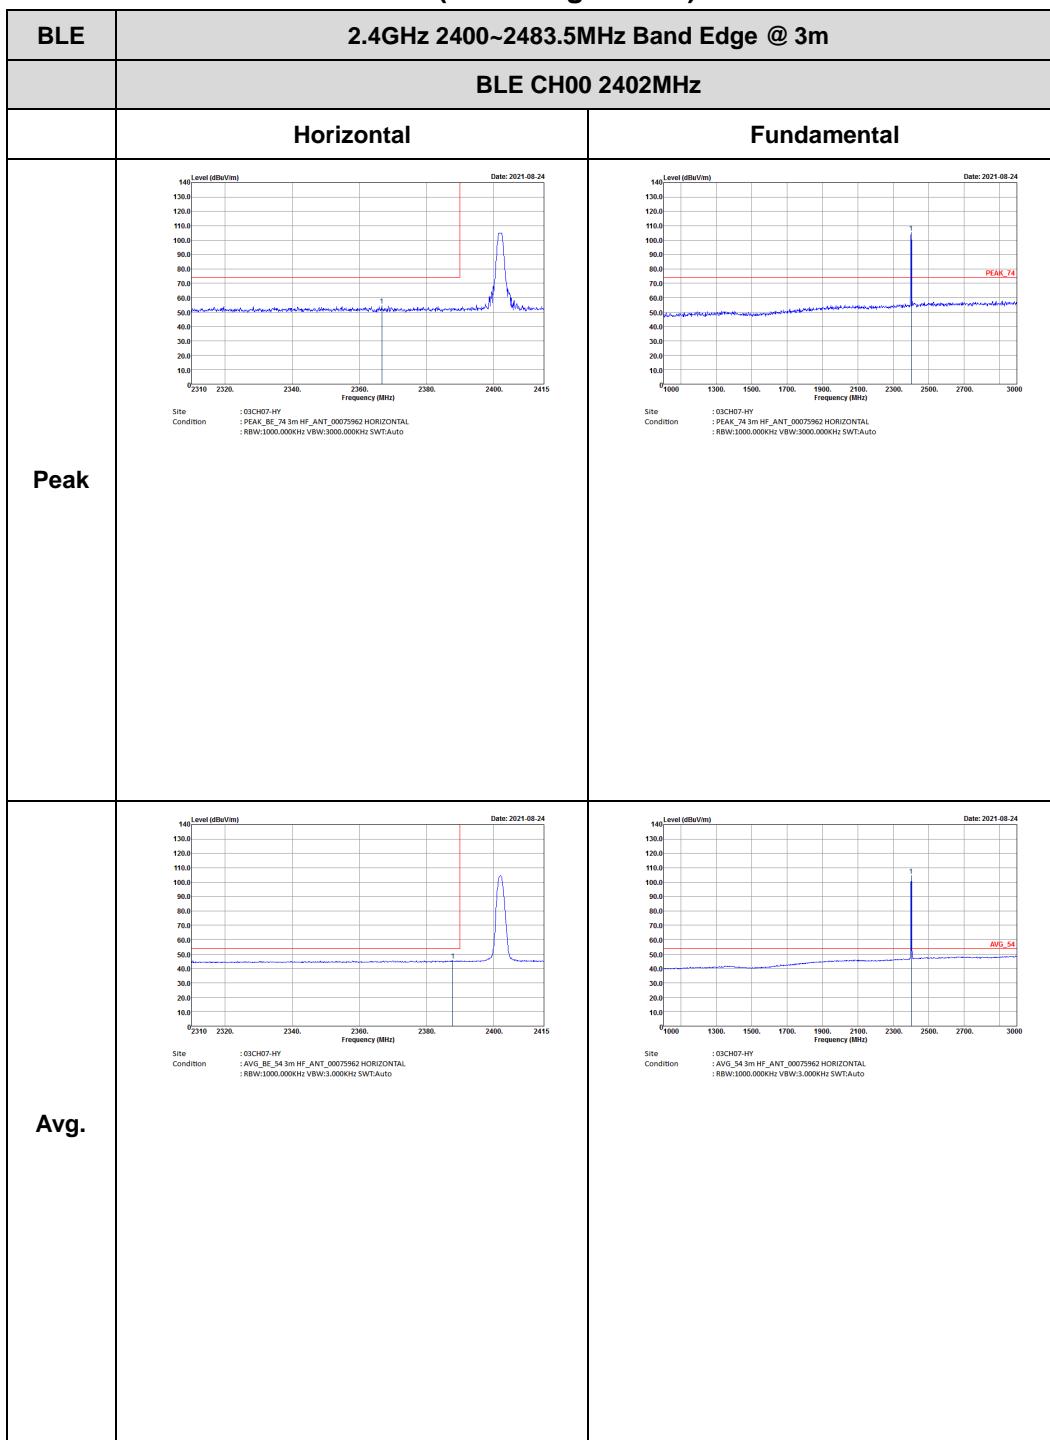


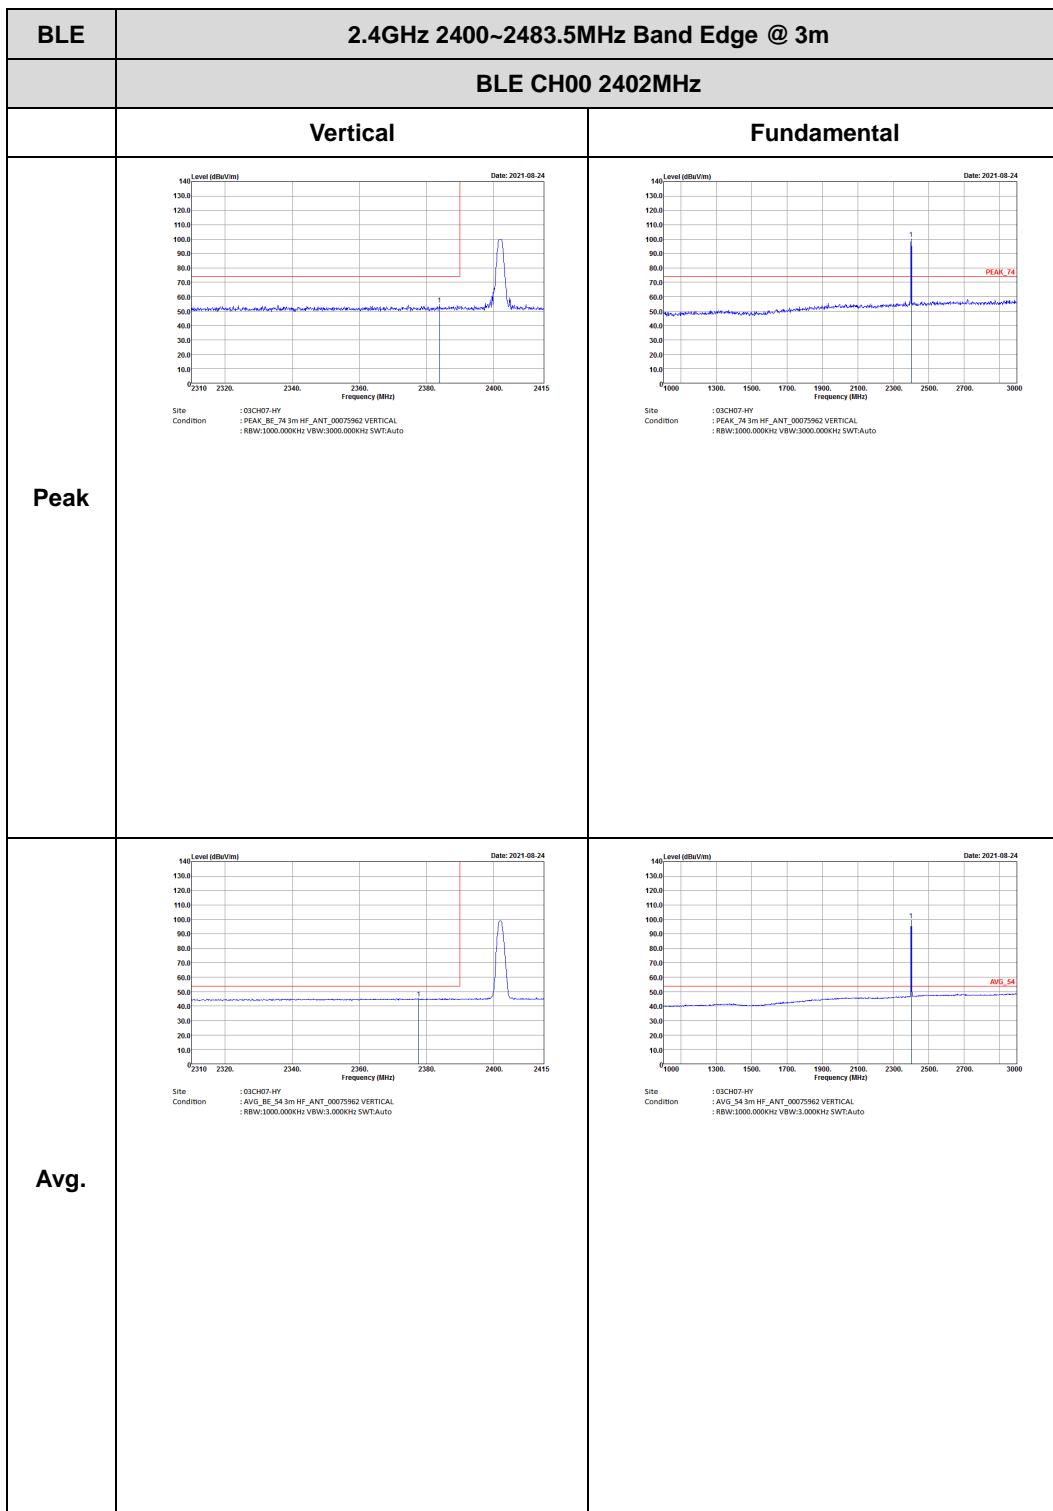


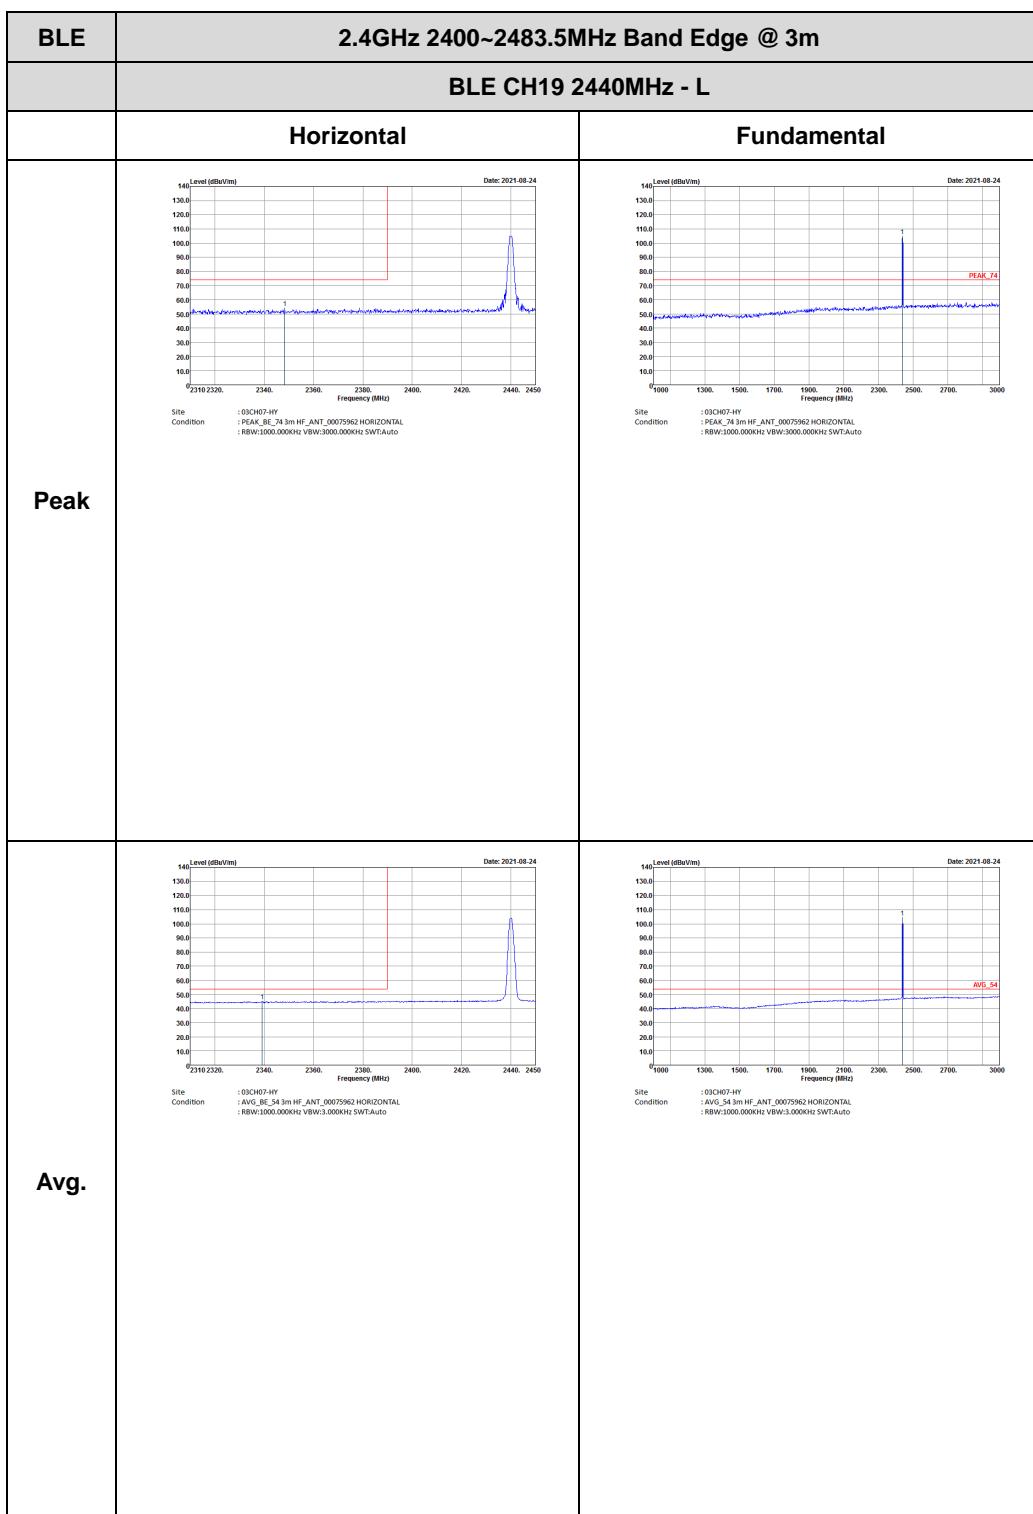


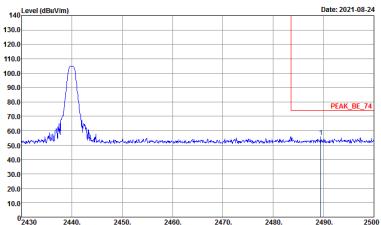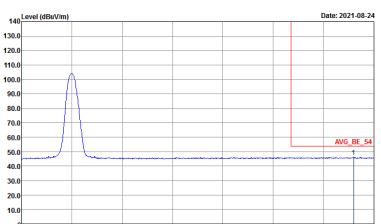



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
Horizontal		Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF, ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>	Left blank
Avg.	 <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF, ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SWF:Auto</p>	Left blank

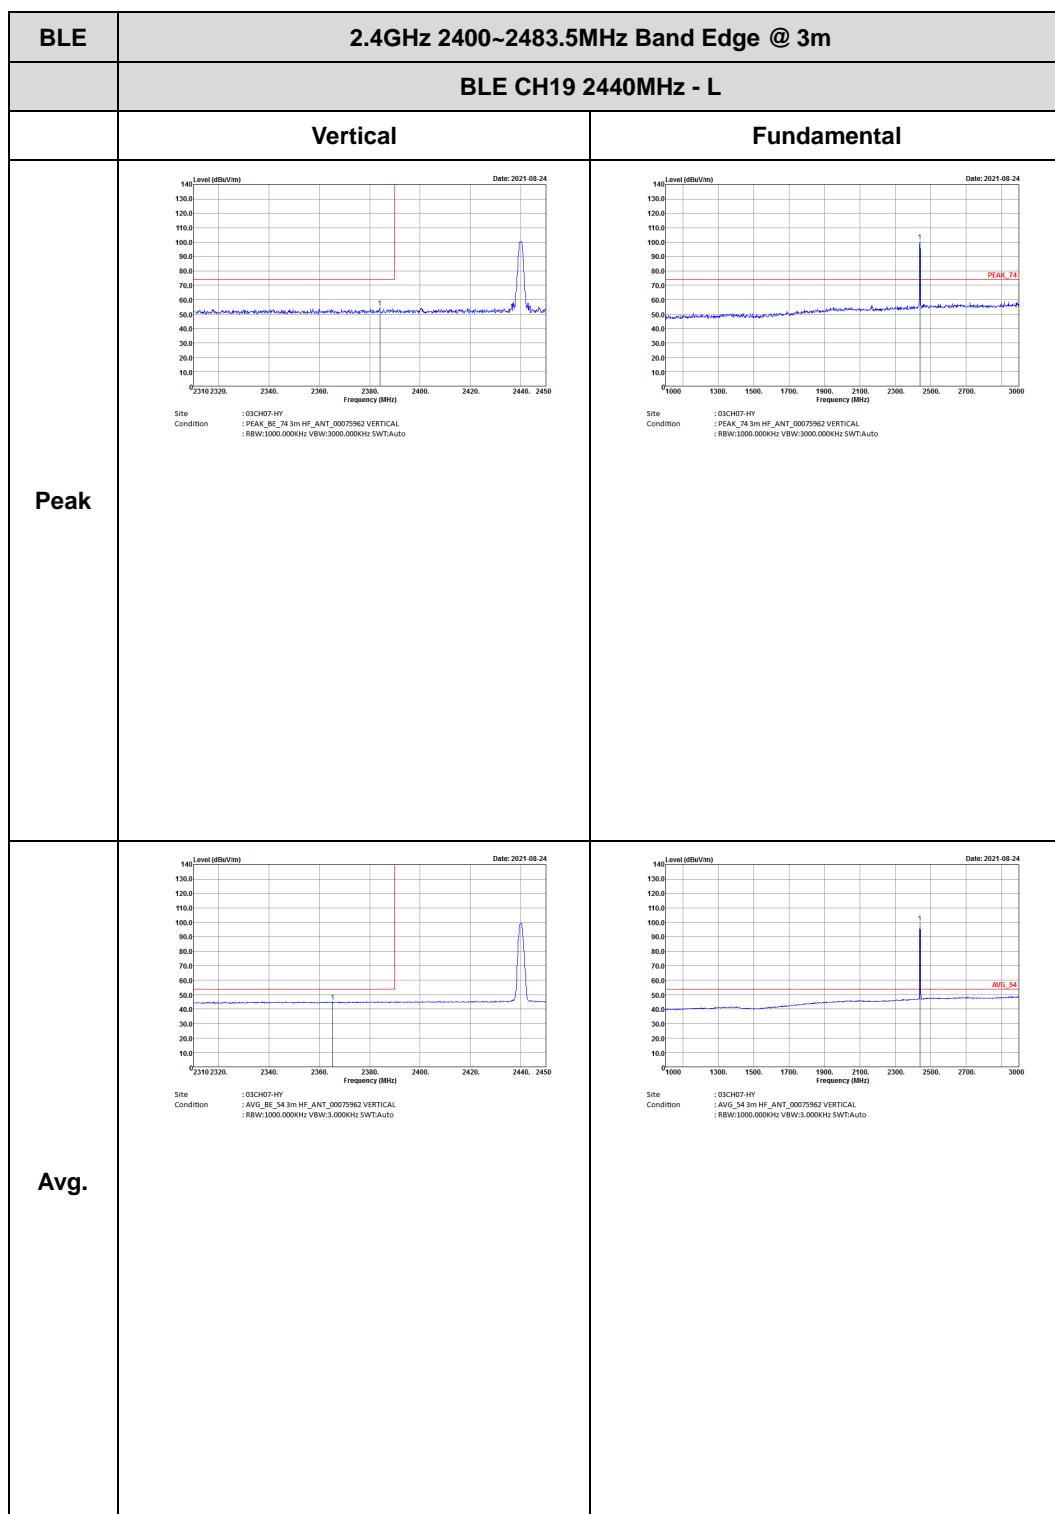

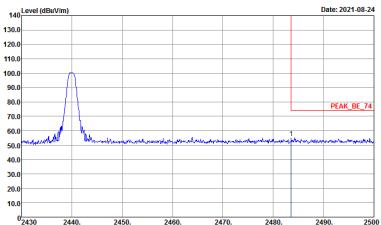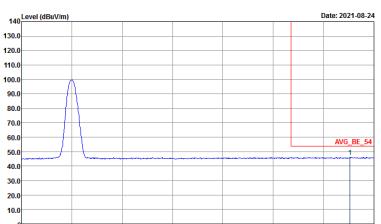

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
Vertical		Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SW:Auto</p>	Left blank
Avg.	 <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SW:Auto</p>	Left blank

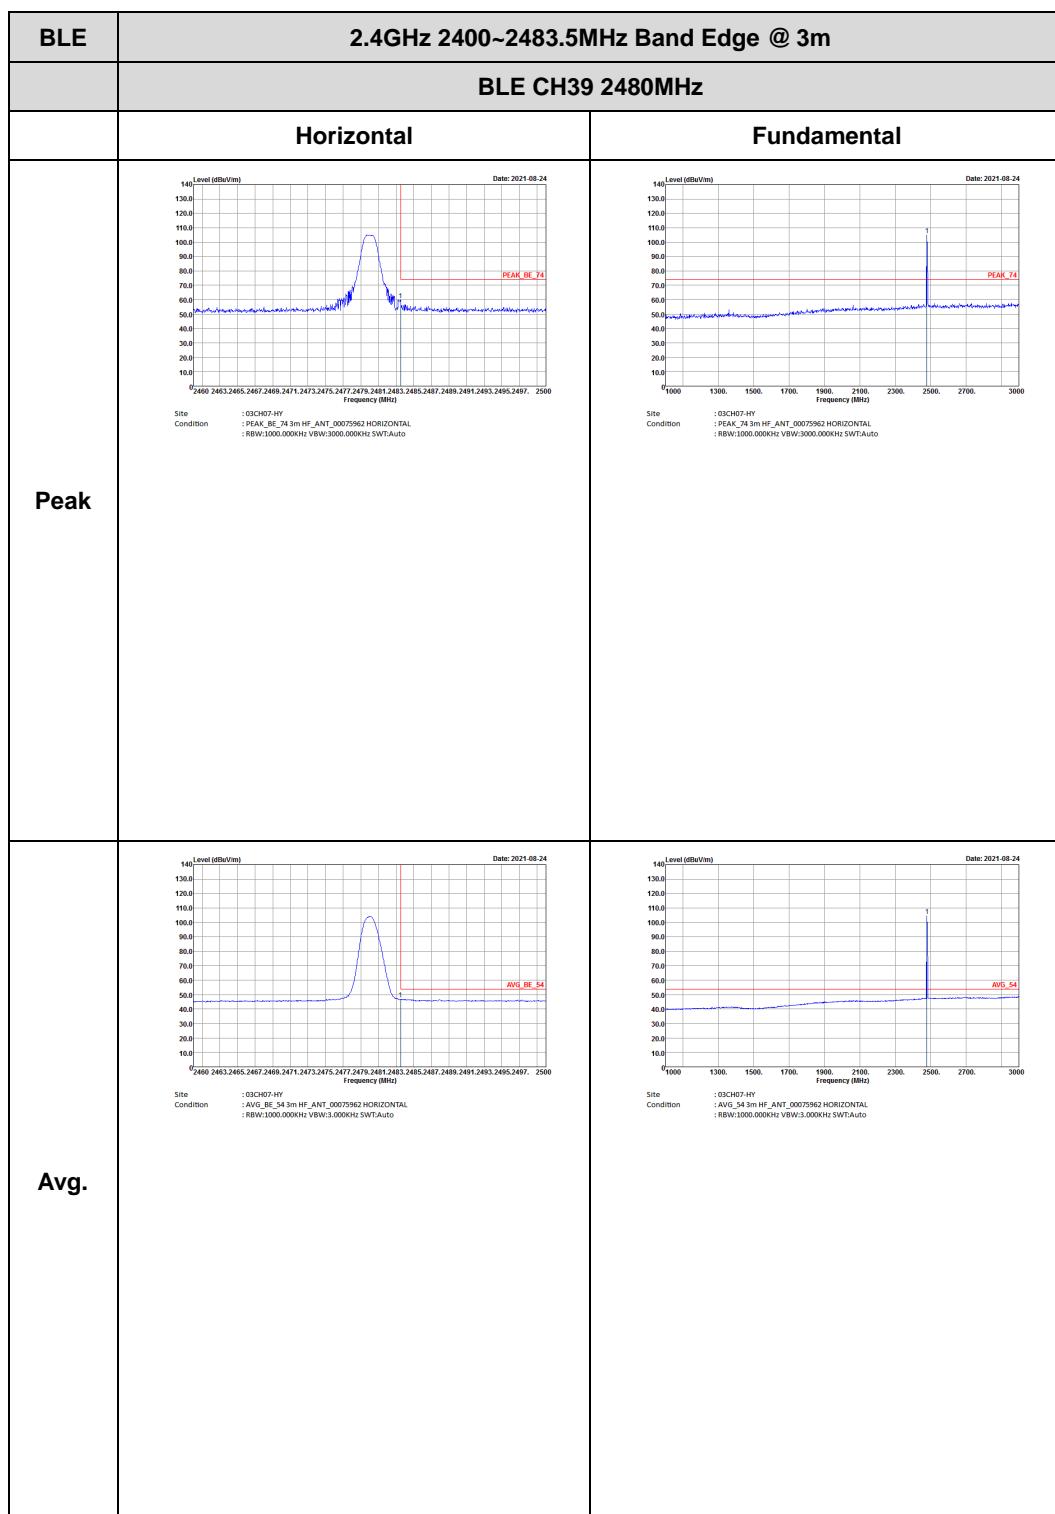


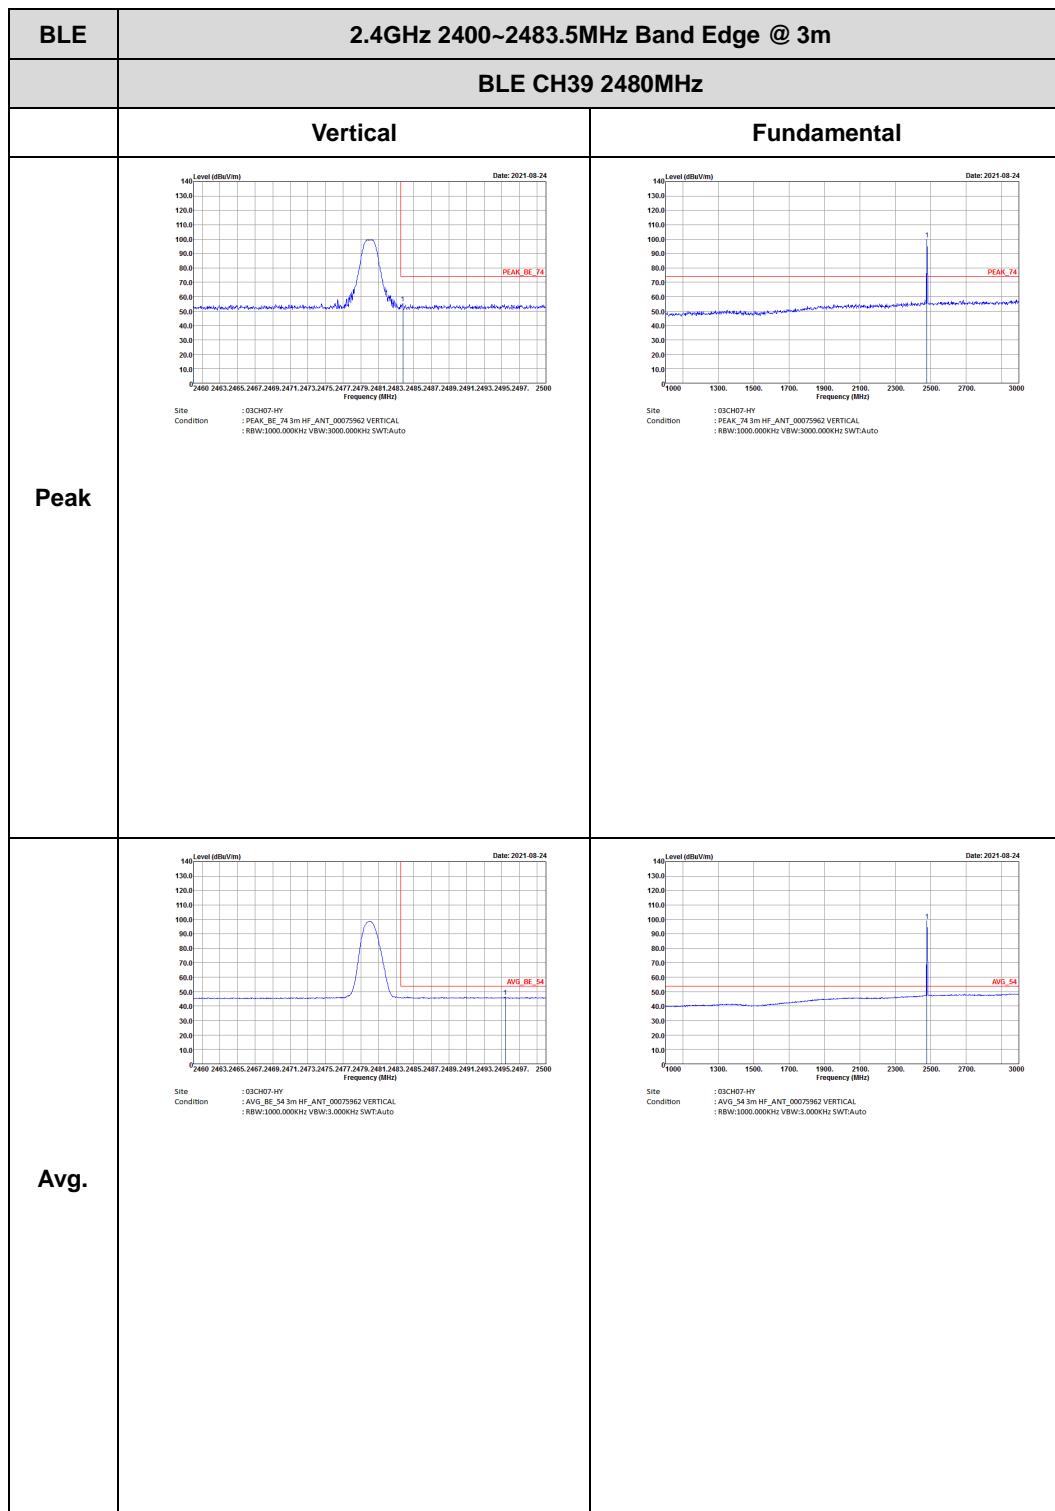





## 2.4GHz 2400~2483.5MHz

## BLE (Harmonic @ 3m)


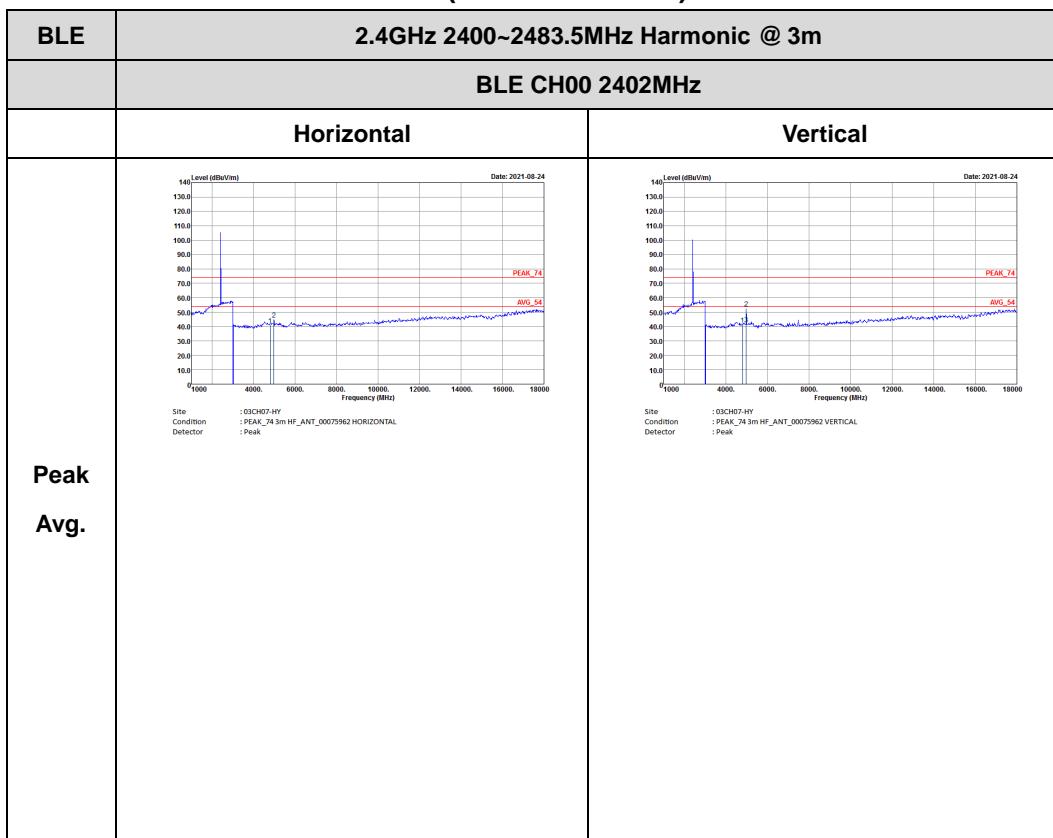


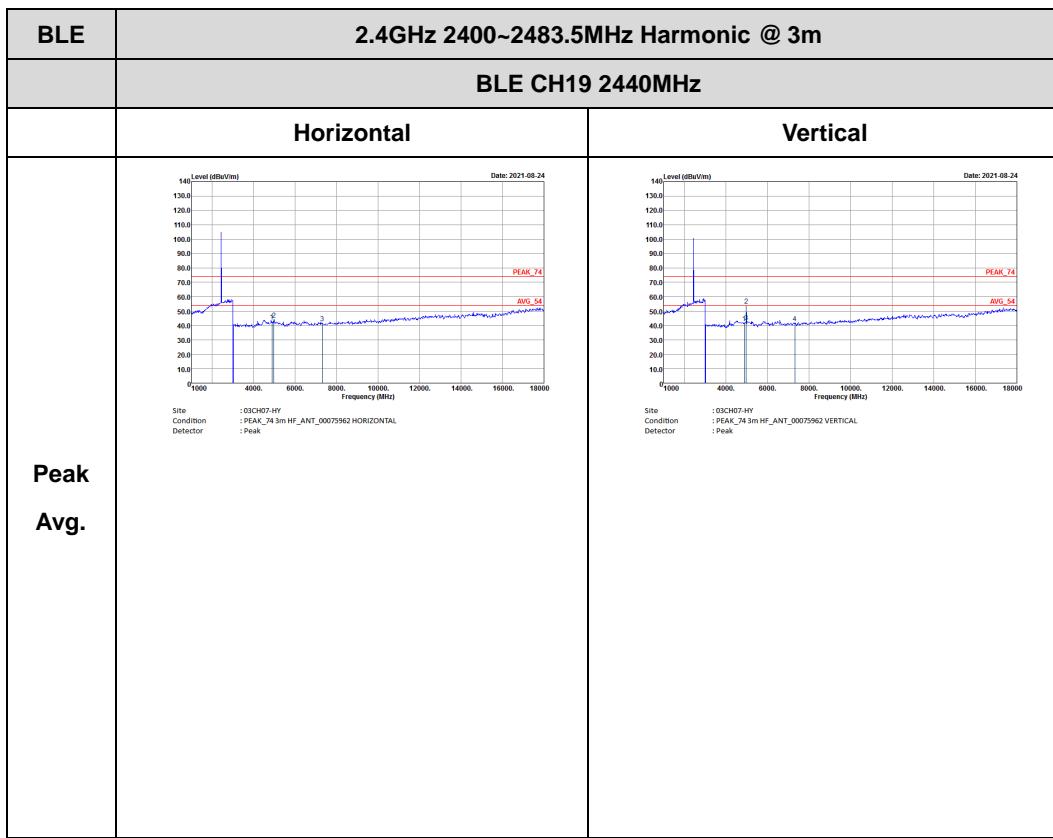

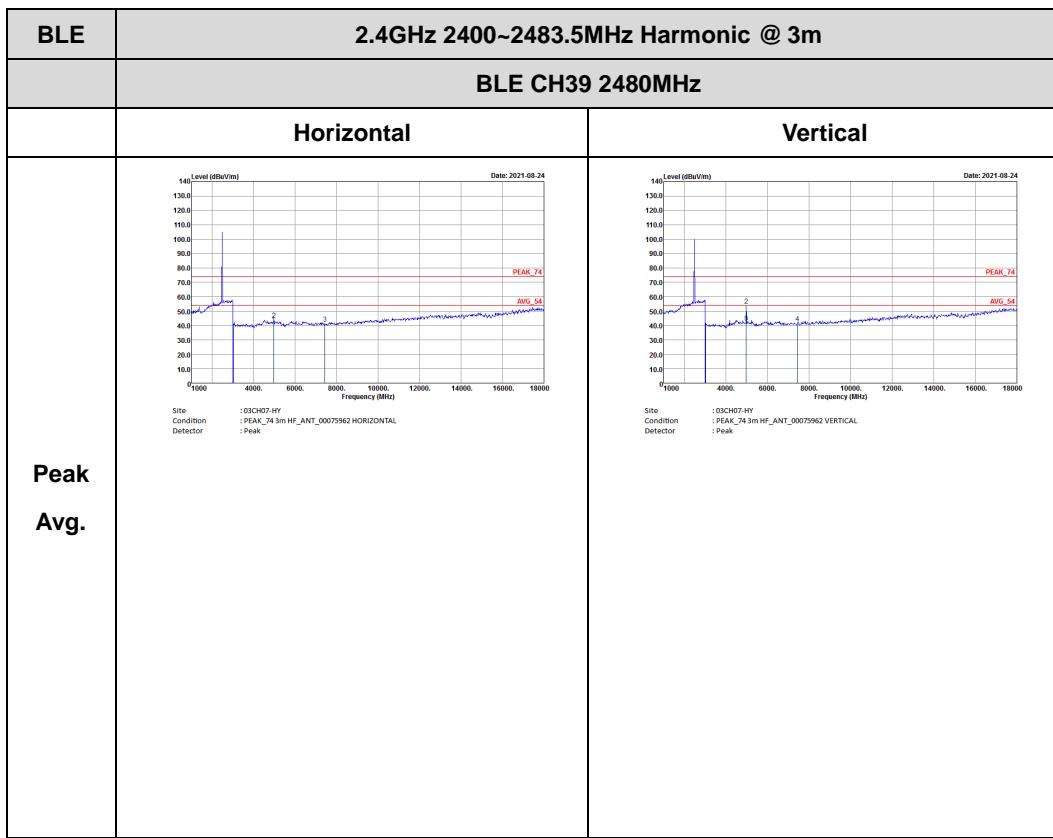





**Emission above 18GHz**  
**2.4GHz BLE (SHF @ 1m)**

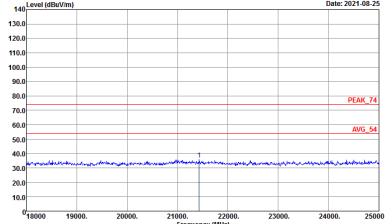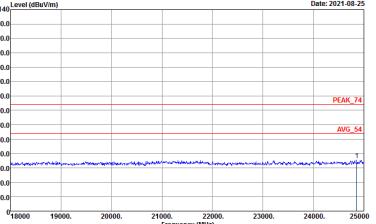BLE	2.4GHz 2400~2483.5MHz	
	BLE SHF	
	Horizontal	Vertical
<b>Peak</b>	 <p>Site : 03CH07-HY Condition : PEAK_74 1m SHF-EHF_5170251 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 1m SHF-EHF_5170251 VERTICAL Detector : Peak</p>
<b>Avg.</b>		



## Emission below 1GHz

## 2.4GHz BLE (LF)

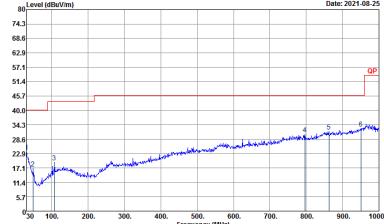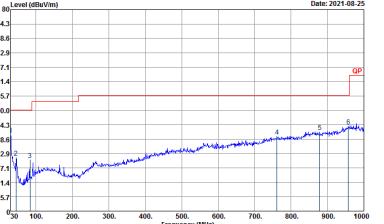
BLE	2.4GHz 2400~2483.5MHz	
	BLE LF	
	Horizontal	Vertical
QP / Peak	 <p>Site: 03CH07-HY Condition: QP 3m LF-ANT-35419(6) HORIZONTAL Detector: Peak</p>	 <p>Site: 03CH07-HY Condition: QP 3m LF-ANT-35419(6) VERTICAL Detector: Peak</p>





&lt;2Mbps&gt;

## 2.4GHz 2400~2483.5MHz



## BLE (Band Edge @ 3m)

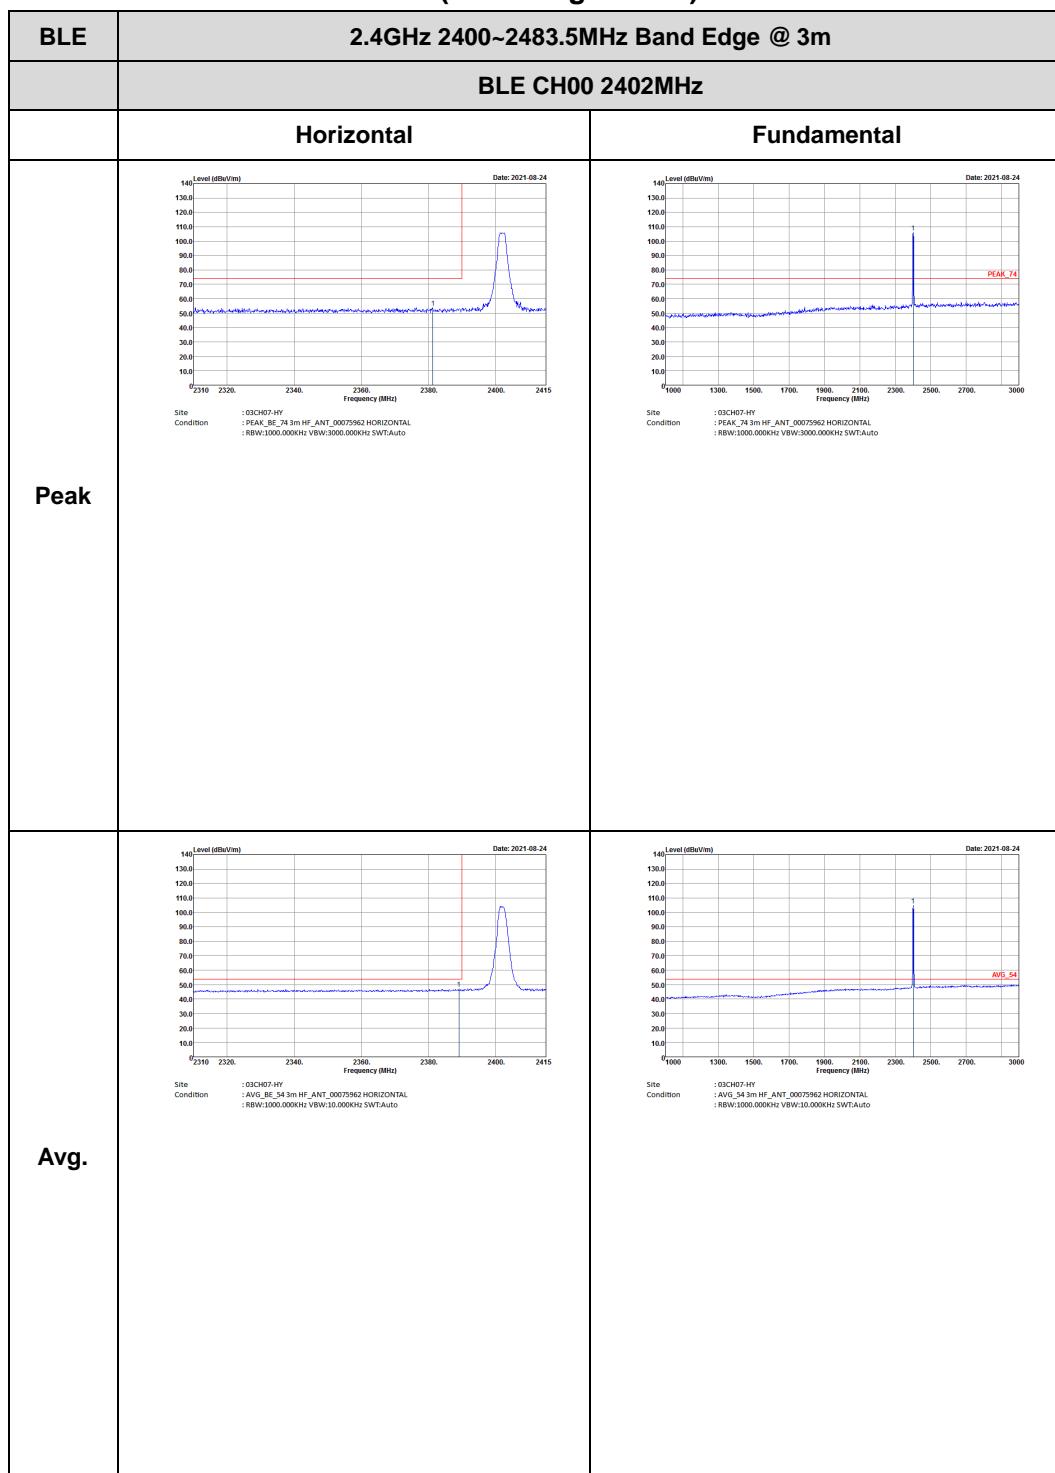


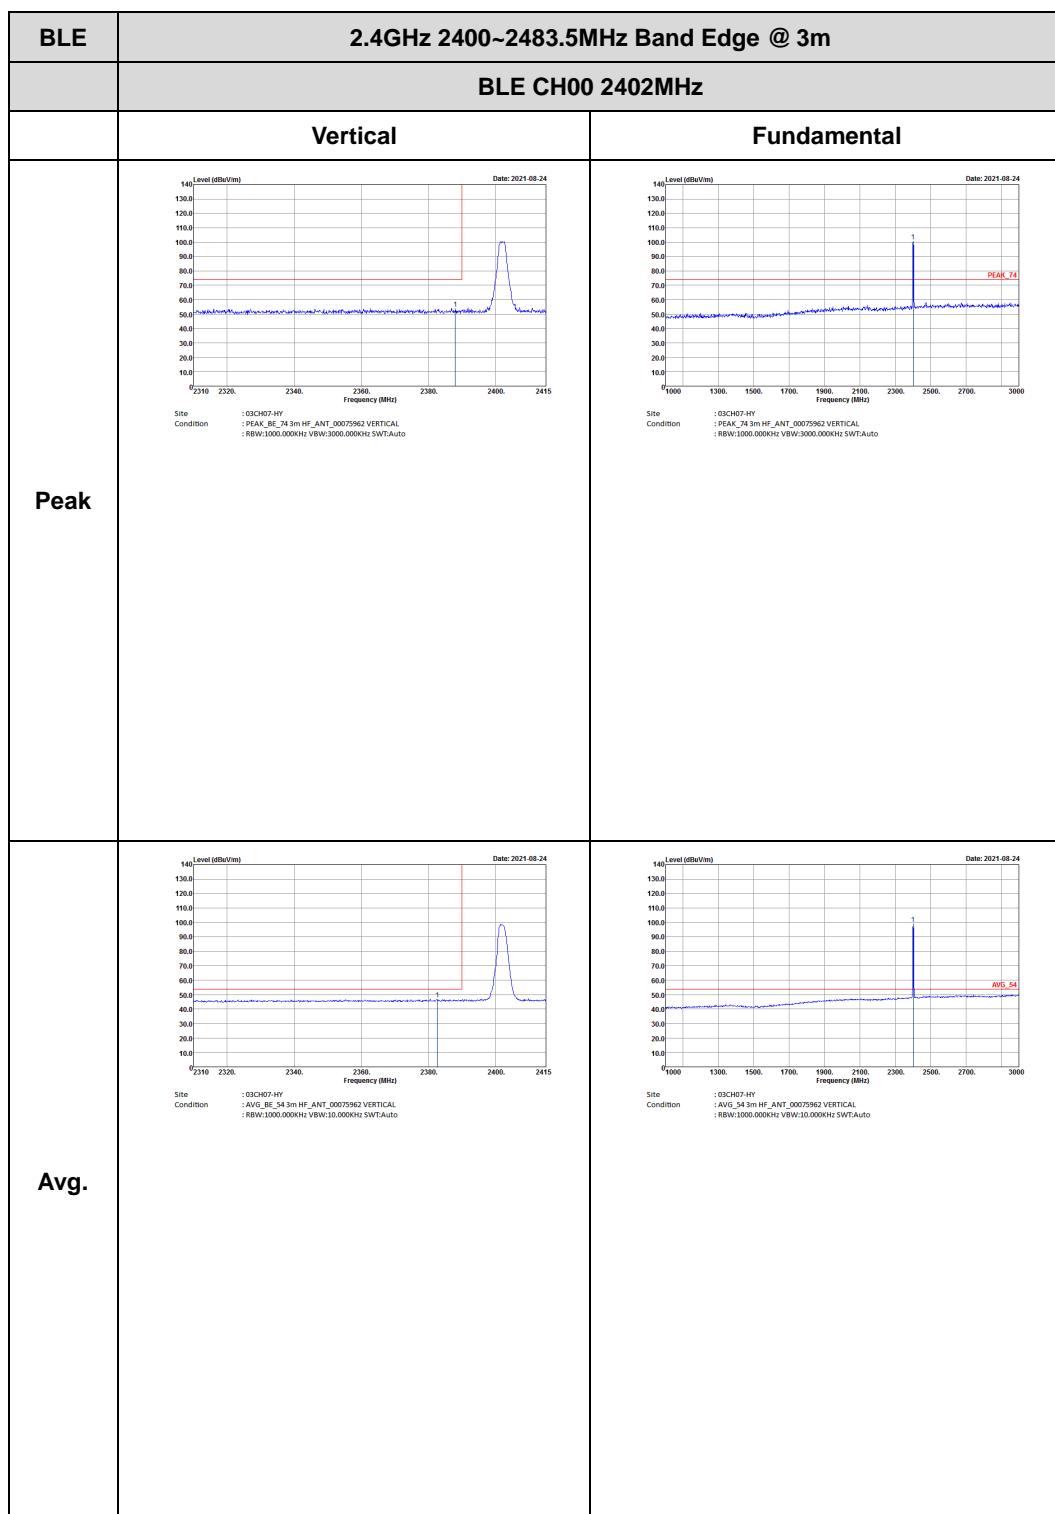

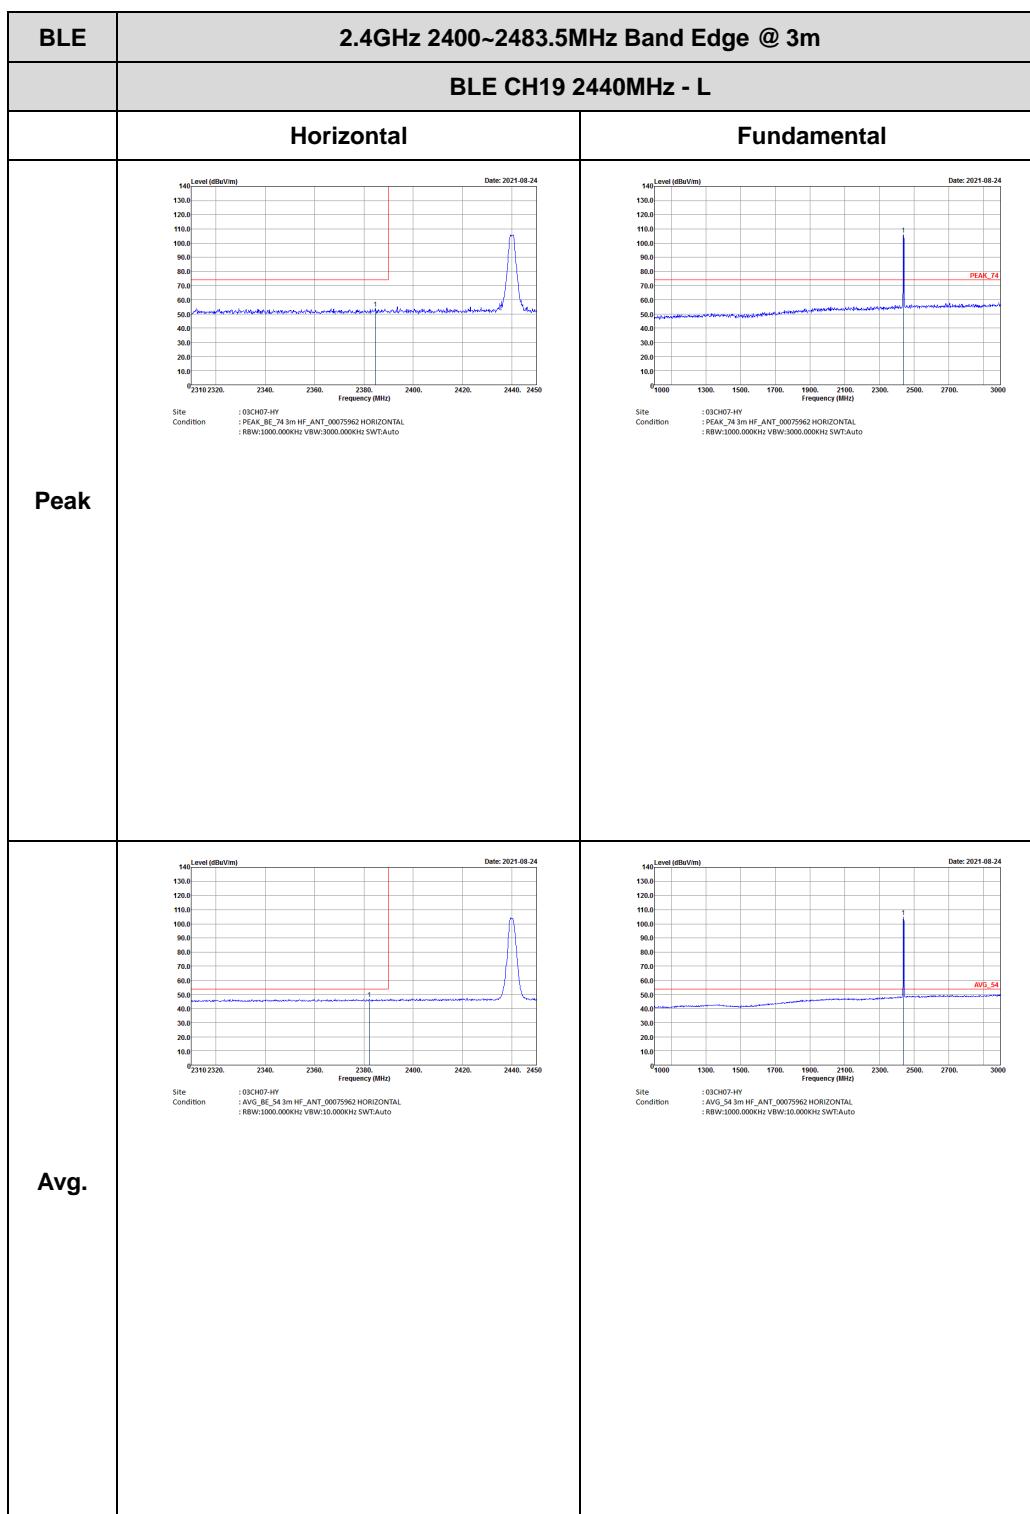


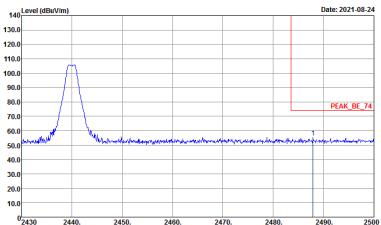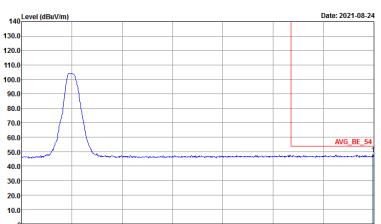



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
Horizontal		Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF, ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SW:Auto</p>	Left blank
Avg.	 <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF, ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SW:Auto</p>	Left blank

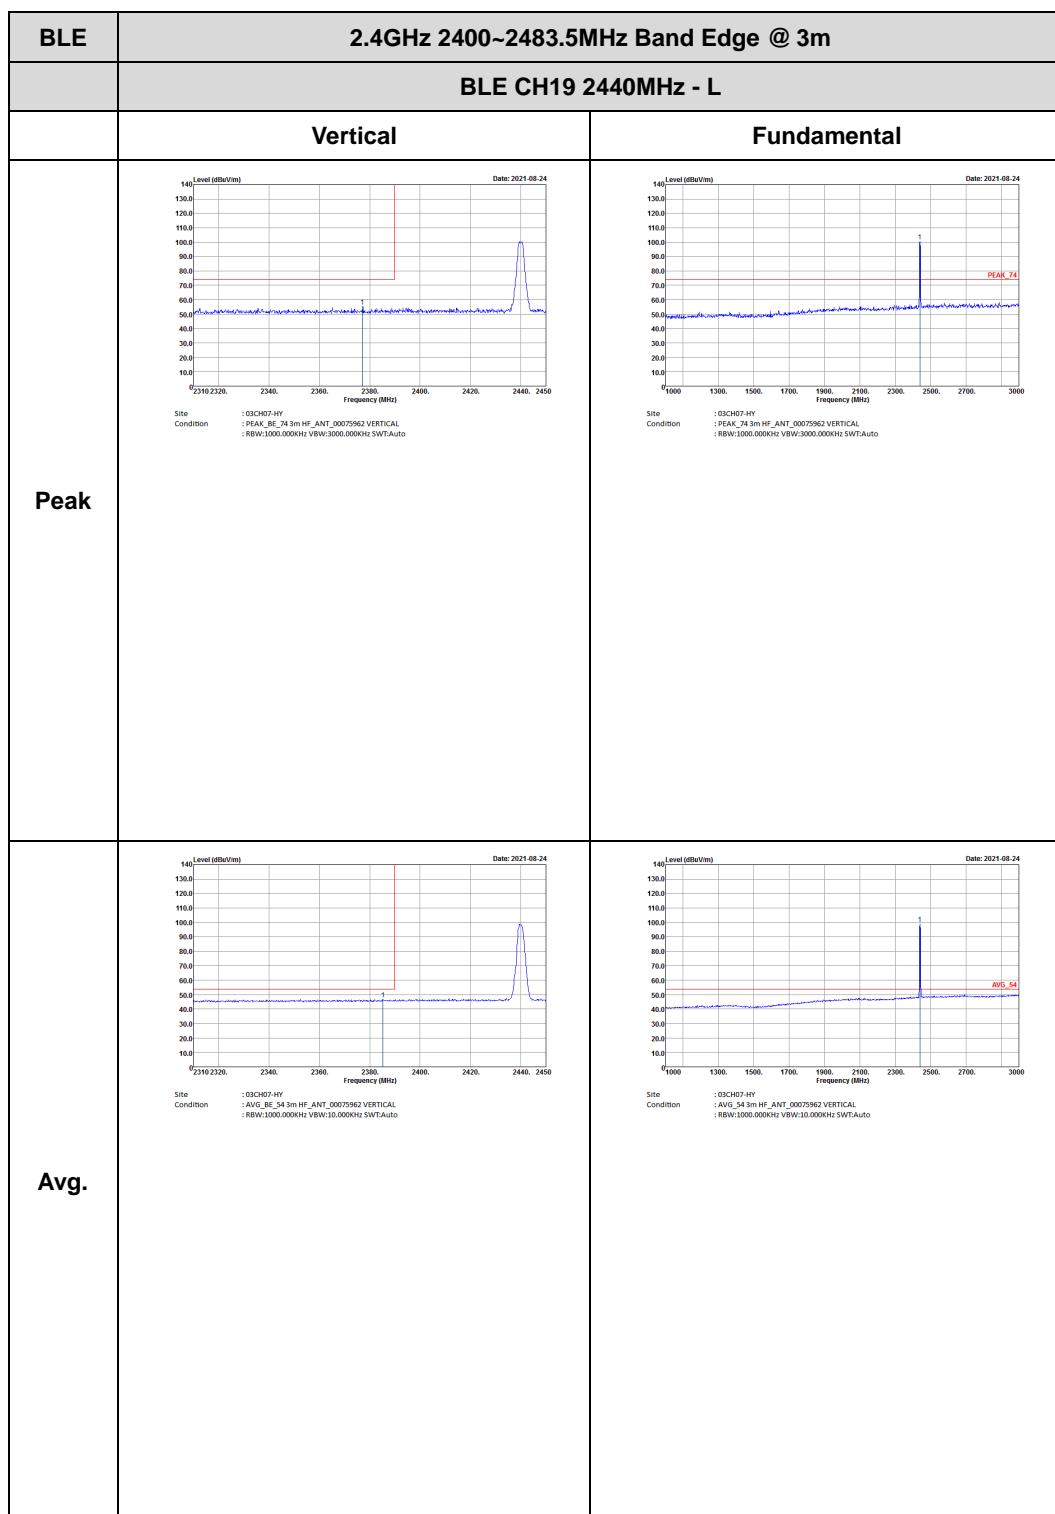

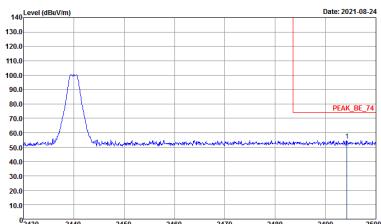

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Vertical	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF, ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SW:Auto</p>	Left blank
Avg.	 <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF, ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SW:Auto</p>	Left blank

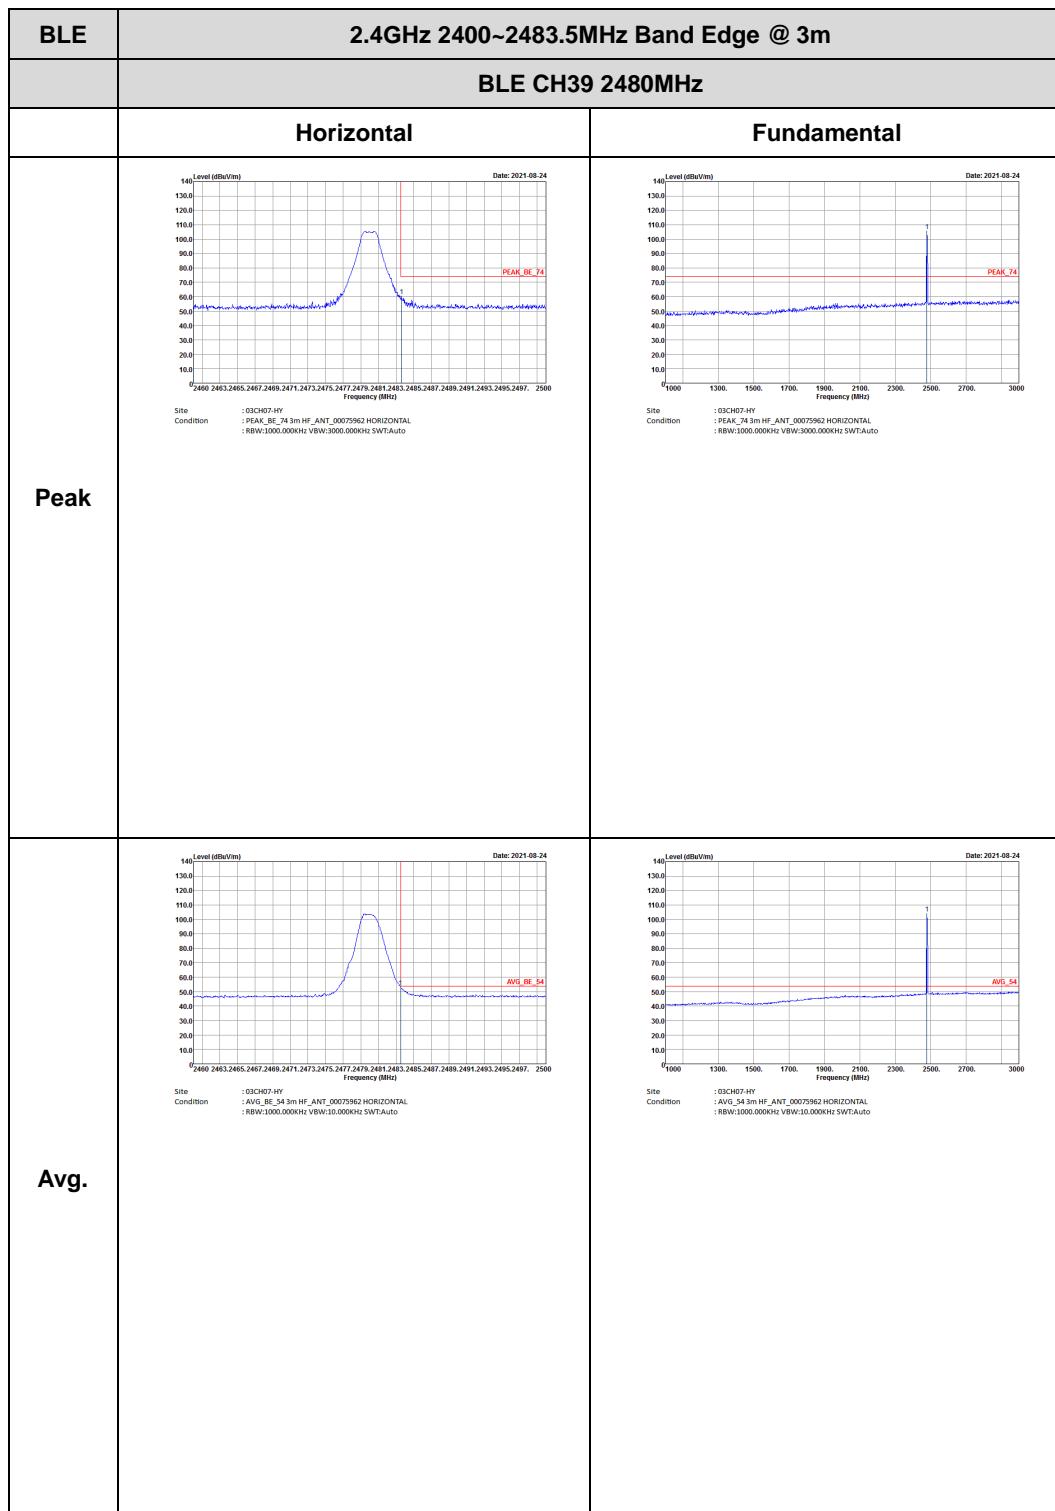


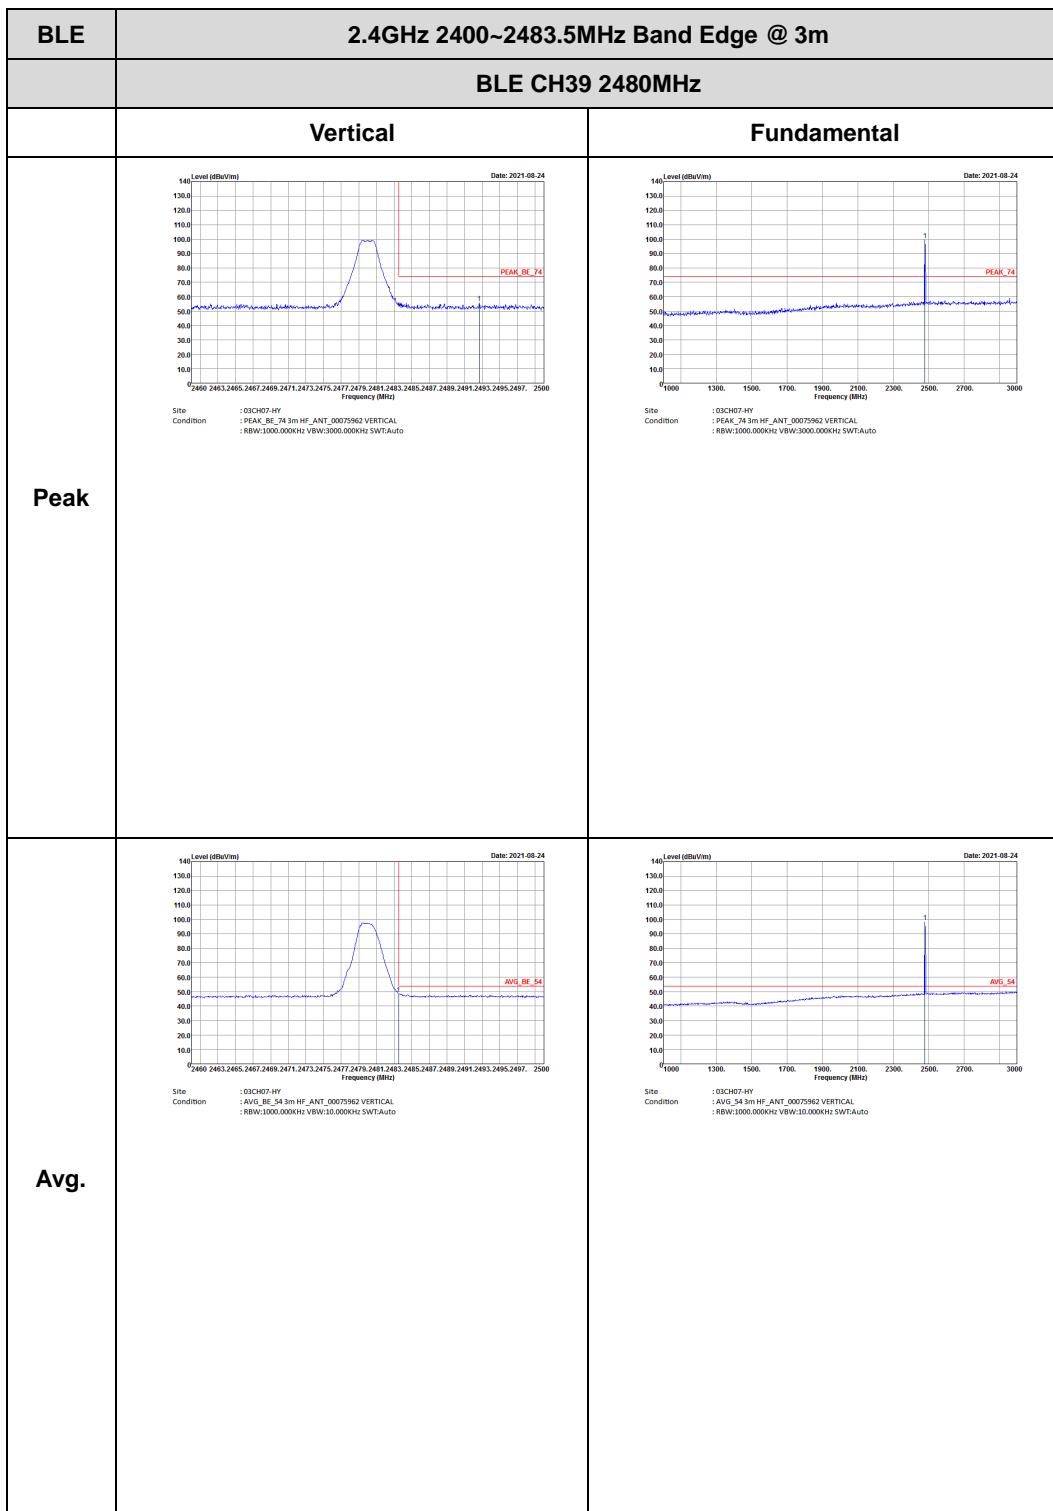





## 2.4GHz 2400~2483.5MHz

## BLE (Harmonic @ 3m)


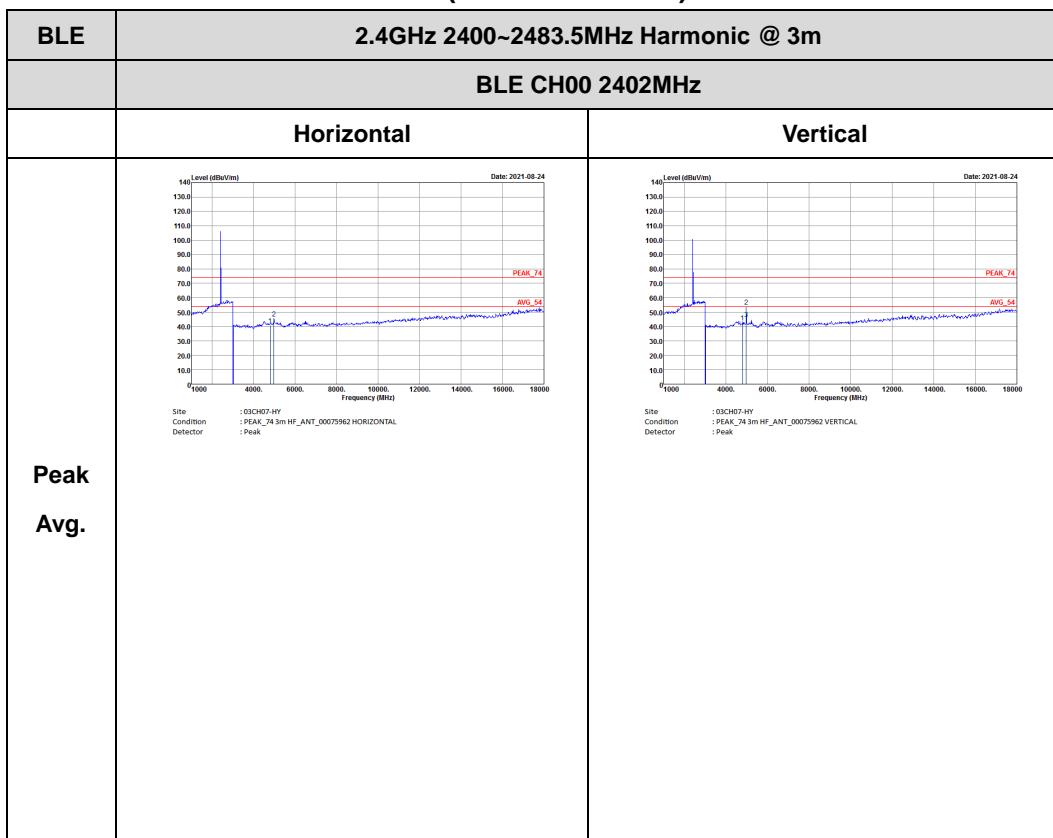


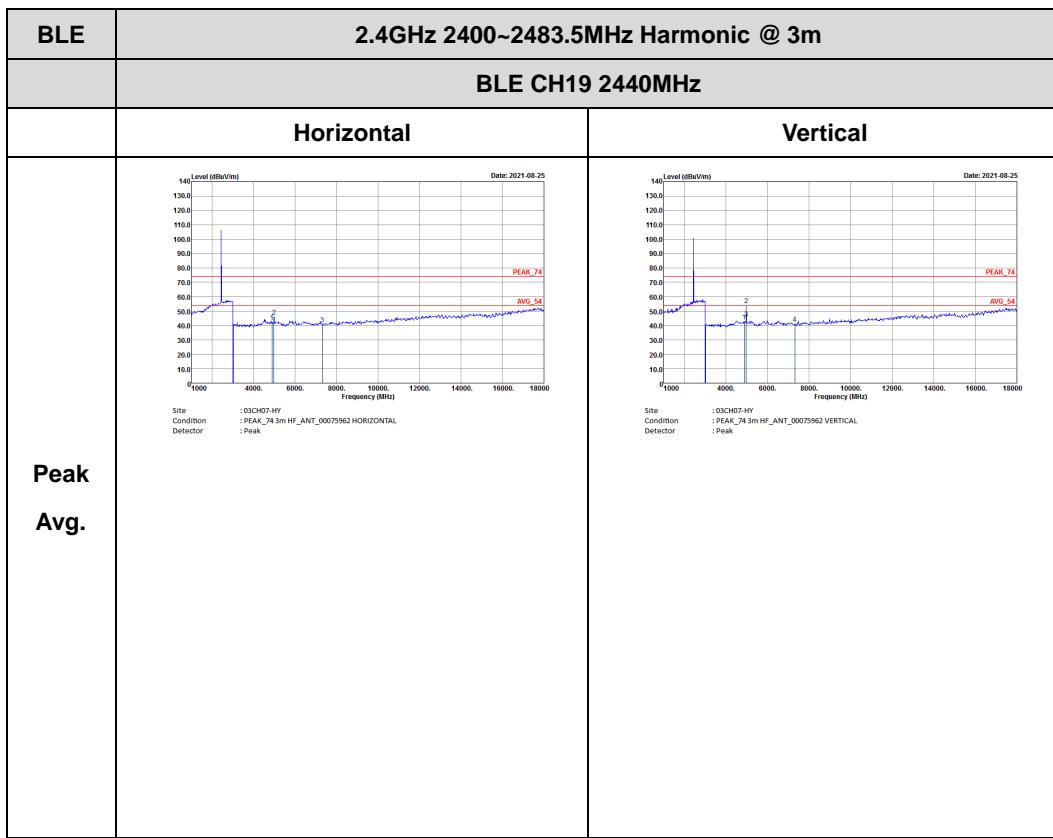

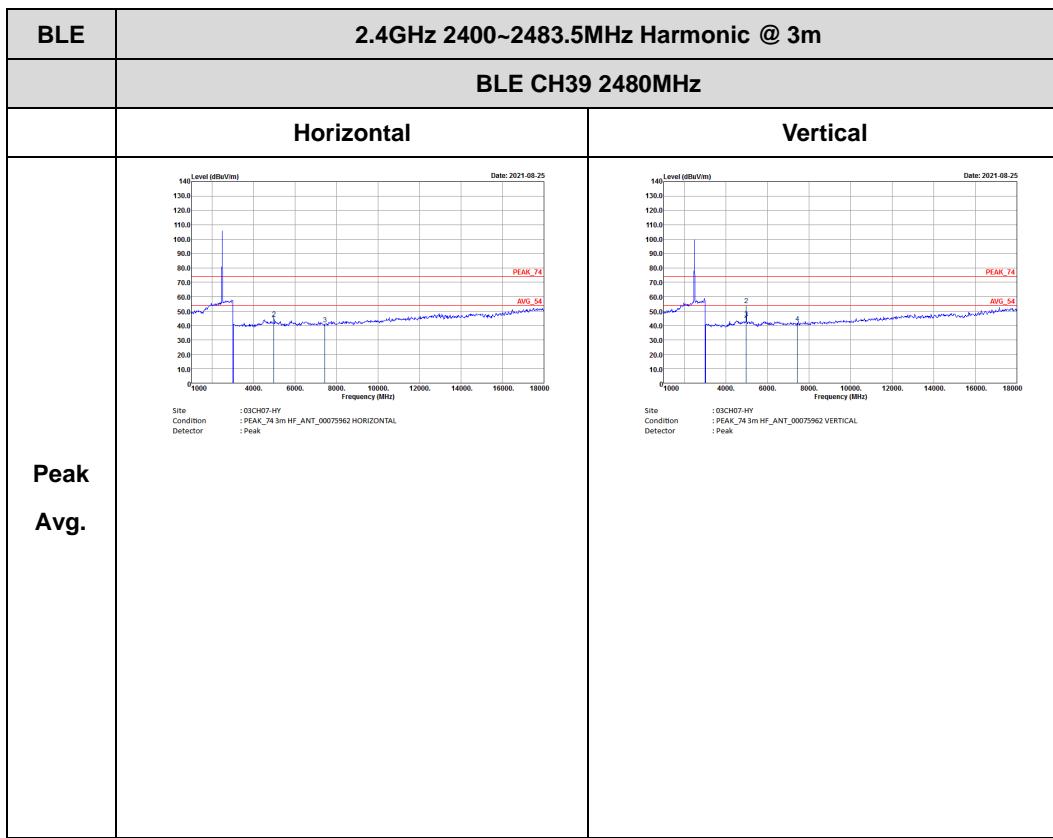




**Emission above 18GHz**  
**2.4GHz BLE (SHF @ 1m)**

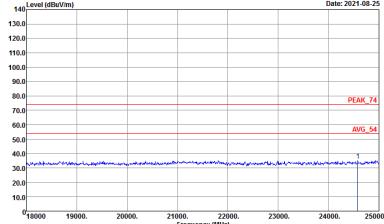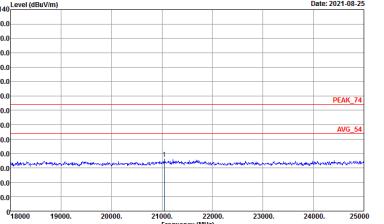BLE	2.4GHz 2400~2483.5MHz	
	BLE SHF	
	Horizontal	Vertical
Peak	 <p>Site : 03CH07-HY Condition : PEAK_74 1m SHF-EHF_5170251 VERTICAL Detector : Peak</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 1m SHF-EHF_5170251 HORIZONTAL Detector : Peak</p>
Avg.		



## Emission below 1GHz

## 2.4GHz BLE (LF)

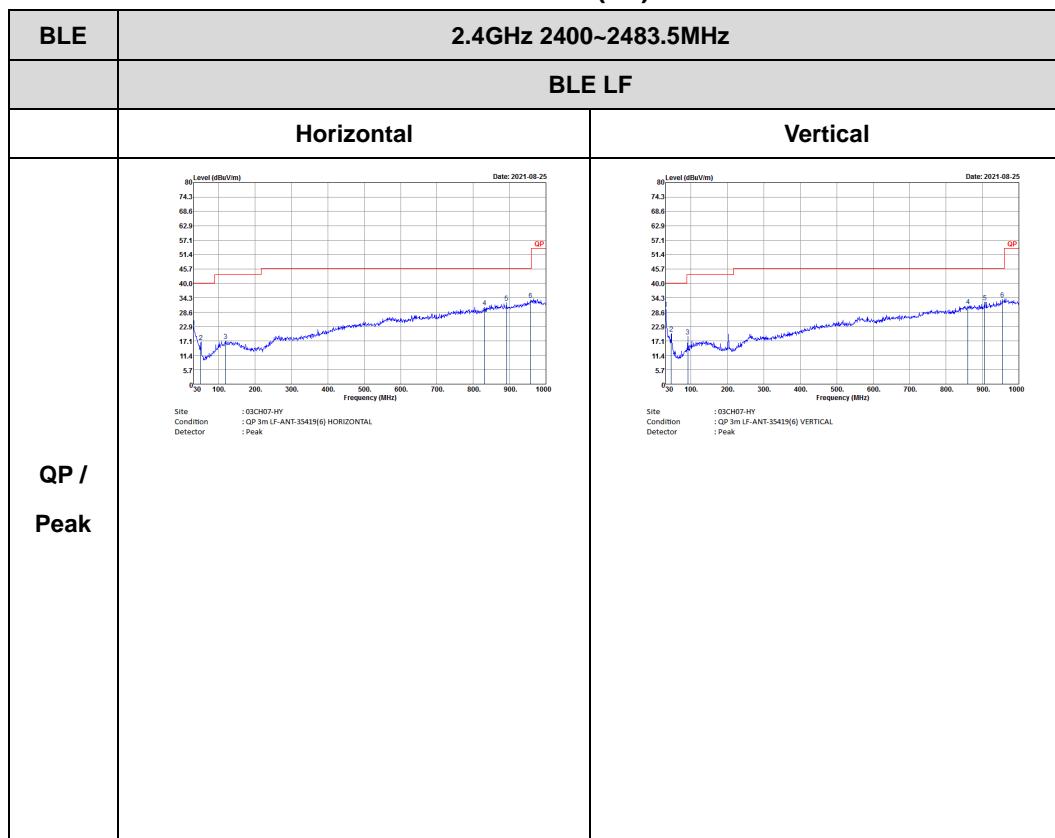





&lt;Sample 1 with Battery 2&gt;

&lt;2Mbps&gt;

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

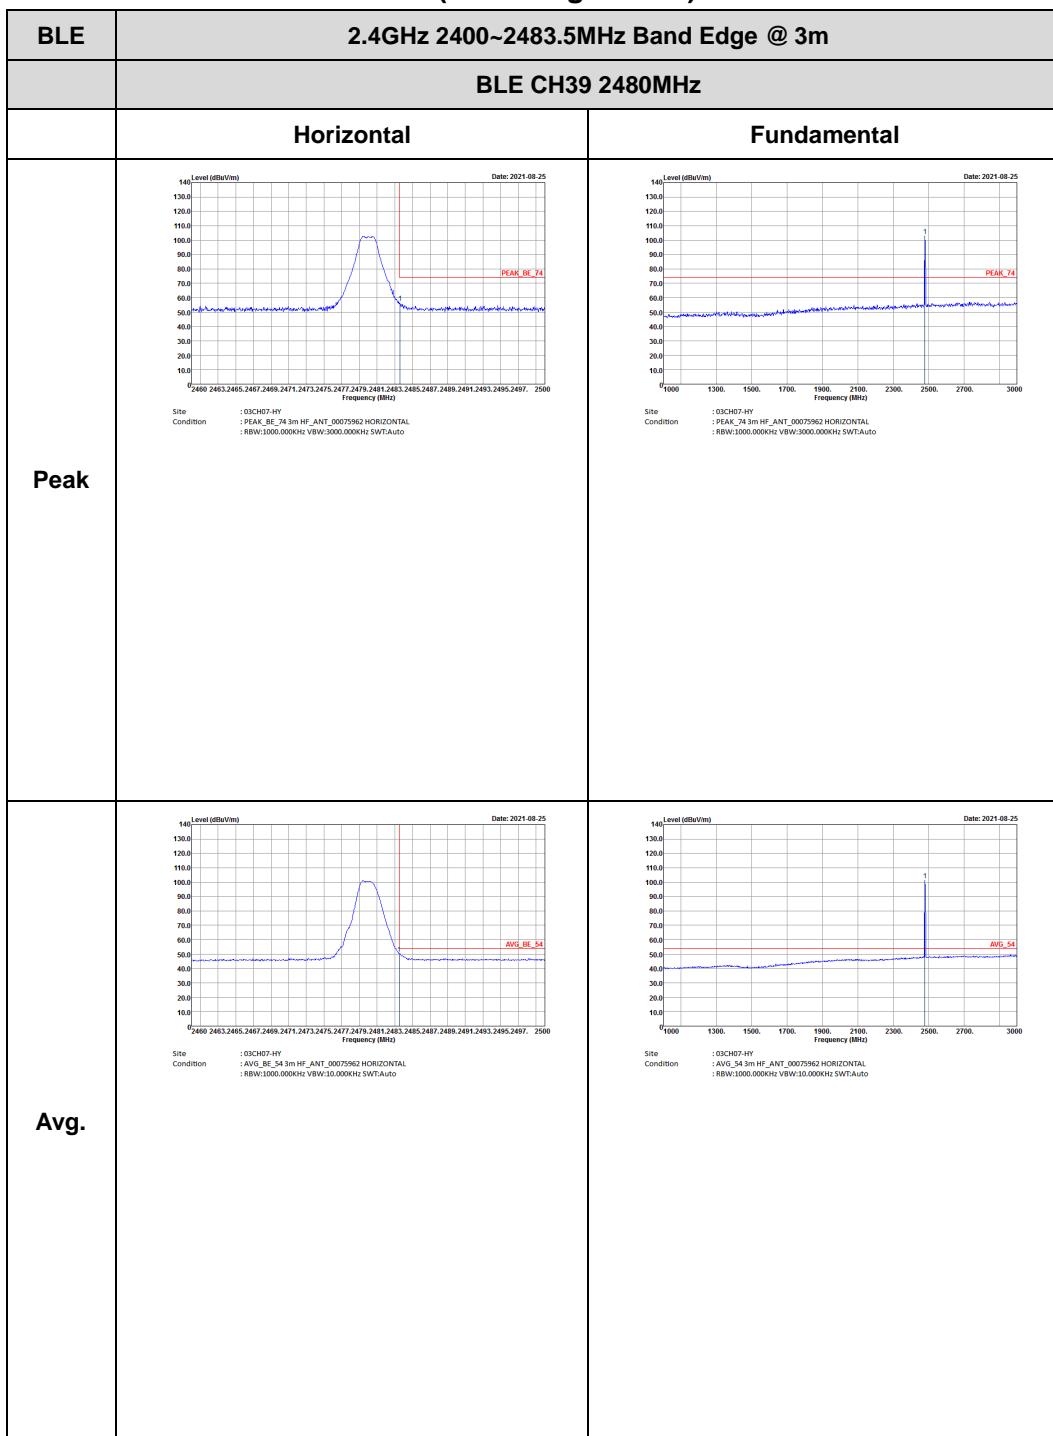


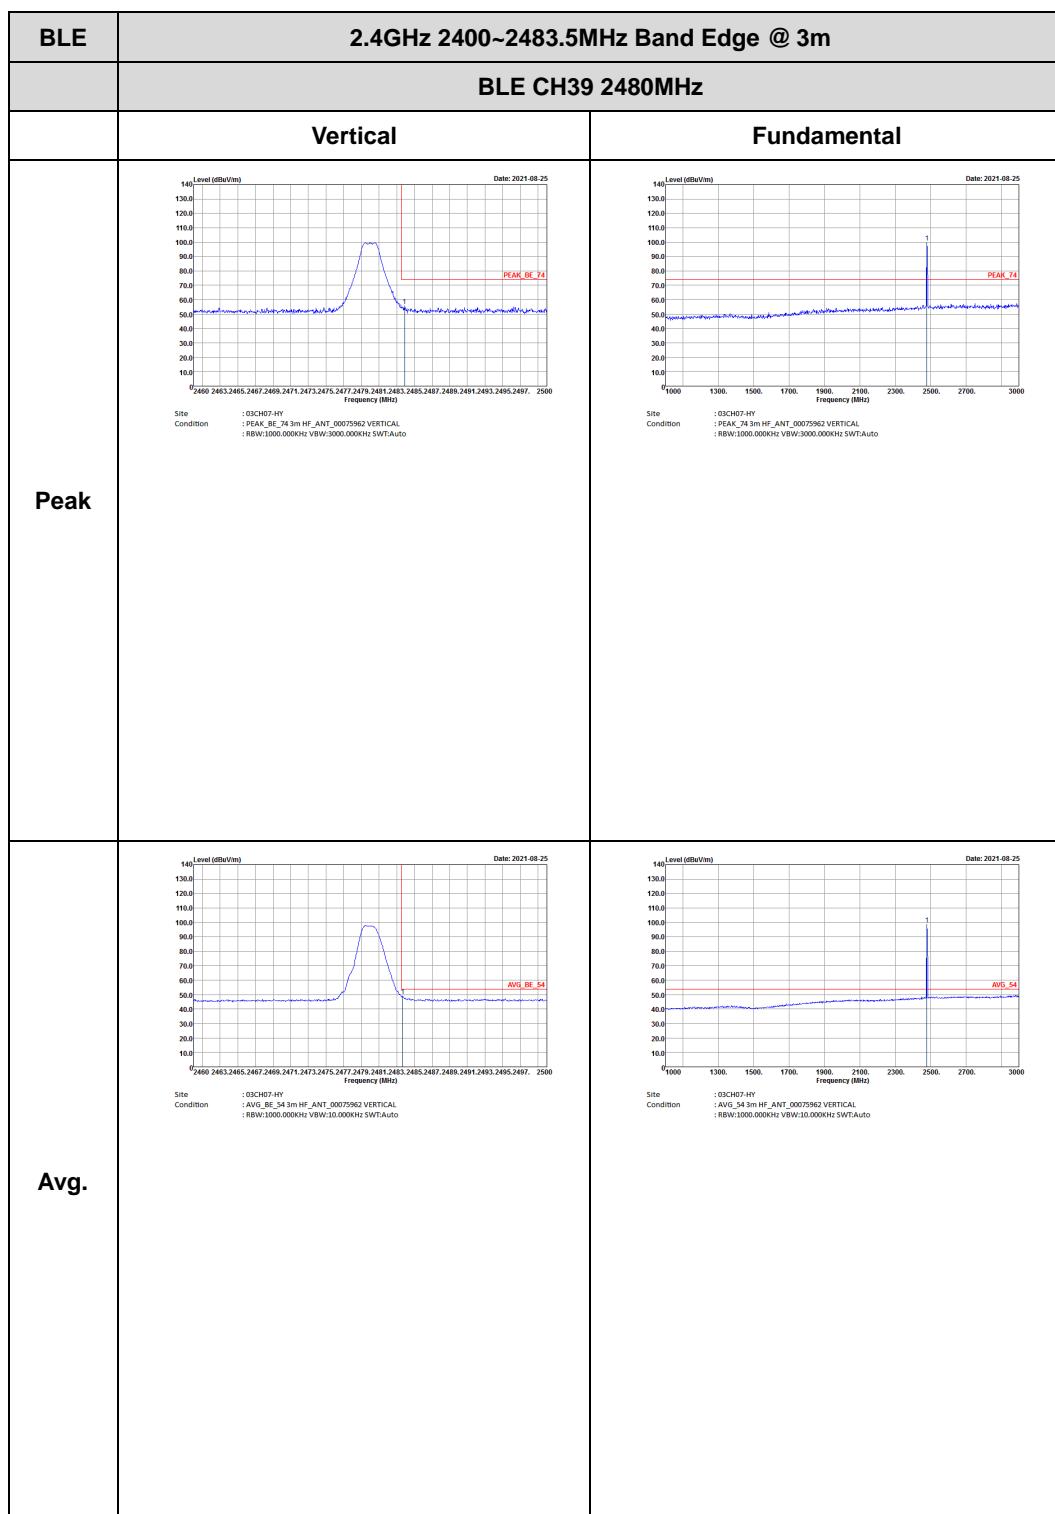




## 2.4GHz 2400~2483.5MHz

## BLE (Harmonic @ 3m)

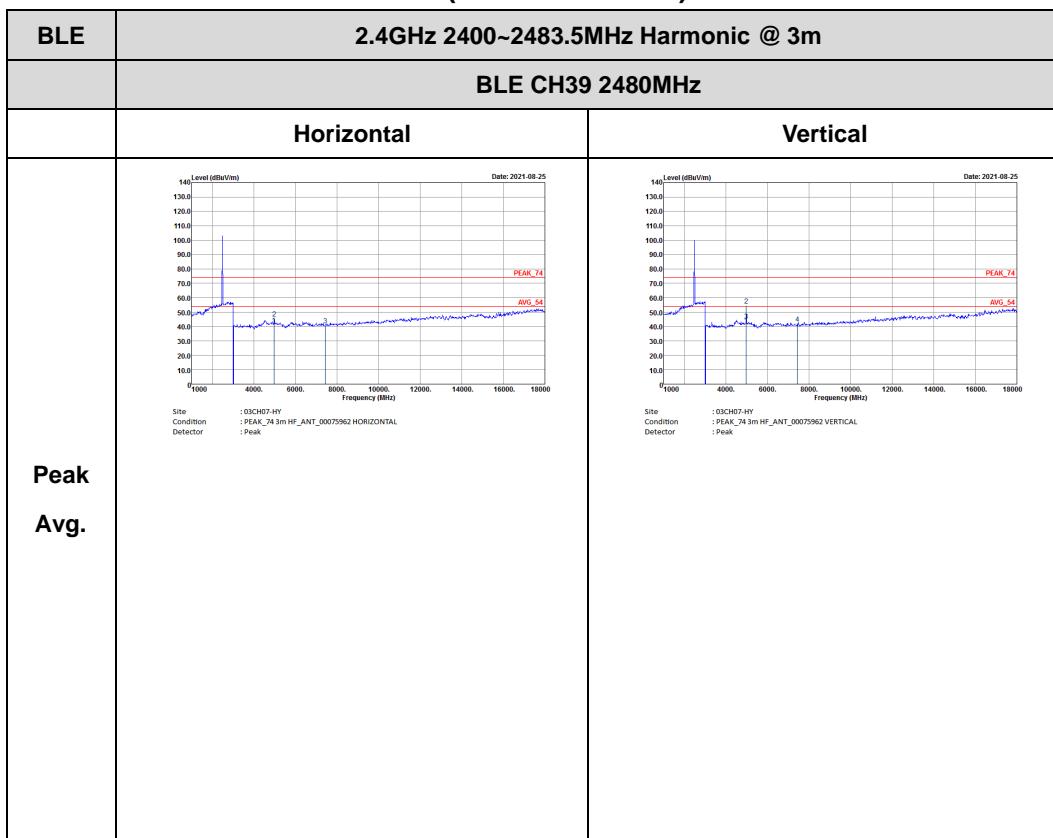




**Emission above 18GHz**  
**2.4GHz BLE (SHF @ 1m)**

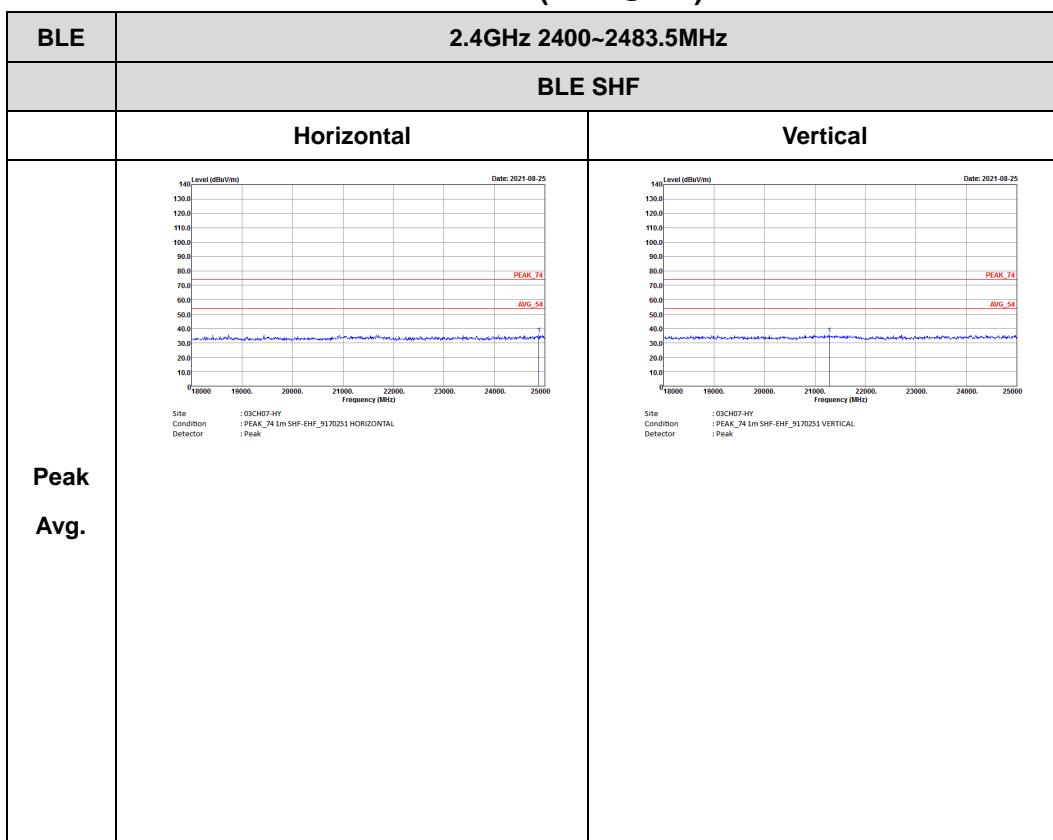



## Emission below 1GHz


## 2.4GHz BLE (LF)

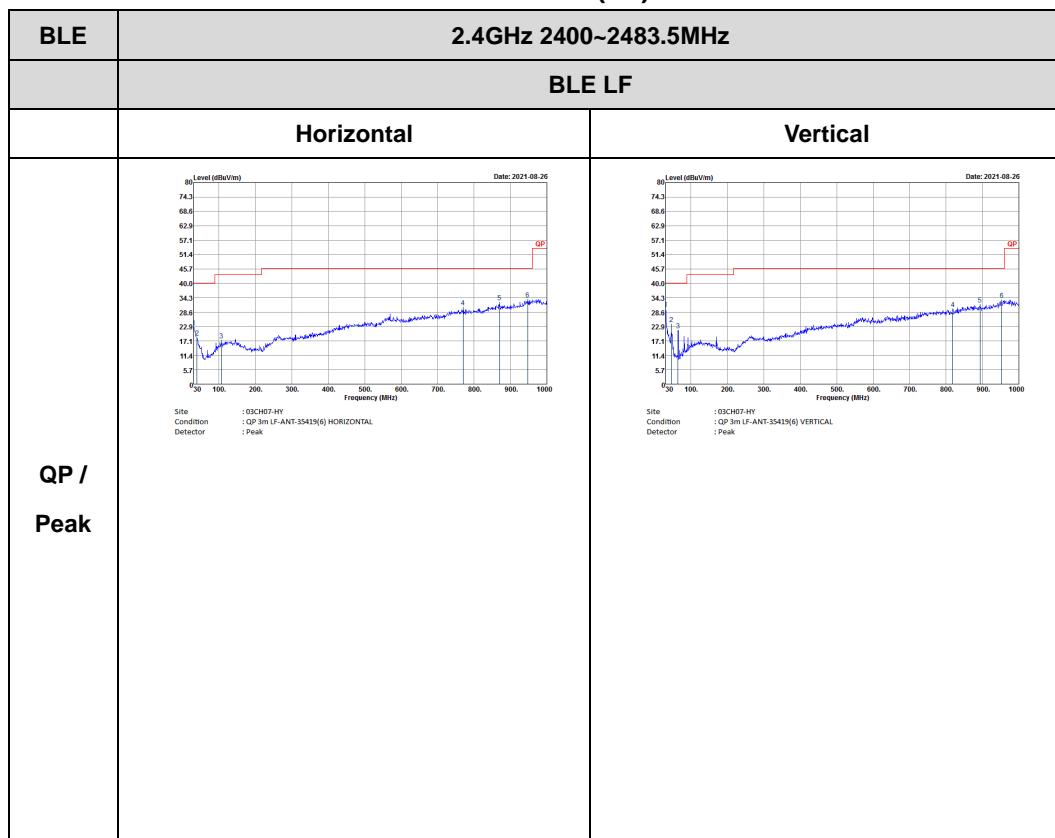

## Appendix D. Duty Cycle Plots

<Sample 1 with Battery 1>

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth -LE for 1Mbps	62.50	390	2.56	3kHz
Bluetooth -LE for 2Mbps	32.91	206	4.85	10kHz

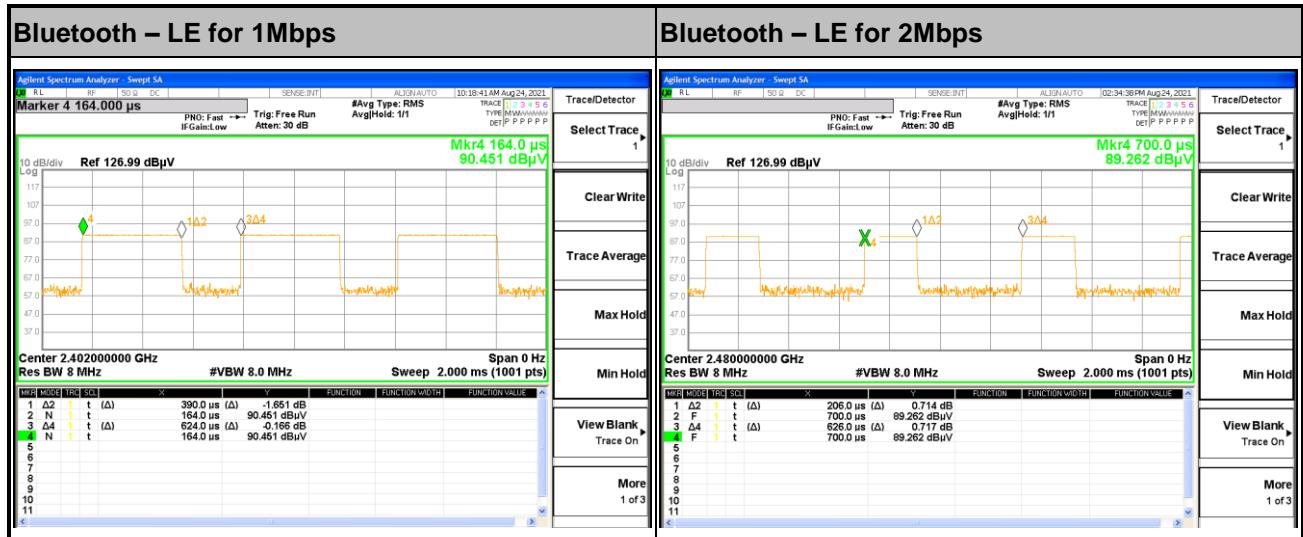

<Sample 1 with Battery 2>

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth –LE for 2Mbps	33.17	207	4.83	10kHz

