

FCC Test Report

Equipment : Bluetooth Earphone

Brand Name : Bang & Olufsen

Model No. : Beoplay H5

FCC ID : TTUBEOPLAYH5

Standard : 47 CFR FCC Part 15.247

Operating Band : 2400 MHz - 2483.5 MHz

FCC Classification : DTS

Applicant : Bang & Olufsen A/S

Peter Bangs Vej 15, DK-7600 Struer, Denmark

Manufacturer : DongGuan Data Target Electronic Ltd.

Vill.4, Shry Jye District, Shry Jye Town, Dong

Guan City, Guang Dong, China

The product sample received on Apr. 19, 2016 and completely tested on May 04, 2016. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Kevin Liang / Assistant Manager

Testing Laboratory 1190

Report No.: FR640908AL

SPORTON INTERNATIONAL INC. Page No. : 1 of 35
TEL: 886-3-327-3456 Report Version : Rev. 01



FCC Test Report

Table of Contents

| 1 | GENERAL DESCRIPTION | 5 |
|------|--|----|
| 1.1 | Information | 5 |
| 1.2 | Accessories and Support Equipment | |
| 1.3 | Testing Applied Standards | |
| 1.4 | Testing Location Information | |
| 1.5 | Measurement Uncertainty | |
| 2 | TEST CONFIGURATION OF EUT | 9 |
| 2.1 | The Worst Case Modulation Configuration | g |
| 2.2 | The Worst Case Power Setting Parameter | |
| 2.3 | The Worst Case Measurement Configuration | 10 |
| 2.4 | Test Setup Diagram | |
| 3 | TRANSMITTER TEST RESULT | 12 |
| 3.1 | AC Power-line Conducted Emissions | 12 |
| 3.2 | 6dB Bandwidth | 15 |
| 3.3 | RF Output Power | 17 |
| 3.4 | Power Spectral Density | 19 |
| 3.5 | Transmitter Bandedge Emissions | 21 |
| 3.6 | Transmitter Unwanted Emissions | 24 |
| 4 | TEST EQUIPMENT AND CALIBRATION DATA | 35 |
| 4 DD | ENDIV A TEST BUSTOS | |

APPENDIX A. TEST PHOTOS

APPENDIX B. PHOTOGRAPHS OF EUT

Report No.: FR640908AL



Summary of Test Result

Report No.: FR640908AL

| | Conformance Test Specifications | | | | | |
|------------------|---------------------------------|---|--|--|----------|--|
| Report Clause | Ref. Std. Clause | Description | Measured | Limit | Result | |
| 1.1.2 | 15.203 | Antenna Requirement | Antenna connector mechanism complied | FCC 15.203 | Complied | |
| 3.1 | 15.207 | AC Power-line Conducted Emissions | [dBuV]: 0.4692220MHz 35.25 (Margin 11.28dB) - AV 41.69 (Margin 14.84dB) - QP | FCC 15.207 | Complied | |
| 3.2 | 15.247(a) | 6dB Bandwidth | LE: 686.0000kHz | ≥500kHz | Complied | |
| 3.3 | 15.247(b) | RF Output Power (Maximum Peak Conducted Output Power) | Power [dBm] LE: 3.64 | Power [dBm] LE:30 | Complied | |
| 3.4 | 15.247(e) | Power Spectral Density | PSD [dBm/100kHz] LE: -13.45 | PSD [dBm/3kHz]: 8 | Complied | |
| 3.5 | 15.247(d) | Transmitter Bandedge Emissions | Restricted Bands [dBuV/m at 3m]: 2483.52MHz 65.61 (Margin 8.39dB) - PK 53.00 (Margin 1.0dB) - AV | Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209 | Complied | |
| 3.6 | 15.247(d) | Transmitter Unwanted Emissions | Restricted Bands [dBuV/m at 3m]: 7440.00MHz 65.54 (Margin 8.46dB) – PK 49.20 (Margin 4.80dB) - AV | Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209 | Complied | |

SPORTON INTERNATIONAL INC. Page No. : 3 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01



Revision History

Report No.: FR640908AL

| Report No. | Version | Description | Issued Date |
|------------|---------|-------------------------|--------------|
| FR640908AL | Rev. 01 | Initial issue of report | May 23, 2016 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

SPORTON INTERNATIONAL INC. Page No. : 4 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01

1 General Description

1.1 Information

1.1.1 RF General Information

| RF General Information | | | | |
|--------------------------|----------------------|------------------------|----------------|-----------------------|
| Frequency Range (MHz) | Bluetooth Version | Ch. Frequency (MHz) | Channel Number | RF Output Power (dBm) |
| 2400-2483.5 | v4.0 LE | 2402-2480 | 0-39 [40] | 3.64 |

Report No.: FR640908AL

Note 1: Bluetooth LE (Low Energy) using GFSK modulation for DTS digital modulation. Note 2: RF output power specifies that Maximum Peak Conducted Output Power.

1.1.2 Antenna Information

| | | Antenna Category |
|-------------|------|--|
| \boxtimes | Inte | gral antenna (antenna permanently attached) |
| | | Temporary RF connector provided |
| | | No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path. |
| | Exte | ernal antenna (dedicated antennas) |
| | | Single power level with corresponding antenna(s). |
| | | Multiple power level and corresponding antenna(s). |

| Antenna General Information | | | |
|--------------------------------|----------------|-------|--|
| Ant. Cat. Ant. Type Gain (dBi) | | | |
| Integral | Metal PIFA ANT | -0.68 | |

SPORTON INTERNATIONAL INC. Page No. : 5 of 35
TEL: 886-3-327-3456 Report Version : Rev. 01



FCC Test Report

1.1.3 Type of EUT

| | Identify EUT | | | |
|---------------------------|---|----------------------------|--|--|
| EUT Serial Number | | N/A | | |
| Presentation of Equipment | | ☐ Production ; ☐ Prototype | | |
| | | Type of EUT | | |
| \boxtimes | Stand-alone | | | |
| | Combined (EUT where the radio part is fully integrated within another device) | | | |
| | Combined Equipment – Brand Name / Model No.: | | | |
| | Plug-in radio (EUT intended for a variety of host systems) | | | |
| | Host System – Brand Name / Model No.: | | | |
| | Other: | | | |

Report No.: FR640908AL

1.1.4 Test Signal Duty Cycle

| Operated Mode for Worst Duty Cycle | | | | |
|---|--|--|--|--|
| ○ Operated test mode for worst duty cycle | | | | |
| Test Signal Duty Cycle (x) | Power Duty Factor [dB] – (10 log 1/x) | | | |
| | 1.64 | | | |

1.1.5 EUT Operational Condition

| Supply Voltage | ☐ AC mains | □ DC | |
|-------------------|----------------------|------|--|
| Type of DC Source | ☐ External AC supply | | |

SPORTON INTERNATIONAL INC. : 6 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report No.: FR640908AL

1.2 Accessories and Support Equipment

| | Accessories | | | | |
|----------------|--------------|--|------------|---------------------|--|
| Pottony 1 | Brand Name | VARTA | Model Name | CP1254 A2 | |
| Battery 1 | Power Rating | 3.7 V _{dc} , 50mAh (Per pcs | Туре | Li-ion, Button cell | |
| LISP Charger 1 | Brand Name | Bang & Olufsen | Model Name | 1035500 | |
| USB Charger 1 | Signal Line | 1.27meter, non-shielded cable, with w/o ferrite core | | core | |

Reminder: Regarding to more detail and other information, please refer to user manual.

| Support Equipment - RF Conducted | | | | |
|----------------------------------|-------------------------------------|------|-----------|--|
| No. | No. Equipment Brand Name Model Name | | | |
| 1 | Notebook | DELL | E6400 | |
| 2 | AC Adapter for Notebook | DELL | HA65NM130 | |

| | Support Equipment - Radiated Emission | | | | |
|-------------------------------------|---------------------------------------|------|-----------|--|--|
| No. Equipment Brand Name Model Name | | | | | |
| 1 | Notebook | DELL | E5530 | | |
| 2 | AC Adapter for Notebook | DELL | DA90E3-00 | | |

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15
- ANSI C63.10-2013
- FCC KDB 558074 D01 v03r05

1.4 Testing Location Information

| | Testing Location | | | | | | | |
|--|--|--|--|-----------|----------------|--------------|--|--|
| \boxtimes | HWA YA ADD : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. | | | | | | | |
| | TEL: 886-3-327-3456 FAX: 886-3-327-0973 | | | | | | | |
| | Test Site Registration Number: 553509 | | | | | | | |
| | Test Condition Test Site No. Test Engineer Test Environment | | | | | | | |
| | AC Conduction | | | CO04-HY | Ryan | 24°C / 58% | | |
| RF Conducted TH01-HY Ryan 23.5°C / 63. | | | | | 23.5°C / 63.5% | | | |
| F | Radiated Emission | | | 03CH03-HY | Jeff | 22.3°C / 56% | | |

SPORTON INTERNATIONAL INC. Page No. : 7 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01



Report No. : FR640908AL

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

| Measurement Uncertainty | | | | | |
|-----------------------------------|---------------|---------|--|--|--|
| Test Item | Uncertainty | | | | |
| AC power-line conducted emissions | | ±2.3 dB | | | |
| Emission bandwidth, 6dB bandwidth | | ±0.6 % | | | |
| RF output power, conducted | | ±0.1 dB | | | |
| Power density, conducted | | ±0.6 dB | | | |
| Unwanted emissions, conducted | 9 – 150 kHz | ±0.4 dB | | | |
| | 0.15 – 30 MHz | ±0.4 dB | | | |
| | 30 – 1000 MHz | ±0.6 dB | | | |
| | 1 – 18 GHz | ±0.5 dB | | | |
| | 18 – 40 GHz | ±0.5 dB | | | |
| | 40 – 200 GHz | N/A | | | |
| All emissions, radiated | 9 – 150 kHz | ±2.5 dB | | | |
| | 0.15 – 30 MHz | ±2.3 dB | | | |
| | 30 – 1000 MHz | ±2.6 dB | | | |
| | 1 – 18 GHz | ±3.6 dB | | | |
| | 18 – 40 GHz | ±3.8 dB | | | |
| | 40 – 200 GHz | N/A | | | |
| Temperature | | ±0.8 °C | | | |
| Humidity | | ±5 % | | | |
| DC and low frequency voltages | | ±0.9% | | | |
| Time | | ±1.4 % | | | |
| Duty Cycle | | ±0.6 % | | | |

SPORTON INTERNATIONAL INC. Page No. : 8 of 35
TEL: 886-3-327-3456 Report Version : Rev. 01

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

| | Worst Modulation Used for Conformance Testing | | | |
|----------------------|---|-----------|-----------------|--|
| Bluetooth Version | Transmit Chains (N _{TX}) | Data Rate | Modulation Mode | |
| LE | 1 | 1 Mbps | LE-1Mbps | |

Report No.: FR640908AL

Note 1: Bluetooth LE (Low Energy) using GFSK modulation for DTS digital modulation.

Note 2: Modulation modes consist below configuration:

DSSS LE-1Mbps: GFSK (1Mbps)

2.2 The Worst Case Power Setting Parameter

| The Worst Case Power Setting Parameter | | | | | | |
|--|------------------|----------|----------|--|--|--|
| Test Software Version | Blue Test3 2.5.8 | | | | | |
| Modulation Mode | 2402 MHz | 2440 MHz | 2480 MHz | | | |
| LE,1Mbps | 5 | 5 | 5 | | | |

SPORTON INTERNATIONAL INC. : 9 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01

2.3 The Worst Case Measurement Configuration

| The Worst Case Mode for Following Conformance Tests | | |
|---|--|--|
| Tests Item AC power-line conducted emissions | | |
| Condition | AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz | |
| Operating Mode | Operating Mode Description | |
| 1 | EUT with Notebook via USB Cable & Transmitter | |

Report No.: FR640908AL

| The Worst Case Mode for Following Conformance Tests | | |
|--|--|--|
| Tests Item RF Output Power, Power Spectral Density, 6 dB Bandwidth | | |
| Test Condition | Conducted measurement at transmit chains | |
| Modulation Mode | LE-1Mbps | |


| The Worst Case Mode for Following Conformance Tests | | | | | | |
|---|---|----------------------------|---------|--|--|--|
| Tests Item | Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions | | | | | |
| Test Condition | Radiated measurement | | | | | |
| | EUT will be placed in fixed position. | | | | | |
| User Position | EUT will be placed in mobile position and operating multiple positions. EUT shall be performed three orthogonal planes. | | | | | |
| | EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. | | | | | |
| Operating Mode | Operating Mode Description | | | | | |
| 1 | EUT with Battery & Transmitter | | | | | |
| 2 | 2 EUT with Notebook via USB Cable & Transmitter | | | | | |
| The operating mode 2 is | the worst case and it was | record in this test report | | | | |
| Modulation Mode | LE-1Mbps | | | | | |
| | X Plane | Y Plane | Z Plane | | | |
| Orthogonal Planes of EUT | | | | | | |
| Worst Planes of EUT | | | | | | |

SPORTON INTERNATIONAL INC. Page No. : 10 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01




Report No.: FR640908AL

Test Setup Diagram 2.4

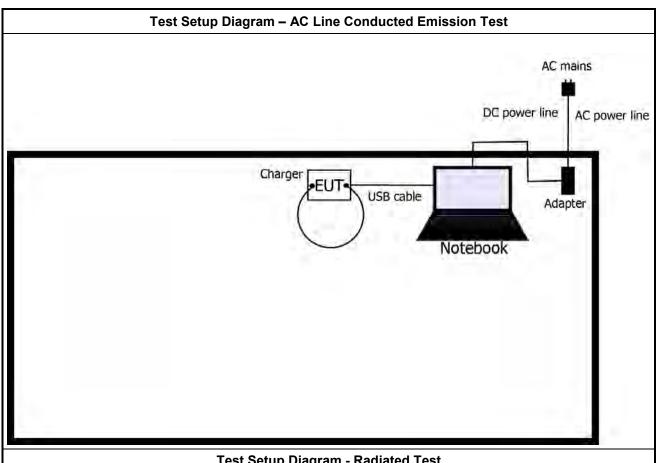

Test Setup Diagram - Radiated Test

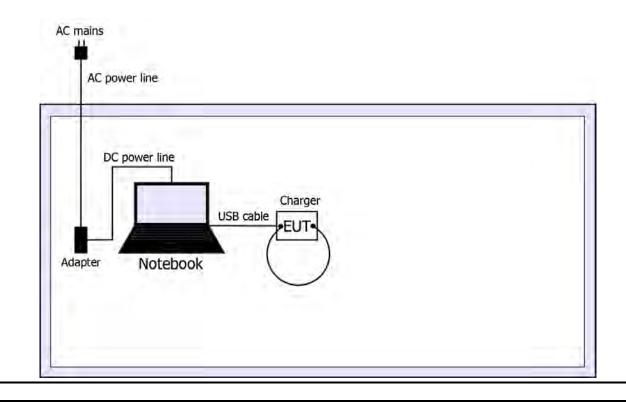

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : 11 of 35 Report Version : Rev. 01



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

| Frequency Emission (MHz) Quasi-Peak Average | | | | | |
|---|-----------|-----------|--|--|--|
| 0.15-0.5 | 66 - 56 * | 56 - 46 * | | | |
| 0.5-5 | 56 | 46 | | | |
| 5-30 60 50 | | | | | |

Report No.: FR640908AL


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

| | Test Method |
|-------------------|--|
| Refer as ANSI C63 | 10-2013, clause 6.2 for AC power-line conducted emissions. |


3.1.4 Test Setup

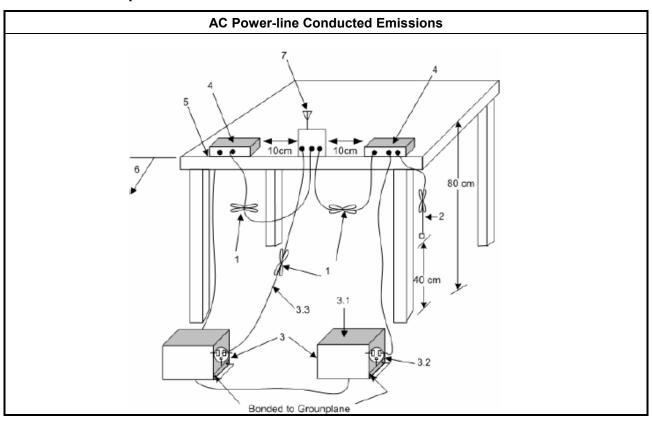

SPORTON INTERNATIONAL INC. Page No. : 12 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01



3.1.5 Test Result of AC Power-line Conducted Emissions

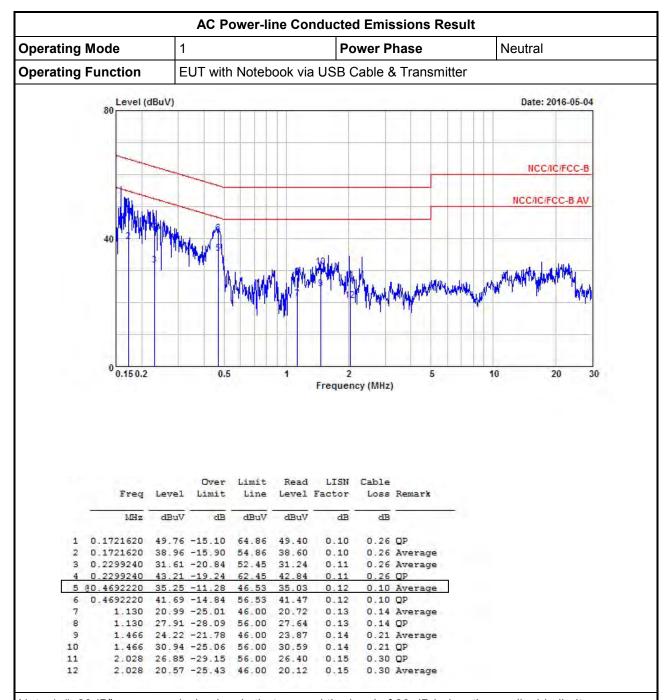

Report No.: FR640908AL

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

SPORTON INTERNATIONAL INC. Page No. : 13 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01

AC Power-line Conducted Emissions Result Operating Mode Power Phase Line **Operating Function** EUT with Notebook via USB Cable & Transmitter Level (dBuV) Date: 2016-05-04 NCC/IC/FCC-B NCC/IC/FCC-B AV 0.15 0.2 0.5 2 5 10 20 30 Frequency (MHz) Over Limit Read LISN Cable Limit Line Level Factor Loss Remark MHz dBuV dB dBuV dBuV dB dB 1 0.1687680 38.48 -16.54 55.02 38.12 0.11 0.25 Average 0.11 0.25 QP 0.1687680 49.48 -15.54 65.02 49.12 0.2313960 42.10 -20.30 62.40 41.73 0.11 0.26 QP 0.2313960 29.65 -22.75 52.40 29.28 0.11 0.26 Average 0.4676110 41.76 -14.80 56.56 41.54 0.12 0.10 QP 0.4676110 34.76 -11.80 46.56 34.54 0.12 0.10 Average 0.7016520 27.39 -28.61 56.00 27.16 0.7016520 18.11 -27.89 46.00 17.88 0.13 0.10 OP 0.13 0.10 Average 8 9 1.459 30.99 -25.01 56.00 30.64 0.14 0.21 QP 10 1.459 24.14 -21.86 46.00 23.79 0.14 0.21 Average 22.896 31.68 -28.32 60.00 31.12 0.36 0.20 QP 11

Report No.: FR640908AL

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

0.36

0.20 Average

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

22.896 26.29 -23.71 50.00 25.73

SPORTON INTERNATIONAL INC. Page No. : 14 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report

3.2 6dB Bandwidth

3.2.1 6dB Bandwidth Limit

| 6dB Bandwidth Limit | | | | | |
|--|--|--|--|--|--|
| Systems using digital modulation techniques: | | | | | |
| 6 dB bandwidth ≥ 500 kHz. | | | | | |

Report No.: FR640908AL


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

| | Test Method | | | | |
|-------------|--|---|--|--|--|
| \boxtimes | For the emission bandwidth shall be measured using one of the options below: | | | | |
| | \boxtimes | Refer as FCC KDB 558074 D01 v03r05, clause 8.1 Option 1 for 6 dB bandwidth measurement. | | | |
| | | Refer as FCC KDB 558074 D01 v03r05, clause 8.2 Option 2 for 6 dB bandwidth measurement. | | | |
| | | Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing. | | | |
| \boxtimes | For conducted measurement. | | | | |
| | \boxtimes | The EUT supports single transmit chain and measurements performed on this transmit chain. | | | |
| | | The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case. | | | |

3.2.4 Test Setup

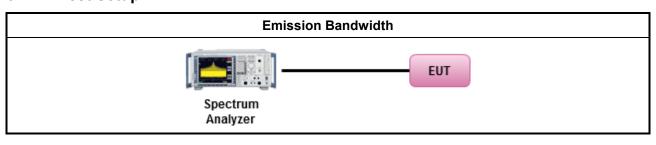


SPORTON INTERNATIONAL INC. Page No. : 15 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01

3.2.5 Test Result of Emission Bandwidth

| Emission Bandwidth Result | | | | | | |
|---|------|-----------|----------|--|--|--|
| Modulation Mode Freq. (MHz) 99% Bandwidth (kHz) 6dB Bandwidth (kHz) | | | | | | |
| LE-1Mbps | 2402 | 1050.6512 | 686.0000 | | | |
| LE-1Mbps 2440 | | 1046.3096 | 690.3000 | | | |
| LE-1Mbps | 2480 | 1046.3096 | 690.3000 | | | |
| Lim | it | N/A | ≥500 kHz | | | |
| Resu | ılt | Com | plied | | | |

Report No.: FR640908AL

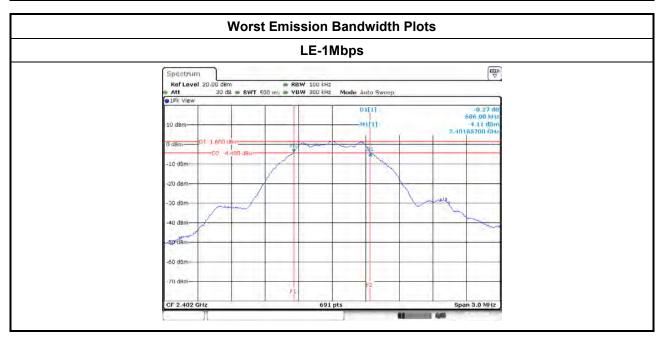

SPORTON INTERNATIONAL INC. Page No. : 16 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01

3.3 RF Output Power

3.3.1 RF Output Power Limit

| | RF Output Power Limit for Digital Modulation Systems | | | | | | |
|-------------|--|--|--|--|--|--|--|
| Max | Maximum Peak Conducted Output Power or Maximum Conducted Output Power Limit | | | | | | |
| \boxtimes | 2400-2483.5 MHz Band: | | | | | | |
| | ☐ If $G_{TX} \le 6$ dBi, then $P_{Out} \le 30$ dBm (1 W) | | | | | | |
| | Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm | | | | | | |
| e.i.r | .p. Power Limit: | | | | | | |
| \boxtimes | 2400-2483.5 MHz Band | | | | | | |
| | Point-to-multipoint systems (P2M): P _{eirp} ≤ 36 dBm (4 W) | | | | | | |
| G_{TX} | = maximum peak conducted output power or maximum conducted output power in dBm, = the maximum transmitting antenna directional gain in dBi. = e.i.r.p. Power in dBm. | | | | | | |

Report No.: FR640908AL


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

| | Test Method | | | | | | |
|-------------|-------------------------------------|---|--|--|--|--|--|
| \boxtimes | Maximum Peak Conducted Output Power | | | | | | |
| | \boxtimes | Refer as ANSI C63.10, clause 11.9.1.3) for peak power meter. | | | | | |
| | | Refer as ANSI C63.10, clause 11.9.1.1) for spectrum analyzer - (RBW ≥ EBW). | | | | | |
| | For | conducted measurement. | | | | | |
| | \boxtimes | The EUT supports single transmit chain and measurements performed on this transmit chain. | | | | | |
| | | The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case. | | | | | |

3.3.4 Test Setup

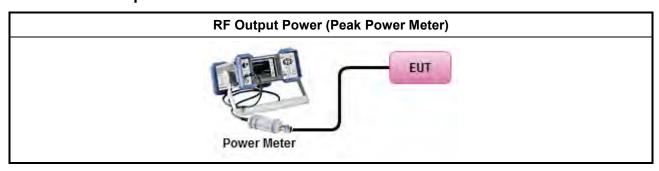

SPORTON INTERNATIONAL INC. Page No. : 17 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01



3.3.5 Test Result of Maximum Peak Conducted Output Power

| Maximum Peak Conducted Output Power Result | | | | | | | |
|--|------|-----------------------|-------------|-----------------------|------------|------------|--|
| Condition | | RF Output Power (dBm) | | | | | |
| Modulation Mode Freq. (MHz) | | RF Output Power | Power Limit | Antenna Gain (dBi) | EIRP Power | EIRP Limit | |
| LE-1Mbps | 2402 | 3.62 | 30 | -0.68 | 2.94 | 36 | |
| LE-1Mbps | 2440 | 3.64 | 30 | -0.68 | 2.96 | 36 | |
| LE-1Mbps | 2480 | 3.55 | 30 | -0.68 | 2.87 | 36 | |
| Result | | | Complied | | | | |

Report No.: FR640908AL

3.3.6 Test Result of Maximum Average Conducted Output Power

| Maximum Average Conducted Output Power Result | | | | | | | | | |
|---|-----------|------------------|---------------------|-----------------------|-----------------------|------------|--|--|--|
| Condition | Condition | | | RF Output Power (dBm) | | | | | |
| Modulation Mode Freq. (MHz) | | Average Power | Duty Factor (dB) | RF Output Power | Antenna Gain (dBi) | EIRP Power | | | |
| LE-1Mbps | 2402 | 1.13 | 1.64 | 2.77 | -0.68 | 2.09 | | | |
| LE-1Mbps | 2440 | 1.22 | 1.64 | 2.86 | -0.68 | 2.18 | | | |
| LE-1Mbps | 2480 | 1.08 | 1.64 | 2.72 | -0.68 | 2.04 | | | |
| Result | | | Complied | | | | | | |

SPORTON INTERNATIONAL INC. Page No. : 18 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report No.: FR640908AL

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

| | Power Spectral Density Limit |
|-------------|---|
| \boxtimes | Power Spectral Density (PSD) ≤ 8 dBm/3kHz |


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

| | | Test Method |
|-------------|--------------------------------|--|
| \boxtimes | outp the c cond of th | k power spectral density procedures that the same method as used to determine the conducted ut power. If maximum peak conducted output power was measured to demonstrate compliance to butput power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum ducted output power was measured to demonstrate compliance to the output power limit, then one he average PSD procedures shall be used, as applicable based on the following criteria (the peak procedure is also an acceptable option). |
| | | Refer as FCC KDB 558074 D01 v03r05, clause 10.2 Method PKPSD (RBW=3-100kHz;detector=peak) |
| | [duty | / cycle ≥ 98% or external video / power trigger] |
| | | Refer as FCC KDB 558074 D01 v03r05, clause 10.3 Method AVGPSD-1 (spectral trace averaging). |
| | | Refer as FCC KDB 558074 D01 v03r05, clause 10.4 Method AVGPSD-1 Alt. (slow sweep speed) |
| | duty | cycle < 98% and average over on/off periods with duty factor |
| | | Refer as FCC KDB 558074 D01 v03r05, clause 10.5 Method AVGPSD-2 (spectral trace averaging). |
| | | Refer as FCC KDB 558074 D01 v03r05, clause 10.6 Method AVGPSD-2 Alt. (slow sweep speed) |
| \boxtimes | For | conducted measurement. |
| | \boxtimes | The EUT supports single transmit chain and measurements performed on this transmit chain. |
| | | The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case. |

3.4.4 Test Setup

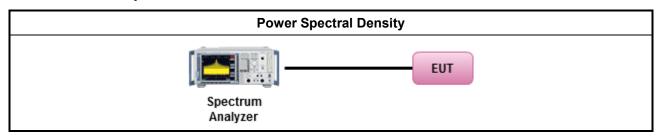


SPORTON INTERNATIONAL INC. Page No. : 19 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01



3.4.5 Test Result of Power Spectral Density

| Power Spectral Density Result | | | | | | | |
|-------------------------------|-------------|---------------------|-------------------------|--|--|--|--|
| Modulation Mode | Freq. (MHz) | PSD (dBm/100kHz) | PSD Limit (dBm/3kHz) | | | | |
| LE-1Mbps | 2402 | -13.64 | 8 | | | | |
| LE-1Mbps 2440 | | -13.45 | 8 | | | | |
| LE-1Mbps | 2480 | -13.48 | 8 | | | | |
| Res | ult | Com | plied | | | | |

Report No.: FR640908AL

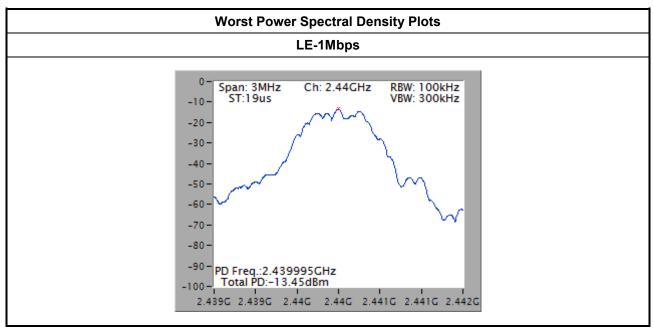


Note: 15.2dBm has been offset for 3kHz data.

SPORTON INTERNATIONAL INC. Page No. : 20 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01



3.5 Transmitter Bandedge Emissions

3.5.1 Transmitter Radiated Bandedge Emissions Limit

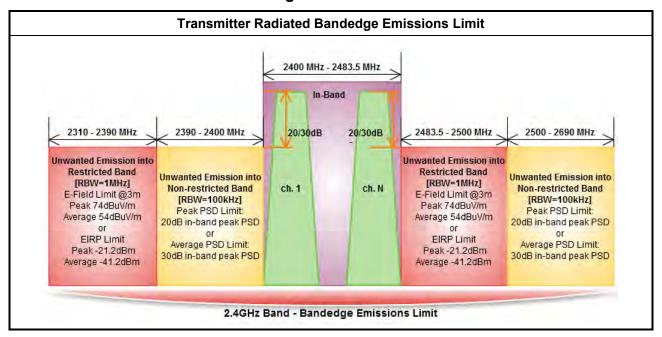

Report No.: FR640908AL

3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

SPORTON INTERNATIONAL INC. Page No. : 21 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01



FCC Test Report No.: FR640908AL


3.5.3 Test Procedures

| | | Test Method | | | | | |
|-------------|--|--|--|--|--|--|--|
| \boxtimes | The | average emission levels shall be measured in [duty cycle ≥ 98 or duty factor]. | | | | | |
| \boxtimes | Refer as ANSI C63.10, clause 6.10 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band. | | | | | | |
| \boxtimes | For t | he transmitter unwanted emissions shall be measured using following options below: | | | | | |
| | | Refer as FCC KDB 558074 D01 v03r05, clause 11 for unwanted emissions into non-restricted bands. | | | | | |
| | \boxtimes | Refer as FCC KDB 558074 D01 v03r05, clause 12 for unwanted emissions into restricted bands. | | | | | |
| | | Refer as FCC KDB 558074 D01 v03r05, clause 12.2.5.1 Option 1 (trace averaging for duty cycle ≥98%) | | | | | |
| | | Refer as FCC KDB 558074 D01 v03r05, clause 12.2.5.2 Option 2 (trace averaging + duty factor). | | | | | |
| | | Refer as FCC KDB 558074 D01 v03r05, clause 12.2.5.3 Option 3 (Reduced VBW≥1/T). | | | | | |
| | | | | | | | |
| | | Refer as ANSI C63.10, clause 4.1.4.2.4 average value of pulsed emissions. | | | | | |
| | | Refer as FCC KDB 558074 D01 v03r05, clause 11.3 and 12.2.4 measurement procedure peak limit. | | | | | |
| \boxtimes | For t | he transmitter bandedge emissions shall be measured using following options below: | | | | | |
| | | Refer as FCC KDB 558074 D01 v03r05, clause 13.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz). | | | | | |
| | \boxtimes | Refer as ANSI C63.10, clause 6.10 for band-edge testing. | | | | | |
| | | Refer as ANSI C63.10, clause 6.10.6.2 for marker-delta method for band-edge measurements. | | | | | |
| \boxtimes | | radiated measurement, refer as FCC KDB 558074 D01 v03r05, clause 12.2.7 and ANSI C63.10, se 6.6. Test distance is 3m. | | | | | |
| | For | conducted measurement, refer as FCC KDB 558074 D01 v03r05, clause 12.2.2. | | | | | |

SPORTON INTERNATIONAL INC. Page No. : 22 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01



3.5.4 Test Setup

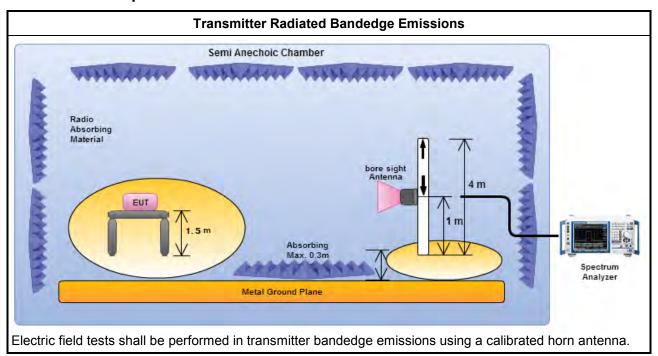

Report No.: FR640908AL

3.5.5 Transmitter Radiated Bandedge Emissions

| 2400-2483.5MHz Transmitter Radiated Bandedge Emissions (Non-restricted Band) | | | | | | | | | |
|--|-----------------|------------------------|-------------------------------------|-------------|--------------------------------------|----------------|------------|------|--|
| Modulation | N _{TX} | Test Freq. (MHz) | In-band PSD [i] (dBuV/100kHz) | Freq. (MHz) | Out-band PSD [o] (dBuV/100kHz) | [i] - [o] (dB) | Limit (dB) | Pol. | |
| LE-1Mbps | 1 | 2402 | 97.57 | 2399.964 | 56.86 | 40.71 | 20 | Н | |
| LE-1Mbps | 1 | 2480 | 99.44 | 2508.320 | 53.40 | 46.04 | 20 | Н | |
| Note 1: Measurement worst emissions of receive antenna polarization | | | | | | | | | |

| 2400-2483.5MHz Transmitter Radiated Bandedge Emissions (Restricted Band) | | | | | | | | | | |
|--|-----------------|----------------|----------------------------|----------------------|-------------------------|-------------------------|----------------------|-------------------------|-------------------------|------|
| Modulation Mode | N _{TX} | Freq. (MHz) | Measure Distance (m) | Freq. (MHz) PK | Level (dBuV/m) PK | Limit (dBuV/m) PK | Freq. (MHz) AV | Level (dBuV/m) AV | Limit (dBuV/m) AV | Pol. |
| LE-1Mbps | 1 | 2402 | 3 | 2328.360 | 64.01 | 74 | 2329.584 | 50.83 | 54 | Н |
| LE-1Mbps | 1 | 2480 | 3 | 2483.680 | 65.61 | 74 | 2483.520 | 53.00 | 54 | Н |

Note 1: Measurement worst emissions of receive antenna polarization.

Note 2: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., LE VBW≥1/625us, VBW=3kHz.

SPORTON INTERNATIONAL INC. Page No. : 23 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01



3.6 Transmitter Unwanted Emissions

3.6.1 Transmitter Radiated Unwanted Emissions Limit

| Restricted Band Emissions Limit | | | | | | | |
|---------------------------------|-----------------------|-------------------------|----------------------|--|--|--|--|
| Frequency Range (MHz) | Field Strength (uV/m) | Field Strength (dBuV/m) | Measure Distance (m) | | | | |
| 0.009~0.490 | 2400/F(kHz) | 48.5 - 13.8 | 300 | | | | |
| 0.490~1.705 | 24000/F(kHz) | 33.8 - 23 | 30 | | | | |
| 1.705~30.0 | 30 | 29 | 30 | | | | |
| 30~88 | 100 | 40 | 3 | | | | |
| 88~216 | 150 | 43.5 | 3 | | | | |
| 216~960 | 200 | 46 | 3 | | | | |
| Above 960 | 500 | 54 | 3 | | | | |

Report No.: FR640908AL

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

| Un-restricted Band Emissions Limit | | | | |
|------------------------------------|------------|--|--|--|
| RF output power procedure | Limit (dB) | | | |
| Peak output power procedure | 20 | | | |
| Average output power procedure | 30 | | | |

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

SPORTON INTERNATIONAL INC. Page No. : 24 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01



3.6.3 Test Procedures


| | | | Test Method |
|-------------|---------------------------------|-------------------------------|--|
| | perfo equi extra dista | orme pmei apola ance | ments may be performed at a distance other than the limit distance provided they are not d in the near field and the emissions to be measured can be detected by the measurement nt. When performing measurements at a distance other than that specified, the results shall be ted to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear for field-strength measurements, inverse of linear distance-squared for power-density ments). |
| \boxtimes | The | aver | age emission levels shall be measured in [duty cycle ≥ 98 or duty factor]. |
| \boxtimes | For | the tr | ansmitter unwanted emissions shall be measured using following options below: |
| | | Refe ban | er as FCC KDB 558074 D01 v03r05, clause 11 for unwanted emissions into non-restricted ds. |
| | \boxtimes | Ref | er as FCC KDB 558074 D01 v03r05, clause 12 for unwanted emissions into restricted bands. |
| | | | Refer as FCC KDB 558074 D01 v03r05, clause 12.2.5.1 Option 1 (trace averaging for duty cycle \geq 98%) |
| | | | Refer as FCC KDB 558074 D01 v03r05, clause 12.2.5.2 Option 2 (trace averaging + duty factor). |
| | | | Refer as FCC KDB 558074 D01 v03r05, clause 12.2.5.3 Option 3 (Reduced VBW≥1/T). |
| | | | Refer as ANSI C63.10, clause 4.1.4.2.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time. |
| | | | Refer as ANSI C63.10, clause 4.1.4.2.4 average value of pulsed emissions. |
| | | | Refer as FCC KDB 558074 D01 v03r05, clause 11.3 and 12.2.4 measurement procedure peak limit. |
| | | | Refer as FCC KDB 558074 D01 v03r05, clause 12.2.3 measurement procedure Quasi-Peak limit. |
| \boxtimes | For | radia | ted measurement, refer as FCC KDB 558074 D01 v03r05, clause 12.2.7. |
| | \boxtimes | Ref | er as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m. |
| | \boxtimes | Ref | er as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m. |
| | \boxtimes | Ref | er as ANSI C63.10, clause 6.6 for radiated emissions above 1 GHz and test distance is 3m. |
| | For 12.2 | | lucted and cabinet radiation measurement, refer as FCC KDB 558074 D01 v03r05, clause |

Report No.: FR640908AL

SPORTON INTERNATIONAL INC. Page No. : 25 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01




3.6.4 Test Setup

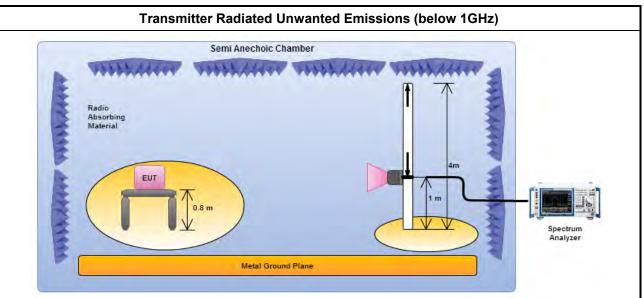

Report No.: FR640908AL

Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna.

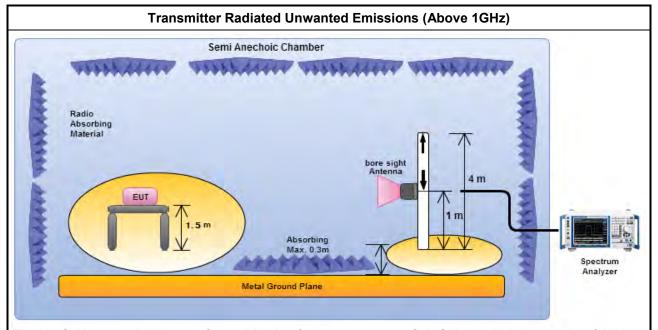


Electric field tests shall be performed in the frequency range of 1 GHz to 10th harmonic of highest fundamental frequency or 40 GHz using a calibrated horn antenna.

3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)


All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

SPORTON INTERNATIONAL INC. Page No. : 26 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01

3.6.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)



Report No.: FR640908AL

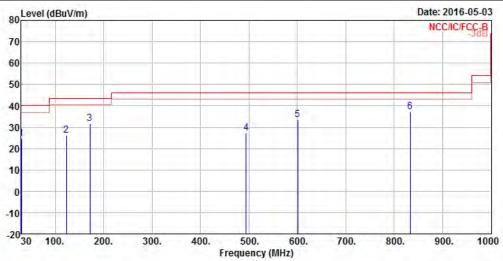

| | Freq | Level | Over Limit | | | Antenna Factor | | | Remark |
|---|---------|--------|---------------|--------|-------|-------------------|------|-------|--------|
| - | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | |
| 1 | 30.000 | 24.69 | -15.31 | 40.00 | 25.86 | 25.62 | 0.78 | 27.57 | Peak |
| 2 | 123.120 | 26.12 | -17.38 | 43.50 | 32.88 | 18.77 | 1.72 | 27.25 | Peak |
| 3 | 171.620 | 31.53 | -11.97 | 43.50 | 40.64 | 15.89 | 2.07 | 27.07 | Peak |
| 4 | 494.630 | 27.32 | -18.68 | 46.00 | 27.89 | 23.71 | 3.54 | 27.82 | Peak |
| 5 | 600.360 | 33.64 | -12.36 | 46.00 | 32.72 | 24.84 | 4.07 | 27.99 | QP |
| 6 | 833.160 | 37.17 | -8.83 | 46.00 | 33.28 | 26.97 | 4.65 | 27.73 | Peak |
| | | | | | | | | | |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).

Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : 27 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01


FCC Test Report

Transmitter Radiated Unwanted Emissions

Operating Mode 2 Polarization H

Operating Function EUT with Notebook via USB Cable & Transmitter

Report No.: FR640908AL

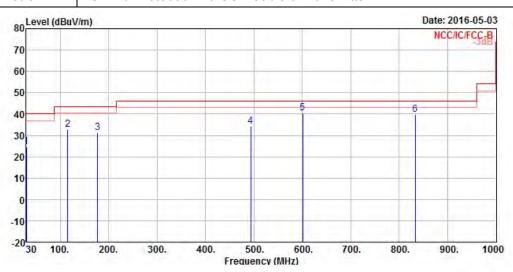

| | Freq | Level | Over Limit | 77777 | 0.5000 | Antenna Factor | | | |
|---|---------|-------|---------------|-------|--------|-------------------|------|-------|------|
| | | | dB | | dBuV | dB/m | | | |
| 1 | 30.000 | 24.63 | -15.37 | 40.00 | 25.80 | 25.62 | 0.78 | 27.57 | Peak |
| 2 | 115.360 | 32.78 | -10.72 | 43.50 | 39.75 | 18.65 | 1.66 | 27.28 | Peak |
| 3 | 177.440 | 31.12 | -12.38 | 43.50 | 40.39 | 15.67 | 2.11 | 27.05 | Peak |
| 4 | 493.660 | 34.06 | -11.94 | 46.00 | 34.64 | 23.70 | 3.54 | 27.82 | Peak |
| 5 | 600.360 | 40.53 | -5.47 | 46.00 | 39.61 | 24.84 | 4.07 | 27.99 | Peak |
| 6 | 833.160 | 39.95 | -6.05 | 46.00 | 36.06 | 26.97 | 4.65 | 27.73 | Peak |
| | | | | | | | | | |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).

Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC. Page No. : 28 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report

3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)

| Transmitter Radiated Unwanted Emissions | | | | | | | | |
|---|----------|------------------|------|--|--|--|--|--|
| Modulation Mode | LE-1Mbps | Test Freq. (MHz) | 2402 | | | | | |
| Operating Function | Transmit | Polarization | V | | | | | |

Report No.: FR640908AL

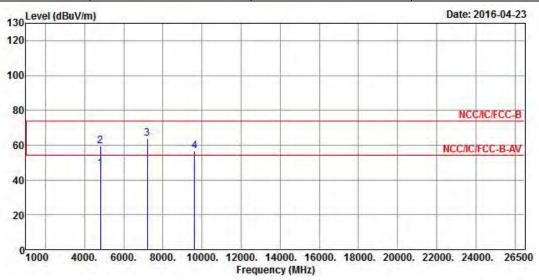


| | Freq | Level | | Limit Line | | | | And the second second | Remark |
|---|----------|--------|--------|---------------|-------|-------|------|-----------------------|---------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | - |
| 1 | 4804.000 | 46.34 | -7.66 | 54.00 | 40.51 | 33.02 | 5.36 | 32.55 | Average |
| 2 | 4804.000 | 59.52 | -14.48 | 74.00 | 53.69 | 33.02 | 5.36 | 32.55 | Peak |
| 3 | 7206.000 | 63.84 | | | 53.83 | 35.74 | 7.04 | 32.77 | Peak |
| 4 | 9608.000 | 56.45 | | | 43.27 | 38.11 | 8.29 | 33.22 | Peak |

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (97.80 dBuV/m).
- Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., LE VBW≥1/625us, VBW=3kHz.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : 29 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01

Report No.: FR640908AL

| Transmitter Radiated Unwanted Emissions | | | | | | | | |
|---|----------|------------------|------|--|--|--|--|--|
| Modulation Mode | LE-1Mbps | Test Freq. (MHz) | 2402 | | | | | |
| Operating Function | Transmit | Polarization | Н | | | | | |

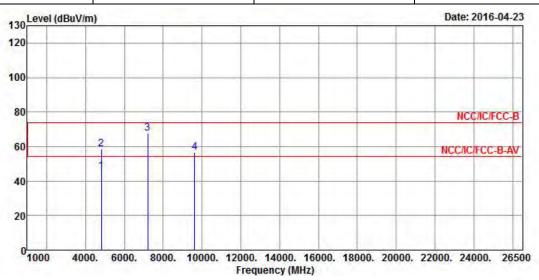


| Freq | Freq | Level | | | The same of | | | The state of the s | Remark |
|----------|---|--|--|--|---|---|--|--|--------|
| MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | |
| 4804.000 | 45.53 | -8.47 | 54.00 | 39.70 | 33.02 | 5.36 | 32.55 | Average | |
| 4804.000 | 58.52 | -15.48 | 74.00 | 52.69 | 33.02 | 5.36 | 32.55 | Peak | |
| 7206.000 | 67.65 | | | 57.64 | 35.74 | 7.04 | 32.77 | Peak | |
| 9608.000 | 56.51 | | | 43.33 | 38.11 | 8.29 | 33.22 | Peak | |
| | MHz 4804.000 4804.000 7206.000 | MHz dBuV/m 4804.000 45.53 4804.000 58.52 7206.000 67.65 | Freq Level Limit MHz dBuV/m dB 4804.000 45.53 -8.47 4804.000 58.52 -15.48 7206.000 67.65 | Freq Level Limit Line MHz dBuV/m dB dBuV/m 4804.000 45.53 -8.47 54.00 4804.000 58.52 -15.48 74.00 7206.000 67.65 | Freq Level Limit Line Level MHz dBuV/m dB dBuV/m dBuV 4804.000 45.53 -8.47 54.00 39.70 4804.000 58.52 -15.48 74.00 52.69 7206.000 67.65 57.64 | Freq Level Limit Line Level Factor MHz dBuV/m dB dBuV/m dBuV dB/m 4804.000 45.53 -8.47 54.00 39.70 33.02 4804.000 58.52 -15.48 74.00 52.69 33.02 7206.000 67.65 57.64 35.74 | Freq Level Limit Line Level Factor Loss MHz dBuV/m dB dBuV/m dBuV dB/m dB 4804.000 45.53 -8.47 54.00 39.70 33.02 5.36 4804.000 58.52 -15.48 74.00 52.69 33.02 5.36 7206.000 67.65 57.64 35.74 7.04 | Freq Level Limit Line Level Factor Loss Factor MHz dBuV/m dB dBuV/m dBuV dB/m dB dB 4804.000 45.53 -8.47 54.00 39.70 33.02 5.36 32.55 4804.000 58.52 -15.48 74.00 52.69 33.02 5.36 32.55 7206.000 67.65 57.64 35.74 7.04 32.77 | |

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (97.80 dBuV/m).
- Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., LE VBW≥1/625us. VBW=3kHz.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : 30 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01

Report No. : FR640908AL

| Transmitter Radiated Unwanted Emissions | | | | | | | | |
|---|----------|------------------|------|--|--|--|--|--|
| Modulation Mode | LE-1Mbps | Test Freq. (MHz) | 2440 | | | | | |
| Operating Function | Transmit | Polarization | V | | | | | |

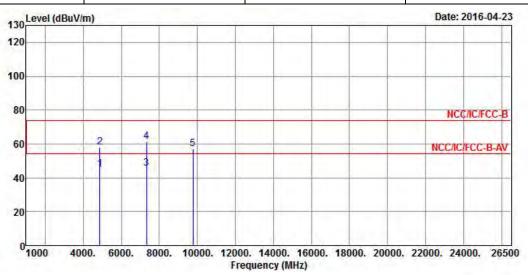


| | Freq | Level | Over Limit | | | Antenna Factor | | Preamp Factor | | |
|---|----------|--------|---------------|--------|-------|-------------------|------|------------------|---------|--|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | |
| 1 | 4880.000 | 44.95 | -9.05 | 54.00 | 38.81 | 33.16 | 5.51 | 32.53 | Average | |
| 2 | 4880.000 | 57.98 | -16.02 | 74.00 | 51.84 | 33.16 | 5.51 | 32.53 | Peak | |
| 3 | 7320.000 | 45.76 | -8.24 | 54.00 | 35.50 | 36.05 | 7.02 | 32.81 | Average | |
| 4 | 7320.000 | 61.42 | -12.58 | 74.00 | 51.16 | 36.05 | 7.02 | 32.81 | Peak | |
| 5 | 9760.000 | 57.31 | | | 43.90 | 38.42 | 8.20 | 33.21 | Peak | |
| | | | | | | | | | | |

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (98.45 dBuV/m).
- Note 5: Average emission setting: RBW=1MHz; VBW \geq 1/T, where T is "Pulse On Time", e.g., LE VBW \geq 1/625us, VBW=3kHz.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : 31 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01

t Report No. : FR640908AL

| Transmitter Radiated Unwanted Emissions | | | | | | | | |
|---|----------|------------------|------|--|--|--|--|--|
| Modulation Mode | LE-1Mbps | Test Freq. (MHz) | 2440 | | | | | |
| Operating Function | Transmit | Polarization | Н | | | | | |

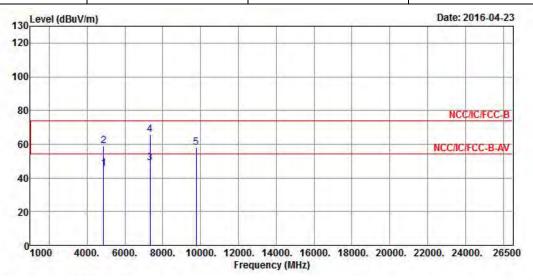

| | Freq | Level | Over Limit dB | | | Antenna Factor | | 1000 | Remark |
|---|----------|--------|---------------------|-------|-------|-------------------|------|-------|---------|
| | | dBuV/m | | | dBuV | dB/m | dB | dB | |
| 1 | 4880.000 | 45.67 | -8.33 | 54.00 | 39.53 | 33.16 | 5.51 | 32.53 | Average |
| 2 | 4880.000 | 59.11 | -14.89 | 74.00 | 52.97 | 33.16 | 5.51 | 32.53 | Peak |
| 3 | 7320.000 | 48.93 | -5.07 | 54.00 | 38.67 | 36.05 | 7.02 | 32.81 | Average |
| 4 | 7320.000 | 65.58 | -8.42 | 74.00 | 55.32 | 36.05 | 7.02 | 32.81 | Peak |
| 5 | 9760.000 | 57.84 | | | 44.43 | 38.42 | 8.20 | 33.21 | Peak |
| | | | | | | | | | |

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (98.45 dBuV/m).
- Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., LE VBW≥1/625us, VBW=3kHz.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC. Page No. : 32 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01

Transmitter Radiated Unwanted Emissions

Modulation Mode LE-1Mbps Test Freq. (MHz) 2480

Operating Function Transmit Polarization V

Report No.: FR640908AL

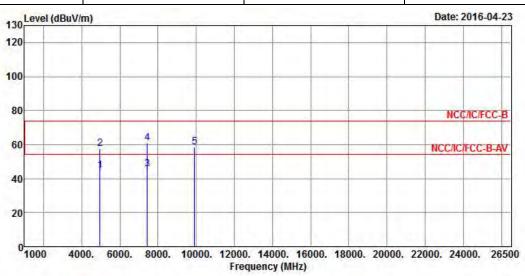


| | Freq | Level | Over Limit | | A LONG TO | Antenna Factor | | Preamp Factor | | |
|---|----------|--------|---------------|--------|-----------|-------------------|------|------------------|---------|--|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | |
| 1 | 4960.000 | 44.58 | -9.42 | 54.00 | 38.11 | 33.33 | 5.66 | 32.52 | Average | |
| 2 | 4960.000 | 57.50 | -16.50 | 74.00 | 51.03 | 33.33 | 5.66 | 32.52 | Peak | |
| 3 | 7440.000 | 45.64 | -8.36 | 54.00 | 35.08 | 36.37 | 7.04 | 32.85 | Average | |
| 4 | 7440.000 | 60.79 | -13.21 | 74.00 | 50.23 | 36.37 | 7.04 | 32.85 | Peak | |
| 5 | 9920.000 | 58.35 | | | 44.58 | 38.76 | 8.21 | 33.20 | Peak | |
| | | | | | | | | | | |

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (99.66 dBuV/m).
- Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., LE VBW≥1/625us. VBW=3kHz.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : 33 of 35
TEL: 886-3-327-3456 Report Version : Rev. 01

Report No.: FR640908AL

| Transmitter Radiated Unwanted Emissions | | | | | | |
|---|----------|------------------|------|--|--|--|
| Modulation Mode | LE-1Mbps | Test Freq. (MHz) | 2480 | | | |
| Operating Function | Transmit | Polarization | Н | | | |

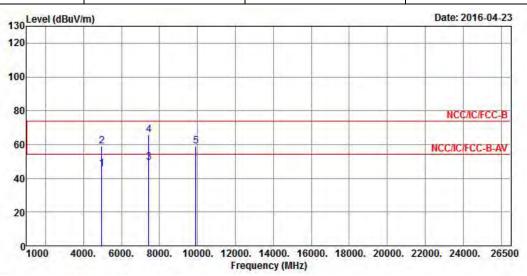

| Freq | Level | 100000 | 7 7 7 7 7 | 10000 | THE RESIDENCE | | 1 | |
|----------|---|--|---|---|--|--|--|--|
| MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | |
| 4960.000 | 45.70 | -8.30 | 54.00 | 39.23 | 33.33 | 5.66 | 32.52 | Average |
| 4960.000 | 58.82 | -15.18 | 74.00 | 52.35 | 33.33 | 5.66 | 32.52 | Peak |
| 7440.000 | 49.20 | -4.80 | 54.00 | 38.64 | 36.37 | 7.04 | 32.85 | Average |
| 7440.000 | 65.54 | -8.46 | 74.00 | 54.98 | 36.37 | 7.04 | 32.85 | Peak |
| 9920.000 | 58.88 | | | 45.11 | 38.76 | 8.21 | 33.20 | Peak |
| | MHz 4960.000 4960.000 7440.000 7440.000 | MHz dBuV/m 4960.000 45.70 4960.000 58.82 7440.000 49.20 7440.000 65.54 | Freq Level Limit MHz dBuV/m dB 4960.000 45.70 -8.30 4960.000 58.82 -15.18 7440.000 49.20 -4.80 7440.000 65.54 -8.46 | Freq Level Limit Line MHz dBuV/m dB dBuV/m 4960.000 45.70 -8.30 54.00 4960.000 58.82 -15.18 74.00 7440.000 49.20 -4.80 54.00 7440.000 65.54 -8.46 74.00 | Freq Level Limit Line Level MHz dBuV/m dB dBuV/m dBuV 4960.000 45.70 -8.30 54.00 39.23 4960.000 58.82 -15.18 74.00 52.35 7440.000 49.20 -4.80 54.00 38.64 7440.000 65.54 -8.46 74.00 54.98 | Freq Level Limit Line Level Factor MHz dBuV/m dB dBuV/m dBuV dB/m 4960.000 45.70 -8.30 54.00 39.23 33.33 4960.000 58.82 -15.18 74.00 52.35 33.33 7440.000 49.20 -4.80 54.00 38.64 36.37 7440.000 65.54 -8.46 74.00 54.98 36.37 | Freq Level Limit Line Level Factor Loss MHz dBuV/m dB dBuV/m dBuV dB/m dB 4960.000 45.70 -8.30 54.00 39.23 33.33 5.66 4960.000 58.82 -15.18 74.00 52.35 33.33 5.66 7440.000 49.20 -4.80 54.00 38.64 36.37 7.04 7440.000 65.54 -8.46 74.00 54.98 36.37 7.04 | Freq Level Limit Line Level Factor Loss Factor MHz dBuV/m dB dBuV/m dBuV dB/m dB dB 4960.000 45.70 -8.30 54.00 39.23 33.33 5.66 32.52 4960.000 58.82 -15.18 74.00 52.35 33.33 5.66 32.52 7440.000 49.20 -4.80 54.00 38.64 36.37 7.04 32.85 7440.000 65.54 -8.46 74.00 54.98 36.37 7.04 32.85 |

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (99.66 dBuV/m).
- Note 5: Average emission setting: RBW=1MHz; VBW \geq 1/T, where T is "Pulse On Time", e.g., LE VBW \geq 1/625us, VBW=3kHz.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : 34 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01



4 Test Equipment and Calibration Data

< AC Conduction >

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Last Cal. | Calibration Due Date |
|--------------|--------------------------------|-----------|----------------|-----------------|--------------------------|-------------------------|
| EMC Receiver | KETSIGHT | N9038A | MY54130031 | 20Hz ~ 8.4GHz | Apr. 14, 2016 | Apr. 13, 2017 |
| LISN | SCHWARZBECK MESS-ELEKTRONIK | NSLK 8127 | 8127-477 | 9kHz ~ 30MHz | Jan. 26, 2016 | Jan. 25, 2017 |
| RF Cable-CON | HUBER+SUHNER | RG213/U | 07611832020001 | 9kHz ~ 30MHz | Oct. 30, 2015 | Oct. 29, 2016 |
| EMI Filter | LINDGREN | LRE-2030 | 2651 | < 450 Hz | NCR | NCR |

Report No.: FR640908AL

< RF Conducted >

| Instrument | Manufacturer | Model No. | Serial No. Characteristics | | Calibration Last Cal. | Calibration Due Date |
|-------------------|--------------|-----------|----------------------------|----------------|--------------------------|-------------------------|
| Spectrum Analyzer | R&S | FSV 40 | 101500 | 9KHz~40GHz | May 06, 2015 | May 05, 2016 |
| Signal Generator | R&S | SMR40 | 100116 | 10MHz ~ 40GHz | Jul. 28, 2015 | Jul. 27, 2016 |
| Power Sensor | Anritsu | MA2411B | 0917017 | 300MHz ~ 40GHz | Feb. 04 ,2016 | Feb. 03 ,2017 |
| Power Meter | Anritsu | ML2495A | 0949003 | 300MHz ~ 40GHz | Feb. 04, 2016 | Feb. 03, 2017 |

< Radiated Emission >

| Instrument | Manufacturer | Model No. | Serial No. Characteristics | | Calibration Last Cal. | Calibration Due Date |
|--------------------------------|-------------------|-----------|----------------------------|--------------------|--------------------------|-------------------------|
| 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M | 03CH03-HY | 30MHz ~ 1GHz 3m | Nov. 28, 2015 | Nov. 27, 2016 |
| 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M | 03CH03-HY | 1GHz ~ 18GHz 3m | Dec. 16, 2015 | Dec. 15, 2016 |
| Amplifier | HP | 8447D | 2944A08033 | 10kHz ~ 1.3GHz | May 11, 2015 | May 10, 2016 |
| Amplifier | Agilent | 8449B | 3008A02120 | 1GHz ~ 26.5GHz | Sep. 02, 2015 | Sep. 01, 2016 |
| Spectrum | R&S | FSV40 | 101513 | 9kHz ~ 40GHz | Feb. 16, 2016 | Feb. 15, 2017 |
| Bilog Antenna | SCHAFFNER | CBL 6112D | 22237 | 30MHz ~ 1GHz | Sep. 18, 2015 | Sep. 17, 2016 |
| Horn Antenna | ETS · LINDGREN | 3115 | 6741 | 1GHz ~ 18GHz | Jul. 15, 2015 | Jul. 14, 2016 |
| Horn Antenna | SCHWARZBECK | BBHA9170 | BBHA9170154 | 18GHz ~ 40GHz | Jan. 29, 2016 | Jan. 28, 2017 |
| Loop Antenna | R&S | HFH2-Z2 | 100330 | 9 kHz~30 MHz | Nov.16.2015 | Nov.15.2017 |

SPORTON INTERNATIONAL INC. Page No. : 35 of 35 TEL: 886-3-327-3456 Report Version : Rev. 01