



FCC 47 CFR PART 15 SUBPART E

for

Wireless Speaker

Model: Beoplay M3

Brand: Bang & Olufsen

Test Report Number:

C170503Z05-RP1-4

Issued Date: June 26, 2017

Issued for

Bang & Olufsen a/s

Peter Bangs Vej 15, 7600 Struer, Denmark

Issued by:

Compliance Certification Services (Shenzhen) Inc.

No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd.,
Guan Lan Town, Baoan District, Shenzhen, China

TEL: 86-755-28055000

FAX: 86-755-28055221

E-Mail: service@ccssz.com



Certificate Number: 2861.01

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc. This document may be altered or revised by Compliance Certification Services (Shenzhen) Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The TEST RESULTS in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	June 26, 2017	Initial Issue	ALL	Sabrina Wang



TABLE OF CONTENTS

1. TEST CERTIFICATION	4
2. EUT DESCRIPTION	5
3. TEST METHODOLOGY.....	9
3.1 EUT CONFIGURATION.....	9
3.2 EUT EXERCISE	9
3.3 GENERAL TEST PROCEDURES	9
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	10
3.5 DESCRIPTION OF TEST MODES	11
4. SETUP OF EQUIPMENT UNDER TEST	13
4.1 DESCRIPTION OF SUPPORT UNITS.....	13
4.2 CONFIGURATION OF SYSTEM UNDER TEST	13
5. FACILITIES AND ACCREDITATIONS	14
5.1 FACILITIES	14
5.2 EQUIPMENT	14
5.3 ACCREDITATIONS	14
5.4 MEASUREMENT UNCERTAINTY	15
6. FCC PART 15 REQUIREMENTS	16
6.1 26dB EMISSION BANDWIDTH	16
6.2 6dB BANDWIDTH MEASUREMENT	73
6.3 ANTENNA GAIN	89
6.4 PEAK POWER	92
6.5 BAND EDGES MEASUREMENT	104
6.6 PEAK POWER SPECTRAL DENSITY	140
6.7 RADIATED UNDESIRABLE EMISSION.....	209
6.8 CONDUCTED UNDESIRABLE EMISSION	291
6.9 POWERLINE CONDUCTED EMISSIONS.....	318
6.10 FREQUENCY STABILITY.....	324



1. TEST CERTIFICATION

Product	Wireless Speaker
Model	Beoplay M3
Brand	Bang & Olufsen
Tested	May 3~ June 26, 2017
Applicant	Bang & Olufsen a/s Peter Bangs Vej 15, 7600 Struer, Denmark
Manufacturer	Bang & Olufsen a/s Peter Bangs Vej 15, 7600 Struer, Denmark

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart E	No non-compliance noted

We hereby certify that:

Compliance Certification Services (Shenzhen) Inc. tested the above equipment. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.10: 2013** and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.407、FCC 14-30.

The TEST RESULTS of this report relate only to the tested sample identified in this report.

Approved by:

Sunday Hu
Supervisor of EMC Dept.
Compliance Certification Services (Shenzhen) Inc.

Reviewed by:

Ruby Zhang
Supervisor of Report Dept.
Compliance Certification Services (Shenzhen) Inc.



2. EUT DESCRIPTION

Product	Wireless Speaker
Model Number	Beoplay M3
Brand	Bang & Olufsen
Model Discrepancy	N/A
Serial Number	C170503Z05-RP1-4
Received Date	May 3, 2017
Power Supply	Input: AC100-240V ~ 50/60Hz
Frequency Range	UNII Band I: IEEE 802.11a, 802.11n HT20 : 5180MHz ~ 5240MHz; IEEE 802.11n HT40: 5190MHz ~ 5230MHz IEEE 802.11ac 20 5180MHz ~ 5240MHz; IEEE 802.11ac 40 5190MHz ~ 5230MHz IEEE 802.11ac 80: 5210MHz UNII Band II IEEE 802.11a, 802.11n HT20 : 5260MHz ~ 5320MHz IEEE 802.11n HT40: 5270MHz ~ 5310MHz IEEE 802.11ac 20 5260MHz ~ 5320MHz IEEE 802.11ac 40 5270MHz ~ 5310MHz IEEE 802.11ac 80: 5290MHz UNII Band III IEEE 802.11a, 802.11n HT20 : 5500MHz ~ 5700MHz IEEE 802.11n HT40: 5510MHz ~ 5670MHz IEEE 802.11ac 20 5500MHz ~ 5700MHz IEEE 802.11ac 40 5510MHz ~ 5670MHz IEEE 802.11ac 80: 5530MHz UNII Band IV IEEE 802.11a, 802.11n HT20 : 5745MHz ~ 5825MHz IEEE 802.11n HT40: 5755MHz ~ 5795MHz IEEE 802.11ac 20 5745MHz ~ 5825MHz IEEE 802.11ac 40 5755MHz ~ 5795MHz IEEE 802.11ac 80: 5775MHz
Transmit Power	UNII Band I: IEEE 802.11a: 15.40dBm (Antenna 0) 12.40dBm (Antenna 1) IEEE 802.11n HT 20 MHz mode: 17.47dBm (Combine with Antenna 0 and Antenna 1) IEEE 802.11n HT 40 MHz mode: 16.56dBm (Combine with Antenna 0 and Antenna 1) IEEE 802.11ac 20 17.56dBm (Combine with Antenna 0 and Antenna 1) IEEE 802.11ac 40 16.64dBm (Combine with Antenna 0 and Antenna 1) IEEE 802.11ac 80: 13.63dBm (Combine with Antenna 0 and Antenna 1) UNII Band II IEEE 802.11a: 16.00dBm (Antenna 0) 12.70dBm (Antenna 1) IEEE 802.11n HT 20 MHz mode: 17.83dBm (Combine with Antenna 0 and Antenna 1) IEEE 802.11n HT 40 MHz mode: 17.13dBm (Combine with Antenna 0 and Antenna 1) IEEE 802.11ac 20 17.87dBm (Combine with Antenna 0 and Antenna 1) IEEE 802.11ac 40 17.19dBm (Combine with Antenna 0 and Antenna 1)



	IEEE 802.11ac 80: UNII Band III IEEE 802.11a: IEEE 802.11n HT 20 MHz mode: IEEE 802.11n HT 40 MHz mode: IEEE 802.11ac 20 IEEE 802.11ac 40 IEEE 802.11ac 80: UNII Band IV IEEE 802.11a: IEEE 802.11n HT 20 MHz mode: IEEE 802.11n HT 40 MHz mode: IEEE 802.11ac 20 IEEE 802.11ac 40 IEEE 802.11ac 80:	13.10dBm (Combine with Antenna 0 and Antenna 1) 17.10dBm (Antenna 0) 14.30dBm (Antenna 1) 19.07dBm (Combine with Antenna 0 and Antenna 1) 14.60dBm (Combine with Antenna 0 and Antenna 1) 19.12dBm (Combine with Antenna 0 and Antenna 1) 14.71dBm (Combine with Antenna 0 and Antenna 1) 13.86dBm (Combine with Antenna 0 and Antenna 1) 17.50dBm (Antenna 0) 14.70dBm (Antenna 1) 19.70dBm (Combine with Antenna 0 and Antenna 1) 14.67dBm (Combine with Antenna 0 and Antenna 1) 19.77dBm (Combine with Antenna 0 and Antenna 1) 14.74dBm (Combine with Antenna 0 and Antenna 1) 12.51dBm (Combine with Antenna 0 and Antenna 1)
Modulation Technique	OFDM (QPSK, BPSK, 16-QAM, 64-QAM)	
Transmit Data Rate	IEEE 802.11a mode: 48, 36, 24, 18, 12, 9, 6Mbps IEEE802.11n HT20MHz mode(800ns GI): 13,26,39,52,78,104,117,130Mbps IEEE802.11n HT40MHz mode(800ns GI): 27,54,81,108,162,216,243,270Mbps IEEE802.11ac 20 mode(800ns GI): 13,26,39,52,78,104,117,130Mbps IEEE802.11ac 40 mode(800ns GI): 27,54,81,108,162,216,243,270Mbps IEEE802.11ac 80 mode(800ns GI): 58.6,117,175.6,234,351,468,526.6, 585,702,780Mbps	
Number of Channels	UNII Band I: IEEE 802.11a, 802.11n HT20 : 4 Channels IEEE 802.11n HT40 : 2 Channels IEEE 802.11ac 20 4 Channels IEEE 802.11ac 40 2 Channels IEEE 802.11ac 80: 1 Channel UNII Band II IEEE 802.11a, 802.11n HT20 : 4 Channels IEEE 802.11n HT40: 2 Channels IEEE 802.11ac 20 4 Channels IEEE 802.11ac 40 2 Channels IEEE 802.11ac 80: 1 Channel UNII Band III IEEE 802.11a, 802.11n HT20 : 8 Channels IEEE 802.11n HT 40 MHz mode: 3 Channels IEEE 802.11ac 20 8 Channels IEEE 802.11ac 40 3 Channels IEEE 802.11ac 80: 1 Channels UNII Band IV IEEE 802.11a, 802.11n HT20 : 5 Channels IEEE 802.11n HT 40 MHz mode: 2 Channels IEEE 802.11ac 20 5 Channels IEEE 802.11ac 40 2 Channels IEEE 802.11ac 80: 1 Channel	
Antenna Specification	Embedded Antenna 0 with 4.26dBi gain (Max) Embedded Antenna 1 with 4.67dBi gain (Max) Directional gain: 7.49dBi	



Channels Spacing	IEEE 802.11a, 802.11n HT20 : 20MHz IEEE 802.11n HT40: 40MHz IEEE 802.11ac 20 : 20MHz IEEE 802.11ac 40: 40MHz IEEE 802.11ac 80: 80MHz
Temperature Range	0°C ~ +45°C

Note: 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

**Operation Frequency:**

UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII)	
CHANNEL	MHz
36	5180
38	5190
40	5200
42	5210
44	5220
46	5230
48	5240
52	5260
54	5270
56	5280
58	5290
60	5300
62	5310
64	5320
100	5500
102	5510
104	5520
106	5530
108	5540
110	5550
112	5560
116	5580
132	5660
134	5670
136	5680
140	5700
149	5745
151	5755
153	5765
155	5775
157	5785
159	5795
161	5805
165	5825

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: TTUBEPLAYM3 filing to comply with Section 15.407 of the FCC Part 15, Subpart E Rules and FCC 14-30.



3. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10. Radiated testing was performed at an antenna to EUT distance 3 meters.

The tests documented in this report were performed in accordance with ANSI C63.10: 2013 and FCC CFR 47 Part 15.207, 15.209, 15.407 and FCC 14-30.

Radio testing was performed according to KDB DA 02-2138, KDB 789033 D02, KDB 905462 D06;

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed for RF field strength measurement to meet the Commissions requirement, and is operated in a manner intended to generate the maximum emission in a continuous normal application.

3.2 EUT EXERCISE

The EUT is operated in the engineering mode to fix the TX frequency for the purposes of measurement.

According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is positioned at 0.8 m above the ground plane. According to the requirements in Section 6.2 of ANSI C63.10, the conducted emission from the EUT is measured in the frequency range between 0.15 MHz and 30MHz, using the CISPR Quasi-Peak detector mode.

Radiated Emissions

The EUT is placed on the turntable, which is 0.8 m (below 1GHz) /1.5m (Above 1GHz) above the ground plane. The turntable is then rotated for 360 degrees to determine the proper orientation for the maximum emission level. The EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission level. And, each emission is to be maximized by changing the horizontal and vertical polarization of the receiving antenna. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.4 to Section 6.6 of ANSI C63.10.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT is a 2x2 configuration spatial MIMO (2TX & 2RX) without beam forming function. Use Certification Tool 1.26 to control the EUT for staying in continuous transmitting mode was programmed.

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1: Normal	<input checked="" type="checkbox"/>
Radiated Emission	Mode 4: Continuously Transmitting	<input checked="" type="checkbox"/>

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.

UNII Band I:

IEEE 802.11a for 5180 ~ 5240MHz:

Channel Low (5180MHz), Channel Mid (5200MHz) and Channel High (5240MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT 20 MHz for 5180 ~ 5240MHz:

Channel Low (5180MHz), Channel Mid (5200MHz) and Channel High (5240MHz) with 13Mbps data rate were chosen for full testing.

IEEE 802.11n HT 40 MHz Channel for 5190 ~ 5230MHz:

Channel Low (5190MHz) and Channel High (5230MHz) with 27Mbps data rate were chosen for full testing.

IEEE 802.11ac 80 Channel for 5210MHz:

Channel Low (5210MHz) with 27Mbps data rate were chosen for full testing.



UNII Band II:

IEEE 802.11a for 5260 ~ 5320MHz:

Channel Low (5260MHz), Channel Mid (5300MHz) and Channel High (5320MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT 20 MHz for 5260 ~ 5320MHz:

Channel Low (5260MHz), Channel Mid (5300MHz) and Channel High (5320MHz) with 13Mbps data rate were chosen for full testing.

IEEE 802.11n HT 40 MHz Channel for 5270~ 5310MHz:

Channel Low (5270MHz) and Channel High (5310MHz) with 27Mbps data rate were chosen for full testing.

IEEE 802.11ac 80 Channel for 5290MHz:

Channel Low (5290MHz) with 27Mbps data rate were chosen for full testing.

UNII Band III:

IEEE 802.11a for 5500 ~ 5700MHz:

Channel Low (5500MHz), Channel Mid (5580MHz) and Channel High (5700MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT 20 MHz for 5500 ~ 5700MHz:

Channel Low (5500MHz), Channel Mid (5580MHz) and Channel High (5700MHz) with 13Mbps data rate were chosen for full testing.

IEEE 802.11n HT 40 MHz Channel for 5510~ 5670MHz:

Channel Low (5510MHz) and Channel High (5670MHz) with 27Mbps data rate were chosen for full testing.

IEEE 802.11ac 80 Channel for 5530MHz:

Channel Low (5530MHz) with 27Mbps data rate were chosen for full testing.

UNII Band IV:

IEEE 802.11a for 5745 ~ 5825MHz:

Channel Low (5745MHz), Channel Mid (5785MHz) and Channel High (5825MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT 20 MHz for 5745 ~ 5825MHz:

Channel Low (5745MHz), Channel Mid (5785MHz) and Channel High (5825MHz) with 13Mbps data rate were chosen for full testing.

IEEE 802.11n HT 40 MHz Channel for 5755~ 5795MHz:

Channel Low (5755MHz) and Channel High (5795MHz) with 27Mbps data rate were chosen for full testing.

IEEE 802.11ac 80 Channel for 5775MHz:

Channel Low (5775MHz) with 27Mbps data rate were chosen for full testing.



4. SETUP OF EQUIPMENT UNDER TEST

4.1 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1	Notebook	Probook 5310M	N/A	DoC	HP	Shielded 2.30m	Shielded 1.70m (AC Cable) Unshielded 1.80m (DC Cable)
2	802.11 ac Gigabit Router	Wireles-AC1200 Dual Band	N/A	DoC	ASUS	Unshielded 1.80m	Unshielded 1.50m

Note:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.2 CONFIGURATION OF SYSTEM UNDER TEST

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at
**No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd., Guan Lan Town,
Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.10, ANSI C63.7 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA	A2LA
China	CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI(C-3478, R-3135, T-652, G-10624)
Canada	INDUSTRY CANADA

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccssz.com>



5.4 MEASUREMENT UNCERTAINTY

Parameter	Uncertainty
RF frequency	+/- 1 * 10-5
RF power conducted	+/- 1,5 dB
RF power radiated	+/- 6 dB
Spurious emissions, conducted	+/- 3 dB
Spurious emissions, radiated	+/- 6 dB
Humidity	+/- 5 %
Temperature	+/- 1°C
Time	+/-10 %

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



6. FCC PART 15 REQUIREMENTS

6.1 26dB EMISSION BANDWIDTH

6.1.1 LIMIT

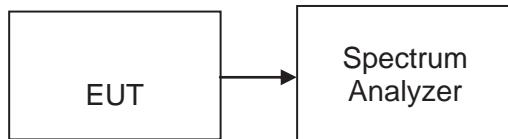
According to §15.403(c), for purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Compliance with the emissions limits is based on the use of measurement instrumentation employing a peak detector function with an instrument resolutions bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

6.1.2 MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY52221469	02/21/2017	02/20/2018

Remark: Each piece of equipment is scheduled for calibration once a year.

6.1.3 TEST CONFIGURATION



6.1.4 TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low-loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW > 1%EBW, VBW > RBW, Span >26dB bandwidth, Detector = Peak, and Sweep = auto.
4. Mark the peak frequency and -26dB (upper and lower) frequency.
5. Repeat until all the rest channels were investigated.



6.1.5 TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11a mode / 5180 ~ 5240MHz

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)	
		Antenna 0	Antenna 1
Low	5180	19.85	19.82
Mid	5200	19.73	19.89
High	5240	19.84	19.89

Test mode: IEEE 802.11a mode / 5260 ~ 5320MHz

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)	
		Antenna 0	Antenna 1
Low	5260	19.94	19.83
Mid	5300	19.87	19.70
High	5320	20.06	19.72

Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)	
		Antenna 0	Antenna 1
Low	5500	19.99	19.96
Mid	5580	19.88	19.70
High	5700	19.78	19.85

**Test mode: IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)	
		Antenna 0	Antenna 1
Low	5180	21.75	20.12
Mid	5200	20.81	20.20
High	5240	20.35	20.27

Test mode: IEEE 802.11n HT 20 MHz mode / 5260 ~ 5320MHz

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)	
		Antenna 0	Antenna 1
Low	5260	20.12	20.18
Mid	5300	20.22	20.05
High	5320	20.15	20.25

Test mode: IEEE 802.11n HT 20 MHz mode / 5500 ~ 5700MHz

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)	
		Antenna 0	Antenna 1
Low	5500	20.08	20.27
Mid	5580	20.20	20.28
High	5700	20.27	20.28

**Test mode: IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz**

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)	
		Antenna 0	Antenna 1
Low	5190	40.87	41.40
High	5230	40.82	40.83

Test mode: IEEE 802.11n HT 40 MHz mode / 5270 ~ 5310MHz

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)	
		Antenna 0	Antenna 1
Low	5270	41.06	40.67
High	5310	40.46	40.43

Test mode: IEEE 802.11n HT 40 MHz mode / 5510 ~ 5670MHz

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)	
		Antenna 0	Antenna 1
Low	5510	40.65	40.85
Mid	5550	40.01	39.66
High	5670	40.73	40.66

**Test mode: IEEE 802.11ac 20 mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)	
		Antenna 0	Antenna 1
Low	5180	20.46	20.36
Mid	5200	20.30	20.22
High	5240	20.13	20.03

Test mode: IEEE 802.11ac 20 mode / 5260 ~ 5320MHz

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)	
		Antenna 0	Antenna 1
Low	5260	20.14	20.09
Mid	5300	20.18	20.15
High	5320	20.22	20.15

Test mode: IEEE 802.11ac 20 mode / 5500 ~ 5700MHz

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)	
		Antenna 0	Antenna 1
Low	5500	20.25	20.19
Mid	5580	20.20	19.94
High	5700	20.30	20.17

**Test mode: IEEE 802.11ac 40 mode / 5190 ~ 5230MHz**

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)	
		Antenna 0	Antenna 1
Low	5190	41.11	40.17
High	5230	40.73	40.68

Test mode: IEEE 802.11ac 40 mode / 5270 ~ 5310MHz

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)	
		Antenna 0	Antenna 1
Low	5270	40.68	41.21
High	5310	40.72	40.65

Test mode: IEEE 802.11ac 40 mode / 5510 ~ 5670MHz

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)	
		Antenna 0	Antenna 1
Low	5510	40.59	40.03
Mid	5550	40.42	40.77
High	5670	40.57	40.39

**Test mode: IEEE 802.11ac 80 mode / 5210MHz**

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)	
		Antenna 0	Antenna 1
	5210	81.76	81.86

Test mode: IEEE 802.11ac 80 mode / 5290MHz

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)	
		Antenna 0	Antenna 1
	5290	81.36	81.93

Test mode: IEEE 802.11ac 80 mode / 5530MHz

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)	
		Antenna 0	Antenna 1
	5530	81.83	81.99

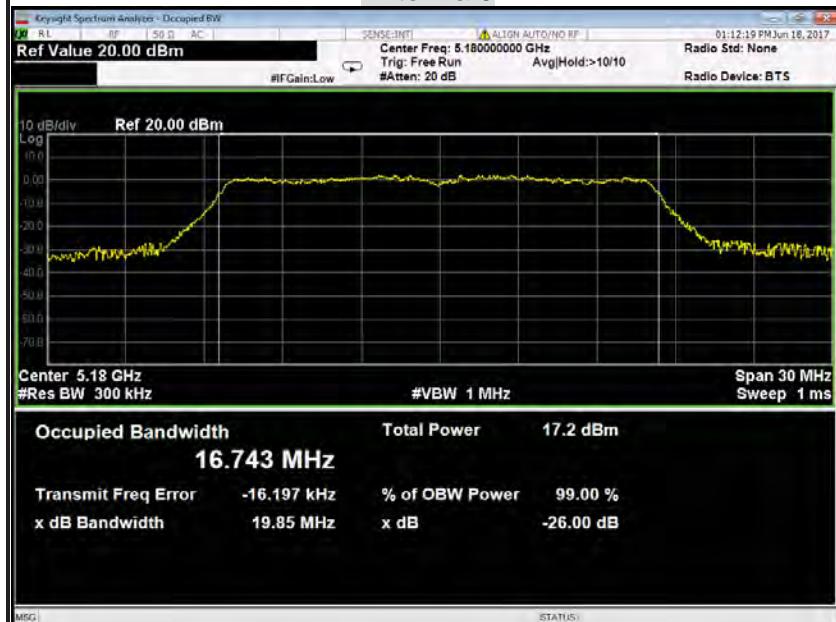


Test Plot

IEEE 802.11a mode / 5180 ~ 5240MHz

26dB Bandwidth (CH Low)

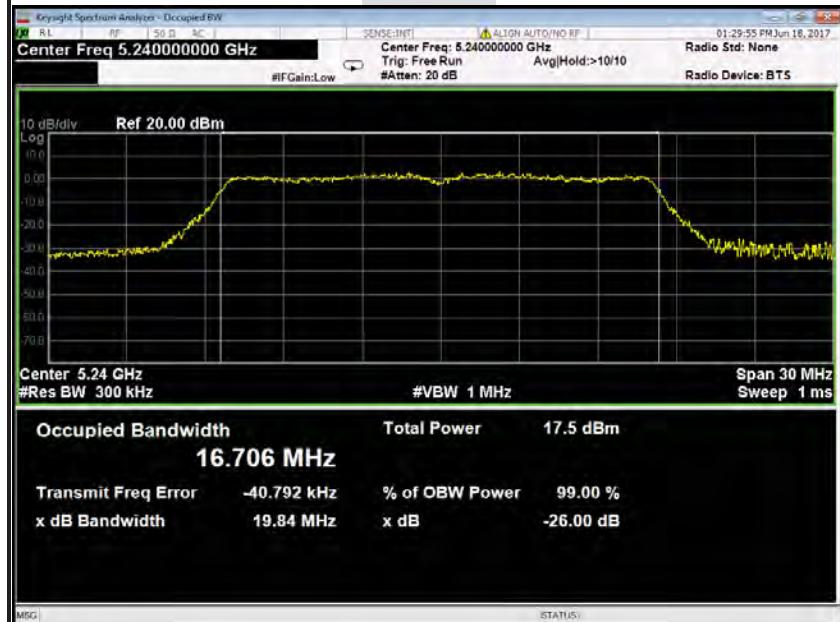
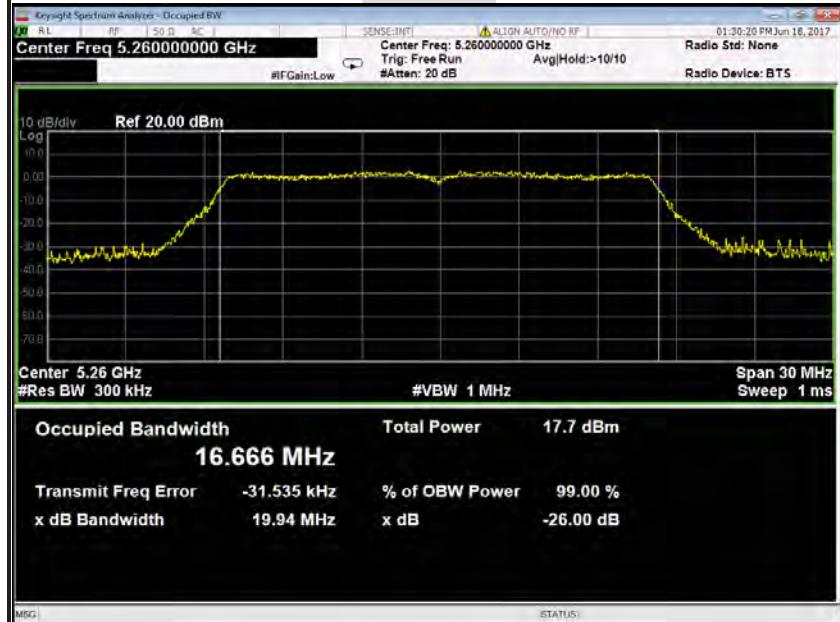
Antenna 0



26dB Bandwidth (CH Mid)

Antenna 0



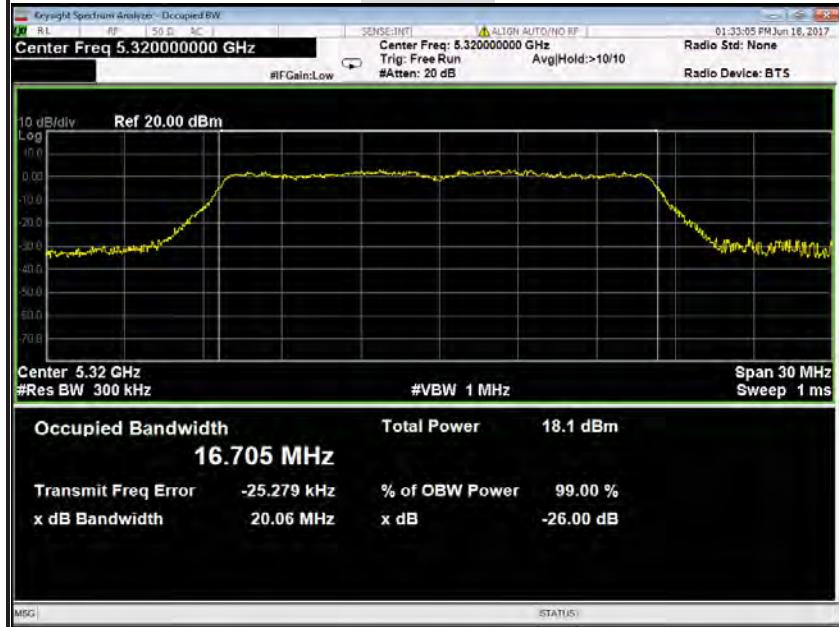
**26dB Bandwidth (CH High)****Antenna 0****IEEE 802.11a mode / 5260~ 5320MHz****26dB Bandwidth (CH Low)****Antenna 0**

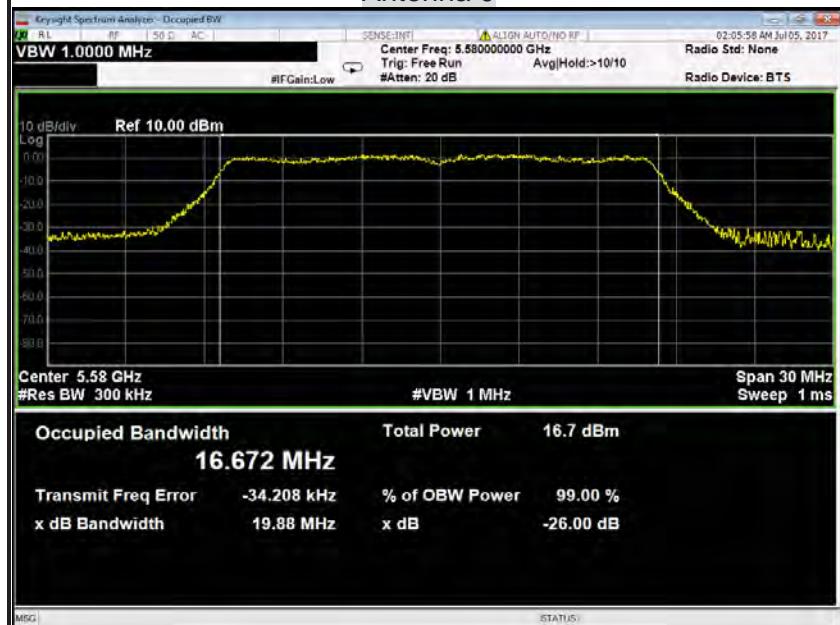
**26dB Bandwidth (CH Mid)**

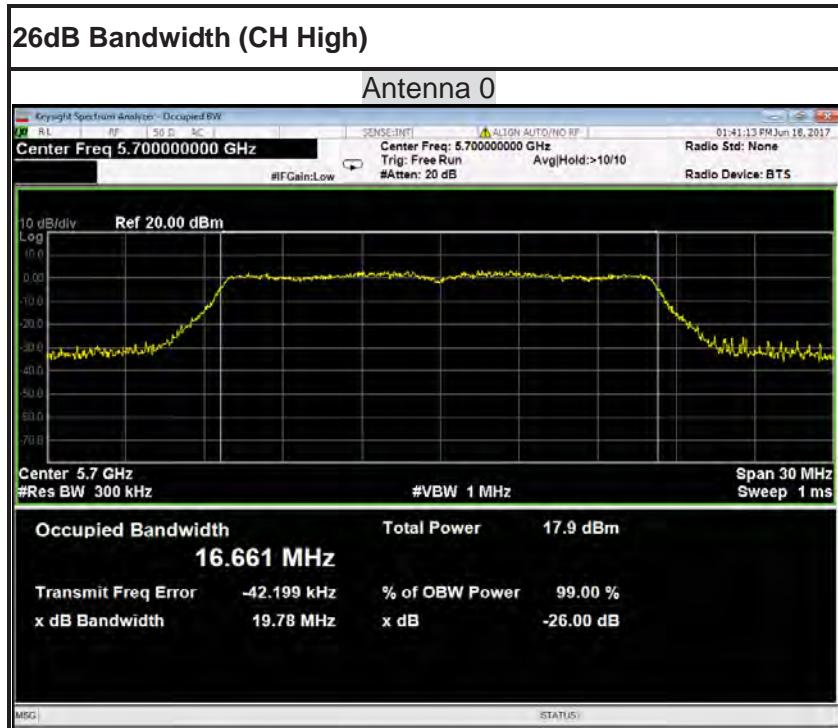
Antenna 0

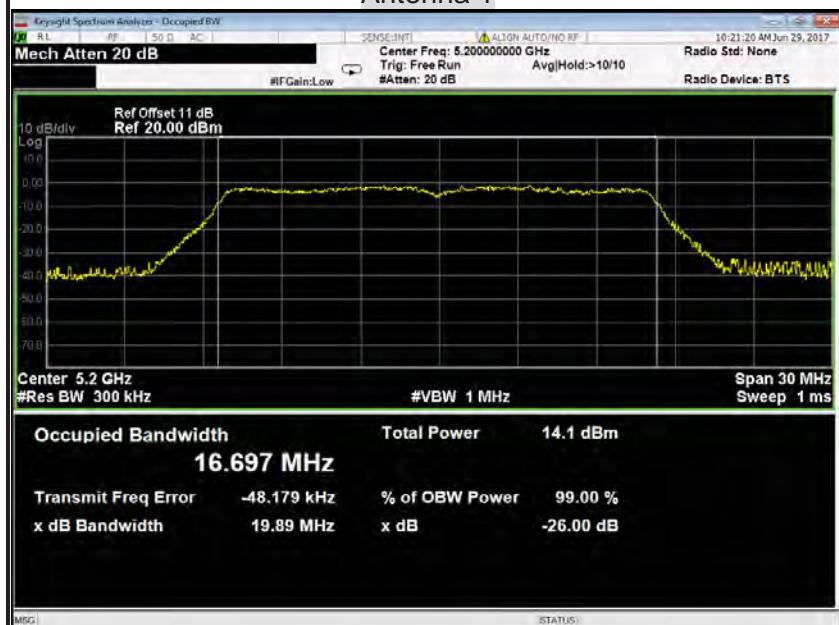
**26dB Bandwidth (CH High)**

Antenna 0



**IEEE 802.11a mode / 5500 ~ 5700MHz****26dB Bandwidth (CH Low)****Antenna 0****26dB Bandwidth (CH Mid)****Antenna 0**



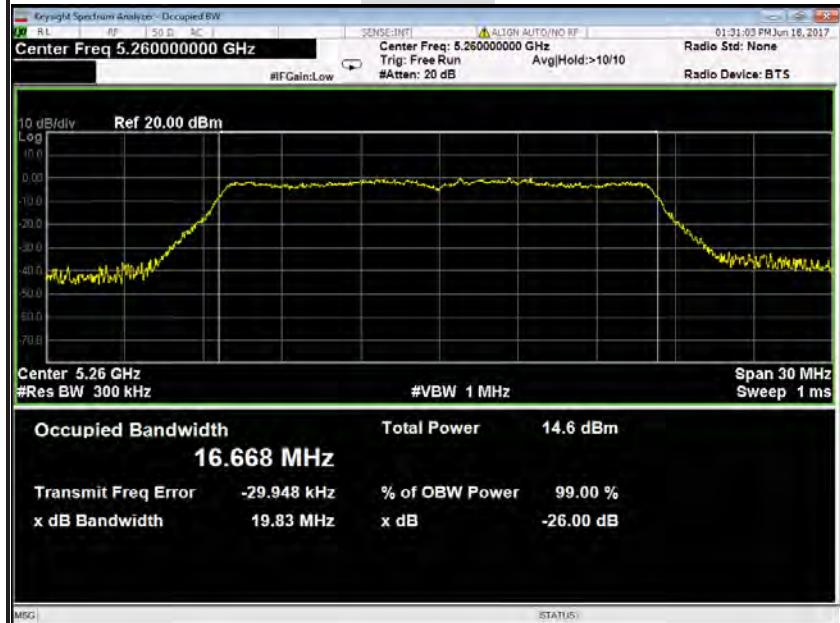
**IEEE 802.11a mode / 5180 ~ 5240MHz****26dB Bandwidth (CH Low)****Antenna 1****26dB Bandwidth (CH Mid)****Antenna 1**

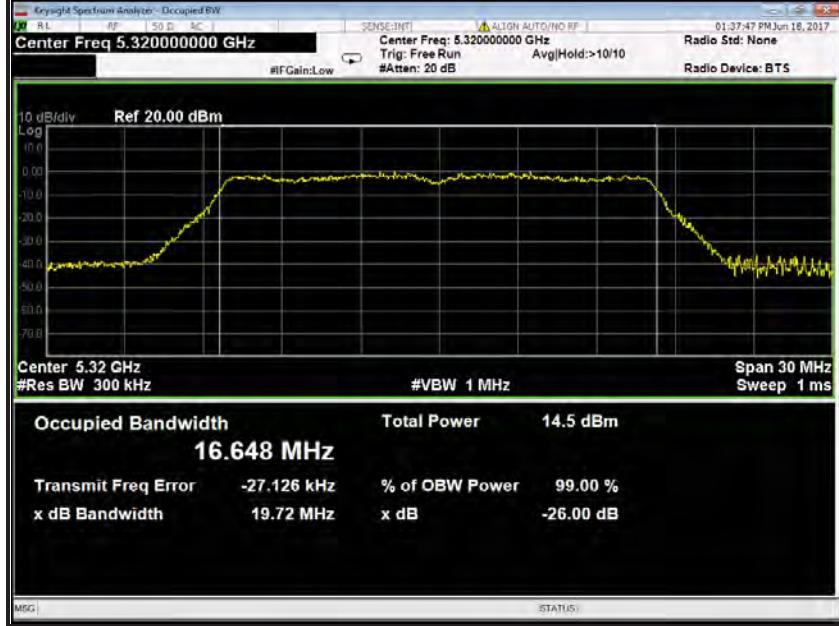
**26dB Bandwidth (CH High)**

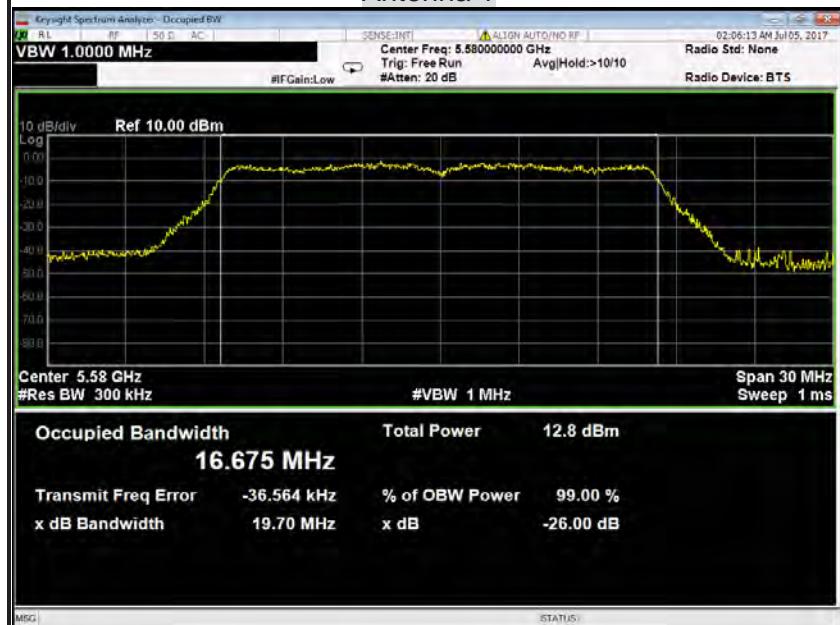
Antenna 1

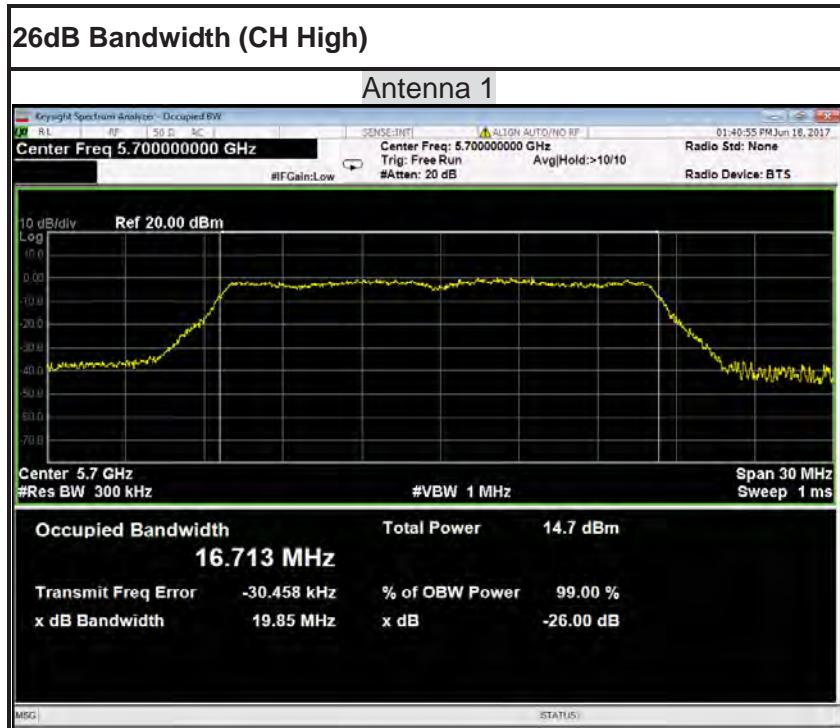
**IEEE 802.11a mode / 5260~ 5320MHz****26dB Bandwidth (CH Low)**

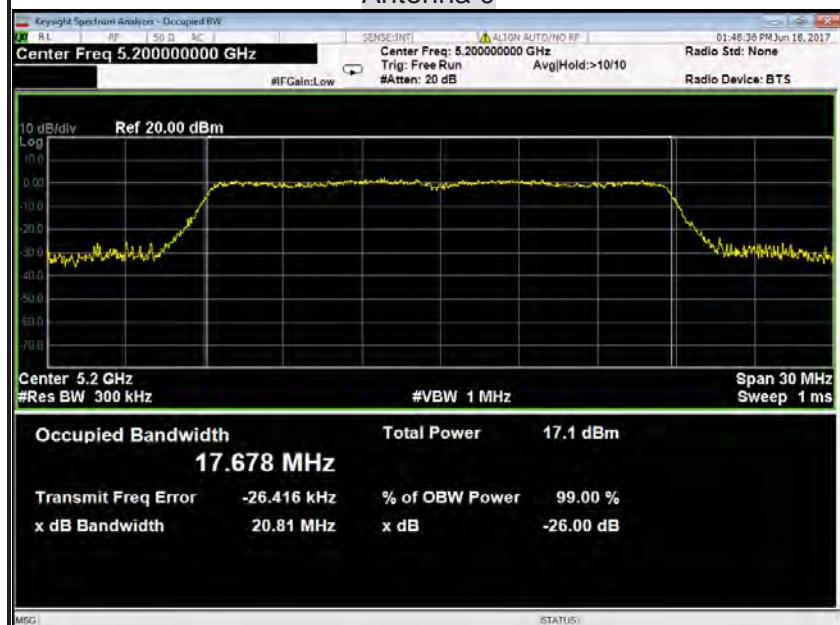
Antenna 1



**26dB Bandwidth (CH Mid)****Antenna 1****26dB Bandwidth (CH High)****Antenna 1**

**IEEE 802.11a mode / 5500 ~ 5700MHz****26dB Bandwidth (CH Low)****Antenna 1****26dB Bandwidth (CH Mid)****Antenna 1**



**IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz****26dB Bandwidth (CH Low)****Antenna 0****26dB Bandwidth (CH Mid)****Antenna 0**

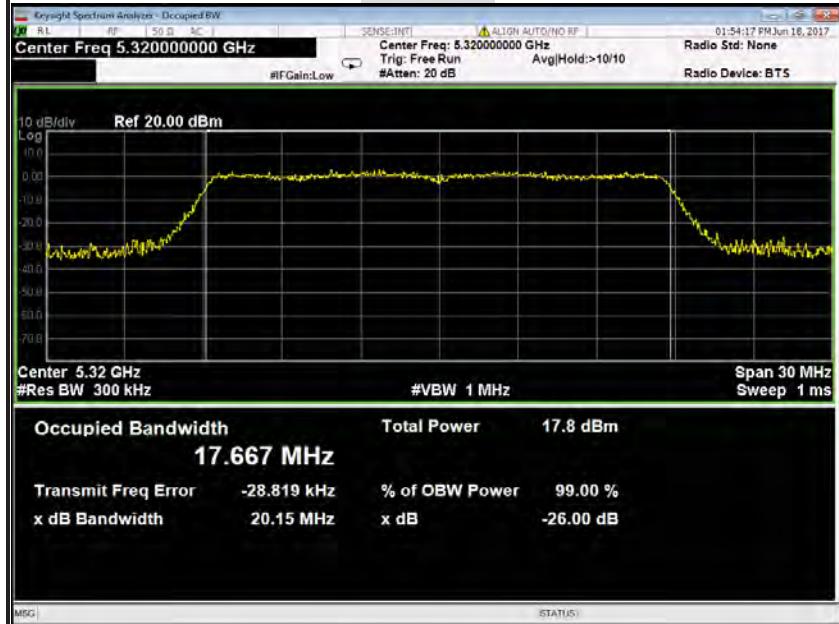
**26dB Bandwidth (CH High)**

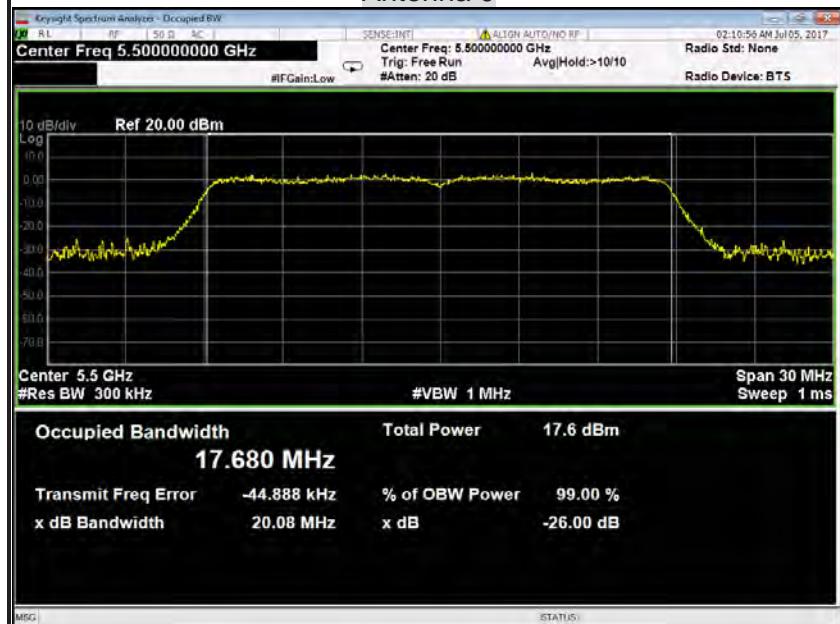
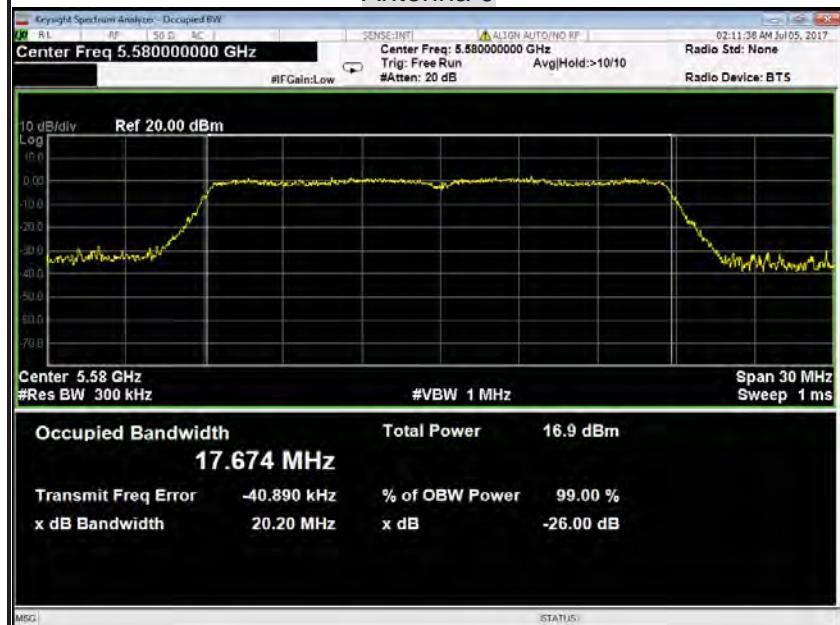
Antenna 0

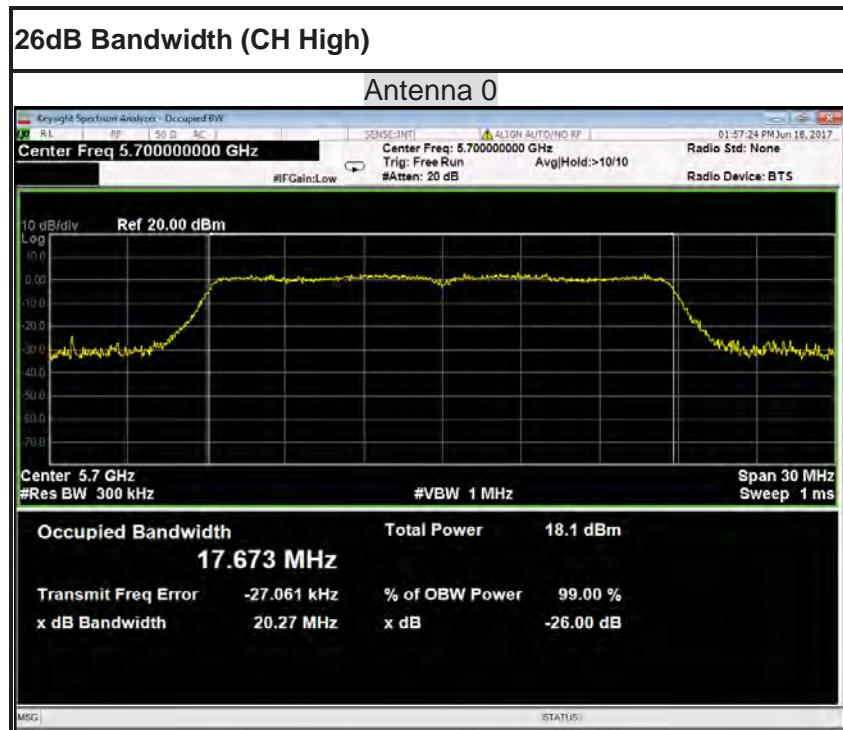
**IEEE 802.11n HT 20 MHz mode / 5260~ 5320MHz****26dB Bandwidth (CH Low)**

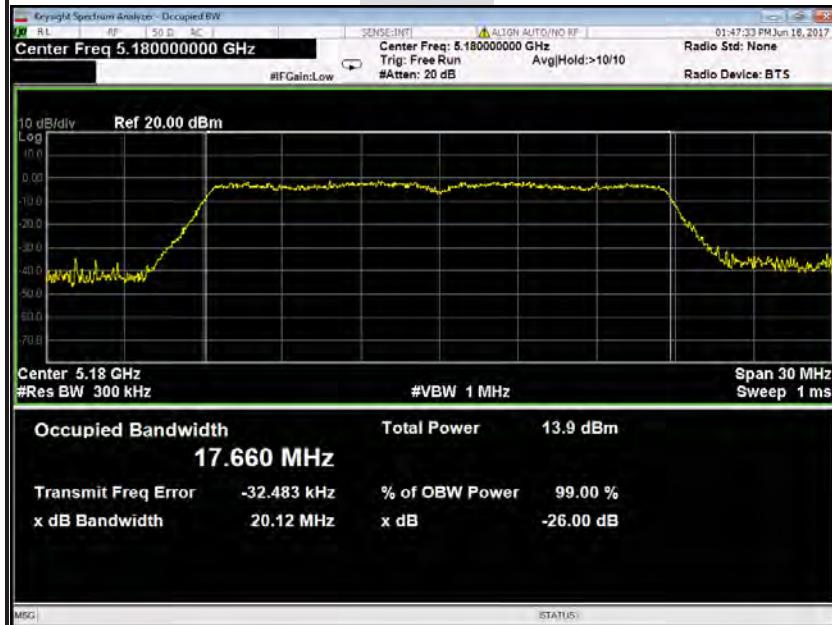
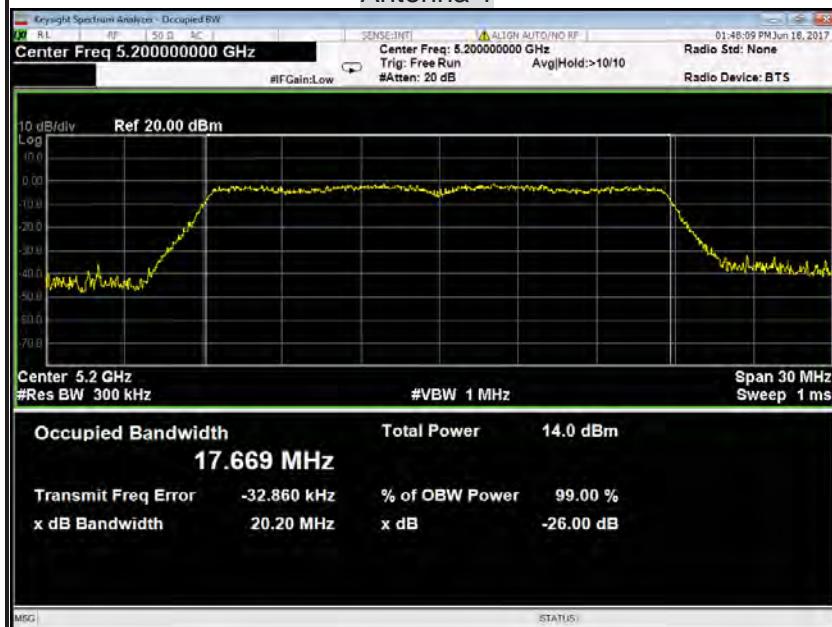
Antenna 0

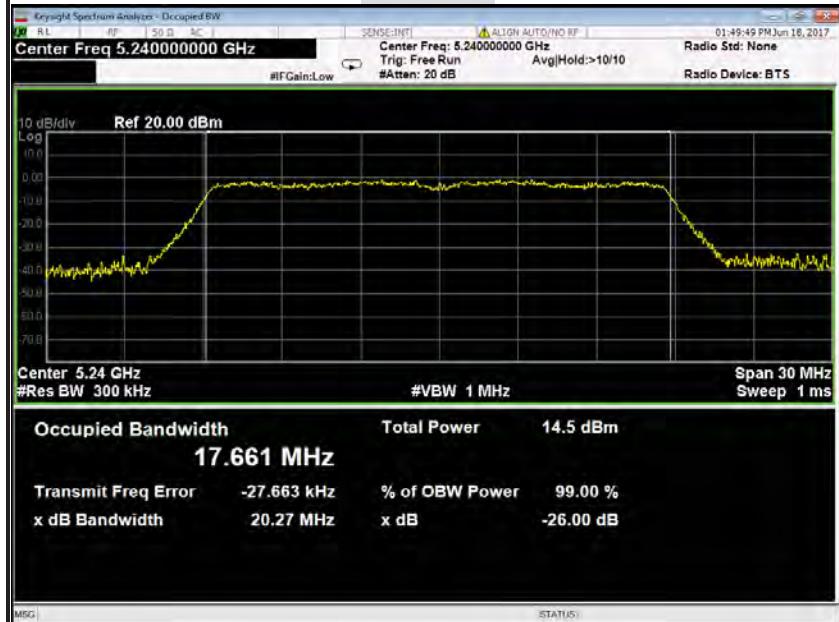
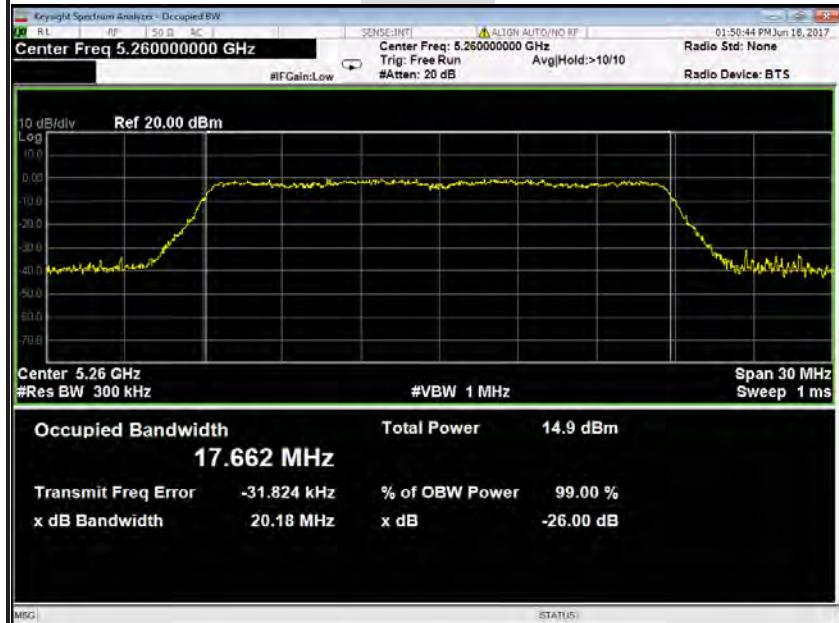


**26dB Bandwidth (CH Mid)****Antenna 0****26dB Bandwidth (CH High)****Antenna 0**

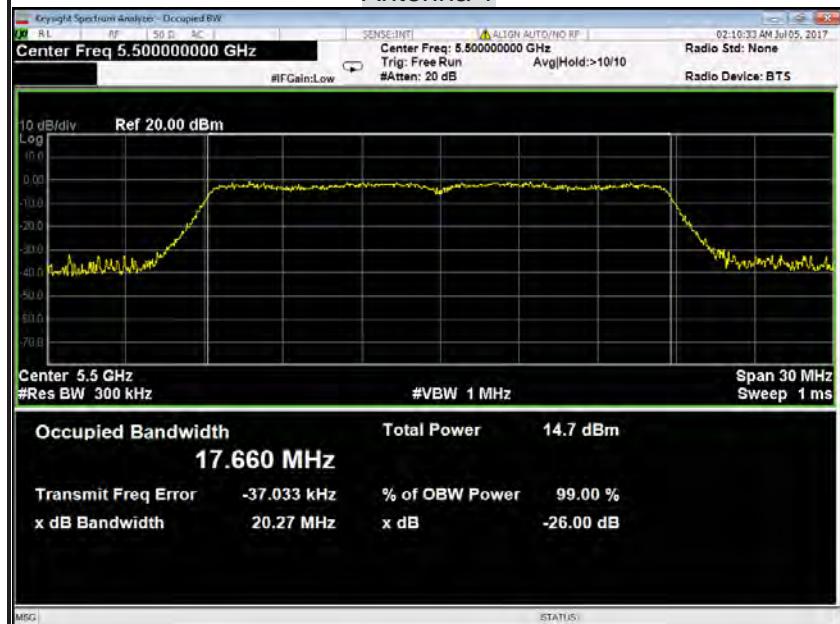
**IEEE 802.11n HT 20 MHz mode / 5500 ~ 5700MHz****26dB Bandwidth (CH Low)****Antenna 0****26dB Bandwidth (CH Mid)****Antenna 0**

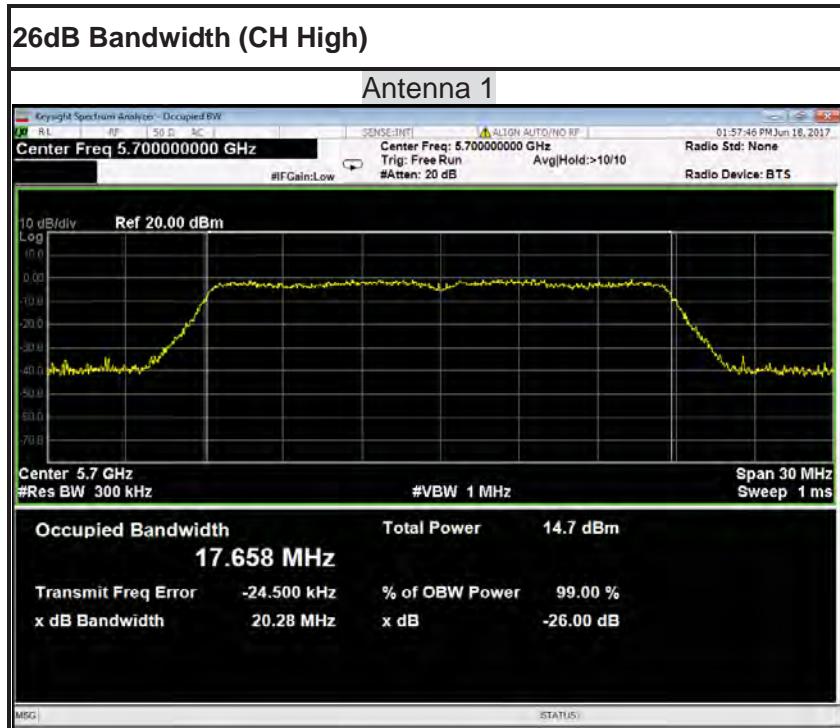


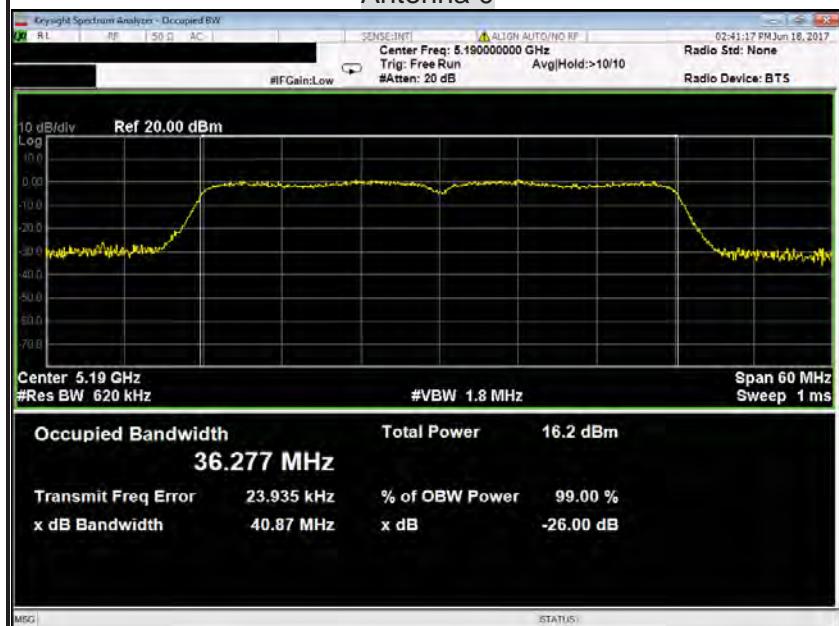
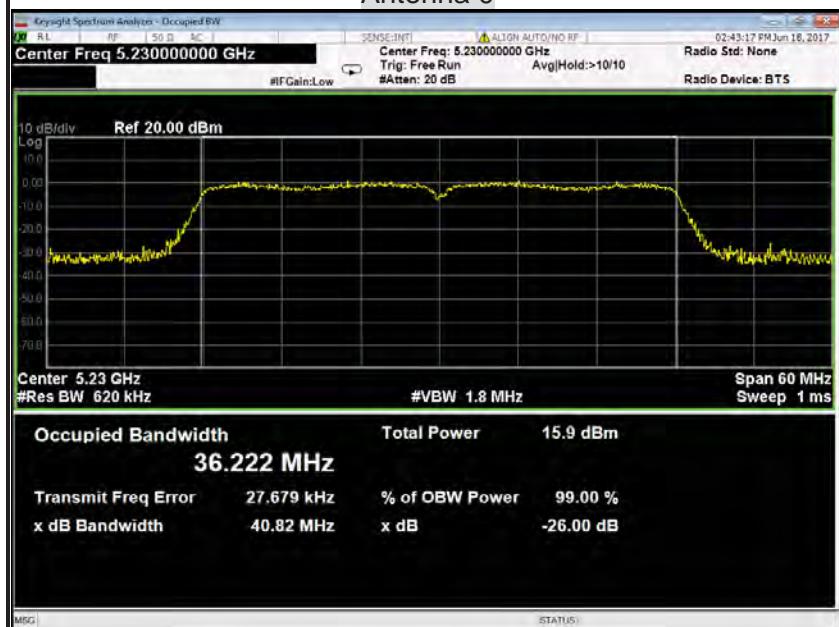
**IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz****26dB Bandwidth (CH Low)****Antenna 1****26dB Bandwidth (CH Mid)****Antenna 1**

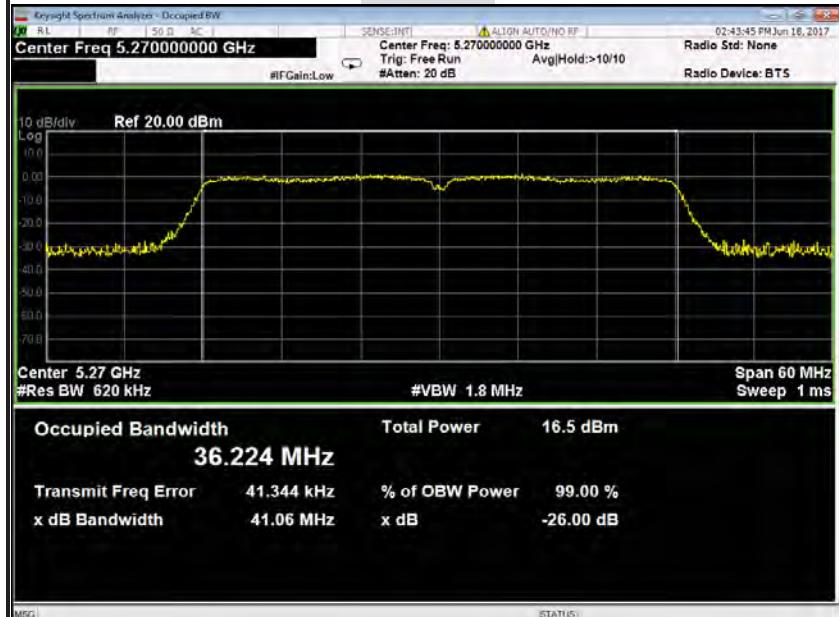
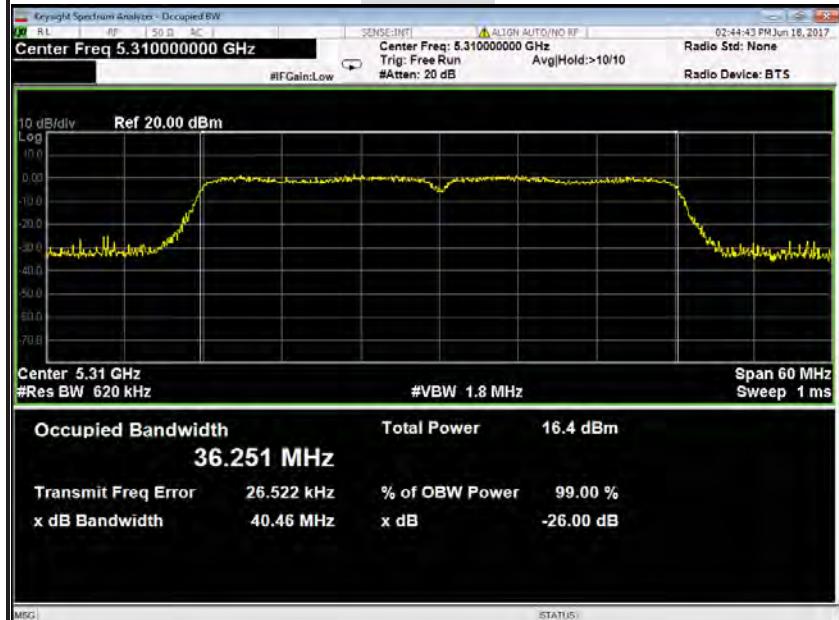
**26dB Bandwidth (CH High)****Antenna 1****IEEE 802.11n HT 20 MHz mode / 5260~ 5320MHz****26dB Bandwidth (CH Low)****Antenna 1**

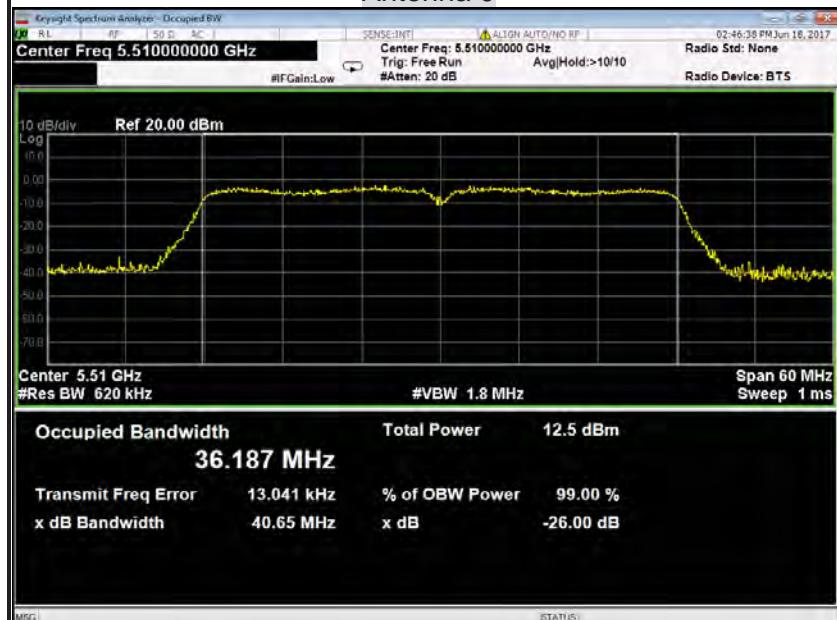
**26dB Bandwidth (CH Mid)****Antenna 1****26dB Bandwidth (CH High)****Antenna 1**

**IEEE 802.11n HT 20 MHz mode / 5500 ~ 5700MHz****26dB Bandwidth (CH Low)****Antenna 1****26dB Bandwidth (CH Mid)****Antenna 1**



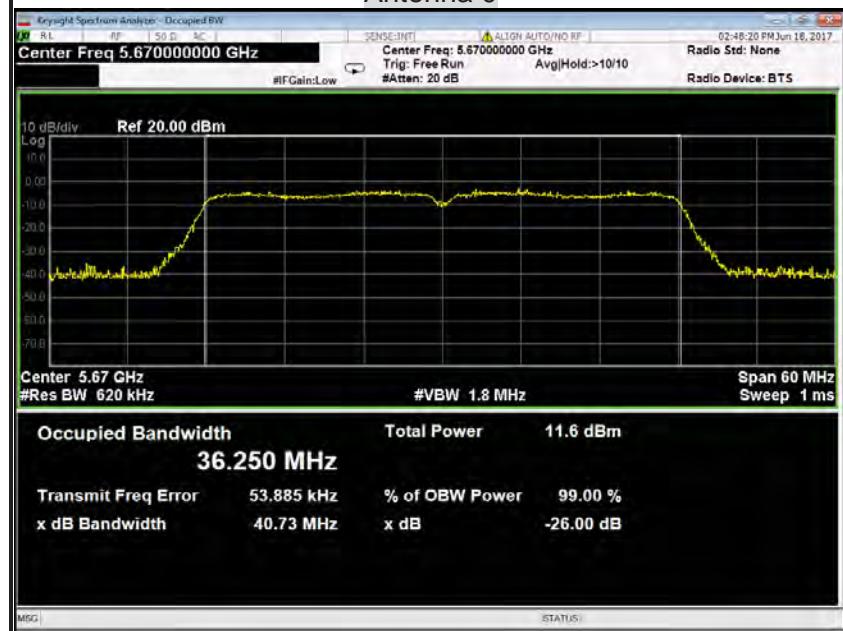
**IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz****26dB Bandwidth (CH Low)****Antenna 0****26dB Bandwidth (CH High)****Antenna 0**

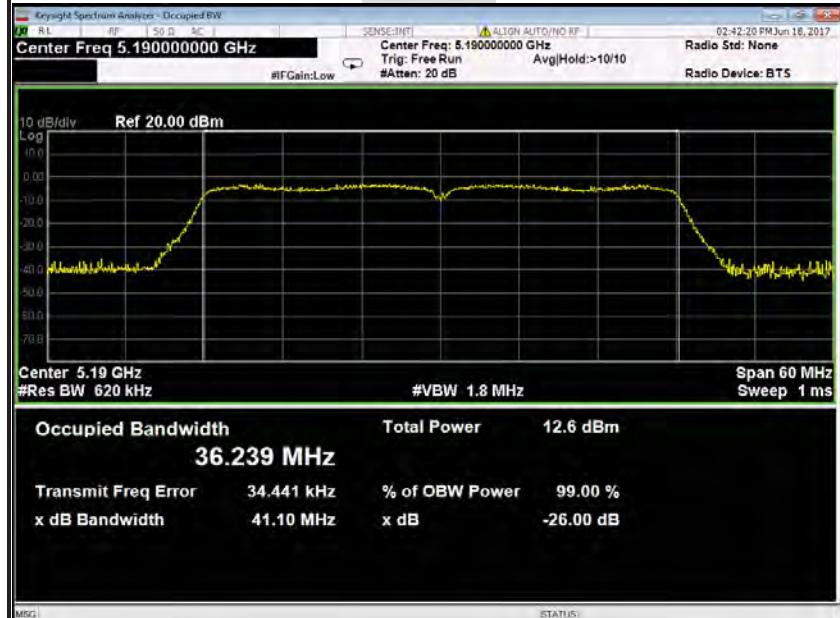
**IEEE 802.11n HT 40 MHz mode / 5270 ~ 5310MHz****26dB Bandwidth (CH Low)****Antenna 0****26dB Bandwidth (CH High)****Antenna 0**

**IEEE 802.11n HT 40 MHz mode / 5510 ~ 5670MHz****26dB Bandwidth (CH Low)****Antenna 0****26dB Bandwidth (CH Mid)****Antenna 0**

**26dB Bandwidth (CH High)**

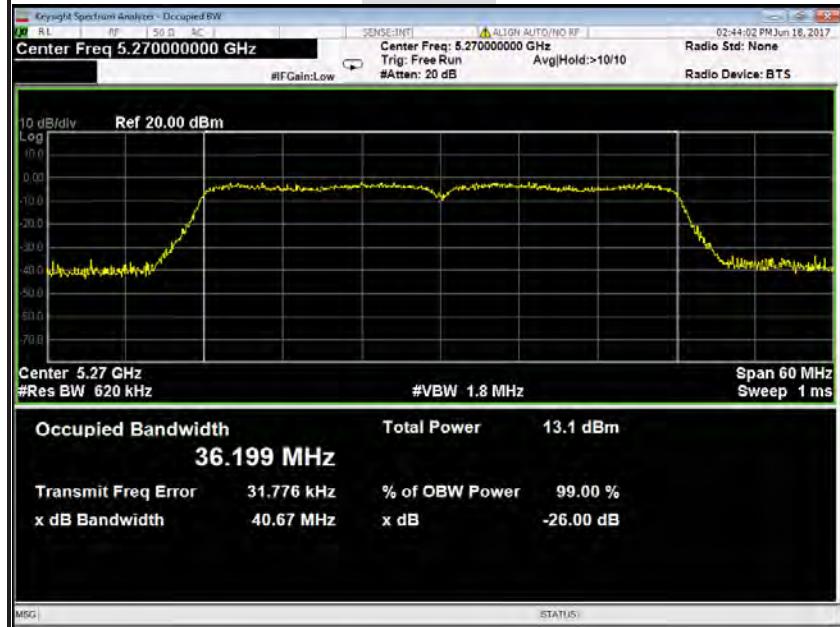
Antenna 0



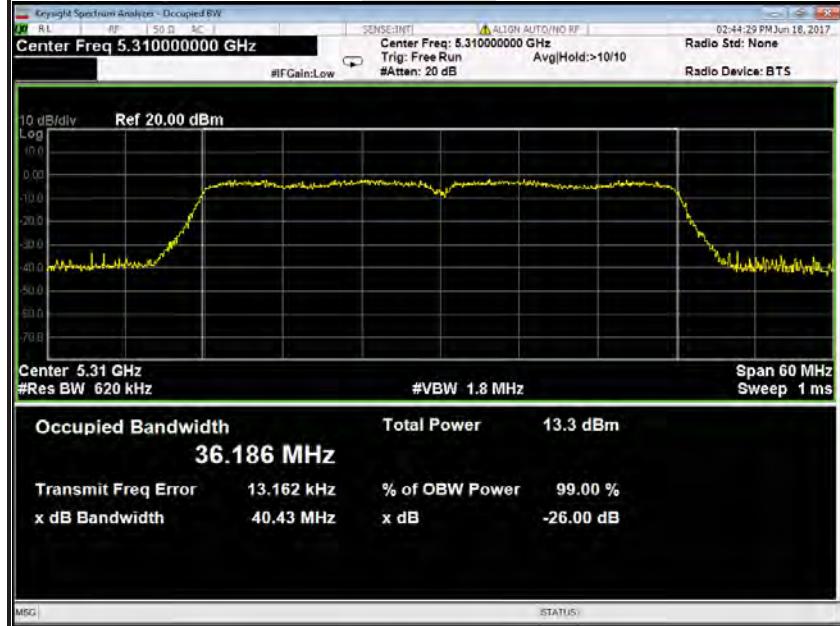
**IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz****26dB Bandwidth (CH Low)****Antenna 1****26dB Bandwidth (CH High)****Antenna 1**

**IEEE 802.11n HT 40 MHz mode / 5270 ~ 5310MHz****26dB Bandwidth (CH Low)**

Antenna 1

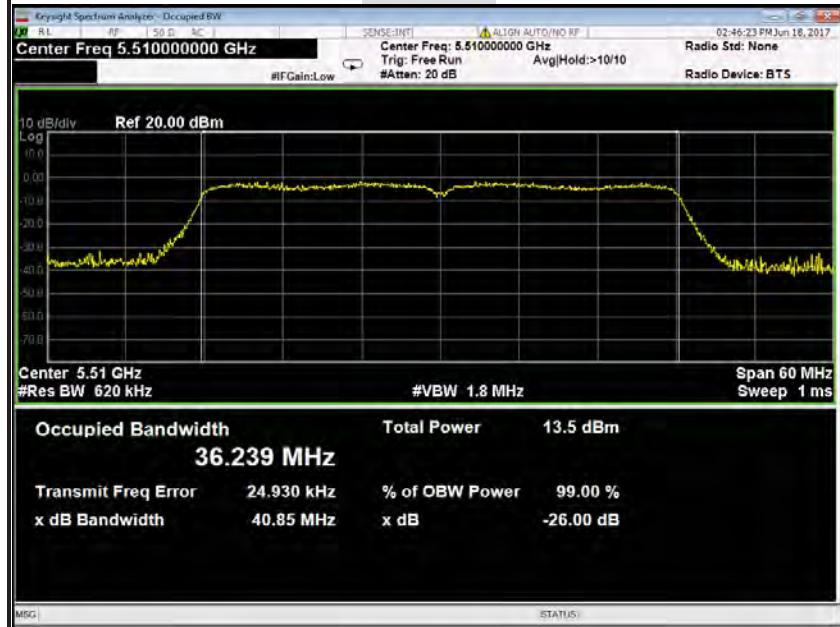
**26dB Bandwidth (CH High)**

Antenna 1

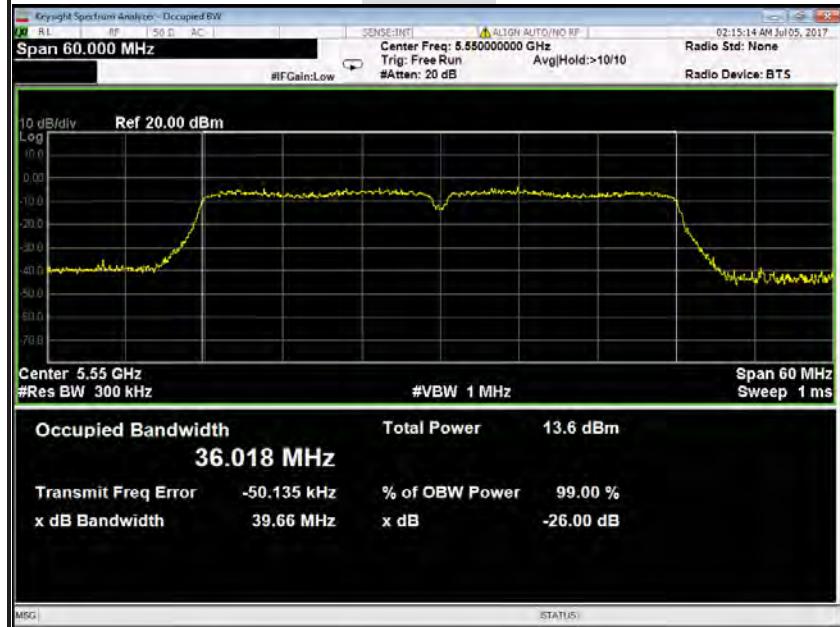


**IEEE 802.11n HT 40 MHz mode / 5510 ~ 5670MHz****26dB Bandwidth (CH Low)**

Antenna 1

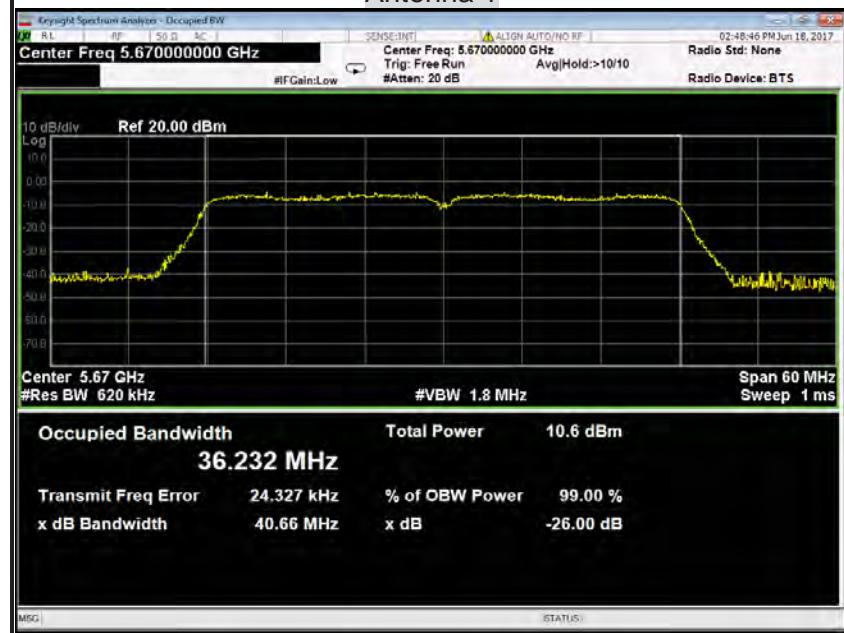
**26dB Bandwidth (CH Mid)**

Antenna 1



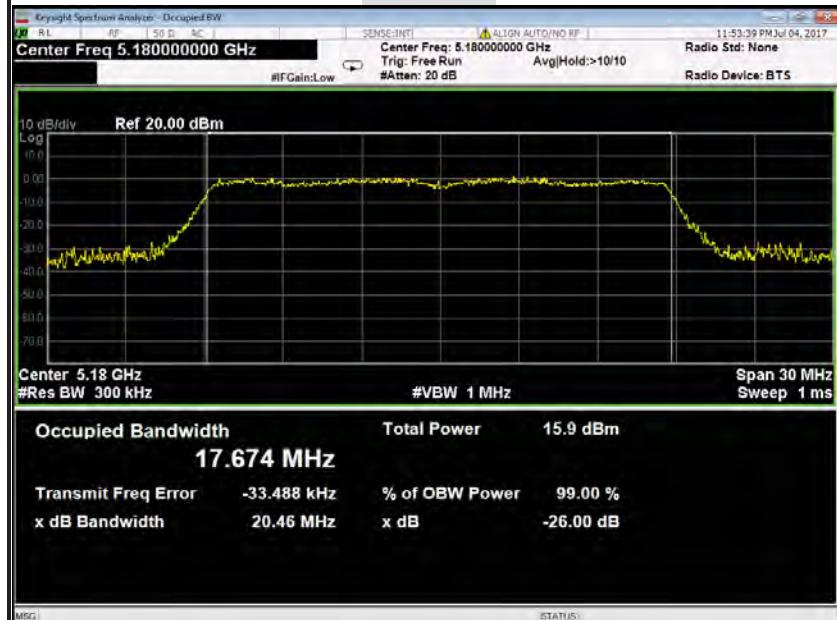
**26dB Bandwidth (CH High)**

Antenna 1

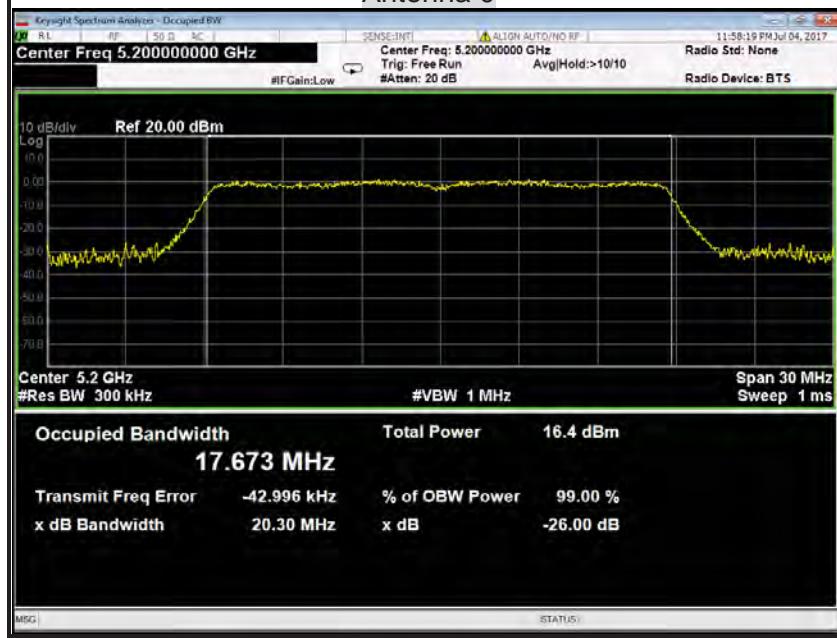


**IEEE 802.11ac 20 mode / 5180 ~ 5240MHz****26dB Bandwidth (CH Low)**

Antenna 0

**26dB Bandwidth (CH Mid)**

Antenna 0

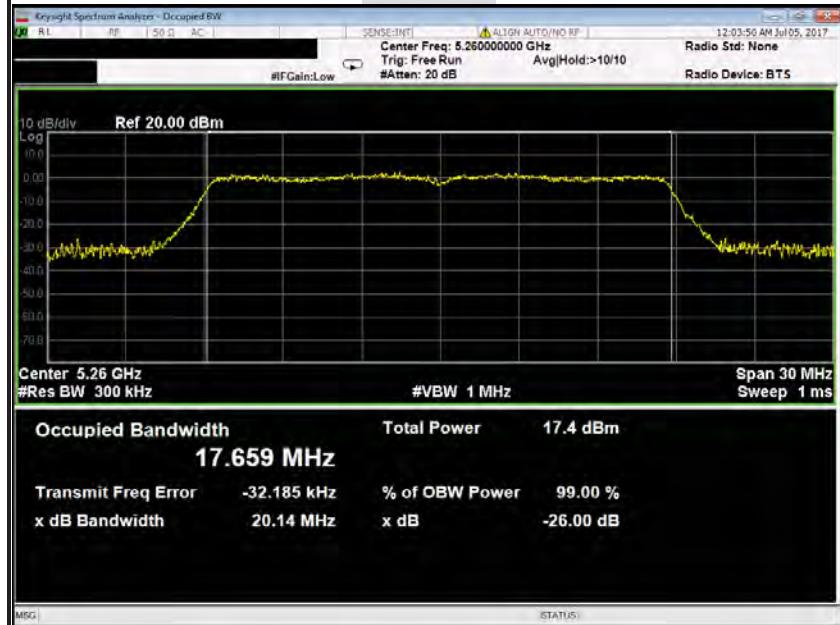


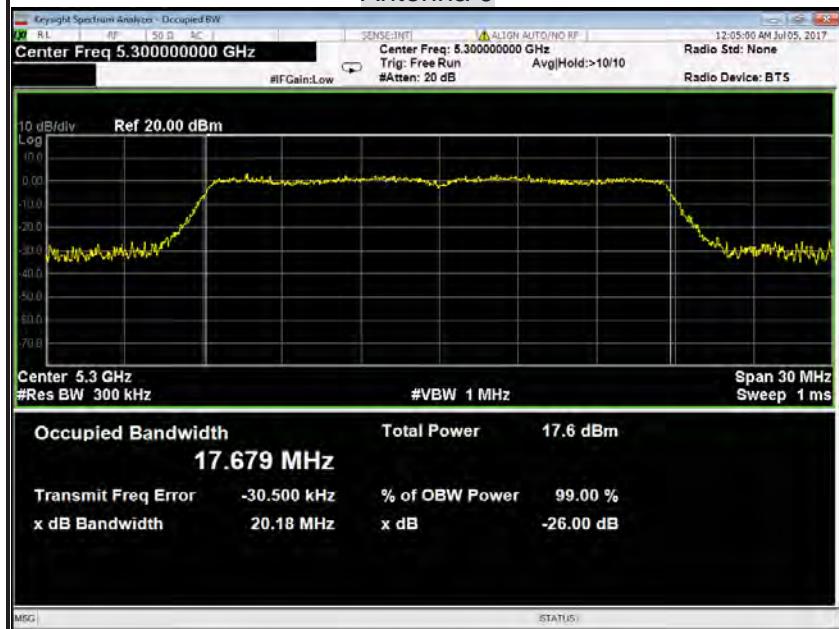
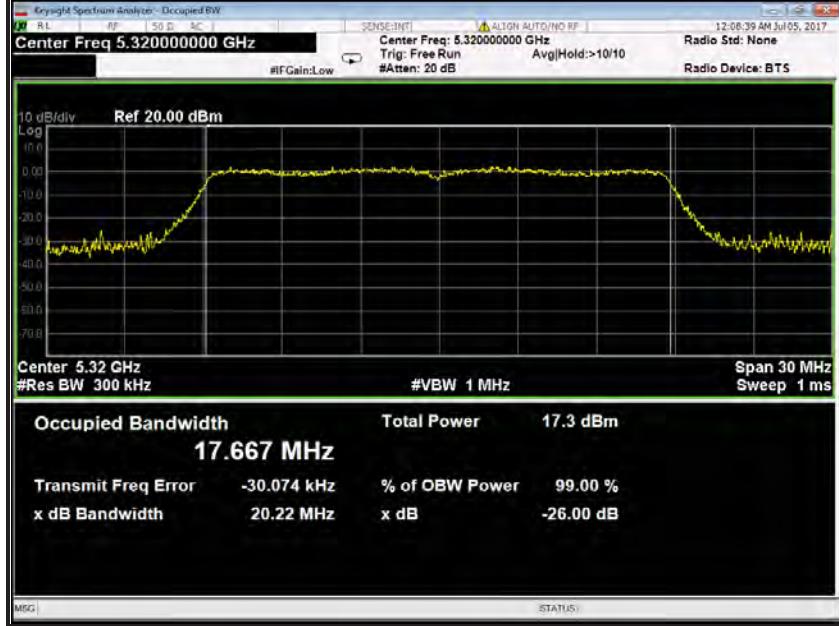
**26dB Bandwidth (CH High)**

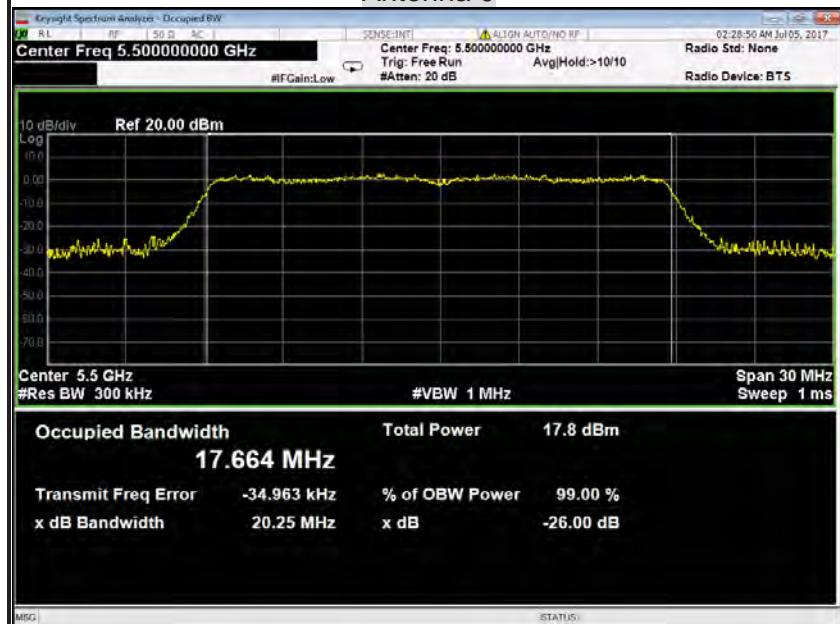
Antenna 0

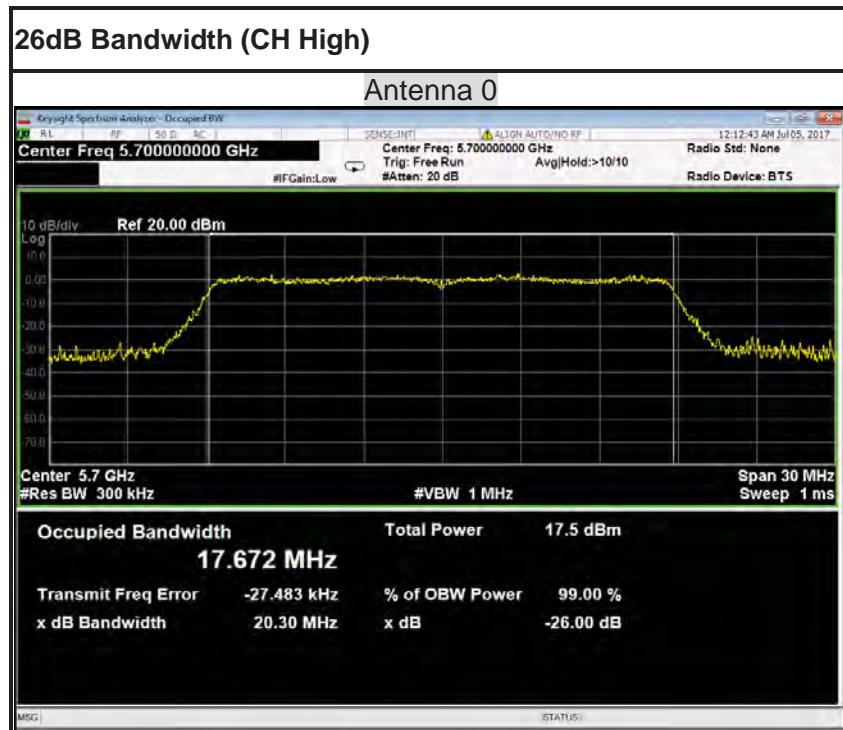
**IEEE 802.11ac 20 mode / 5260~ 5320MHz****26dB Bandwidth (CH Low)**

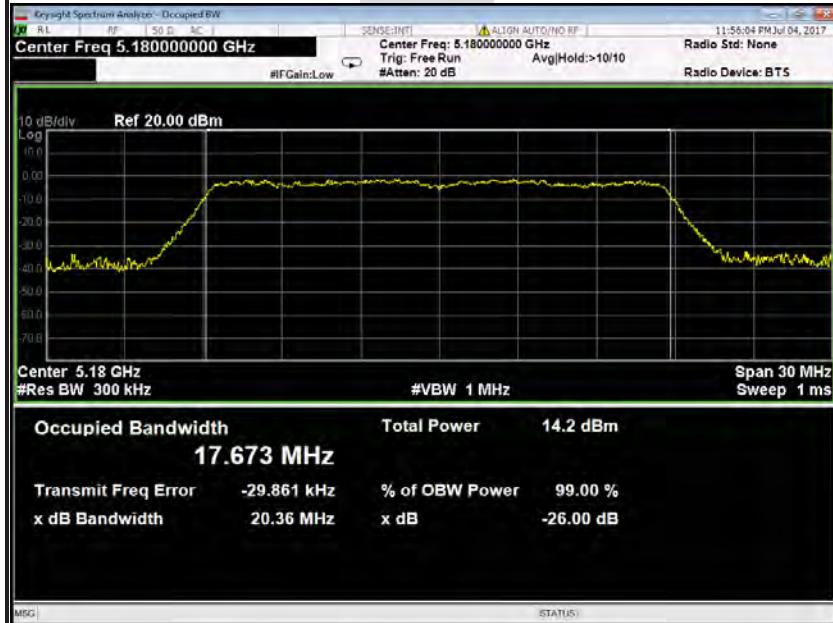
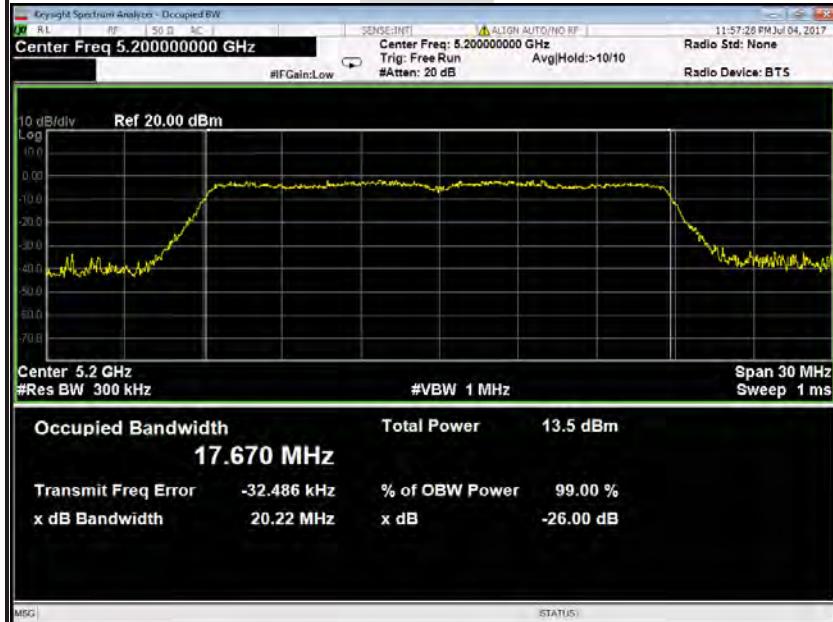
Antenna 0

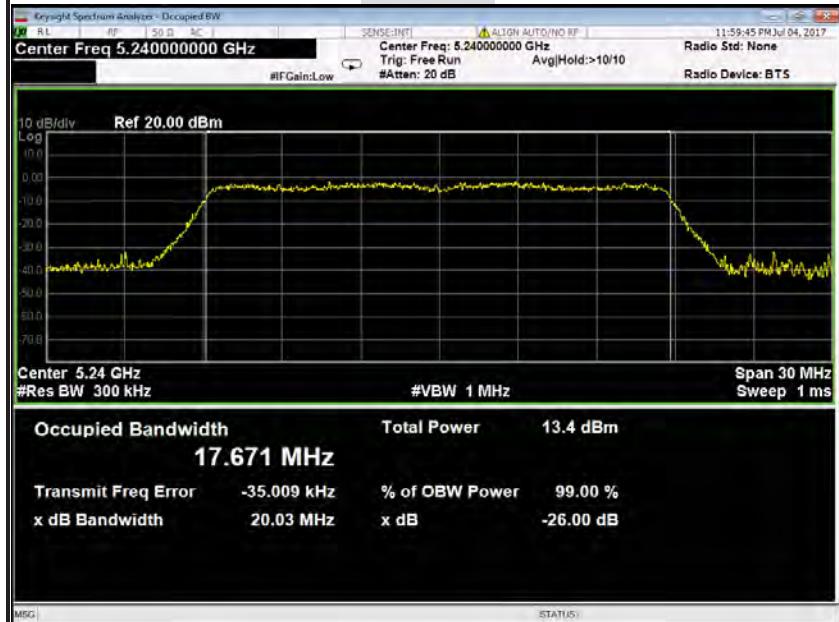


**26dB Bandwidth (CH Mid)****Antenna 0****26dB Bandwidth (CH High)****Antenna 0**

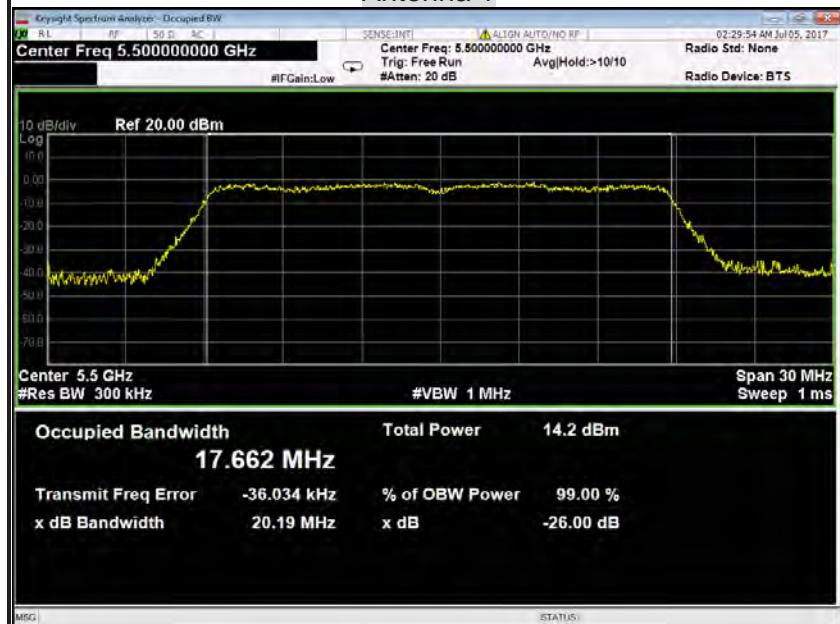
**IEEE 802.11ac 20 mode / 5500 ~ 5700MHz****26dB Bandwidth (CH Low)****Antenna 0****26dB Bandwidth (CH Mid)****Antenna 0**

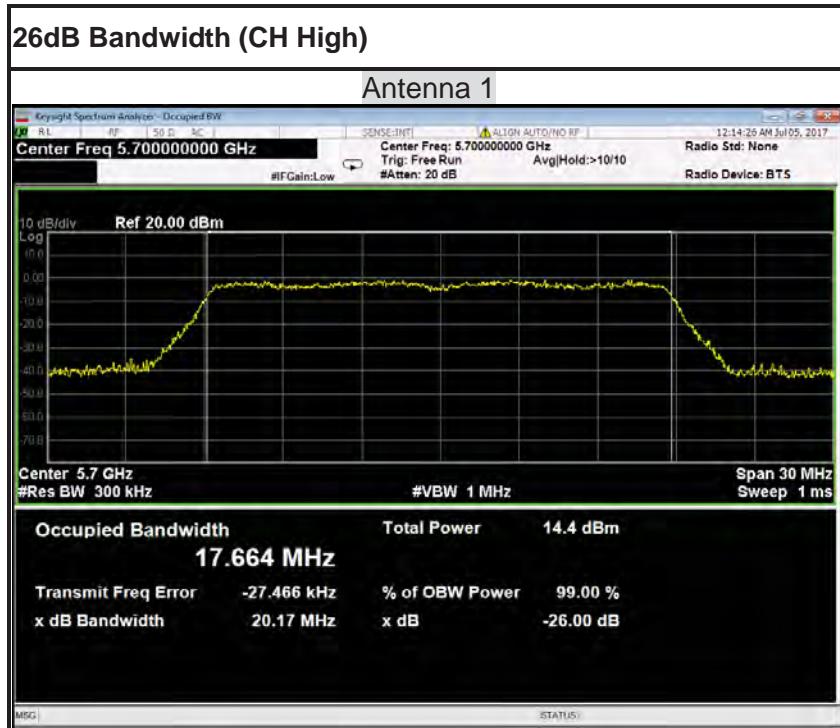


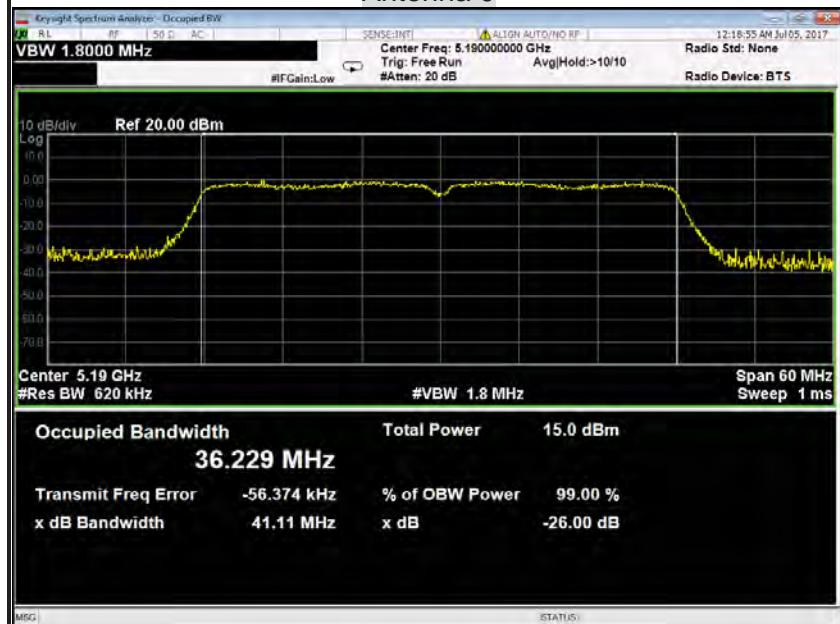
**IEEE 802.11ac 20 mode / 5180 ~ 5240MHz****26dB Bandwidth (CH Low)****Antenna 1****26dB Bandwidth (CH Mid)****Antenna 1**

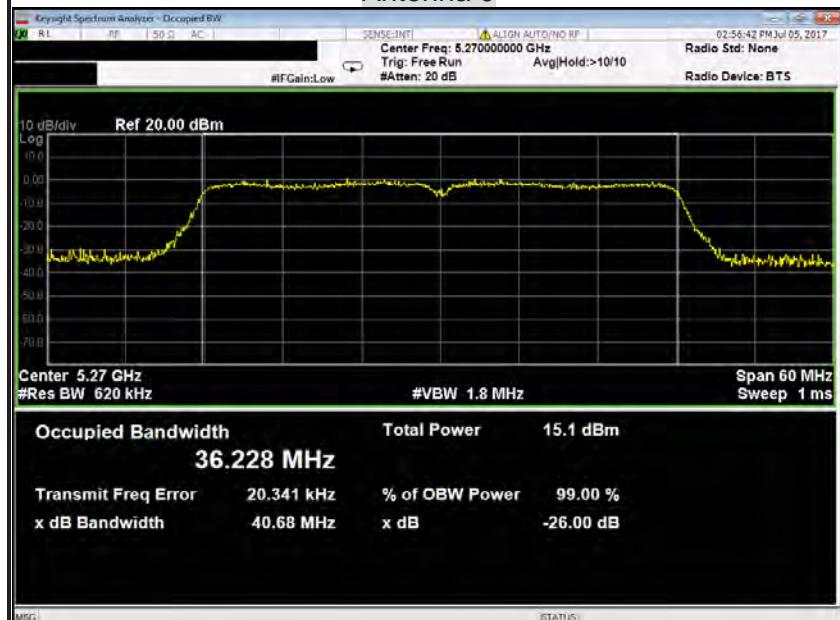
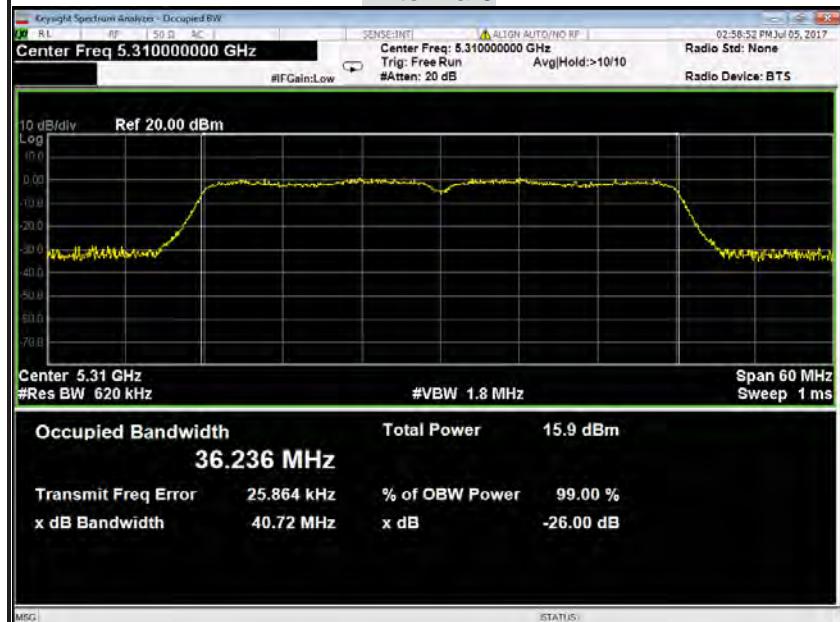
**26dB Bandwidth (CH High)****Antenna 1****IEEE 802.11ac 20 mode / 5260~ 5320MHz****26dB Bandwidth (CH Low)****Antenna 1**

**26dB Bandwidth (CH Mid)****Antenna 1****26dB Bandwidth (CH High)****Antenna 1**

**IEEE 802.11ac 20 mode / 5500 ~ 5700MHz****26dB Bandwidth (CH Low)****Antenna 1****26dB Bandwidth (CH Mid)****Antenna 1**



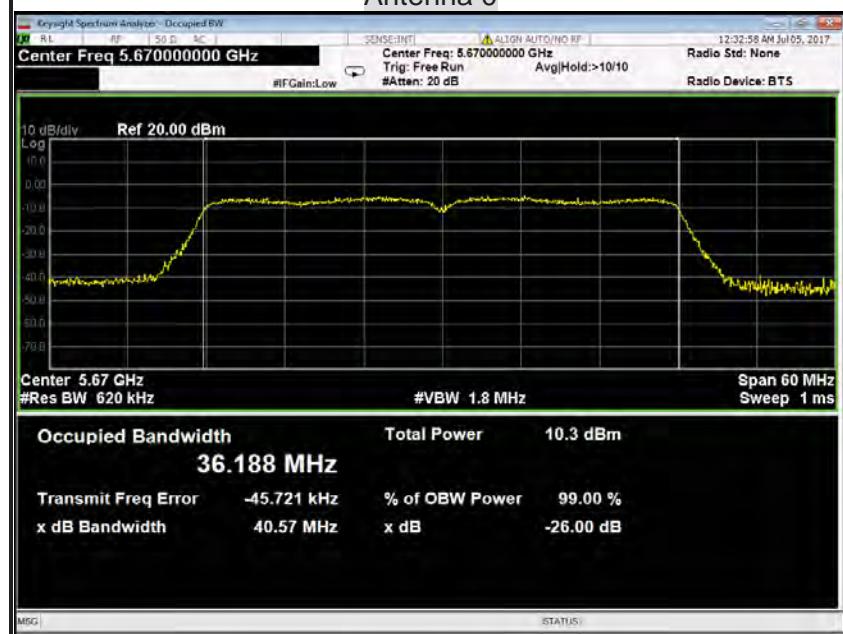
**IEEE 802.11ac 40 mode / 5190 ~ 5230MHz****26dB Bandwidth (CH Low)****Antenna 0****26dB Bandwidth (CH High)****Antenna 0**

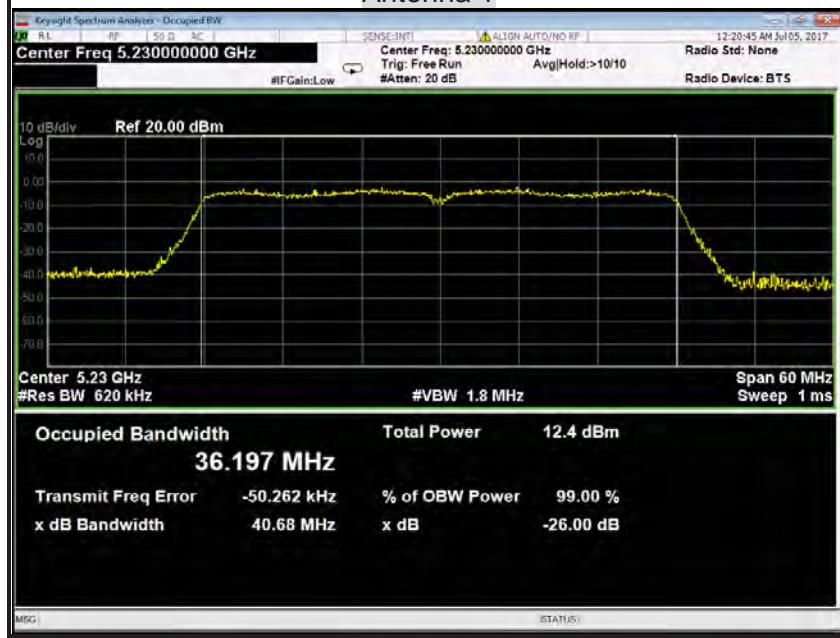
**IEEE 802.11ac 40 mode / 5270 ~ 5310MHz****26dB Bandwidth (CH Low)****Antenna 0****26dB Bandwidth (CH High)****Antenna 0**

**IEEE 802.11ac 40 mode / 5510 ~ 5670MHz****26dB Bandwidth (CH Low)****Antenna 0****26dB Bandwidth (CH Mid)****Antenna 0**

**26dB Bandwidth (CH High)**

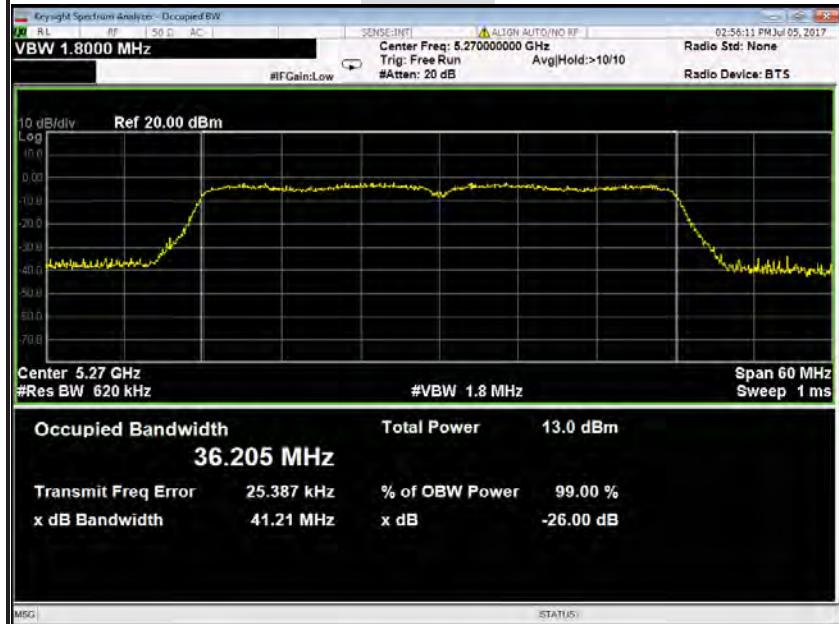
Antenna 0



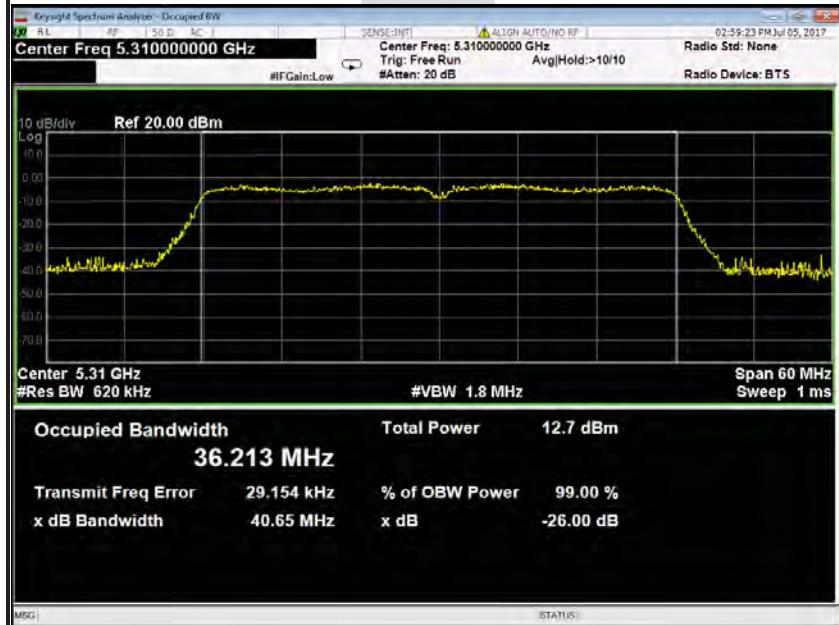
**IEEE 802.11ac 40 mode / 5190 ~ 5230MHz****26dB Bandwidth (CH Low)****Antenna 1****26dB Bandwidth (CH High)****Antenna 1**

**IEEE 802.11ac 40 mode / 5270 ~ 5310MHz****26dB Bandwidth (CH Low)**

Antenna 1

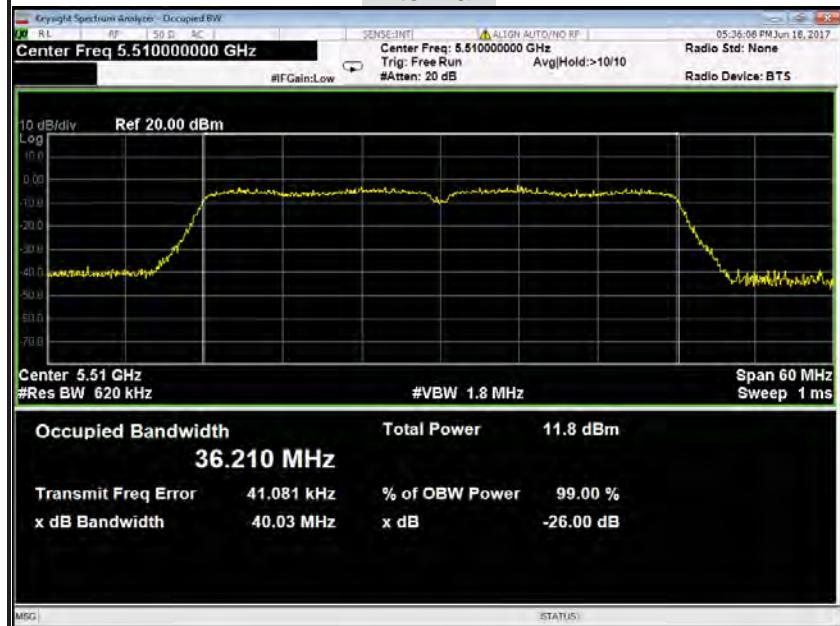
**26dB Bandwidth (CH High)**

Antenna 1

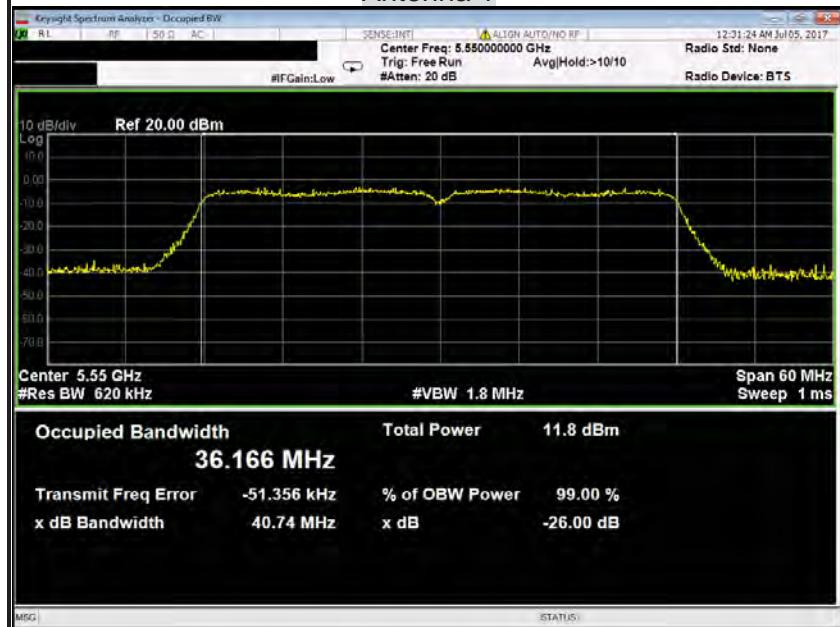


**IEEE 802.11ac 40 mode / 5510 ~ 5670MHz****26dB Bandwidth (CH Low)**

Antenna 1

**26dB Bandwidth (CH Mid)**

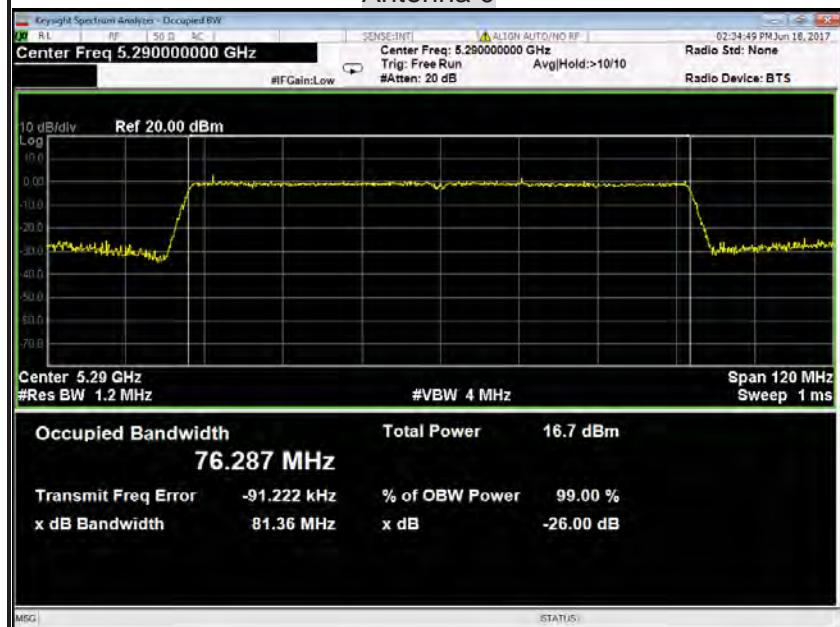
Antenna 1

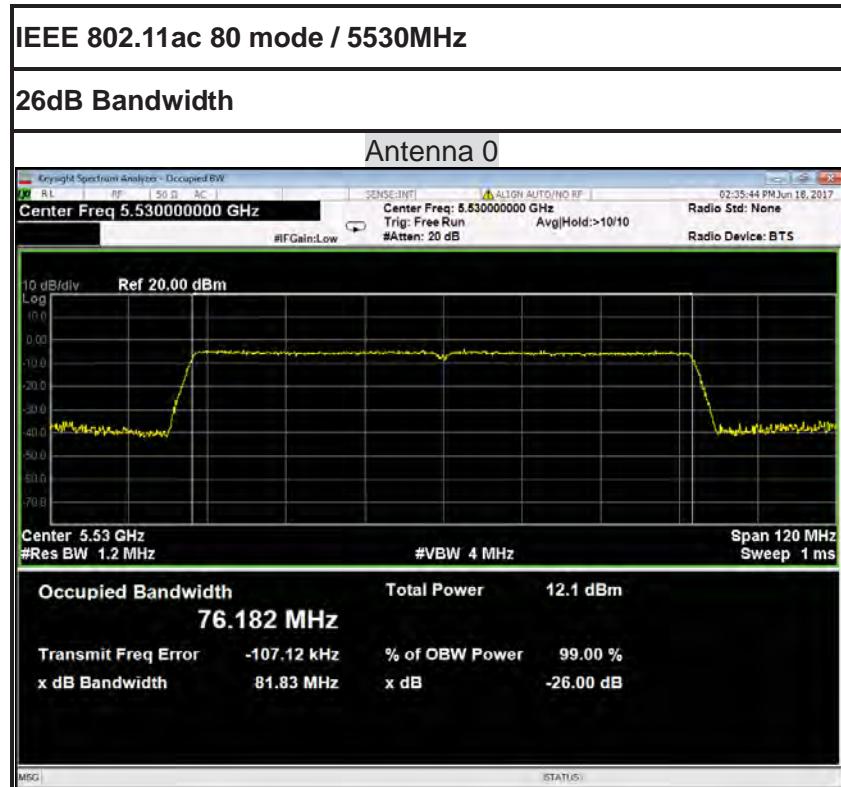


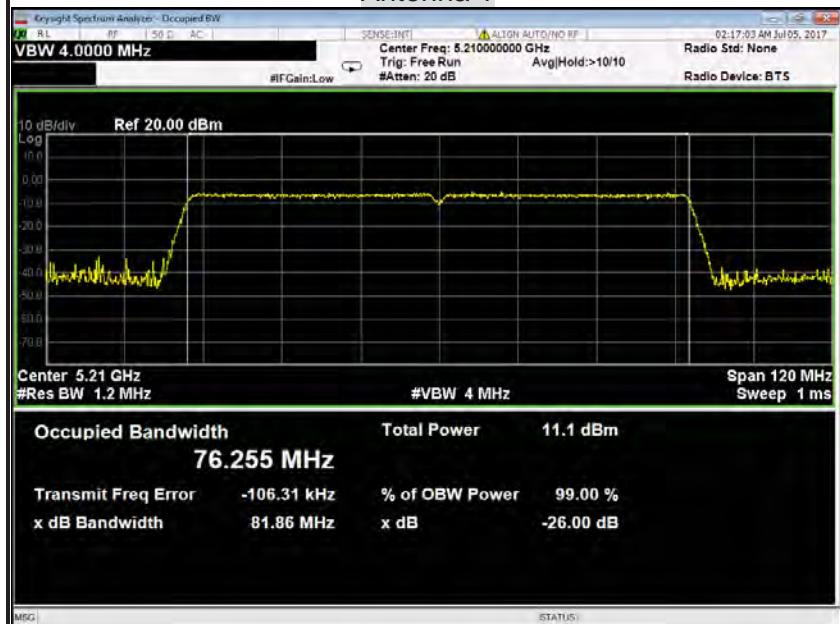
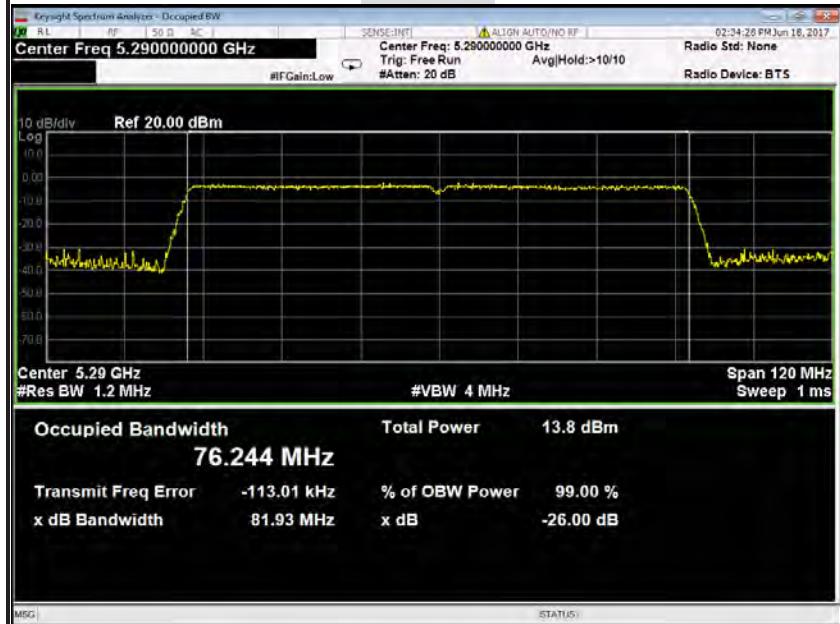
**26dB Bandwidth (CH High)**

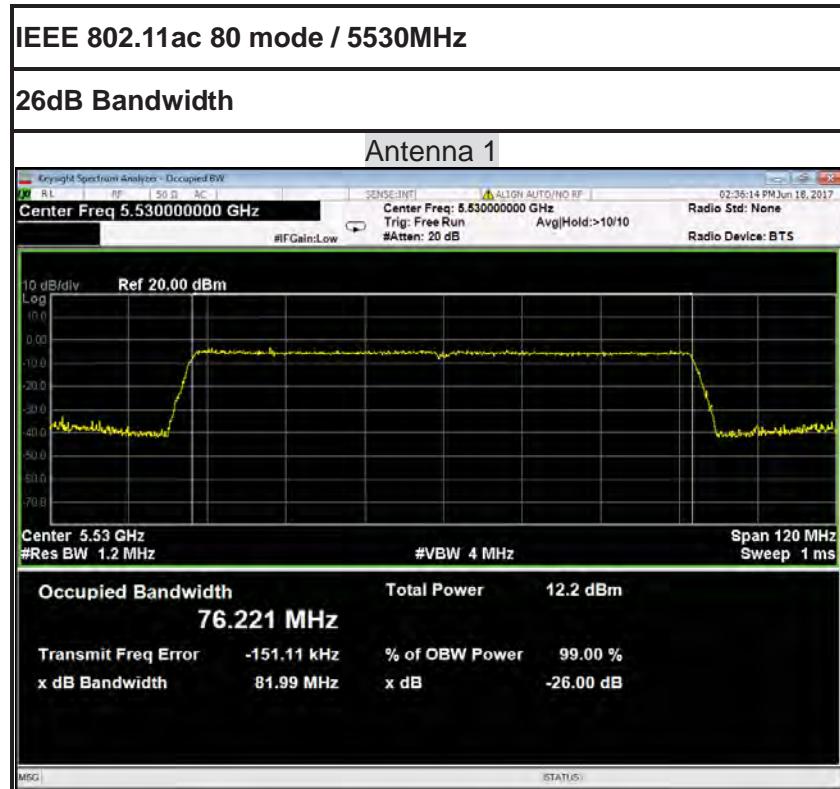
Antenna 1



**IEEE 802.11ac 80 mode / 5210MHz****26dB Bandwidth****Antenna 0****IEEE 802.11ac 80 mode / 5290MHz****26dB Bandwidth****Antenna 0**



**IEEE 802.11ac 80 mode / 5210MHz****26dB Bandwidth****Antenna 1****IEEE 802.11ac 80 mode / 5290MHz****26dB Bandwidth****Antenna 1**





6.2 6dB BANDWIDTH MEASUREMENT

6.2.1 LIMITS

According to §15.407(e), Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

6.2.2 TEST INSTRUMENTS


Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	N9010A	MY52221469	02/21/2017	02/20/2018

6.2.3 TEST PROCEDURES (please refer to measurement standard)

8.1 Option 2:

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW \geq 3 RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be \geq 6 dB.

6.2.4 TEST SETUP





6.2.5 TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11a mode / 5745 ~ 5825MHz

Channel	Frequency (MHz)	6dB Bandwidth(B) (MHz)		Limit (kHz)	Test Result
		Antenna 0	Antenna 1		
Low	5745	16.54	16.55	>500	PASS
Mid	5785	16.56	16.55		PASS
High	5825	16.54	16.55		PASS

Test mode: IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz

Channel	Frequency (MHz)	6dB Bandwidth(B) (MHz)		Limit (kHz)	Test Result
		Antenna 0	Antenna 1		
Low	5745	17.67	16.35	>500	PASS
Mid	5785	17.72	16.52		PASS
High	5825	17.63	16.54		PASS

Test mode: IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz

Channel	Frequency (MHz)	6dB Bandwidth(B) (MHz)		Limit (kHz)	Test Result
		Antenna 0	Antenna 1		
Low	5755	36.41	36.41	>500	PASS
High	5795	36.40	36.41		PASS

Test mode: IEEE 802.11ac 20 mode / 5745 ~ 5825MHz

Channel	Frequency (MHz)	6dB Bandwidth(B) (MHz)		Limit (kHz)	Test Result
		Antenna 0	Antenna 1		
Low	5745	17.68	17.72	>500	PASS
Mid	5785	17.65	17.63		PASS
High	5825	17.68	17.65		PASS

Test mode: IEEE 802.11ac 40 mode / 5755 ~ 5795MHz

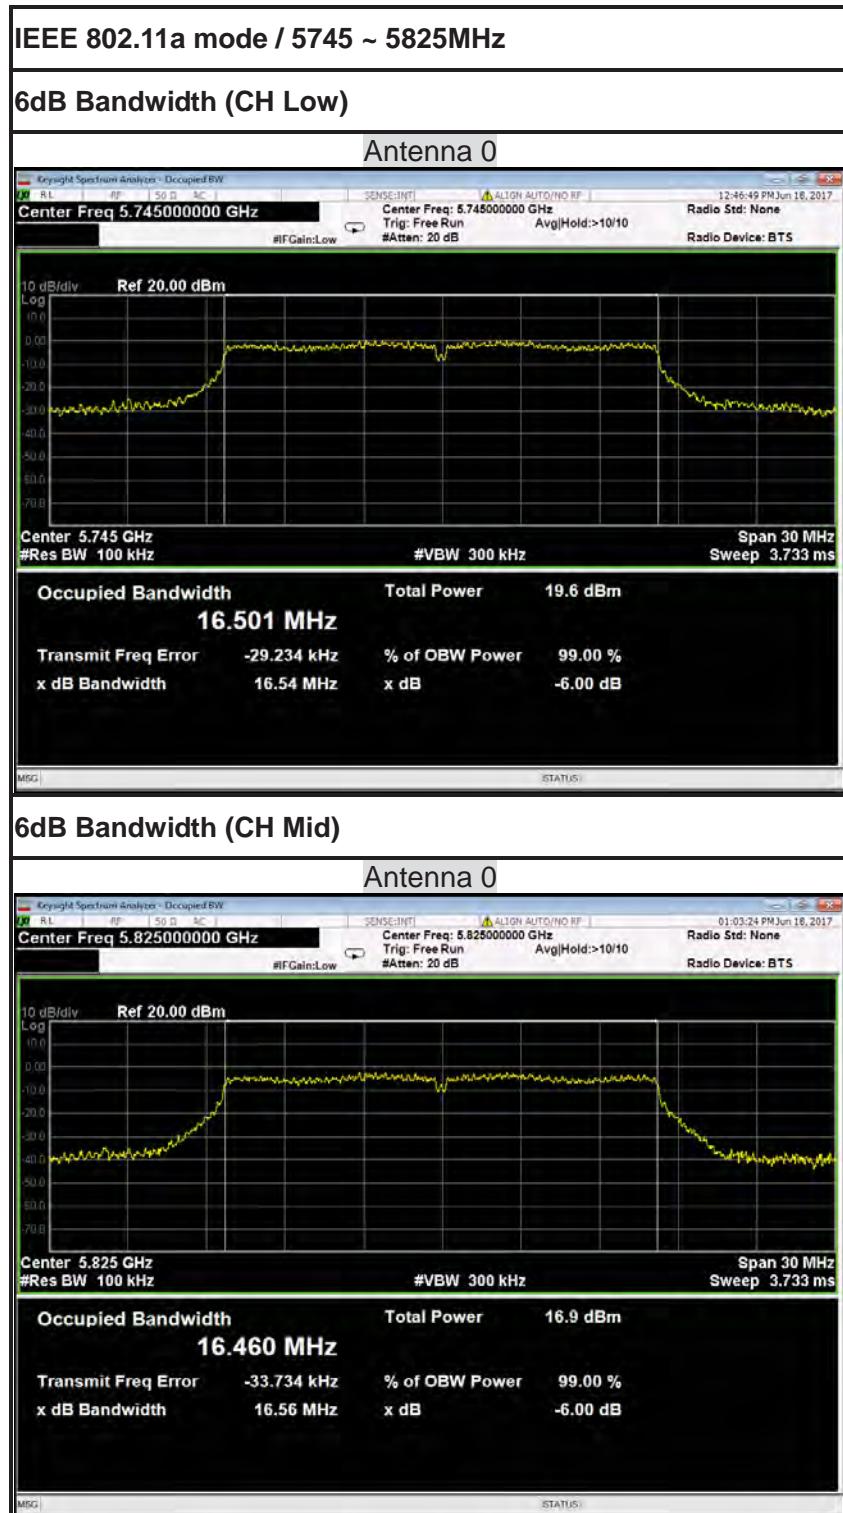
Channel	Frequency (MHz)	6dB Bandwidth(B) (MHz)		Limit (kHz)	Test Result
		Antenna 0	Antenna 1		
Low	5755	36.40	36.40	>500	PASS
High	5795	36.41	36.40		PASS

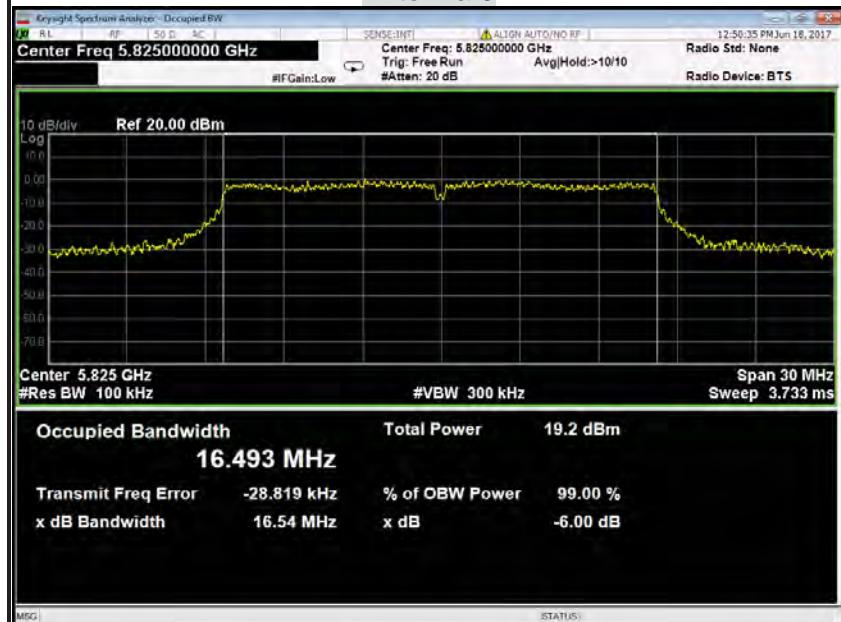
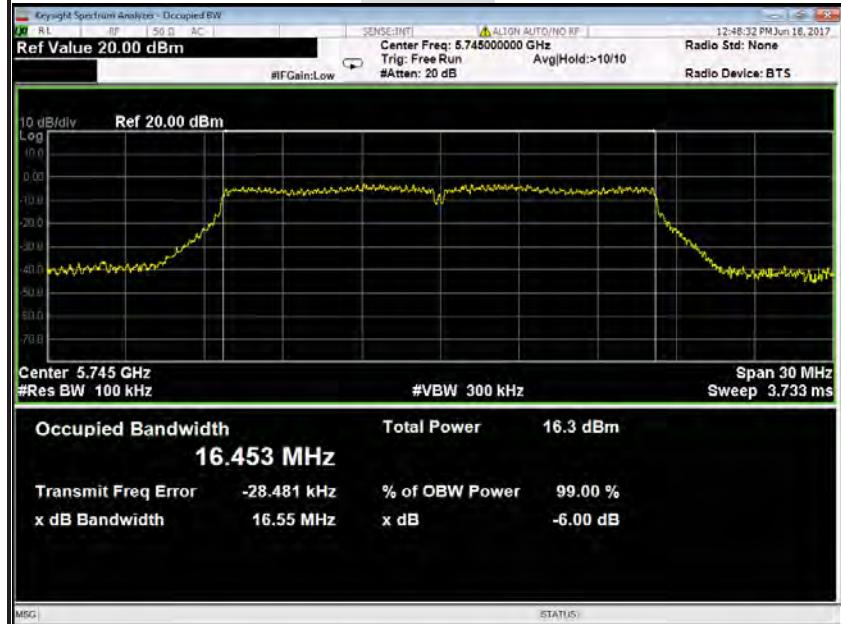
Test mode: IEEE 802.11ac 80 mode / 5775MHz

Channel	Frequency (MHz)	6dB Bandwidth(B) (MHz)		Limit (kHz)	Test Result
		Antenna 0	Antenna 1		
	5775	76.58	76.52	>500	PASS



Test Plot



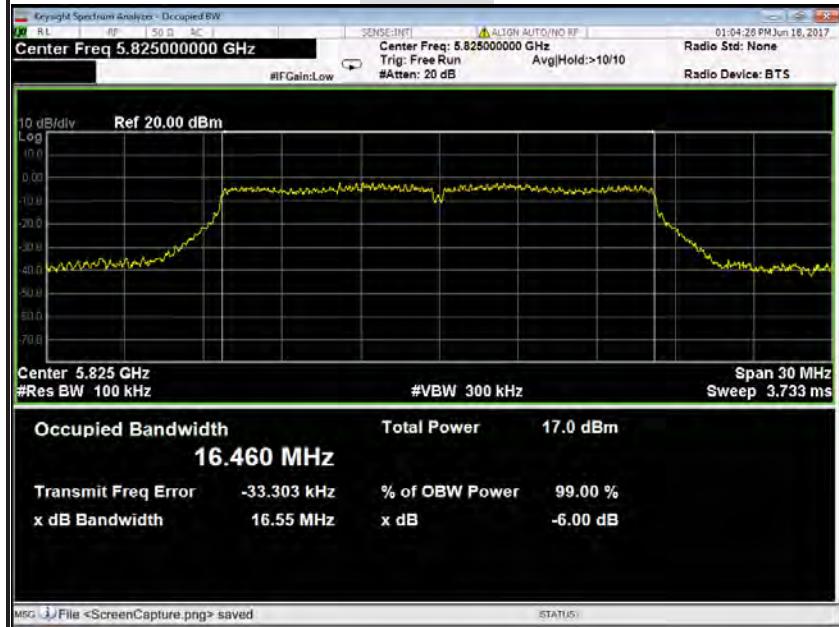
**6dB Bandwidth (CH High)****Antenna 0****IEEE 802.11a mode / 5745 ~ 5825MHz****6dB Bandwidth (CH Low)****Antenna 1**

**6dB Bandwidth (CH Mid)**

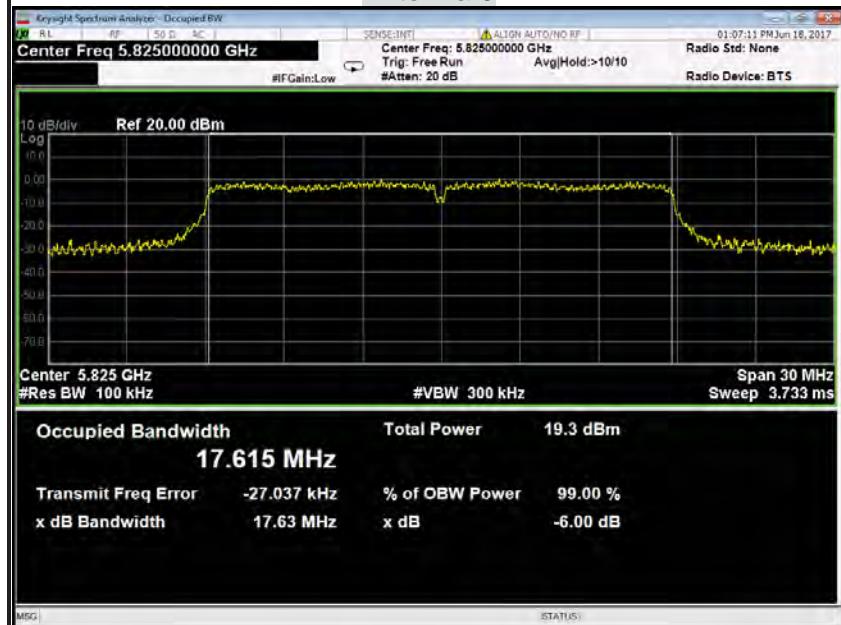
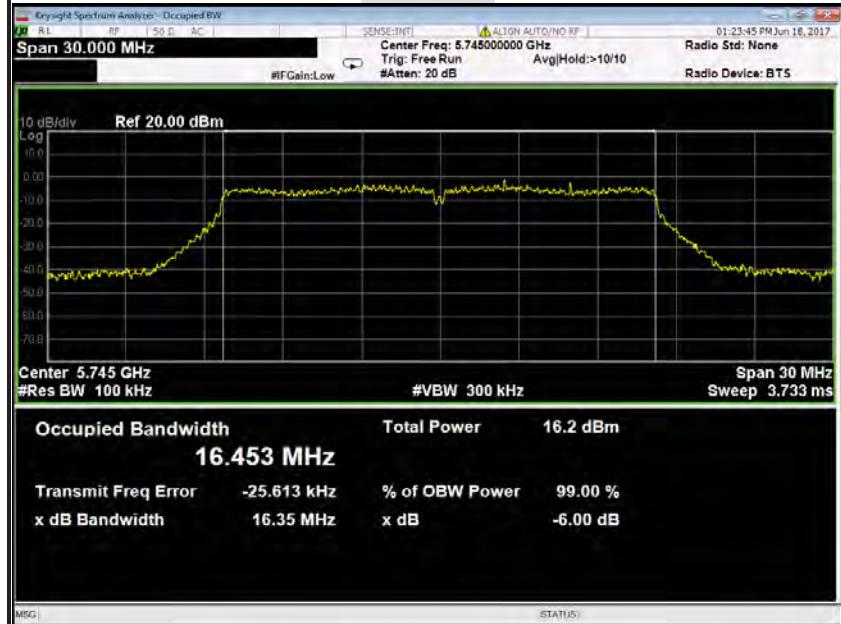
Antenna 1

**6dB Bandwidth (CH High)**

Antenna 1

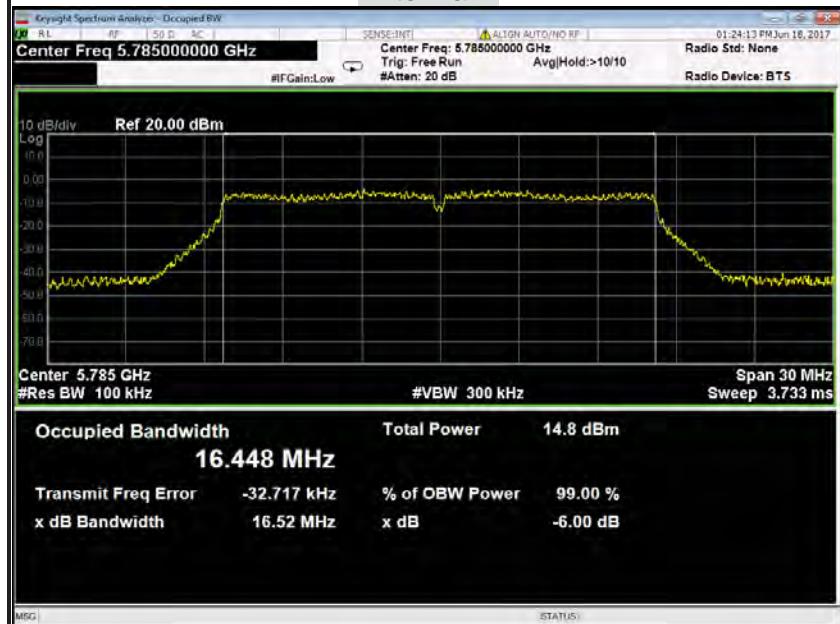


**IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz****6dB Bandwidth (CH Low)****Antenna 0****6dB Bandwidth (CH Mid)****Antenna 0**

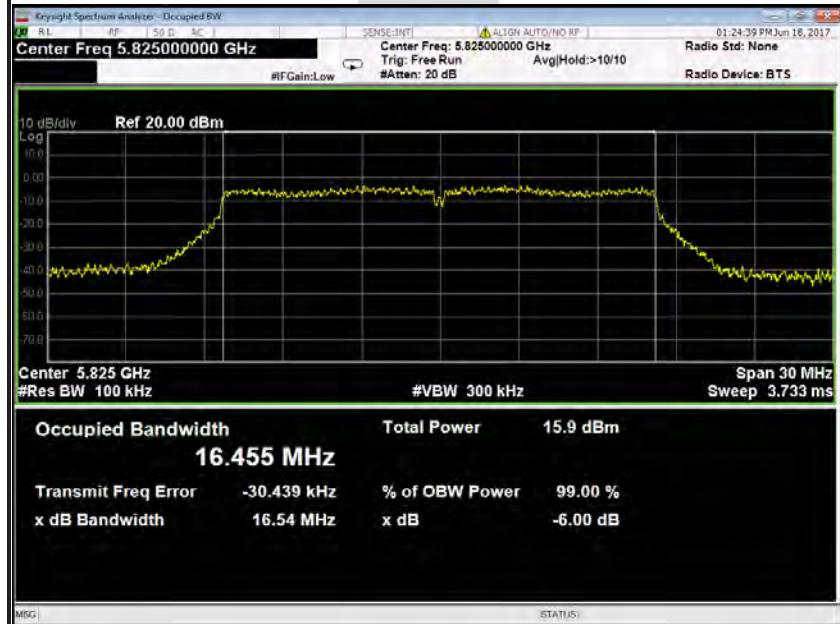
**6dB Bandwidth (CH High)****Antenna 0****IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz****6dB Bandwidth (CH Low)****Antenna 1**

**6dB Bandwidth (CH Mid)**

Antenna 1

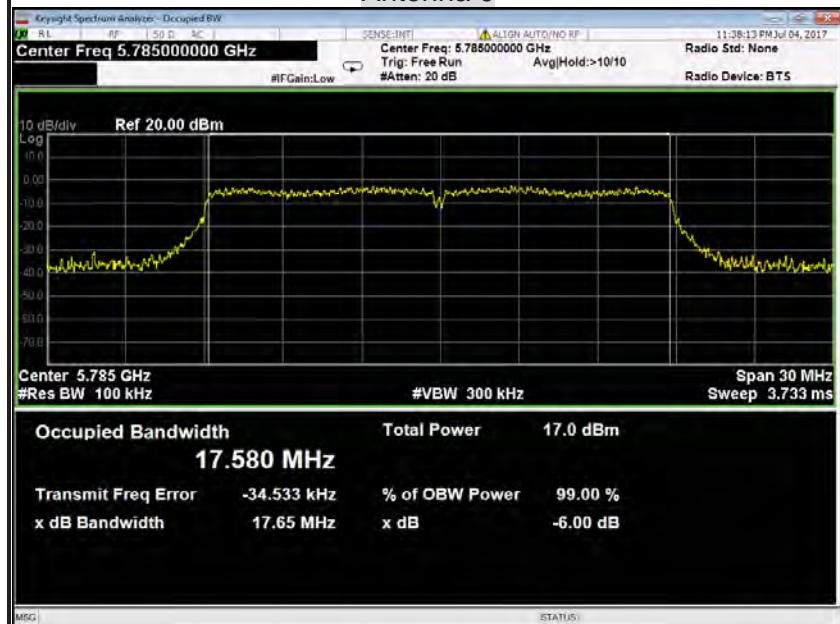
**6dB Bandwidth (CH High)**

Antenna 1



**IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz****6dB Bandwidth (CH Low)****Antenna 0****6dB Bandwidth (CH High)****Antenna 0**

**IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz****6dB Bandwidth (CH Low)****Antenna 1****6dB Bandwidth (CH High)****Antenna 1**

**IEEE 802.11ac 20 mode / 5745 ~ 5825MHz****6dB Bandwidth (CH Low)****Antenna 0****6dB Bandwidth (CH Mid)****Antenna 0**

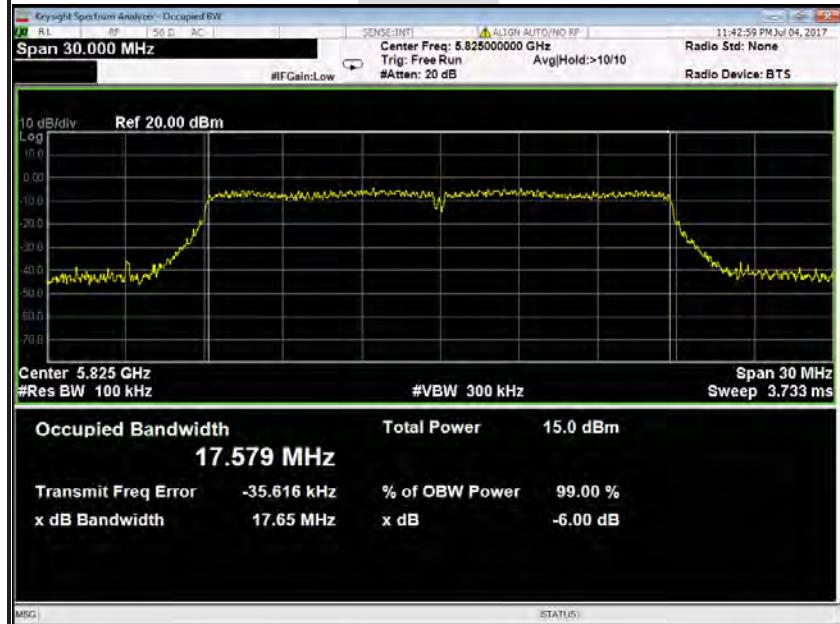
**6dB Bandwidth (CH High)****Antenna 0****IEEE 802.11ac 20 mode / 5745 ~ 5825MHz****6dB Bandwidth (CH Low)****Antenna 1**

**6dB Bandwidth (CH Mid)**

Antenna 1

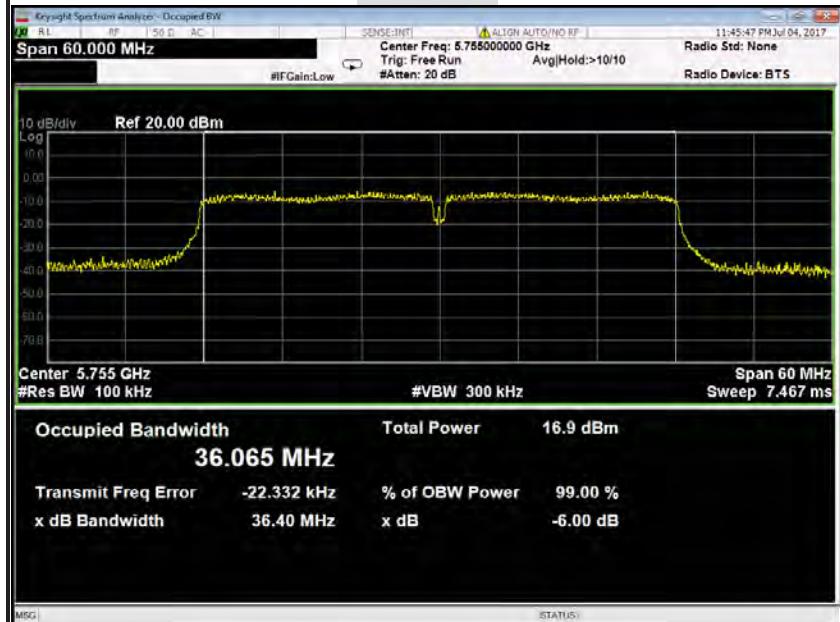
**6dB Bandwidth (CH High)**

Antenna 1



**IEEE 802.11ac 40 mode / 5755 ~ 5795MHz****6dB Bandwidth (CH Low)**

Antenna 0

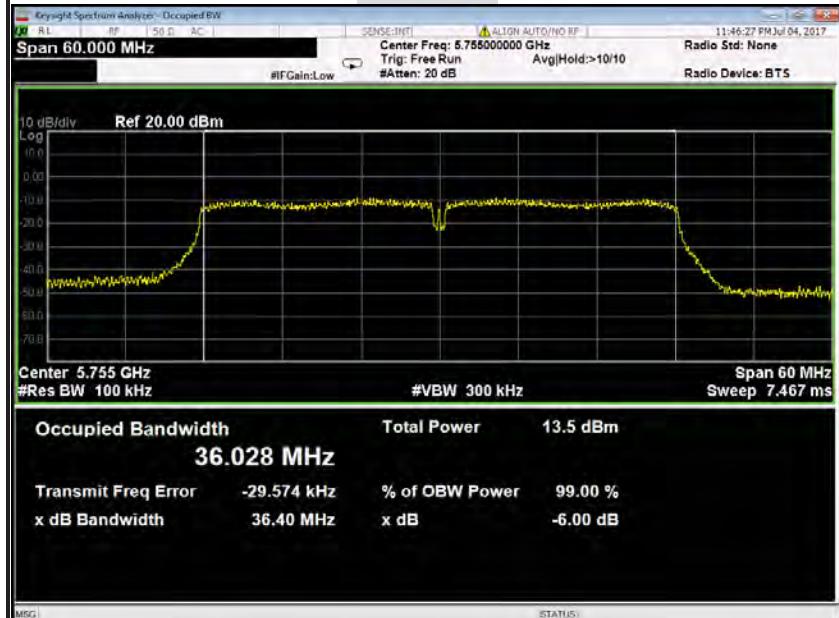
**6dB Bandwidth (CH High)**

Antenna 0

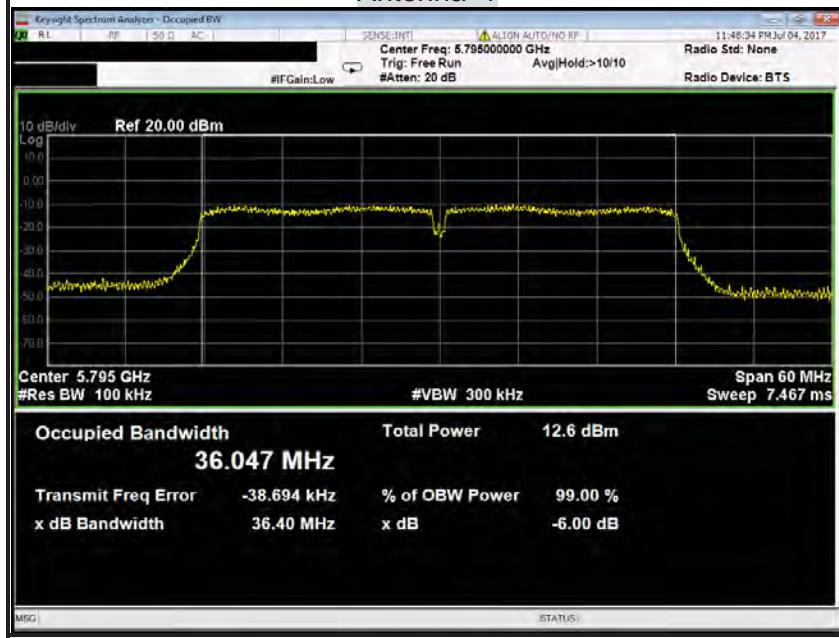


**IEEE 802.11ac 40 mode / 5755 ~ 5795MHz****6dB Bandwidth (CH Low)**

Antenna 1

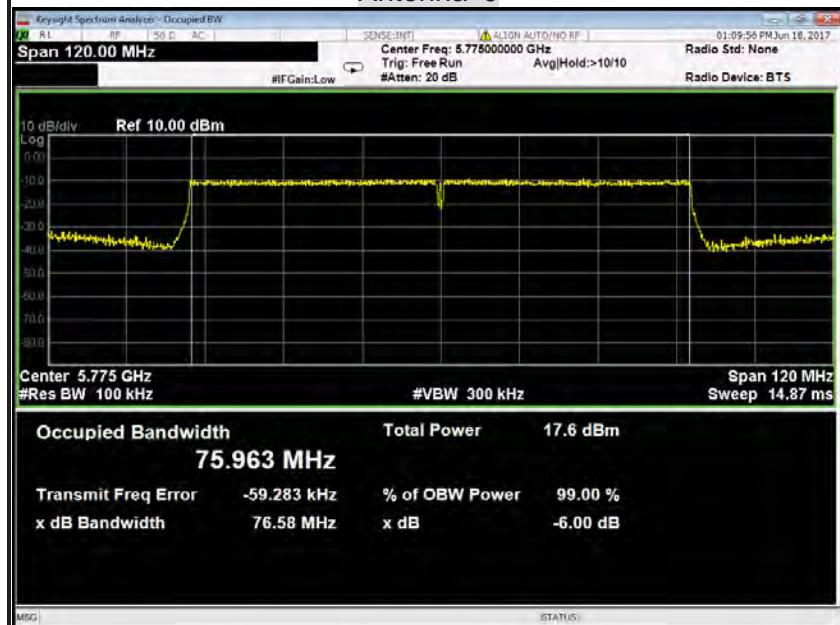
**6dB Bandwidth (CH High)**

Antenna 1

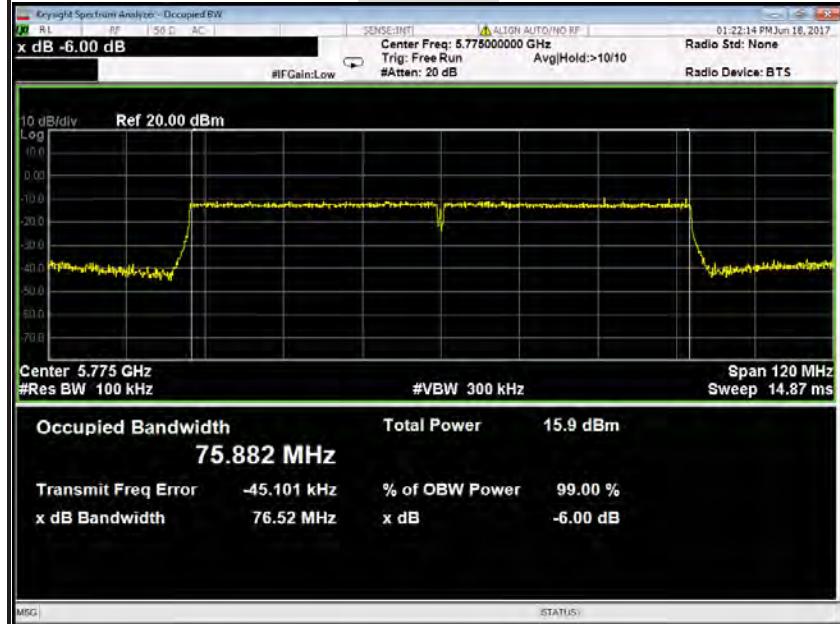


**IEEE 802.11ac 80 MHz mode / 5775MHz****6dB Bandwidth**

Antenna 0

**IEEE 802.11ac 80 MHz mode / 5775MHz****6dB Bandwidth**

Antenna 1





6.3 ANTENNA GAIN

MEASUREMENT

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For UNII devices, the IEEE 802.11a mode is used.

MEASUREMENT PARAMETERS

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	3 MHz
Video bandwidth	3 MHz
Trace-Mode	Max hold

LIMITS

FCC	IC
Antenna Gain	
6 dBi	



TEST RESULTS

IEEE 802.11a mode

Antenna 0

IEEE 802.11a mode / 5180 ~ 5240MHz

T _{nom}	V _{nom}	Lowest channel 5180MHz	Highest channel 5240MHz
Conducted power [dBm] Measured with OFDM modulation		2.96	3.17
Radiated power [dBm] Measured with OFDM modulation		6.37	6.83
Gain [dBi] Calculated		3.61	3.76
Measurement uncertainty	± 1.5 dB (cond.) / ± 3 dB (rad.)		

IEEE 802.11a mode / 5260 ~ 5320MHz

T _{nom}	V _{nom}	Lowest channel 5260MHz	Highest channel 5320MHz
Conducted power [dBm] Measured with OFDM modulation		3.78	3.77
Radiated power [dBm] Measured with OFDM modulation		6.59	6.89
Gain [dBi] Calculated		3.81	3.12
Measurement uncertainty	± 1.5 dB (cond.) / ± 3 dB (rad.)		

IEEE 802.11a mode / 5500 ~ 5700MHz

T _{nom}	V _{nom}	Lowest channel 5500MHz	Highest channel 5700MHz
Conducted power [dBm] Measured with OFDM modulation		3.27	0.58
Radiated power [dBm] Measured with OFDM modulation		6.35	4.28
Gain [dBi] Calculated		3.08	3.70
Measurement uncertainty	± 1.5 dB (cond.) / ± 3 dB (rad.)		

IEEE 802.11a mode / 5745 ~ 5825MHz

T _{nom}	V _{nom}	Lowest channel 5745MHz	Highest channel 5825MHz
Conducted power [dBm] Measured with OFDM modulation		5.26	3.56
Radiated power [dBm] Measured with OFDM modulation		8.37	6.92
Gain [dBi] Calculated		3.11	3.36
Measurement uncertainty	± 1.5 dB (cond.) / ± 3 dB (rad.)		



Antenna 1

IEEE 802.11a mode / 5180 ~ 5240MHz

T _{nom}	V _{nom}	Lowest channel 5180MHz	Highest channel 5240MHz
Conducted power [dBm] Measured with OFDM modulation		0.18	0.18
Radiated power [dBm] Measured with OFDM modulation		4.02	3.97
Gain [dBi] Calculated		3.84	3.79
Measurement uncertainty		± 1.5 dB (cond.) / ± 3 dB (rad.)	

IEEE 802.11a mode / 5260 ~ 5320MHz

T _{nom}	V _{nom}	Lowest channel 5260MHz	Highest channel 5320MHz
Conducted power [dBm] Measured with OFDM modulation		0.28	0.49
Radiated power [dBm] Measured with OFDM modulation		3.96	4.03
Gain [dBi] Calculated		3.68	3.54
Measurement uncertainty		± 1.5 dB (cond.) / ± 3 dB (rad.)	

IEEE 802.11a mode / 5500 ~ 5700MHz

T _{nom}	V _{nom}	Lowest channel 5500MHz	Highest channel 5700MHz
Conducted power [dBm] Measured with OFDM modulation		0.22	2.73
Radiated power [dBm] Measured with OFDM modulation		4.08	6.59
Gain [dBi] Calculated		3.86	3.86
Measurement uncertainty		± 1.5 dB (cond.) / ± 3 dB (rad.)	

IEEE 802.11a mode / 5745 ~ 5825MHz

T _{nom}	V _{nom}	Lowest channel 5745MHz	Highest channel 5825MHz
Conducted power [dBm] Measured with OFDM modulation		2.28	0.64
Radiated power [dBm] Measured with OFDM modulation		6.19	4.83
Gain [dBi] Calculated		3.91	4.19
Measurement uncertainty		± 1.5 dB (cond.) / ± 3 dB (rad.)	



6.4 OUTPUT POWER

6.4.1 LIMIT

According to §15.407(a)& FCC R&O FCC 14 - 30,

(1) For the band 5.15-5.25 GHz.

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Note to paragraph (a)(3): The Commission strongly recommends that parties employing U-NII devices to provide critical communications services should determine if there are any nearby Government radar systems that could affect their operation.

**Specified Limit of the Output Power****Test mode: IEEE 802.11a mode / 5260 ~ 5320MHz**

Channel	Frequency (MHz)	26 dB Bandwidth (B) (MHz)		10*Log(B) (dB)		11 + 10*Log(B) (dBm)		Maximum Conducted Output Power Limit (dBm)	
		Antenna 0	Antenna 1	Antenna 0	Antenna 1	Antenna 0	Antenna 1	Antenna 0	Antenna 1
Low	5260	19.94	19.83	13.00	12.97	24.00	23.97	24.00	23.97
Mid	5300	19.87	19.70	12.98	12.94	23.98	23.94	23.98	23.94
High	5320	20.06	19.72	13.02	12.95	24.02	23.95	24.00	23.95

Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz

Channel	Frequency (MHz)	26 dB Bandwidth (B) (MHz)		10*Log(B) (dB)		11 + 10*Log(B) (dBm)		Maximum Conducted Output Power Limit (dBm)	
		Antenna 0	Antenna 1	Antenna 0	Antenna 1	Antenna 0	Antenna 1	Antenna 0	Antenna 1
Low	5500	19.99	19.96	13.01	13.00	24.01	24.00	24.00	24.00
Mid	5580	19.88	19.70	12.98	12.94	23.98	23.94	23.98	23.94
High	5700	19.78	19.85	12.96	12.98	23.96	23.98	23.96	23.98

Test mode: IEEE 802.11n HT 20 MHz mode / 5260 ~ 5320MHz

Channel	Frequency (MHz)	26 dB Bandwidth (B) (MHz)		10*Log(B) (dB)		11 + 10*Log(B) (dBm)		Maximum Conducted Output Power Limit (dBm)	
		Antenna 0	Antenna 1	Antenna 0	Antenna 1	Antenna 0	Antenna 1	Antenna 0	Antenna 1
Low	5260	20.12	20.18	13.04	13.05	24.04	24.05	24.00	24.00
Mid	5300	20.22	20.05	13.06	13.02	24.06	24.02	24.00	24.00
High	5320	20.15	20.25	13.04	13.06	24.04	24.06	24.00	24.00

Test mode: IEEE 802.11n HT 20 MHz mode / 5500 ~ 5700MHz

Channel	Frequency (MHz)	26 dB Bandwidth (B) (MHz)		10*Log(B) (dB)		11 + 10*Log(B) (dBm)		Maximum Conducted Output Power Limit (dBm)	
		Antenna 0	Antenna 1	Antenna 0	Antenna 1	Antenna 0	Antenna 1	Antenna 0	Antenna 1
Low	5500	20.08	20.27	13.03	13.07	24.03	24.07	24.00	24.00
Mid	5580	20.20	20.28	13.05	13.07	24.05	24.07	24.00	24.00
High	5700	20.27	20.28	13.07	13.07	24.07	24.07	24.00	24.00

**IEEE 802.11n HT 40 MHz mode / 5270 ~ 5310MHz**

Channel	Frequency (MHz)	26 dB Bandwidth (B) (MHz)		10*Log(B) (dB)		11 + 10*Log(B) (dBm)		Maximum Conducted Output Power Limit (dBm)	
		Antenna 0	Antenna 1	Antenna 0	Antenna 1	Antenna 0	Antenna 1	Antenna 0	Antenna 1
Low	5270	41.06	40.67	16.13	16.09	27.13	27.09	24.00	24.00
High	5310	40.46	40.43	16.07	16.07	27.07	27.07	24.00	24.00

IEEE 802.11n HT 40 MHz mode / 5510 ~ 5670MHz

Channel	Frequency (MHz)	26 dB Bandwidth (B) (MHz)		10*Log(B) (dB)		11 + 10*Log(B) (dBm)		Maximum Conducted Output Power Limit (dBm)	
		Antenna 0	Antenna 1	Antenna 0	Antenna 1	Antenna 0	Antenna 1	Antenna 0	Antenna 1
Low	5510	40.65	40.85	16.09	16.11	27.09	27.11	24.00	24.00
Mid	5550	40.01	39.66	16.02	15.98	27.02	26.98	24.00	24.00
High	5670	40.73	40.66	16.10	16.09	27.10	27.09	24.00	24.00

Test mode: IEEE 802.11ac20 MHz mode / 5260 ~ 5320MHz

Channel	Frequency (MHz)	26 dB Bandwidth (B) (MHz)		10*Log(B) (dB)		11 + 10*Log(B) (dBm)		Maximum Conducted Output Power Limit (dBm)	
		Antenna 0	Antenna 1	Antenna 0	Antenna 1	Antenna 0	Antenna 1	Antenna 0	Antenna 1
Low	5260	20.14	20.09	13.04	13.03	24.04	24.03	24.00	24.00
Mid	5300	20.18	20.15	13.05	13.04	24.05	24.04	24.00	24.00
High	5320	20.22	20.15	13.06	13.04	24.06	24.04	24.00	24.00

Test mode: IEEE 802.11ac 20 mode / 5500 ~ 5700MHz

Channel	Frequency (MHz)	26 dB Bandwidth (B) (MHz)		10*Log(B) (dB)		11 + 10*Log(B) (dBm)		Maximum Conducted Output Power Limit (dBm)	
		Antenna 0	Antenna 1	Antenna 0	Antenna 1	Antenna 0	Antenna 1	Antenna 0	Antenna 1
Low	5500	20.25	20.19	13.06	13.05	24.06	24.05	24.00	24.00
Mid	5580	20.20	19.94	13.05	13.00	24.05	24.00	24.00	24.00
High	5700	20.30	20.17	13.07	13.05	24.07	24.05	24.00	24.00



IEEE 802.11ac 40 mode / 5270 ~ 5310MHz

Channel	Frequency (MHz)	26 dB Bandwidth (B) (MHz)		10*Log(B) (dB)		11 + 10*Log(B) (dBm)		Maximum Conducted Output Power Limit (dBm)	
		Antenna 0	Antenna 1	Antenna 0	Antenna 1	Antenna 0	Antenna 1	Antenna 0	Antenna 1
Low	5270	40.68	41.21	16.09	16.15	27.09	27.15	24.00	24.00
High	5310	40.72	40.65	16.10	16.09	27.10	27.09	24.00	24.00

IEEE 802.11ac 40 mode / 5510 ~ 5670MHz

Channel	Frequency (MHz)	26 dB Bandwidth (B) (MHz)		10*Log(B) (dB)		11 + 10*Log(B) (dBm)		Maximum Conducted Output Power Limit (dBm)	
		Antenna 0	Antenna 1	Antenna 0	Antenna 1	Antenna 0	Antenna 1	Antenna 0	Antenna 1
Low	5510	40.59	40.03	16.08	16.02	27.08	27.02	24.00	24.00
Mid	5550	40.42	40.77	16.07	16.10	27.07	27.10	24.00	24.00
High	5670	40.57	40.39	16.08	16.06	27.08	27.06	24.00	24.00

IEEE 802.11ac 80 mode / 5290MHz

Channel	Frequency (MHz)	26 dB Bandwidth (B) (MHz)		10*Log(B) (dB)		11 + 10*Log(B) (dBm)		Maximum Conducted Output Power Limit (dBm)	
		Antenna 0	Antenna 1	Antenna 0	Antenna 1	Antenna 0	Antenna 1	Antenna 0	Antenna 1
	5290	81.36	81.93	16.00	19.13	30.10	30.13	24.00	24.00

IEEE 802.11ac 80 mode / 5530MHz

Channel	Frequency (MHz)	26 dB Bandwidth (B) (MHz)		10*Log(B) (dB)		11 + 10*Log(B) (dBm)		Maximum Conducted Output Power Limit (dBm)	
		Antenna 0	Antenna 1	Antenna 0	Antenna 1	Antenna 0	Antenna 1	Antenna 0	Antenna 1
	5530	81.83	81.99	16.00	19.14	30.13	30.14	24.00	24.00

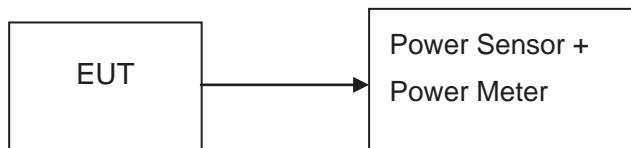


6.4.2 MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Power Meter	Anritsu	ML2495A	1204003	02/21/2017	02/20/2018
Power Sensor	Anritsu	MA2411B	1126150	02/21/2017	02/20/2018

Remark: Each piece of equipment is scheduled for calibration once a year.

6.4.3 TEST CONFIGURATIONS



6.4.4 TEST PROCEDURE

The EUT was connected to a Power Meter through a 50Ω RF cable.

6.4.5 TEST RESULTS

No non-compliance noted



6.4.6 TEST DATA

IEEE 802.11a mode / 5180 ~ 5240MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)		AVG Output Power (W)		Limit (dBm)	Result
		Antenna 0	Antenna 1	Antenna 0	Antenna 1		
Low	5180	15.20	12.40	0.03311	0.01738	24.00	PASS
Mid	5200	15.00	12.30	0.03162	0.01698		PASS
High	5240	15.40	12.40	0.03467	0.01738		PASS

IEEE 802.11a mode / 5260~ 5320MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)		AVG Output Power (W)		Limit (dBm)	Result
		Antenna 0	Antenna 1	Antenna 0	Antenna 1		
Low	5260	16.00	12.50	0.03981	0.01778	23.94	PASS
Mid	5300	15.90	12.70	0.03890	0.01862		PASS
High	5320	16.00	12.70	0.03981	0.01862		PASS

IEEE 802.11a mode / 5500 ~ 5700MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)		AVG Output Power (W)		Limit (dBm)	Result
		Antenna 0	Antenna 1	Antenna 0	Antenna 1		
Low	5500	15.50	12.00	0.03548	0.01585	23.94	PASS
Mid	5580	17.10	14.30	0.05129	0.02692		PASS
High	5700	12.80	9.50	0.01905	0.00891		PASS

IEEE 802.11a mode / 5745 ~ 5825MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)		AVG Output Power (W)		Limit (dBm)	Result
		Antenna 0	Antenna 1	Antenna 0	Antenna 1		
Low	5745	17.50	14.50	0.05623	0.02818	30.00	PASS
Mid	5785	17.40	14.70	0.05495	0.02951		PASS
High	5825	15.82	12.86	0.03819	0.01932		PASS

**IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	AVG Output Power (dBm)			AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Total			
Low	5180	15.60	12.90	17.47	0.05581	22.51	PASS
Mid	5200	15.20	12.20	16.96	0.04971		PASS
High	5240	12.80	12.60	15.71	0.03725		PASS

IEEE 802.11n HT 20 MHz mode / 5260~ 5320MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)			AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Total			
Low	5260	16.10	12.90	17.80	0.06024	22.51	PASS
Mid	5300	16.10	13.00	17.83	0.06069		PASS
High	5320	15.90	12.70	17.60	0.05753		PASS

IEEE 802.11n HT 20 MHz mode / 5500 ~ 5700MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)			AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Total			
Low	5500	15.50	12.20	17.17	0.05208	22.51	PASS
Mid	5580	17.10	14.70	19.07	0.08080		PASS
High	5700	12.50	9.20	14.17	0.02610		PASS

IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)			AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Total			
Low	5745	17.80	15.20	19.70	0.09337	28.51	PASS
Mid	5785	14.00	16.60	18.50	0.07083		PASS
High	5825	17.60	14.90	19.47	0.08845		PASS



IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)			AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Total			
Low	5190	14.80	11.80	16.56	0.04534	22.51	PASS
High	5230	14.70	11.90	16.53	0.04500		PASS

IEEE 802.11n HT 40 MHz mode / 5270 ~ 5310MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)			AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Total			
Low	5270	15.10	12.00	16.83	0.04821	22.51	PASS
High	5310	15.40	12.30	17.13	0.05166		PASS

IEEE 802.11n HT 40 MHz mode / 5510 ~ 5670MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)			AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Total			
Low	5510	12.70	10.10	14.60	0.02885	22.51	PASS
Mid	5550	12.00	9.20	13.83	0.02417		PASS
High	5670	10.50	7.60	12.30	0.01697		PASS

IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)			AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Total			
Low	5755	9.70	13.00	14.67	0.02929	28.51	PASS
High	5795	11.70	8.60	13.43	0.02204		PASS

**IEEE 802.11ac 20 mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	AVG Output Power (dBm)			AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Total			
Low	5180	15.66	13.05	17.56	0.05700	22.51	PASS
Mid	5200	15.25	12.26	17.02	0.05032		PASS
High	5240	12.83	12.73	15.79	0.03794		PASS

IEEE 802.11ac 20 mode / 5260~ 5320MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)			AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Total			
Low	5260	16.15	12.85	17.82	0.06049	22.51	PASS
Mid	5300	16.15	13.03	17.87	0.06130		PASS
High	5320	15.95	12.75	17.65	0.05819		PASS

IEEE 802.11ac 20 mode / 5500 ~ 5700MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)			AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Total			
Low	5500	15.57	12.28	17.24	0.05296	22.51	PASS
Mid	5580	17.13	14.78	19.12	0.08170		PASS
High	5700	12.55	9.26	14.22	0.02642		PASS

IEEE 802.11ac 20 mode / 5745 ~ 5825MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)			AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Total			
Low	5745	17.88	15.25	19.77	0.09487	28.51	PASS
Mid	5785	14.05	16.65	18.55	0.07165		PASS
High	5825	17.65	14.98	19.53	0.08969		PASS

**IEEE 802.11ac 40 mode / 5190 ~ 5230MHz**

Channel	Frequency (MHz)	AVG Output Power (dBm)			AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Total			
Low	5190	14.88	11.88	16.64	0.04618	22.51	PASS
High	5230	14.75	11.95	16.58	0.04552		PASS

IEEE 802.11ac 40 mode / 5270 ~ 5310MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)			AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Total			
Low	5270	15.18	12.45	17.04	0.05054	22.51	PASS
High	5310	15.45	12.37	17.19	0.05233		PASS

IEEE 802.11ac 40 mode / 5510 ~ 5670MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)			AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Total			
Low	5510	12.75	10.30	14.71	0.02955	22.51	PASS
Mid	5550	12.08	9.25	13.90	0.02456		PASS
High	5670	10.58	7.65	12.37	0.01725		PASS

IEEE 802.11ac 40 mode / 5755 ~ 5795MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)			AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Total			
Low	5755	9.75	13.08	14.74	0.02976	28.51	PASS
High	5795	11.78	8.65	13.50	0.02239		PASS

**IEEE 802.11ac 80 mode / 5210MHz**

Channel	Frequency (MHz)	AVG Output Power (dBm)			AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Total			
	5210	11.90	8.80	13.63	0.02307	22.51	PASS

IEEE 802.11ac 80 mode / 5290MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)			AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Total			
	5290	11.30	8.40	13.10	0.02041	22.51	PASS

IEEE 802.11ac 80 mode / 5530MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)			AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Total			
	5530	10.90	10.80	13.86	0.02433	22.51	PASS

IEEE 802.11ac 80 mode / 5775MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)			AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Total			
	5775	9.70	9.30	12.51	0.01784	28.51	PASS



6.5 BAND EDGES MEASUREMENT

6.5.1 LIMIT

According to §15.407(b)

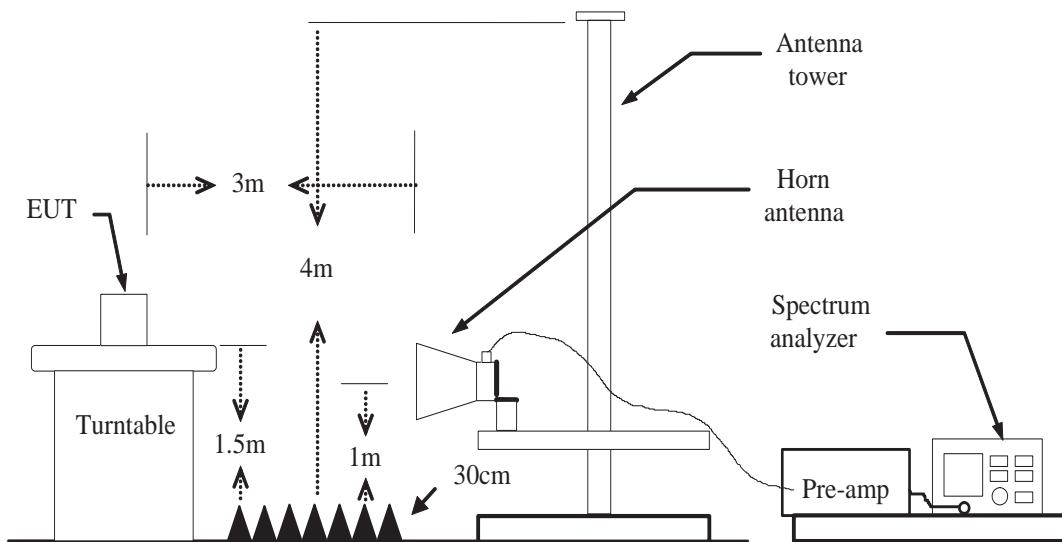
- (1) The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.
- (2) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency block edges as the design of the equipment permits.

6.5.2 MEASUREMENT EQUIPMENT USED

Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	N9010A	MY52221469	02/21/2017	02/20/2018
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2017	02/20/2018
Amplifier	EMEC	EM330	060661	03/18/2017	03/17/2018
High Noise Amplifier	Agilent	8449B	3008A01838	02/21/2017	02/20/2018
Loop Antenna	COM-POWER	AL-130	121044	09/25/2016	09/24/2017
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/21/2017	02/20/2018
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/27/2017	02/27/2018
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	02/27/2017	02/27/2018
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/21/2017	02/20/2018
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The FCC Site Registration number is 101879.
3. N.C.R = No Calibration Required.

6.5.3 TEST CONFIGURATION



6.5.4 TEST PROCEDURE

1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1 / VBW=3MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO / Detector=Peak
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.



6.5.5 TEST RESULT

IEEE 802.11a mode / 5500 ~ 5700MHz

Antenna 0:

1. Operating Frequency: 5500-5700MHz
2. CH Low: 5500MHz, CH High: 5700MHz
3. 26dB bandwidth: CH Low: 19.99MHz, CH High: 19.78MHz
4. Frequency Range: 5490.0050MHz, 5709.8900MHz

Antenna 1:

1. Operating Frequency: 5500-5700MHz
2. CH Low: 5500MHz, CH High: 5700MHz
3. 26dB bandwidth: CH Low: 19.96MHz, CH High: 19.85MHz
4. Frequency Range: 5490.0200MHz, 5709.9250MHz

IEEE 802.11a mode / 5745 ~ 5825MHz

Antenna 0:

1. Operating Frequency: 5745-5825MHz
2. CH Low: 5745MHz, CH High: 5825MHz
3. 26dB bandwidth: CH Low: 19.89MHz, CH High: 19.97MHz
4. Frequency Range: 5735.0550MHz, 5834.9850MHz

Antenna 1:

1. Operating Frequency: 5745-5825MHz
2. CH Low: 5745MHz, CH High: 5825MHz
3. 26dB bandwidth: CH Low: 19.77MHz, CH High: 19.75MHz
4. Frequency Range: 5735.1150MHz, 5834.8750MHz



IEEE 802.11n HT 20 MHz mode / 5500 ~ 5700MHz

Antenna 0:

1. Operating Frequency: 5500-5700MHz
2. CH Low: 5500MHz, CH High: 5700MHz
3. 26dB bandwidth: CH Low: 20.08MHz, CH High: 20.27MHz
4. Frequency Range: 5489.9600MHz, 5710.1350MHz

Antenna 1:

1. Operating Frequency: 5500-5700MHz
2. CH Low: 5500MHz, CH High: 5700MHz
3. 26dB bandwidth: CH Low: 20.27MHz, CH High: 20.28MHz
4. Frequency Range: 5489.8650MHz, 5710.1400MHz

IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz

Antenna 0:

1. Operating Frequency: 5745-5825MHz
2. CH Low: 5745MHz, CH High: 5825MHz
3. 26dB bandwidth: CH Low: 20.29MHz, CH High: 20.23MHz
4. Frequency Range: 5734.8550MHz, 5835.1150MHz

Antenna 1:

1. Operating Frequency: 5745-5825MHz
2. CH Low: 5745MHz, CH High: 5825MHz
3. 26dB bandwidth: CH Low: 20.29MHz, CH High: 20.20MHz
4. Frequency Range: 5734.8550MHz, 5835.1000MHz



IEEE 802.11n HT 40 MHz mode / 5510 ~ 5670MHz

Antenna 0:

1. Operating Frequency: 5510-5670MHz
2. CH Low: 5510MHz, CH High: 5670MHz
3. 26dB bandwidth: CH Low: 40.65MHz, CH High: 40.73MHz
4. Frequency Range: 5489.6750MHz, 5690.3650MHz

Antenna 1:

1. Operating Frequency: 5510-5670MHz
2. CH Low: 5510MHz, CH High: 5670MHz
3. 26dB bandwidth: CH Low: 40.85MHz, CH High: 40.66MHz
4. Frequency Range: 5489.5750MHz, 5690.3300MHz

IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz

Antenna 0:

1. Operating Frequency: 5755-5795MHz
2. CH Low: 5755MHz, CH High: 5795MHz
3. 26dB bandwidth: CH Low: 45.81MHz, CH High: 40.82MHz
4. Frequency Range: 5732.0950MHz, 5815.4100MHz

Antenna 1:

1. Operating Frequency: 5755-5795MHz
2. CH Low: 5755MHz, CH High: 5795MHz
3. 26dB bandwidth: CH Low: 40.95MHz, CH High: 40.82MHz
4. Frequency Range: 5734.5250MHz, 5815.4100MHz



IEEE 802.11ac 20 mode / 5500 ~ 5700MHz

Antenna 0:

1. Operating Frequency: 5500-5700MHz
2. CH Low: 5500MHz, CH High: 5700MHz
3. 26dB bandwidth: CH Low: 20.08MHz, CH High: 20.27MHz
4. Frequency Range: 5489.9600MHz, 5710.1350MHz

Antenna 1:

1. Operating Frequency: 5500-5700MHz
2. CH Low: 5500MHz, CH High: 5700MHz
3. 26dB bandwidth: CH Low: 20.27MHz, CH High: 20.28MHz
4. Frequency Range: 5489.8650MHz, 5710.1400MHz

IEEE 802.11ac 20 mode / 5745 ~ 5825MHz

Antenna 0:

1. Operating Frequency: 5745-5825MHz
2. CH Low: 5745MHz, CH High: 5825MHz
3. 26dB bandwidth: CH Low: 20.16MHz, CH High: 20.26MHz
4. Frequency Range: 5734.9200MHz, 5835.1300MHz

Antenna 1:

1. Operating Frequency: 5745-5825MHz
2. CH Low: 5745MHz, CH High: 5825MHz
3. 26dB bandwidth: CH Low: 20.44MHz, CH High: 20.10MHz
4. Frequency Range: 5734.7800MHz, 5835.0500MHz



IEEE 802.11ac 40 mode / 5510 ~ 5670MHz

Antenna 0:

1. Operating Frequency: 5510-5670MHz
2. CH Low: 5510MHz, CH High: 5670MHz
3. 26dB bandwidth: CH Low: 40.65MHz, CH High: 40.73MHz
4. Frequency Range: 5489.6750MHz, 5690.3650MHz

Antenna 1:

1. Operating Frequency: 5510-5670MHz
2. CH Low: 5510MHz, CH High: 5670MHz
3. 26dB bandwidth: CH Low: 40.85MHz, CH High: 40.66MHz
4. Frequency Range: 5489.5750MHz, 5690.3300MHz

IEEE 802.11ac 40 mode / 5755 ~ 5795MHz

Antenna 0:

1. Operating Frequency: 5755-5795MHz
2. CH Low: 5755MHz, CH High: 5795MHz
3. 26dB bandwidth: CH Low: 40.58MHz, CH High: 40.92MHz
4. Frequency Range: 5734.7100MHz, 5815.4600MHz

Antenna 1:

1. Operating Frequency: 5755-5795MHz
2. CH Low: 5755MHz, CH High: 5795MHz
3. 26dB bandwidth: CH Low: 40.39MHz, CH High: 40.73MHz
4. Frequency Range: 5734.8050MHz, 5815.3650MHz