

SAR Compliance Test Report

Date of Report	21/01/2025	Client's Contact person:	Sanna Lindholm
Number of pages:	34	Responsible Test engineer:	Jesper Varis
Testing laboratory:	Verkotan Oy Elektroniikkatie 17 90590 Oulu Finland	Client:	Savox Communications Oy Ab Keilaranta 15 B 02150 Espoo Finland
Tested device	DECT Portable (Savox TRICS T10)		
Related reports:	-		
Testing has been carried out in accordance with:	47CFR §2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices FCC published RF exposure KDB procedures IEC/IEEE 62209-1528, 2020 Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices RSS-102, Issue 6, 2023 Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signatures:	21.01.2025 Laboratory Manager <i>Miia Nurkkala</i>		

TABLE OF CONTENTS

1. SUMMARY OF SAR TEST REPORT	3
1.1 TEST DETAILS	3
1.2 MAXIMUM RESULTS	4
1.2.1 Standalone SAR	4
1.2.2 Maximum Drift	4
1.2.3 Measurement Uncertainty	4
2. DESCRIPTION OF THE DEVICE UNDER TEST (DUT)	5
3. OUTPUT POWER	6
3.1 MAXIMUM SPECIFIED CONDUCTED OUTPUT POWER	6
3.2 TESTED CONDUCTED POWER	6
4. TEST EQUIPMENT	7
4.1 TEST EQUIPMENT LIST	9
4.1.1 Support data for extension of dipole calibration interval	9
4.1.2 Isotropic E-field Probe Type EX3DV4	9
4.2 PHANTOMS	10
4.3 TISSUE SIMULANTS	10
4.4 SYSTEM VALIDATION STATUS	11
4.5 SYSTEM CHECK	11
4.5.1 Tissue Simulant Verification	11
5. TEST PROCEDURE	12
5.1 SPOT CHECK MEASUREMENTS	12
5.1.1 Headsets	12
5.1.2 Clip	12
5.2 DEVICE HOLDER	13
5.3 TEST POSITIONS	13
5.3.1 Body-worn Configuration, 0mm separation distance	13
5.4 SCAN PROCEDURES	14
5.5 SAR AVERAGING METHODS	14
6. MEASUREMENT UNCERTAINTY	15
7. TEST RESULTS	16
7.1 SAR RESULTS FOR BODY EXPOSURE CONDITION WITH 0MM SEPARATION	16
7.2 ZOOM SCAN COMPLIANCE	17
APPENDIX A: PHOTOS OF THE DUT	18
APPENDIX B: SYSTEM CHECK SCAN	19
APPENDIX C: MEASUREMENT SCANS	21
APPENDIX D: RELEVANT PAGES FROM PROBE & DAE CALIBRATION REPORTS	23
APPENDIX E: RELEVANT PAGES FROM DIPOLE CALIBRATION REPORTS	31

1. SUMMARY OF SAR TEST REPORT

1.1 Test Details

Equipment under Test (DUT):

Product:	DECT Portable
Manufacturer:	Savox Communications Oy Ab
Model:	Savox TRICS T10
Serial Number:	E0180006 (Conducted), E0180002 (SAR)
FCC ID Number:	TUFWICS
ISED ID Number:	6574A-WICS
DUT Number:	20444 (Conducted), 20445 (SAR)
Battery Type used in testing:	Li-Ion Battery
State of the Sample:	Production sample

Testing information:

Testing performed:	11.06.2024 – 14.06.2024
Notes:	The test report has been evaluated and updated to demonstrate compliance of the tested product against RSS-102 Issue 6 — Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands).
Document history:	This report replaces "FCC_ISED_SAR report_WPCU TRICS T10_ID6635_28102024". Additional information added as required by RSS-102.SAR.MEAS. Standard updated from RSS-102, Issue 5 to RSS-102, Issue 6.
Document ID:	FCC_ISED_SAR report_WPCU TRICS T10_ID6635_21012025.docx
Temperature °C	22±2 / Controlled
Humidity RH%	30±20 / Controlled
Measurement performed by:	Jesper Varis
FCC Test Firm Designation Number:	FI0005
ISED Company Number:	22218

1.2 Maximum Results

The maximum reported* SAR values for Body-worn for transmitting systems are shown in a table below. The device conforms to the requirements of the standards when the maximum reported SAR value is less than or equal to the limit. The SAR limit specified in FCC 47 CFR part 2 (2.1093) and Health Canada's RF exposure guideline, Safety Code 6 for Head/Body SAR_{1g} is 1.6 W/kg.

1.2.1 Standalone SAR

System	Highest Reported* SAR _{1g} [W/kg] in Body-Worn Exposure Condition, 0mm separation distance	Result
DECT	0.025	PASS

* Reported SAR Values are scaled to upper limit of power tuning tolerance.

1.2.2 Maximum Drift

Maximum Drift During Measurements	0.31dB*
-----------------------------------	---------

*Larger than 5% drifts included to scaling factors

1.2.3 Measurement Uncertainty

SAR 1g: 0.3 – 3 GHz:

Expanded Uncertainty (k=2) 95 %	±22.1 %
---------------------------------	---------

2. DESCRIPTION OF THE DEVICE UNDER TEST (DUT)

The DUT is a man worn tactical radio interface controller system with wired and wireless connectivity and it has functionality to control multiple communications devices simultaneously ensuring flexible audio communications between teams and within single team. The DUT supports DECT radio technology.

The DUT has two antennas but it does not support simultaneous transmission.

Device Category	Portable
Exposure Environment	General population uncontrolled

Supported Frequency Bands and Operational Modes

TX Frequency bands	Modes of Operation	Transmitter Frequency Range [MHz]
	DECT US	1920 - 1930

3. OUTPUT POWER

3.1 Maximum specified conducted output power

From the customer, including tune-up tolerances;

Technology	Output Power [dBm]	Max Output Power [dBm]	Tolerance $\pm$ [dB]
DECT	19.5	20.5	1

3.2 Tested conducted power

Measured conducted output power at transmitting antenna connector;

Technology	Frequency [MHz]	Antenna	Max Output Power [dBm]
DECT CH 4	1921.536	1	17.33
DECT CH 2	1924.992	1	17.29
DECT CH 0	1928.448	1	17.24
DECT CH 4	1921.536	2	17.54
DECT CH 2	1924.992	2	17.51
DECT CH 0	1928.448	2	17.46

The DUT has two antennas, but it does not support simultaneous transmission.

4. TEST EQUIPMENT

Dasy near field scanning system, manufactured by SPEAG was used for SAR testing. The test system consists of high precision robotics system (Staubli), robot controller, computer, near-field probe, probe alignment sensor, and a phantom containing the tissue equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location of maximum electromagnetic field.

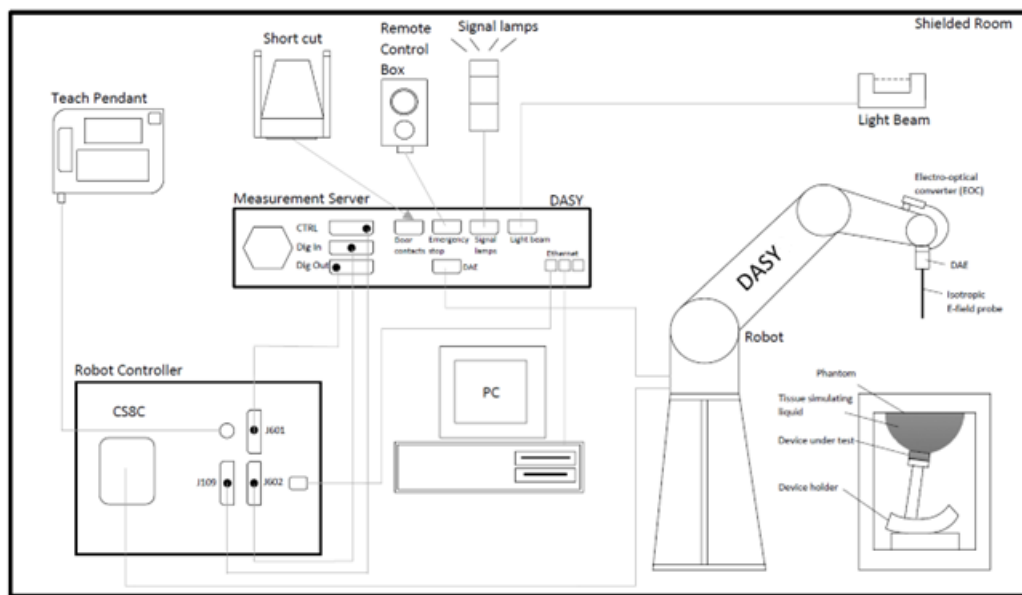


Figure 1 Schematic Laboratory Picture

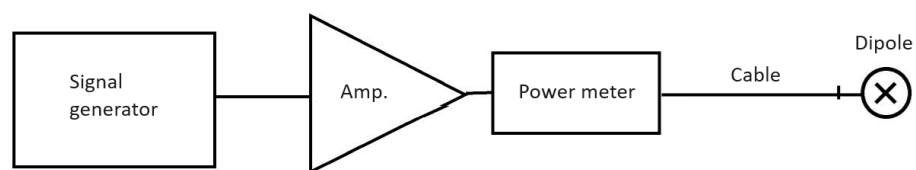


Figure 2 Signal source setup for system check



Figure 3 System check setup using a verification dipole

4.1 Test Equipment List

Main used test system components are listed below. For full equipment list and calibration intervals, please contact the testing laboratory.

Test Equipment	Model	Serial Number	Calibration Date	Interval [years]
Amplifier, 800MHz-4200MHz, 10W	10S1G4A	320421	NA	NA
DAE4, converter	DAE4	1332	02/2024	1
Inline Peak Power Sensor	MA24105A	2102058	10/2023	1
Isotropic DOS probe	EX3DV4	7447	02/2024	1
System validation dipole	D1900V2	511	03/2023	3
Vector Signal Generator	MG3710E	6262028676	11/2023	1
Network Analyzer	E5071C	MY46102812	05/2024	1
DASY5 Software	52.8.8.1258	-	NA	NA

4.1.1 Support data for extension of dipole calibration interval

		Measured on 09/2024			Calibrated		
Dipole and Serial Number	Frequency [MHz]	Return Loss [dB]	Impedance [Ω]		Return Loss [dB]	Impedance [Ω]	
D1900V2 - 511	1900	-23.0	44.5	-3.8	-23.34	48.5	-6.6

4.1.2 Isotropic E-field Probe Type EX3DV4

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Calibration certificate in Appendix D
Frequency	4 MHz to 10 GHz (dosimetry) Linearity: ± 0.2 dB (30 MHz to 10 GHz)
Directivity (typical)	± 0.1 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	General dosimetry up to 6 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

4.2 Phantoms

Modular flat phantom:

The Triple Modular Phantom "MFP V5.1 C" consists of three identical modules that can be installed and removed separately without emptying the liquid. It is used for compliance testing of small wireless devices in body-worn configurations. The size of the phantom is 292 x 178 x 178 mm and it has shell thickness of 2.0 ± 0.2 mm. The phantom conforms to the requirements of IEC/IEEE 62209-1528 and FCC published RF Exposure KDB Procedures.

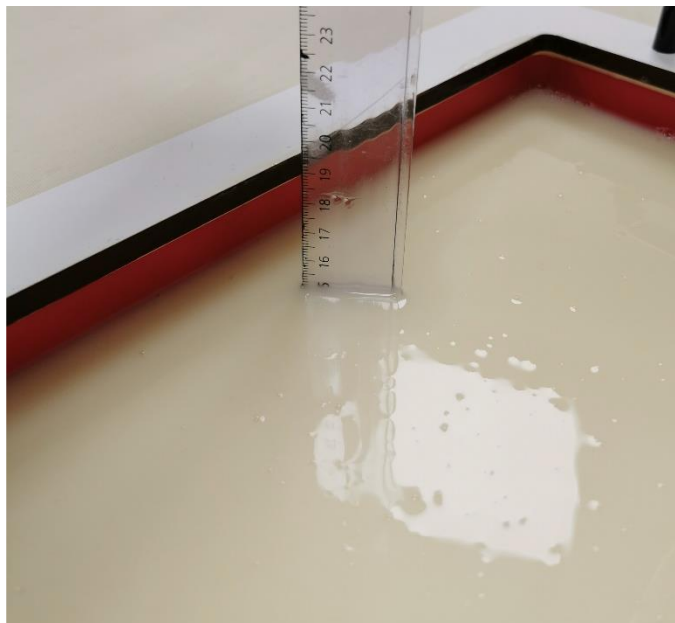


Figure 4 Tissue simulant depth

4.3 Tissue Simulants

Recommended values for the dielectric parameters of the tissue simulants are given in IEC/IEEE 62209-1528 and FCC published RF Exposure KDB Procedures. The dielectric parameters of the used tissue simulants were within $\pm 10\%$ of the recommended values at frequencies under 3GHz. A liquid compensation algorithm was used in DASY with which measured peak average SAR values were corrected for the deviation of used liquid. Depth of the tissue simulant was at least 15.0 cm from the inner surface of the flat phantom.

Tissue simulant liquid Ingredients
Deionized Water, tween, salt

4.4 System Validation Status

Frequency [MHz]	Dipole Type / SN	Probe Type / SN	Calibrated Signal Type	DAE Unit / SN	Dielectric Constant [ϵ']	Conductivity σ [S/m]	Date
1900	D1900V2-SN:511	EX3DV4 - SN: 7447	CW	DAE 4 / 1332	40.09	1.43	04/2024

4.5 System Check

System check is conducted according to FCC KDB 865664 D01 and IEC/IEEE 62209-1528 to verify SAR test system measurement accuracy before any accredited measurements. System check signal source setup is described in Figure 2 and photo of the test setup is shown in Figure 3.

Date	Tissue Type	Tissue Temp. [°C]	Frequency [MHz]	Input Power [mW]	Measured SAR _{1g} [W/kg]	1 W Target SAR _{1g} [W/kg]	1 W Normalized SAR _{1g} [W/kg]	Deviation [%]	Plot #
13.06.2024	WB Head	22	1900	250	9.15	38.02	36.6	-3.7	1
14.06.2024	WB Head	22	1900	250	8.92	38.02	35.68	-6.2	2

4.5.1 Tissue Simulant Verification

The use of head liquid is allowed for SAR testing of body-worn devices as per RSS-102.SAR.MEAS and TCB Council Workshop April 2019 slides.

Date	Tissue Type	Tissue Temp [°C]	Frequency [MHz]	Measured		Target		Deviation	
				Dielectric Constant [ϵ']	Conductivity σ [S/m]	Dielectric Constant [ϵ'] Target	Conductivity σ [S/m] Target	ϵ' [%]	σ [%]
13.06.2024	WB Head	22	1900	39.48	1.43	40.0	1.4	-1.3	1.9
13.06.2024	WB Head	22	1921.536	39.44	1.44	40.0	1.4	-1.4	2.8
13.06.2024	WB Head	22	1924.992	39.43	1.44	40.0	1.4	-1.4	2.9
13.06.2024	WB Head	22	1928.448	39.43	1.44	40.0	1.4	-1.4	3.0
14.06.2024	WB Head	22	1900	38.87	1.41	40.0	1.4	-2.8	0.9
14.06.2024	WB Head	22	1921.536	38.83	1.42	40.0	1.4	-2.9	1.8
14.06.2024	WB Head	22	1924.992	38.82	1.43	40.0	1.4	-2.9	1.9
14.06.2024	WB Head	22	1928.448	38.82	1.43	40.0	1.4	-3.0	2.0

5. TEST PROCEDURE

Testing was carried out in accordance with FCC KDB Publications 447498 D04 Interim General RF Exposure Guidance v01 and RSS-102, Issue 6. Test configurations for SAR testing were selected based on conducted power measurements. Low, mid and high frequency channels for the configuration with the highest SAR value were tested as per ISED notice 2016-DRS001. The DUT was set to transmit at maximum power and duty cycle (4%) using test software.

5.1 Spot Check Measurements

5.1.1 Headsets

The DUT can be used with two different headsets: earplugs and headphones. Headphones were used for full SAR testing. The effects of the earplugs were examined by remeasuring the worst-case configuration that has the largest SAR value. Spot check measurement verified that the different headsets did not affect the SAR results.

Photos of the different headsets are presented in Appendix A.

Band	Channel	Frequency [MHz]	Antenna	Maximum Power [dBm]	Conducted Power [dBm]	Test position	Headset	Measured SAR _{1g} [W/kg]	Power Drift [dB]	Duty Cycle [%]	Scaling Factor	Reported SAR _{1g} [W/kg]
DECT US	4	1921.536	2	20.5	17.54	Front	Headphones	0.012	-0.20	4	1.98	0.024
DECT US	4	1921.536	2	20.5	17.54	Front	Earplugs	0.012	-0.01	4	1.98	0.024

5.1.2 Clip

The DUT can be used with two different clips that both contain metal. Clip A was used for full SAR testing since the separation distance with clip A is shorter between the DUT and the phantom than clip B. The effects of the different clips were examined by remeasuring SAR on back side of the DUT with clip B. Spot check measurement verified that the worst-case configuration was by using the clip A.

Photos of the different clips are presented in Appendix A.

Band	Channel	Frequency [MHz]	Antenna	Maximum Power [dBm]	Conducted Power [dBm]	Test position	Clip	Measured SAR _{1g} [W/kg]	Power Drift [dB]	Duty Cycle [%]	Scaling Factor	Reported SAR _{1g} [W/kg]
DECT US	4	1921.536	2	20.5	17.54	Back	A	0.001	0.00	4	1.98	0.0026
DECT US	4	1921.536	2	20.5	17.54	Back	B	0.00002	0.00	4	1.98	0.00004

5.2 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy system.



Device holder supplied by SPEAG

5.3 Test Positions

5.3.1 Body-worn Configuration, 0mm separation distance

Body SAR was tested from the front, back, left, right and bottom side of the device. The device was placed in the SPEAG holder and lifted towards the phantom until the distance between the phantom and the device was 0mm. The distance between the device and the phantom was kept at 0mm using a separate flat spacer that was removed before the start of the measurements.

Photos of the test positions are presented in appendix A

5.4 Scan Procedures

First, area scans were used for determination of the field distribution. Next, a zoom scan was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the area scan and again at the end of the zoom scan.

5.5 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within Dasy are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation of Large Sets of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighboring points by a least-square method. For the zoom scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the zoom scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

6. MEASUREMENT UNCERTAINTY

DASY5 Uncertainty Budget According to IEC/IEEE 62209-1528 (Frequency band: 300MHz - 3GHz range)								
Symbol	Error Description	Uncert. value	Prob. Dist.	Div.	(c) 1g	(c) 10g	Std. Unc. (1g)	Std. Unc. (10g)
Measurement System Errors								
CF	Probe Calibration	±12.0%	N	√2	1	1	±6.0%	±6.0%
CF _{drift}	Probe Calibration Drift	±1.7%	R	√3	1	1	±1.0%	±1.0%
LIN	Probe Linearity	±4.7%	R	√3	1	1	±2.7%	±2.7%
BBS	Broadband Signal	±3.0%	R	√3	1	1	±1.7%	±1.7%
ISO	Probe Isotropy	±7.6%	R	3	1	1	±4.4%	±4.4%
DAE	Data Acquisition	±0.3%	N	1	1	1	±0.3%	±0.3%
AMB	RF Ambient	±1.8%	N	1	1	1	±1.8%	±1.8%
Δ _{sys}	Probe Positioning	±3.9%	N	1	0.14	0.14	±0.5%	±0.5%
DAT	Data Processing	±1.2%	N	1	1	1	±1.2%	±1.2%
Phantom and Device Errors								
LIQ(σ)	Conductivity (meas.) ^{DAK}	±2.5%	N	√1	0.78	0.71	±2.0%	±1.8%
LIQ(T _a)	Conductivity (temp.) ^{BB}	±3.3%	R	√3	0.78	0.71	±1.5%	±1.4%
EPS	Phantom Permittivity	±14.0%	R	3	0	0	±0%	±0%
DIS	Distance DUT - TSL	±2.0%	N	1	2	2	±4.0%	±4.0%
D _{xyz}	Device Positioning (±0.5mm)	±1.0%	N	1	1	1	±1.0%	±1.0%
H	Device Holder	±3.6%	N	√1	1	1	±3.6%	±3.6%
MOD	DUT Modulation ^m	±2.4%	R	√3	1	1	±1.4%	±1.4%
TAS	Time-average SAR	±2.6%	R	3	1	1	±1.5%	±1.5%
RF _{drift}	DUT drift	±2.5%	N	1	1	1	±2.5%	±2.5%
VAL	Val Antenna Unc. ^{val}	±0.0%	N	1	1	1	±0%	±0%
RF _{in}	Unc. Input Power ^{val}	±0.0%	N	1	1	1	±0%	±0%
Correction to the SAR results								
C(ε, σ)	Deviation to Target	±1.9%	N	√1	1	0.84	±1.9%	±1.6%
C(R)	SAR scaling ^p	±0%	R	3	1	1	±0%	±0%
u(ΔSAR)	Combined Uncertainty						±11.0%	±10.9%
U	Expanded Uncertainty						±22.1%	±21.9%

7. TEST RESULTS

7.1 SAR Results for Body Exposure Condition with 0mm separation

Band	Channel	Frequency [MHz]	Antenna	Maximum Power [dBm]	Conducted Power [dBm]	Test position	Measured SAR _{1g} [W/kg]	Power Drift [dB]	Duty Cycle [%]	Scaling Factor	Reported SAR _{1g} [W/kg]	Plot #
DECT US	4	1921.536	1	20.5	17.33	Front	0.009	-0.09	4	2.07	0.018	3
DECT US	4	1921.536	1	20.5	17.33	Back	0***	0**	4	2.07	0***	
DECT US	4	1921.536	1	20.5	17.33	Left	0.001	0**	4	2.07	0.003	
DECT US	4	1921.536	1	20.5	17.33	Right	0***	0**	4	2.07	0***	
DECT US	4	1921.536	1	20.5	17.33	Bottom	0***	0**	4	2.07	0***	
DECT US	0	1928.448	1	20.5	17.24	Front	0.007	0.10	4	2.12	0.015	
DECT US	2	1924.992	1	20.5	17.29	Front	0.008	-0.07	4	2.09	0.017	

**Due to low e-field generated by DUT at the location of drift measurement, the measurements are not applicable.

***Due to low e-field generated by DUT, the measurements are not applicable

Band	Channel	Frequency [MHz]	Antenna	Maximum Power [dBm]	Conducted Power [dBm]	Test position	Measured SAR _{1g} [W/kg]	Power Drift [dB]	Duty Cycle [%]	Scaling Factor	Reported SAR _{1g} [W/kg]	Plot #
DECT US	4	1921.536	2	20.5	17.54	Front	0.012	-0.20	4	1.98	0.024	
DECT US	4	1921.536	2	20.5	17.54	Back	0.001	0**	4	1.98	0.003	
DECT US	4	1921.536	2	20.5	17.54	Left	0***	0**	4	1.98	0***	
DECT US	4	1921.536	2	20.5	17.54	Right	0.009	0.31*	4	2.12	0.019	
DECT US	4	1921.536	2	20.5	17.54	Bottom	0.0003	0**	4	1.98	0***	
DECT US	0	1928.448	2	20.5	17.46	Front	0.012	-0.07	4	2.01	0.024	
DECT US	2	1924.992	2	20.5	17.51	Front	0.013	0.03	4	1.99	0.025	4

*Larger than 5% drifts included to scaling factors

**Due to low e-field generated by DUT at the location of drift measurement, the measurements are not applicable.

***Due to low e-field generated by DUT, the measurements are not applicable

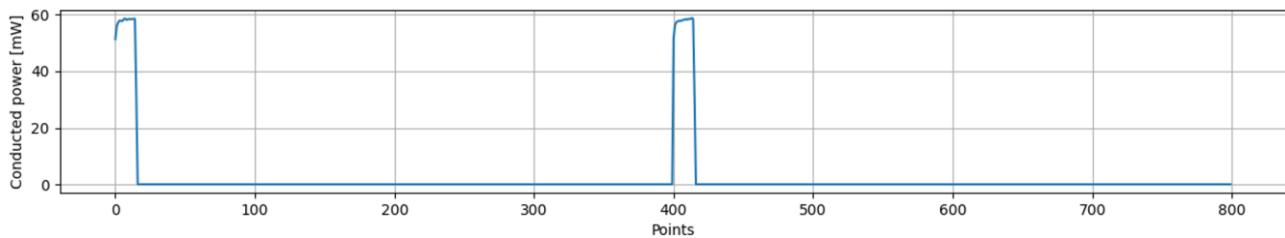


Figure 5 Measured 4% uplink duty cycle used during SAR testing

7.2 Zoom Scan Compliance

According to IEC 62209-1528, the zoom scan complies if the peak spatial-average SAR is below 0.1 W/kg, or if the following criteria is met:

1. The smallest horizontal distance from the local SAR peaks to all points 3 dB below the SAR peak is larger than the horizontal grid step.
2. Ratio of SAR at the second measured point (M2) to the SAR at the closest measured point (M1) at the x-y location of the measured maximum is at least 30%.

Zoom scan compliance according to IEC 62209-1528 is automatically verified by DASY software and all zoom scans in this test report do pass the criteria. The smallest horizontal distance and Ratio between measurement points M2 and M1 of the highest SAR results is available in Appendix C.

APPENDIX A: PHOTOS OF THE DUT

Annex A is presented in a separate document.

APPENDIX B: SYSTEM CHECK SCAN

Plot 1

Date/Time: 13/06/2024 08:39:33

Test Laboratory: Verkotan Oy

DUT: D1900V2 - SN511; Type: D1900V2; Serial: SN511

Communication System: UID 0, CW (0); Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz;

Communication System PAR: 0 dB;

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.427$ S/m; $\epsilon_r = 39.483$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS (IEEE/IEC)

DASY Configuration:

- Probe: EX3DV4 - SN7447; ConvF(7.96, 7.8, 8.03) @ 1900 MHz; Calibrated: 23/02/2024
 - Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -4.0, 31.0$
 - Electronics: DAE4 Sn1332; Calibrated: 14/02/2024
 - Phantom: MFP_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx;
 - DASYS2 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/System Check 1900MHz/Area Scan (61x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 14.4 W/kg

Configuration/System Check 1900MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 94.22 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 16.6 W/kg

SAR(1 g) = 9.15 W/kg; SAR(10 g) = 4.79 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 54.9%

Maximum value of SAR (measured) = 14.0 W/kg

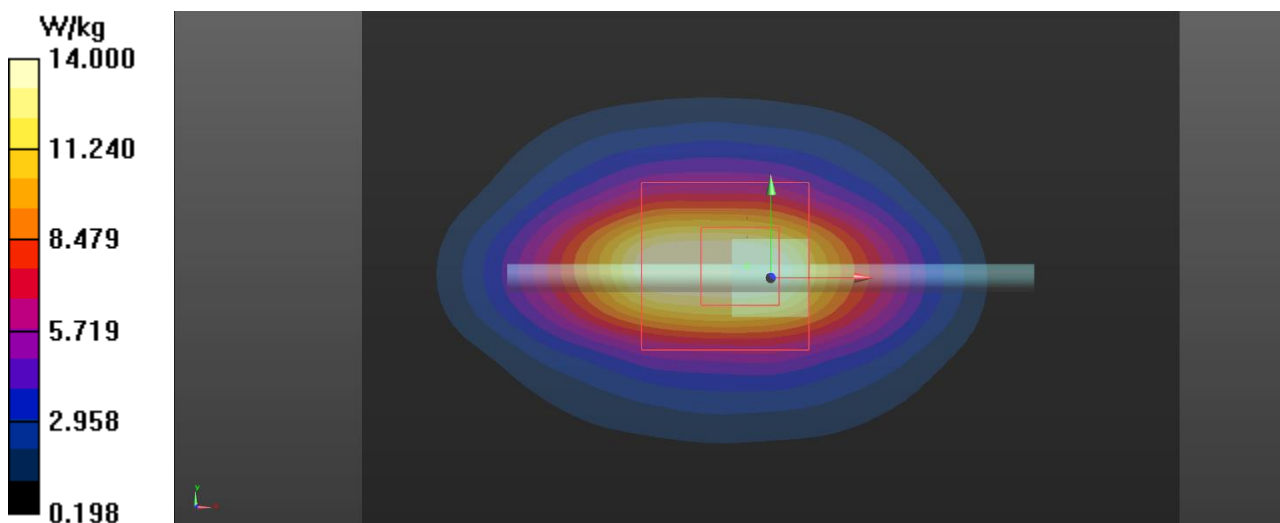

Plot 2

Date/Time: 14/06/2024 08:33:40

Test Laboratory: Verkotan Oy

DUT: D1900V2 - SN511; Type: D1900V2; Serial: SN511

Communication System: UID 0, CW (0); Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz;

Communication System PAR: 0 dB;

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 38.874$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS (IEEE/IEC)

DASY Configuration:

- Probe: EX3DV4 - SN7447; ConvF(7.96, 7.8, 8.03) @ 1900 MHz; Calibrated: 23/02/2024
 - Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -4.0, 31.0$
 - Electronics: DAE4 Sn1332; Calibrated: 14/02/2024
 - Phantom: MFP_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx;
 - DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/System Check 1900MHz/Area Scan (61x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 14.0 W/kg

Configuration/System Check 1900MHz/Zoom Scan (8x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 94.68 V/m; Power Drift = -0.21 dB


Peak SAR (extrapolated) = 16.2 W/kg

SAR(1 g) = 8.92 W/kg; SAR(10 g) = 4.69 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 54.8%

Maximum value of SAR (measured) = 13.7 W/kg

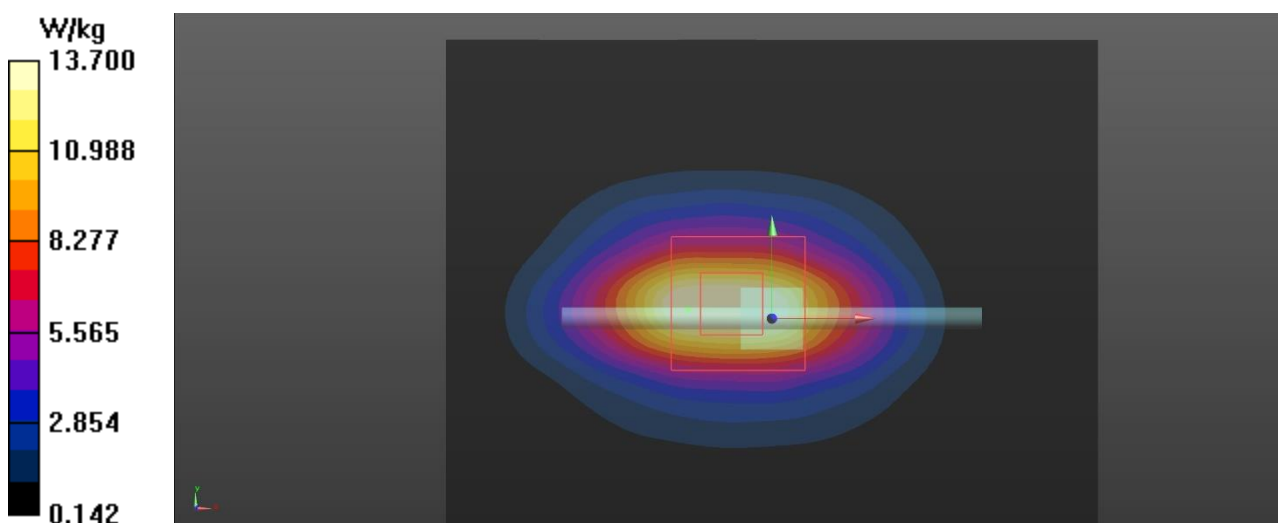

APPENDIX C: MEASUREMENT SCANS

Plot 3

Date/Time: 13/06/2024 12:44:05

Test Laboratory: Verkotan Oy

DUT: Savox TRICS T10

Communication System: UID 0, DECT (0); Communication System Band: USA; Frequency: 1921.54 MHz;

Communication System PAR: 13.979 dB;

Medium parameters used: $f = 1922$ MHz; $\sigma = 1.439$ S/m; $\epsilon_r = 39.438$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASYS (IEEE/IEC)

DASY Configuration:

- Probe: EX3DV4 - SN7447; ConvF(7.96, 7.8, 8.03) @ 1921.54 MHz; Calibrated: 23/02/2024
 - Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), $z = 31.0, -4.0$
 - Electronics: DAE4 Sn1332; Calibrated: 14/02/2024
 - Phantom: MFP_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx;
 - DASYS52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/US DECT 1921.536 MHz, Front, 0mm, Antenna 1/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.222 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.0220 W/kg

SAR(1 g) = 0.0087 W/kg; SAR(10 g) = 0.0029 W/kg (SAR corrected for target medium)


Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 50.3%

Maximum value of SAR (measured) = 0.0135 W/kg

Configuration/US DECT 1921.536 MHz, Front, 0mm, Antenna 1/Area Scan (101x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0218 W/kg

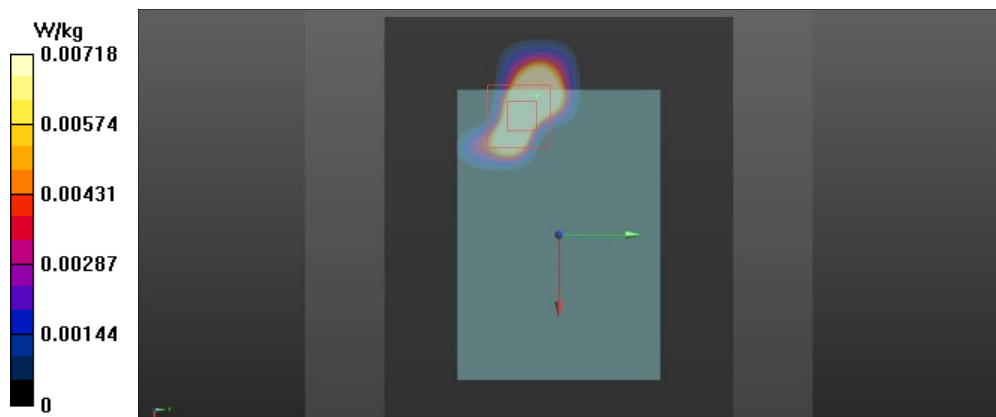

Plot 4

Date/Time: 14.6.2024 14:12:00

Test Laboratory: Verkotan Oy

DUT: Savox TRICS T10

Communication System: UID 0, DECT (0); Communication System Band: USA; Frequency: 1924.99 MHz;

Communication System PAR: 13.979 dB;

Medium parameters used: $f = 1925$ MHz; $\sigma = 1.427$ S/m; $\epsilon_r = 38.821$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY Configuration:

- Probe: EX3DV4 - SN7447; ConvF(7.96, 7.8, 8.03) @ 1924.99 MHz; Calibrated: 23.2.2024
 - Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -4.0, 31.0$
 - Electronics: DAE4 Sn1332; Calibrated: 14.2.2024
 - Phantom: MFP_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx;
 - DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/US DECT 1924.992 MHz, Front, 0mm, Antenna 2/Area Scan (101x81x1): Interpolated grid: $dx = 1.500$ mm, $dy = 1.500$ mm

Maximum value of SAR (interpolated) = 0.0273 W/kg

Configuration/US DECT 1924.992 MHz, Front, 0mm, Antenna 2/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx = 5$ mm, $dy = 5$ mm, $dz = 5$ mm

Reference Value = 2.858 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.0200 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00653 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 65.6%

Maximum value of SAR (measured) = 0.0169 W/kg

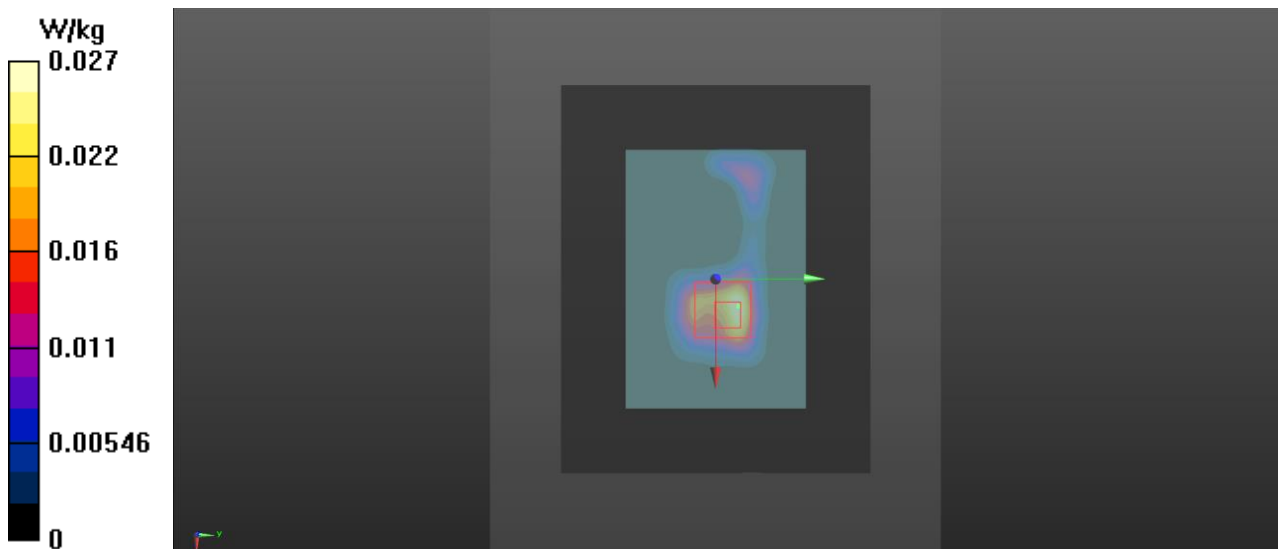

APPENDIX D: RELEVANT PAGES FROM PROBE & DAE CALIBRATION REPORTS

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client
Verkotan
Oulu, Finland

Certificate No. **EX-7447_Feb24**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:7447**

Calibration procedure(s) **QA CAL-01.v10, QA CAL-12.v10, QA CAL-14.v7, QA CAL-23.v8,
QA CAL-25.v8
Calibration procedure for dosimetric E-field probes**

Calibration date **February 23, 2024**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.
All calibrations have been conducted in the closed laboratory facility; environment temperature (20 ± 3) °C and humidity < 70%.
Calibration Equipment used (N/A&E critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP2	SN: 104778	30-Mar-23 (No. 217-03804/03805)	Mar-24
Power sensor NRP-291	SN: 103244	30-Mar-23 (No. 217-03804)	Mar-24
CCP DAK 3.5 (weighted)	SN: 1249	05-Oct-23 (CCP-DAK3 5-1249_Oct23)	Oct-24
CCP DAK12	SN: 1016	05-Oct-23 (CCP-DAK12-1016_Oct23)	Oct-24
Reference 20 dB Attenuator	SN: CC2652 (20%)	30-Mar-23 (No. 217-03806)	Mar-24
DAE4	SN: 660	16-Mar-23 (No. DAE4-660_Mar23)	Mar-24
Reference Probe EX3DV4	SN: 7349	03-Nov-23 (No. EX3-7349_Nov23)	Nov-24

Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: CB41295874	06-Apr-16 (in house check Jun-22)	in house check: Jun-24
Power sensor E4412A	SN: MY41468067	06-Apr-16 (in house check Jun-22)	in house check: Jun-24
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-22)	in house check: Jun-24
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-22)	in house check: Jun-24
Network Analyzer E8358A	SN: US41565477	31-Mar-14 (in house check Oct-22)	in house check: Oct-24

	Name	Function	Signature
Calibrated by	Aidenia Georgiadou	Laboratory Technician	
Approved by	Sven Kühn	Technical Manager	
			Issued: February 23, 2024
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

Certificate No: EX-7447_Feb24

Page 1 of 9

EX3DV4 - SN:7447

February 23, 2024

Parameters of Probe: EX3DV4 - SN:7447

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k = 2)
Norm [$\mu\text{V}/(\text{V}/\text{m})^2$] ^A	0.42	0.42	0.43	$\pm 10.1\%$
DCP (mV) ^B	83.9	92.0	99.2	$\pm 4.7\%$

Calibration Results for Modulation Response

UID	Communication System Name	A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Max dev.	Max Unc ^E k = 2
0	CW	X 0.00	0.00	1.00	0.00	132.3	$\pm 2.0\%$	$\pm 4.7\%$
		Y 0.00	0.00	1.00		134.8		
		Z 0.00	0.00	1.00		127.6		

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Page 5).

^B Linearization parameter uncertainty for maximum specified field strength.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4 - SN:7447

February 23, 2024

Parameters of Probe: EX3DV4 - SN:7447

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle	40.2°
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Note: Measurement distance from surface can be increased to 3–4 mm for an Area Scan job.

EX3DV4 - SN:7447

February 23, 2024

Parameters of Probe: EX3DV4 - SN:7447

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^E	Conductivity ^F (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k = 2)
13	55.0	0.75	17.59	17.59	17.59	0.00	1.25	±13.3%
750	41.9	0.89	9.63	9.05	9.58	0.34	1.27	±11.0%
900	41.5	0.97	8.89	9.05	8.92	0.34	1.27	±11.0%
1750	40.1	1.37	8.35	8.14	8.40	0.25	1.27	±11.0%
1950	40.0	1.40	7.96	7.80	8.03	0.27	1.27	±11.0%
2150	39.7	1.53	7.80	7.68	7.86	0.29	1.27	±11.0%
2300	39.5	1.67	7.75	7.61	7.75	0.29	1.27	±11.0%
2450	39.2	1.80	7.59	7.49	7.65	0.29	1.27	±11.0%
2600	39.0	1.96	7.53	7.40	7.55	0.28	1.27	±11.0%
5250	35.9	4.71	5.27	5.32	5.36	0.35	1.62	±13.1%
5600	35.5	5.07	4.42	4.45	4.52	0.35	1.75	±13.1%
5750	35.4	5.22	4.62	4.68	4.75	0.34	1.83	±13.1%

^C Frequency validity above 300 MHz of ±100 MHz only applies for DASV v4.4 and higher (see Page 2), else it is restricted to ±50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ±10, ±5, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 126, 150 and 230 MHz respectively. Validity of ConvF assessed at 6 MHz is 4–8 MHz, and ConvF assessed at 13 MHz is 9–15 MHz. Above 5 GHz frequency validity can be extended to ±110 MHz.

^E The probes are calibrated using tissue simulating liquids (TSL) that deviate for ϵ' and σ by less than ±5% from the target values (typically better than ±3%) and are valid for TSL with deviations of up to ±10% if SAR correction is applied.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3 GHz and below ±2% for frequencies between 3–6 GHz at any distance larger than half the probe tip diameter from the boundary.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Verkotan**
Oulu, Finland

Certificate No: **DAE4-1332_Feb24**

CALIBRATION CERTIFICATE

Object **DAE4 - SD 000 D04 BM - SN: 1332**

Calibration procedure(s) **QA CAL-06.v30**
Calibration procedure for the data acquisition electronics (DAE)

Calibration date: **February 14, 2024**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	29-Aug-23 (No:37421)	Aug-24
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Auto DAE Calibration Unit	SE UWS 053 AA 1001	23-Jan-24 (in house check)	In house check: Jan-25
Calibrator Box V2.1	SE UMS 006 AA 1002	23-Jan-24 (in house check)	In house check: Jan-25

Calibrated by: **Name**
Eric Hainfeld **Function**
Laboratory Technician

Approved by: **Sven Kühn** **Technical Manager**

Signature

Issued: February 14, 2024

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 μ V, full range = -100...+300 mV

Low Range: 1LSB = 61 nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.342 $\pm$ 0.02% (k=2)	403.743 $\pm$ 0.02% (k=2)	403.941 $\pm$ 0.02% (k=2)
Low Range	4.00099 $\pm$ 1.50% (k=2)	3.97401 $\pm$ 1.50% (k=2)	3.96186 $\pm$ 1.50% (k=2)

Connector Angle

Connector Angle to be used in DASY system	64.5 ° $\pm$ 1 °
---	------------------

Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

High Range		Reading (μV)	Difference (μV)	Error (%)
Channel X	+ Input	200009.12	-5.72	-0.00
Channel X	+ Input	19986.74	0.57	0.00
Channel X	- Input	-20024.85	1.35	-0.01
Channel Y	+ Input	200013.32	-4.96	-0.00
Channel Y	+ Input	19986.18	-0.34	-0.00
Channel Y	- Input	-20027.73	-1.83	0.01
Channel Z	+ Input	200013.38	-2.21	-0.00
Channel Z	+ Input	19984.89	-1.79	-0.01
Channel Z	- Input	-20027.29	-1.36	0.01

Low Range		Reading (μV)	Difference (μV)	Error (%)
Channel X	+ Input	1980.86	-0.34	-0.02
Channel X	+ Input	180.48	-0.78	-0.43
Channel X	- Input	-219.83	-1.02	0.47
Channel Y	+ Input	1981.60	0.22	0.01
Channel Y	+ Input	180.04	-1.40	-0.77
Channel Y	- Input	-219.96	-1.48	0.68
Channel Z	+ Input	1981.81	0.25	0.01
Channel Z	+ Input	180.53	-1.06	-0.58
Channel Z	- Input	-219.72	-1.42	0.65

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	-18.56	-18.30
	- 200	19.67	17.87
Channel Y	200	-22.95	-22.90
	- 200	21.58	21.18
Channel Z	200	-9.94	-10.17
	- 200	8.87	8.99

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (μV)	Channel Z (μV)
Channel X	200	-	-0.53	-3.33
Channel Y	200	7.46	-	1.63
Channel Z	200	10.18	4.30	-

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15931	15993
Channel Y	16084	16421
Channel Z	16003	15942

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M Ω

	Average (μ V)	min. Offset (μ V)	max. Offset (μ V)	Std. Deviation (μ V)
Channel X	0.61	-0.43	1.52	0.37
Channel Y	-0.51	-2.12	2.02	0.55
Channel Z	-0.40	-1.25	0.88	0.46

6. Input Offset Current

Nominal input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9

APPENDIX E: RELEVANT PAGES FROM DIPOLE CALIBRATION REPORTS



SAR Reference Dipole Calibration Report

Ref : ACR.68.5.23.BES.A

VERKOTAN OY
ELEKTRONIIKKATIE 17
90590, OULU, FINLAND
SAR REFERENCE DIPOLE
FREQUENCY: 1900 MHZ
SERIAL NO.: 511

Calibrated at MVG
Z.I. de la pointe du diable
Technopôle Brest Iroise – 295 avenue Alexis de Rochon
29280 PLOUZANE - FRANCE

Calibration date: 03/09/2023




Accreditations #2-6789 and #2-6814
 Scope available on www.cofrac.fr

The use of the Cofrac brand and the accreditation references is prohibited from any reproduction.

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.

Page: 1/8



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.68.5.23.BES.A

	Name	Function	Date	Signature
Prepared by :	Cyrille ONNEE	Measurement Responsible	3/9/2023	
Checked & approved by:	Jérôme Luc	Technical Manager	3/9/2023	
Authorized by:	Yann Toutain	Laboratory Director	3/9/2023	

Yann
Toutain ID
Signature
numérique de
Yann Toutain ID
Date : 2023.03.09
15:01:12 +01'00'

	Customer Name
Distribution :	Verkotan Oy

Issue	Name	Date	Modifications
A	Cyrille ONNEE	3/9/2023	Initial release

Page: 2/8

Template: ACR.DDD.N.YY.MVGR.ISSUE_SAR Reference Dipole v1.

This document shall not be reproduced, except in full or in part, without the written approval of MTVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MTVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.68.5.23.BES.A


6 CALIBRATION RESULTS

6.1 MECHANICAL DIMENSIONS

L mm		h mm		d mm	
Measured	Required	Measured	Required	Measured	Required
-	68.00 +/- 2%	-	39.50 +/- 2%	-	3.60 +/- 2%

6.2 S11 PARAMETER

6.2.1 S11 parameter in Head Liquid

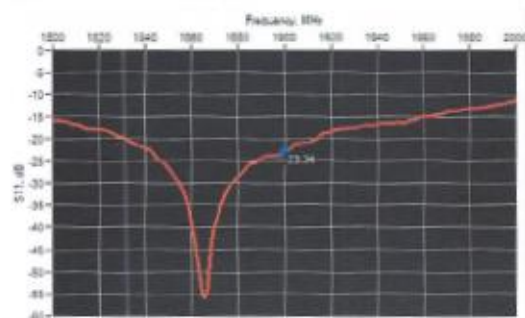

Frequency (MHz)	S11 parameter (dB)	Requirement (dB)	Impedance
1900	-23.34	-20	48.5Ω - 6.6jΩ

6.3 SAR

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

6.3.1 SAR with Head Liquid

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

Page: 6/8

Template: ACR.DDD.N.YY.MVGR.ISSUE_SAR Reference Dipole v1.

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.




SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.68.5.23.BIS.A

Software	OPENSAR V5
Phantom	SN 13/09 SAM68
Probe	SN 41/18 EPG0333
Liquid	Head Liquid Values: $\epsilon_{\text{ps}}' : 40.4$ $\sigma : 1.40$
Distance between dipole center and liquid	10.0 mm
Area scan resolution	$dx=8\text{mm}/dy=8\text{mm}$
Zoon Scan Resolution	$dx=8\text{mm}/dy=8\text{mm}/dz=5\text{mm}$
Frequency	1900 MHz
Input power	20 dBm
Liquid Temperature	20 +/- 1 °C
Lab Temperature	20 +/- 1 °C
Lab Humidity	30-70 %

Frequency	1g SAR (W/kg)			10g SAR (W/kg)		
	Measured	Measured normalized to 1W	Target normalized to 1W	Measured	Measured normalized to 1W	Target normalized to 1W
1900 MHz	3.80	38.02	39.70	1.94	19.41	20.50

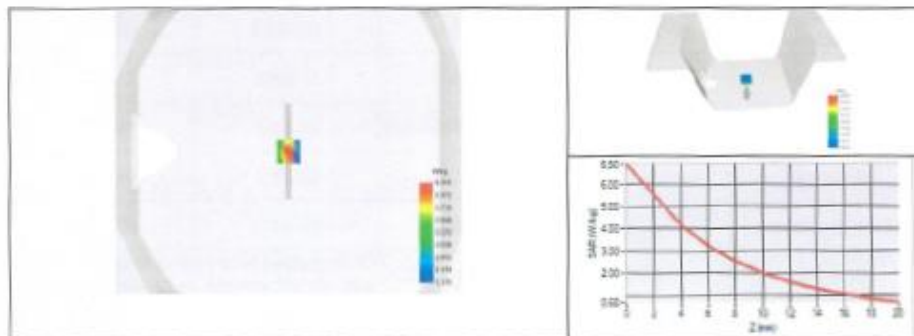

Page: 7/8

Template_ACR.DDIN.YV.MHGB.ISSUE_SAR Reference Dipole v1.

This document shall not be reproduced, except in full or in part, without the written approval of MTG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MTG.