


ANTENNA SPECIFICATION		DATA	2005-09-21	REV.	IR
MODEL	WLL-800MHz(Dark Gray)	TYPE	SLEEVE DIPOLE ANT'	PAGE	1/21

# ANTENNA SPECIFICATION

	Prepared By		Checked By	Approved By
Electronic				
	9/21	/	9/21	
Mechanics				
	9/21	/	9/21	9/21

ace technology A

ANTENNA SPECIFICATION		DATA	2005-09-21	REV.	IR
MODEL	WLL-800MHz(Dark Gray)	TYPE	SLEEVE DIPOLE ANT'	PAGE	2/21

## -CONTENTS-

### 1. Revision LIST

### 2. Technical Specifications.

- 2.1 Electrical Spec.
- 2.2 Mechanical Spec.
- 2.3 Packing Spec

### 3. Test environment condition

- 3.1 Test equipment

### 4. Electrical Demands.

- 4.1 V.S.W.R.
- 4.2 Radiation Pattern.
- 4.3 Gain.

### 5. Mechanical Demands.

- 5.1 breakdown test
- 5.2 torque test
- 5.3 traction test
- 5.4 drop test
- 5.5 bending test
- 5.6 appearance test

### 6. Environmental Demands

- 6.1 Operation Temperature Test
- 6.2 Temperature Change Test
- 6.3 High Humidity Test
- 6.4 Corrosion test
- 6.5 Thermal shock test

### 7. The others documents

- 7.1 Electrical data
- 7.2 Packing Specification (Drawing)
- 7.3 Antenna Drawing
- 7.4 Reliability test Data

ANTENNA SPECIFICATION		DATA	2005-09-21	REV.	IR
MODEL	WLL-800MHz(Dark Gray)	TYPE	SLEEVE DIPOLE ANT'	PAGE	3/21

## 1. Revision List

REVISION LIST					
NO	DATE	Before change	After change	Reason	REV
1	2005-09-07	-	-	- new approval	IR
2	2005-09-21	LSP-400R (DRAK GRAY)	WLL-800MHz(Dark Gray)	- new approval	A
		V.S.W.R 90DEG 2.0:1	V.S.W.R 90DEG 2.1:1		
		-	Del: Network Analyzer model name (section 4.1, 4.3)		
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					
16					
17					
18					

ANTENNA SPECIFICATION		DATA	2005-09-21	REV.	IR
MODEL	WLL-800MHz(Dark Gray)	TYPE	SLEEVE DIPOLE ANT'	PAGE	4/21

## 2. Technical Items

### 2.1 Electrical Spec.

Frequency Range	824 ~ 894 MHz
GAIN	2 dBi ±1dB
VSWR	Less than 2.5:1
Impedance	50 ohms
polarization	vertical
Radiation pattern	Omni-directional
Maximum power	3 Watt

### 2.2 Mechanical Spec.

connector	TNC MALE
Overall length	See drawing
Operating temperature	-20 °C ~ +70 °C
weight	about 38.0g

### 2.3 Packing Spec

PRODUCT NO	Antenna Q'TY	MATERIAL	비고
GIFT BOX	100EA	SW 2 TYPE(B CORRUGATED)	
CARTON BOX	400EA	DW 2 TYPE(AB CORRUGATED)	

ANTENNA SPECIFICATION	DATA	2005-09-21	REV.	IR
MODEL WLL-800MHz(Dark Gray)	TYPE	SLEEVE DIPOLE ANT'	PAGE	5/21

### 3. Test environment

#### 3.1 Test equipment

The test equipments for antenna are as follows


- ? Spectrum Analyzer measure for receipt signal intensity.
- ? possible to mediate stand antenna same to standard dipole in a cellular band width
- ? Network Analyzer (HP8752C) to measure the V.S.W.R and impedance of antenna
- ? Spectrum Analyzer to measure the receiving signal intensity
- ? Anechoic Chamber installed the cables, connectors and equipments for measurement
- ? Dogmatic Caliper to measure the dimensions
- ? Torque Driver to measure the torque force of the helix
- ? Push/Pull gauge to measure the pulling force
- ? Climatic Chamber for environmental test

ANTENNA SPECIFICATION		DATA	2005-09-21	REV.	IR
MODEL	WLL-800MHz(Dark Gray)	TYPE	SLEEVE DIPOLE ANT'	PAGE	6/21

## 4. Electrical Demand

### 4.1 V.S.W.R

The S.W.R characteristics must satisfy the electrical demands with V.S.W.R 2.5:1 in 0 DEG, 2.1:1 in 90 DEG.

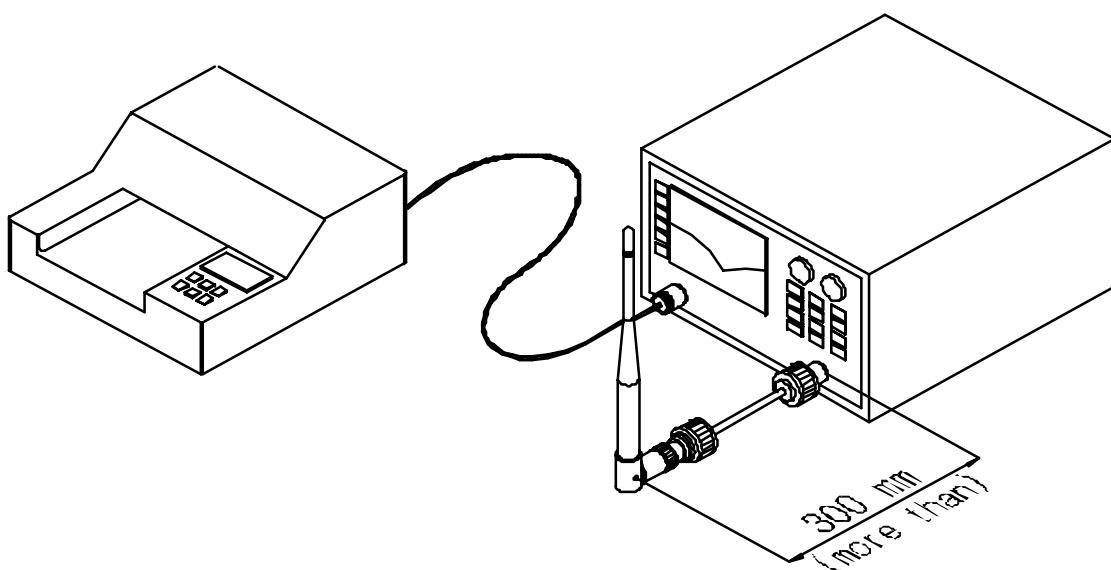

### 4.2 Radiation Pattern


The radiation pattern must have the omni-directional characteristic in Azimuth Plane

ANTENNA SPECIFICATION		DATA	2005-09-21	REV.	IR
MODEL	WLL-800MHz(Dark Gray)	TYPE	SLEEVE DIPOLE ANT'	PAGE	7/21

#### 4.3 GAIN

The gain is expressed as dBi.

the maximum Gain of antenna must satisfy the electrical demands in 2 dBi  $\pm 1$  dB

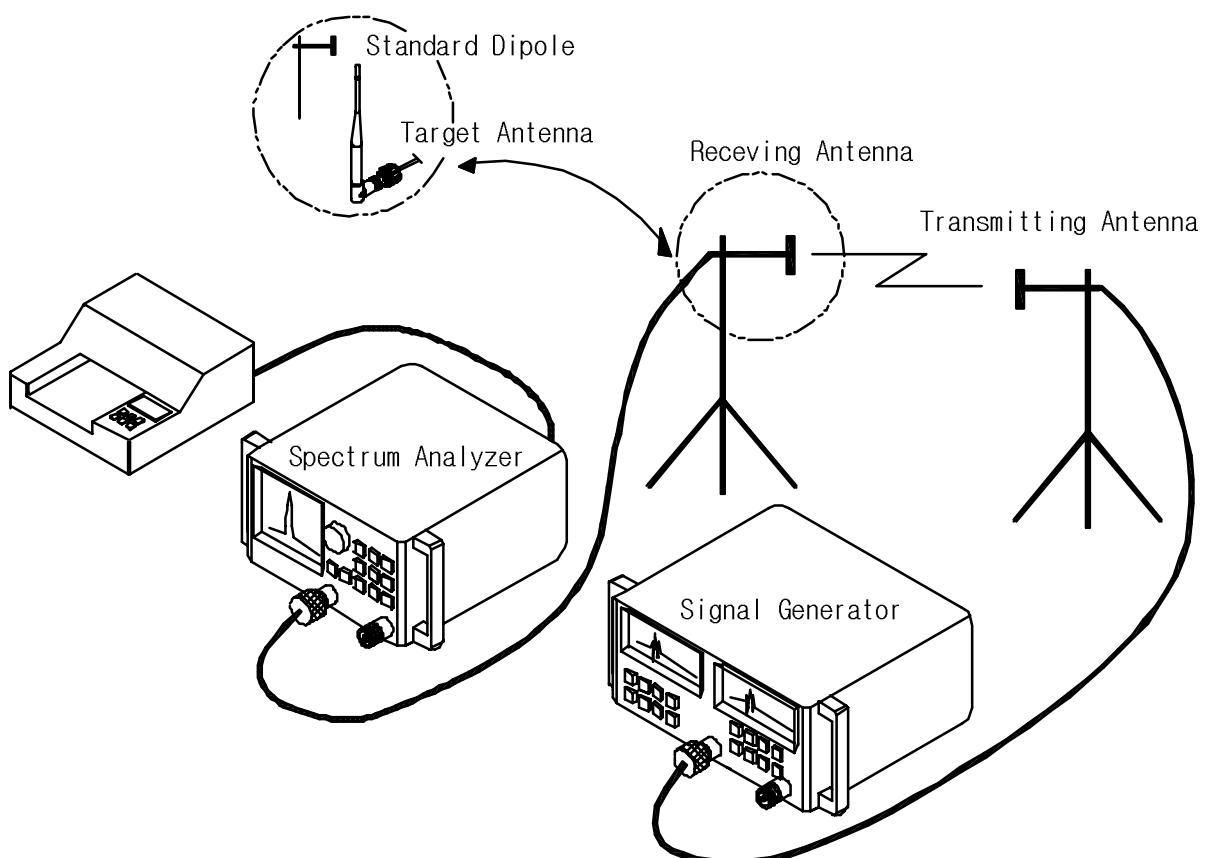


ANTENNA SPECIFICATION		DATA	2005-09-21	REV.	IR
MODEL	WLL-800MHz(Dark Gray)	TYPE	SLEEVE DIPOLE ANT'	PAGE	8/21

## 5. Mechanical Demands

### 5.1 breakdown test

The antenna is assembled to the test equipment. We apply a force from the bottom part to the upper point. In a vertical direction(F) and horizontal direction(P). After the test, no visual deterioration shall occur. After the test, the antenna shall satisfy the electrical demands.


F ( Kg/f )	7
P ( Kg/f )	-
L ( mm )	2/3
Remarks	-

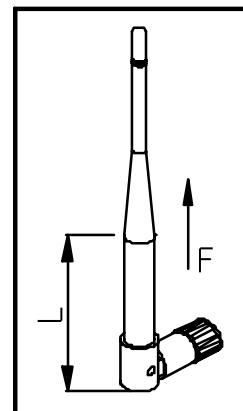

### 5.2 torque test

The antenna is assembled to the test equipment. Torque is applied to the antenna in clockwise direction. The torque shall be applied L(mm) above the bottom of the HELIX. After the test, no visual deterioration shall occur. After the test, the antenna shall satisfy the electrical demands

T ( Kg/f )	3
L ( mm )	2/3
Remarks	-

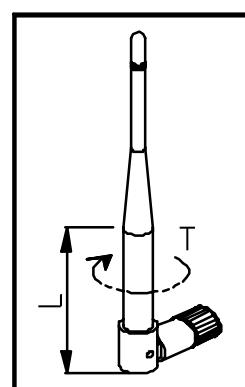


ANTENNA SPECIFICATION		DATA	2005-09-21	REV.	IR
MODEL	WLL-800MHz(Dark Gray)	TYPE	SLEEVE DIPOLE ANT'	PAGE	9/21

### 5.3 Traction test

The antenna is assembled to the test equipment. Force is applied, during 30 sec, to the antenna parallel to the antenna axis. After the test, no visual deterioration shall occur.

After the test, the antenna shall satisfy the electrical demands

F ( kg/f )	7
시 간( S )	30
Remarks	-

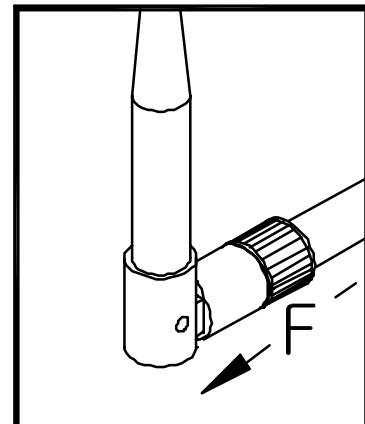


### 5.4 drop test

The antenna is assembled to dummy (or the handset with W(g)). The handset is dropped with the antenna downward onto a concrete surface at H(cm) height.

After the test, the original shape shall be possible to restore. The antenna shall satisfy the electrical demands

W ( g )	SET WEIGHT
L( Cm )	150
Remarks	-

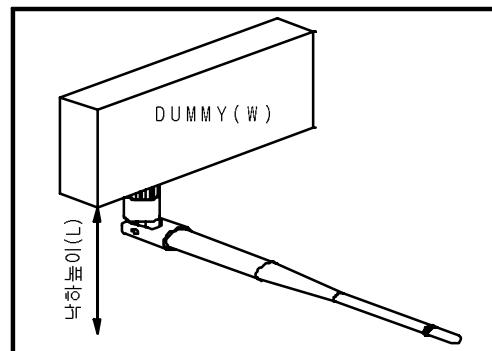


ANTENNA SPECIFICATION		DATA	2005-09-21	REV.	IR
MODEL	WLL-800MHz(Dark Gray)	TYPE	SLEEVE DIPOLE ANT'	PAGE	10/21

## 5.5 Bending test

Bending force of antenna must have F (Kgf) more than designated force.

After an Environmental test or repeating test(100 times), vibrational rate of BENDING force must have less than 50%.

W ( kgf )	1
Remarks	-

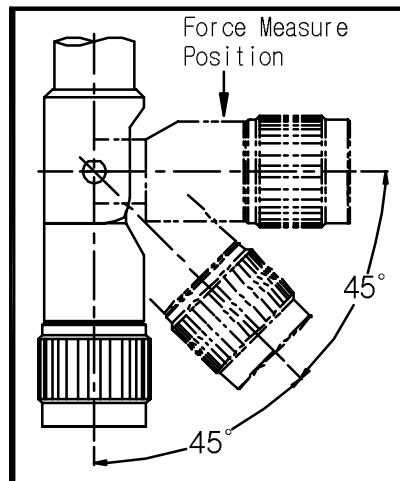

## 5.6 Appearance test

Test items	Standard	Measurement Method	Test method	Record
BLACK SPOT WHITE SPOT NONMATERIAL	Less than 0.15mm through, (less than in the same face)	Nonmaterial gage (or standard sample)	G-11 AQL-0.65	Reliability Test report

ANTENNA SPECIFICATION		DATA	2005-09-21	REV.	IR
MODEL	WLL-800MHz(Dark Gray)	TYPE	SLEEVE DIPOLE ANT'	PAGE	11/21

## 6. Environmental Demands


### 6.1 Operation Temperature Test

- Test A: Place the antennas for testing in chamber. The chamber condition should be as follows: 1hours at -20°C
- Final measurements : The antenna shall be visually inspected and electrically and also mechanically checked as required by products standard.
- Test B: Place the antennas for testing in chamber. The chamber condition should be as follows: 1hours at 70°C
- Final measurements : The antenna shall be visually inspected and electrically and also mechanically checked as required by products standard.

### 6.2 Temperature Change Test

The object of temperature test is to evaluate the reliability of antenna component at temperature change.

- Test: Temperature cycle is as follows. 2 hours at -40°C, 2 hours at +85°C. Temperature increase/decrease time (Temperature change time) is 2 hours. 10 cycles.
- Final measurements: The antenna shall be visually inspected and electrically and mechanically checked as required by products standard.

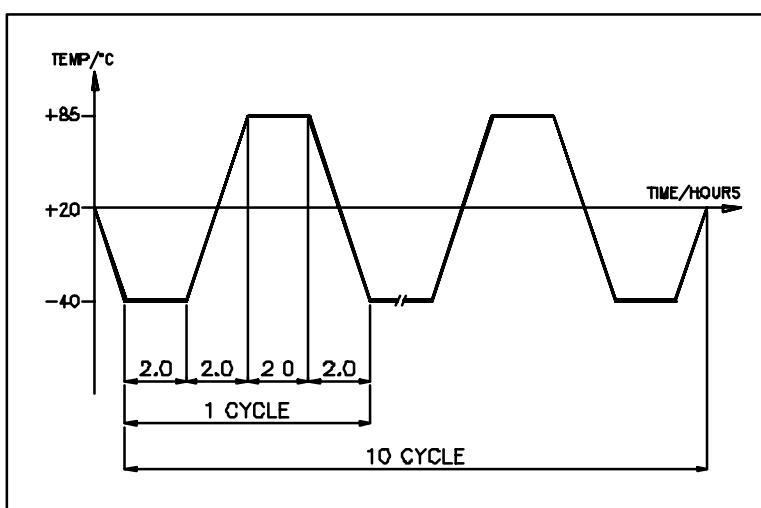

ANTENNA SPECIFICATION		DATA	2005-09-21	REV.	IR
MODEL	WLL-800MHz(Dark Gray)	TYPE	SLEEVE DIPOLE ANT'	PAGE	12/21

### 6.3 High Humidity Test

- Test: Place the antennas for testing in chamber. The chamber condition should be as follows: 24hours at +55°C, Relative humidity is 95%.
- Final measurements : The antenna shall be visually inspected and electrically and also mechanically checked as required by products standard.

### 6.4 Corrosion test

The antenna shall be exposed for 96 hours at +35°C to a 5% Sodium Chloride fog.

After the test, no visual deterioration shall occur. After the test, the antenna shall satisfy the electrical demands. The test is satisfied with IEC 68-2-11.

### 6.5 thermal shock test

The antenna is placed in the temperature chamber with +80°C for 30 minutes and -40°C for 30 minutes measured in ten times.

After the test, no visual deterioration shall occur. After the test, the antenna shall satisfy the electrical demands.