

#### **Underwriters Laboratories Inc.**

www.ulk.co.kr

Project: 08CA56902

File: TC8329

Report: 07CA28586-FCC-A1
Date: November 3, 2008

Model: NS 16 1G NN, PNY16-ONT-1250

# FCC Certification Report For

# **WDM-PON ONT**

**LG-NORTEL CO., LTD.** 

LG R&D Complex 533 Hogye-1dong, Dongan-gu, Anyang-si, Kyungki-do, 431-749, Korea

Copyright © 2005 Underwriters Laboratories Inc.

UL Korea, Ltd . authorizes the above-named company to reproduce this Report provided it is reproduced in its entirety.

UL Korea, Ltd 33<sup>rd</sup> FL, Gangnam Finance Center, 737 Yeoksam-dong, Gangnam-gu, Seoul 135-984 Korea

Tel: +82.2.2009.9000, Fax:+82.2.2009.9405

A not-for-profit organization dedicated to public safety and committed to quality service for over 100 years Project Number: 08CA56902 File Number TC8329 Page 2 of 20

Model Number: NS 16 1G NN, PNY16-ONT-1250

#### TEST REPORT DETAILS

Test Report No. 07CA28586-FCC-A1

Tests Performed By: UL Korea Ltd.

33<sup>rd</sup> FL. Gangnam Finance Center, 737 Yeoksam-dong,

Kangnam-ku, Seoul, 135-984, Korea

Test site: BWS TECH INC.

611-1, Maesan-ri, Mohyeon-myeon, Cheoin-gu, Yongin-si,

Gyeonggi-do 449-853, Korea

Applicant: LG-NORTEL Co., Ltd.

LG R&D Complex 533 Hogye-1dong, Dongan-gu, Anyang-si,

Kyungki-do, 431-749, Korea

Applicant Contact: Mr. Young-Ho Son
Title: Chief Research Engineer

Phone: 82-31-450-4263

E-mail: yhsonb@lg-nortel.com

Test Report Date: November 3, 2008

Product Type: WDM-PON ONT

FCC ID· TUINS161GNN

Product standards: FCC Part 15 Subpart B Class B

FCC Classification : Class B Computing Device Peripheral

FCC Procedure : Certification

Model Number: NS 16 1G NN(Basic), PNY16-ONT-1250

Trade Name: TurboLIGHT16, PONy Express<sup>TM</sup> 16

Sample Serial Number: None (Proto type)

Sample Receive Date: June 18, 2007

Testing Start Date: June 25, 2007

Date Testing Complete: June 25, 2007

Overall Results: PASS

UL Korea Ltd. reports apply only to the specific samples tested under stated test conditions. All samples tested were in good operating condition throughout the entire test program. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. UL Korea Ltd. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from UL Korea Ltd. issued reports.

Project Number:

08CA56902

File Number

TC8329

Page 3 of 20

Model Number:

NS 16 1G NN, PNY16-ONT-1250

#### **TEST SUMMARY**

#### Test Result

Requirement – Test	Reference standards	Result	Verdict
Conducted Disturbance at the mains ports	FCC Part 15 Subpart B, Class B	Pass	Complied
Radiated Disturbance		Pass	Complied

The tests listed in the Summary of Testing section of this report have been performed and the results recorded by UL Korea, Ltd. in accordance with the procedures stated in each test requirement and specification. The applicant determined the list of tests performed were applicable to the Equipment Under Test. As a result, the subject product has been verified to comply or not comply as noted in the Summary of Testing with each test specification. The test results relate only to the items tested.

The equipment under test has

met the technical requirements

not met the technical requirements

Tested by

Jeawoon, Choi, Senior Project Engineer Conformity Assessment Services - 3014ASEO

UL Korea Ltd. November 3, 2008 Reviewed by

Kyungyong, Kim, EMC Section Manager Conformity Assessment Services - 3014ASEO

Kayorng Erm

UL Korea Ltd.

November 3, 2008

Project Number: 08CA56902 File Number TC8329 Page 4 of 20

Model Number: NS 16 1G NN, PNY16-ONT-1250

# **Report Directory**

1. E	QUIPMENT UNDER TEST(EUT)	5
1.1	EQUIPMENT DESCRIPTION SPEC	
1.2	EQUIPMENT MARKING PLATE	6
1.3	EQUIPMENT USED DURING TEST	7
1.4	INPUT/OUTPUT PORTS	7
1.5	EUT INTERNAL OPERATING FREQUENCIES:	
1.6	Power Interface:	7
2. E	UT OPERATION MODES:	8
) IF	UT CONFIGURATIONS:	0
). E	UI CONFIGURATIONS:	δ
4. C	CONDUCTED EMISSION	9
5. R	ADIATED EMISSION	13
APPE	NDIX A_ACCREDITATIONS AND AUTHORIZATIONS	17
APPE	NDIX B_MEASUREMENT UNCERTAINTIES	18
APPE	NDIX C EUT MODIFICATIONS	19

Project Number: 08CA56902 File Number TC8329 Page 5 of 20

Model Number: NS 16 1G NN, PNY16-ONT-1250

#### 1. EQUIPMENT UNDER TEST(EUT)

#### 1.1 Equipment Description SPEC

SpeedLIGHT 16 and T urboLIGHT 16 are designed for the realization of high-speed access networks. The equip ment enables symmetric and dedicated high-band width optical data links to deliver services such as video, Internet and voice communications. Existing subscriber devices such as xDSL or cable-modems have limitations in distance and data rates. SpeedLIGHT 16 and T urboLIGHT 16 are optimum solutions for complementing these limitations by enabling efficient and cost-effective optical connectivity for FTTC and FTTB network applications.

SpeedLIGHT 16 and/or TurboLIGHT 16 system consists of Optical Line Terminals (OLT), Remote Nodes (RN) and Optical Network Terminals (ONT). A fiber trunk path is used from CO to the passive RN in the subscriber area. A fiber trunk path is used from the RN to each ONT. The ONT can be connected to an electrical switch for connectivity to multiple users. The ONT converts the optical signal from the OLT into an electric signal at the remote location. It also converts the electric signal into an optical signal for transmission to the OLT. The ONT is auto matically allocated with a dense WDM optical wavelength for a dedicated and independent connection to the OLT.

The following are the technical specification of the ONT product

	Optical Interface				
Optical cable	Single mode optical fiber				
Line Rate 1.25 Gbps					
Ooptical Interface	SC/APC connetor				
Input optical data power	-20 dBm to -2 dBm(E-band)				
Output optical data power -1.5 dBm to +6 dBm(C-band)					
BLS input power -7.5 dBm to +5 dBm(C-band)					
•	Ethernet Port				
Operation mode	Giga bit Ethernet / Auto-Negotiation Mode				
Electrical interface	RJ-45 connector				
-	<b>Environmental Conditions</b>				
Operating temperature	0°C ~ 50°C				
Operating humidity 5% ~ 85%					

Project Number: 08CA56902 File Number TC8329 Page 6 of 20

Model Number: NS 16 1G NN, PNY16-ONT-1250

### 1.2 Equipment Marking Plate



NS 16 1G NN 5 V <del>---</del> 3 A



FCC ID: TUINS161GNN www.lg-nortel.com





This product complies with FDA performance standards for laser products except for deviations pursuant to laser notice No. 50, dated June 24, 2007, and with IEC 60825-1 as a Class 1 laser product.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

Made in / Fabriqué au Korea



PON<sup>y</sup> Express<sup>™</sup> 16

MODEL: PNY16-ONT-1250

S/N : Date :

RATING: 5V === 3A

This product complies With 21 CFR 1040,10 and 1040,11,and with IEC60825-1 as a Class 1 laser product.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired

operation,

MFG Code: NOK

Made in Korea





I,T,E,

E176683

FCC ID: TUINS161GNN



Project Number: 08CA56902 File Number TC8329 Page 7 of 20

Model Number: NS 16 1G NN, PNY16-ONT-1250

# 1.3 Equipment Used During Test

Use*	Product Type	Product Type Manufacturer		Comments
EUT	WDM-PON ONT	LG-NORTEL Co., Ltd.	NS 16 1G NN	
AE	WDM-PON OLT LG-NORTEL Co., Ltd		NS 16 1G CO	
AE	Adapter	AULT KOREA Corp	PW118	2(EA)
AE	RN	LG-NORTEL Co., Ltd	RN AWG 1:16B	
AE	Performance Analysis System	Spirent Communications	SMB-600B	

<sup>\*</sup> Note: EUT - Equipment Under Test, AE - Auxiliary/Associated Equipment, SIM - Simulator (Not Subjected to Test)

### 1.4 Input/Output Ports

Port	Name	Type*	Cable Cable		Comments
#			Max. >3m	Shielded	
1	Mains	AC	1.5m	Unshielded	Connected with EUT/Adaptor
2	100 Base-FX	TP	10.0m	Optic cable	Connected to RN (OPTICAL)
3	Ethernet	TP	10.0m	Shielded	Connected to Performance Analysis System

Note:

\*AC = AC Power Port DC = DC Power Port N/E = Non-Electrical

I/O = Signal Input or Output Port (Not Involved in Process Control)

TP = Telecommunication Ports

# 1.5 EUT Internal Operating Frequencies:

Frequency (MHz)	Description	Frequency (MHz)	Description
100.0	I <sup>2</sup> C	1250.0	Data(Tranceiver to 88E6185 SW)
100.0	100.0 MII Ethernet 1250.0		Data(88E1149 PHY to 88E6185 SW)
133.0	SDRam bus	25.0	SW/PHY Clock
25.0	CPU Clock	250.0	TX

### 1.6 Power Interface:

Mode #	Voltage (V)	Current (A)	Power (W)	Frequency (DC/AC-Hz)	Phases (#)	Comments
Rated	100-250Vac	0.5	-	50 - 60HZ	Single Phase	Input of AC/DC Adapter
Rated	+5 DC	3.0	-	-	-	Output of AC/DC Adapter
Rated	+5 DC	2.0	10.0	-	-	EUT


Project Number: 08CA56902 File Number TC8329 Page 8 of 20

Model Number: NS 16 1G NN, PNY16-ONT-1250

# 2. EUT Operation Modes:

Mode #	Description
1	Communication link and Data transmission function
	Emission & Immnity tests have been performed by establishing optic communication links between ONT and OLT OCU through RN interface. To simulator and check the optic communication link quality, the Performance Aanalysis System(SMB-600B)) was used for Ethernet packet data sending / receiving of 100 Mbps LAN port and 1000 Mbps optic port of EUT FX, TX ports.

# 3. EUT Configurations:

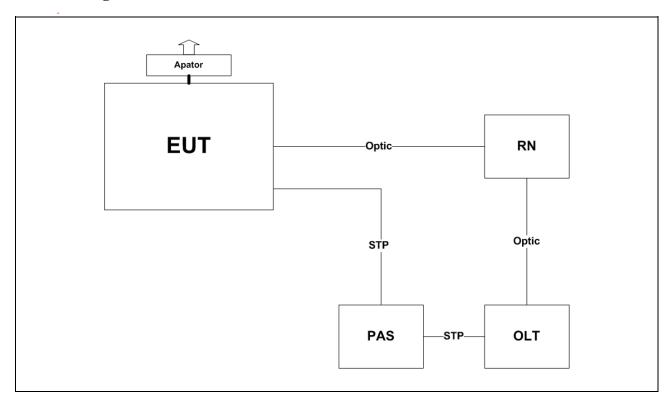

Project Number: 08CA56902 File Number TC8329 Page 9 of 20

Model Number: NS 16 1G NN, PNY16-ONT-1250

# 4. CONDUCTED EMISSION

	TEST: Limits of mains terminal disturbance voltage							
	Measurements were made on a ground plane that extends 1-meter minimum beyond all sides of the system under test. All power was connected to the system through Artificial Mains Network (AMN). Conducted voltage measurements on mains lines were made at the output of the AMN.							
Parameters rec	quired p	rior to the test	Laboratory Ambient Tem	perature		10 to 40 °C		
			Relative Humidity			10 to 90 %		
Parameters rec	corded d	luring the test	Laboratory Ambient Tem	perature		25°C		
			Relative Humidity			40 %		
			Frequency range on each	side of line	Mo	easurement Point		
Fully configured sample scanned over the following frequency range			150kHz to 30MHz			Mains		
			Limits - Class A					
			Limit (dBμV)					
Frequency (M	Hz)	Quasi-Peak	Results	Average		Results		
0.15 to 0.5	50	79	N/A	66		N/A		
0.50 to 3	0	73	N/A	60		N/A		
			Limits - Class B					
			Limit (	(dBµV)				
Frequency (M	Hz)	Quasi-Peak	Results	Avera	ge	Results		
0.15 to 0.5	50	66 to 56	Pass	56 to	46	Pass		
0.50 to 5	5	56	Pass	46 Pass		Pass		
5 to 30		60	Pass	50		Pass		

Test Equipment Used								
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due			
Test Receiver	Rohde&Schwarz	ESPI	100063	2006. 11. 09	2007. 11. 09			
Artificial Mains Network	PMM	L3-25	1110K70403	2006. 09. 09	2007. 09. 09			
LISN multiline	Com-power	L1-115	241017	2006. 11. 16	2007. 11. 16			

Model Number: NS 16 1G NN, PNY16-ONT-1250

Figure 1 Conducted Emission Test Setup





UL Korea, Ltd. 33<sup>rd</sup> FL, Gangnam Finance Center, 737 Yeoksam-dong, Gangnam-gu, Seoul 135-984 Korea Tel: +82.2.2009.9000, Fax:+82.2.2009.9405

Project Number: 08CA56902 File Number TC8329 Page 11 of 20

Model Number: NS 16 1G NN, PNY16-ONT-1250

Table 1. Test data for conducted emission:

Test Frequency		ection etor		ding dBuV)	Line	Level(	(dBuV)	Limit(	dBuV)	Marg	n(dB)
(MHz)	Cable	LISN	QP	AV		QP	AV	QP	AV	QP	AV
0.150	0.03	0.06	51.49	-	Н	51.58	-	66.00	56.00	14.42	-
0.202	0.10	0.07	53.26	44.00	Н	53.43	44.17	64.60	54.60	11.17	1.17
0.270	0.16	0.07	45.62	-	N	45.85	-	62.60	52.60	16.75	-
0.338	0.22	0.08	43.55	-	N	43.85	-	60.70	50.70	16.85	-
0.402	0.26	0.08	40.22	-	N	40.56	-	58.90	48.90	18.34	-
0.670	0.30	0.07	43.38	-	N	43.75	-			12.25	-
1.142	0.42	0.04	42.20	-	N	42.66	-			13.34	-
1.678	0.50	0.03	41.42	-	N	41.95	-	56.00	46.00	14.05	-
2.150	0.56	0.03	44.33	-	N	44.92	-			11.08	-
2.554	0.58	0.03	48.48	41.15	N	49.09	41.76			6.91	4.24
5.978	0.90	0.06	43.57	-	N	44.53	-			15.47	-
9.674	1.02	0.07	41.34	-	N	42.43	-	60.00	50.00	17.57	-
24.986	1.48	0.10	38.90	-	N	40.48	-			19.52	-

<sup>\*</sup> Note: Margin (dB)= Limit (dBuV) - Level (dBuV)

<sup>\*</sup> Note: If no frequencies are specified in the tables, no measurement for quasi-peak or average was necessary.

Model Number: NS 16 1G NN, PNY16-ONT-1250

Figure 2. Operating condition:


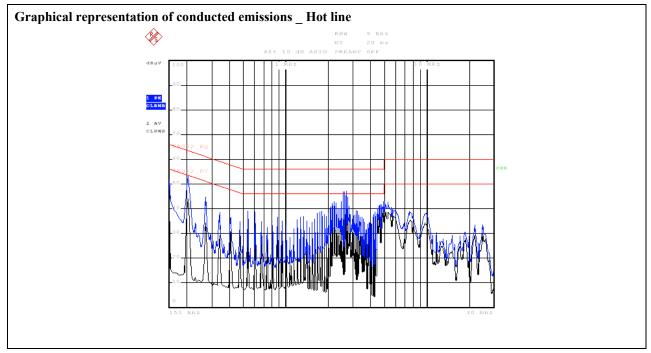


Figure 3 Operating condition:

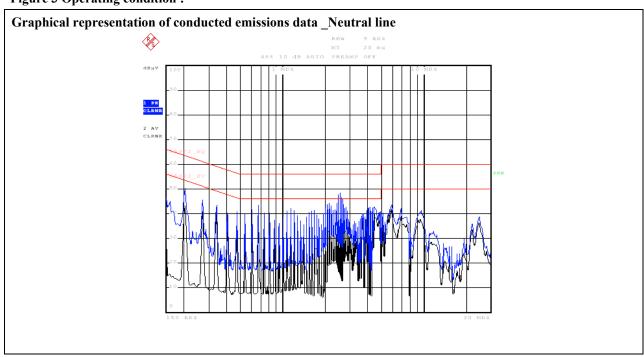

Project Number: 08CA56902 File Number TC8329 Page 13 of 20

Model Number: NS 16 1G NN, PNY16-ONT-1250


#### 5. RADIATED EMISSION

	<b>TEST:</b> Limits for radiat	ed disturbance								
Method	Preliminary (peak) meass of 10-meter. The EUT wat 1, 2, 3 and 4 meter hei (quasi-peak or average as adjusting the receive anto	Measurements were made at Open area test site that complies to CISPR 16/ANSI C63.4.  Preliminary (peak) measurements were performed at an antenna to EUT separation distance of 10-meter. The EUT was rotated 360° about its azimuth with the receive antenna located at 1, 2, 3 and 4 meter heights in both horizontal and vertical polarities. Final measurements (quasi-peak or average as noted) were then performed by rotating the EUT 360° and adjusting the receive antenna height from 1 to 4-meters. All frequencies were investigated in both horizontal and vertical antenna polarity, where applicable.								
Parameters required prior to the test Laboratory Ambient Temperature 10 to 40 °C										
		Relative Humidity	10 to 90 %							
Parameters	s recorded during the test	Laboratory Ambient Temperature	27°C							
		Relative Humidity	49 %							
		Frequency range	Measurement Point							
	igured sample scanned over ing frequency range	30MHz – 6.25GHz	(10 meter measurement distance)							
		Limits - Class A								
		Limit (dBμV	Limit (dBμV/m)							
F	Frequency (MHz)	Quasi-Peak	Results							
	30 to 230	40	N/A							
	230 to 1000	47	N/A							
		Limits - Class B								
F	2 (2411.)	Limit (dBµV	<sup>7</sup> /m)							
F	Frequency (MHz)	Quasi-Peak	Results							
	30 to 230	30 Pass								
	230 to 1000	37 Pass								
	1000 to 6250 43.5(Average) Pass									
Supplemen	ntary information:									

Test Equipment Used						
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due	
Test Receiver	Rohde&Schwarz	ESPI	100063	2006. 11. 09	2007. 11. 09	
Bilog antenna	Rohde & Schwarz	VULB9160	9160-3122	2006. 12. 29	2007. 12. 29	
Antenna mast	DEAIL	JAC-3	N/A	N/A	N/A	
Antenna Turtable Controller	DEAIL	JAC-2	N/A	N/A	N/A	

Model Number: NS 16 1G NN, PNY16-ONT-1250


Figure 4. Photo of Radiated emission test setup

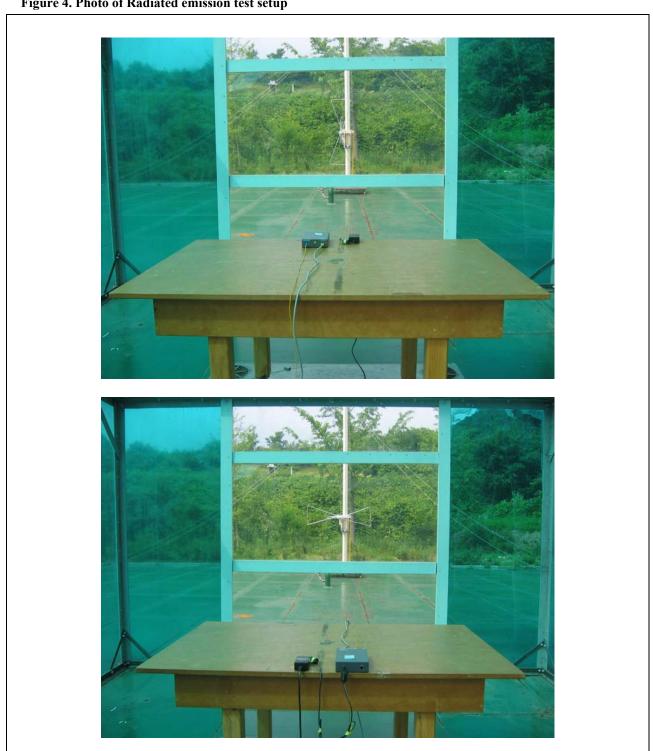

UL Korea, Ltd. 33<sup>rd</sup> FL, Gangnam Finance Center, 737 Yeoksam-dong, Gangnam-gu, Seoul 135-984 Korea Tel: +82.2.2009.9000, Fax:+82.2.2009.9405

Project Number: 08CA56902 File Number TC8329 Page 15 of 20

Model Number: NS 16 1G NN, PNY16-ONT-1250

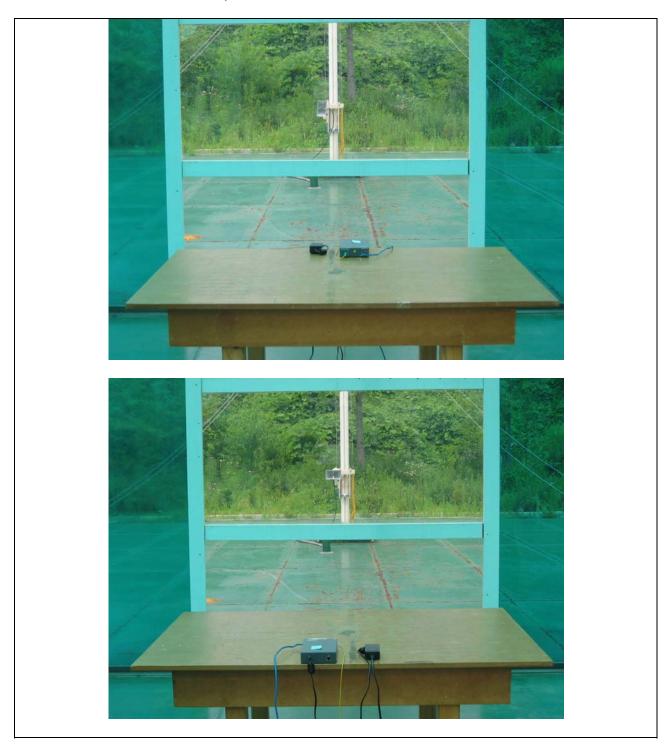

Project Number: 08CA56902 File Number TC8329 Page 16 of 20

Model Number: NS 16 1G NN, PNY16-ONT-1250

Table 2 Radiated emission Test data:

Test Frequency (MHz)	Meter Reading (dB $\mu$ V)	Detector (Pk/QP)	Polarity (V/H)	Azimuth (Degrees)	Antenna Height (m)	Gain/Loss Factor(dB)	Transducer Factor (dB/m)	Level dBuV/m	Limit dBuV/m	Margin [dB]
125.01	13.20	QP	V	90	1.0	2.44	11.96	27.60	30.00	2.40
249.99	17.16	QP	Н	110	2.1	3.51	11.83	32.50	37.00	4.50
350.01	10.55	QP	Н	100	1.8	4.15	14.60	29.30	37.00	7.70
375.01	11.35	QP	Н	90	1.7	4.35	15.20	30.90	37.00	6.10
399.99	13.96	QP	Н	90	1.5	4.55	15.79	34.30	37.00	2.70
500.01	10.33	QP	Н	90	1.4	5.09	17.68	33.10	37.00	3.90
625.01	6.54	QP	Н	100	1.3	5.73	20.13	32.40	37.00	4.60

Supplementary information:

This table is to be use when Gain/Loss and Transducer Factors are provided separately.

#### Above 1G

Test Frequency (MHz)	Meter Reading (dBuV)	Detector (Pk)	Polarity (V/H)	Azimuth (Degrees)	Antenna Height (m)	Gain/Loss Factor (dB)	Transducer Factor (dB/m)	Level dBuV/m	Limit dBuV/m	Margin (dB)
					Peak					
1273.46	18.01	PK	V	180	1.00	9.23	24.4	41.6	63.5	21.9
1726.76	19.26	PK	V	180	1.00	9.9	25.6	44.8	63.5	18.7
		<del>'</del>			Aaverage		<u>'</u>			
1273.46	2.41	AV	V	180	1.00	9.23	24.4	26.1	43.5	17.4
1726.76	3.87	AV	V	180	1.00	9.9	25.6	29.4	43.5	14.1

Supplementary information:

This table is to be use when Gain/Loss and Transducer Factors are provided separately.

\* Note: Margin (dB)= Limit (dBuV) - Level (dBuV)

\* Note: If no frequencies are specified in the tables, no measurement for quasi-peak or average was necessary.

Project Number: 08CA56902 File Number TC8329 Page 17 of 20

Model Number: NS 16 1G NN, PNY16-ONT-1250

#### Appendix A\_Accreditations and Authorizations



MIC: Designated as a testing laboratory by Radio Research Laboratory in accordance with the Regulation on Designation of Testing Laboratory for Information and Communication Equipment. Registration No.: KR0017



KOLAS: Accredited by Korea Laboratory Accreditation Scheme (KOLAS) as Testing Laboratory in accordance with the provisions of Article 23 of the National Standards Act. These criteria encompass the requirements of ISO/IEC 17025:2000. For a scope listing search at http://kolas.kats.go.kr/02 english/m02 01 s01.asp?OlapCode=KOLU19



FCC: Details of the measurement facilities used for these tests have been filed with the Federal Communications Commission's Laboratory in Columbia, Maryland and accepted in a letter dated July 17, 2005 (Reg. No. 553281). As a Conformity Assessment Body (CAB), our organization is designated to perform compliance testing on equipment subject to Declaration Of Conformity (DOC) and Certification under Part 15 and 18 of the Commission's Rules in a letter dated July 14, 2005.



VCCI: Accepted as an Associate Member to the VCCI. The measurement facilities detailed in this test report have been registered in accordance with Regulations for Voluntary Control Measures, Article 8. Registration Nos.: (Radiated Emissions) R-2414, (Conducted Emissions) C-2641.

Project Number: 08CA56902 File Number TC8329 Page 18 of 20

Model Number: NS 16 1G NN, PNY16-ONT-1250

# Appendix B\_Measurement Uncertainties

Test	Uncertainty		
Radiated Emissions	±3.56 dB		
Conducted Emissions	±5.52 dB		

Project Number: 08CA56902 File Number TC8329 Page 19 of 20

Model Number: NS 16 1G NN, PNY16-ONT-1250

# Appendix C\_EUT Modifications

Items	Description
#1	Added two Clamp type ferrite core(E-TECH Electronics / RU65B) on the DC input cable of AC/DC Adapter with 1turn.
#2	Added 2 copper tape between external shield case and main PCB GND.
#3	Added 3 ferrite bead(TDK/HF70R6H6X10H0.8) on the DC input port.
#4	Added 2 bonding wires between the shield case of transceiver and GND pattern.
#5	Attached an aluminum tape at the front edge of the bottom shield case.



Project Number: 08CA56902 File Number TC8329 Page 20 of 20

Model Number: NS 16 1G NN, PNY16-ONT-1250

