


Site: WZ-AC1	Time: 2022/08/28 - 12:39
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: HAP ax2	Power: AC 120V/60Hz
Test Mode: Transmit by VHT20 at 2417MHz	

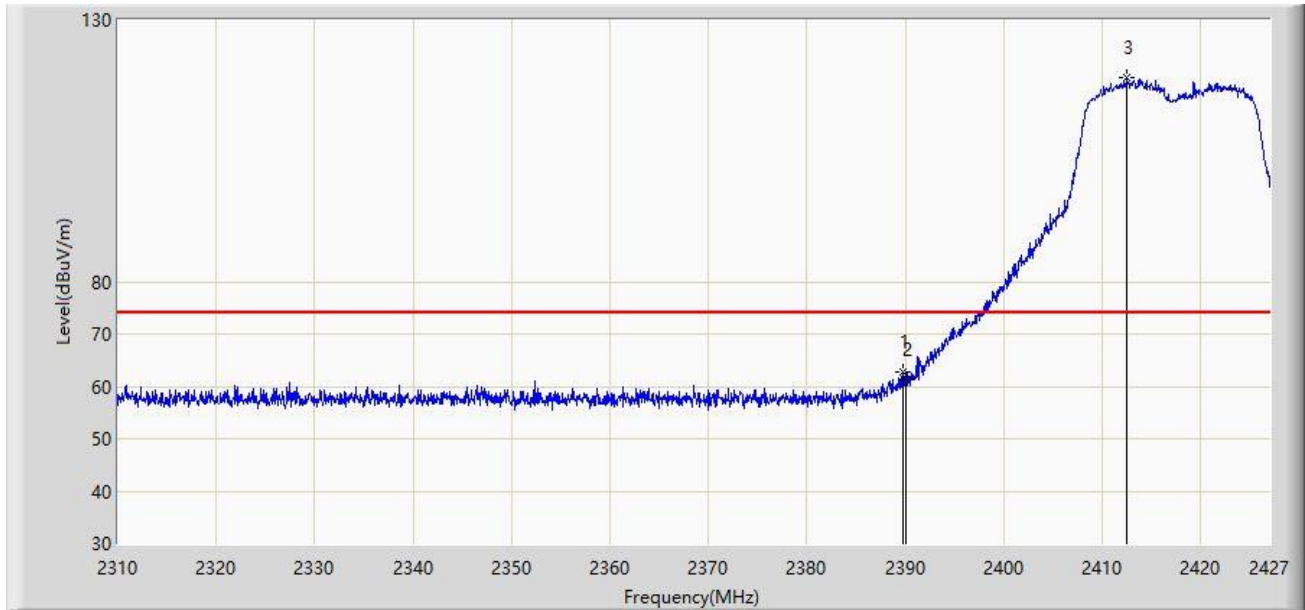


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.794	62.713	32.187	-11.287	74.000	30.526	PK
2		2390.000	61.247	30.721	-12.753	74.000	30.526	PK
3		2412.551	118.996	88.438	N/A	N/A	30.559	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/08/28 - 12:37
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: HAP ax2	Power: AC 120V/60Hz
Test Mode: Transmit by VHT20 at 2417MHz	

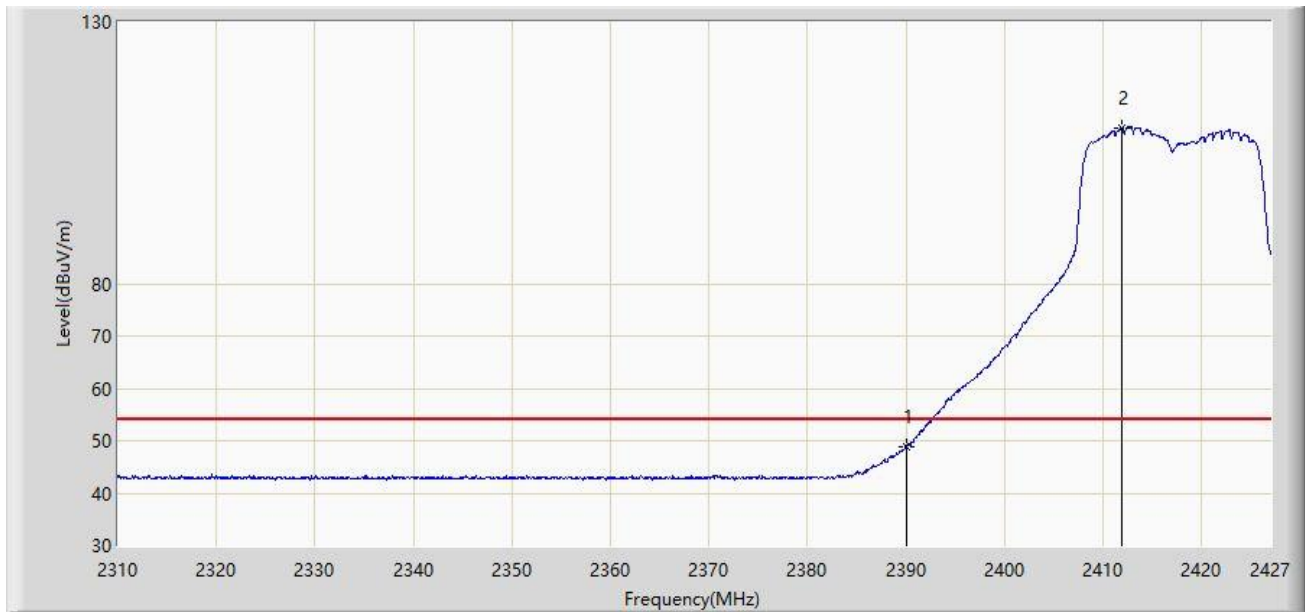


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	48.963	18.437	-5.037	54.000	30.526	AV
2		2411.848	109.697	79.139	N/A	N/A	30.558	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by VHT20 at 2437MHz	

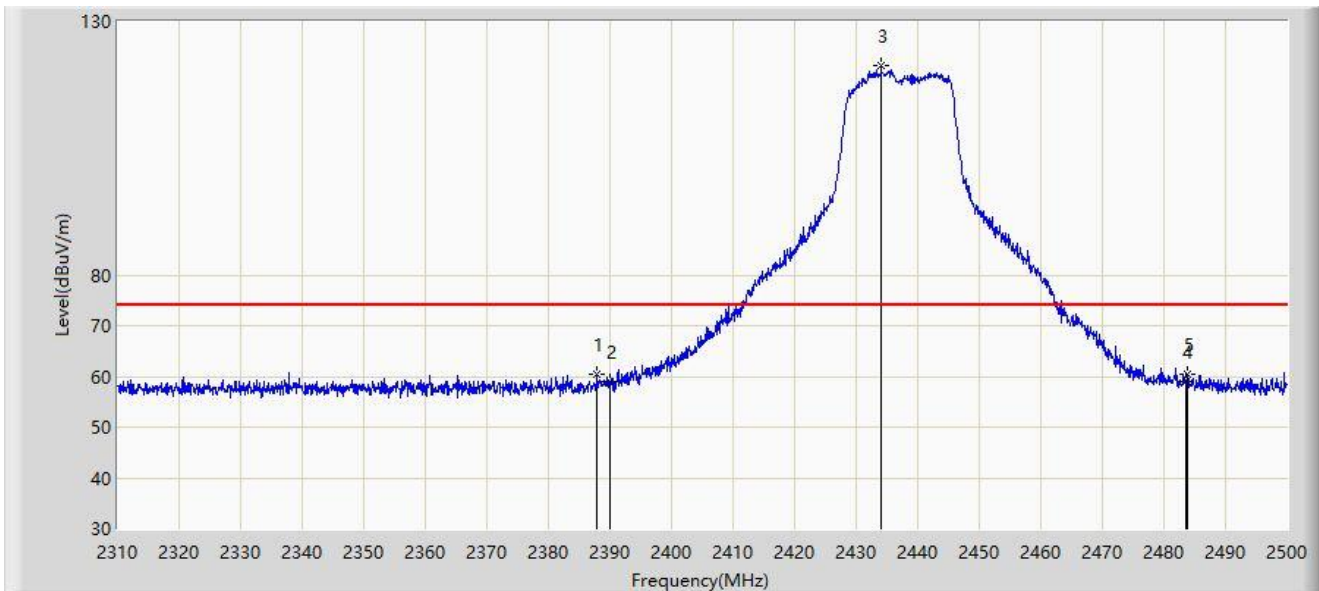


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2387.900	60.338	29.816	-13.662	74.000	30.523	PK
2		2390.000	58.923	28.397	-15.077	74.000	30.526	PK
3		2434.070	121.333	90.787	N/A	N/A	30.546	PK
4		2483.500	58.926	28.223	-15.074	74.000	30.704	PK
5	*	2483.755	60.386	29.682	-13.614	74.000	30.703	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by VHT20 at 2437MHz	

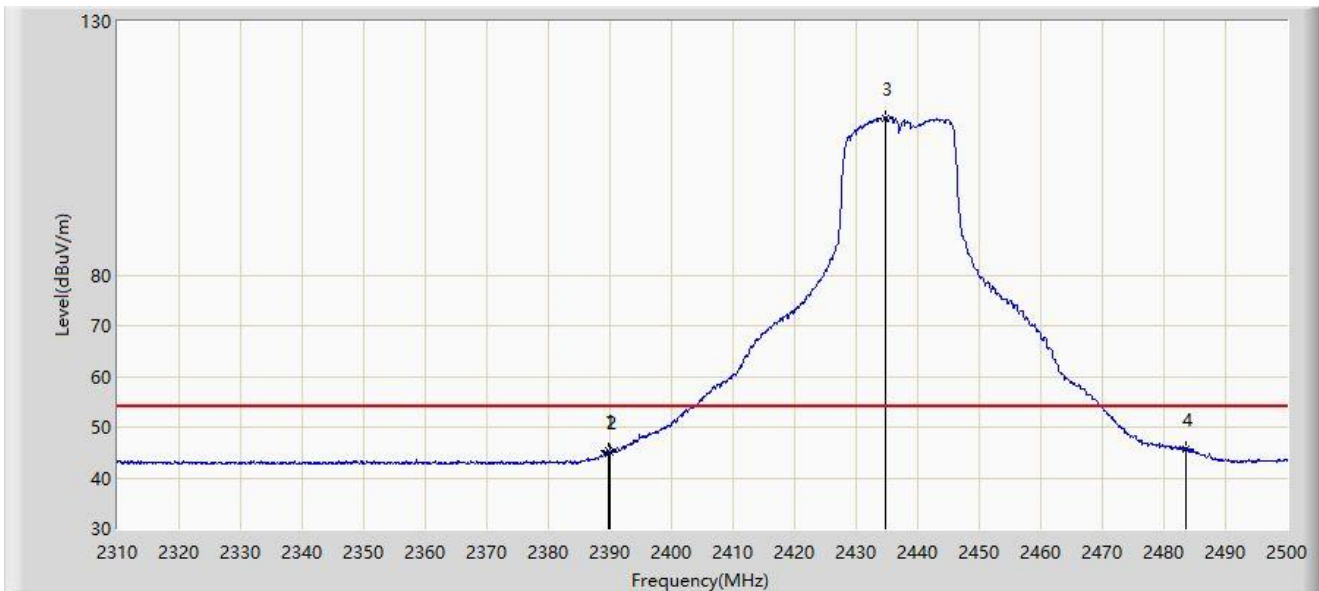


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2389.705	45.418	14.892	-8.582	54.000	30.525	AV
2		2390.000	44.963	14.437	-9.037	54.000	30.526	AV
3		2434.735	110.974	80.428	N/A	N/A	30.546	AV
4	*	2483.500	45.792	15.089	-8.208	54.000	30.704	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by VHT20 at 2437MHz	

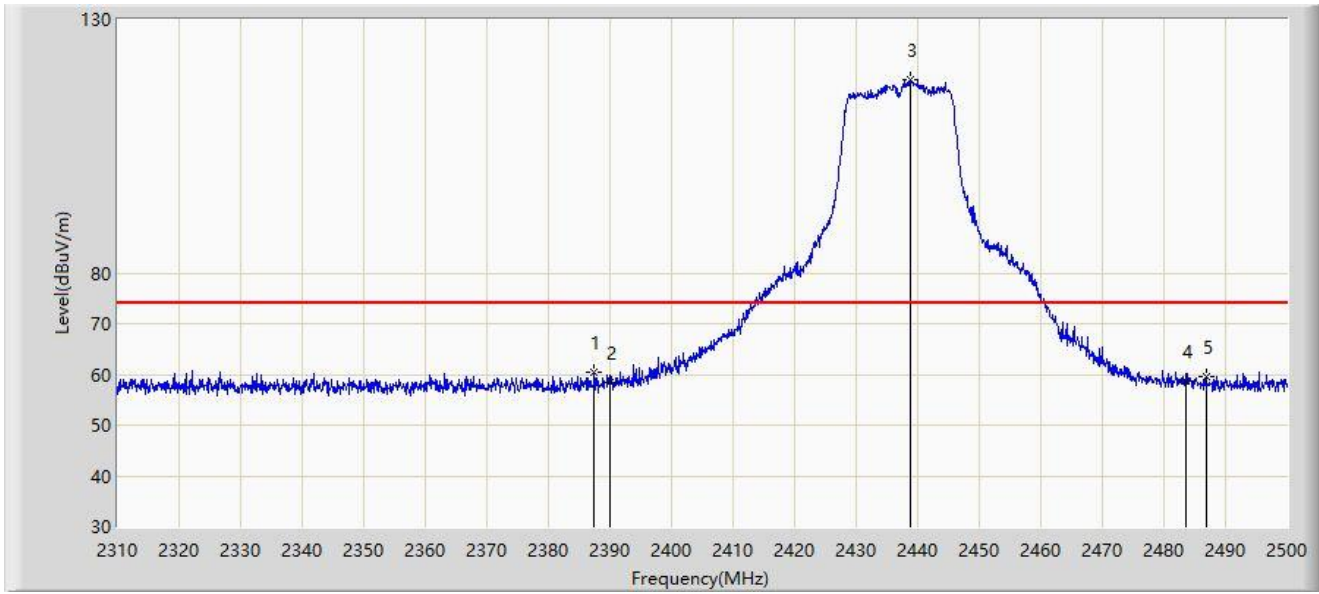


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2387.425	60.424	29.902	-13.576	74.000	30.522	PK
2		2390.000	58.416	27.890	-15.584	74.000	30.526	PK
3		2438.725	118.070	87.523	N/A	N/A	30.547	PK
4		2483.500	58.696	27.993	-15.304	74.000	30.704	PK
5		2486.795	59.504	28.799	-14.496	74.000	30.705	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by VHT20 at 2437MHz	

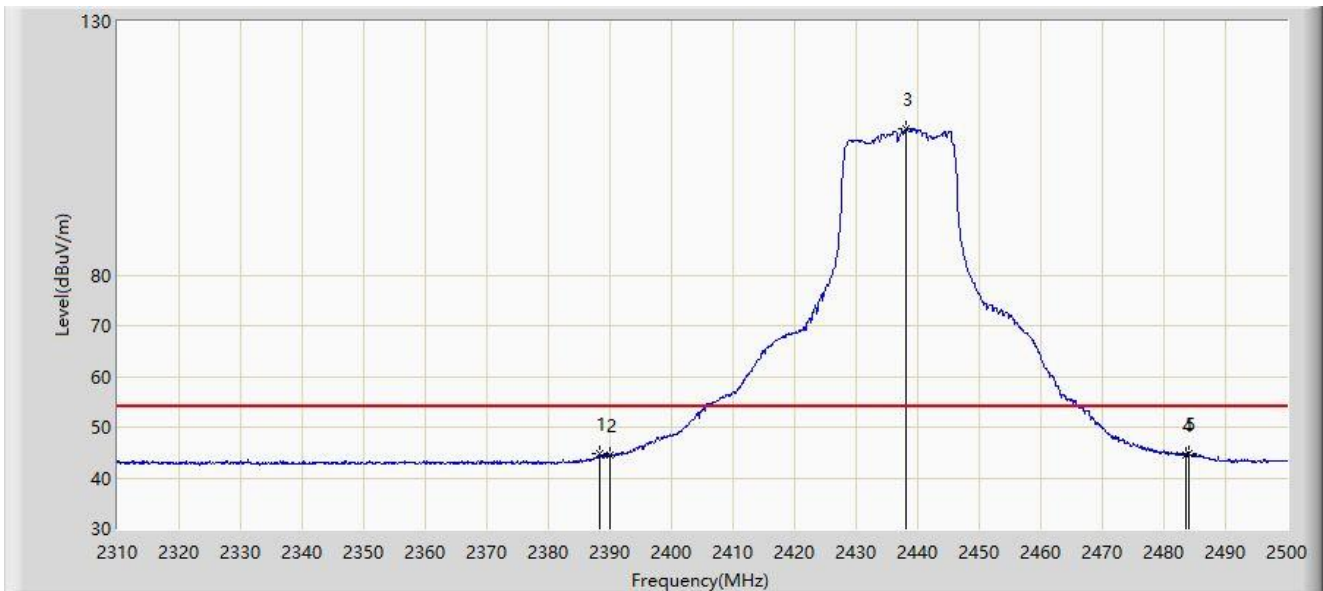


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2388.375	44.676	14.153	-9.324	54.000	30.523	AV
2		2390.000	44.581	14.055	-9.419	54.000	30.526	AV
3		2438.060	108.785	78.240	N/A	N/A	30.545	AV
4		2483.500	44.557	13.854	-9.443	54.000	30.704	AV
5	*	2483.945	44.719	14.015	-9.281	54.000	30.704	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/08/28 - 12:45
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: HAP ax2	Power: AC 120V/60Hz
Test Mode: Transmit by VHT20 at 2457MHz	

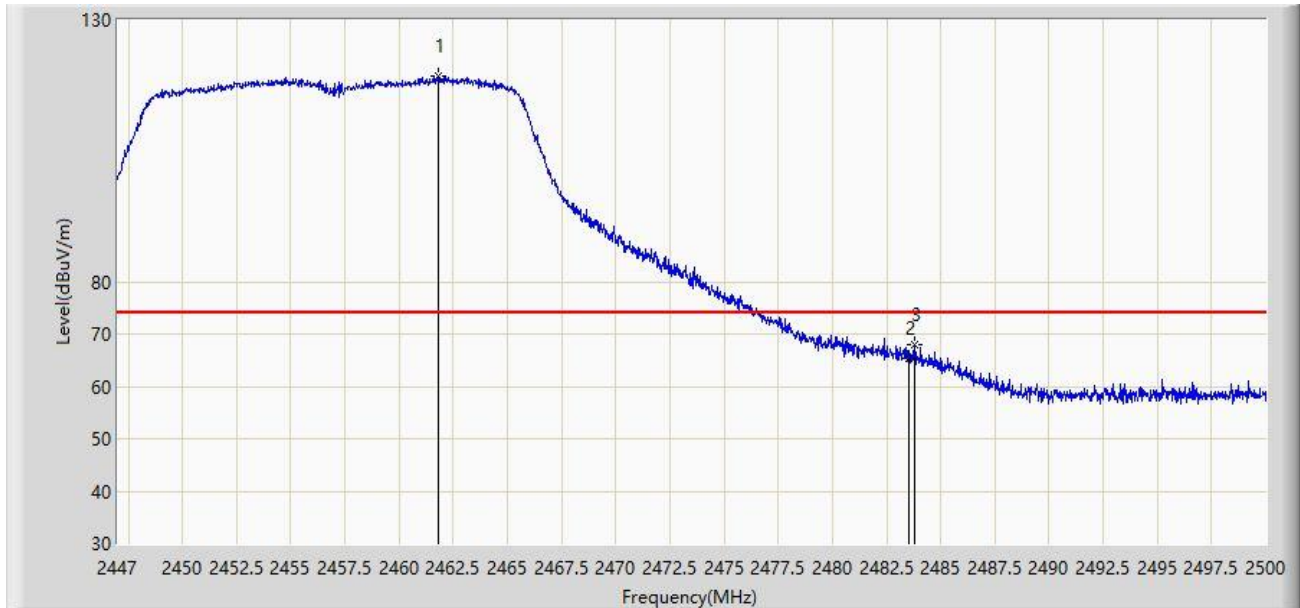


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.840	119.312	88.677	N/A	N/A	30.635	PK
2		2483.500	65.320	34.617	-8.680	74.000	30.704	PK
3	*	2483.809	67.860	37.156	-6.140	74.000	30.703	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/08/28 - 12:41
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: HAP ax2	Power: AC 120V/60Hz
Test Mode: Transmit by VHT20 at 2457MHz	

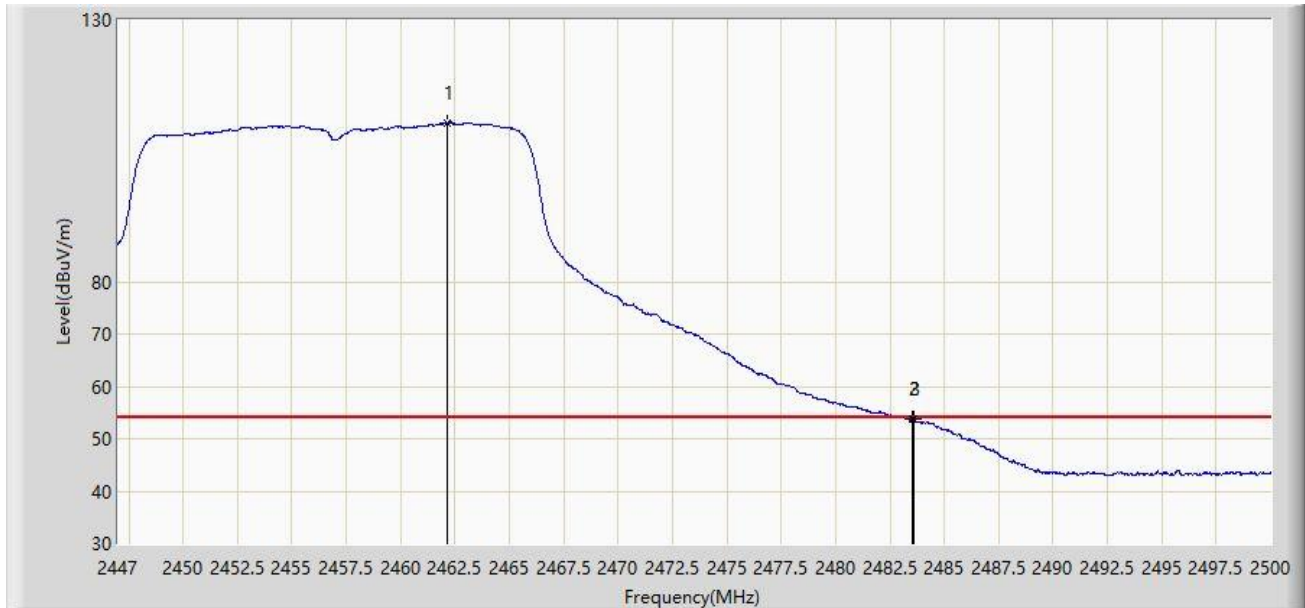


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2462.132	110.311	79.675	N/A	N/A	30.636	AV
2		2483.500	53.671	22.968	-0.329	54.000	30.704	AV
3	*	2483.570	53.799	23.095	-0.201	54.000	30.704	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by VHT20 at 2462MHz	

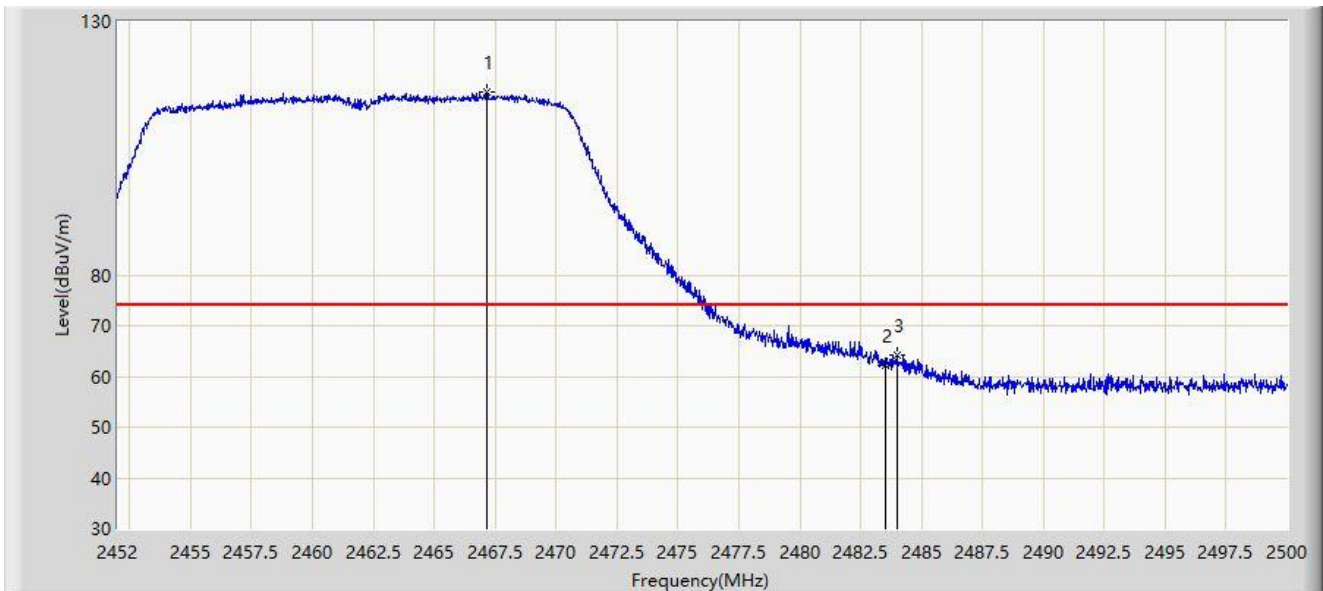


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2467.144	116.029	85.367	N/A	N/A	30.663	PK
2		2483.500	62.317	31.614	-11.683	74.000	30.704	PK
3	*	2483.992	64.216	33.512	-9.784	74.000	30.704	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by VHT20 at 2462MHz	

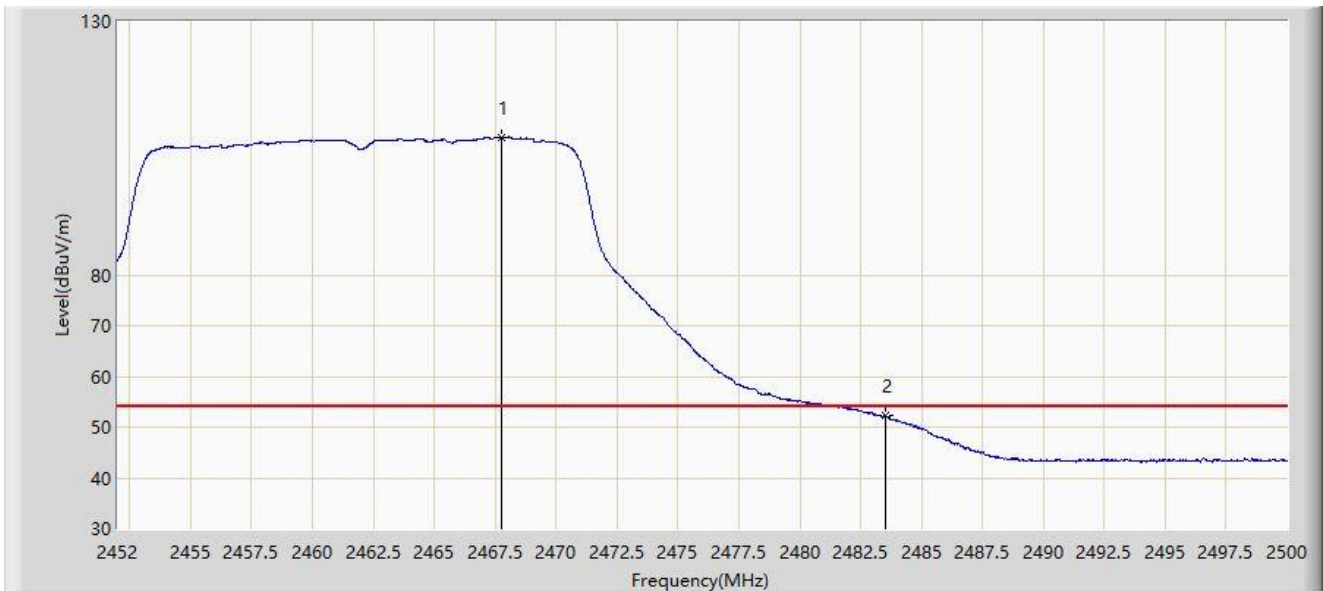


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2467.768	107.200	76.535	N/A	N/A	30.665	AV
2	*	2483.500	52.189	21.486	-1.811	54.000	30.704	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by VHT20 at 2462MHz	

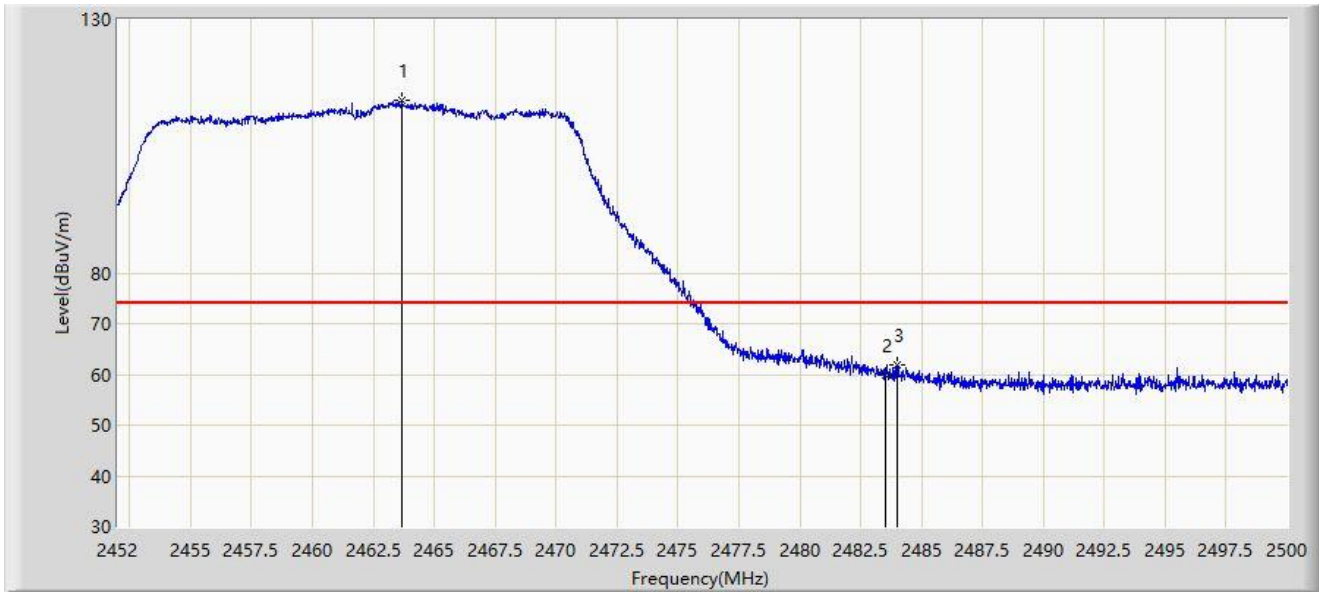


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2463.664	114.023	83.379	N/A	N/A	30.644	PK
2		2483.500	59.802	29.099	-14.198	74.000	30.704	PK
3	*	2484.016	61.984	31.280	-12.016	74.000	30.704	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by VHT20 at 2462MHz	

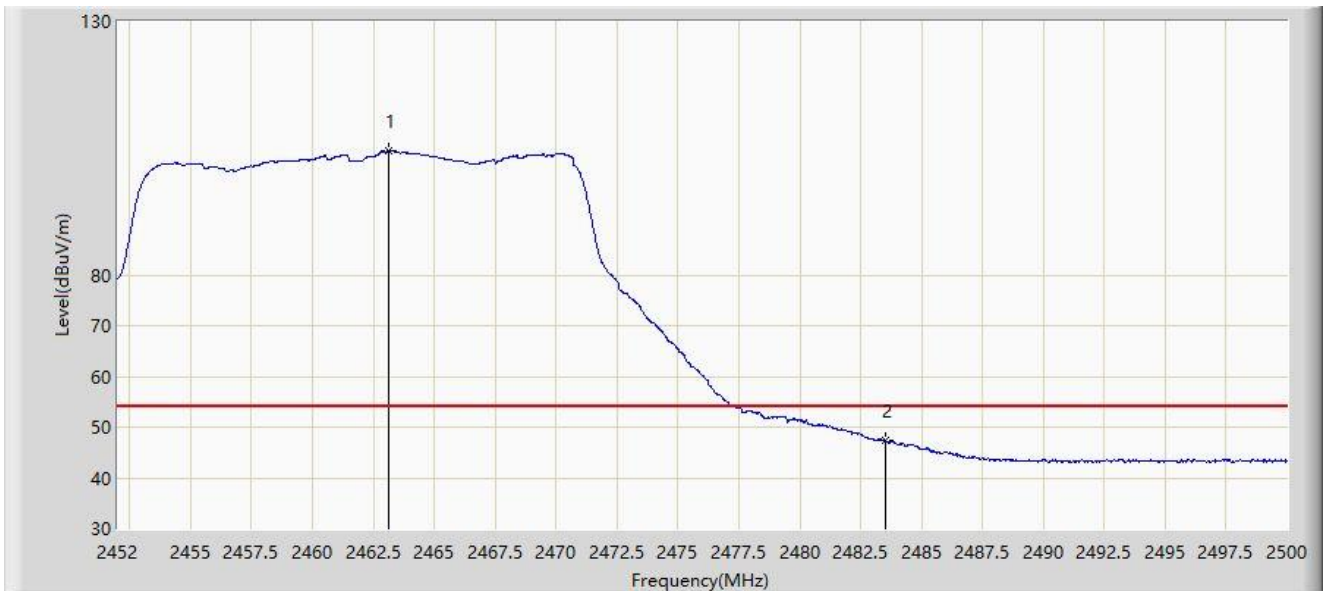


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2463.112	104.395	73.753	N/A	N/A	30.642	AV
2	*	2483.500	47.330	16.627	-6.670	54.000	30.704	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2422MHz	

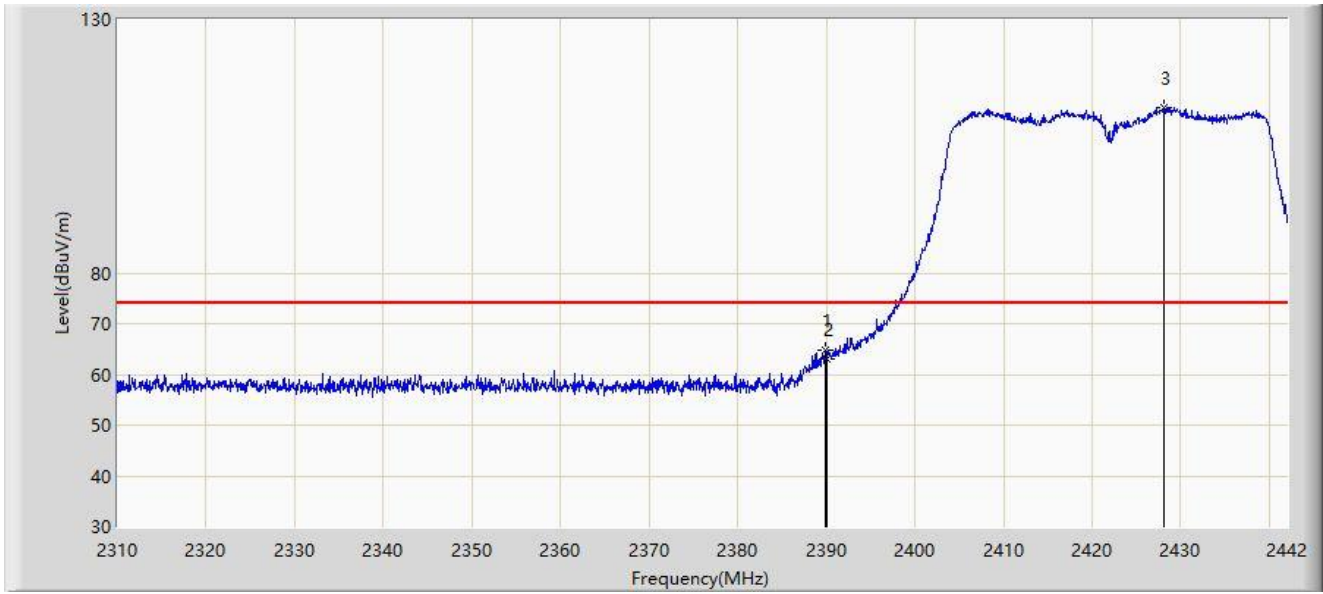


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.926	64.828	34.302	-9.172	74.000	30.526	PK
2		2390.000	62.983	32.457	-11.017	74.000	30.526	PK
3		2428.140	112.658	82.109	N/A	N/A	30.549	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2422MHz	

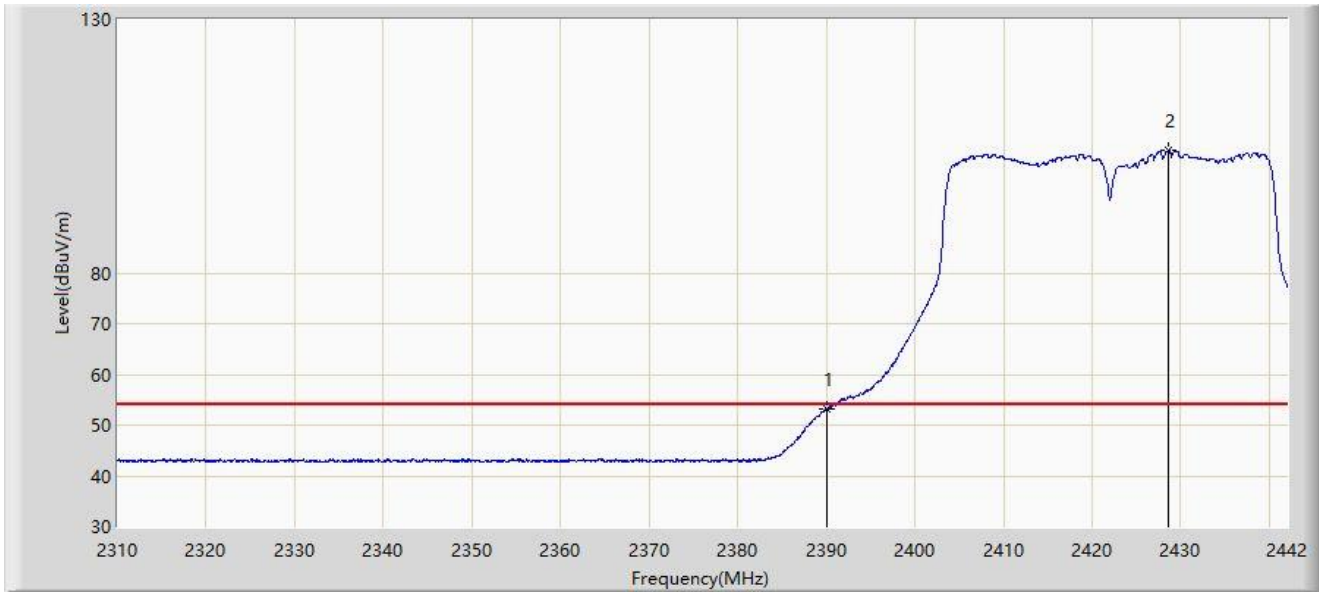


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	53.215	22.689	-0.785	54.000	30.526	AV
2		2428.536	104.134	73.585	N/A	N/A	30.549	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2422MHz	

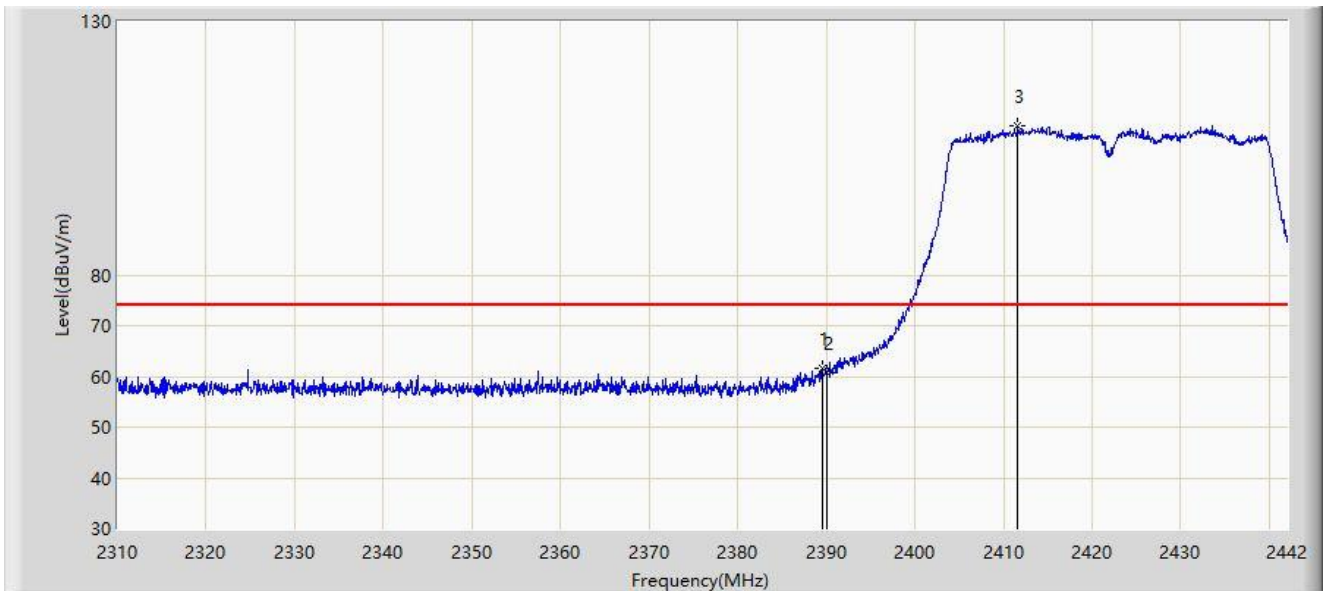


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.530	61.658	31.133	-12.342	74.000	30.525	PK
2		2390.000	60.703	30.177	-13.297	74.000	30.526	PK
3		2411.640	109.497	78.939	N/A	N/A	30.558	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2422MHz	

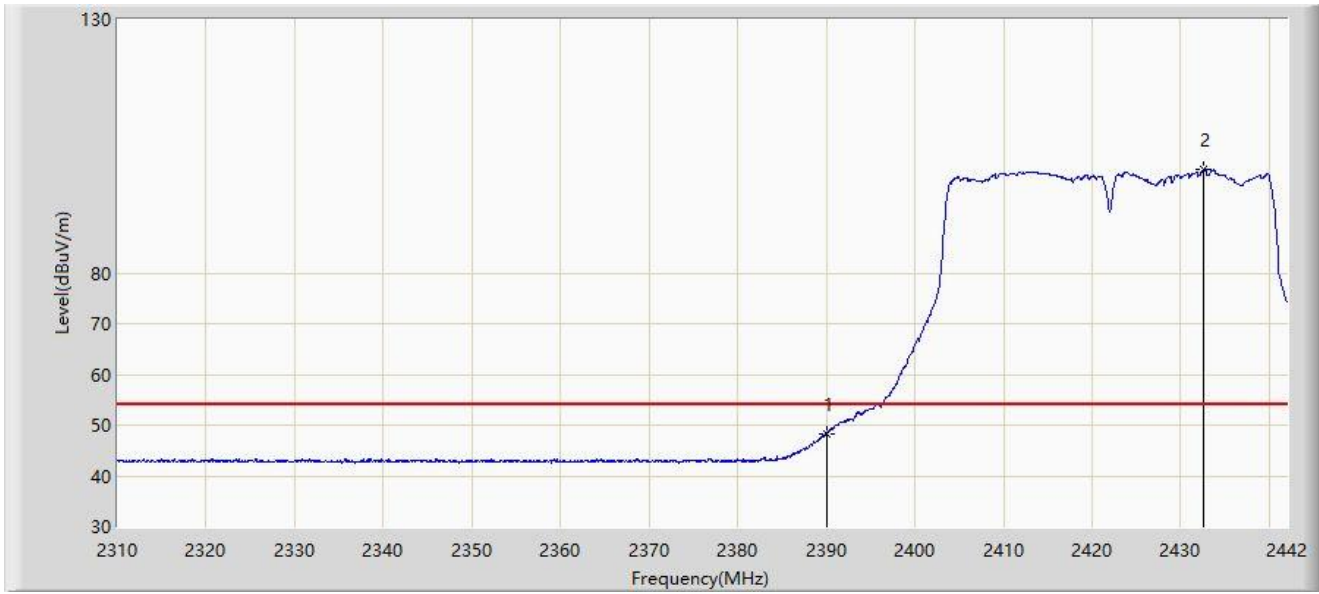


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	48.289	17.763	-5.711	54.000	30.526	AV
2		2432.496	100.369	69.822	N/A	N/A	30.547	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2437MHz	

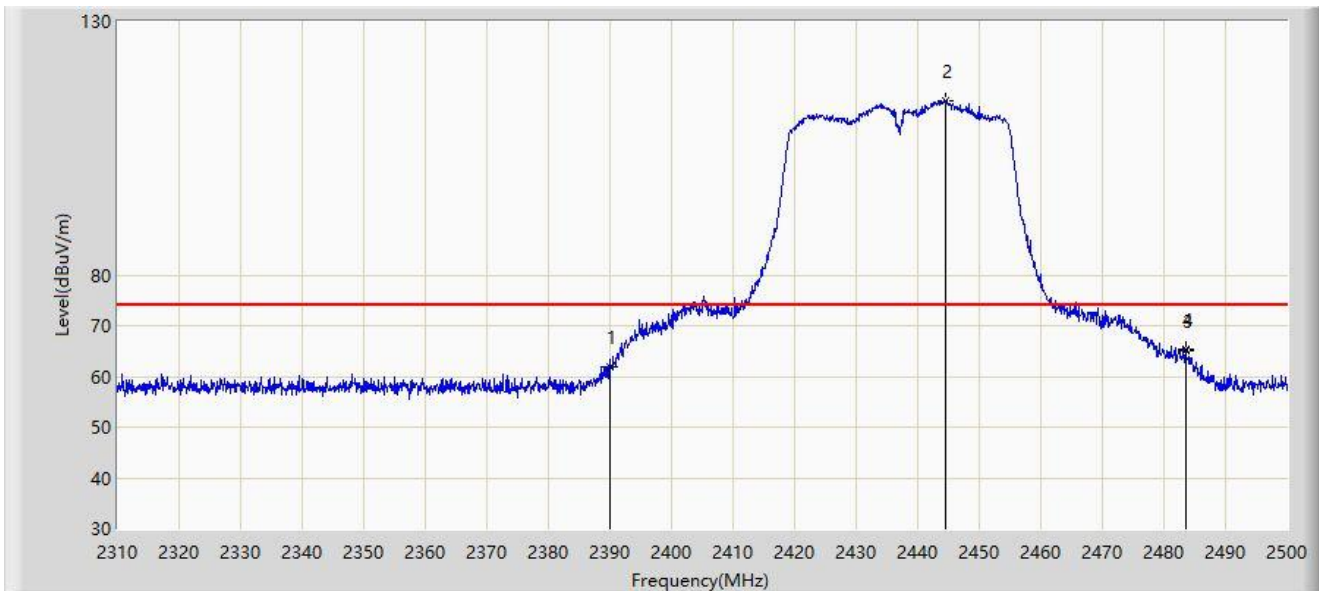


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2390.000	61.909	31.383	-12.091	74.000	30.526	PK
2		2444.425	114.431	83.865	N/A	N/A	30.566	PK
3		2483.500	65.111	34.408	-8.889	74.000	30.704	PK
4	*	2483.565	65.439	34.735	-8.561	74.000	30.704	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2437MHz	

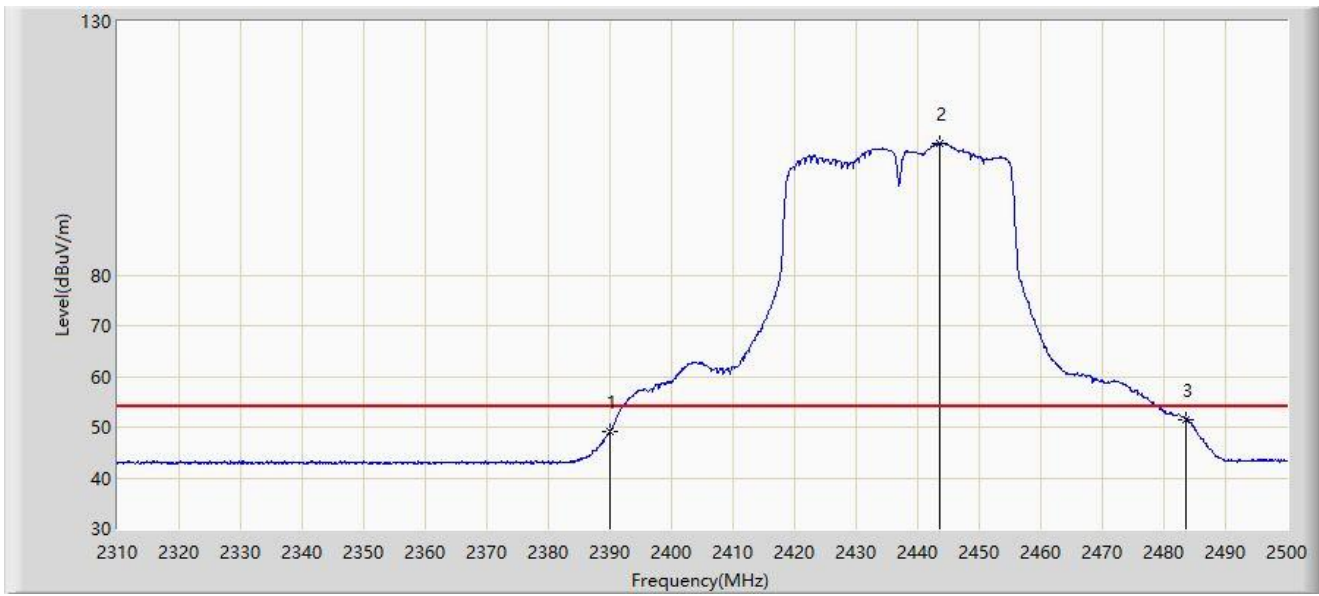


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2390.000	49.227	18.701	-4.773	54.000	30.526	AV
2		2443.475	105.938	75.375	N/A	N/A	30.563	AV
3	*	2483.500	51.589	20.886	-2.411	54.000	30.704	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2437MHz	

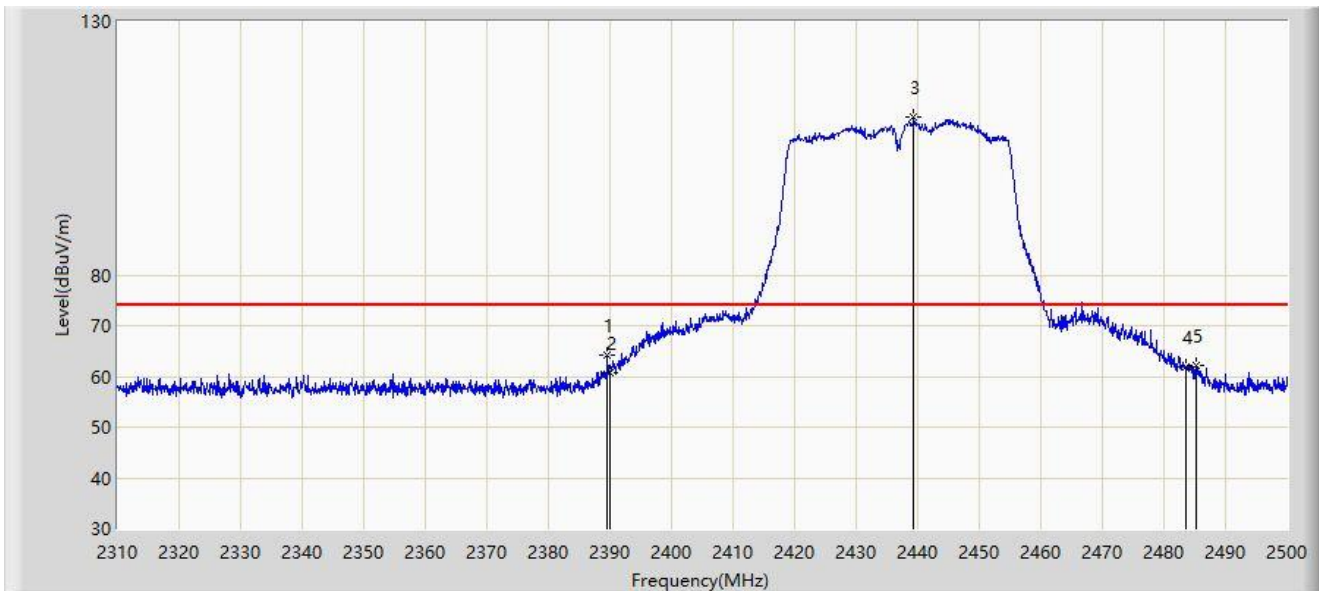


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.610	64.295	33.769	-9.705	74.000	30.525	PK
2		2390.000	60.694	30.168	-13.306	74.000	30.526	PK
3		2439.295	111.161	80.612	N/A	N/A	30.549	PK
4		2483.500	61.869	31.166	-12.131	74.000	30.704	PK
5		2485.275	62.272	31.567	-11.728	74.000	30.705	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2437MHz	

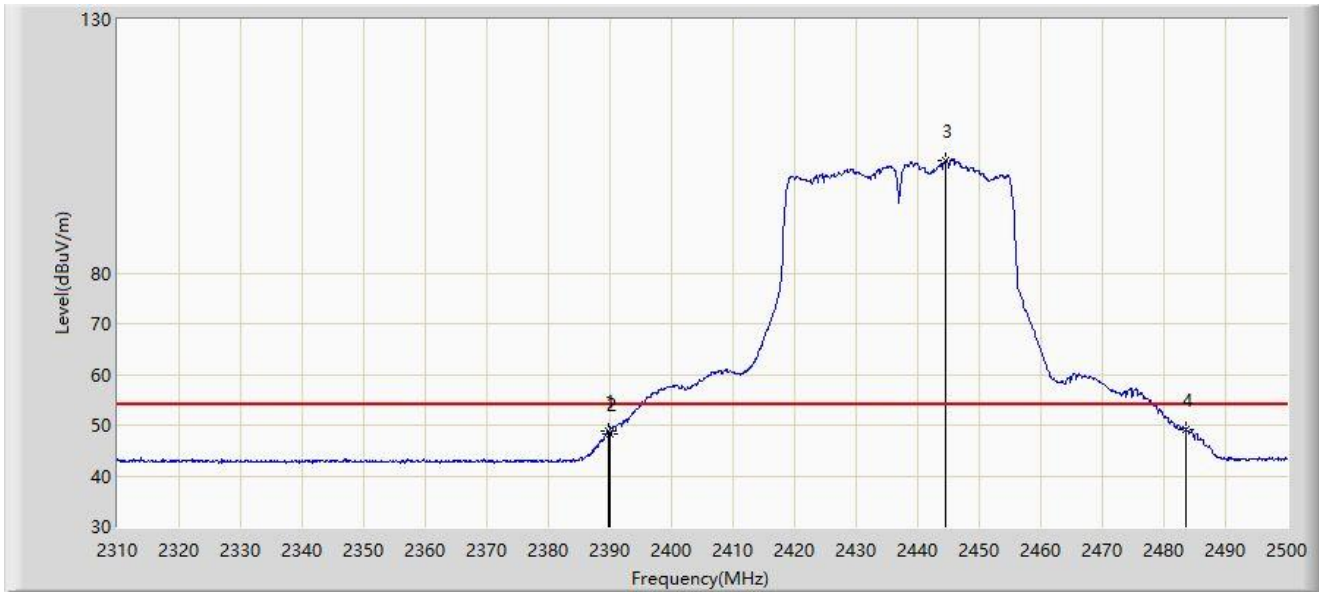


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2389.705	48.788	18.262	-5.212	54.000	30.525	AV
2		2390.000	48.230	17.704	-5.770	54.000	30.526	AV
3		2444.615	102.261	71.694	N/A	N/A	30.566	AV
4	*	2483.500	49.140	18.437	-4.860	54.000	30.704	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2452MHz	

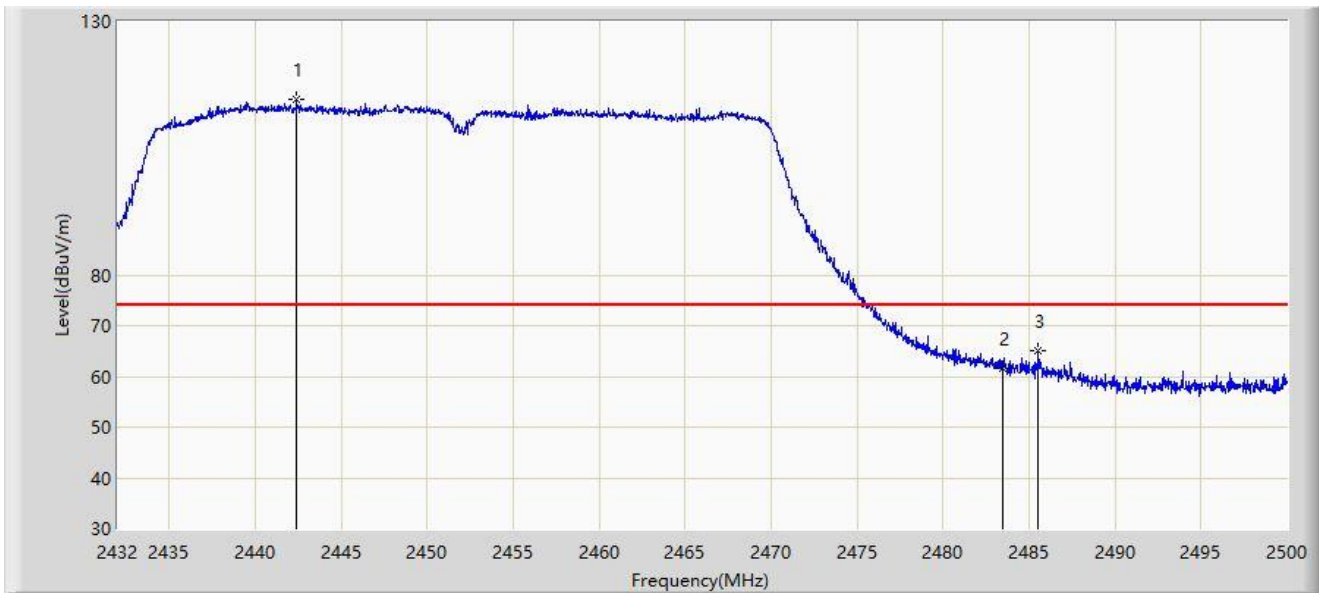


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2442.404	114.527	83.968	N/A	N/A	30.559	PK
2		2483.500	61.502	30.799	-12.498	74.000	30.704	PK
3	*	2485.550	65.111	34.406	-8.889	74.000	30.704	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2452MHz	

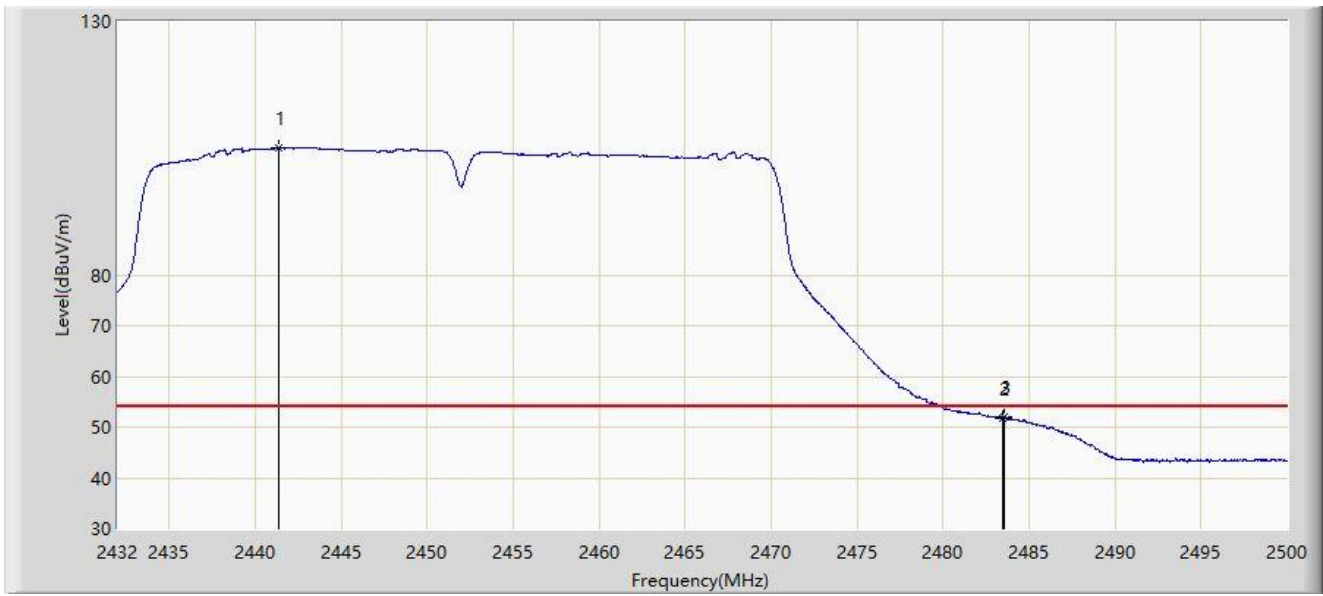


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2441.384	105.004	74.448	N/A	N/A	30.556	AV
2		2483.500	51.823	21.120	-2.177	54.000	30.704	AV
3	*	2483.578	52.039	21.335	-1.961	54.000	30.704	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2452MHz	

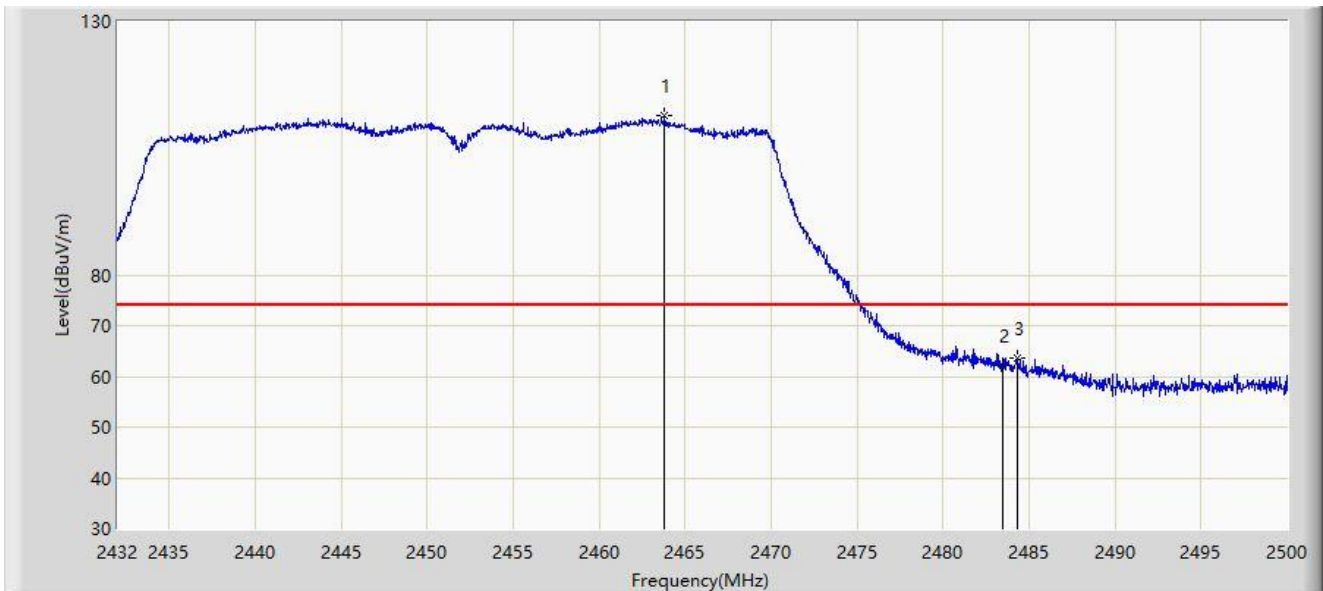


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2463.824	111.348	80.703	N/A	N/A	30.646	PK
2		2483.500	62.179	31.476	-11.821	74.000	30.704	PK
3	*	2484.326	63.523	32.819	-10.477	74.000	30.704	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2452MHz	

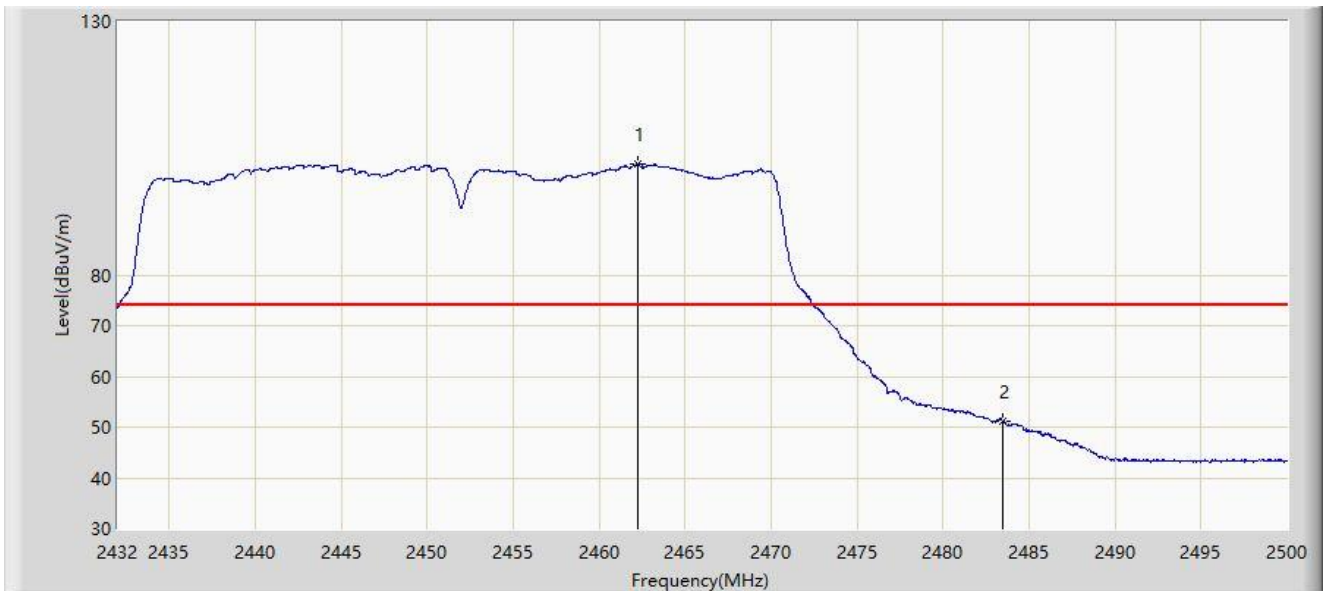


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2462.226	101.895	71.258	N/A	N/A	30.637	PK
2	*	2483.500	51.216	20.513	-22.784	74.000	30.704	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

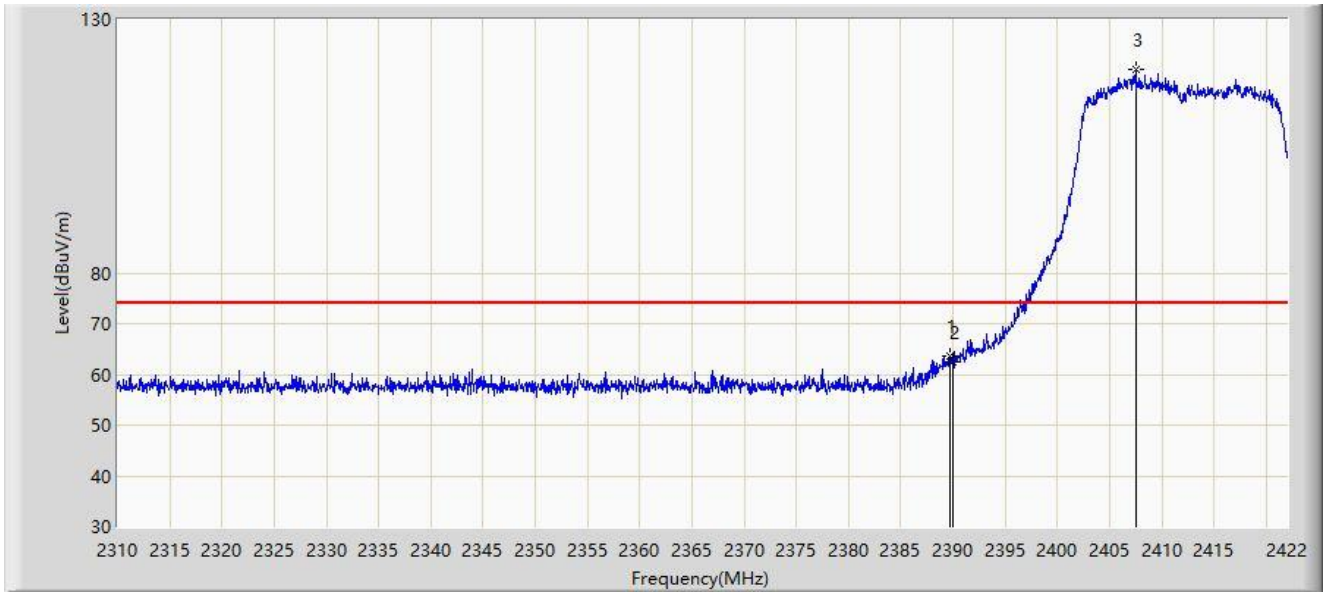


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.744	63.650	33.124	-10.350	74.000	30.526	PK
2		2390.000	62.429	31.903	-11.571	74.000	30.526	PK
3		2407.496	120.095	89.537	N/A	N/A	30.559	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

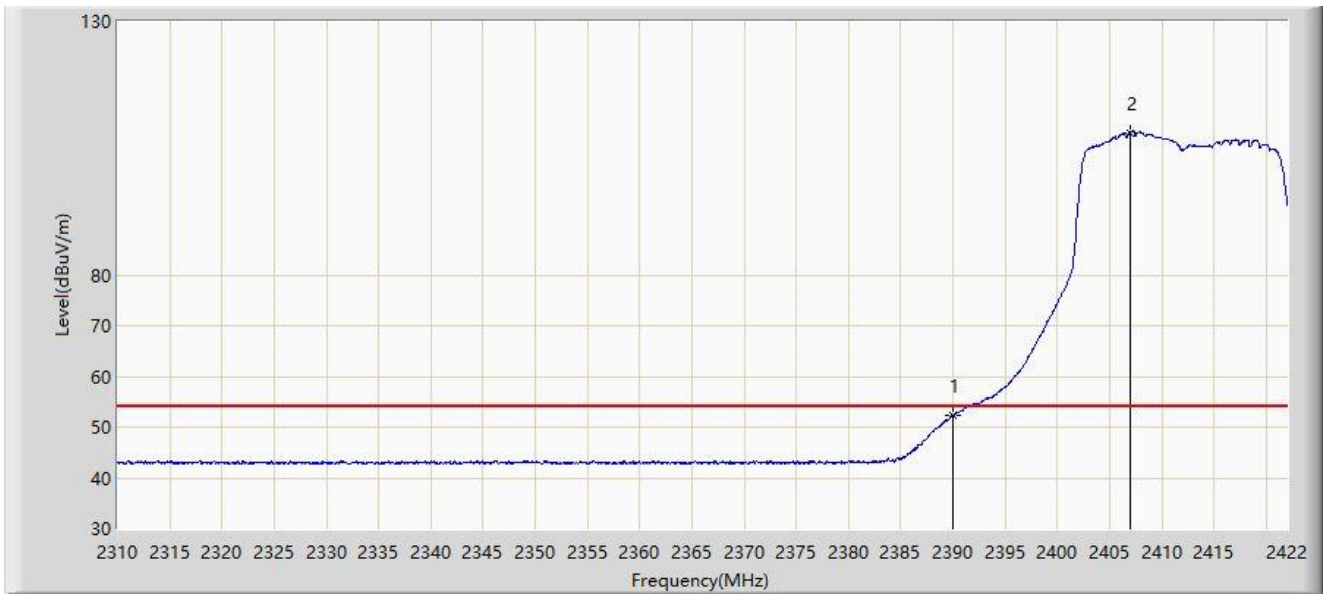


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	52.302	21.776	-1.698	54.000	30.526	AV
2		2406.936	108.111	77.552	N/A	N/A	30.558	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

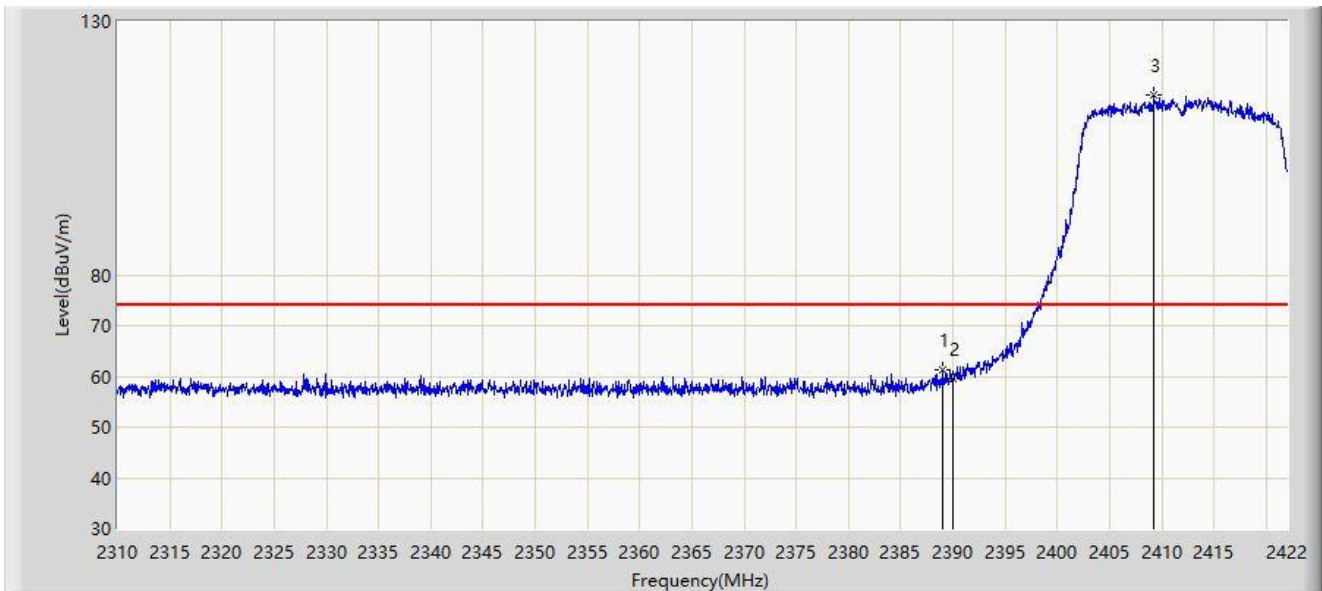


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.072	61.382	30.857	-12.618	74.000	30.525	PK
2		2390.000	59.439	28.913	-14.561	74.000	30.526	PK
3		2409.232	115.472	84.914	N/A	N/A	30.558	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

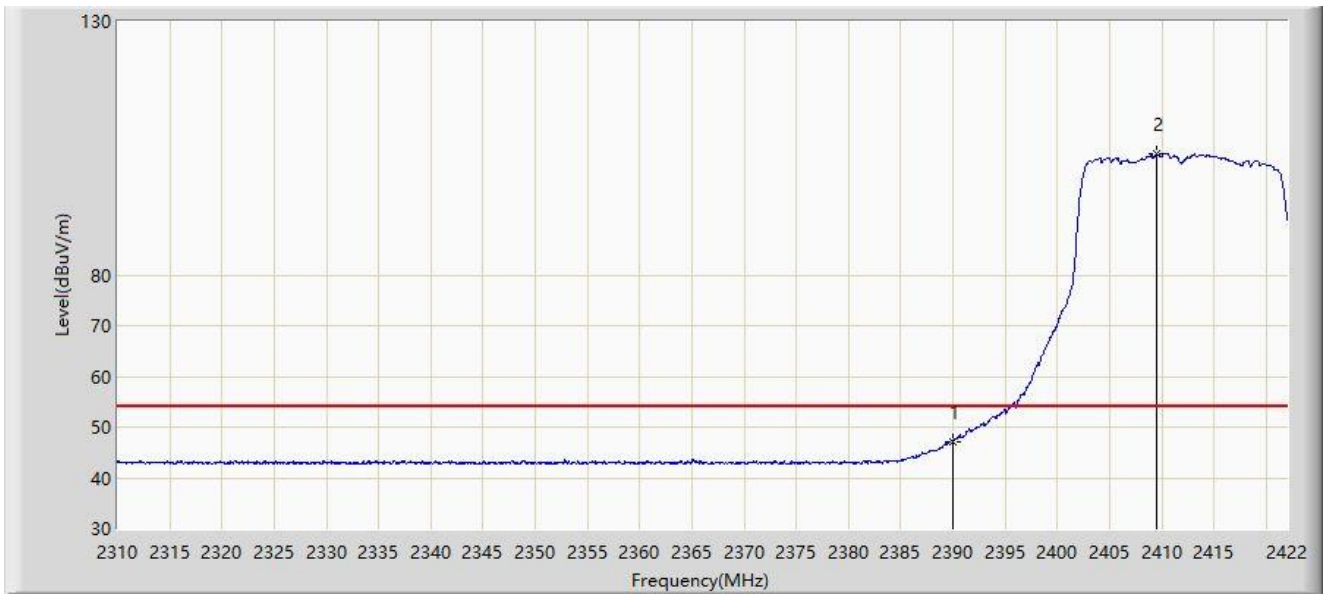


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	47.236	16.710	-6.764	54.000	30.526	AV
2		2409.568	103.798	73.240	N/A	N/A	30.558	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/08/28 - 12:53
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: HAP ax2	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2417MHz	

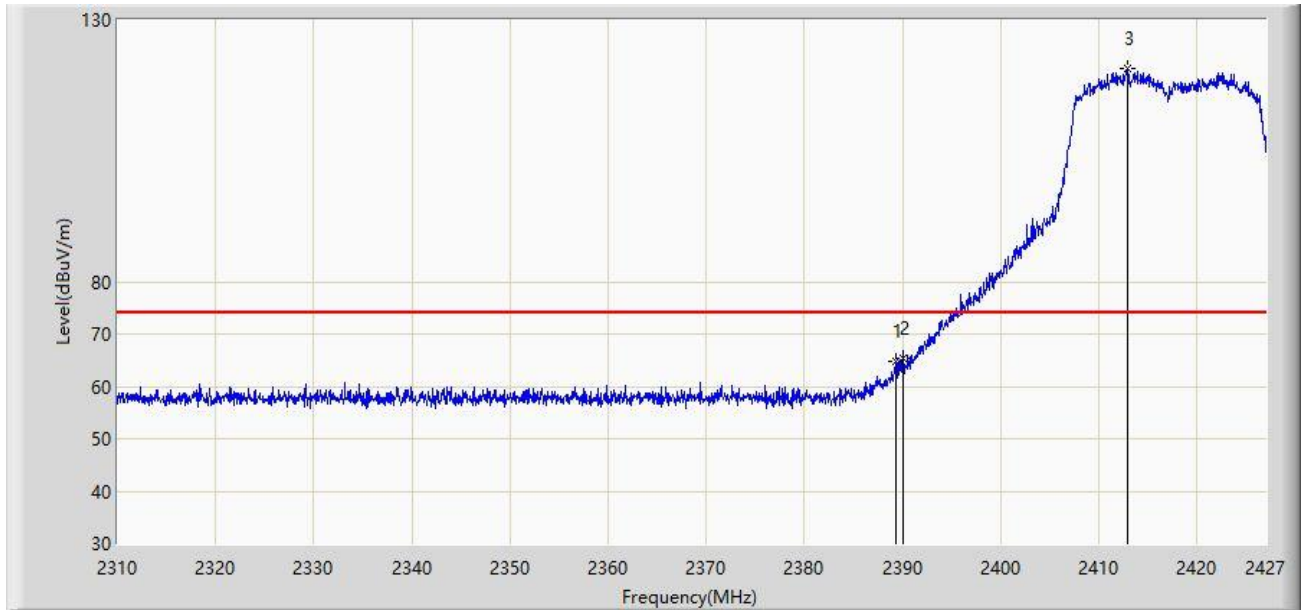


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2389.268	64.716	34.191	-9.284	74.000	30.525	PK
2	*	2390.000	65.257	34.731	-8.743	74.000	30.526	PK
3		2412.902	120.841	90.283	N/A	N/A	30.558	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/08/28 - 12:51
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: HAP ax2	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2417MHz	

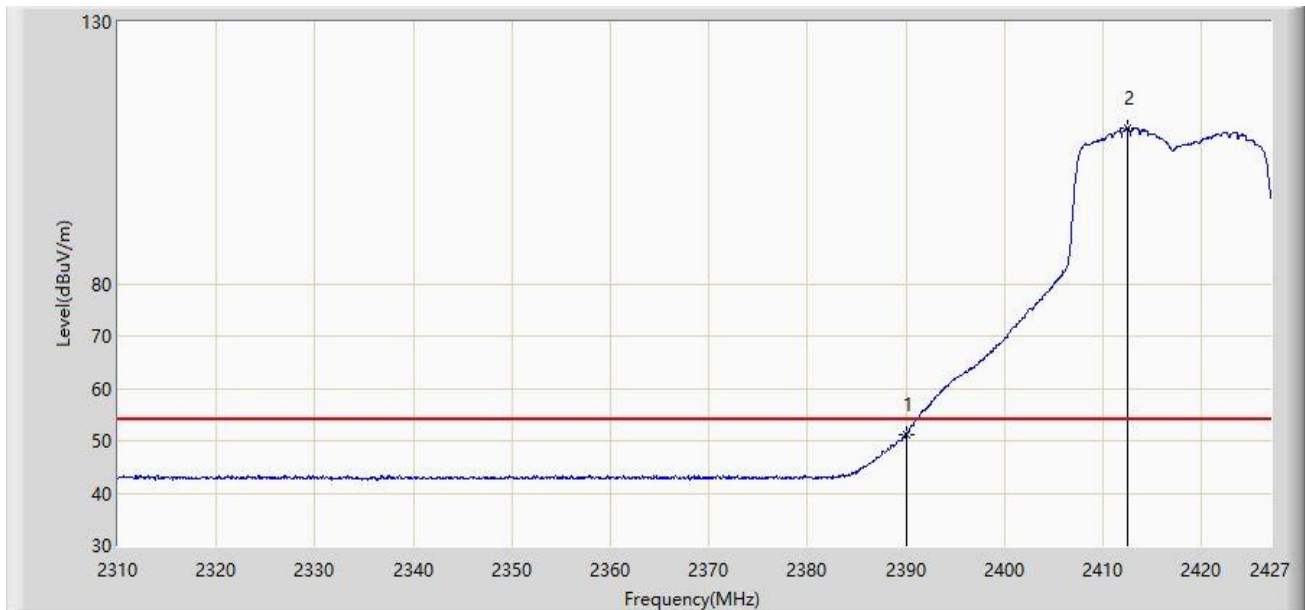


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	51.208	20.682	-2.792	54.000	30.526	AV
2		2412.434	109.662	79.104	N/A	N/A	30.558	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2437MHz	

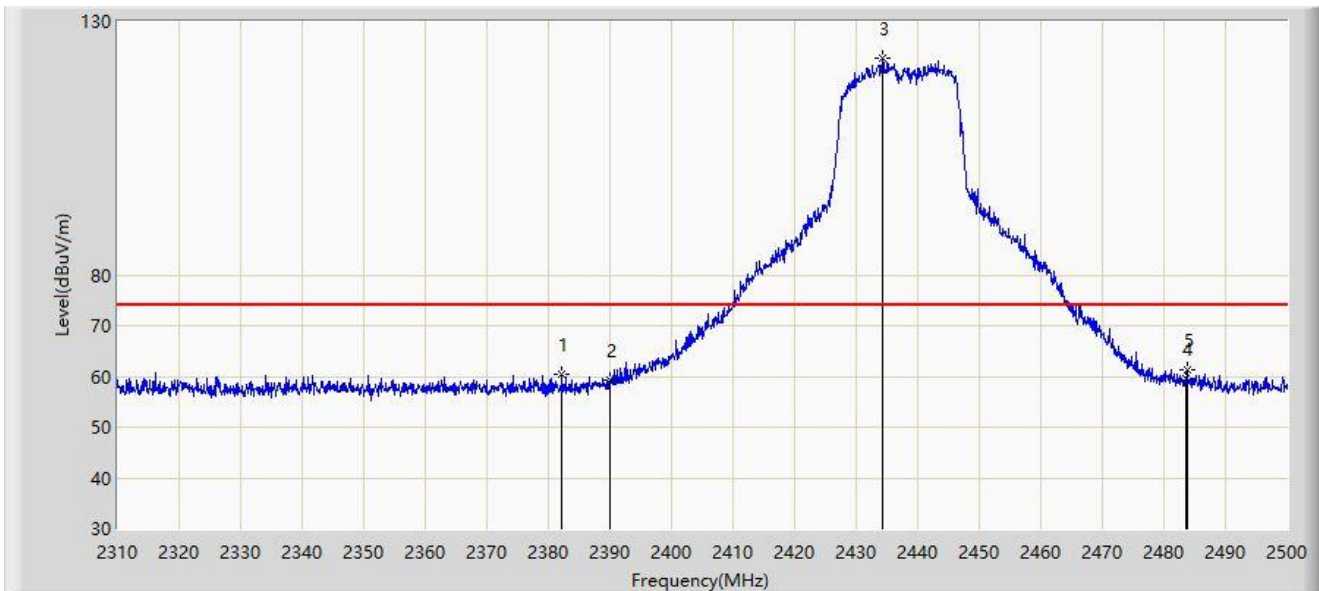


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2382.200	60.485	29.965	-13.515	74.000	30.520	PK
2		2390.000	59.180	28.654	-14.820	74.000	30.526	PK
3		2434.260	122.827	92.281	N/A	N/A	30.546	PK
4		2483.500	59.594	28.891	-14.406	74.000	30.704	PK
5	*	2483.755	61.448	30.744	-12.552	74.000	30.703	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2437MHz	

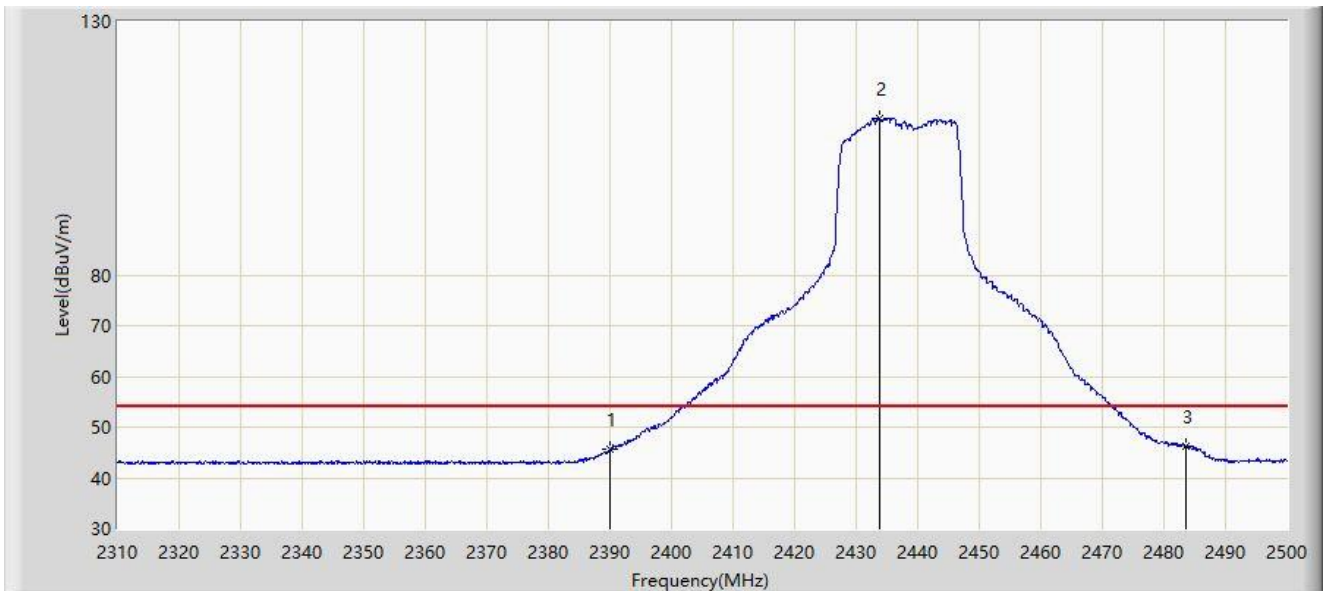


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2390.000	45.633	15.107	-8.367	54.000	30.526	AV
2		2433.785	110.924	80.377	N/A	N/A	30.547	AV
3	*	2483.500	46.333	15.630	-7.667	54.000	30.704	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2437MHz	

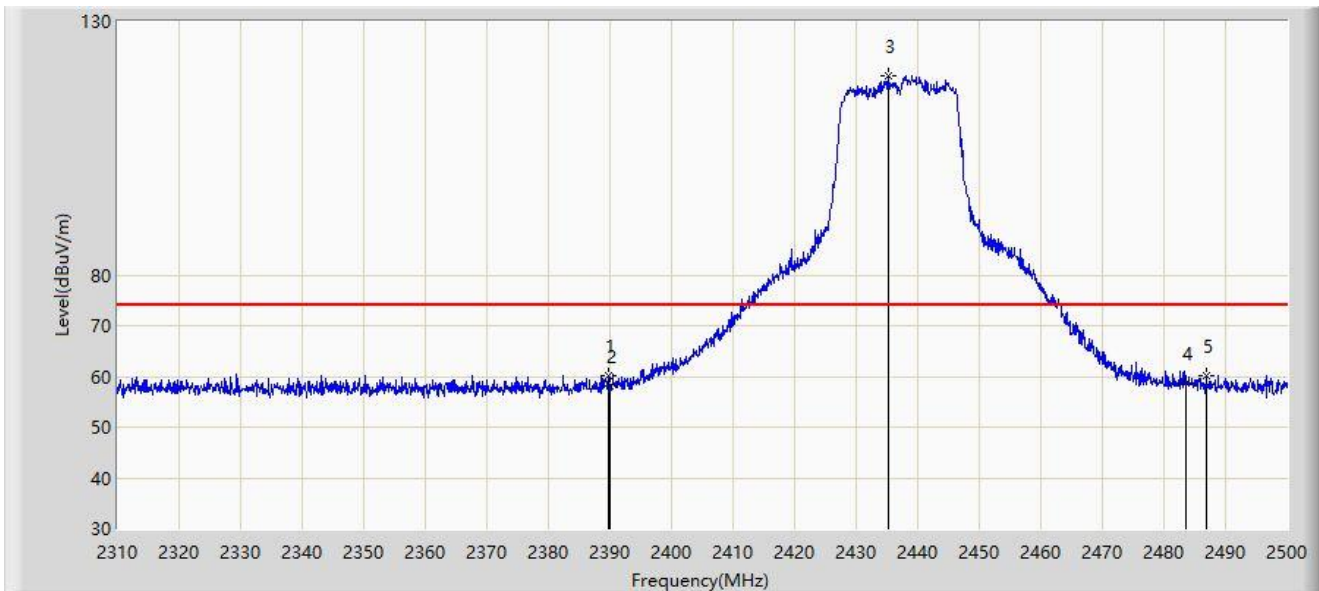


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.705	60.168	29.642	-13.832	74.000	30.525	PK
2		2390.000	58.130	27.604	-15.870	74.000	30.526	PK
3		2435.210	119.305	88.759	N/A	N/A	30.546	PK
4		2483.500	58.758	28.055	-15.242	74.000	30.704	PK
5		2486.795	60.090	29.385	-13.910	74.000	30.705	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2437MHz	

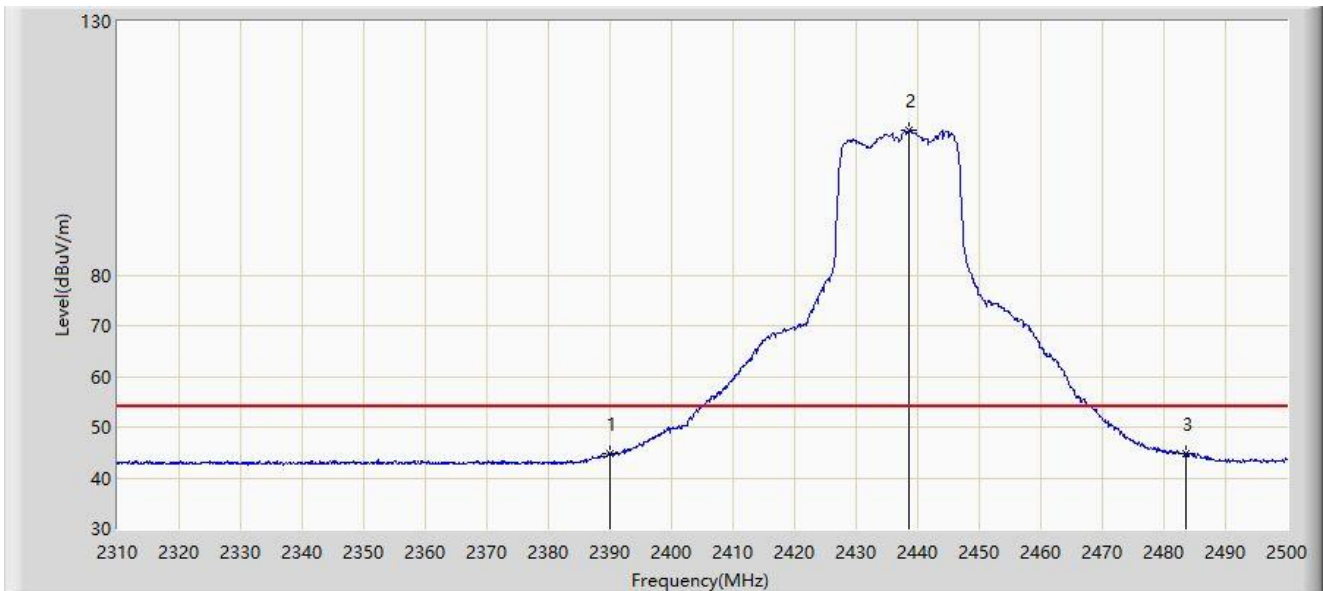


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2390.000	44.722	14.196	-9.278	54.000	30.526	AV
2		2438.630	108.483	77.936	N/A	N/A	30.547	AV
3	*	2483.500	44.735	14.032	-9.265	54.000	30.704	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/08/28 - 12:59
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: HAP ax2	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2457MHz	

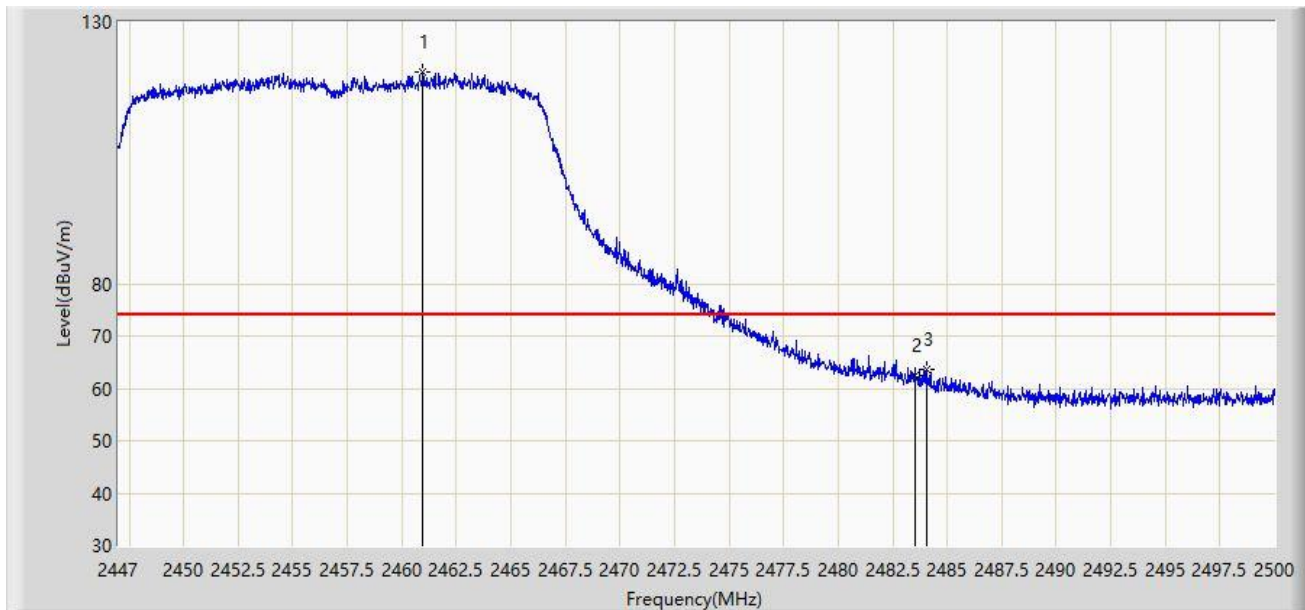


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2460.966	120.333	89.702	N/A	N/A	30.631	PK
2		2483.500	62.344	31.641	-11.656	74.000	30.704	PK
3	*	2484.047	63.641	32.937	-10.359	74.000	30.704	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/08/28 - 12:57
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: HAP ax2	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2457MHz	

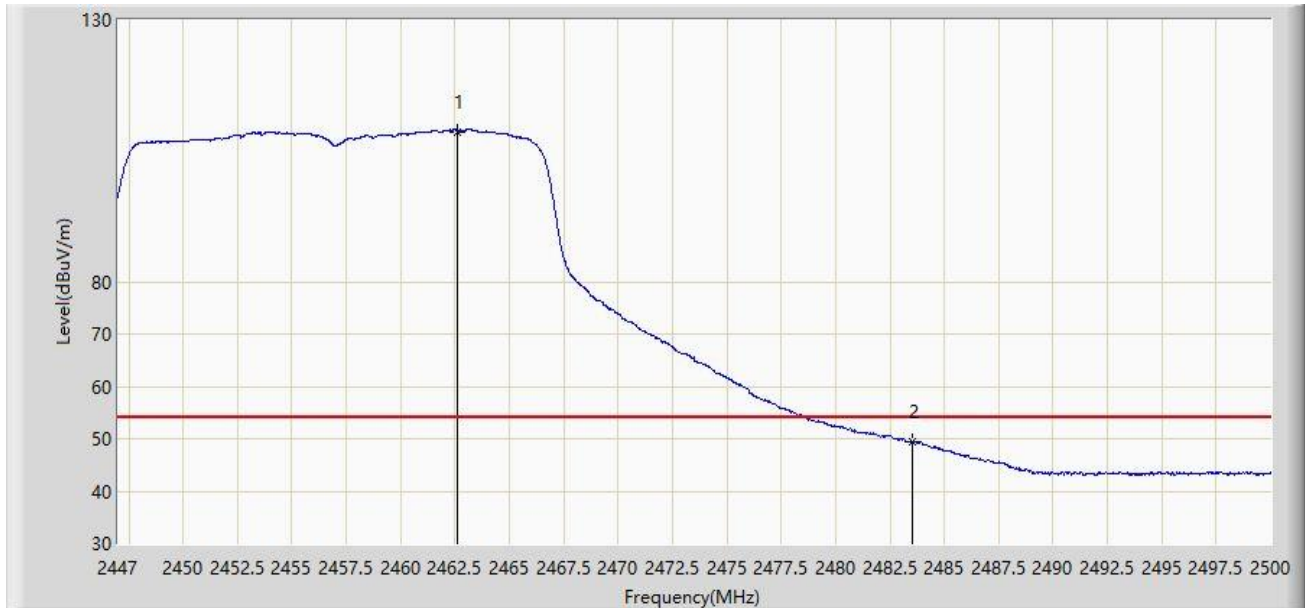


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2462.635	108.606	77.967	N/A	N/A	30.639	AV
2	*	2483.500	49.432	18.729	-4.568	54.000	30.704	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

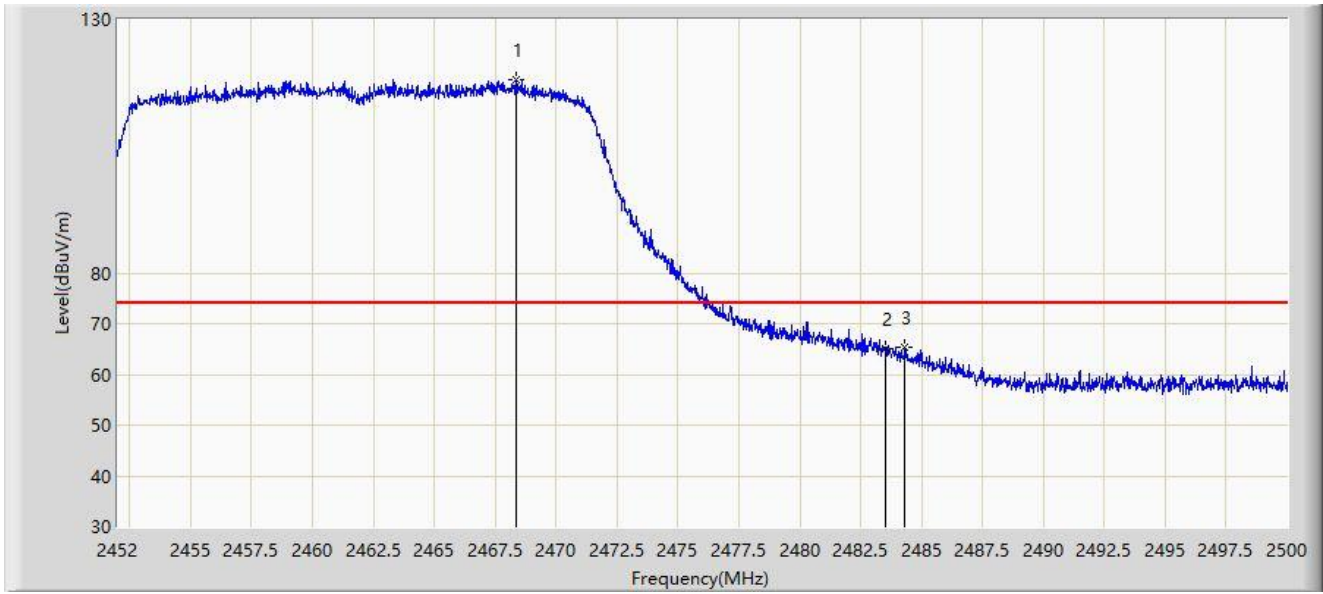


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2468.368	118.064	87.395	N/A	N/A	30.669	PK
2		2483.500	65.084	34.381	-8.916	74.000	30.704	PK
3	*	2484.304	65.407	34.703	-8.593	74.000	30.703	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

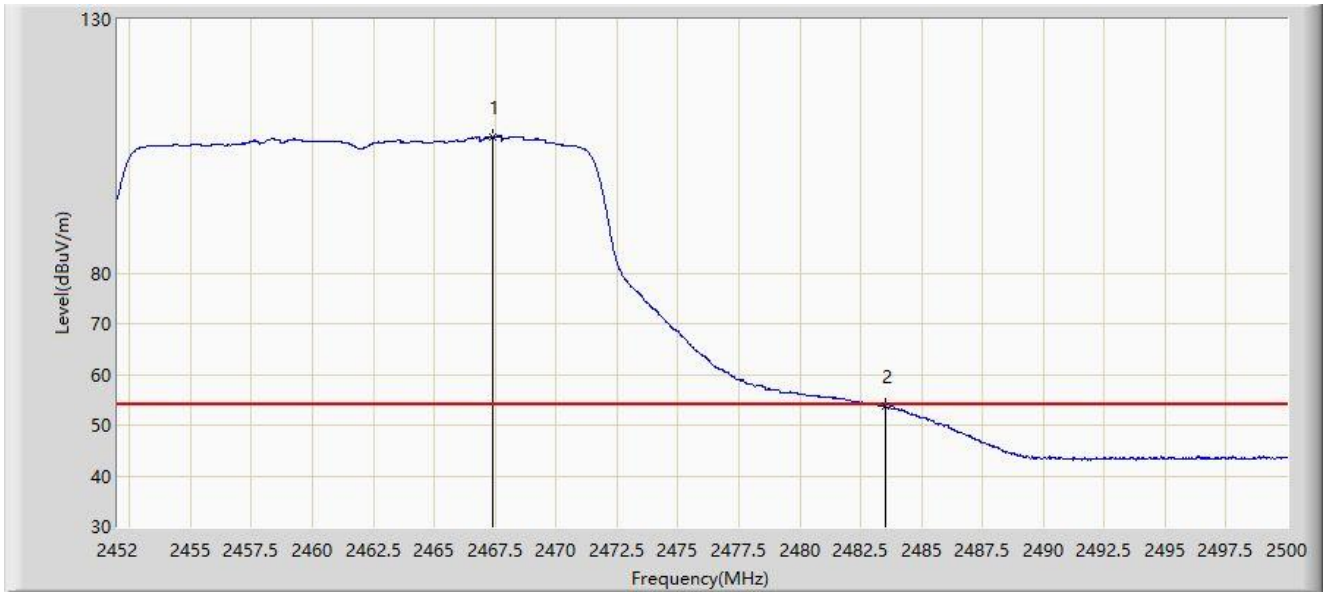


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2467.384	106.882	76.219	N/A	N/A	30.663	AV
2	*	2483.500	53.851	23.148	-0.149	54.000	30.704	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

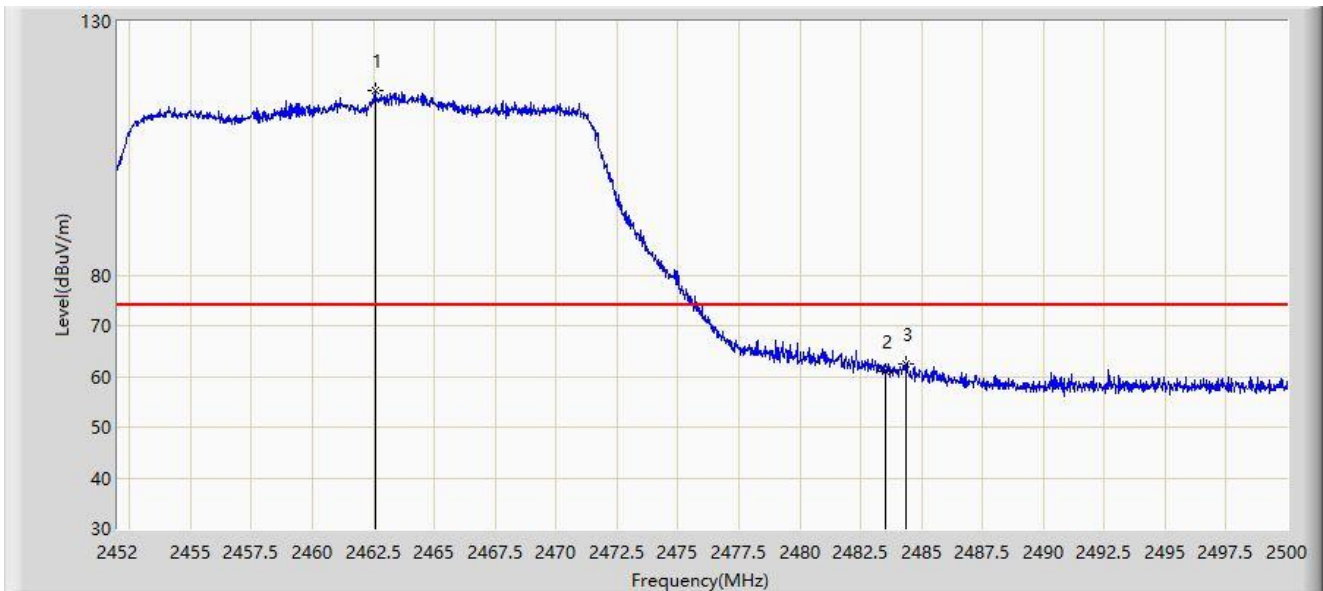


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2462.560	116.512	85.873	N/A	N/A	30.638	PK
2		2483.500	60.873	30.170	-13.127	74.000	30.704	PK
3	*	2484.352	62.479	31.775	-11.521	74.000	30.704	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-16
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

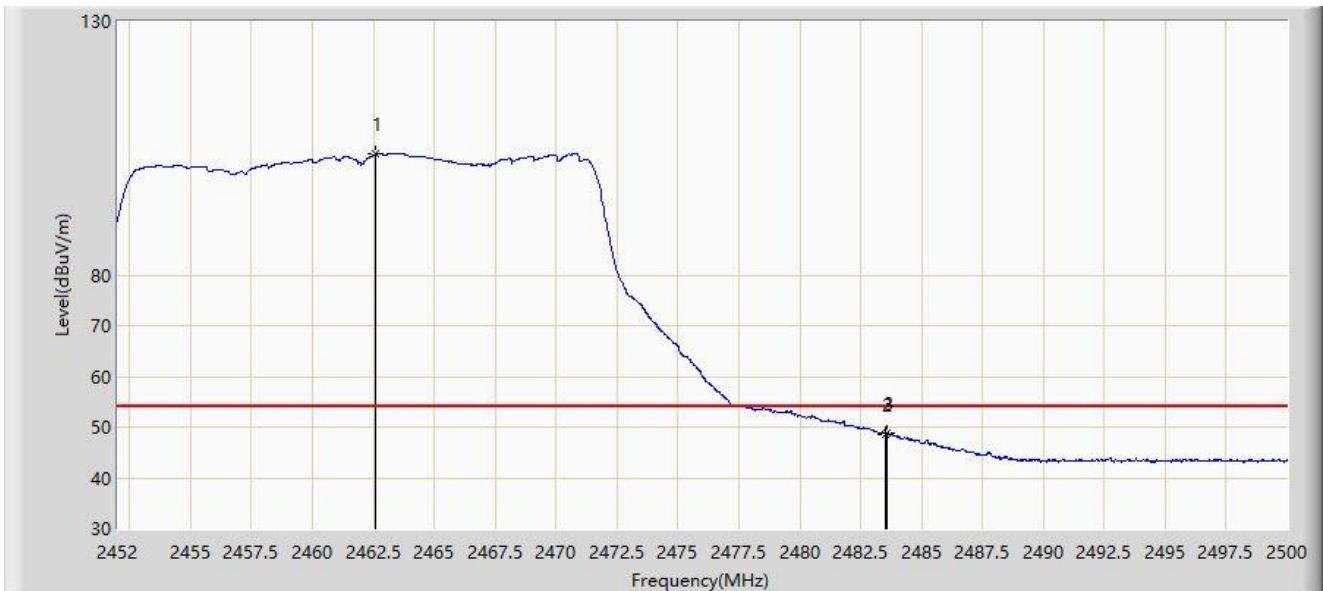


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2462.560	103.784	73.145	N/A	N/A	30.638	AV
2		2483.500	48.689	17.986	-5.311	54.000	30.704	AV
3	*	2483.608	48.910	18.206	-5.090	54.000	30.704	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-18
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

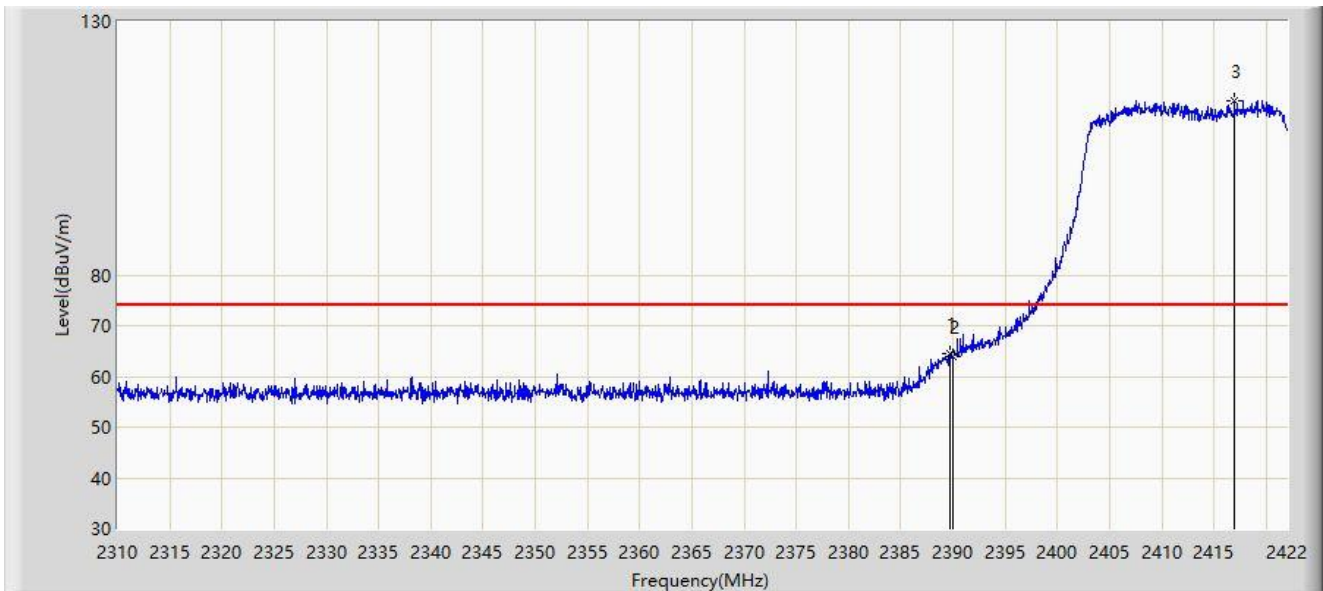


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.744	64.389	33.863	-9.611	74.000	30.526	PK
2		2390.000	63.814	33.288	-10.186	74.000	30.526	PK
3		2416.960	114.364	83.805	N/A	N/A	30.559	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-18
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

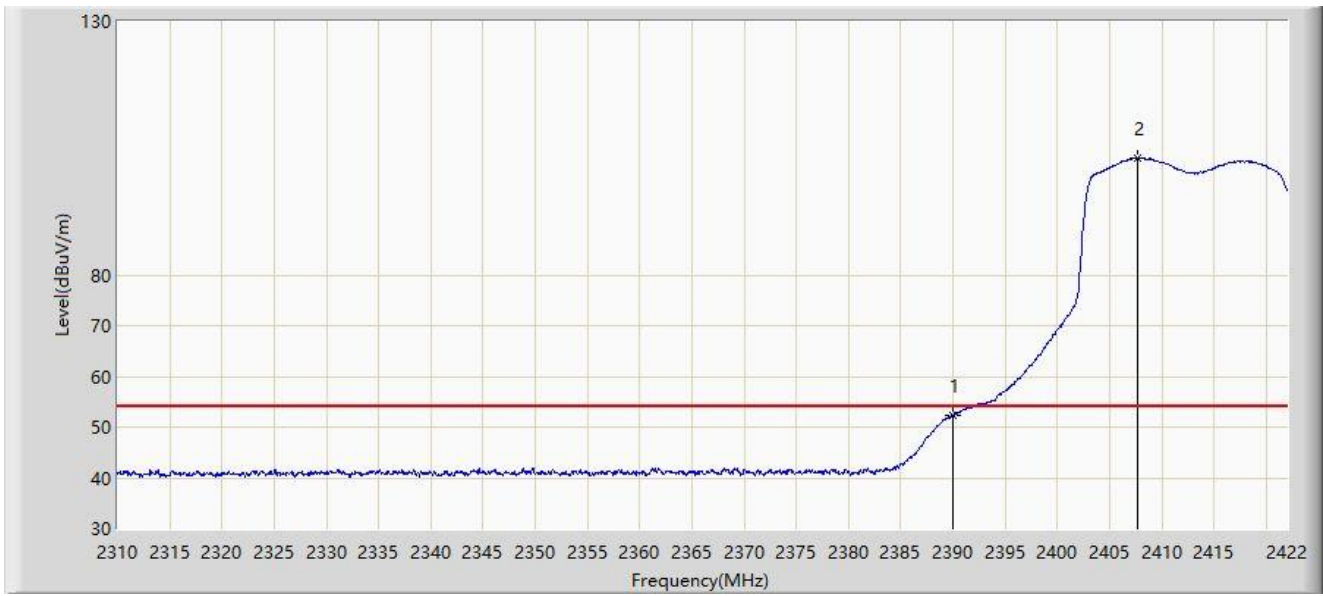


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	52.377	21.851	-1.623	54.000	30.526	AV
2		2407.664	103.060	72.502	N/A	N/A	30.559	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-18
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

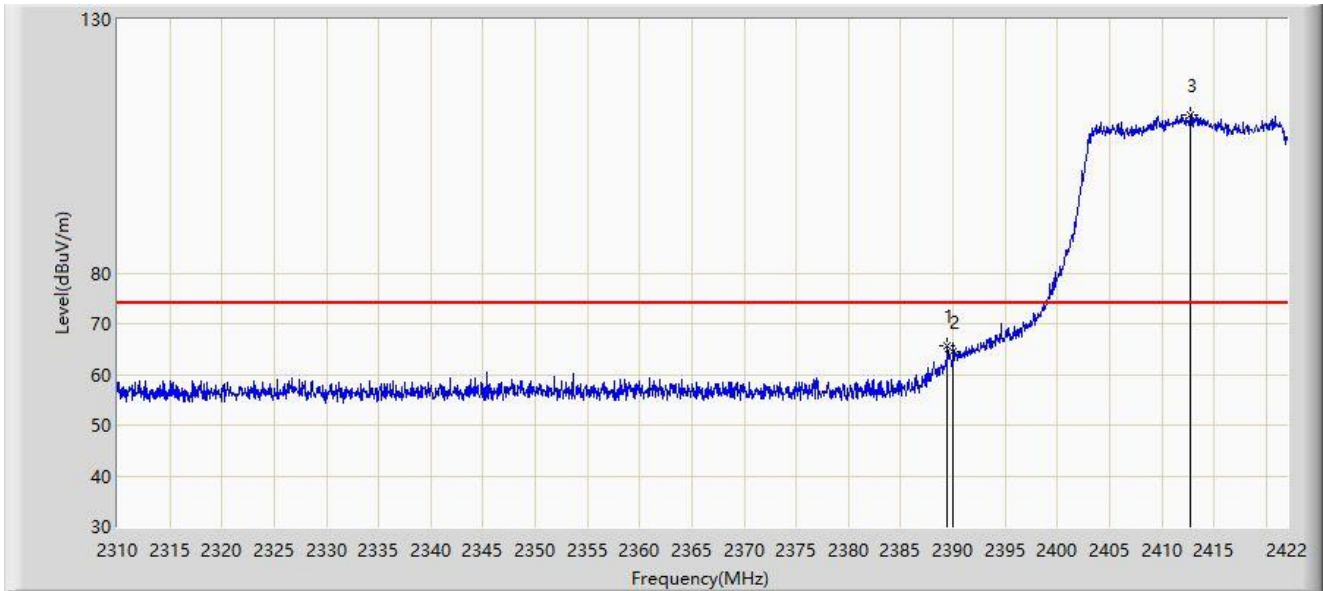


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.464	65.583	35.058	-8.417	74.000	30.525	PK
2		2390.000	64.402	33.876	-9.598	74.000	30.526	PK
3		2412.760	111.265	80.707	N/A	N/A	30.559	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-18
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

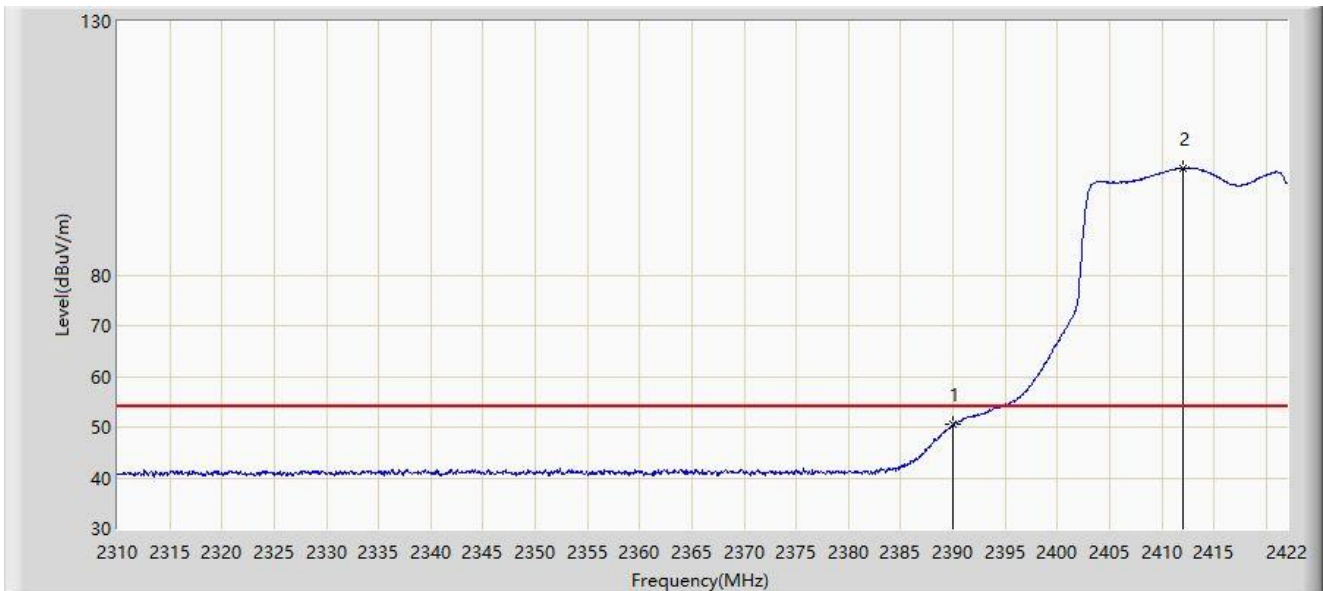


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	50.503	19.977	-3.497	54.000	30.526	AV
2		2412.032	101.080	70.522	N/A	N/A	30.558	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-18
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz	

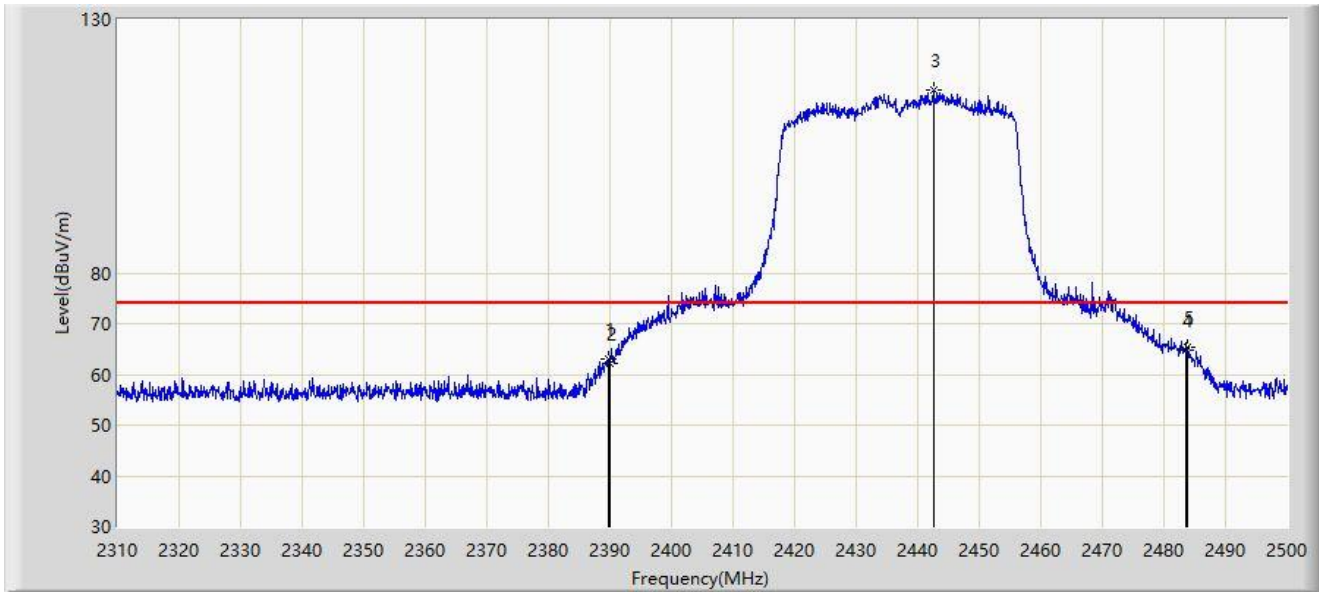


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2389.705	62.905	32.379	-11.095	74.000	30.525	PK
2		2390.000	62.288	31.762	-11.712	74.000	30.526	PK
3		2442.525	115.955	85.395	N/A	N/A	30.559	PK
4		2483.500	64.660	33.957	-9.340	74.000	30.704	PK
5	*	2483.755	65.265	34.561	-8.735	74.000	30.703	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-18
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz	

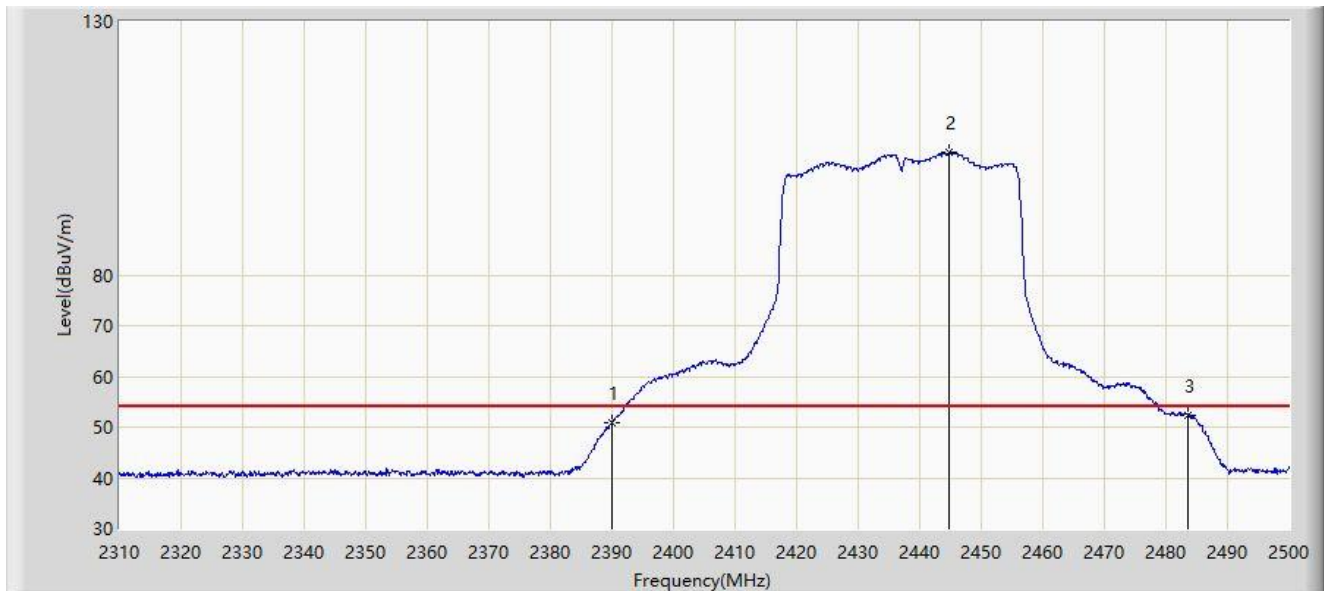


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2390.000	50.887	20.361	-3.113	54.000	30.526	AV
2		2444.710	104.156	73.589	N/A	N/A	30.566	AV
3	*	2483.500	52.326	21.623	-1.674	54.000	30.704	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-18
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz	

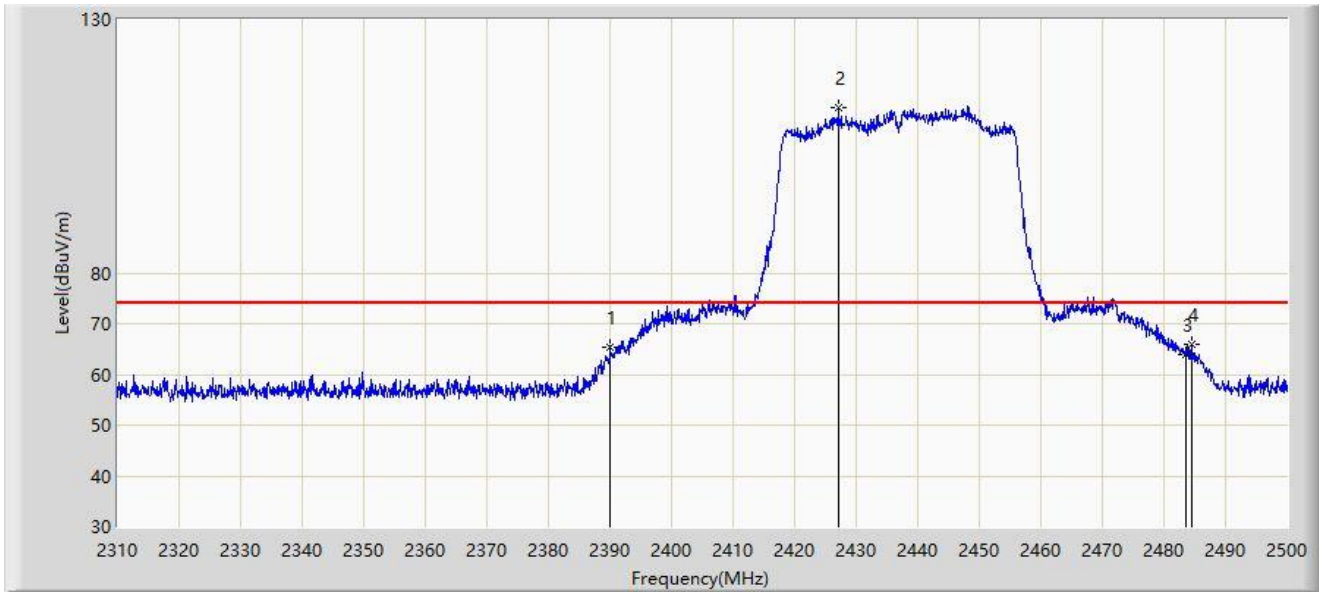


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2390.000	65.281	34.755	-8.719	74.000	30.526	PK
2		2427.135	112.597	82.047	N/A	N/A	30.550	PK
3		2483.500	63.952	33.249	-10.048	74.000	30.704	PK
4	*	2484.515	65.899	35.195	-8.101	74.000	30.704	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-18
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz	

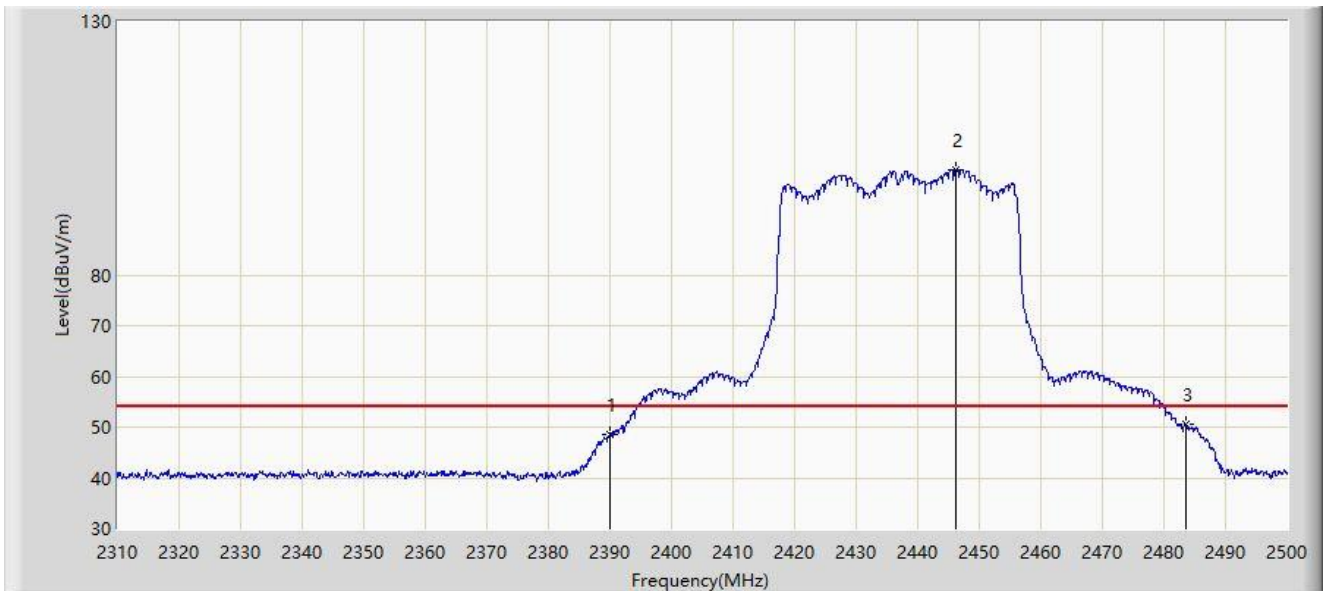


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2390.000	48.658	18.132	-5.342	54.000	30.526	AV
2		2446.135	100.782	70.210	N/A	N/A	30.572	AV
3	*	2483.500	50.569	19.866	-3.431	54.000	30.704	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-18
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

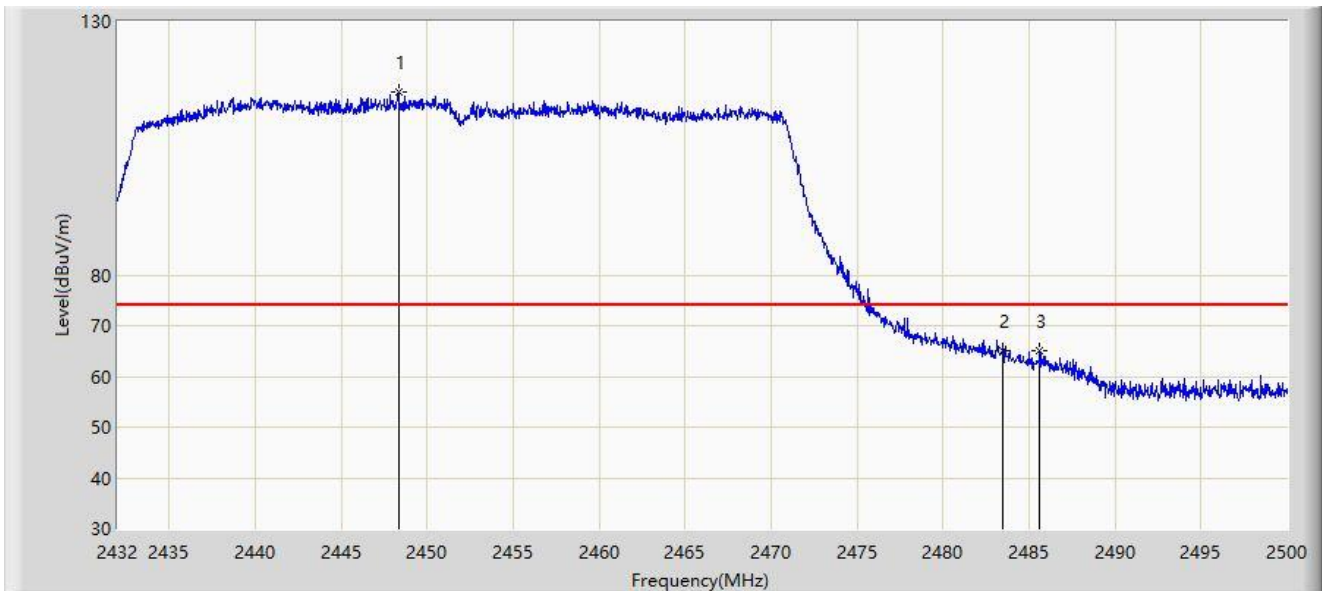


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2448.320	115.978	85.398	N/A	N/A	30.580	PK
2		2483.500	64.940	34.237	-9.060	74.000	30.704	PK
3	*	2485.618	65.125	34.420	-8.875	74.000	30.705	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-18
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

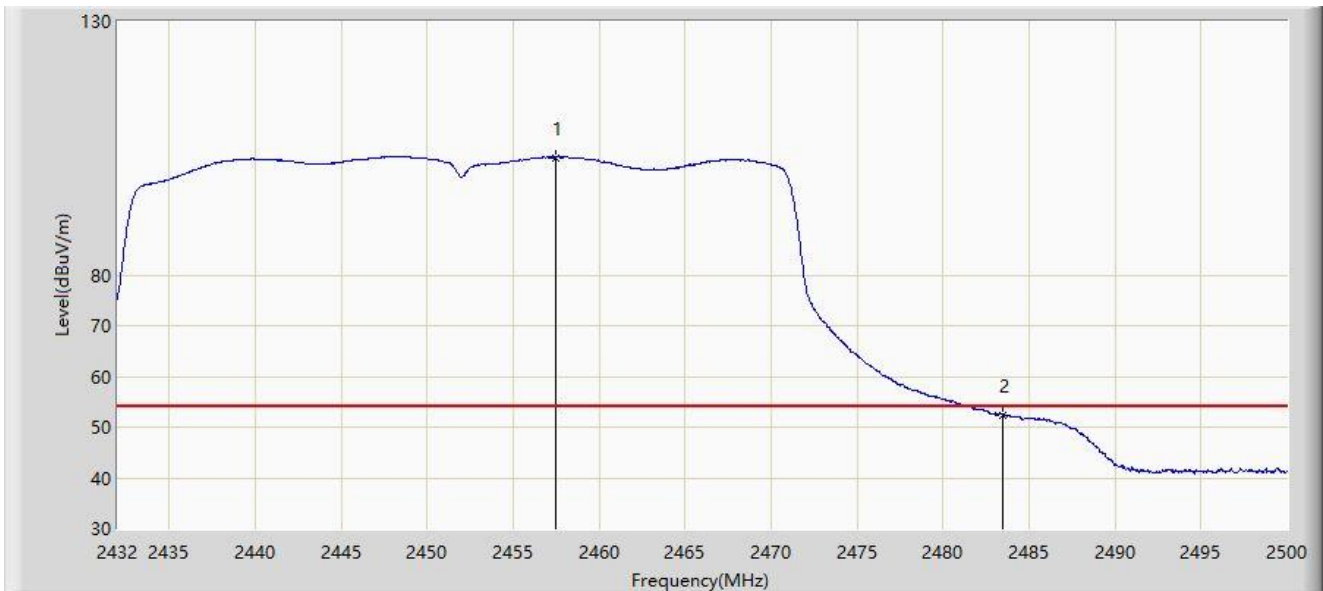


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2457.466	103.166	72.552	N/A	N/A	30.614	AV
2	*	2483.500	52.404	21.701	-1.596	54.000	30.704	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-18
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

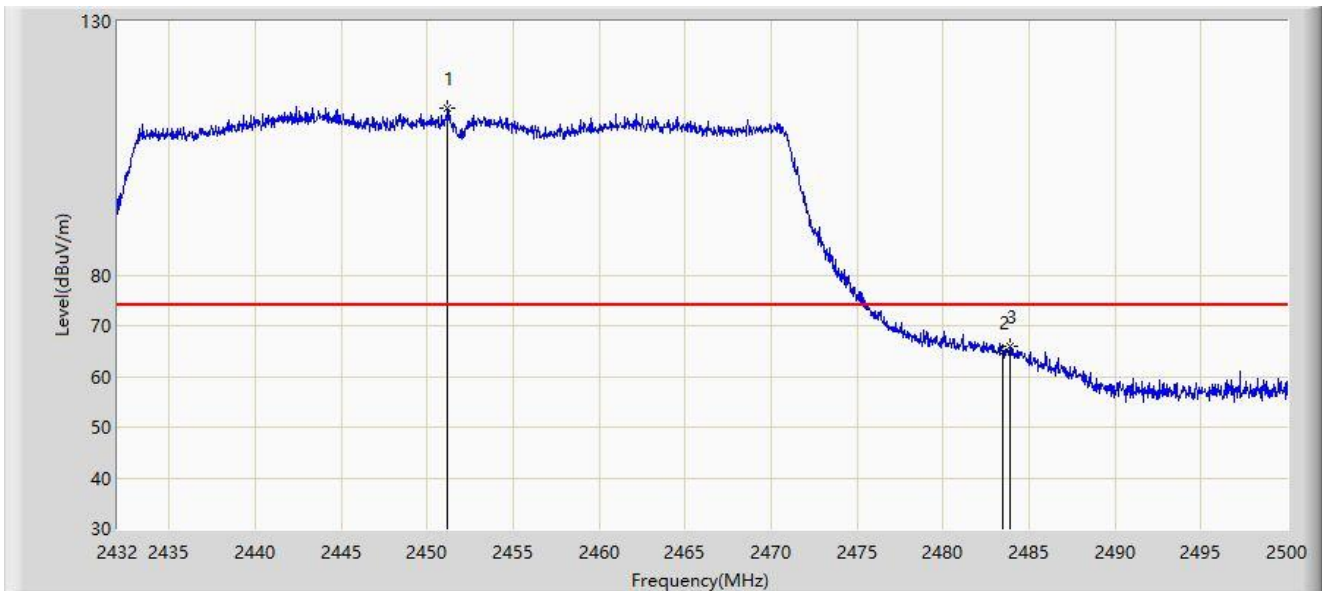


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2451.176	112.963	82.373	N/A	N/A	30.590	PK
2		2483.500	64.804	34.101	-9.196	74.000	30.704	PK
3	*	2483.884	65.867	35.163	-8.133	74.000	30.703	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-07-18
Limit: FCC Part 15.209_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

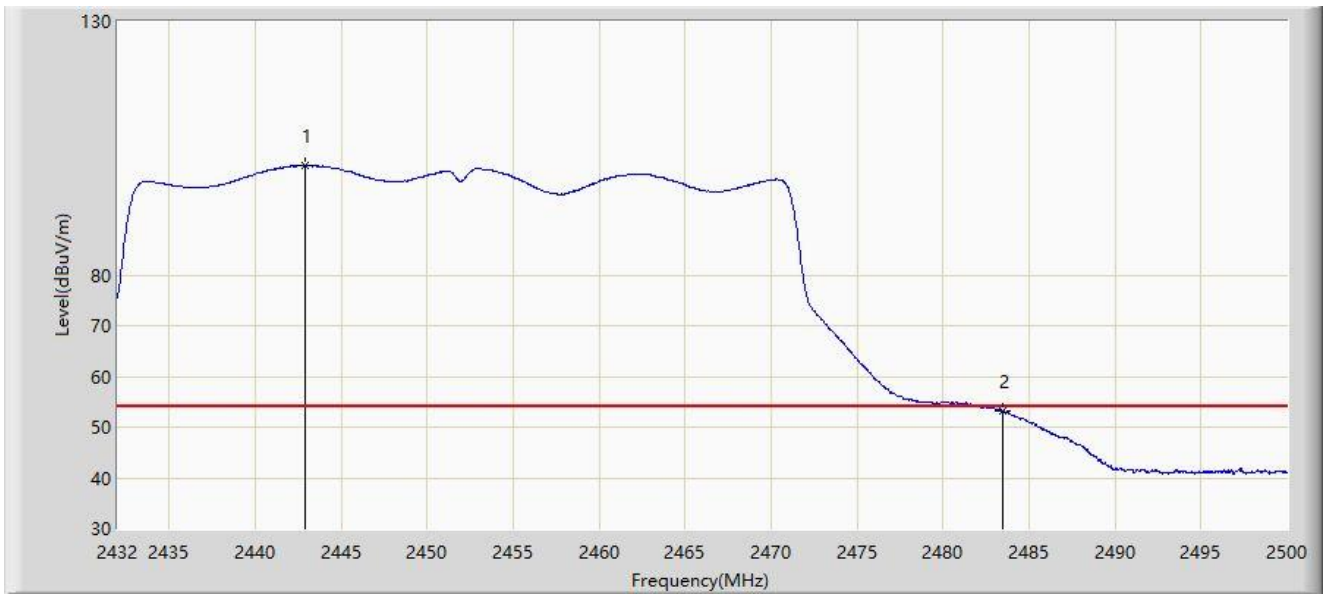

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2442.948	101.598	71.037	N/A	N/A	30.561	AV
2	*	2483.500	53.101	22.398	-0.899	54.000	30.704	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

A.8 AC Conducted Emissions Test Result

Site: WZ-SR2	Test Data: 2022-08-24
Limit: FCC_Part15.207_CE_AC Power	Engineer: Bob Zhang
Probe: ENV216_101683_Filter Off_E	Polarity: Line
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2437MHz	

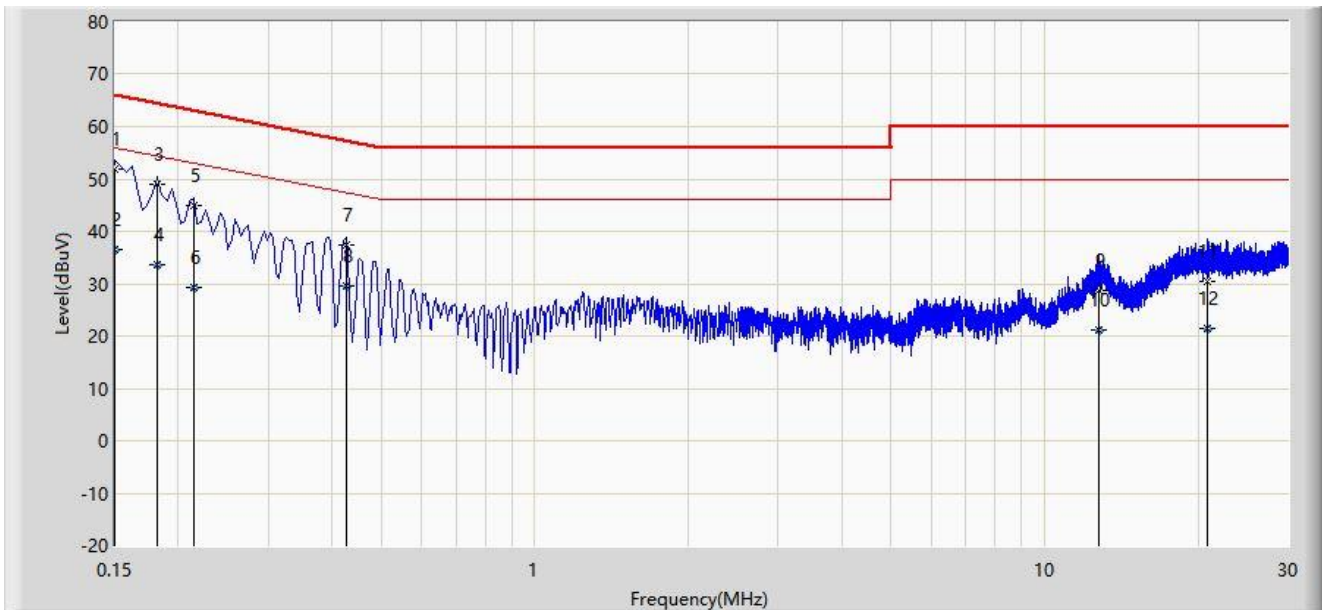


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1	*	0.150	51.984	42.106	-14.016	66.000	9.878	QP
2		0.150	36.482	26.605	-19.518	56.000	9.878	AV
3		0.182	49.007	39.127	-15.387	64.394	9.880	QP
4		0.182	33.552	23.672	-20.842	54.394	9.880	AV
5		0.214	45.001	35.118	-18.048	63.049	9.884	QP
6		0.214	29.404	19.521	-23.644	53.049	9.884	AV
7		0.426	37.448	27.515	-19.883	57.330	9.933	QP
8		0.426	29.652	19.720	-17.678	47.330	9.933	AV
9		12.770	28.627	17.581	-31.373	60.000	11.046	QP
10		12.770	21.089	10.043	-28.911	50.000	11.046	AV
11		20.782	30.515	18.912	-29.485	60.000	11.604	QP
12		20.782	21.535	9.932	-28.465	50.000	11.604	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: WZ-SR2	Test Data: 2022-08-24
Limit: FCC_Part15.207_CE_AC Power	Engineer: Bob Zhang
Probe: ENV216_101683_Filter Off_E	Polarity: Neutral
EUT: hAP ax ²	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2437MHz	

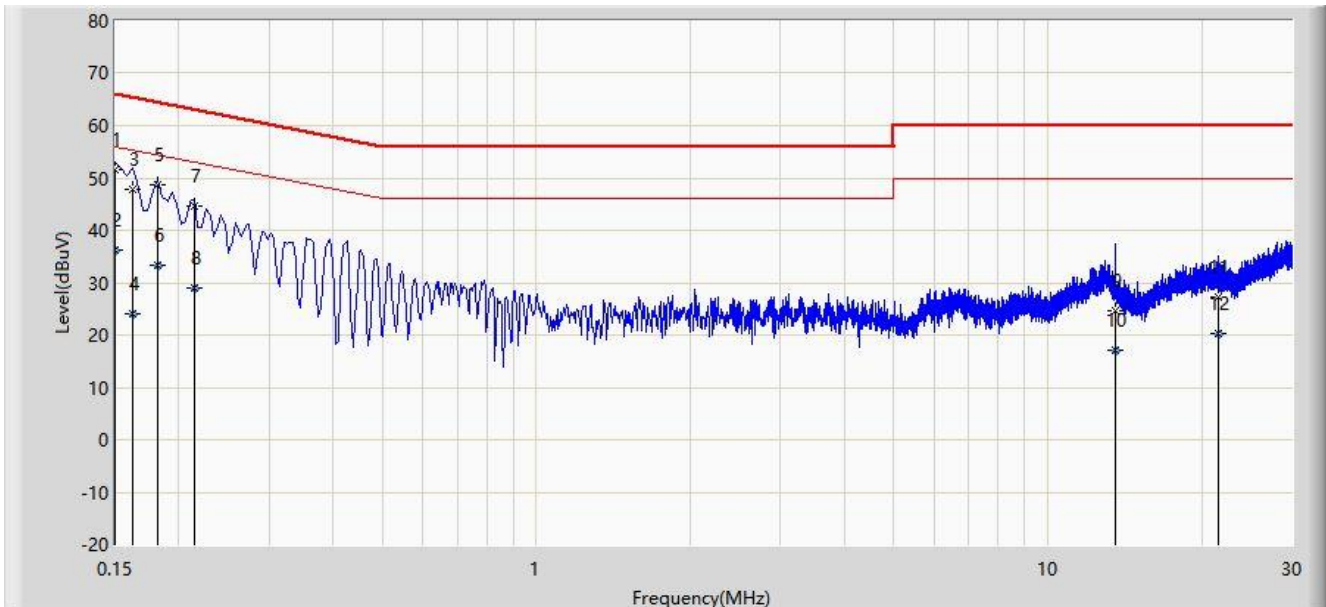

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1	*	0.150	51.648	41.748	-14.352	66.000	9.900	QP
2		0.150	36.237	26.336	-19.763	56.000	9.900	AV
3		0.162	47.743	37.840	-17.618	65.361	9.903	QP
4		0.162	24.159	14.256	-31.202	55.361	9.903	AV
5		0.182	48.637	38.730	-15.757	64.394	9.907	QP
6		0.182	33.265	23.358	-21.129	54.394	9.907	AV
7		0.214	44.510	34.598	-18.539	63.049	9.912	QP
8		0.214	28.991	19.078	-24.058	53.049	9.912	AV
9		13.566	24.542	13.443	-35.458	60.000	11.099	QP
10		13.566	17.107	6.008	-32.893	50.000	11.099	AV
11		21.594	27.238	15.577	-32.762	60.000	11.661	QP
12		21.594	20.180	8.520	-29.820	50.000	11.661	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Appendix B – Test Setup Photograph

Refer to “2206RSU048-UT” file.

Appendix C – EUT Photograph

Refer to “2206RSU048-UE” file.

The End