

Wireless test report – 368276-1TRFWL

Applicant:

Mikrotiks SIA

Product name:

WLAN 802.11a/n/ac and 802.11b/g/n router

Model:

RBLHGG-5HPacD2HPnD-XL-US

Model variant:

--

FCC ID:

TV7LHG5HPACD2HPD

IC Registration number:

7442A-LHG5ACD2HPD

Specifications:

◆ **FCC 47 CFR Part 15 Subpart C, §15.247**

Operation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz

◆ **RSS-247, Issue 2, Feb 2017, Section 5**

Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs)
and Licence-Exempt Local Area Network (LE-LAN) Devices

5) Standard specifications for frequency hopping systems and digital transmission systems operating in the
bands 902–928 MHz, 2400–2483.5 MHz and 5725–5850 MHz

Date of issue: **November 11, 2019**

Test engineer(s):

Daniele Guarnone, Wireless/EMC Specialist Signature:



Reviewed by:

Paolo Barbieri, Wireless/EMC Specialist Signature:



Test location(s)

Company name	Nemko Spa Via del Carroccio, 4 I 20853 Biassono (Italy)
Address	Via del Carroccio, 4
City	Biassono
Province	MB
Postal code	20853
Country	Italy
Telephone	+039 039 2201201
Facsimile	+39 039 220 1221
Toll free	--
Website	www.nemko.com
Site number	FCC Test Firm Registration Number: 682159 ISED#: 9109A

Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025.

Copyright notification

Nemko S.p.A authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

Table of contents

Table of contents	3
Section 1. Report summary	4
1.1 Applicant and manufacturer	4
1.2 Test specifications	4
1.3 Test methods.....	4
1.4 Statement of compliance	4
1.5 Exclusions.....	4
1.6 Test report revision history	4
Section 2. Summary of test results.....	5
2.1 FCC Part 15 Subpart C, general requirements test results.....	5
2.2 FCC Part 15 Subpart C, intentional radiators test results for frequency hopping spread spectrum systems.....	5
2.3 FCC Part 15 Subpart C, intentional radiators test results for digital transmission systems (DTS)	5
2.4 ISSED RSS-Gen, Issue 5, test results.....	6
2.5 ISSED RSS-247, Issue 2, test results for frequency hopping spread spectrum systems (FHSS)	6
2.6 ISSED RSS-247, Issue 2, test results for digital transmission systems (DTS).....	6
Section 3. Equipment under test (EUT) details	7
3.1 Sample information.....	7
3.2 EUT information	7
3.3 Technical information	7
3.4 Product description and theory of operation	8
3.5 EUT exercise details.....	8
3.6 EUT setup diagram	9
3.7 EUT sub assemblies	9
Section 4. Engineering considerations.....	10
4.1 Modifications incorporated in the EUT.....	10
4.2 Technical judgment	10
4.3 Deviations from laboratory tests procedures.....	10
Section 5. Test conditions	11
5.1 Atmospheric conditions	11
5.2 Power supply range.....	11
Section 6. Measurement uncertainty	12
6.1 Uncertainty of measurement	12
Section 7. Test equipment	13
7.1 Test equipment list.....	13
Section 8. Testing data	14
8.1 FCC 15.31(e) Variation of power source	14
8.2 FCC 15.31(m) and RSS-Gen 6.9 Number of frequencies	15
8.3 FCC 15.203 and RSS-Gen, section 6.8 Antenna requirement.....	16
8.4 FCC 15.207(a) and RSS-Gen 8.8 AC power line conducted emissions limits	17
8.5 FCC 15.247(a)(2) and RSS-247 5.2(a) Minimum 6 dB bandwidth for DTS systems	21
8.6 FCC 15.247(b) and RSS-247 5.4 (d) Transmitter output power and e.i.r.p. requirements for DTS in 2.4 GHz.....	29
8.7 FCC 15.247(d) and RSS-247 5.5 Spurious (out-of-band) unwanted emissions.....	43
Section 9. Block diagrams of test set-ups	99
9.1 Radiated emissions set-up for frequencies below 1 GHz.....	99
9.2 Radiated emissions set-up for frequencies above 1 GHz.....	100
9.3 Antenna port conducted measurements set-up	100
9.4 Conducted emissions on AC line set-up.....	101

Section 1. Report summary

1.1 Applicant and manufacturer

Company name	Mikrotiks SIA
Address	Brivibas gatve 214i LV-1039 Riga Latvia

1.2 Test specifications

FCC 47 CFR Part 15, Subpart C, Clause 15.247	Operation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz
RSS-247, Issue 2, Feb 2017, Section 5	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

1.3 Test methods

558074 D01 DTS Meas Guidance v04 (April 5, 2017)	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247
ANSI C63.10 v2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
RSS-Gen, Issue 5, April 2018	General Requirements for Compliance of Radio Apparatus

1.4 Statement of compliance

In the configuration tested, the EUT was found compliant.

Testing was performed against all relevant requirements of the test standard except as noted in section 1.5 below. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See “Summary of test results” for full details.

1.5 Exclusions

None

1.6 Test report revision history

Revision #	Date of issue	Details of changes made to test report
TRF	September 14, 2018	Original report issued

Section 2. Summary of test results

2.1 FCC Part 15 Subpart C, general requirements test results

Table 2.1-1: FCC general requirements results

Part	Test description	Verdict
§15.207(a)	Conducted limits	Pass
§15.31(e)	Variation of power source	Pass
§15.31(m)	Number of tested frequencies	Pass
§15.203	Antenna requirement	Pass

Notes: EUT is an AC powered device.

2.2 FCC Part 15 Subpart C, intentional radiators test results for frequency hopping spread spectrum systems

Table 2.2-1: FCC 15.247 results for FHSS

Part	Test description	Verdict
§15.247(a)(1)(i)	Requirements for operation in the 902–928 MHz band	Not applicable
§15.247(a)(1)(ii)	Requirements for operation in the 5725–5850 MHz band	Not applicable
§15.247(a)(1)(iii)	Requirements for operation in the 2400–2483.5 MHz band	Not applicable
§15.247(b)(1)	Maximum peak output power in the 2400–2483.5 MHz band and 5725–5850 MHz band	Not applicable
§15.247(b)(2)	Maximum peak output power in the 902–928 MHz band	Not applicable
§15.247(c)(1)	Fixed point-to-point operation with directional antenna gains greater than 6 dBi	Not applicable
§15.247(c)(2)	Transmitters operating in the 2400–2483.5 MHz band that emit multiple directional beams	Not applicable
§15.247(d)	Spurious emissions	Not applicable
§15.247(f)	Time of occupancy for hybrid systems	Not applicable

2.3 FCC Part 15 Subpart C, intentional radiators test results for digital transmission systems (DTS)

Table 2.3-1: FCC 15.247 results for DTS

Part	Test description	Verdict
§15.247(a)(2)	Minimum 6 dB bandwidth	Pass
§15.247(b)(3)	Maximum peak output power in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands	Pass
§15.247(c)(1)	Fixed point-to-point operation with directional antenna gains greater than 6 dBi	Not applicable
§15.247(c)(2)	Transmitters operating in the 2400–2483.5 MHz band that emit multiple directional beams	Not applicable
§15.247(d)	Spurious emissions	Pass
§15.247(e)	Power spectral density	Pass
§15.247(f)	Time of occupancy for hybrid systems	Not applicable

2.4 ISED RSS-Gen, Issue 5, test results

Table 2.4-1: RSS-Gen results

Part	Test description	Verdict
7.3	Receiver radiated emission limits	Not applicable
7.4	Receiver conducted emission limits	Not applicable
6.9	Operating bands and selection of test frequencies	Pass
8.8	AC power-line conducted emissions limits	Pass

Notes: ¹ According to sections 5.2 and 5.3 of RSS-Gen, Issue 5 the EUT does not have a stand-alone receiver neither scanner receiver, therefore exempt from receiver requirements.

EUT is an AC powered device.

2.5 ISED RSS-247, Issue 2, test results for frequency hopping spread spectrum systems (FHSS)

Table 2.5-1: RSS-247 results for FHSS

Part	Test description	Verdict
5.1 (a)	Bandwidth of a frequency hopping channel	Not applicable
5.1 (b)	Minimum channel spacing	Not applicable
5.1 (c)	Systems operating in the 902–928 MHz band	Not applicable
5.1 (d)	Systems operating in the 2400–2483.5 MHz band	Not applicable
5.1 (e)	Systems operating in the 5725–5850 MHz band	Not applicable
5.3	Hybrid Systems	Not applicable
5.3 (a)	Digital modulation turned off	Not applicable
5.3 (b)	Frequency hopping turned off	Not applicable
5.4	Transmitter output power and e.i.r.p. requirements	Not applicable
5.4 (a)	Systems operating in the 902–928 MHz band	Not applicable
5.4 (b)	Systems operating in the 2400–2483.5 MHz band	Not applicable
5.4 (c)	Systems operating in the 5725–5850 MHz	Not applicable
5.4 (e)	Point-to-point systems in 2400–2483.5 MHz and 5725–5850 MHz band	Not applicable
5.4 (f)	Transmitters which operate in the 2400–2483.5 MHz band with multiple directional beams	Not applicable
5.5	Unwanted emissions	Not applicable

Notes: None

2.6 ISED RSS-247, Issue 2, test results for digital transmission systems (DTS)

Table 2.6-1: RSS-247 results for DTS

Part	Test description	Verdict
5.2 (a)	Minimum 6 dB bandwidth	Pass
5.2 (b)	Maximum power spectral density	Pass
5.3	Hybrid Systems	
5.3 (a)	Digital modulation turned off	Not applicable
5.3 (b)	Frequency hopping turned off	Not applicable
5.4	Transmitter output power and e.i.r.p. requirements	
5.4 (d)	Systems employing digital modulation techniques	Pass
5.4 (e)	Point-to-point systems in 2400–2483.5 MHz and 5725–5850 MHz band	Not applicable
5.4 (f)	Transmitters which operate in the 2400–2483.5 MHz band with multiple directional beams	Not applicable
5.5	Unwanted emissions	Pass

Notes: None

Section 3. Equipment under test (EUT) details

3.1 Sample information

Receipt date	February 21, 2019
Nemko sample ID number	Item 1 of 2

3.2 EUT information

Product name	WLAN 802.11a/n/ac and 802.11b/g/n router
Model	RBLHGG-5HPacD2HPnD-XL-US
Model variant	--
Serial number	--

3.3 Technical information

Applicant IC company number	7442A
IC UPN number	LHG5ACD2HPD
All used IC test site(s) Reg. number	9109A
RSS number and Issue number	RSS-247 Issue 2, Feb 2017
Frequency band	2400 to 2483.5 MHz
Frequency Min (MHz)	2412
Frequency Max (MHz)	2462
Field strength, Units @ distance	N/A
Measured BW (kHz) (6 dB)	9020 (802.11b), 16320 (802.11g), 16300 (802.11n HT20), 35640 (802.11 HT40)
Calculated BW (kHz), as per TRC-43	N/A
Type of modulation	802.11b/g/n
Emission classification (F1D, G1D, D1D)	W7D
Transmitter spurious, Units @ distance	31.2 dBμV/m at 96.96MHz, @ 3 m
Power requirements	24 V _{DC} , via 120 V _{AC} adapter or battery
Antenna information	The EUT uses a unique antenna coupling. EUT has 2 antenna configurations. The max antenna peak gain is 18 dBi at 2.4 GHz band and 27 dBi at 5 GHz WIFI bands.

3.4 Product description and theory of operation

The LHG is an outdoor wireless router with with an integrated dual polarization grid antenna

3.5 EUT exercise details

EUT was set to continuously transmit mode during tests, by test software provided by client.

These tools/scripts configure the radio modules to enable continuous transmission with the ability to adjust modulation, frequency and output power as required.

3.6 EUT setup diagram

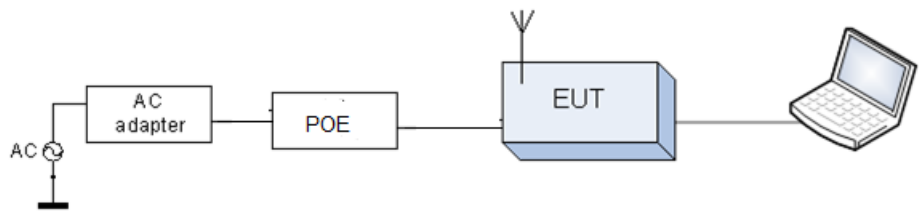


Figure 3.6-1: Setup diagram

3.7 EUT sub assemblies

Table 3.7-1: EUT sub assemblies

Description	Brand name	Model/Part number	Serial number
Power supply	Fullpower	SAW 30-240-1200G R2A	
Gigabit POE	Mikrotik	--	--

Section 4. Engineering considerations

4.1 Modifications incorporated in the EUT

There were no modifications performed to the EUT during this assessment.

4.2 Technical judgment

4.3 Deviations from laboratory tests procedures

No deviations were made from laboratory procedures.

Section 5. Test conditions

5.1 Atmospheric conditions

Temperature	18÷33 °C
Relative humidity	30÷60 %
Air pressure	980÷1060 hPa

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

5.2 Power supply range

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed.

Section 6. Measurement uncertainty

6.1 Uncertainty of measurement

UKAS Lab 34 and TIA-603-B have been used as guidance for measurement uncertainty reasonable estimations with regards to previous experience and validation of data. Nemko Canada, Inc. follows these test methods in order to satisfy ISO/IEC 17025 requirements for estimation of uncertainty of measurement for wireless products.

Measurement uncertainty budgets for the tests are detailed below. Measurement uncertainty calculations assume a coverage factor of $K = 2$ with 95% certainty.

Table 6.1-1: Measurement uncertainty

EUT	Type	Test	Range and Setup features	Measurement Uncertainty	Notes
Transmitter	Conducted	Frequency error	0.001 MHz ÷ 40 GHz	0.08 ppm	(1)
		Carrier power RF Output Power	10 kHz ÷ 30 MHz	1.0 dB	(1)
			30 MHz ÷ 18 GHz	1.5 dB	(1)
			18 MHz ÷ 40 GHz	3.0 dB	(1)
		Adjacent channel power	1 MHz ÷ 18 GHz	1.6 dB	(1)
		Conducted spurious emissions	10 kHz ÷ 26 GHz	3.0 dB	(1)
			26 GHz ÷ 40 GHz	4.5 dB	(1)
		Intermodulation attenuation	1 MHz ÷ 18 GHz	2.2 dB	(1)
		Attack time – frequency behaviour	1 MHz ÷ 18 GHz	2.0 ms	(1)
		Attack time – power behaviour	1 MHz ÷ 18 GHz	2.5 ms	(1)
		Release time – frequency behaviour	1 MHz ÷ 18 GHz	2.0 ms	(1)
		Release time – power behaviour	1 MHz ÷ 18 GHz	2.5 ms	(1)
		Transient behaviour of the transmitter– Transient frequency behaviour	1 MHz ÷ 18 GHz	0.2 kHz	(1)
		Transient behaviour of the transmitter – Power level slope	1 MHz ÷ 18 GHz	9%	(1)
		Frequency deviation - Maximum permissible frequency deviation	0.001 MHz ÷ 18 GHz	1.3%	(1)
		Frequency deviation - Response of the transmitter to modulation frequencies above 3 kHz	0.001 MHz ÷ 18 GHz	0.5 dB	(1)
		Dwell time	-	3%	(1)
		Hopping Frequency Separation	0.01 MHz ÷ 18 GHz	1%	(1)
		Occupied Channel Bandwidth	0.01 MHz ÷ 18 GHz	2%	(1)
		Modulation Bandwidth	0.01 MHz ÷ 18 GHz	2%	(1)
Receiver	Radiated	Radiated spurious emissions	10 kHz ÷ 26.5 GHz	6.0 dB	(1)
			26.5 GHz ÷ 40 GHz	8.0 dB	(1)
		Effective radiated power transmitter	10 kHz ÷ 26.5 GHz	6.0 dB	(1)
			26.5 GHz ÷ 40 GHz	8.0 dB	(1)
	Radiated	Radiated spurious emissions	10 kHz ÷ 26.5 GHz	6.0 dB	(1)
		Sensitivity measurement	1 MHz ÷ 18 GHz	6.0 dB	(1)
	Conducted	Conducted spurious emissions	10 kHz ÷ 26 GHz	3.0 dB	(1)
			26 GHz ÷ 40 GHz	4.5 dB	(1)

(1) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k = 2$ which has been derived from the assumed normal probability distribution with infinite degrees of freedom and for a coverage probability of 95 %

Section 7. Test equipment

7.1 Test equipment list

Table 7.1-1: Equipment list

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
EMI receiver 2 Hz ÷ 44 GHz	R&S	ESW44	101620	2018/05	2020/08
Broadband preamplifier	Schwarzbeck	BBV 9718	9718-137	2018/08	2019/08
Trilog Broadband Antenna	Schwarzbeck	VULB 9162	9162-025	2018/07	2021/07
Semi-anechoic chamber	Nemko	10m semi-anechoic chamber	530	2018/09	2021/09
Antenna mast	R&S	HCM	836 529/05	NCR	NCR
Controller	R&S	HCC	836 620/7	NCR	NCR
EMI receiver 9 kHz ÷ 3 GHz	R&S	ESCI	100888	2018/09	2020/10
LISN 9 kHz ÷ 30 MHz	R&S	ESH2-Z5	872 460/041	2018/09	2020/09
Climatic Chamber	ESPEC	ARS 1100	4100000067	2018/11	2019/11
EMI receiver 20 Hz ÷ 8 GHz	R&S	ESU8	100202	2019/01	2020/01
Bilog antenna 1 ÷ 18 GHz	Schwarzbeck	STLP 9148-123	123	2018/09	2021/09
Double Ridged Waveguide Horn	RF SPIN	DRH40	061106a40	2017/02	2020/02
Wide band Amplifier 18 GHz ÷ 40 GHz	MITEQ	AMF-5F-18004000-37-8P	128061	2018/09	2020/09
High pass filter	Wainwright Instruments	WHNX6-2555-3500-26500-60CC	01	2018/10	2020/10

Note: NCR - no calibration required, VOU - verify on use

Section 8. Testing data

8.1 FCC 15.31(e) Variation of power source

8.1.1 Definitions and limits

For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

8.1.2 Test date

Start date April 04 2019

8.1.3 Observations, settings and special notes

None

8.1.4 Test data

EUT Power requirements:

	☒ AC	☐ DC	☐ Battery
If EUT is an AC or a DC powered, was the noticeable output power variation observed?	☐ YES	☐ NO	☒ N/A
If EUT is battery operated, was the testing performed using fresh batteries?	☐ YES	☐ NO	☒ N/A
If EUT is rechargeable battery operated, was the testing performed using fully charged batteries?	☐ YES	☐ NO	☒ N/A

8.2 FCC 15.31(m) and RSS-Gen 6.9 Number of frequencies

8.2.1 Definitions and limits

FCC:
Measurements on intentional radiators or receivers shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table.

ISED:
Except where otherwise specified, measurements shall be performed for each frequency band of operation for which the radio apparatus is to be certified, with the device operating at the frequencies in each band of operation shown in table below. The frequencies selected for measurements shall be reported in the test report.

Table 8.2-1: Frequency Range of Operation

Frequency range over which the device operates (in each band)	Number of test frequencies required	Location of measurement frequency inside the operating frequency range
1 MHz or less	1	Center (middle of the band)
1–10 MHz	2	1 near high end, 1 near low end
Greater than 10 MHz	3	1 near high end, 1 near center and 1 near low end

Note: "near" means as close as possible to or at the centre / low end / high end of the frequency range over which the device operates.

8.2.2 Test date

Start date April 04 2019

8.2.3 Observations, settings and special notes

None

8.2.4 Test data

Table 8.2-2: Test channels selection

Modulation	Start of Frequency range, MHz	End of Frequency range, MHz	Frequency range bandwidth, MHz	Low channel, MHz	Mid channel, MHz	High channel, MHz
802.11b/g/n HT20	2400	2483.5	83.5	2412	2437	2462
802.11n HT40	2400	2483.5	83.5	2422	2437	2452

8.3 FCC 15.203 and RSS-Gen, section 6.8 Antenna requirement

8.3.1 Definitions and limits

FCC:
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

ISED:
The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report.

8.3.2 Test date

Start date	April 05, 2019
------------	----------------

8.3.3 Observations, settings and special notes

None

8.3.4 Test data

Must the EUT be professionally installed?	☐ YES	☒ NO
Does the EUT have detachable antenna(s)?	☐ YES	☒ NO
If detachable, is the antenna connector(s) non-standard?	☐ YES	☐ NO ☐ N/A

8.4 FCC 15.207(a) and RSS-Gen 8.8 AC power line conducted emissions limits

8.4.1 Definitions and limits

FCC:

Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

IC:

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz, shall not exceed the limits in table below.

Unless the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in table below. The more stringent limit applies at the frequency range boundaries.

Table 8.4-1: Conducted emissions limit

Frequency of emission, MHz	Conducted limit, dB μ V	
	Quasi-peak	Average**
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

Note: * - The level decreases linearly with the logarithm of the frequency.

** - A linear average detector is required.

8.4.2 Test date

Start date April 04 2019

8.4.3 Observations, settings and special notes

The EUT was set up as tabletop configuration.

The spectral scan has been corrected with transducer factors (i.e. cable loss, LISN factors, and attenuators) for determination of compliance.

A preview measurement was generated with the receiver in continuous scan mode. Emissions detected within 6 dB or above limit were re-measured with the appropriate detector against the correlating limit and recorded as the final measurement.


Receiver settings for preview measurements:

Resolution bandwidth	9 kHz
Video bandwidth	30 kHz
Detector mode	Peak and Average
Trace mode	Max Hold
Measurement time	100 ms

Receiver settings for final measurements:

Resolution bandwidth	9 kHz
Video bandwidth	30 kHz
Detector mode	Quasi-Peak and Average
Trace mode	Max Hold
Measurement time	100 ms

8.4.4 Test data

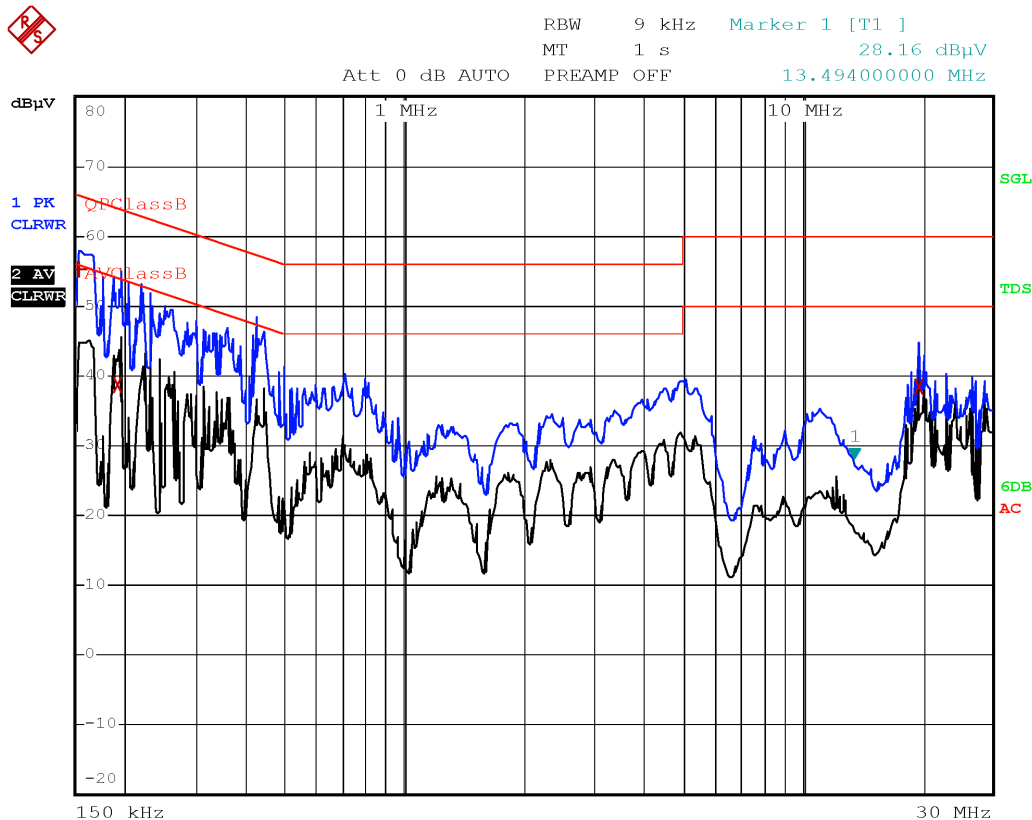

Date: 4.APR.2019 20:15:04

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
0.1540	55.3	65.8	-10.5	QP
0.1940	38.7	53.9	-15.2	Av
19.7100	38.6	50.0	-11.4	Av

Plot 8.4-1: Conducted emissions on phase line


Notes:

- ¹ Result (dBμV) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)
² Correction factor (dB) = LISN factor IL (dB) + cable loss (dB) + attenuator (dB)
³ Emissions that were continuously present for a minimum of 1 second and occurred more than once for every 15 seconds observation period were considered valid emissions. The maximum value of valid emissions have been recorded.

Sample calculation: 37.1 dBμV (result) = 26.6 dBμV (receiver reading) + 9.5 dB (Correction factor)

Section 8
Test name
Specification

Testing data
FCC 15.407(b)(6) and RSS-Gen 8.8 AC power line conducted emissions limits
FCC Part 15 Subpart E and RSS-Gen, Issue 4

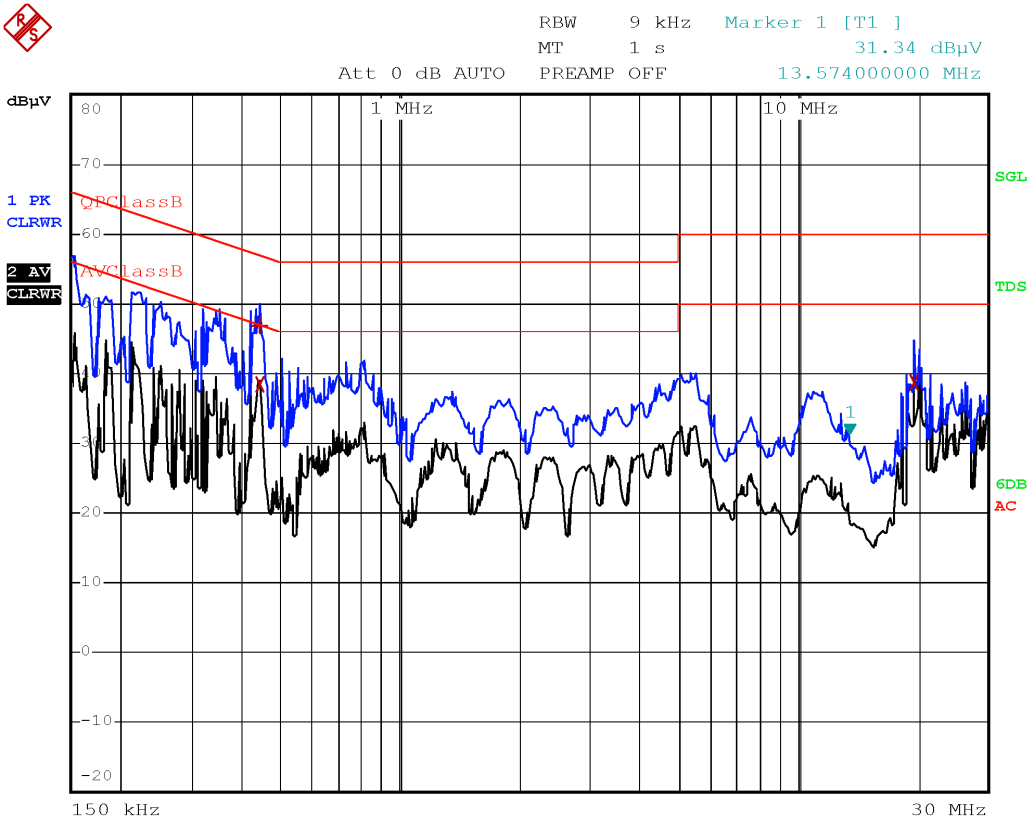

Date: 4.APR.2019 20:17:19

Plot 8.4-2: Conducted emissions on neutral line

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
0.1540	55.3	65.8	-10.5	QP
0.1940	38.7	53.9	-15.2	Av
19.7100	38.6	50.0	-11.4	Av

Table 8.4-2: Quasi-Peak conducted emissions results on neutral line

Notes:	¹ Result (dBμV) = receiver/spectrum analyzer value (dBμV) + correction factor (dB) ² Correction factor (dB) = LISN factor IL (dB) + cable loss (dB) + attenuator (dB) ³ Emissions that were continuously present for a minimum of 1 second and occurred more than once for every 15 seconds observation period were considered valid emissions. The maximum value of valid emissions have been recorded. Sample calculation: 37.1 dBμV (result) = 26.6 dBμV (receiver reading) + 9.5 dB (Correction factor)
--------	---

8.5 FCC 15.247(a)(2) and RSS-247 5.2(a) Minimum 6 dB bandwidth for DTS systems

8.5.1 Definitions and limits

FCC:
Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

ISED:
The minimum 6 dB bandwidth shall be 500 kHz.

8.5.1 Test date

Start date July 23, 2019

8.5.2 Observations, settings and special notes

Spectrum analyser settings:

Resolution bandwidth	100 kHz
Video bandwidth	≥3 × RBW
Frequency span	30 MHz for 20 MHz channel; 80 MHz for 40 MHz channel
Detector mode	Peak
Trace mode	Max Hold

Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

8.5.3 Test data

Table 8.5-1: 6 dB bandwidth results


Modulation	Frequency, MHz	6 dB bandwidth, MHz	Limit, MHz	Margin, MHz
802.11b	2412	8.51	0.5	8.01
	2437	8.48	0.5	7.98
	2462	9.02	0.5	8.52
802.11g	2412	16.30	0.5	15.80
	2437	16.27	0.5	15.77
	2462	16.30	0.5	15.80
802.11n HT20	2412	16.27	0.5	15.77
	2437	16.27	0.5	15.77
	2462	16.30	0.5	15.80
802.11n HT40	2422	34.97	0.5	34.47
	2442	35.64	0.5	35.14
	2452	35.4	0.5	34.9

Table 8.5-2: 99% occupied bandwidth results

Modulation	Frequency, MHz	99% occupied bandwidth, MHz
802.11b	2412	11.36
	2437	11.33
	2462	12.95
802.11g	2412	16.18
	2437	16.24
	2462	16.27
802.11n HT20	2412	16.15
	2437	16.24
	2462	16.27
802.11n HT40	2422	36.04
	2437	36.20
	2452	36.04


Note: there is no 99% occupied bandwidth limit in the standard's requirements, the measurement results provided for information purposes only.

Test name	FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification	FCC Part 15 Subpart E and RSS-Gen Issue 4

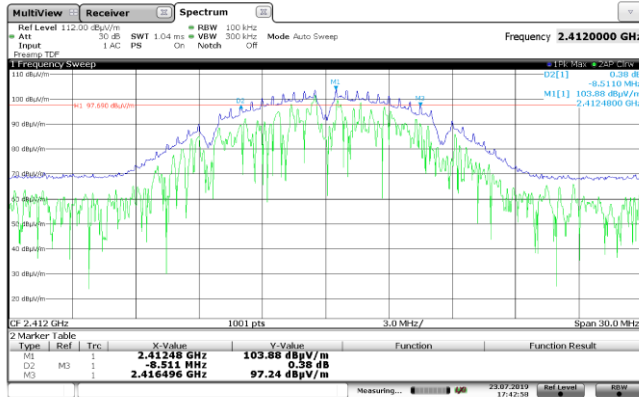


17:42:59 23.07.2019

Figure 8.5-1: 6 dB bandwidth on 802.11b, sample plot

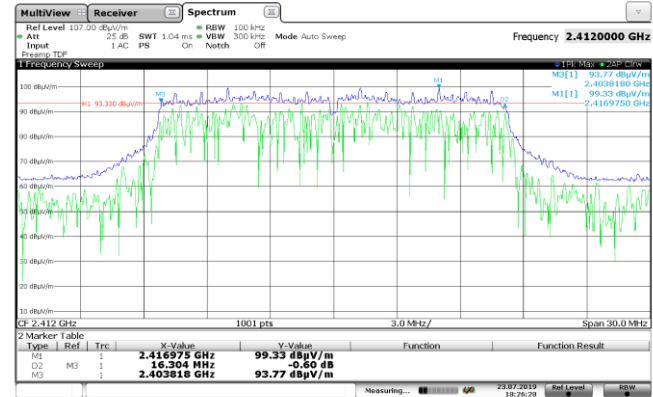


18:26:29 23.07.2019

Figure 8.5-2: 6 dB bandwidth on 802.11g, sample plot

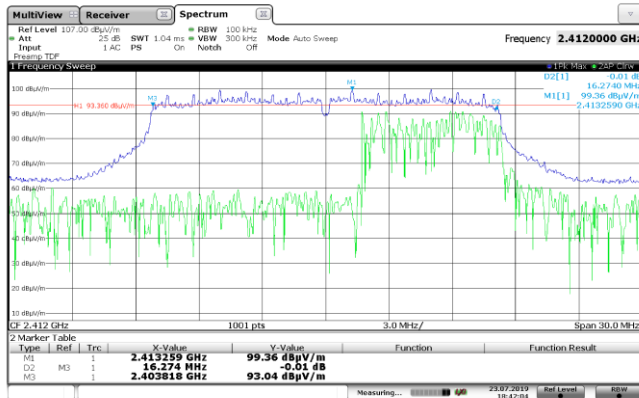

18:42:04 23.07.2019

Figure 8.5-3: 6 dB bandwidth on 802.11n HT20, sample plot

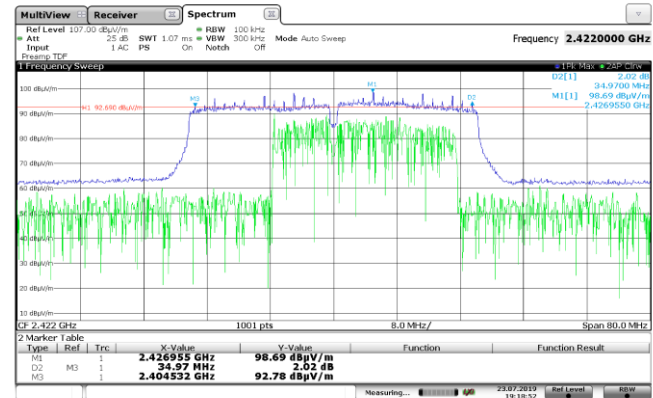


19:18:53 23.07.2019

Figure 8.5-4: 6 dB bandwidth on 802.11n HT40, sample plot




Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

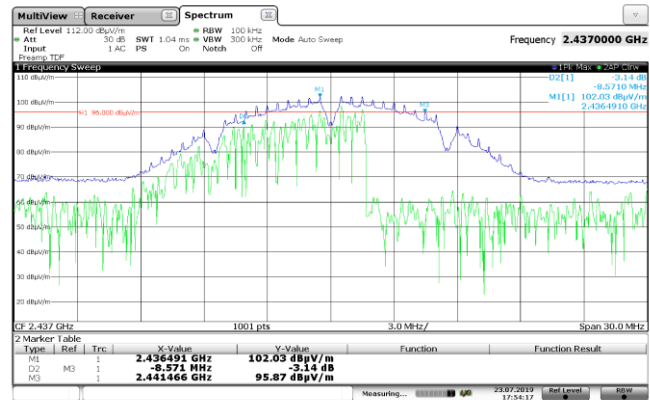


17:54:18 23.07.2019

Figure 8.5-5: 6 dB bandwidth on 802.11b, sample plot

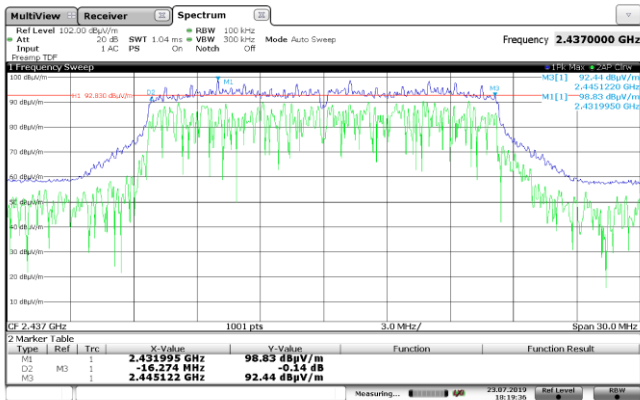


18:19:36 23.07.2019

Figure 8.5-6: 6 dB bandwidth on 802.11g, sample plot

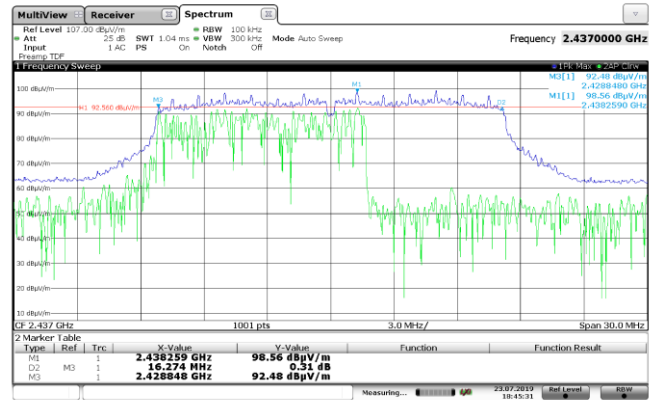

18:45:31 23.07.2019

Figure 8.5-7: 6 dB bandwidth on 802.11n HT20, sample plot

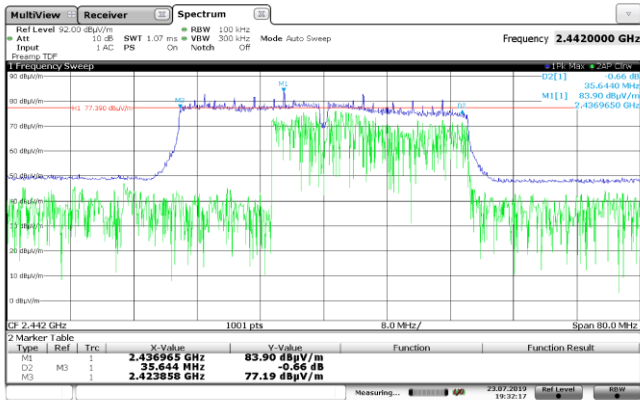


19:32:17 23.07.2019

Figure 8.5-8: 6 dB bandwidth on 802.11n HT40, sample plot



Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

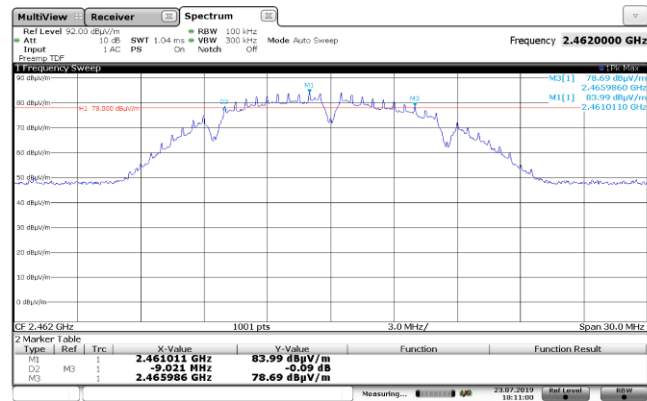


18:11:00 23.07.2019

Figure 8.5-9: 6 dB bandwidth on 802.11b, sample plot




18:22:50 23.07.2019

Figure 8.5-10: 6 dB bandwidth on 802.11g, sample plot

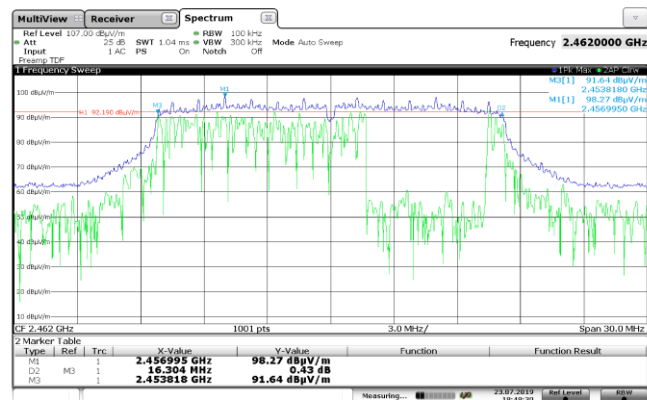

18:46:30 23.07.2019

Figure 8.5-11: 6 dB bandwidth on 802.11n HT20, sample plot

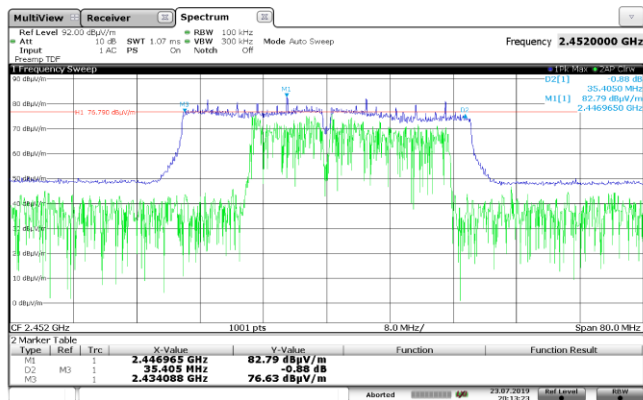

20:13:24 23.07.2019

Figure 8.5-12: 6 dB bandwidth on 802.11n HT40, sample plot



Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

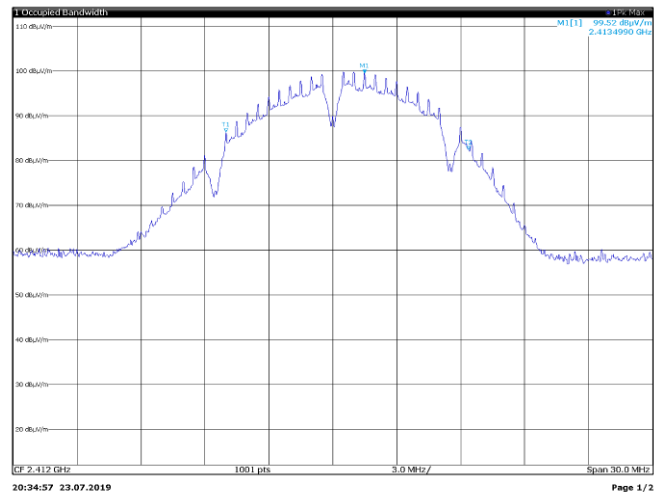


Figure 8.5-13: 99% bandwidth on 802.11b, sample plot

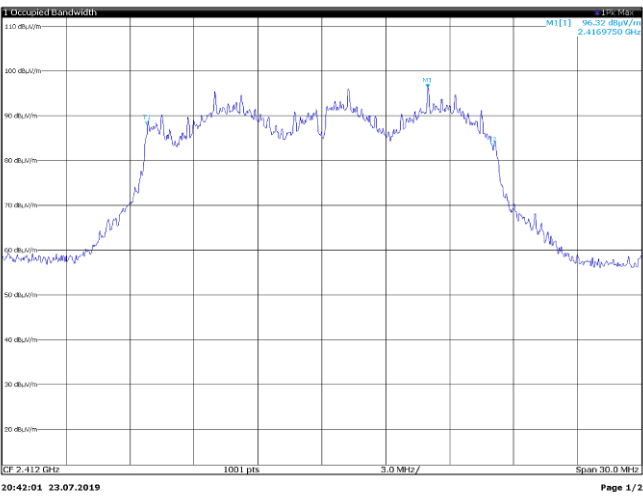


Figure 8.5-14: 99% bandwidth on 802.11g, sample plot

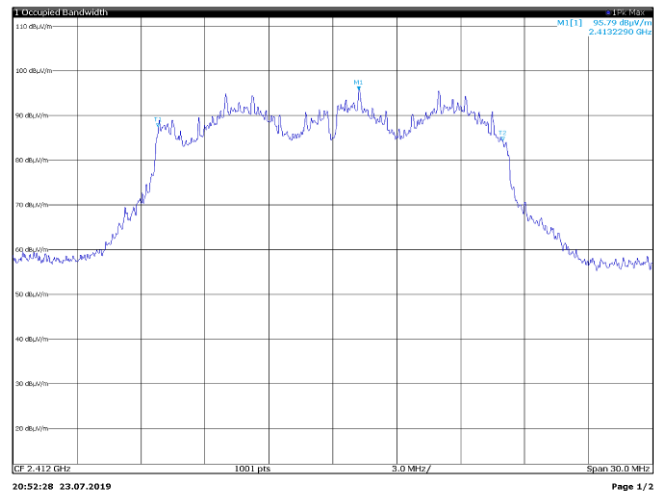


Figure 8.5-15: 99% bandwidth on 802.11n HT20, sample plot

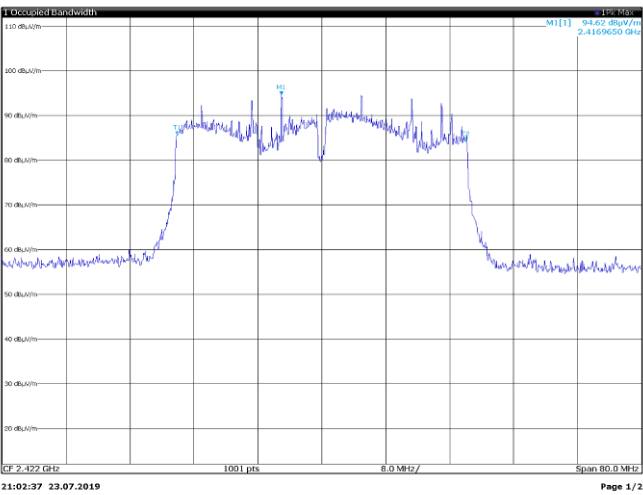


Figure 8.5-16: 99% bandwidth on 802.11n HT40, sample plot




Test name

FCC 15.407(g) and RSS-Gen 8.11 Frequency stability


Specification

FCC Part 15 Subpart E and RSS-Gen Issue 4

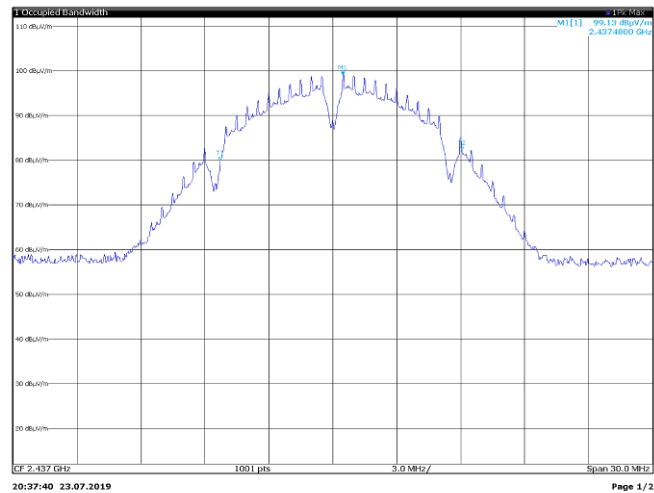


2 Marker Table						
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result
M1	1		2.43746 GHz	99.13 dBμV/m		
T1	1		2.4317253 GHz	79.95 dBμV/m	Occ Bw	11.328671329 MHz
T2	1		2.440559 GHz	82.17 dBμV/m		

Figure 8.5-17: 99% bandwidth on 802.11b, sample plot

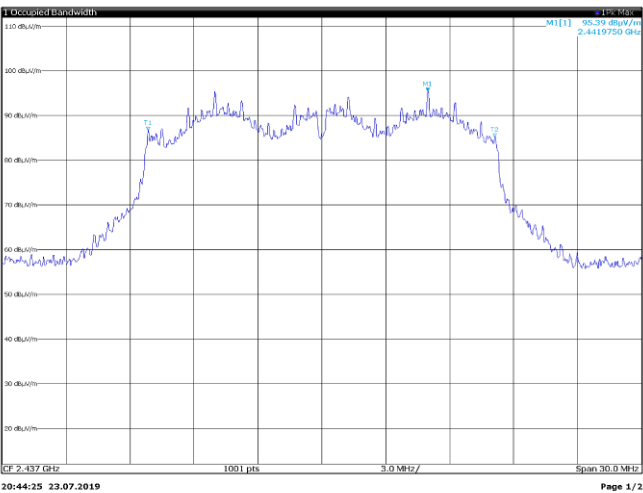


2 Marker Table						
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result
M1	1		2.43746 GHz	99.13 dBμV/m		
T1	1		2.4317253 GHz	79.95 dBμV/m	Occ Bw	11.328671329 MHz
T2	1		2.440559 GHz	82.17 dBμV/m		

Figure 8.5-18: 99% bandwidth on 802.11g, sample plot

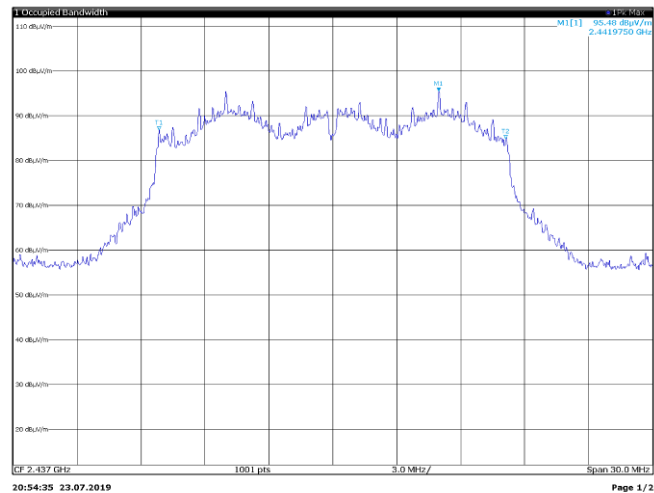

2 Marker Table						
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result
M1	1		2.441975 GHz	95.46 dBμV/m		
T1	1		2.4289482 GHz	86.79 dBμV/m	Occ Bw	16.243756244 MHz
T2	1		2.4405919 GHz	84.91 dBμV/m		

Figure 8.5-19: 99% bandwidth on 802.11n HT20, sample plot

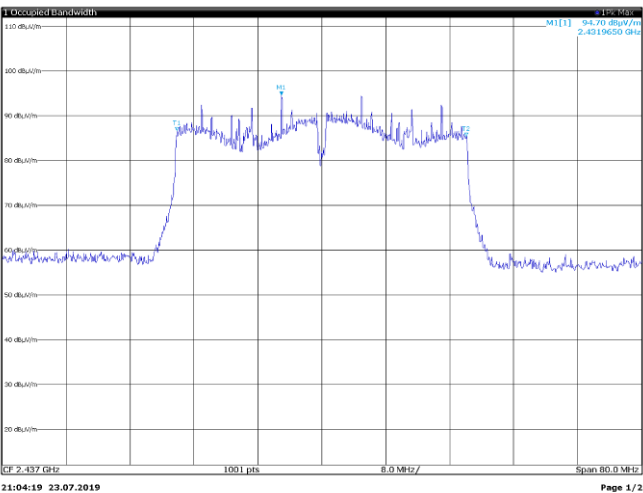

2 Marker Table						
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result
M1	1		2.431965 GHz	94.70 dBμV/m		
T1	1		2.4188581 GHz	86.73 dBμV/m	Occ Bw	36.203796204 MHz
T2	1		2.4550619 GHz	85.41 dBμV/m		

Figure 8.5-20: 99% bandwidth on 802.11n HT40, sample plot



Test name

FCC 15.407(g) and RSS-Gen 8.11 Frequency stability

Specification

FCC Part 15 Subpart E and RSS-Gen Issue 4

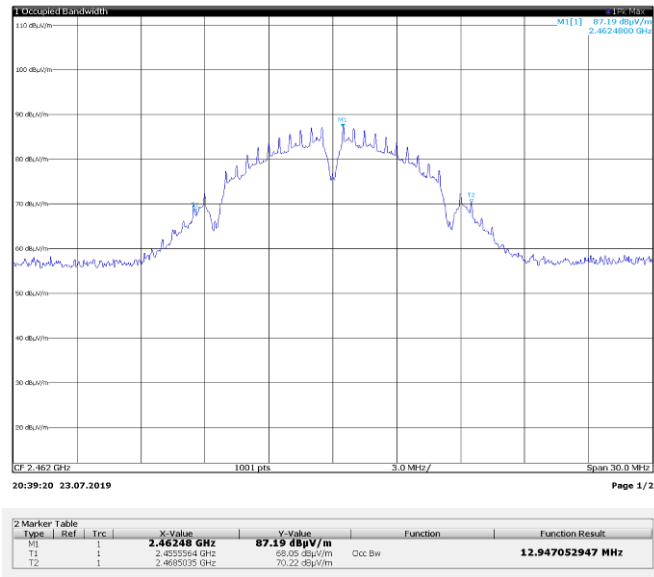


Figure 8.5-21: 99% bandwidth on 802.11b, sample plot

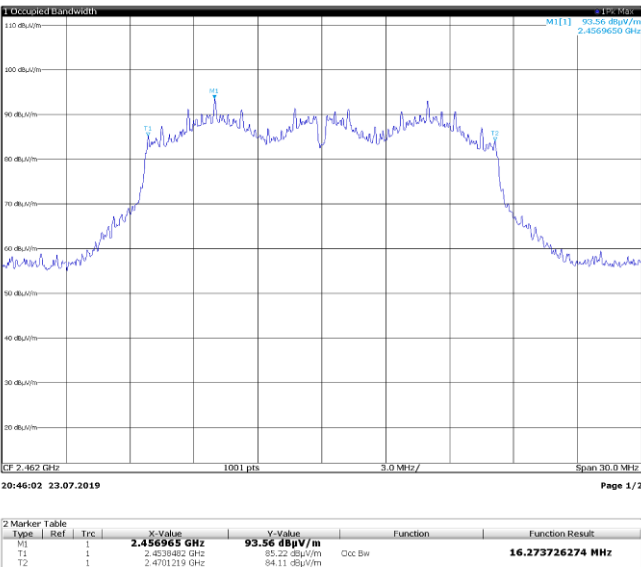


Figure 8.5-22: 99% bandwidth on 802.11g, sample plot

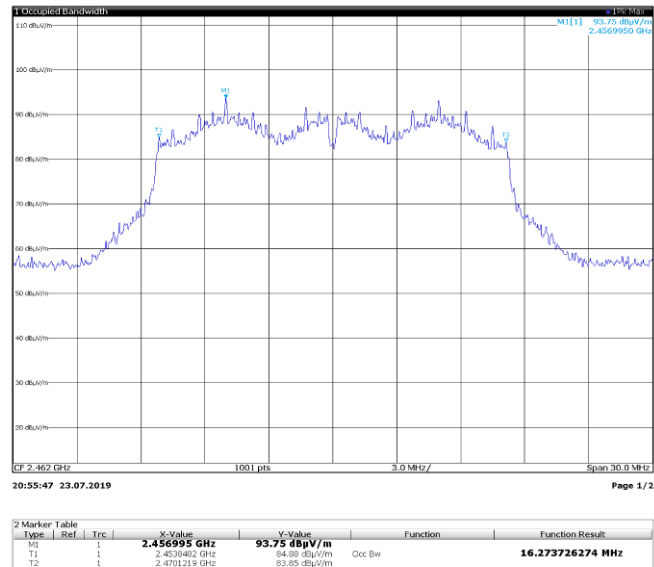


Figure 8.5-23: 99% bandwidth on 802.11n HT20, sample plot

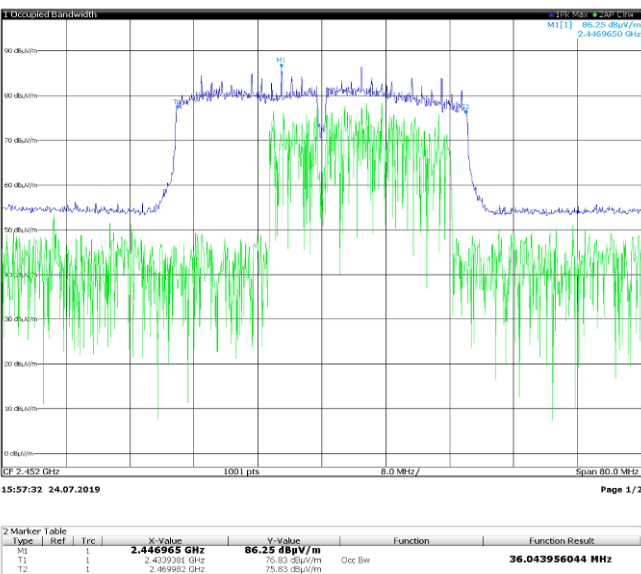


Figure 8.5-24: 99% bandwidth on 802.11n HT40, sample plot

Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

8.6 FCC 15.247(b) and RSS-247 5.4 (d) Transmitter output power and e.i.r.p. requirements for DTS in 2.4 GHz

8.6.1 Definitions and limits

FCC:

- (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:
- (3) For systems using digital modulation in the 2400–2483.5 MHz band: 1 W (30 dBm). As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
 - (4) **The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.**
- (c) Operation with directional antenna gains greater than 6 dBi.
- (1) Fixed point-to-point operation:
 - (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.
 - (iii) Fixed, point-to-point operation, as used in paragraphs (c)(1)(i) and (c)(1)(ii) of this section, excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum or digitally modulated intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.
 - (2) In addition to the provisions in paragraphs (b)(1), (b)(3), (b)(4) and (c)(1)(i) of this section, transmitters operating in the 2400–2483.5 MHz band that emit multiple directional beams, simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers provided the emissions comply with the following:
 - (i) Different information must be transmitted to each receiver.
 - (ii) If the transmitter employs an antenna system that emits multiple directional beams but does not do emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device, i.e., the sum of the power supplied to all antennas, antenna elements, staves, etc. and summed across all carriers or frequency channels, shall not exceed the limit specified in paragraph (b)(1) or (b)(3) of this section, as applicable. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as follows:
 - (A) The directional gain shall be calculated as the sum of 10 log (number of array elements or staves) plus the directional gain of the element or stove having the highest gain.
 - (B) A lower value for the directional gain than that calculated in paragraph (c)(2)(ii)(A) of this section will be accepted if sufficient evidence is presented, e.g., due to shading of the array or coherence loss in the beamforming.
 - (iii) If a transmitter employs an antenna that operates simultaneously on multiple directional beams using the same or different frequency channels, the power supplied to each emission beam is subject to the power limit specified in paragraph (c)(2)(ii) of this section. If transmitted beams overlap, the power shall be reduced to ensure that their aggregate power does not exceed the limit specified in paragraph (c)(2)(ii) of this section. In addition, the aggregate power transmitted simultaneously on all beams shall not exceed the limit specified in paragraph (c)(2)(ii) of this section by more than 8 dB.
 - (iv) Transmitters that emit a single directional beam shall operate under the provisions of paragraph (c)(1) of this section.

Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

ISED:

d. For DTSs employing digital modulation techniques operating in the 2400–2483.5 MHz band, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

e. Fixed point-to-point systems in the 2400–2483.5 MHz band are permitted to have an e.i.r.p. higher than 4 W provided that the higher e.i.r.p. is achieved by employing higher gain directional antennas and not higher transmitter output powers. Point-to-multipoint systems, omnidirectional applications and multiple co-located transmitters transmitting the same information are prohibited from exceeding an e.i.r.p. of 4 W.

f. Transmitters operating in the band 2400–2483.5 MHz, may employ antenna systems that emit multiple directional beams simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers, provided that the emissions comply with the following:

i Different information must be transmitted to each receiver.

ii If the transmitter employs an antenna system that emits multiple directional beams, but does not emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device (i.e. the sum of the power supplied to all antennas, antenna elements, staves, etc., and summed across all carriers or frequency channels) shall not exceed the applicable output power limit specified in sections 5.4(b) and 5.4(d). **However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as the sum of 10 log (number of array elements or staves) plus the directional gain of the element or staff having the highest gain.**

iii If a transmitter employs an antenna that operates simultaneously on multiple directional beams using the same or different frequency channels, the power supplied to each emission beam is subject to the applicable power limit specified in sections 5.4(b) and 5.4(d). If transmitted beams overlap, the power shall be reduced to ensure that their aggregate power does not exceed the applicable limit specified in sections 5.4(b) and 5.4(d). In addition, the aggregate power transmitted simultaneously on all beams shall not exceed the applicable limit specified in sections 5.4(b) and 5.4(d) by more than 8 dB.

iv Transmitters that transmit a single directional beam shall operate under the provisions of sections 5.4(b), 5.4(d) and 5.4(e).

8.6.1 Test date


Start date July 25, 2019

Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4


8.6.2 Observations, settings and special notes

The test was performed using Integrated band power method. Tests were performed with highest and lowest data rates, only the worst cases were presented.

EIRP CALCULATION:
Max antenna gain: 18.5 dBi (see below the gain measurement provided by manufacturer)

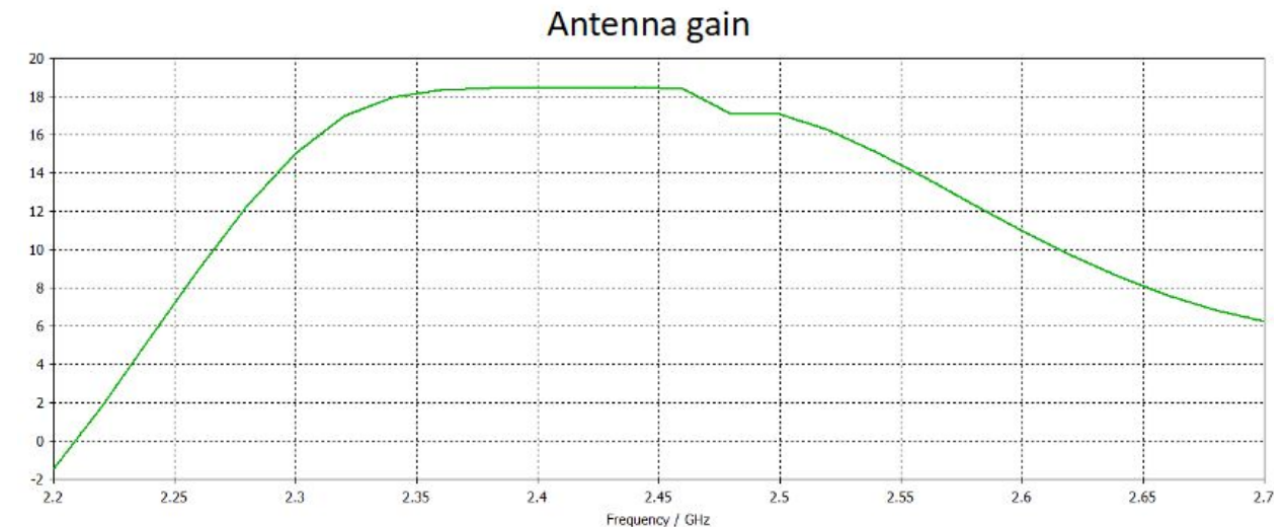

LHG_XL_52_2.4 GHz_gain-graphic_vert-pol

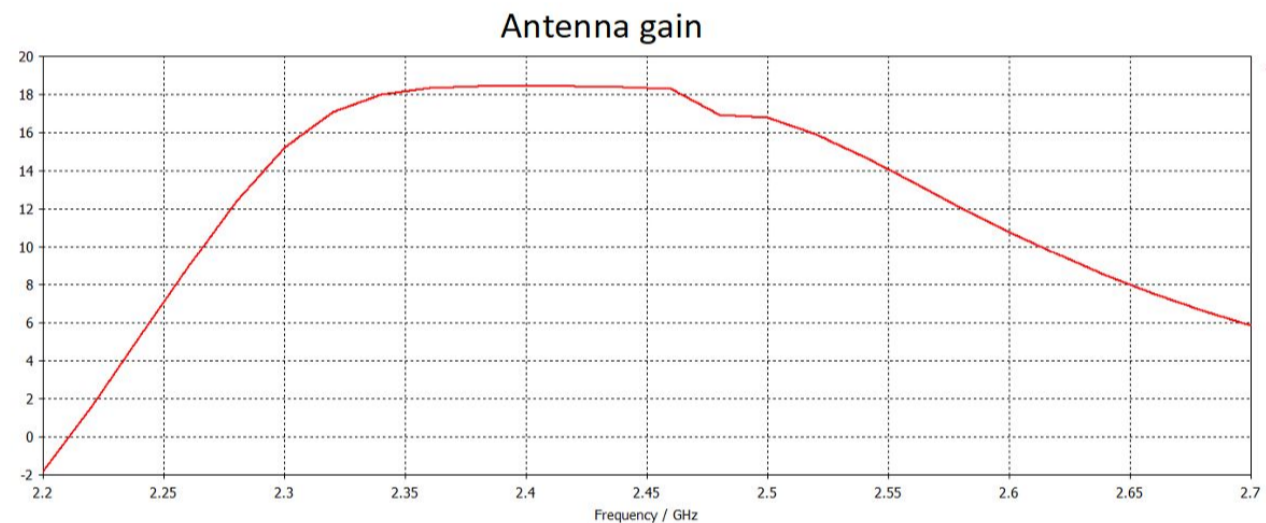

LHG_XL_52_2.4 GHz_gain-graphic_horz-pol

Test name	FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification	FCC Part 15 Subpart E and RSS-Gen Issue 4

DIRECTIONAL GAIN

According to KDB 662911 (F)(2)(e)(i):

Directional antenna gain $G_{DIR} = G_{MAX} + 10 \cdot \log(N_{ANT}/N_{SS})$, where N_{SS} is the number of independent spatial streams of data and G_{MAX} is the gain of the antenna having the highest gain (in dBi).

Device supports spatial multiplexing/cyclic delay diversity in MIMO configurations and single stream legacy modes. Antenna gain for both chains is the same. Signals between chains are correlated. Then $N_{ANT} = 2$ and $N_{SS} = 1$:

$$G_{DIR} = 18.5 \text{ dBi} + 10 \cdot \log(2/1) = 21.5 \text{ dBi}.$$

OUTPUT POWER/EIRP/PSD LIMIT ADJUSTMENT

Output power/EIRP/PSD limit – (Total antenna gain – 6 dBi).

$$\text{FCC Output power limit is } 30 \text{ dBm} - (21.5 - 6) = 30 \text{ dBm} - 15.5 = 14.5 \text{ dBm}$$

E-FIELD CALCULATION

According to KDB 558074 and ANSI C63.10:

$$\text{EIRP}_{\text{dBm}} = S_{\text{dB}\mu\text{V/m}} + 20 \cdot \log(d_m) - 104.7$$

Example of calculation, 3 m distance, 111 dBuV/m:

$$\text{EIRP}_{\text{dBm}} = 111 \text{ dBuV/m} + 20 \cdot \log_{10}(3) - 104.7 = 15.9 \text{ dBm eirp}$$

According clause 14.5 of ANSI C63.10 where radiated measurements are used for determining compliance with conducted limits, the following steps are required to ensure that the total emission power or PSD is determined for equipment driving cross-polarized antennas:

- Measure radiated emissions with vertical and horizontal polarizations of the measurement antenna.
- Convert each radiated measurement to transmit power or PSD based on the antenna gain.
- Sum the powers or PSDs across the two polarizations.

Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

8.6.3 Test data

Radiated Field strength, vertical polarization

Modulation	Frequency, MHz	dBm		Margin, dB	Antenna gain, dBi	EIRP, dBm	EIRP limit, dBm	EIRP margin, dB	E Field dBuV/m
		Measured	Limit						
802.11b	2412	-5.6	14.5	-20.1	21.5	15.9	36.0	-20.1	111.1
	2442	-19.6	14.5	-34.1	21.5	1.9	36.0	-34.1	97.0
	2462	-18.8	14.5	-33.3	21.5	2.7	36.0	-33.3	97.9
802.11g	2412	-8.4	14.5	-22.9	21.5	13.1	36.0	-22.9	108.3
	2442	-11.4	14.5	-25.9	21.5	10.1	36.0	-25.9	105.2
	2462	-8.0	14.5	-22.5	21.5	13.5	36.0	-22.5	108.7
802.11n HT20	2412	-7.3	14.5	-21.8	21.5	14.2	36.0	-21.8	109.4
	2442	-9.5	14.5	-24.0	21.5	12.0	36.0	-24.0	107.2
	2462	-9.2	14.5	-23.7	21.5	12.3	36.0	-23.7	107.5
802.11n HT40	2422	-8.2	14.5	-22.7	21.5	13.3	36.0	-22.7	108.5
	2442	-13.1	14.5	-27.6	21.5	8.4	36.0	-27.6	103.5
	2452	-11.1	14.5	-25.6	21.5	10.4	36.0	-25.6	105.6

Radiated Field strength, horizontal polarization

Modulation	Frequency, MHz	dBm		Margin, dB	Antenna gain, dBi	EIRP, dBm	EIRP limit, dBm	EIRP margin, dB	E Field dBuV/m
		Measured	Limit						
802.11b	2412	-16.7	14.5	-31.2	21.5	4.8	36.0	-31.2	100.0
	2442	-22.6	14.5	-37.1	21.5	-1.1	36.0	-37.1	94.0
	2462	-22.2	14.5	-36.7	21.5	-0.7	36.0	-36.7	94.5
802.11g	2412	-23.0	14.5	-37.5	21.5	-1.5	36.0	-37.5	93.7
	2442	-24.5	14.5	-39.0	21.5	-3.0	36.0	-39.0	92.2
	2462	-22.9	14.5	-37.4	21.5	-1.4	36.0	-37.4	93.8
802.11n HT20	2412	-28.6	14.5	-43.1	21.5	-7.1	36.0	-43.1	88.1
	2442	-17.2	14.5	-31.7	21.5	4.3	36.0	-31.7	99.5
	2462	-23.9	14.5	-38.4	21.5	-2.4	36.0	-38.4	92.8
802.11n HT40	2422	-17.8	14.5	-32.3	21.5	3.7	36.0	-32.3	98.9
	2442	-18.2	14.5	-32.7	21.5	3.3	36.0	-32.7	98.5
	2452	-15.4	14.5	-29.9	21.5	6.1	36.0	-29.9	101.3

Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

Table 8.6-1: Total Output power measurements Sum of E Field in vertical and horizontal polarization) to dBm EIRP (Total E Field – antenna gain - $20 \cdot \log_{10}(3)$ -104.7 dB)

Modulation	Frequency, MHz	Conducted output power, dBm		Margin, dB	Antenna gain, dBi	EIRP, dBm	EIRP limit, dBm	EIRP margin, dB
		Measured	Limit					
802.11b	2412	-5.2	14.5	-19.7	21.5	16.3	36.0	-19.7
	2442	-17.9	14.5	-32.4	21.5	3.6	36.0	-32.4
	2462	-17.1	14.5	-31.6	21.5	4.4	36.0	-31.6
802.11g	2412	-8.2	14.5	-22.7	21.5	13.3	36.0	-22.7
	2442	-11.2	14.5	-25.7	21.5	10.3	36.0	-25.7
	2462	-7.8	14.5	-22.3	21.5	13.7	36.0	-22.3
802.11n HT20	2412	-7.3	14.5	-21.8	21.5	14.2	36.0	-21.8
	2442	-8.8	14.5	-23.3	21.5	12.7	36.0	-23.3
	2462	-9.0	14.5	-23.5	21.5	12.5	36.0	-23.5
802.11n HT40	2422	-7.7	14.5	-22.2	21.5	13.8	36.0	-22.2
	2442	-11.9	14.5	-26.4	21.5	9.6	36.0	-26.4
	2452	-9.7	14.5	-24.2	21.5	11.8	36.0	-24.2




Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

detector = RMS (power averaging).


Section (8) Results, continued protocol 802.11b

Low channel, horizontal polarization

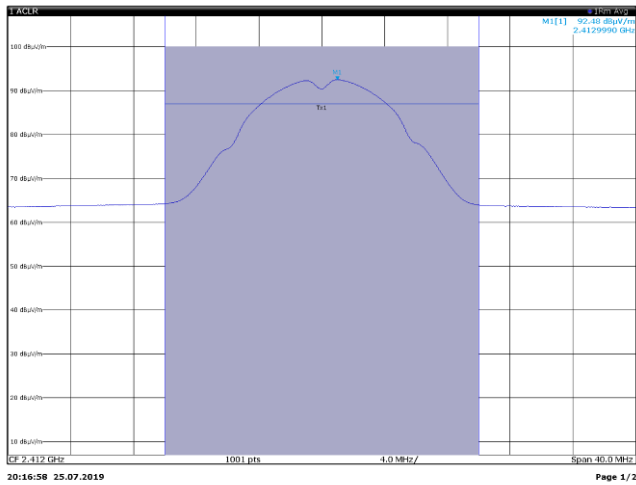


2 Result Summary	Channel	Bandwidth	Offset	None	Power
Tx1 (Ref)	20.000 MHz				100.05 dBµV/m
Tx Total					100.05 dBµV/m

Low channel, vertical polarization

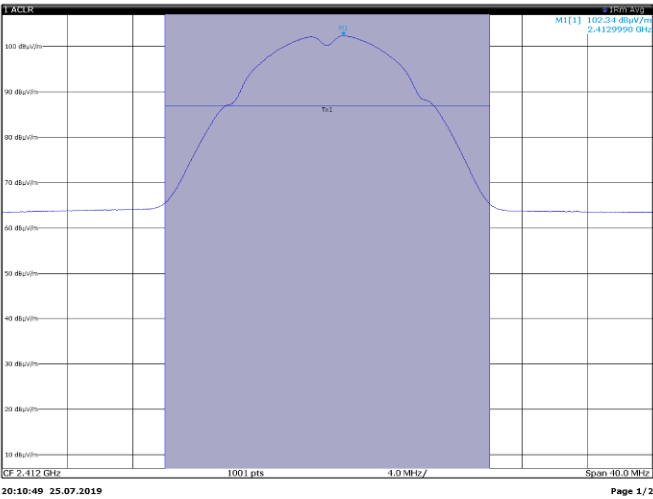


2 Result Summary	Channel	Bandwidth	Offset	None	Power
Tx1 (Ref)	20.000 MHz				111.12 dBµV/m
Tx Total					111.12 dBµV/m

Middle channel, horizontal polarization

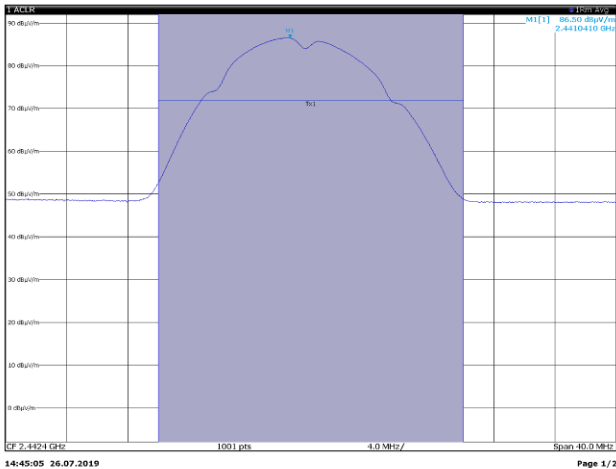

2 Result Summary	Channel	Bandwidth	Offset	None	Power
Tx1 (Ref)	20.000 MHz				94.07 dBµV/m
Tx Total					94.07 dBµV/m

Middle channel, vertical polarization

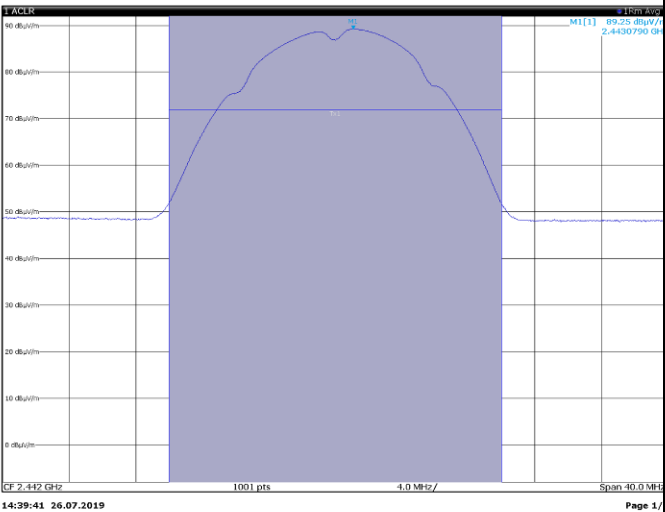


2 Result Summary	Channel	Bandwidth	Offset	None	Power
Tx1 (Ref)	20.000 MHz				97.03 dBµV/m
Tx Total					97.03 dBµV/m




Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

High channel, horizontal polarization

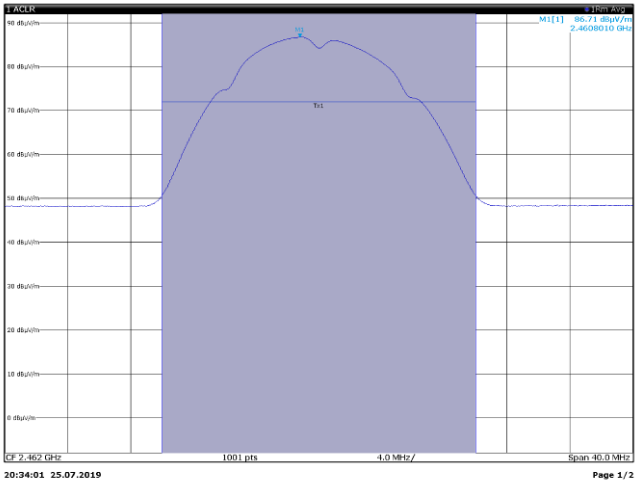

2 Result Summary		None		Power
Channel	Bandwidth	Offset		
Tot (Ref)	20.000 MHz			94.45 dBpV/m
Tot Total				94.45 dBpV/m

High channel, vertical polarization

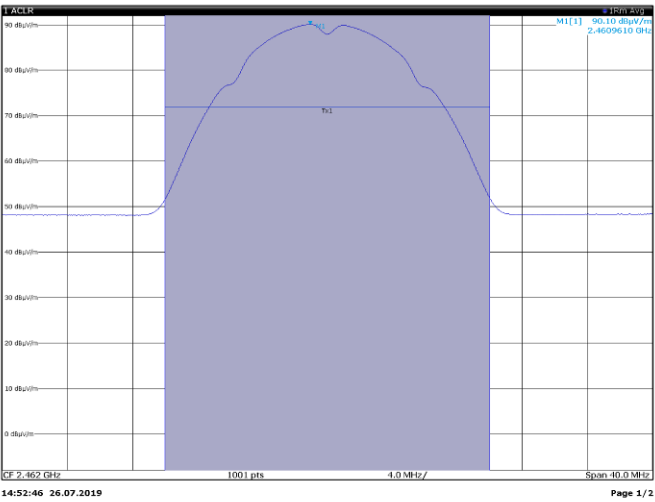


2 Result Summary		None		Power
Channel	Bandwidth	Offset		
Tot (Ref)	20.000 MHz			97.89 dBpV/m
Tot Total				97.89 dBpV/m




Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

Section (8) Results, continued protocol 802.11g


Low channel, horizontal polarization

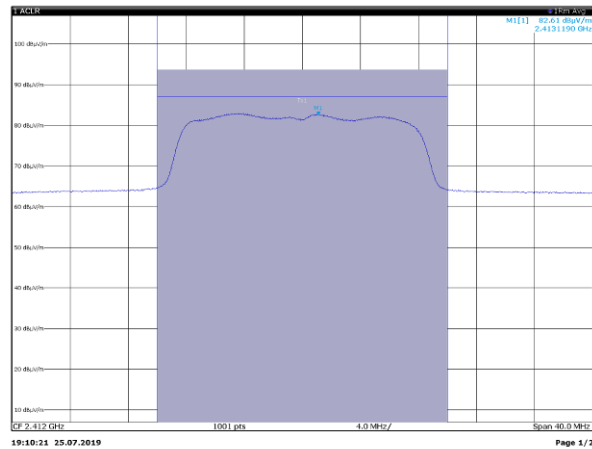


Low channel, vertical polarization

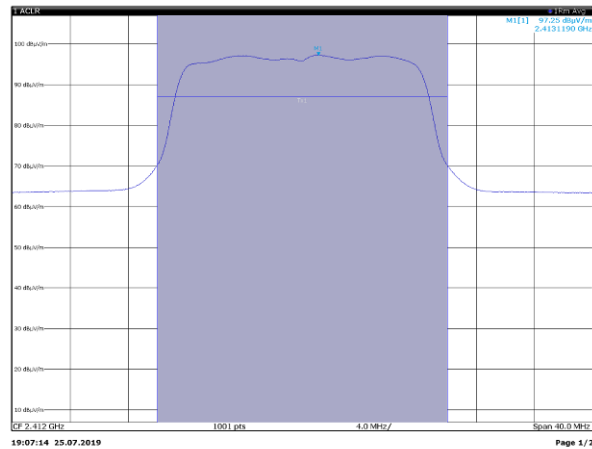

Middle channel, horizontal polarization

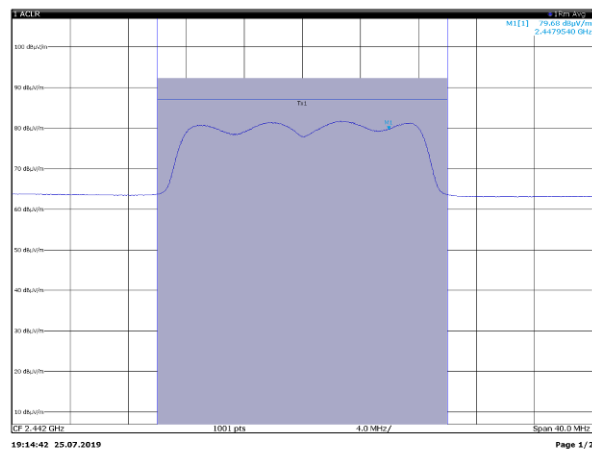


Middle channel, vertical polarization

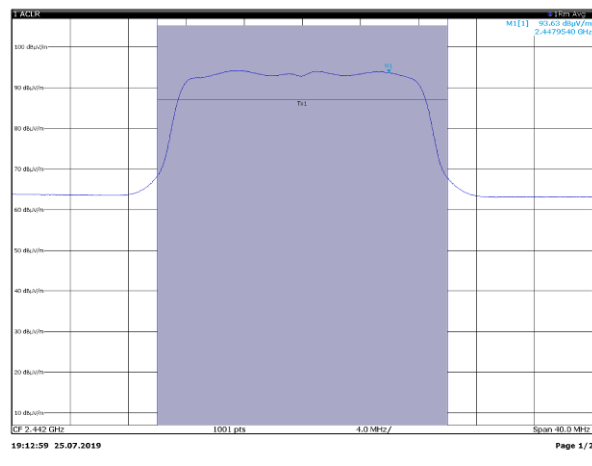



Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4


High channel, horizontal polarization

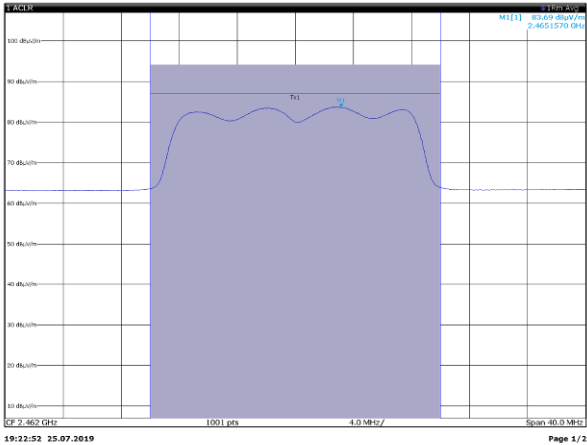

19:22:52 25.07.2019 Page 1/2

2 Result Summary		None		Power	
Channel	Bandwidth	Offset			
Tx1 (Ref)	20.000 MHz				94.11 dBμV/m
Tx Total					94.11 dBμV/m

High channel, vertical polarization

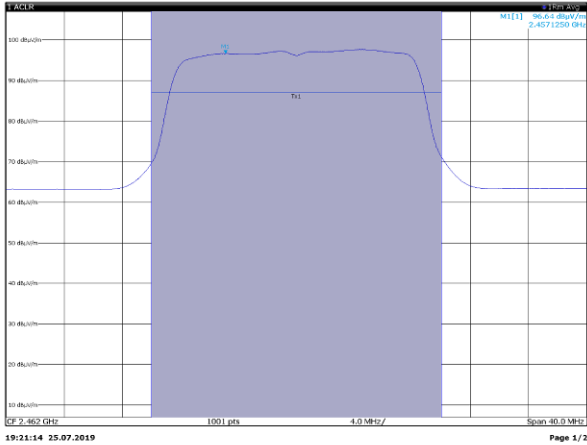

19:21:14 25.07.2019 Page 1/2


2 Result Summary		None		Power	
Channel	Bandwidth	Offset			
Tx1 (Ref)	20.000 MHz				108.69 dBμV/m
Tx Total					108.69 dBμV/m



Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4


Section (8) Results,, continued protocol 802.11nHT20

Low channel, horizontal polarization

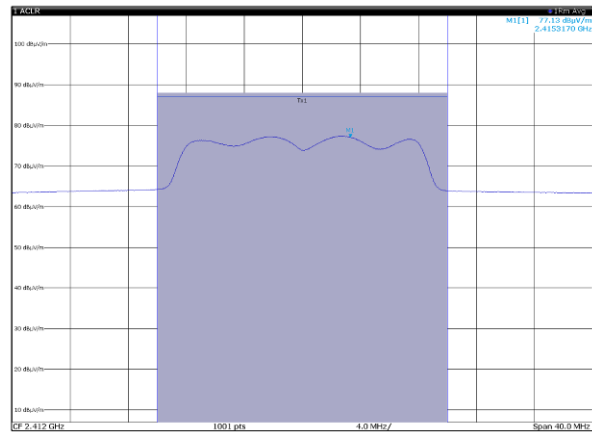


2 Result Summary			
Channel	Bandwidth	Offset	Power
Tx1 (Ref)	20.000 MHz	None	87.95 dBµV/m
Tx Total			87.95 dBµV/m

Low channel, vertical polarization

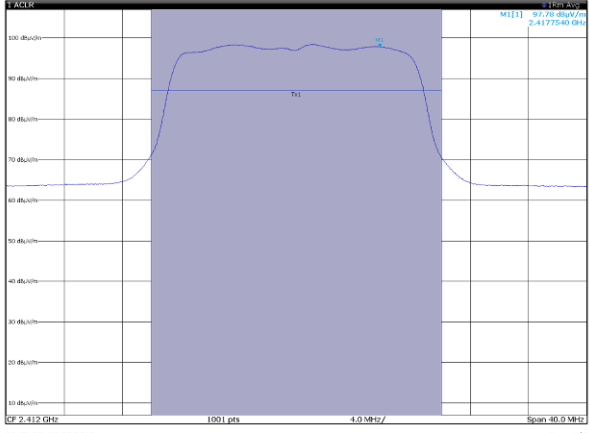


2 Result Summary			
Channel	Bandwidth	Offset	Power
Tx1 (Ref)	20.000 MHz	None	109.32 dBµV/m
Tx Total			109.32 dBµV/m

Middle channel, horizontal polarization

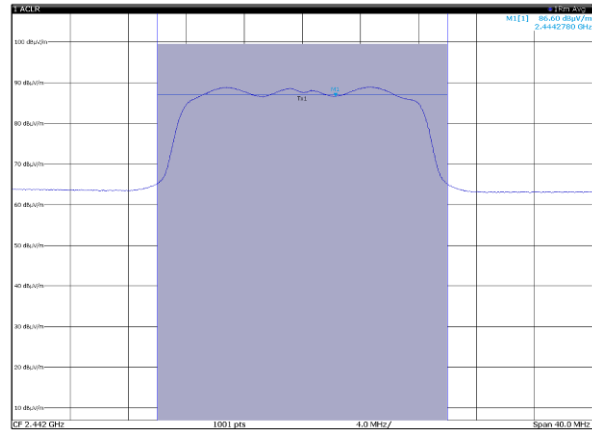

2 Result Summary			
Channel	Bandwidth	Offset	Power
Tx1 (Ref)	20.000 MHz	None	99.51 dBµV/m
Tx Total			99.51 dBµV/m

Middle channel, vertical polarization

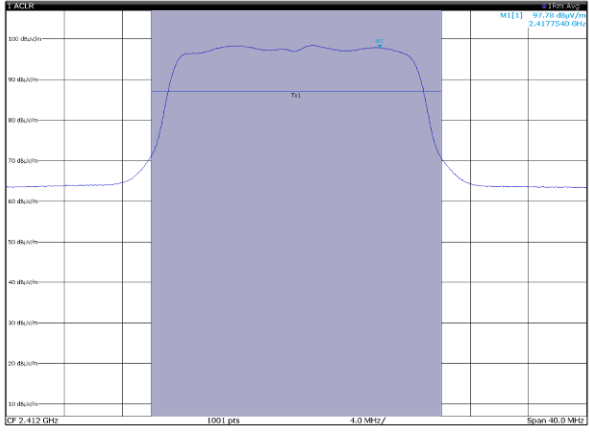


2 Result Summary			
Channel	Bandwidth	Offset	Power
Tx1 (Ref)	20.000 MHz	None	107.20 dBµV/m
Tx Total			107.20 dBµV/m




Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

High channel, horizontal polarization

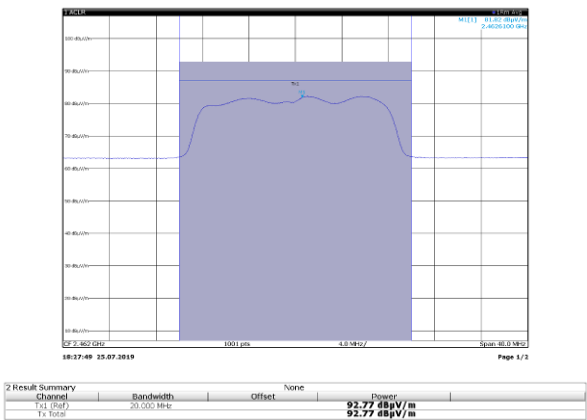

High channel, vertical polarization

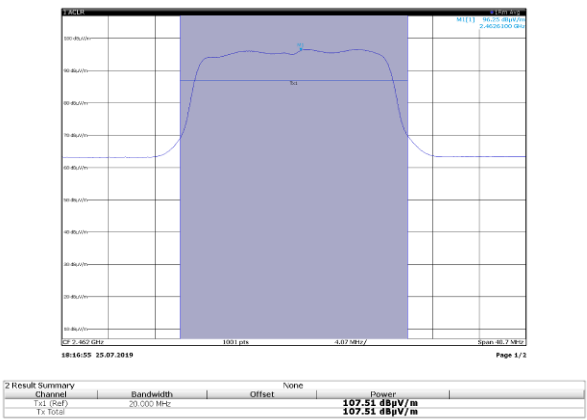




Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4


Section (8) Results, continued protocol 802.11nHT40

Low channel, horizontal polarization

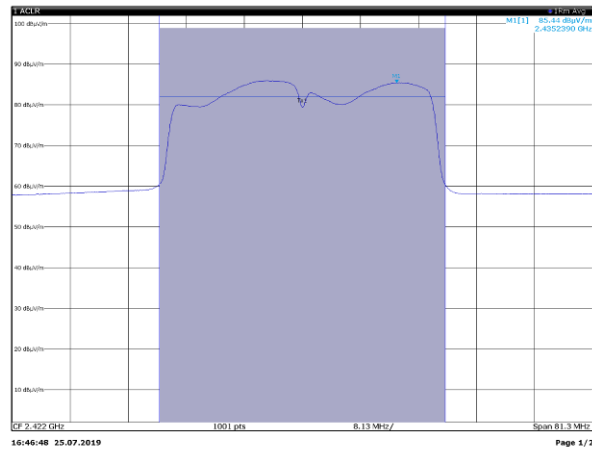


2 Result Summary			
Channel	Bandwidth	Offset	Power
Tx1 (Ref)	40.000 MHz	None	98.89 dBpV/m
Tx Total			98.89 dBpV/m

Low channel, vertical polarization

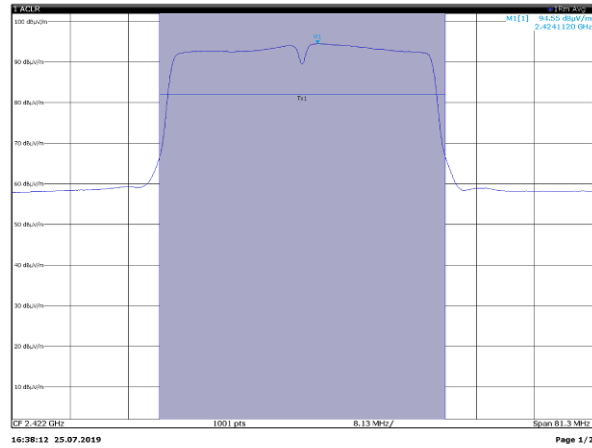


2 Result Summary			
Channel	Bandwidth	Offset	Power
Tx1 (Ref)	40.000 MHz	None	108.50 dBpV/m
Tx Total			108.50 dBpV/m

Middle channel, horizontal polarization

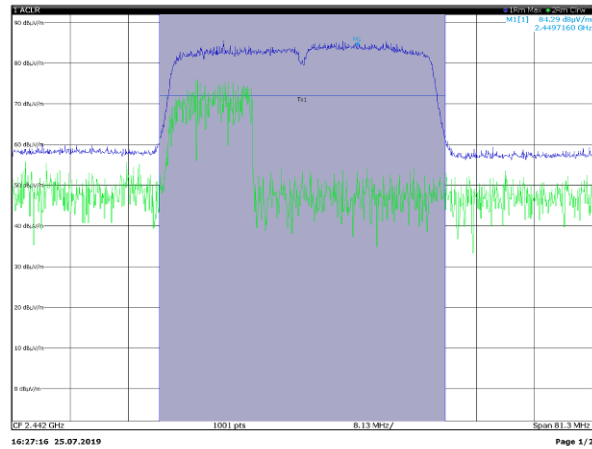

2 Result Summary			
Channel	Bandwidth	Offset	Power
Tx1 (Ref)	40.000 MHz	None	98.49 dBpV/m
Tx Total			98.49 dBpV/m

Middle channel, vertical polarization

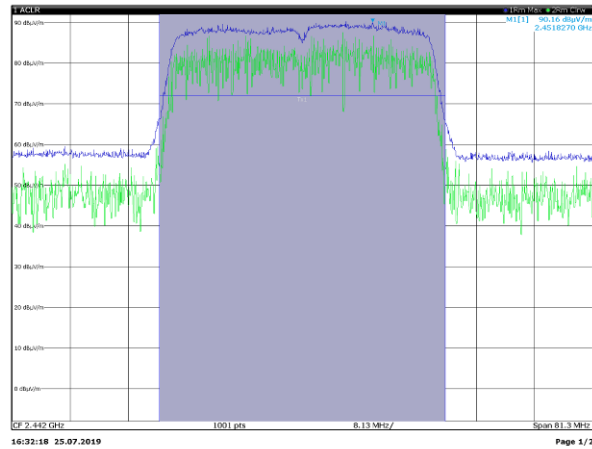


2 Result Summary			
Channel	Bandwidth	Offset	Power
Tx1 (Ref)	40.000 MHz	None	103.54 dBpV/m
Tx Total			103.54 dBpV/m




Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

High channel, horizontal polarization

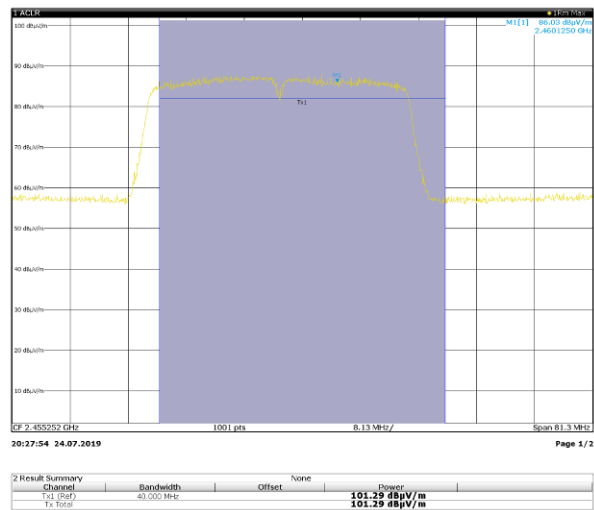

High channel, vertical polarization

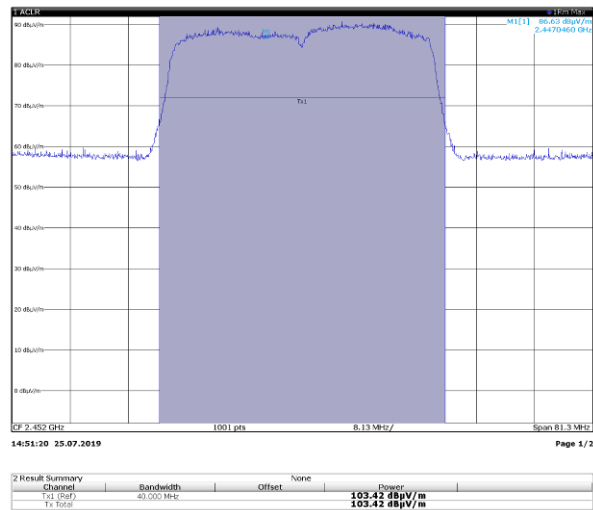

Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

8.7 FCC 15.247(d) and RSS-247 5.5 Spurious (out-of-band) unwanted emissions

8.7.1 Definitions and limits

FCC:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

ISED:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Table 8.7-1: FCC §15.209 and RSS-Gen – Radiated emission limits

Frequency, MHz	Field strength of emissions		Measurement distance, m
	µV/m	dBµV/m	
0.009–0.490	2400/F	$67.6 - 20 \times \log_{10}(F)$	300
0.490–1.705	24000/F	$87.6 - 20 \times \log_{10}(F)$	30
1.705–30.0	30	29.5	30
30–88	100	40.0	3
88–216	150	43.5	3
216–960	200	46.0	3
above 960	500	54.0	3

Notes: In the emission table above, the tighter limit applies at the band edges.

For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test

Table 8.7-2: ISED restricted frequency bands

MHz	MHz	MHz	GHz
0.090–0.110	12.57675–12.57725	399.9–410	7.25–7.75
0.495–0.505	13.36–13.41	608–614	8.025–8.5
2.1735–2.1905	16.42–16.423	960–1427	9.0–9.2
3.020–3.026	16.69475–16.69525	1435–1626.5	9.3–9.5
4.125–4.128	16.80425–16.80475	1645.5–1646.5	10.6–12.7
4.17725–4.17775	25.5–25.67	1660–1710	13.25–13.4
4.20725–4.20775	37.5–38.25	1718.8–1722.2	14.47–14.5
5.677–5.683	73–74.6	2200–2300	15.35–16.2
6.215–6.218	74.8–75.2	2310–2390	17.7–21.4
6.26775–6.26825	108–138	2483.5–2500	22.01–23.12
6.31175–6.31225	149.9–150.05	2655–2900	23.6–24.0
8.291–8.294	156.52475–156.52525	3260–3267	31.2–31.8
8.362–8.366	156.7–156.9	3332–3339	36.43–36.5
8.37625–8.38675	162.0125–167.17	3345.8–3358	
8.41425–8.41475	167.72–173.2	3500–4400	
12.29–12.293	240–285	4500–5150	Above 38.6
12.51975–12.52025	322–335.4	5350–5460	

Note: Certain frequency bands listed in Table 8.7-2 and above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

Section 8

Testing data



Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

Table 8.7-3: FCC restricted frequency bands

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Above 38.6
13.36–13.41			

8.7.1 Test date

Start date March, 25, 2019

Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

8.7.2 Observations, settings and special notes

The spectrum was searched from 30 MHz to the 10th harmonic.

EUT was set to transmit continuously. Tests were performed with EUT set to highest and lowest data rate, different antenna configurations and modulation schemes were investigated, only the worst case are presented.

Radiated measurements were performed at a distance of 3 m. Cabinet radiated emissions were performed with antenna port terminated with 50 Ω load.

Spectrum analyzer settings for conducted spurious emissions measurements:

Resolution bandwidth:	100 kHz
Video bandwidth:	300 kHz
Detector mode:	Peak
Trace mode:	Max Hold

Spectrum analyzer settings for radiated measurements within restricted bands below 1 GHz:

Resolution bandwidth:	100 kHz
Video bandwidth:	300 kHz
Detector mode:	Peak
Trace mode:	Max Hold

Spectrum analyzer settings for peak radiated measurements within restricted bands above 1 GHz:

Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Detector mode:	Peak
Trace mode:	Max Hold

Spectrum analyzer settings for average conducted measurements within restricted bands above 1 GHz:

Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Detector mode:	power averaging (RMS)
Trace mode:	averaging (RMS)

Spectrum analyzer settings for average radiated measurements within restricted bands above 1 GHz:

Resolution bandwidth:	1 MHz
Video bandwidth:	10 Hz
Detector mode:	Peak
Trace mode:	Max Hold


The spurious emission were performed in MIMO mode.



Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

8.7.4 Test data

6.10.5 Restricted-band band-edge measurements protocol 802.11b, vertical

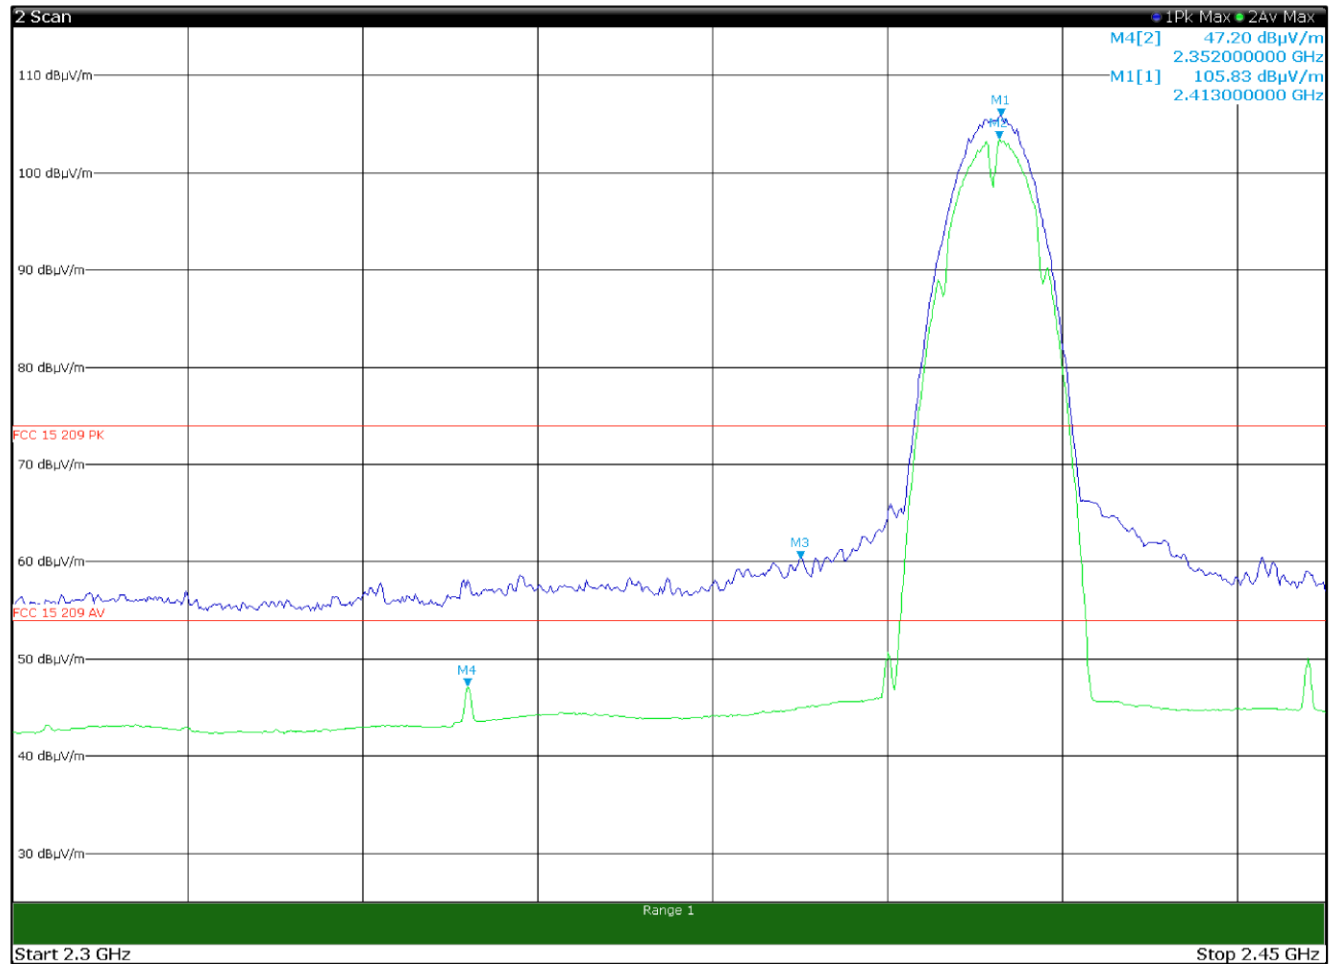

16:40:03 26.07.2019

Page 1/2

3 Marker Table					
Wnd	Type	Ref	Trc	X-value	Y-value
Scan	M1		1	2.413 GHz	105.83 dBμV/m
Scan	M2		2	2.41275 GHz	103.53 dBμV/m
Scan	M3		1	2.39 GHz	60.35 dBμV/m
Scan	M4		2	2.352 GHz	47.2 dBμV/m


6.10.4 Authorized-band band-edge measurements (relative method)

na



Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

6.10.5 Restricted-band band-edge measurements protocol 802.11b, horizontal

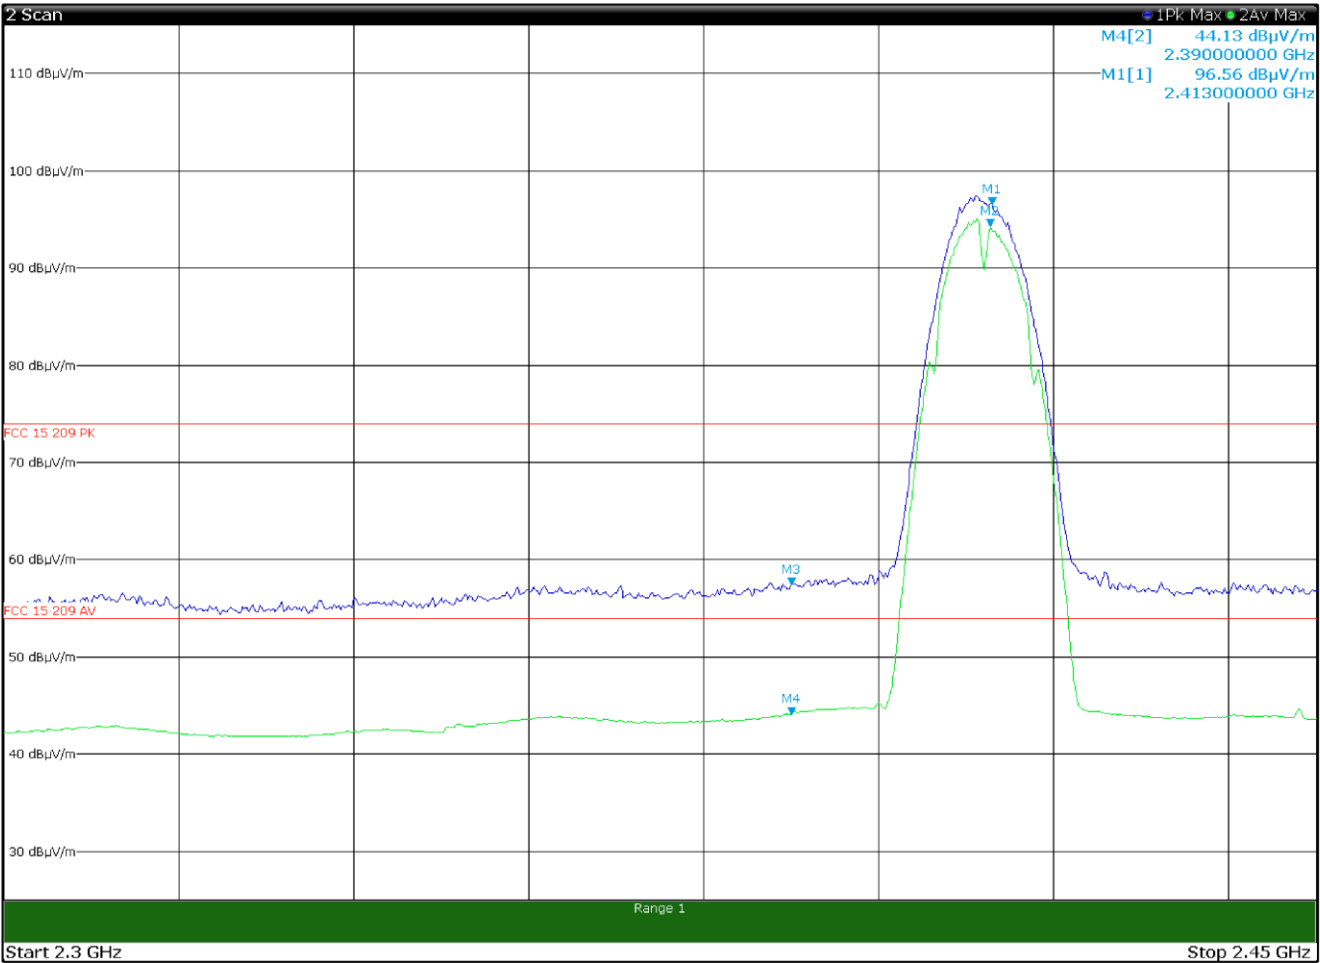

16:43:36 26.07.2019

Page 1/2

3 Marker Table					
Wnd	Type	Ref	Trc	X-value	Y-value
Scan	M1		1	2.413 GHz	96.56 dBμV/m
Scan	M2		2	2.41275 GHz	94.31 dBμV/m
Scan	M3		1	2.39 GHz	57.43 dBμV/m
Scan	M4		2	2.39 GHz	44.13 dBμV/m


6.10.4 Authorized-band band-edge measurements (relative method)

na



Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

6.10.5 Restricted-band band-edge measurements protocol 802.11g, horizontal

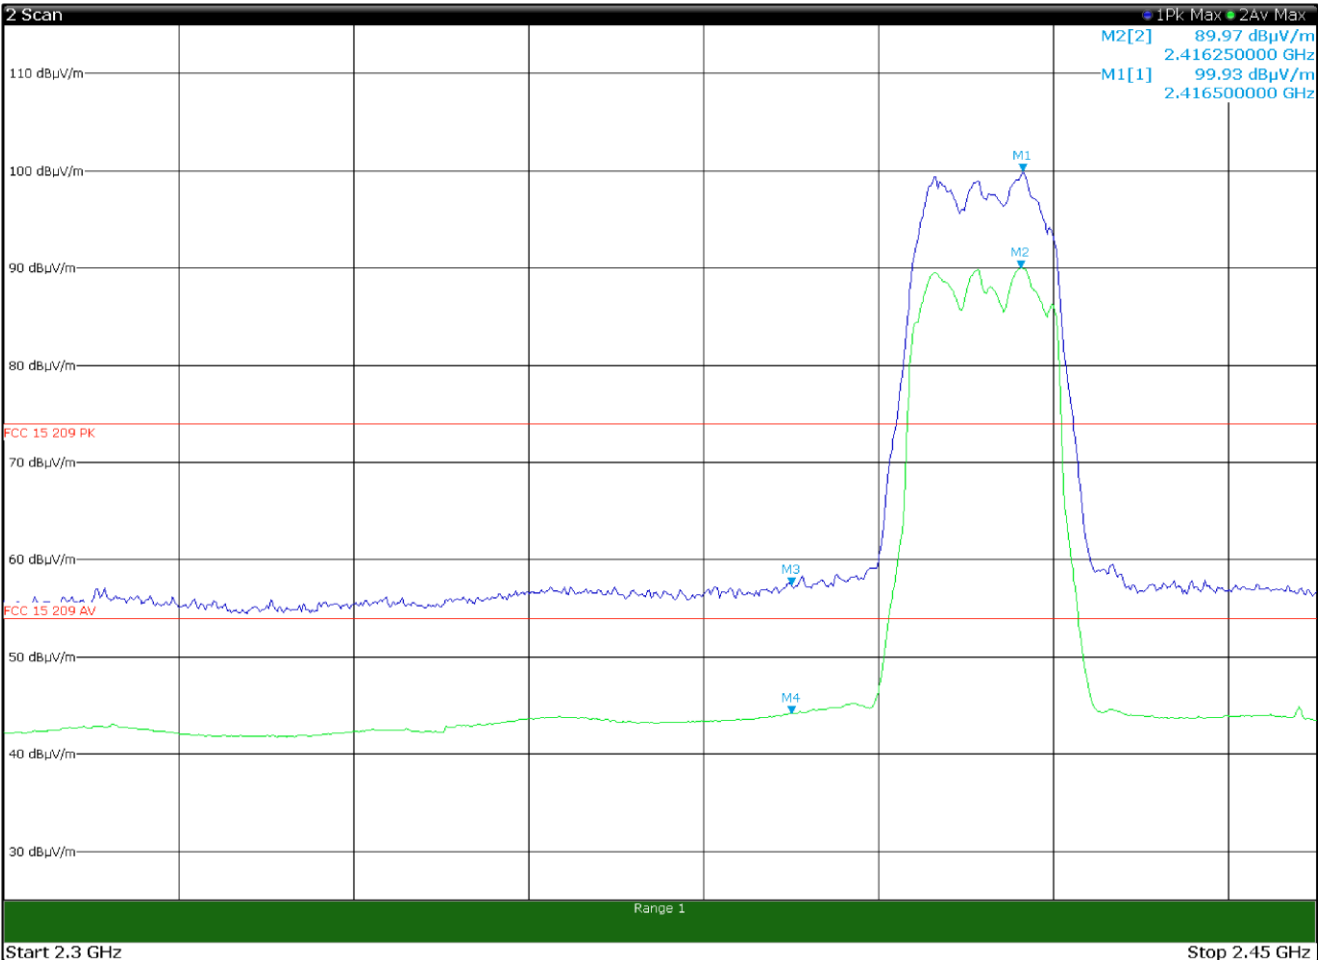

16:57:09 26.07.2019

Page 1/2


3 Marker Table					
Wnd	Type	Ref	Trc	X-value	Y-value
Scan	M1		1	2.4635 GHz	87.79 dBμV/m
Scan	M2		2	2.463 GHz	85.22 dBμV/m
Scan	M3		1	2.4835 GHz	49.29 dBμV/m
Scan	M4		2	2.4835 GHz	36.54 dBμV/m

6.10.4 Authorized-band band-edge measurements (relative method)
na



Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

6.10.5 Restricted-band band-edge measurements protocol 802.11g, vertical

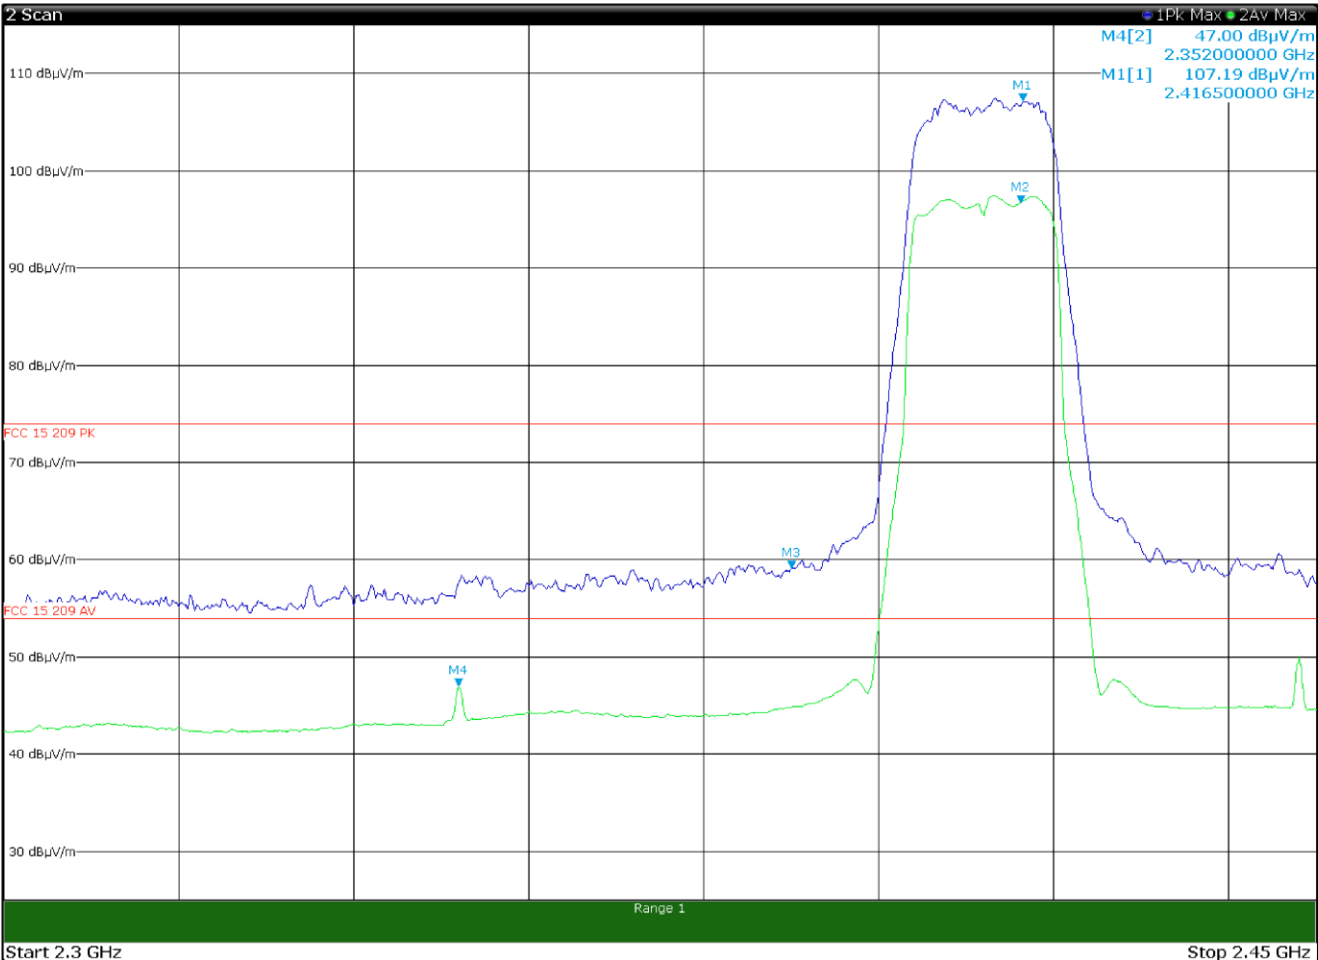

17:00:30 26.07.2019

Page 1/2


3 Marker Table					
Wnd	Type	Ref	Trc	X-value	Y-value
Scan	M1		1	2.4165 GHz	107.19 dBμV/m
Scan	M2		2	2.41625 GHz	96.73 dBμV/m
Scan	M3		1	2.39 GHz	59.09 dBμV/m
Scan	M4		2	2.352 GHz	47.0 dBμV/m

6.10.4 Authorized-band band-edge measurements (relative method)



Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

6.10.5 Restricted-band band-edge measurements protocol 802.11n HT20, vertical

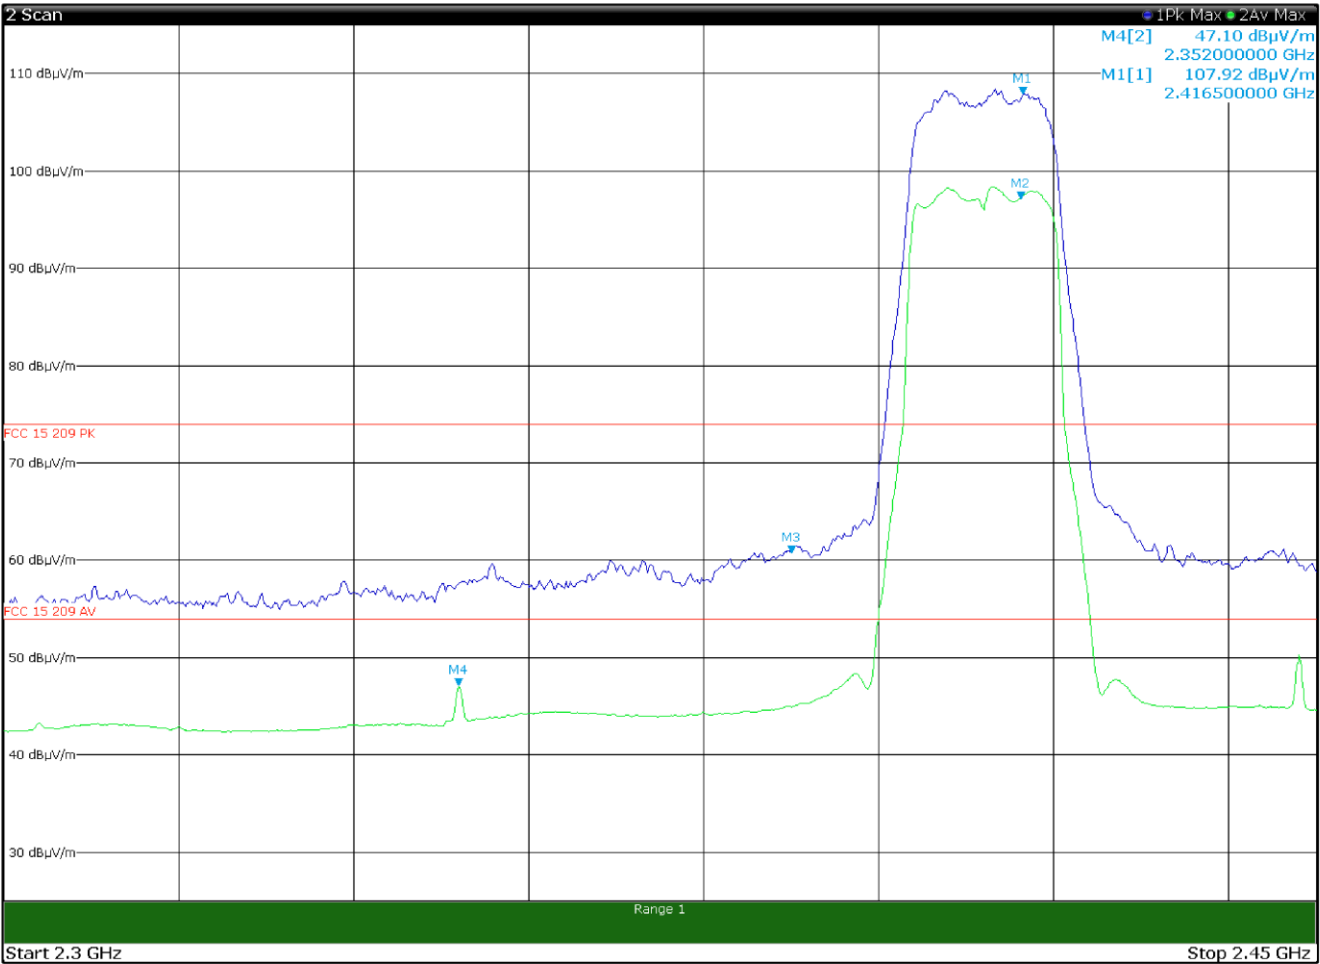

17:12:14 26.07.2019

Page 1 / 2


3 Marker Table					
Wnd	Type	Ref	Trc	X-value	Y-value
Scan	M1		1	2.4165 GHz	107.92 dBμV/m
Scan	M2		2	2.41625 GHz	97.17 dBμV/m
Scan	M3		1	2.39 GHz	60.81 dBμV/m
Scan	M4		2	2.352 GHz	47.1 dBμV/m

6.10.4 Authorized-band band-edge measurements (relative method)



Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

6.10.5 Restricted-band band-edge measurements protocol 802.11n HT20,, horizontal

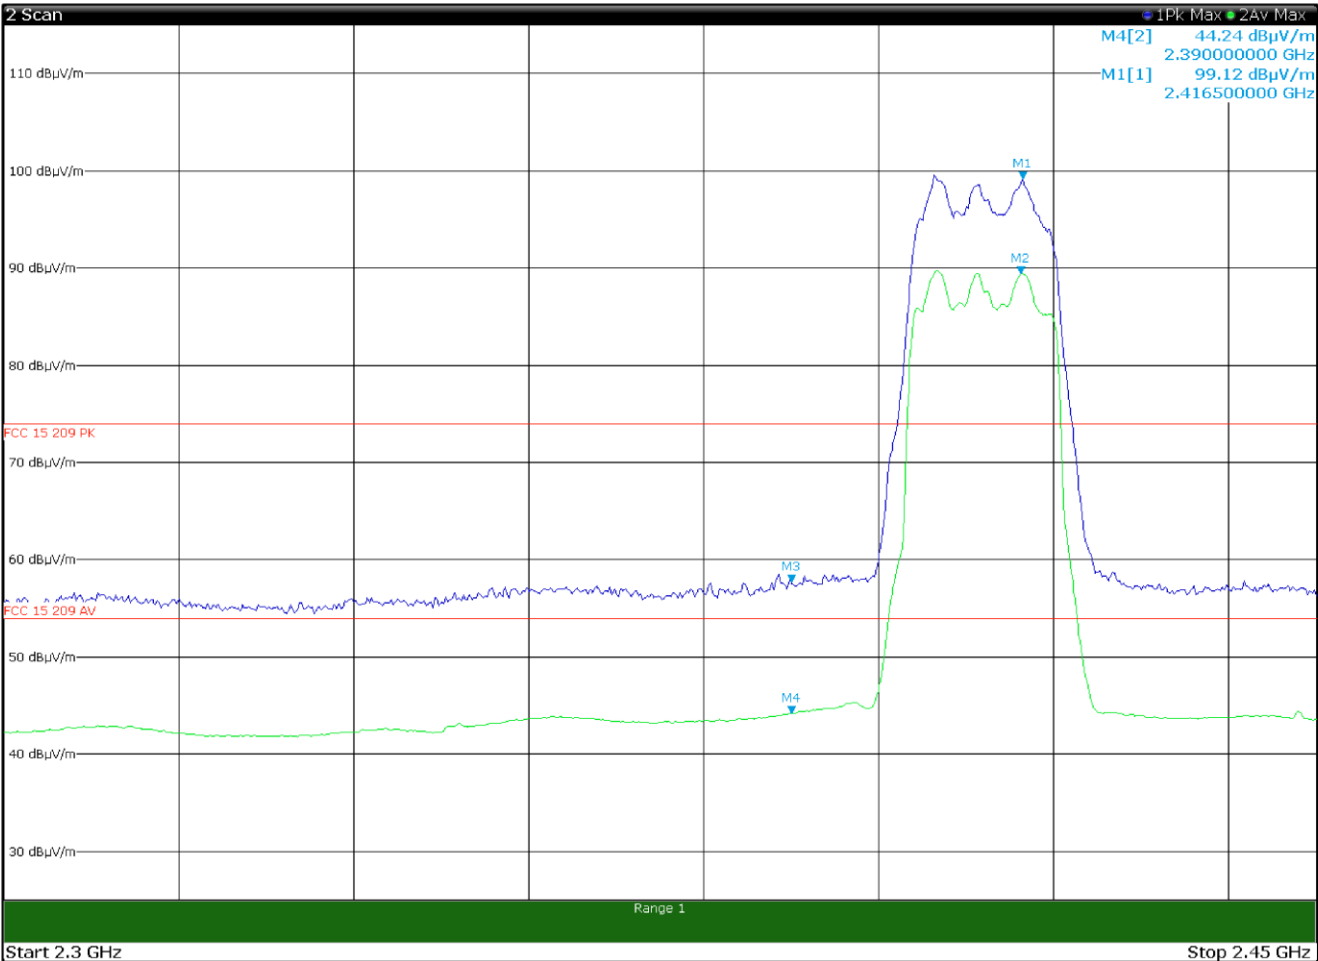

17:09:07 26.07.2019

Page 1/2


3 Marker Table					
Wnd	Type	Ref	Trc	X-value	Y-value
Scan	M1		1	2.4165 GHz	99.12 dBμV/m
Scan	M2		2	2.41625 GHz	89.38 dBμV/m
Scan	M3		1	2.39 GHz	57.67 dBμV/m
Scan	M4		2	2.39 GHz	44.24 dBμV/m

6.10.4 Authorized-band band-edge measurements (relative method)



Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

6.10.5 Restricted-band band-edge measurements protocol 802.11n HT40, vertical

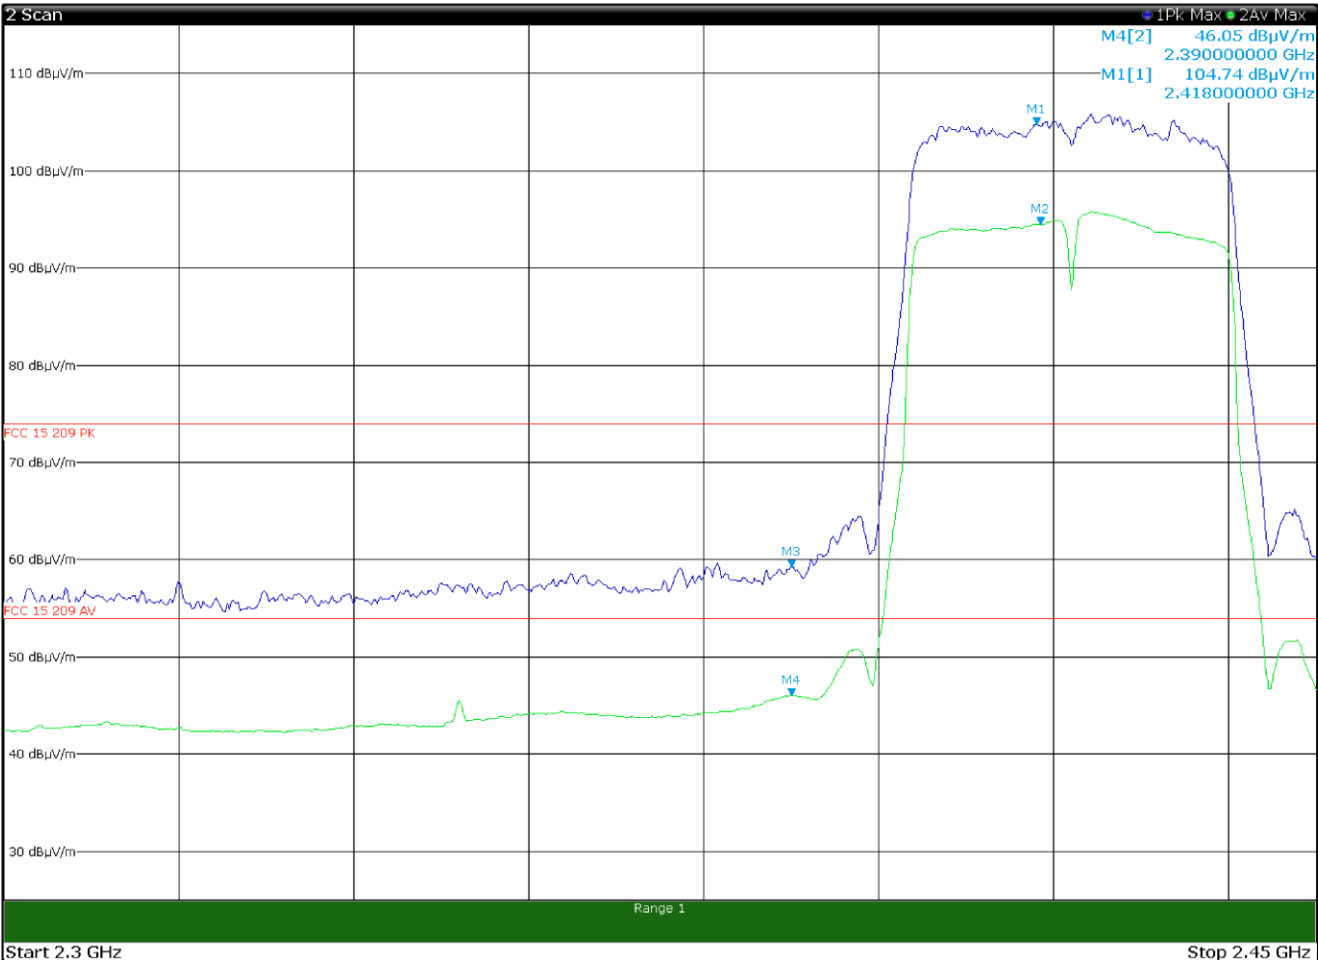

16:30:32 26.07.2019

Page 1/2


3 Marker Table					
Wnd	Type	Ref	Trc	X-value	Y-value
Scan	M1		1	2.418 GHz	104.74 dBμV/m
Scan	M2		2	2.4185 GHz	94.43 dBμV/m
Scan	M3		1	2.39 GHz	59.24 dBμV/m
Scan	M4		2	2.39 GHz	46.05 dBμV/m

6.10.4 Authorized-band band-edge measurements (relative method)



Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

6.10.5 Restricted-band band-edge measurements protocol 802.11n HT40,, horizontal

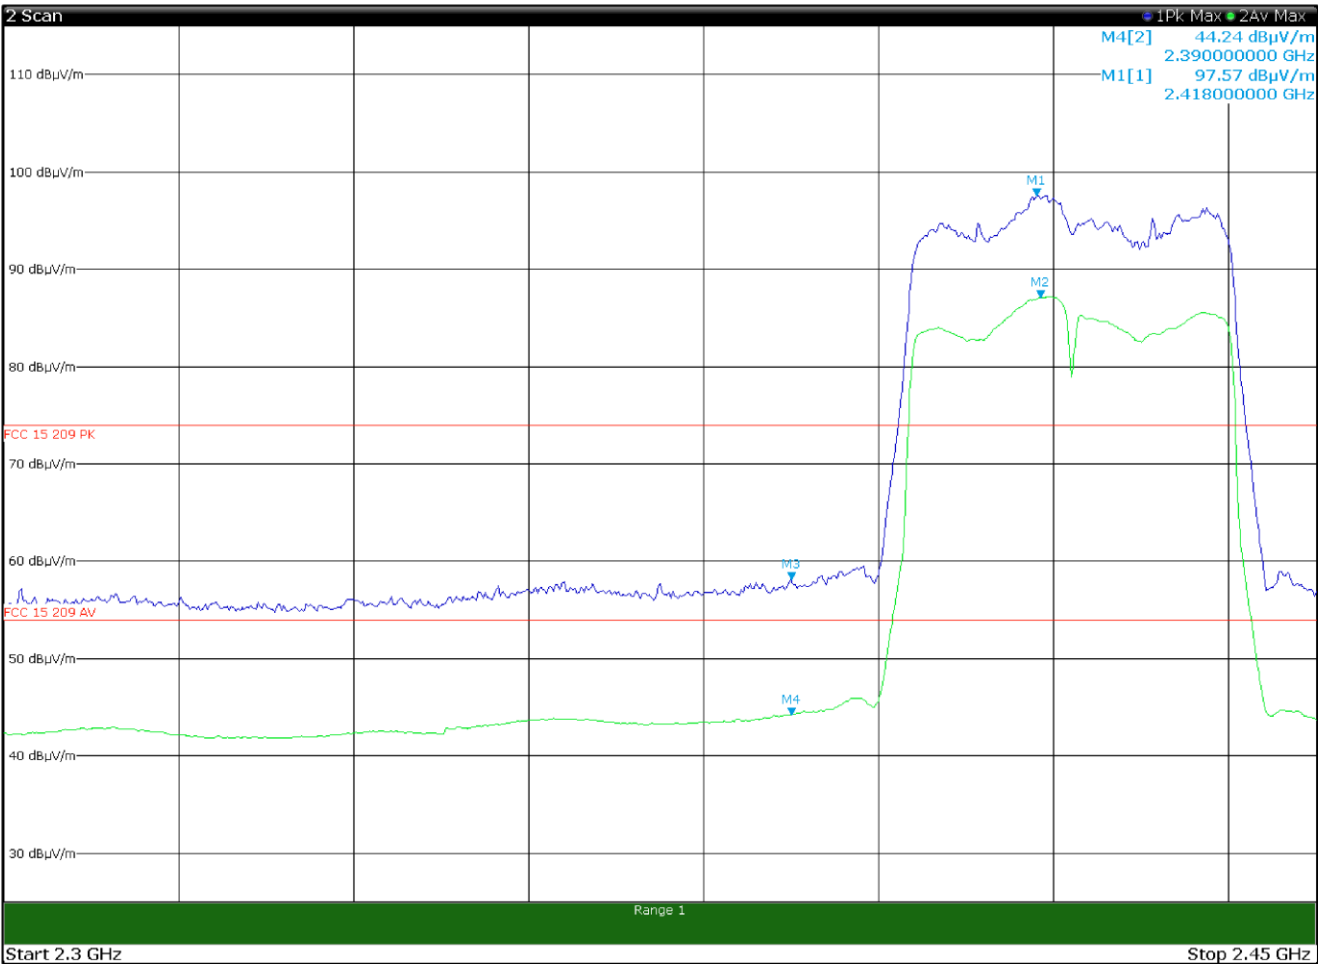

16:26:56 26.07.2019

Page 1/2


3 Marker Table					
Wnd	Type	Ref	Trc	X-value	Y-value
Scan	M1		1	2.418 GHz	97.57 dBμV/m
Scan	M2		2	2.4185 GHz	87.06 dBμV/m
Scan	M3		1	2.39 GHz	58.12 dBμV/m
Scan	M4		2	2.39 GHz	44.24 dBμV/m

6.10.4 Authorized-band band-edge measurements (relative method)



Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

6.10.5 Restricted-band band-edge measurements protocol 802.11b, vertical

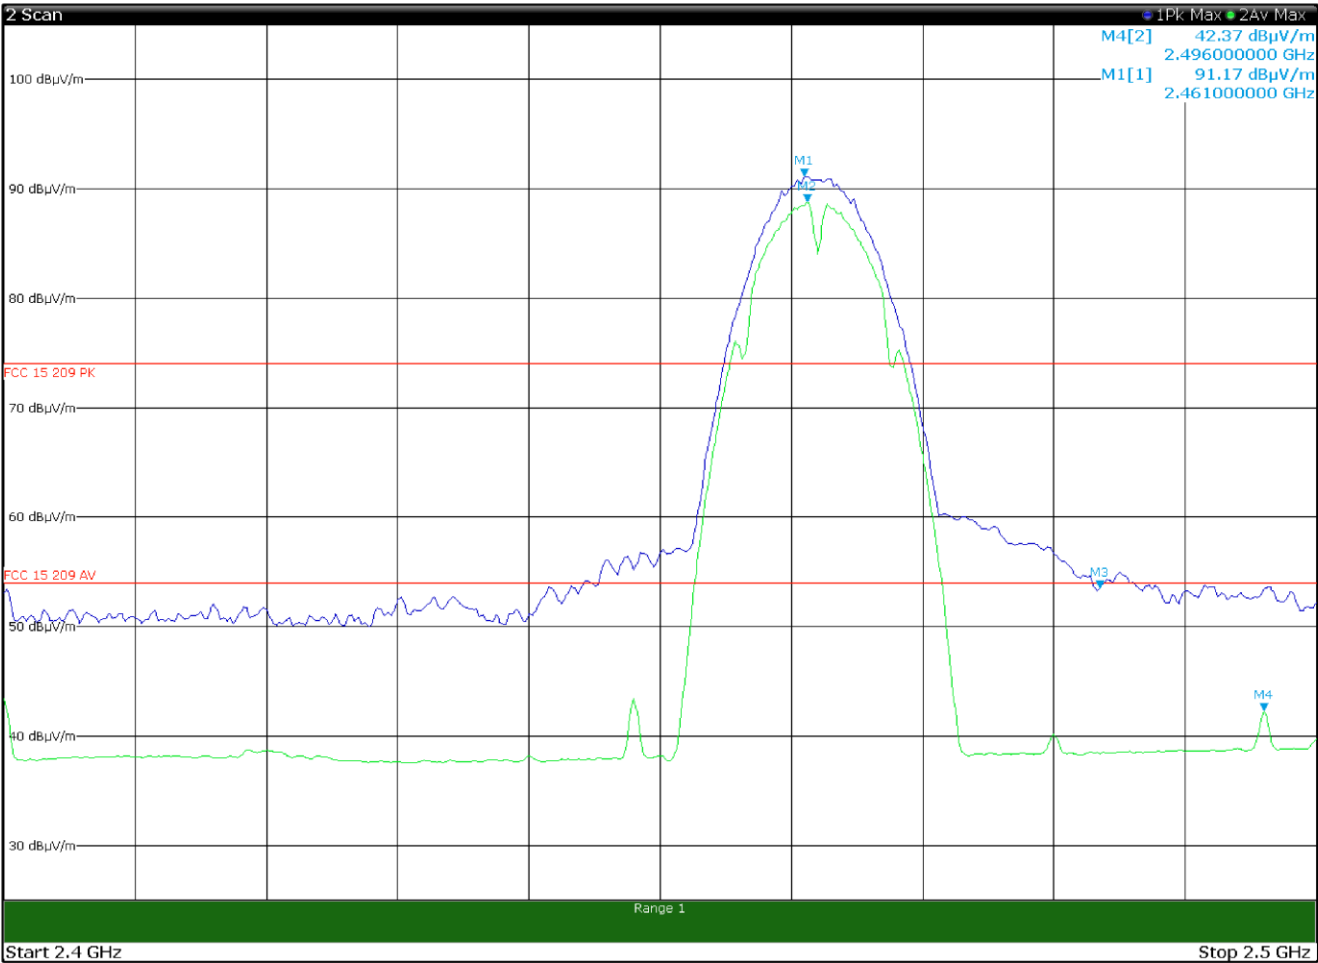

15:54:39 26.07.2019

Page 1/2

3 Marker Table					
Wnd	Type	Ref	Trc	X-value	Y-value
Scan	M1		1	2.461 GHz	91.17 dBµV/m
Scan	M2		2	2.46125 GHz	88.84 dBµV/m
Scan	M3		1	2.4835 GHz	53.54 dBµV/m
Scan	M4		2	2.496 GHz	42.37 dBµV/m


6.10.4 Authorized-band band-edge measurements (relative method)

n/a



Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

6.10.5 Restricted-band band-edge measurements protocol 802.11b, horizontal

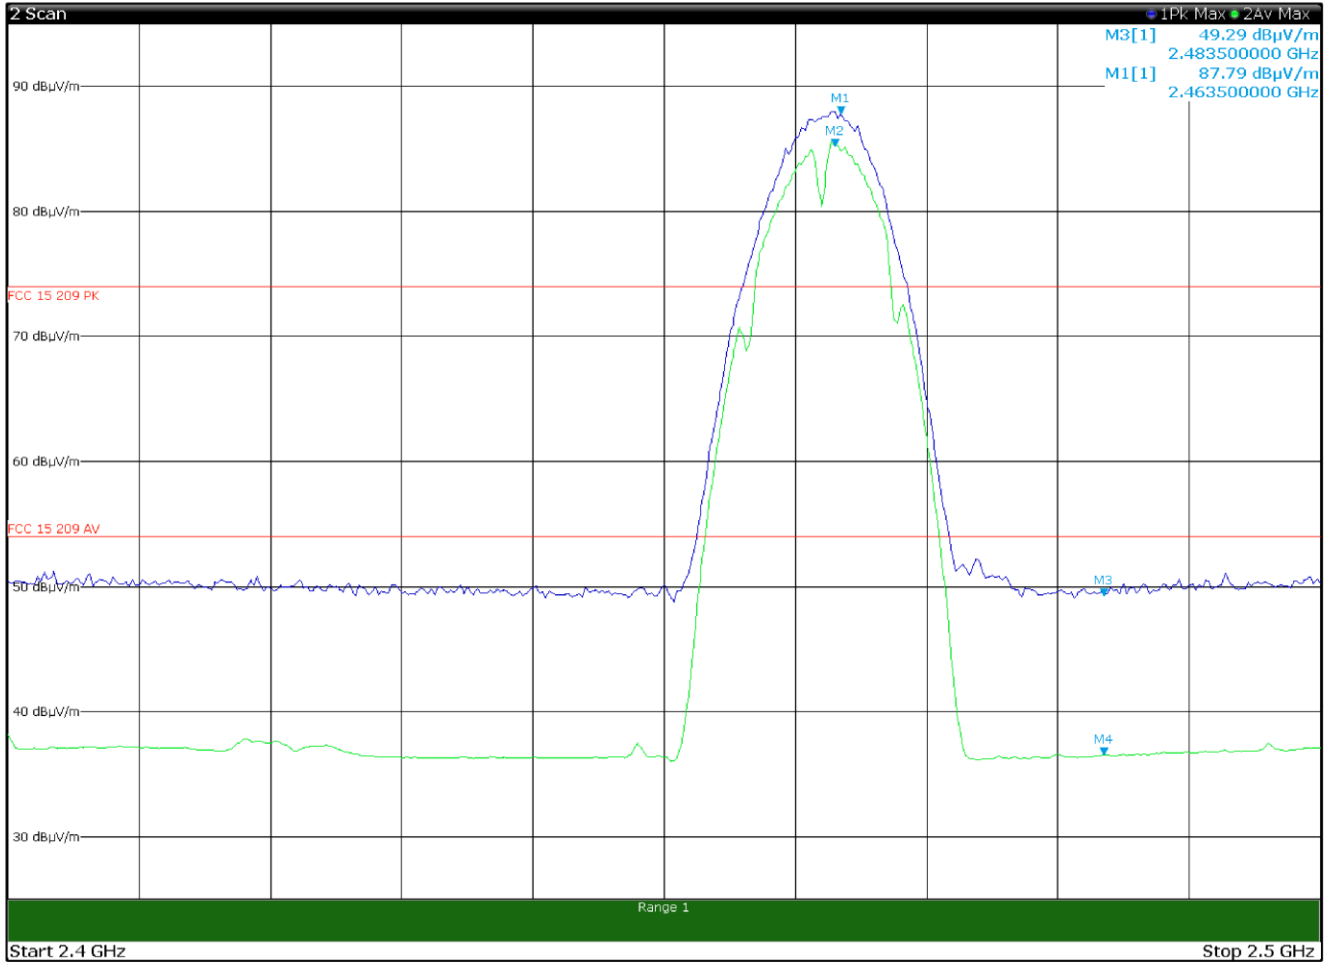

15:50:12 26.07.2019

Page 1/2

3 Marker Table					X-value	Y-value
Wnd	Type	Ref	Trc			
Scan	M1		1		2.4635 GHz	87.79 dBµV/m
Scan	M2		2		2.463 GHz	85.22 dBµV/m
Scan	M3		1		2.4835 GHz	49.29 dBµV/m
Scan	M4		2		2.4835 GHz	36.54 dBµV/m


6.10.4 Authorized-band band-edge measurements (relative method)

na



Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

6.10.5 Restricted-band band-edge measurements protocol 802.11g, vertical

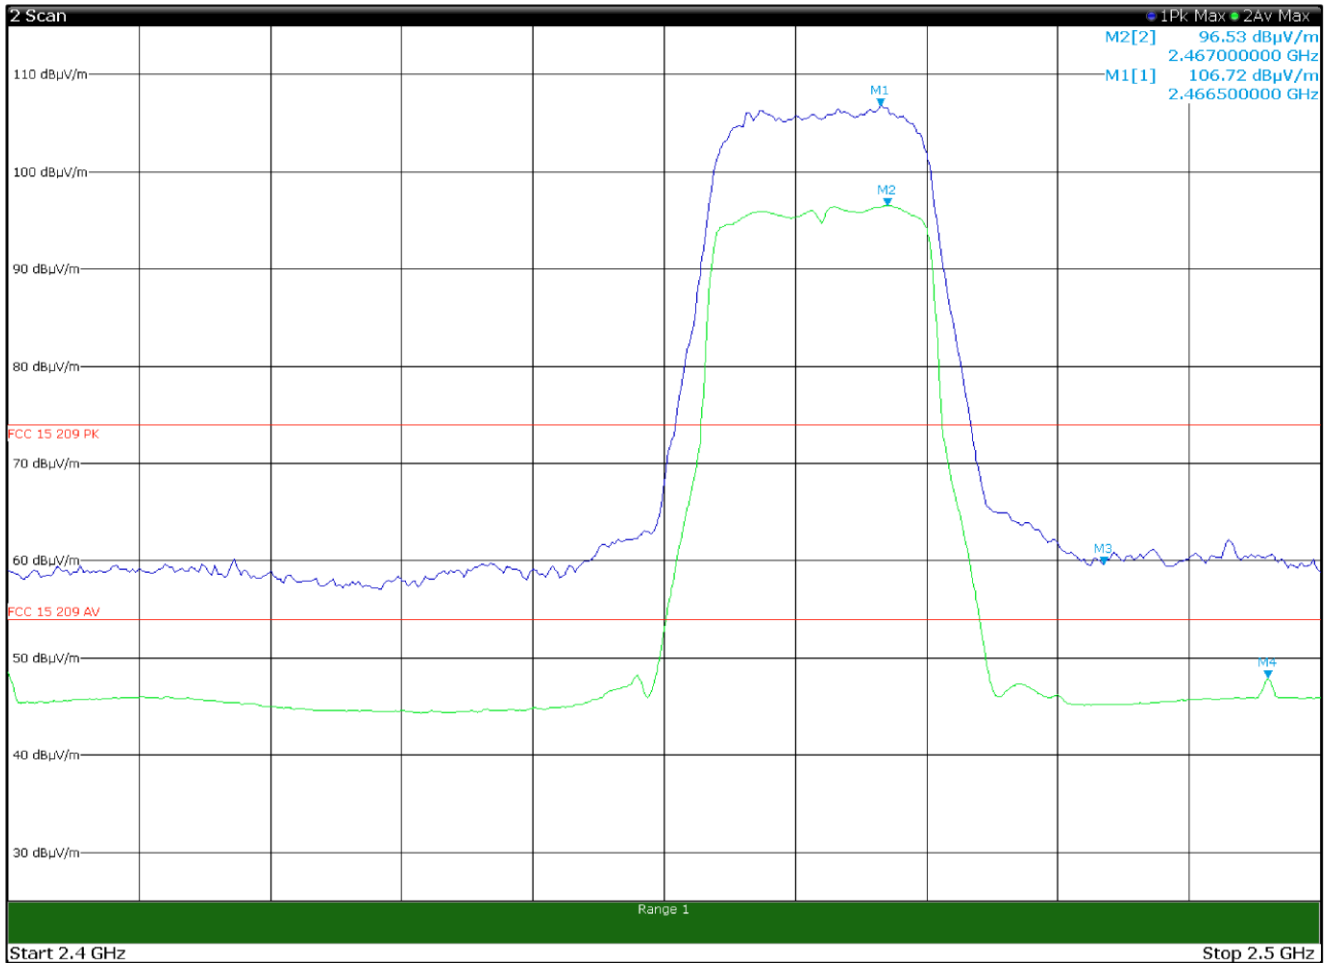

16:01:37 26.07.2019


Page 1/2

3 Marker Table					
Wnd	Type	Ref	Trc	X-value	Y-value
Scan	M1		1	2.4665 GHz	106.72 dBμV/m
Scan	M2		2	2.467 GHz	96.53 dBμV/m
Scan	M3		1	2.4835 GHz	59.61 dBμV/m
Scan	M4		2	2.496 GHz	47.93 dBμV/m

6.10.4 Authorized-band band-edge measurements (relative method)
na

Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

6.10.5 Restricted-band band-edge measurements protocol 802.11g, horizontal

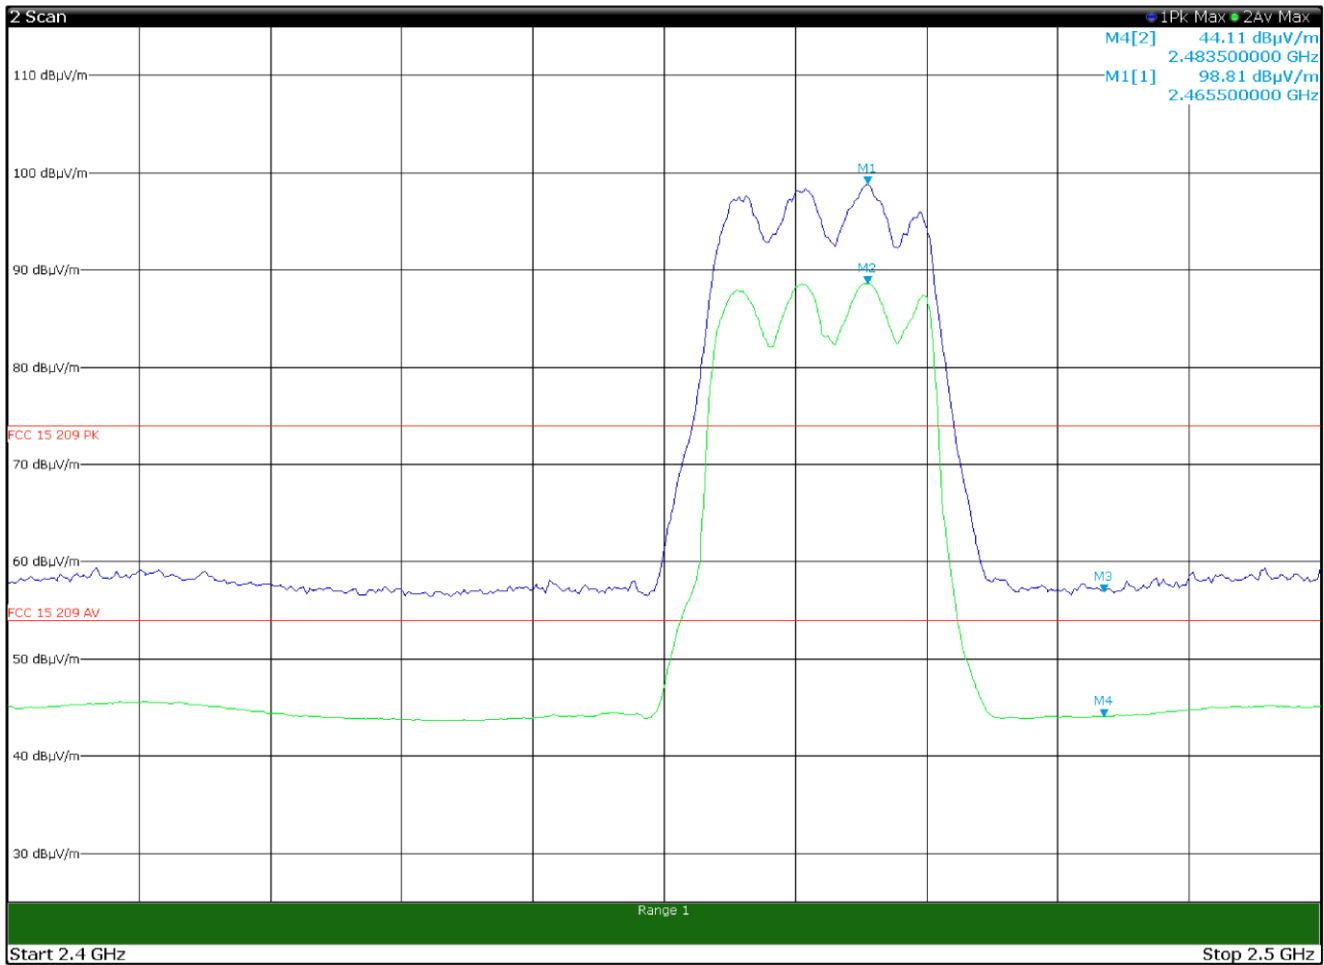

16:06:12 26.07.2019

Page 1/2


3 Marker Table					
Wnd	Type	Ref	Trc	X-value	Y-value
Scan	M1		1	2.4655 GHz	98.81 dBμV/m
Scan	M2		2	2.4655 GHz	88.62 dBμV/m
Scan	M3		1	2.4835 GHz	56.94 dBμV/m
Scan	M4		2	2.4835 GHz	44.11 dBμV/m

6.10.4 Authorized-band band-edge measurements (relative method)



Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

6.10.5 Restricted-band band-edge measurements protocol 802.11n HT20, vertical

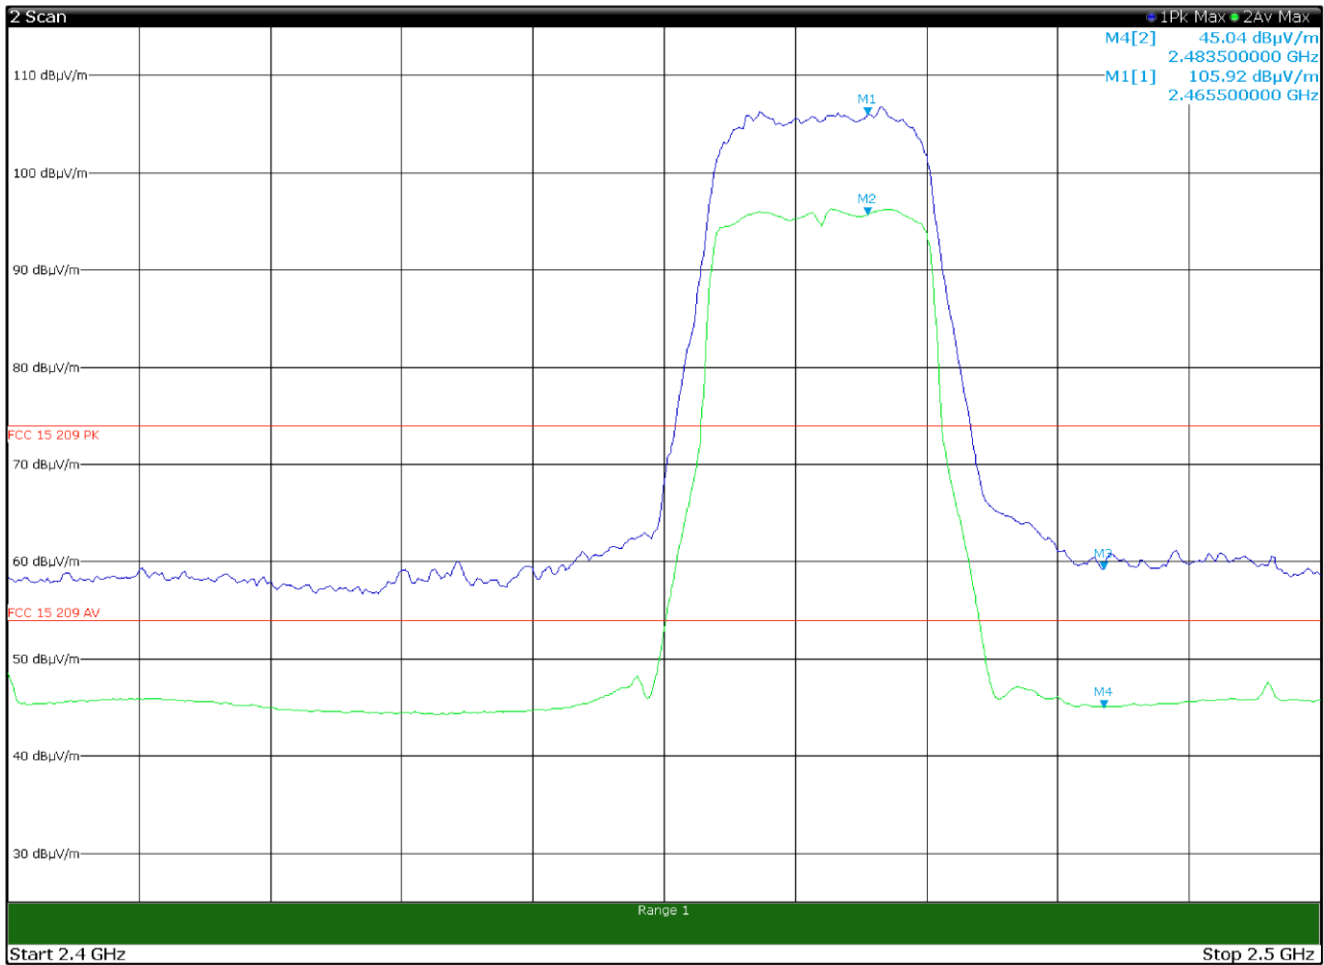

16:10:19 26.07.2019

Page 1/2

3 Marker Table						
Wnd	Type	Ref	Trc	X-value	Y-value	
Scan	M1		1	2.4655 GHz	105.92 dBμV/m	
Scan	M2		2	2.4655 GHz	95.67 dBμV/m	
Scan	M3		1	2.4835 GHz	59.2 dBμV/m	
Scan	M4		2	2.4835 GHz	45.04 dBμV/m	


6.10.4 Authorized-band band-edge measurements (relative method)

na



Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

6.10.5 Restricted-band band-edge measurements protocol 802.11n HT20, horizontal

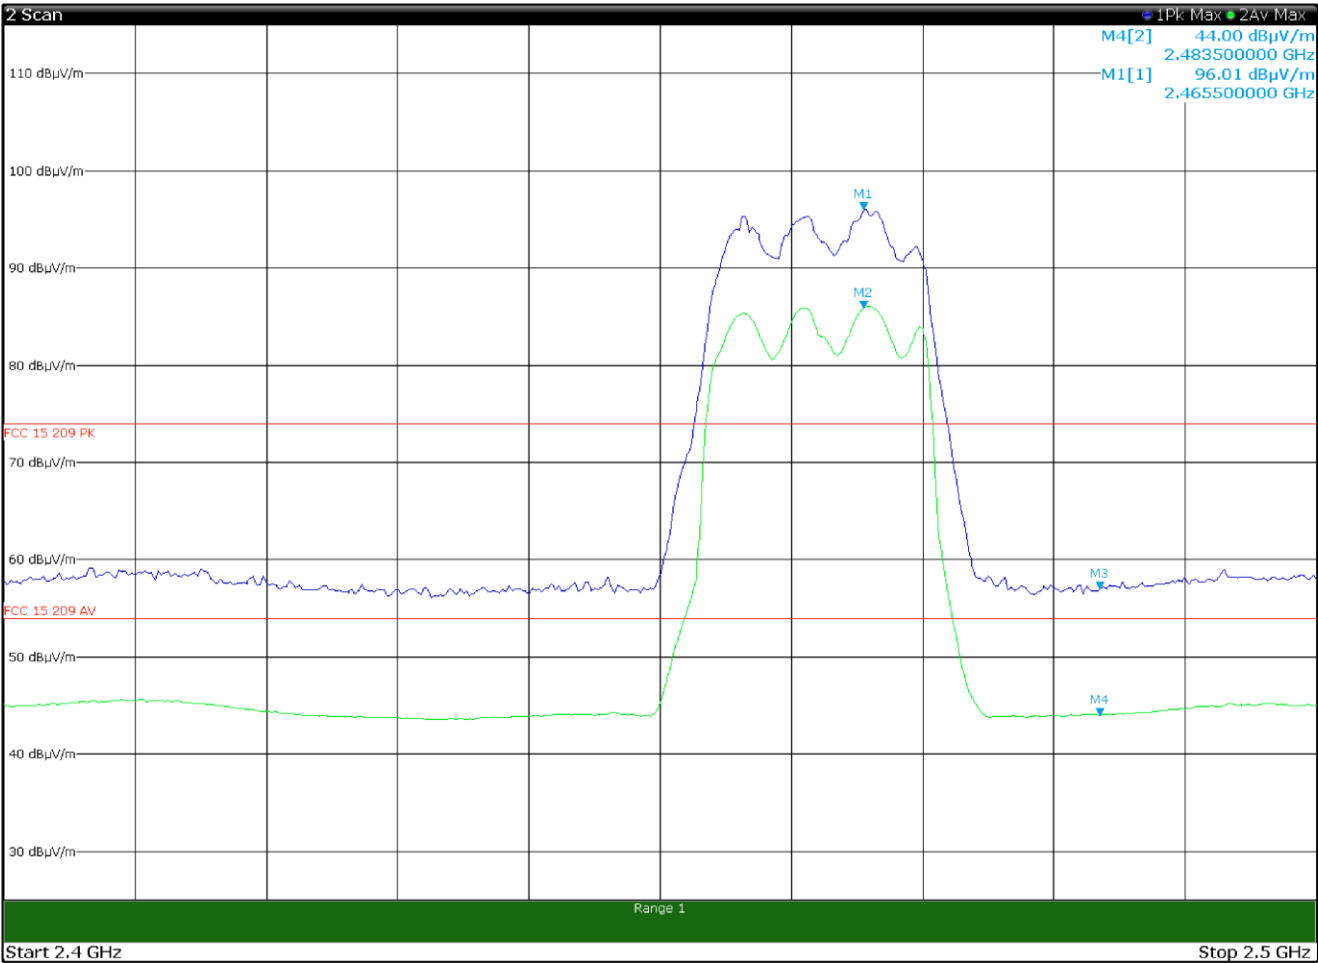

16:08:41 26.07.2019

Page 1/2

6.10.4 Authorized-band band-edge measurements (relative
m


3 Marker Table					
Wnd	Type	Ref	Trc	X-value	Y-value
Scan	M1		1	2.4635 GHz	87.79 dBµV/m
Scan	M2		2	2.463 GHz	85.22 dBµV/m
Scan	M3		1	2.4835 GHz	49.29 dBµV/m
Scan	M4		2	2.4835 GHz	36.54 dBµV/m

ethod)



Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

6.10.5 Restricted-band band-edge measurements protocol 802.11n HT40, vertical

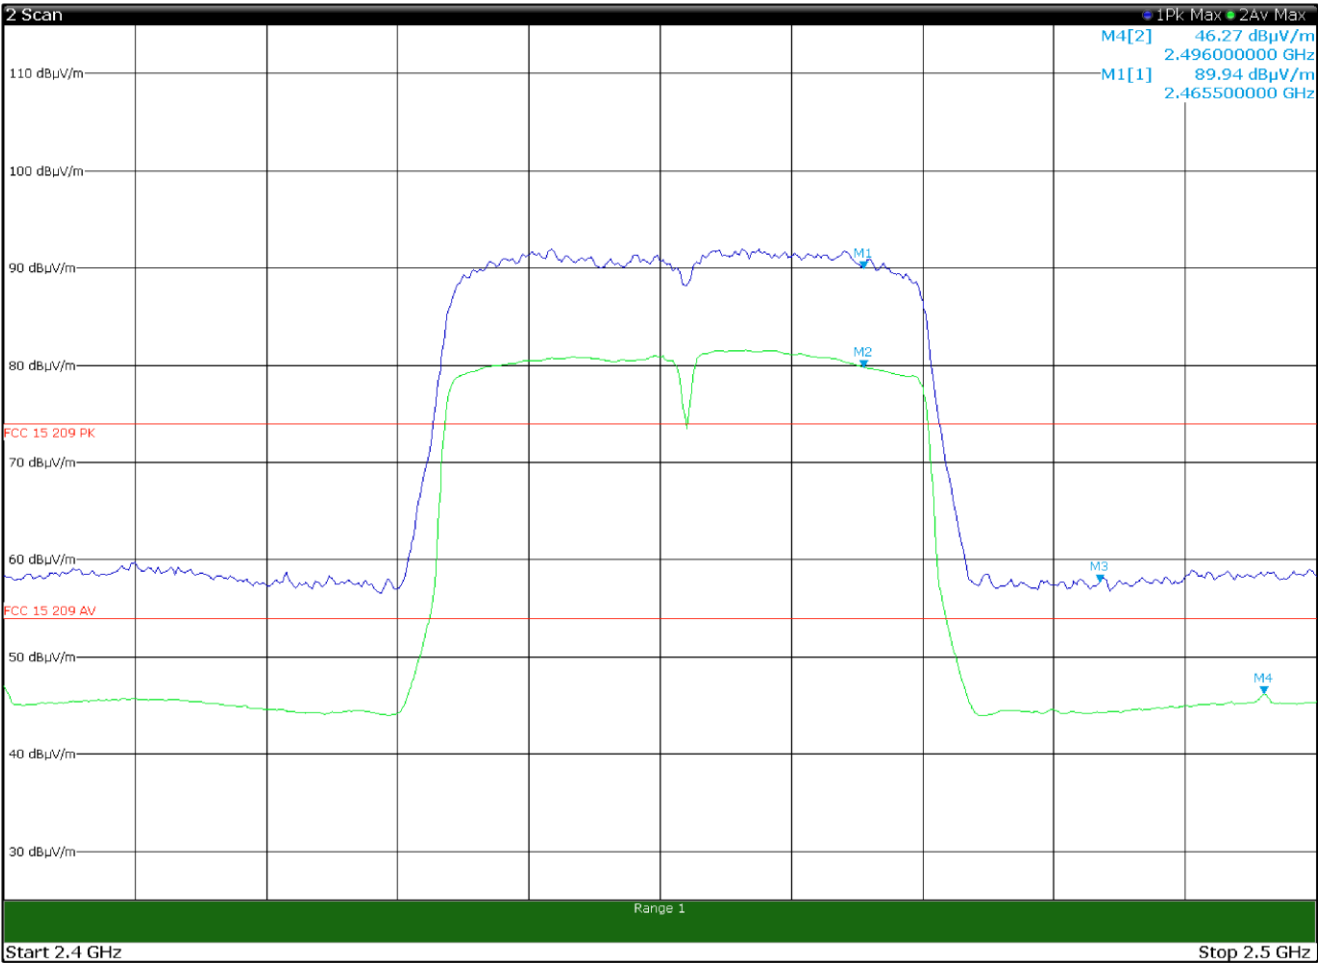

16:14:28 26.07.2019

Page 1/2

3 Marker Table					
Wnd	Type	Ref	Trc	X-value	Y-value
Scan	M1		1	2.4655 GHz	89.94 dBμV/m
Scan	M2		2	2.4655 GHz	79.8 dBμV/m
Scan	M3		1	2.4835 GHz	57.75 dBμV/m
Scan	M4		2	2.496 GHz	46.27 dBμV/m


6.10.4 Authorized-band band-edge measurements (relative method)

na



Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

6.10.5 Restricted-band band-edge measurements protocol 802.11n HT40, horizontal

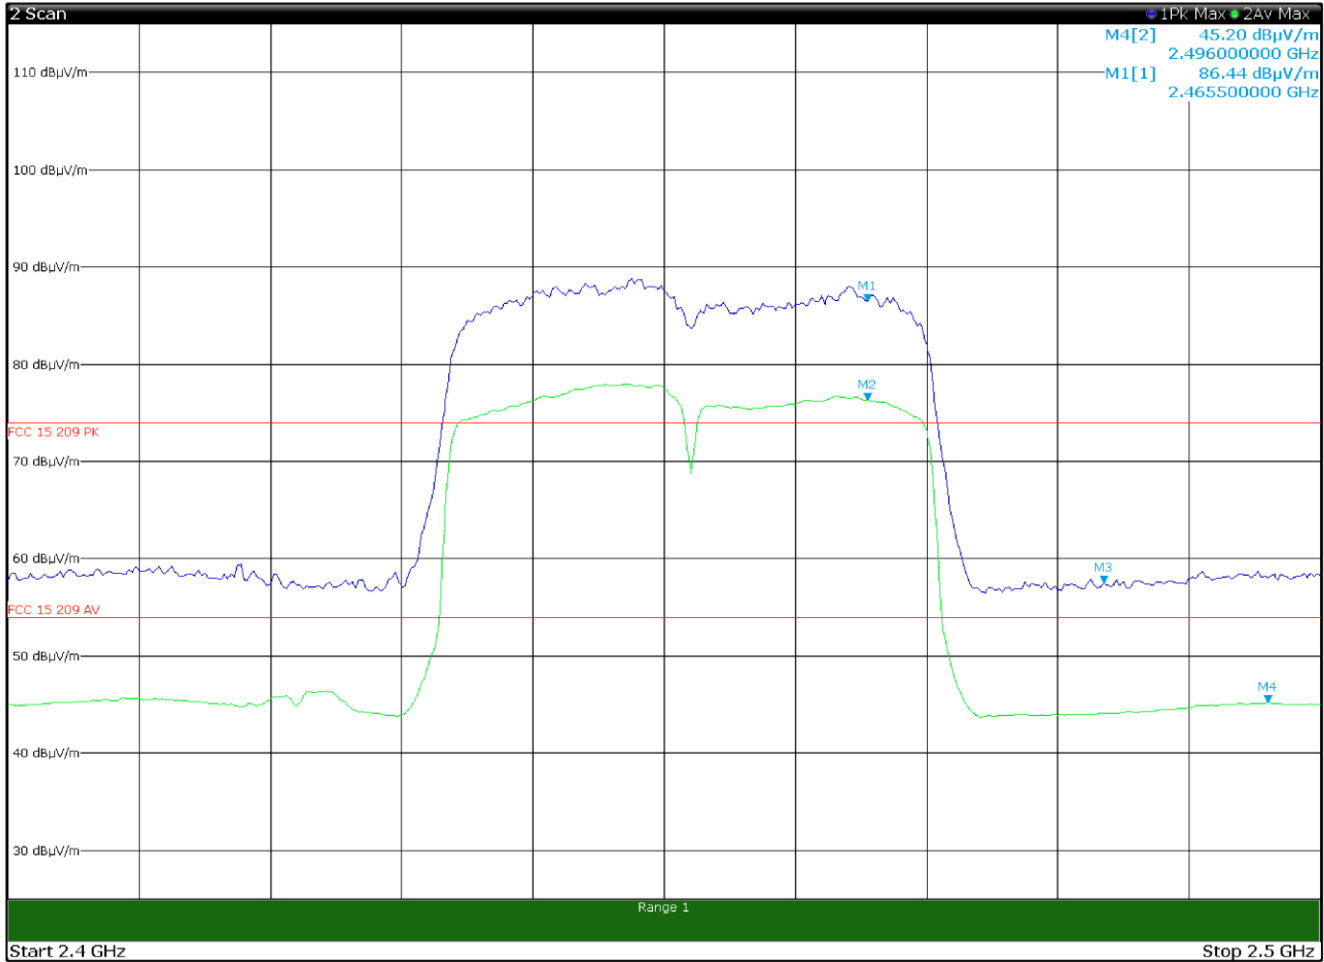

16:17:13 26.07.2019

Page 1/2

3 Marker Table					
Wnd	Type	Ref	Trc	X-value	Y-value
Scan	M1		1	2.4655 GHz	86.44 dBµV/m
Scan	M2		2	2.4655 GHz	76.31 dBµV/m
Scan	M3		1	2.4835 GHz	57.51 dBµV/m
Scan	M4		2	2.496 GHz	45.2 dBµV/m

6.10.4 Authorized-band band-edge measurements (relative method)




Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

8.7.1 Test data, continued

Also other modulations have been investigated: not appreciable variation of the results were obtained

Section 8 Radiated measurement 802.11n HT40 horizontal polarization

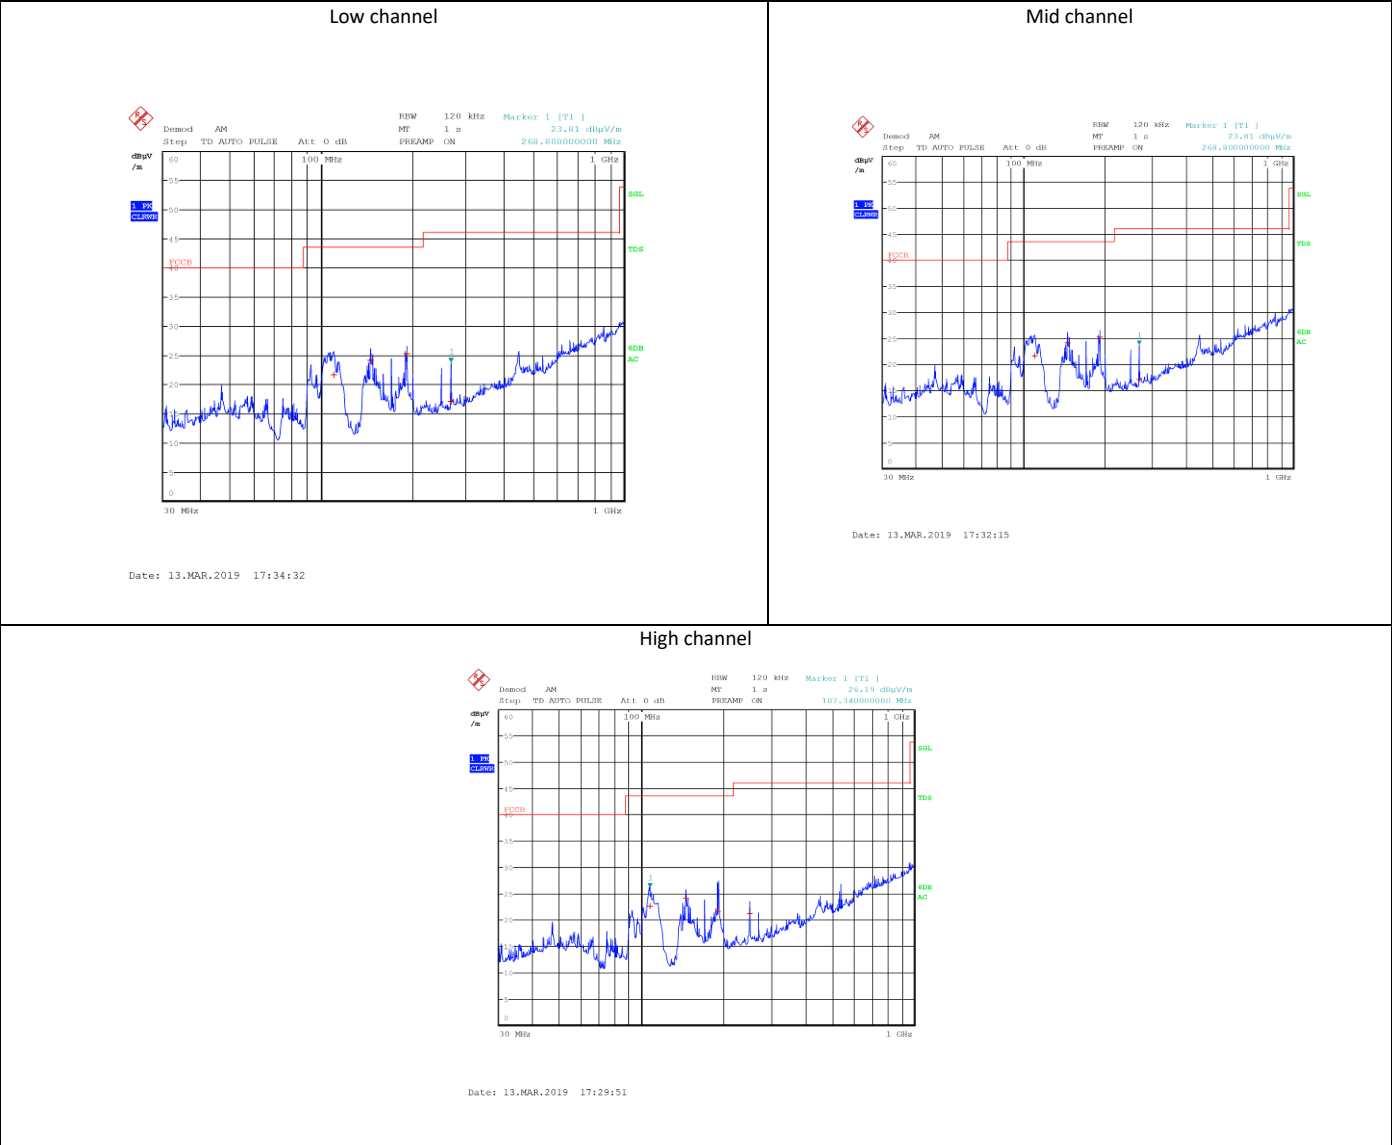


Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
109.8000	21.7	43.5	-21.8	QP
145.2600	24.2	43.5	-19.3	QP
192.0000	25.3	43.5	-18.2	QP
268.8000	17.1	46.0	-28.9	QP

Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4


Section 8 Radiated measurement 802.11n HT40 vertical polarization

Low channel

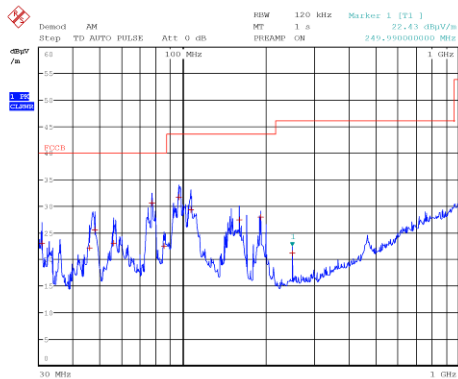


Date: 13.MAR.2019 17:25:15

Mid channel

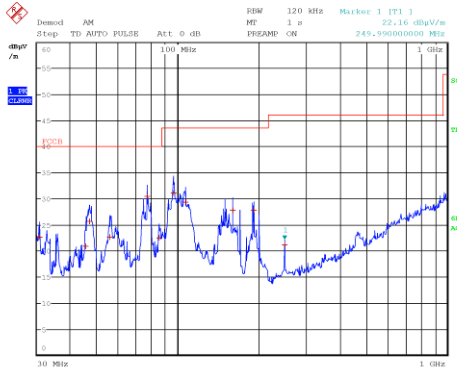

Date: 13.MAR.2019 17:27:15

High channel

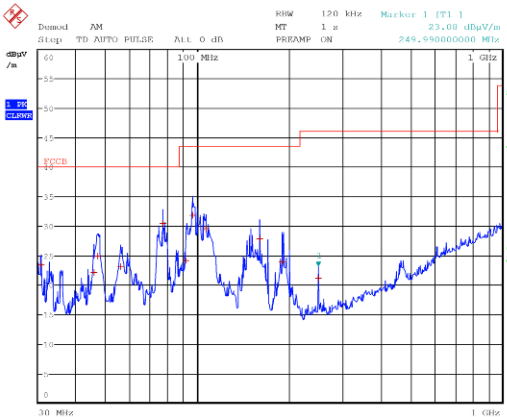

Date: 13.MAR.2019 17:28:33

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
30.5700	22.7	40.0	-17.3	QP
45.6000	21.0	40.0	-19.0	QP
47.0100	25.7	40.0	-14.3	QP
56.0700	22.7	40.0	-17.3	QP
77.1900	30.5	40.0	-9.5	QP
85.5000	22.5	40.0	-17.5	QP
96.6900	31.2	43.5	-12.3	QP
106.7100	29.4	43.5	-14.1	QP
159.9900	27.9	43.5	-15.6	QP
192.0000	27.9	43.5	-15.6	QP
249.9900	21.1	46.0	-24.9	QP

Test name FCC 15.407(g) and RSS-Gen 8.11 Frequency stability
Specification FCC Part 15 Subpart E and RSS-Gen Issue 4

Section 8 Radiated measurement 802.11n HT40 horizontal polarization

Low channel

