

Company: MikroTik

Test of: RBD52G-5HacD2HnD-TC

To: FCC Subpart C 15.247 (DTS), IC RSS-247

Report No.: MIKO65-U3 Rev A

COMPLETE TEST REPORT





Test of: MikroTik RBD52G-5HacD2HnD-TC

To: FCC Subpart C 15.247 (DTS), IC RSS-247

Test Report Serial No.: MIKO65-U3 Rev A

This report supersedes: NONE

Applicant: MikroTik
Aizkraukles iela 23
Riga, LV-1006
Latvia

Product function: 802.11b/g/n/ac wireless router

Issue Date: 22nd December 2017

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
575 Boulder Court
Pleasanton California 94566
USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 3 of 191

Table of Contents

1. ACCREDITATION, LISTINGS & RECOGNITION.....	5
1.1. TESTING ACCREDITATION.....	5
1.2. RECOGNITION	6
1.3. PRODUCT CERTIFICATION	7
2. DOCUMENT HISTORY	8
3. TEST RESULT CERTIFICATE.....	9
4. REFERENCES AND MEASUREMENT UNCERTAINTY	10
4.1. Normative References	10
4.2. Test and Uncertainty Procedure	11
5. PRODUCT DETAILS AND TEST CONFIGURATIONS.....	12
5.1. Technical Details	12
5.2. Scope Of Test Program	13
5.3. Equipment Model(s) and Serial Number(s)	14
5.4. Antenna Details	14
5.5. Cabling and I/O Ports	14
5.6. Test Configurations.....	15
5.7. Equipment Modifications	15
5.8. Deviations from the Test Standard	15
6. TEST SUMMARY	16
7. TEST EQUIPMENT CONFIGURATION(S)	17
7.1. Conducted	17
7.1. Radiated Emissions - 3m Chamber.....	19
7.2. AC Wireline Emissions	22
8. MEASUREMENT AND PRESENTATION OF TEST DATA	24
9. TEST RESULTS	25
9.1. 6 dB & 99% Bandwidth	25
9.2. Conducted Output Power	30
9.3. Power Spectral Density	34
9.4. Emissions	39
9.4.1. <i>Conducted Emissions</i>	39
9.4.1.1. Conducted Spurious Emissions	39
9.4.1.2. Conducted Band-Edge Emissions	44
<i>Lower Band-Edge Emissions</i>	44
<i>Upper Band-Edge Emissions</i>	48
9.4.2. <i>Radiated Emissions</i>	52
9.4.2.3. TX Spurious & Restricted Band Emissions	52
<i>Lower Band-Edge Emissions</i>	58
<i>Upper Band-Edge Emissions</i>	63
9.4.3. <i>Digital Emissions (0.03 - 1 GHz)</i>	68
9.4.4. <i>AC Wireline Emissions</i>	72
A. APPENDIX - GRAPHICAL IMAGES	75
A.1. 6 dB & 99% Bandwidth	76
A.2. Power Spectral Density	100
A.3. Emissions	136
A.3.1. <i>Conducted Emissions</i>	136
A.3.1.1. Conducted Spurious Emissions	136
<i>Low Band-Edge Emissions</i>	160
<i>High Band-Edge Emissions</i>	168

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 4 of 191

A.3.2. Radiated Emissions	176
A.3.2.2. TX Spurious & Restricted Band Emissions.....	176
A.3.2.3. Restricted Edge & Band-Edge Emissions	179
Low Band-Edge Emissions.....	179
High Band-Edge Emissions	183
A.3.3. Digital Emissions (0.03 – 1 GHz).....	187
A.3.4. AC Wireline Emissions	189

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

1. ACCREDITATION, LISTINGS & RECOGNITION

1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2005. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 6 of 191

1.2. RECOGNITION

MiCOM Labs, Inc has widely recognized wireless testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA countries. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	US0159 Listing #: 4143A-2 4143A-3
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	RCB 210
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

EU MRA – European Union Mutual Recognition Agreement.

NB – Notified Body

APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement. Recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



United States of America – Telecommunication Certification Body (TCB)

Industry Canada – Certification Body, CAB Identifier – US0159

Europe – Notified Body (NB), NB Identifier - 2280

Japan – Recognized Certification Body (RCB), RCB Identifier - 210



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 8 of 191

2. DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft	13th December 2017	Draft report for client review.
Rev A	22 nd December 2017	Initial release.
.		
.		
.		
.		
.		

In the above table the latest report revision will replace all earlier versions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 9 of 191

3. TEST RESULT CERTIFICATE

Manufacturer: MikroTik Aizkraukles iela 23 Riga LV 1006 Latvia	Tested By: MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Model: MikroTik hAP ac	Telephone: +1 925 462 0304
Type Of Equipment: WLAN Access Point	Fax: +1 925 462 0306
S/N's: 5	
Test Date(s): 30 th October – 29 th November 2017	Website: www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC Subpart C 15.247 (DTS), IC RSS-247	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:



Graeme Grieve
Quality Manager MiCOM Labs, Inc.

Gordon Hurst
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

4. REFERENCES AND MEASUREMENT UNCERTAINTY

4.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
I	KDB 662911 D01 & D02	Oct 31 2013	Guidance for measurement of output emission of devices that employ single transmitter with multiple outputs or systems with multiple transmitters operating simultaneously in the same frequency band
II	KDB 558074 D01 v04	5th April 2017	Guidance for performing compliance measurements on Digital Transmission Systems (DTS) operating under section 15.247.
III	A2LA	August 2017	R105 - Requirement's When Making Reference to A2LA Accreditation Status
IV	ANSI C63.10	2013	American National Standard for Testing Unlicensed Wireless Devices
V	ANSI C63.4	2014	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
VI	CISPR 32	2015	Electromagnetic compatibility of multimedia equipment - Emission requirements
VII	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
VIII	FCC 47 CFR Part 15.247	2016	Radio Frequency Devices; Subpart C – Intentional Radiators
IX	ICES-003	Issue 6 Jan 2016; Updated April 2017	Spectrum Management and Telecommunications; Interference-Causing Equipment Standard. Information Technology Equipment (Including Digital Apparatus) – Limits and methods of measurement.
X	M 3003	Edition 3 Nov.2012	Expression of Uncertainty and Confidence in Measurements
XI	RSS-247 Issue 2	Feb 2017	Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
XII	RSS-Gen Issue 4	November 2014	General Requirements and Information for the Certification of Radiocommunication Equipment
XIII	KDB 644545 D03 v01	August 14th 2014	Guidance for IEEE 802.11ac New Rules
XIV	FCC 47 CFR Part 2.1033	2016	FCC requirements and rules regarding photographs and test setup diagrams.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 11 of 191

4.2. Test and Uncertainty Procedure

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 12 of 191

5. PRODUCT DETAILS AND TEST CONFIGURATIONS

5.1. Technical Details

Details	Description
Purpose:	Test of the MikroTik RBD52G-5HacD2HnD-TC to FCC Subpart C 15.247 (DTS), IC RSS-247.
Applicant:	MikroTik Aizkraukles iela 23 Riga LV 1006 Latvia
Manufacturer:	MikroTik
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Test report reference number:	MIKO65-U3 Rev A
Date EUT received:	30th October 2017
Standard(s) applied:	FCC Subpart C 15.247 (DTS), IC RSS-247
Dates of test (from - to):	30 th October – 30 th November 2017
No of Units Tested:	1
Product Family Name:	RouterBOARD
Model(s):	RBD52G-5HacD2HnD-TC
Location for use:	Indoors
Declared Frequency Range(s):	2400 - 2483.5 MHz;
Type of Modulation:	CCK, OFDM
EUT Modes of Operation:	802.11b; 802.11g; 802.11n HT-20; 802.11n HT-40;
Declared Nominal Output Power (dBm):	27.00
Transmit/Receive Operation:	2
Rated Input Voltage and Current:	POE adaptor sold with unit 24 Vdc AC/DC adaptor sold with unit 24 Vdc
Operating Temperature Range:	Declared Range -20°C to 35°C
ITU Emission Designator:	802.11b 13M5G1D 802.11g 30M3D1D 802.11n HT-20 30M3D1D 802.11n HT-40 36M2D1D
Equipment Dimensions:	34 mm x 119 mm x 99 mm
Weight:	0.17 Kg
Hardware Rev:	r2
Software Rev:	WinBox 6.40.4 on hAP ac^2(arm)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

5.2. Scope Of Test Program

MikroTik RBD52G-5HacD2HnD-TC

The scope of the test program was to test the MikroTik RBD52G-5HacD2HnD-TC configurations in the frequency ranges 2400 - 2483.5 MHz; for compliance against the following specification:


FCC Subpart C 15.247 (DTS)

Radio Frequency Devices; Subpart C – Intentional Radiators

Industry Canada RSS-247

This Radio Standard Specification sets out certification requirements for radio apparatus operating in the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz employing frequency hopping, digital modulation and/or a combination (hybrid) of both techniques. It also includes licence-exempt local area network (LE-LAN) devices operating in the bands 5150-5250 MHz, 5250-5350 MHz, 5470-5725 MHz and 5725-5850 MHz as specified in SP-5150 MHz.

MikroTik RBD52G-5HacD2HnD-TC

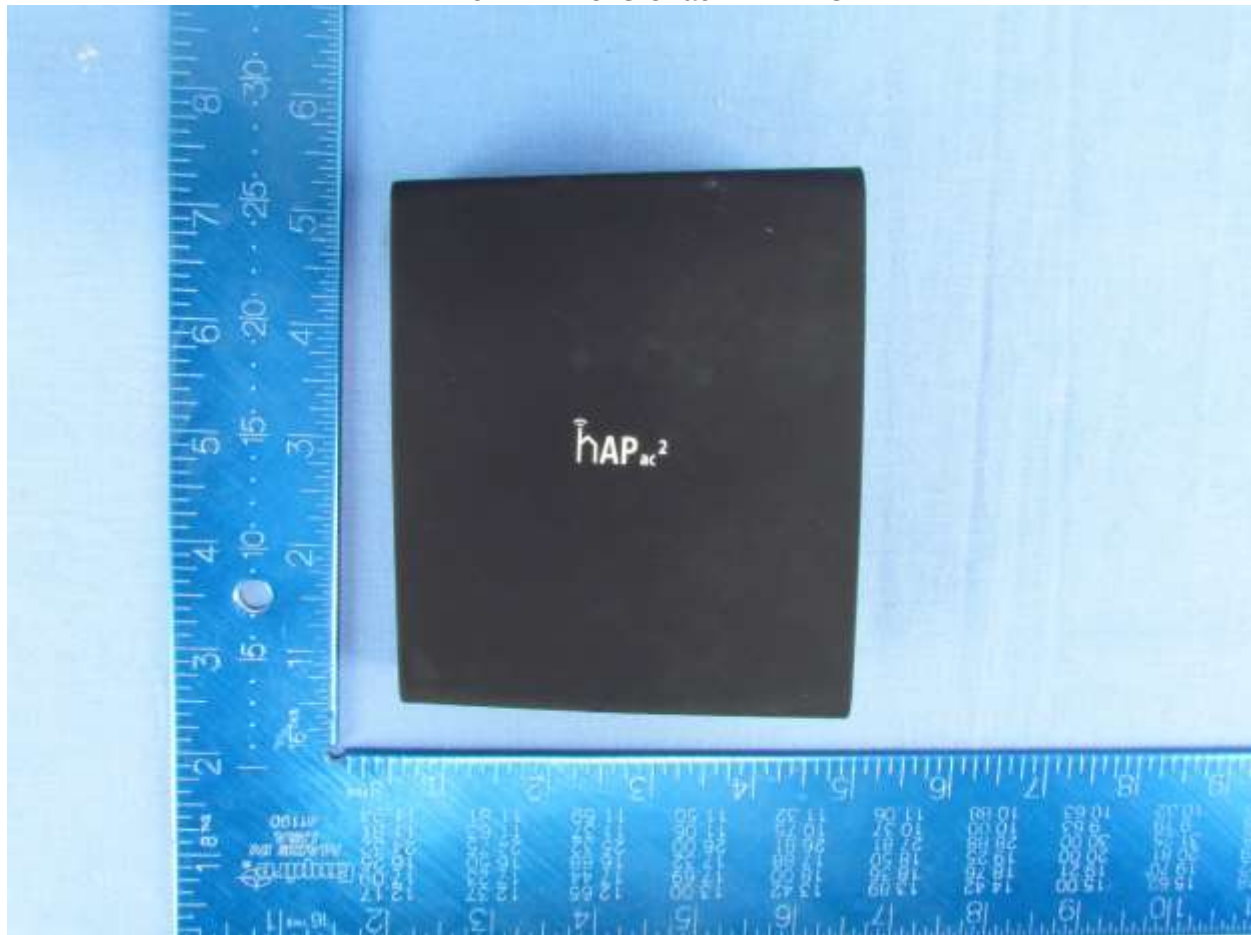

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 14 of 191

5.3. Equipment Model(s) and Serial Number(s)

Type	Description	Manf	Model	Serial No.	Delivery Date
EUT	802.11b/g/n/ac wireless router	MikroTik	RBD52G-5HacD2HnD-TC	8588078BA3C2	6 th November 2017
Support	Laptop PC	DELL	E7450	None	N/A

5.4. Antenna Details

Type	Manufacturer	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
integral	Mikrotik	2.5	-	360	-	2400 - 2483.5

BF Gain - Beamforming Gain
Dir BW - Directional BeamWidth
X-Pol - Cross Polarization

5.5. Cabling and I/O Ports

Port Type	Max Cable Length (m)	# of Ports	Screened	Conn Type	Data Type	Bit Rate
Ethernet	3=<Cable<10	5	--	RJ45	Packet Data	10/100/1000
USB	Cable <3	1	--	USB-Type A	Digital	--

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 15 of 191

5.6. Test Configurations

Results for the following configurations are provided in this report:

Operational Mode(s)	Data Rate with Highest Power MBit/s	Channel Frequency (MHz)		
		Low	Mid	High
2400 - 2483.5 MHz				
802.11b	1.00	2412.00	2437.00	2462.00
802.11g	6.00	2412.00	2437.00	2462.00
802.11n HT-20	6.50	2412.00	2437.00	2462.00
802.11n HT-40	13.50	2422.00	2437.00	2452.00

5.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

5.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 16 of 191

6. TEST SUMMARY

List of Measurements

Test Header	Result	Data Link
6 dB & 99% Bandwidth	Complies	View Data
Conducted Output Power	Complies	View Data
Power Spectral Density	Complies	View Data
Emissions	Complies	-
(1) Conducted Emissions	Complies	-
(i) Conducted Spurious Emissions	Complies	View Data
(ii) Conducted Band-Edge Emissions	Complies	View Data
(2) Radiated Emissions	Complies	-
(i) TX Spurious & Restricted Band Emissions	Complies	View Data
(ii) Restricted Edge & Band-Edge Emissions	Complies	View Data
(3) Digital Emissions (0.03 - 1 GHz)	Complies	View Data
(4) AC Wireline Emissions	Complies	View Data


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

7. TEST EQUIPMENT CONFIGURATION(S)

7.1. Conducted

Conducted RF Emission Test Set-up(s). The following tests were performed using the conducted test set-up shown in the diagram below.

1. 6 dB 99% Bandwidth
2. Output Power
3. Power Spectral Density
4. Spurious Emissions
5. Band-Edge Spurious Emissions

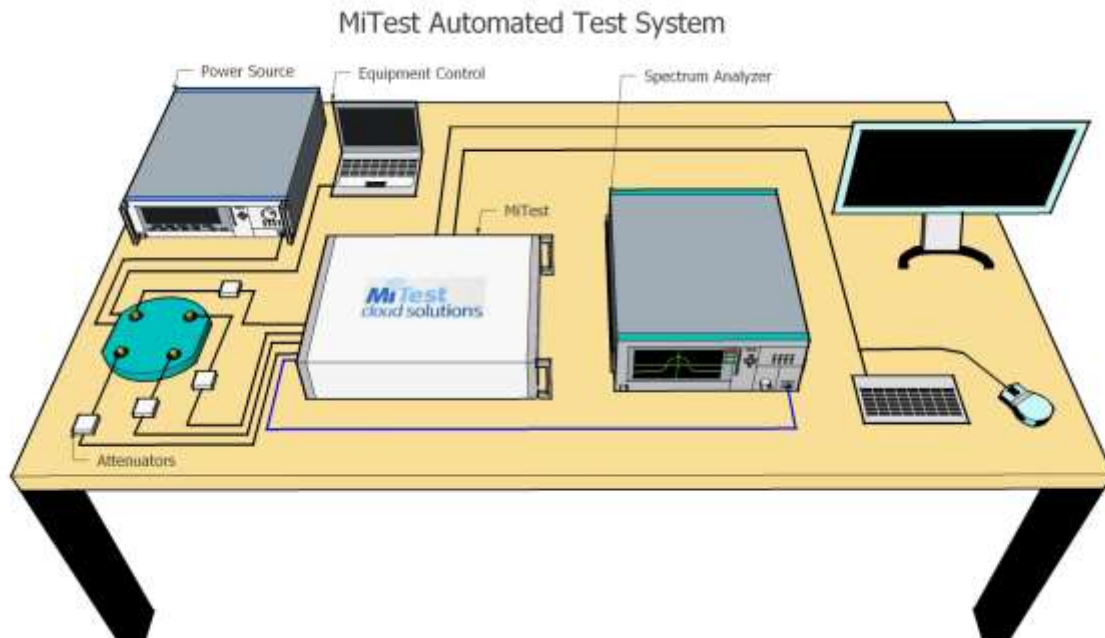

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 18 of 191


Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
127	Power Supply	HP	6674A	US36370530	Cal when used
158	Barometer/Thermometer	Control Company	4196	E2846	30 Nov 2018
248	Resistance Thermometer	Thermotronics	GR2105-02	9340 #1	30 Oct 2018
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	2 May 2018
381	4x4 RF Switch Box	MiCOM Labs	MiTest RF Switch Box	MIC002	13 Nov 2018
398	MiTest RF Conducted Test Software	MiCOM	MiTest ATS	Version 4.1	Not Required
419	Laptop with Labview Software	Lenova	W520	TS02	Not Required
420	USB to GPIB Interface	National Instruments	GPIB-USB HS	1346738	Not Required
440	USB Wideband Power Sensor	Boonton	55006	9178	22 Oct 2018
442	USB Wideband Power Sensor	Boonton	55006	9181	6 Oct 2018
445	PoE Injector	D-Link	DPE-101GL	QTAH1E2000625	Not Required
460	Dell Computer with installation of MiTest executable.	Dell	Optiplex330	BC944G1	Not Required
461	Spectrum Analyzer	Agilent	E4440A	MY46185537	20 Sep 2018
493	USB Wideband Power Sensor	Boonton	55006	9634	10 Mar 2018
494	USB Wideband Power Sensor	Boonton	55006	9726	10 Mar 2018
74	Environmental Chamber Chamber 3	Tenney	TTC	12808-1	28 Sep 2018
RF#2 GPIB#1	GPIB cable to Power Supply	HP	GPIB	None	Not Required
RF#2 SMA#1	EUT to Mitest box port 1	Flexco	SMA Cable port1	None	13 Nov 2018
RF#2 SMA#2	EUT to Mitest box port 2	Flexco	SMA Cable port2	None	13 Nov 2018
RF#2 SMA#3	EUT to Mitest box port 3	Flexco	SMA Cable port3	None	13 Nov 2018
RF#2 SMA#4	EUT to Mitest box port 4	Flexco	SMA Cable port4	None	13 Nov 2018
RF#2 SMA#SA	Mitest box to SA	Flexco	SMA Cable SA	None	13 Nov 2018
RF#2 USB#1	USB Cable to Mitest Box	Dynex	USB Cable	None	Not Required

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


7.1. Radiated Emissions - 3m Chamber

The following tests were performed using the radiated test set-up shown in the diagram below.

Radiated Emissions Below 1GHz Test Setup

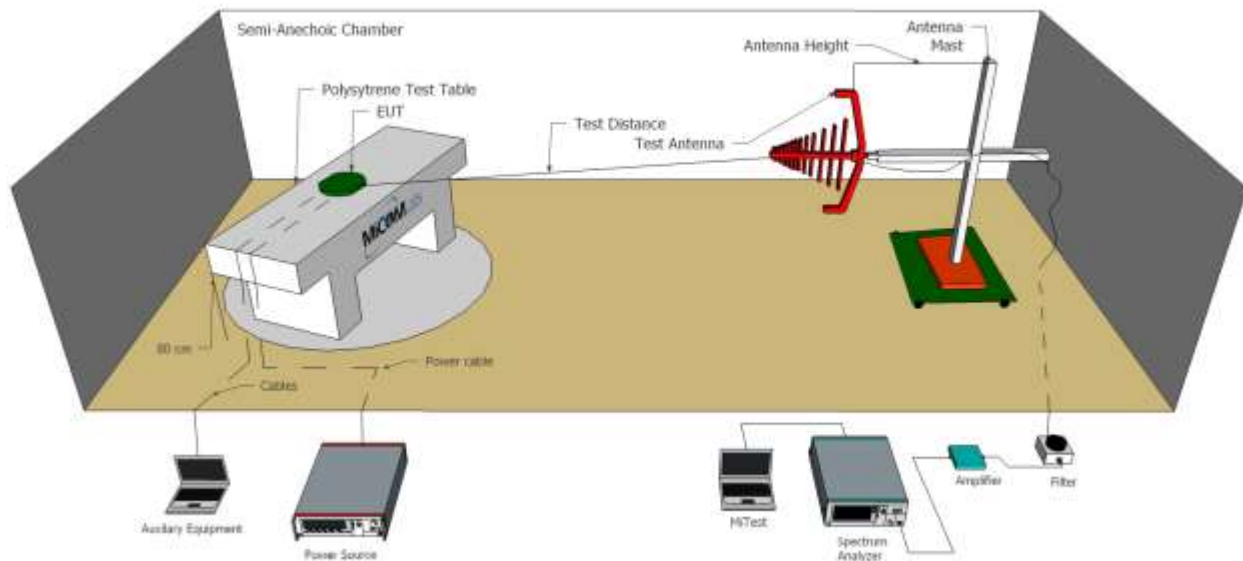

Radiated Emissions Above 1GHz Test Setup

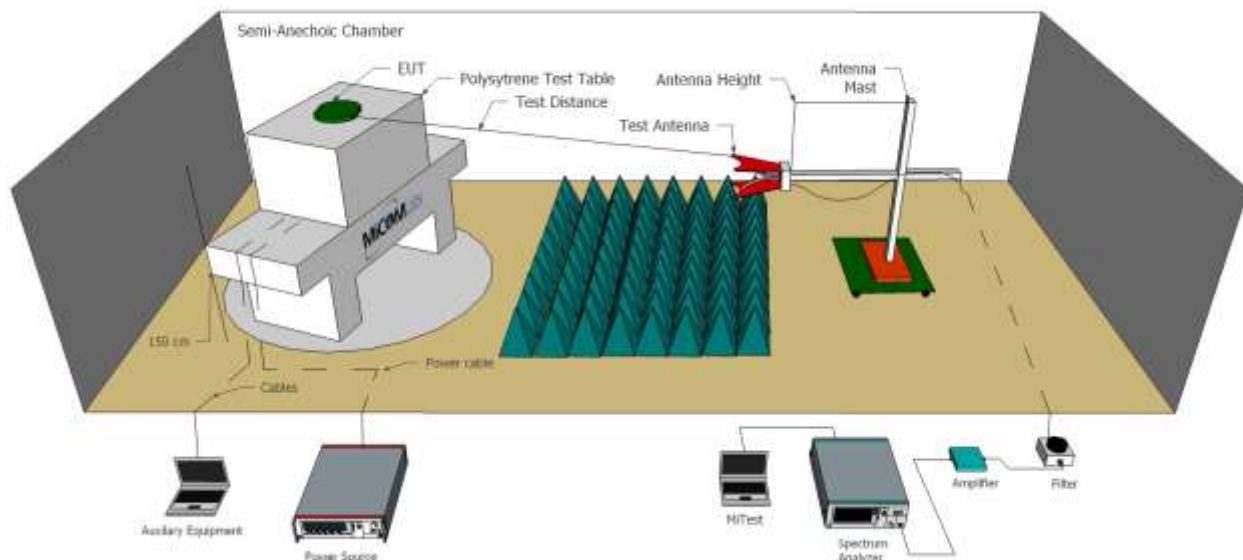

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 20 of 191

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
158	Barometer/Thermometer	Control Company	4196	E2846	30 Nov 2018
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CU101	04R08507	Not Required
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	2 May 2018
301	5470 to 5725 MHz Notch Filter	Microtronics	RBC50704	001	6 Oct 2018
302	5150 to 5350 MHz Notch Filter	Microtronics	BRC50703	002	6 Oct 2018
303	5725 to 5875 MHz Notch filter	Microtronics	BRC50705	003	6 Oct 2018
330	Variac 0-280 Vac	Staco Energy Co	3PN1020B	0546	Cal when used
336	Active loop Ant 10kHz to 30 MHz	EMCO	EMCO 6502	00060498	26 Dec 2017
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	5 Oct 2018
341	900MHz Notch Filter	EWT	EWT-14-0199	H1	6 Oct 2018
342	2.4 GHz Notch Filter	EWT	EWT-14-0203	H1	6 Oct 2018
343	5.15 GHz Notch Filter	EWT	EWT-14-0200	H1	6 Oct 2018
344	5.35 GHz Notch Filter	EWT	EWT-14-0201	H1	6 Oct 2018
345	5.46 GHz Notch Filter	EWT	EWT-14-0202	H1	6 Oct 2018
346	1.6 TO 10GHz High Pass Filter	EWT	EWT-57-0112	H1	6 Oct 2018
373	26III RMS Multimeter	Fluke	Fluke 26 series III	76080720	21 Sep 2018
377	Band Rejection Filter 5150 to 5880MHz	Microtronics	BRM50716	034	6 Oct 2018
393	DC - 1050 MHz Low Pass Filter	Microcircuits	VLFX-1050	N/A	6 Oct 2018
396	2.4 GHz Notch Filter	Microtronics	BRM50701	001	6 Oct 2018
397	Amp 10 - 2500MHz	MiCOM Labs	Amp 10 - 2500 MHz	NA	12 Oct 2018
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	12 Oct 2018
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	12 Oct 2018
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
414	DC Power Supply 0-60V	HP	6274	1029A01285	Cal when used

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 21 of 191

415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
447	MiTest Rad Emissions Test Software	MiCOM	Rad Emissions Test Software Version 1.0	447	Not Required
462	Schwarzbeck cable from Antenna to Amplifier.	Schwarzbeck	AK 9513	462	4 Oct 2018
463	Schwarzbeck cable from Amplifier to Bulkhead.	Schwarzbeck	AK 9513	463	4 Oct 2018
464	Schwarzbeck cable from Bulkhead to Receiver	Schwarzbeck	AK 9513	464	4 Oct 2018
465	Low Pass Filter DC-1000 MHz	Mini-Circuits	NLP-1200+	VUU01901402	6 Oct 2018
466	Low Pass Filter DC-1500 MHz	Mini-Circuits	NLP-1750+	VUU10401438	6 Oct 2018
467	2495 to 2650 MHz notch filter	MicroTronics	BRM50709	011	6 Oct 2018
468	Low pass filter	Mini Circuits	SLP-550	None	6 Oct 2018
469	Low pass filter	Mini Circuit	SLP-1000	None	6 Oct 2018
470	High Pass filter	Mini Circuits	SHP-700	None	6 Oct 2018
476	Low Pass dc-2200MHz filter	Mini Circuits	15542 NLP-2400+	VUU13801345	6 Oct 2018
480	Cable - Bulkhead to Amp	SRC Haverhill	157-3050360	480	6 Oct 2018
481	Cable - Bulkhead to Receiver	SRC Haverhill	151-3050787	481	6 Oct 2018
482	Cable - Amp to Antenna	SRC Haverhill	157-3051574	482	6 Oct 2018
87	Uninterruptible Power Supply	Falcon Electric	ED2000-1/2LC	F3471 02/01	Cal when used
CC05	Confidence Check	MiCOM	CC05	None	7 Jan 2018
VLF-1700	Low pass filter DC-1700 MHz	Mini Circuits	VLF-1700	None	6 Oct 2018

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

7.2. AC Wireline Emissions

The following tests were performed using the test set-up shown in the diagram below.

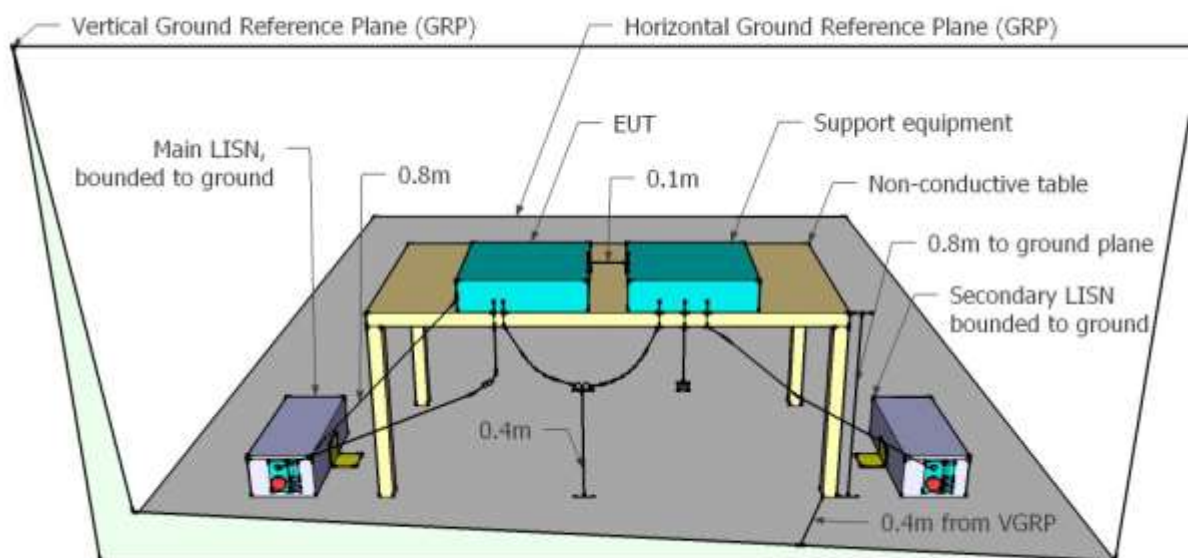

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 23 of 191

Test Equipment Utilized

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
158	Barometer/Thermometer	Control Company	4196	E2846	30 Nov 2018
184	Pulse Limiter	Rhode & Schwarz	ESH3Z2	357.8810.52	6 Oct 2018
190	LISN (two-line V-network)	Rhode & Schwarz	ESH3Z5	836679/006	18 Oct 2018
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	2 May 2018
307	BNC-CABLE	Megaphase	1689 1GVT4	15F50B002	6 Oct 2018
316	Dell desktop computer workstation	Dell	Desktop	WS04	Not Required
372	AC Variable PS	California Instruments	1251P	L06951	Cal when used
378	Rohde & Schwarz 40 GHz Receiver with Generator	Rhode & Schwarz	ESIB40	100107/040	12 Oct 2018
388	LISN (3 Phase) 9kHz - 30MHz	Rohde & Schwarz	ESH2-Z5	892107/022	20 Oct 2018
496	MiTest Conducted Emissions test software.	MiCOM	Conducted Emissions Test Software Version 1.0	496	Not Required
CCEMC01	Confidence Check.	MiCOM	CCEMC01	None	2 Apr 2018

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 25 of 191

9. TEST RESULTS

9.1. 6 dB & 99% Bandwidth

Conducted Test Conditions for 6 dB and 99% Bandwidth			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	6 dB and 99 % Bandwidth	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (a)(2)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		
Test Procedure for 6 dB and 99% Bandwidth Measurement The bandwidth at 6 dB and 99 % was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency. Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported. Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document. Limits for 6 dB and 99% Bandwidth (a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions: (2) Systems using digital modulation techniques may operate in the 902-928 MHz and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.			

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 26 of 191

Equipment Configuration for 6 dB & 99% Bandwidth

Variant:	802.11b	Duty Cycle (%):	99
Data Rate:	1.00 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	CCK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest	KHz	MHz
MHz	a	b	c	d				
2412.0	8.577	8.096	--	--	8.577	8.096	≥500.0	-7.60
2437.0	8.577	8.577	--	--	8.577	8.577	≥500.0	-8.08
2462.0	8.096	8.096	--	--	8.096	8.096	≥500.0	-7.60

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
2412.0	13.226	13.066	--	--	13.226		
2437.0	13.226	13.146	--	--	13.226		
2462.0	12.826	12.906	--	--	12.906		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 27 of 191

Equipment Configuration for 6 dB & 99% Bandwidth

Variant:	802.11g	Duty Cycle (%):	99
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			KHz	MHz
2412.0	16.353	16.353	--	--	16.353	16.353	≥500.0	-15.85
2437.0	16.353	16.353	--	--	16.353	16.353	≥500.0	-15.85
2462.0	16.273	16.273	--	--	16.273	16.273	≥500.0	-15.77

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
2412.0	16.353	16.353	--	--	16.353		
2437.0	16.593	16.513	--	--	16.593		
2462.0	16.433	16.433	--	--	16.433		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 28 of 191

Equipment Configuration for 6 dB & 99% Bandwidth

Variant:	802.11n HT-20	Duty Cycle (%):	99
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			KHz	MHz
2412.0	17.315	17.555	--	--	17.555	17.315	≥500.0	-16.82
2437.0	17.555	17.555	--	--	17.555	17.555	≥500.0	-17.06
2462.0	17.555	17.555	--	--	17.555	17.555	≥500.0	-17.06

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
2412.0	17.555	17.555	--	--	17.555		
2437.0	17.635	17.635	--	--	17.635		
2462.0	17.555	17.555	--	--	17.555		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 29 of 191

Equipment Configuration for 6 dB & 99% Bandwidth

Variant:	802.11n HT-40	Duty Cycle (%):	99
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			KHz	MHz
2422.0	35.110	35.110	--	--	35.110	35.110	≥500.0	-34.61
2437.0	35.110	35.110	--	--	35.110	35.110	≥500.0	-34.61
2452.0	35.110	35.110	--	--	35.110	35.110	≥500.0	-34.61

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
2422.0	36.072	35.912	--	--	36.072		
2437.0	36.232	36.072	--	--	36.232		
2452.0	36.072	35.912	--	--	36.072		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 30 of 191

9.2. Conducted Output Power

Conducted Test Conditions for Fundamental Emission Output Power			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Output Power	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (b) & (c)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Fundamental Emission Output Power Measurement
In the case of average power measurements an average power sensor was utilized.

For peak power measurements the spectrum analyzer built-in power function was used to integrate peak power over the 20 dB bandwidth.

Testing was performed under ambient conditions at nominal voltage only. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured, summed (Σ) and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Supporting Information
Calculated Power = A + G + Y+ 10 log (1/x) dBm

A = Total Power [$10 \cdot \text{Log}_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})$]
G = Antenna Gain
Y = Beamforming Gain
x = Duty Cycle (average power measurements only)

Limits for Fundamental Emission Output Power

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following for non-frequency hopping systems:

(3) For systems using digital modulation in the 902-928 MHz and 2400-2483.5 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(iii) Fixed, point-to-point operation, as used in paragraphs (c)(1)(i) and (c)(1)(ii) of this section, excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum or digitally modulated intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 31 of 191

(2) In addition to the provisions in paragraphs (b)(3), (b)(4) and (c)(1)(i) of this section, transmitters operating in the 2400-2483.5 MHz band that emit multiple directional beams, simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers provided the emissions comply with the following:

(i) Different information must be transmitted to each receiver.

(ii) If the transmitter employs an antenna system that emits multiple directional beams but does not do emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device, i.e., the sum of the power supplied to all antennas, antenna elements, staves, etc. and summed across all carriers or frequency channels, shall not exceed the limit specified in paragraph (b)(1) or (b)(3) of this section, as applicable. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as follows:

(A) The directional gain shall be calculated as the sum of 10 log (number of array elements or staves) plus the directional gain of the element or stave having the highest gain.

(B) A lower value for the directional gain than that calculated in paragraph (c)(2)(ii)(A) of this section will be accepted if sufficient evidence is presented, e.g., due to shading of the array or coherence loss in the beamforming.

(iii) If a transmitter employs an antenna that operates simultaneously on multiple directional beams using the same or different frequency channels, the power supplied to each emission beam is subject to the power limit specified in paragraph (c)(2)(ii) of this section. If transmitted beams overlap, the power shall be reduced to ensure that their aggregate power does not exceed the limit specified in paragraph (c)(2)(ii) of this section. In addition, the aggregate power transmitted simultaneously on all beams shall not exceed the limit specified in paragraph (c)(2)(ii) of this section by more than 8 dB.

(iv) Transmitters that emit a single directional beam shall operate under the provisions of paragraph (c)(1) of this section.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 32 of 191

Equipment Configuration for Average Output Power

Variant:	802.11b	Duty Cycle (%):	99.0
Data Rate:	1.00 MBit/s	Antenna Gain (dBi):	2.50
Modulation:	CCK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dB	
2412.0	20.37	21.26	--	--	23.85	30.00	-6.15	27.00
2437.0	20.57	21.39	--	--	24.01	30.00	-5.99	27.00
2462.0	14.26	14.80	--	--	17.55	30.00	-12.45	20.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	± 1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

Equipment Configuration for Average Output Power

Variant:	802.11g	Duty Cycle (%):	99.0
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	2.50
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dB	
2412.0	15.13	15.87	--	--	18.53	30.00	-11.47	22.00
2437.0	20.44	20.89	--	--	23.68	30.00	-6.32	27.00
2462.0	16.29	16.73	--	--	19.53	30.00	-10.47	23.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	± 1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 33 of 191

Equipment Configuration for Average Output Power

Variant:	802.11n HT-20	Duty Cycle (%):	99.0
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	2.50
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dB	
2412.0	16.75	17.45	--	--	20.12	30.00	-9.88	
2437.0	18.88	19.42	--	--	22.17	30.00	-7.83	
2462.0	16.89	17.42	--	--	20.17	30.00	-9.83	

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	± 1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

Equipment Configuration for Average Output Power

Variant:	802.11n HT-40	Duty Cycle (%):	99.0
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	2.50
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dB	
2422.0	11.88	12.24	--	--	15.07	30.00	-14.93	17.00
2437.0	19.84	20.44	--	--	23.16	30.00	-6.84	27.00
2452.0	15.28	15.62	--	--	18.46	30.00	-11.54	22.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	± 1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 34 of 191

9.3. Power Spectral Density

Conducted Test Conditions for Power Spectral Density			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Power Spectral Density	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (e)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Power Spectral Density

The transmitter output was connected to a spectrum analyzer and the measured made in a 3 kHz resolution bandwidth using the analyzer auto-coupled sweep-time. A peak value was found over the full emission bandwidth and the spectrum downloaded for post processing purposes.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. The Peak Power Spectral Density is the highest level found across the emission bandwidth. With multiple antenna port measurements the numerical analyzer data from each port is summed ($\hat{a}$) and a link to this additional graphic is provided.

Testing was performed under ambient conditions at nominal voltage only.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Measure and sum the spectra across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The individual spectra are then summed mathematically in linear power units. Unlike in-band power measurements, in which the sum involves a single measured value (output power) from each output, measurements for compliance with PSD limits involve summing entire spectra across corresponding frequency bins on the various outputs. Consistency is maintained for any device with multiple transmitter outputs to be certain the individual outputs are all aligned with the same span and same number of points. In this instance, the linear power spectrum value within the first spectral bin of output 0 is summed with that in the first spectral bin of output 1, and the first spectral bin of output 2, and so on up to the Nth output to obtain the true value for the first frequency bin of the summed spectrum. The summed spectrum value for each frequency bin is computed in this fashion. These summed spectral values were post processed and the resulting numerical and graphical data presented.

NOTE:

It may be observed that the spectrum in some antenna port plots break the limit line however this in itself does NOT constitute a failure. In all cases a spectrum summation plot is provided in order to prove compliance. A failure occurs only after the summation of all spectrum plots have been summed and are found to be greater than the limit line.

Supporting Information

Calculated Power = $A + 10 \log(1/x)$ dBm

A = Total Power Spectral Density $[10 \log_{10}(10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})]$

x = Duty Cycle

Limits Power Spectral Density

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 35 of 191

Equipment Configuration for Power Spectral Density - Average

Variant:	802.11b	Duty Cycle (%):	99.0
Data Rate:	1.00 MBit/s	Antenna Gain (dBi):	2.50
Modulation:	CCK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0.04 dB)	Limit	Margin
	Port(s) (dBm/3KHz)						
MHz	a	b	c	d	dBm/3KHz	dBm/3KHz	dB
2412.0	-12.311	-11.391	--	--	-8.862	8.0	-16.9
2437.0	-11.364	-10.764	--	--	-8.494	8.0	-16.5
2462.0	-17.984	-17.508	--	--	-14.979	8.0	-23.0

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 36 of 191

Equipment Configuration for Power Spectral Density - Average

Variant:	802.11g	Duty Cycle (%):	99.0
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	2.50
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0.04 dB)	Limit	Margin
	Port(s) (dBm/3KHz)						
MHz	a	b	c	d	dBm/3KHz	dBm/3KHz	dB
2412.0	-20.874	-19.451	--	--	-17.421	8.0	-25.4
2437.0	-14.646	-14.546	--	--	-11.558	8.0	-19.6
2462.0	-18.681	-18.439	--	--	-15.637	8.0	-23.6

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 37 of 191

Equipment Configuration for Power Spectral Density - Average

Variant:	802.11n HT-20	Duty Cycle (%):	99.0
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	2.50
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0.04 dB)	Limit	Margin
	Port(s) (dBm/3KHz)						
MHz	a	b	c	d	dBm/3KHz	dBm/3KHz	dB
2412.0	-18.684	-18.309	--	--	-16.184	8.0	-24.2
2437.0	-16.589	-15.940	--	--	-13.499	8.0	-21.5
2462.0	-19.066	-17.122	--	--	-15.128	8.0	-23.1

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 38 of 191

Equipment Configuration for Power Spectral Density - Average

Variant:	802.11n HT-40	Duty Cycle (%):	99.0
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	2.50
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0.04 dB)	Limit	Margin
	Port(s) (dBm/3KHz)						
MHz	a	b	c	d	dBm/3KHz	dBm/3KHz	dB
2422.0	-26.897	-26.454	--	--	-23.682	8.0	-31.7
2437.0	-18.708	-18.234	--	--	-15.449	8.0	-23.5
2452.0	-23.020	-22.901	--	--	-20.213	8.0	-28.2

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 39 of 191

9.4. Emissions

9.4.1. Conducted Emissions

9.4.1.1. Conducted Spurious Emissions

Conducted Test Conditions for Transmitter Conducted Spurious and Band-Edge Emissions			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Max Unwanted Emission Levels	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (d)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Transmitter Conducted Spurious and Band-Edge Emissions Measurement

Transmitter Conducted Spurious and Band-Edge emissions were measured at a limit of 30 dBc (average detector) or 20 dBc (peak detector) below the highest in-band spectral density measured with a spectrum analyzer connected to the antenna terminal. Measurements were made while EUT was operating in transmit mode of operation at the appropriate centre frequency closest to the band-edge. Emissions were maximized during the measurement and limits derived from the peak spectral power and drawn on each plot.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. Testing was performed under ambient conditions at nominal voltage only.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Limits Transmitter Conducted Spurious and Band-Edge Emissions

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 40 of 191

Equipment Configuration for Conducted Spurious Emissions - Average

Variant:	802.11b	Duty Cycle (%):	99
Data Rate:	1.00 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	CCK	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Frequency Range	Conducted Spurious Emissions - Average (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
2412.0	30.0 - 26000.0	-57.524	-43.39	-57.124	-42.39	--	--	--	--
2437.0	30.0 - 26000.0	-56.824	-43.15	-56.924	-42.18	--	--	--	--
2462.0	30.0 - 26000.0	-56.824	-49.62	-54.986	-49.14	--	--	--	--

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 41 of 191

Equipment Configuration for Conducted Spurious Emissions - Average

Variant:	802.11g	Duty Cycle (%):	99
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Frequency Range	Conducted Spurious Emissions - Average (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
2412.0	30.0 - 26000.0	-57.524	-48.04	-57.124	-47.28	--	--	--	--
2437.0	30.0 - 26000.0	-54.886	-41.30	-54.986	-40.79	--	--	--	--
2462.0	30.0 - 26000.0	-56.824	-45.90	-56.924	-45.69	--	--	--	--

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 42 of 191

Equipment Configuration for Conducted Spurious Emissions - Average

Variant:	802.11n HT-20	Duty Cycle (%):	99
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Frequency Range	Conducted Spurious Emissions - Average (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
2412.0	30.0 - 26000.0	-57.524	-46.72	-57.124	-46.44	--	--	--	--
2437.0	30.0 - 26000.0	-56.824	-43.23	-56.924	-42.38	--	--	--	--
2462.0	30.0 - 26000.0	-56.824	-45.37	-56.924	-44.68	--	--	--	--

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 43 of 191

Equipment Configuration for Conducted Spurious Emissions - Average

Variant:	802.11n HT-40	Duty Cycle (%):	99
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Test Frequency	Frequency Range	Conducted Spurious Emissions - Average (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
2422.0	30.0 - 26000.0	-56.724	-52.28	-56.824	-51.56	--	--	--	--
2437.0	30.0 - 26000.0	-54.886	-39.63	-56.924	-38.97	--	--	--	--
2452.0	30.0 - 26000.0	-54.886	-44.11	-56.924	-43.83	--	--	--	--

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 44 of 191

9.4.1.2. Conducted Band-Edge Emissions

Lower Band-Edge Emissions

Equipment Configuration for Conducted Low Band-Edge Emissions - Average			
Variant:	802.11b	Duty Cycle (%):	99.0
Data Rate:	1.00 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	CCK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Channel Frequency:	2412.0 MHz					
Band-Edge Frequency:	2400.0 MHz					
Test Frequency Range:	2350.0 - 2422.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-51.50	-27.46	2402.70	--	--	-2.700
b	-51.10	-26.14	2403.00	--	--	-3.000

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 45 of 191

Equipment Configuration for Conducted Low Band-Edge Emissions - Average

Variant:	802.11g	Duty Cycle (%):	99.0
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Channel Frequency:	2412.0 MHz					
Band-Edge Frequency:	2400.0 MHz					
Test Frequency Range:	2350.0 - 2422.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-47.98	-36.71	2401.90	--	--	-1.900
b	-46.89	-35.80	2402.10	--	--	-2.100

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 46 of 191

Equipment Configuration for Conducted Low Band-Edge Emissions - Average

Variant:	802.11n HT-20	Duty Cycle (%):	99.0
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Channel Frequency:	2412.0 MHz					
Band-Edge Frequency:	2400.0 MHz					
Test Frequency Range:	2350.0 - 2422.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-42.72	-35.45	2401.20	--	--	-1.200
b	-53.60	-34.69	2401.40	--	--	-1.400

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 47 of 191

Equipment Configuration for Conducted Low Band-Edge Emissions - Average

Variant:	802.11n HT-40	Duty Cycle (%):	99.0
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Channel Frequency:	2422.0 MHz					
Band-Edge Frequency:	2400.0 MHz					
Test Frequency Range:	2292.0 - 2442.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-54.79	-43.15	2402.00	--	--	-2.000
b	-54.89	-42.95	2402.00	--	--	-2.000

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 48 of 191

Upper Band-Edge Emissions

Equipment Configuration for Conducted High Band-Edge Emissions - Average

Variant:	802.11b	Duty Cycle (%):	99.0
Data Rate:	1.00 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	CCK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Channel Frequency:	2462.0 MHz					
Band-Edge Frequency:	2483.5 MHz					
Test Frequency Range:	2452.0 - 2524.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-62.85	-33.21	2470.60	--	--	-12.900
b	-62.95	-32.77	2470.60	--	--	-12.900

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 49 of 191

Equipment Configuration for Conducted High Band-Edge Emissions - Average

Variant:	802.11g	Duty Cycle (%):	99.0
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Channel Frequency:	2462.0 MHz					
Band-Edge Frequency:	2483.5 MHz					
Test Frequency Range:	2452.0 - 2524.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-56.82	-34.57	2472.10	--	--	-11.400
b	-56.92	-34.35	2472.10	--	--	-11.400

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 50 of 191

Equipment Configuration for Conducted High Band-Edge Emissions - Average

Variant:	802.11n HT-20	Duty Cycle (%):	99.0
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Channel Frequency:	2462.0 MHz					
Band-Edge Frequency:	2483.5 MHz					
Test Frequency Range:	2452.0 - 2524.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-53.30	-34.87	2472.60	--	--	-10.900
b	-54.99	-34.34	2472.60	--	--	-10.900

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 51 of 191

Equipment Configuration for Conducted High Band-Edge Emissions - Average

Variant:	802.11n HT-40	Duty Cycle (%):	99.0
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:	None		

Test Measurement Results

Channel Frequency:	2452.0 MHz					
Band-Edge Frequency:	2483.5 MHz					
Test Frequency Range:	2432.0 - 2582.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-54.89	-39.89	2471.70	--	--	-11.800
b	-54.99	-39.39	2472.00	--	--	-11.500

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 52 of 191

9.4.2. Radiated Emissions

9.4.2.3. TX Spurious & Restricted Band Emissions

Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions (Restricted Bands)			
Standard:	FCC CFR 47 Part 15 Subpart C 15.247 (DTS)	Ambient Temp. (°C):	20.0 - 24.5
Test Heading:	Radiated Spurious and Band-Edge Emissions	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.205, 15.209	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Radiated Spurious and Band-Edge Emissions (Restricted Bands)

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned. Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Test configuration and setup for Radiated Spurious and Band-Edge Measurement were per the Radiated Test Set-up specified in this document.

Limits for [Restricted Bands](#)
Peak emission: 74 dBuV/m
Average emission: 54 dBuV/m

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

FS = R + AF + CORR - FO

where:

FS = Field Strength
R = Measured Spectrum analyzer Input Amplitude
AF = Antenna Factor
CORR = Correction Factor = CL – AG + NFL
CL = Cable Loss
AG = Amplifier Gain
FO = Distance Falloff Factor
NFL = Notch Filter Loss or Waveguide Loss

Example:

Given receiver input reading of 51.5 dBmV; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength (FS) of the measured emission is:

FS = 51.5 + 8.5 + 1.3 - 26.0 +1 = 36.3 dBmV/m

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:

Level (dBmV/m) = 20 * Log (level (mV/m))

40 dBmV/m = 100 mV/m
48 dBmV/m = 250 mV/m

Restricted Bands of Operation (15.205)

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Frequency Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 53 of 191

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

(1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.

(2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.

(3) Cable locating equipment operated pursuant to §15.213.

(4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.

(5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.

(6) Transmitters operating under the provisions of subparts D or F of this part.

(7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.

(8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 54 of 191

(9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 55 of 191

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	Mikrotik	Variant:	802.11b
Antenna Gain (dBi):	2.50	Modulation:	CCK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2412.00	Data Rate:	1.00 MBit/s
Power Setting:	27	Tested By:	OC

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	3215.94	62.72	2.57	-11.58	53.71	Peak (NRB)	Horizontal	100	0	--	--	Pass
#2	4823.98	60.33	2.97	-12.43	50.87	Max Peak	Horizontal	98	141	74.0	-23.1	Pass
#3	4823.98	55.01	2.97	-12.43	45.55	Max Avg	Horizontal	98	141	54.0	-8.5	Pass
#4	9647.87	51.96	4.23	-6.20	49.99	Peak (NRB)	Vertical	100	158	--	--	Pass

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

NRB- Non Restricted Band emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 56 of 191

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	Mikrotik	Variant:	802.11b
Antenna Gain (dBi):	2.50	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2437.00	Data Rate:	1.00 MBit/s
Power Setting:	27	Tested By:	OC

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	2438.05	58.28	2.26	-12.10	48.44	Fundamental	Vertical	100	42	--	--	
#2	3249.33	60.93	2.55	-11.61	51.87	Peak (NRB)	Horizontal	100	42	--	--	Pass
#3	4873.99	61.67	3.07	-12.61	52.13	Max Peak	Horizontal	103	185	74.0	-21.9	Pass
#4	4873.99	57.22	3.07	-12.61	47.68	Max Avg	Horizontal	103	185	54.0	-6.3	Pass

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

NRB- Non Restricted Band emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 57 of 191

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	Mikrotik	Variant:	802.11b
Antenna Gain (dBi):	2.50	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2462.00	Data Rate:	1.00 MBit/s
Power Setting:	20	Tested By:	OC

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	2463.00	59.06	2.28	-11.96	49.38	Fundamental	Horizontal	100	0	--	--	
#2	3282.66	62.94	2.55	-11.69	53.80	Peak (NRB)	Horizontal	100	0	--	--	Pass
#3	15698.30	49.68	5.48	-1.67	53.49	Max Peak	Vertical	172	301	74.0	-20.5	Pass
#4	15698.30	36.56	5.48	-1.67	40.37	Max Avg	Vertical	172	301	54.0	-13.6	Pass

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

NRB- Non Restricted Band emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 58 of 191

Lower Band-Edge Emissions

Mikrotik		Band-Edge Freq	Limit 74.0dBµV/m	Limit 54.0dBµV/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dBµV/m	dBµV/m	
802.11b	2412.00	2390.00	62.67	52.59	27
802.11g	2412.00	2390.00	68.44	53.01	22
802.11n HT-20	2412.00	2390.00	67.37	52.59	24
802.11n HT-40	2422.00	2390.00	67.59	53.39	17

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 59 of 191

Equipment Configuration for Radiated - Lower Restricted Band-Edge Emissions

Antenna:	Mikrotik	Variant:	802.11b
Antenna Gain (dBi):	2.50	Modulation:	CCK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2412.00	Data Rate:	1.00 MBit/s
Power Setting:	27	Tested By:	OC

Test Measurement Results

2310.00 - 2422.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	2387.66	18.38	2.26	31.95	52.59	Max Avg	Horizontal	151	89	54.0	-1.4	Pass
#2	2388.56	28.46	2.26	31.95	62.67	Max Peak	Horizontal	151	89	74.0	-11.3	Pass
#3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 60 of 191

Equipment Configuration for Radiated - Lower Restricted Band-Edge Emissions

Antenna:	Mikrotik	Variant:	802.11g
Antenna Gain (dBi):	2.50	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2412.00	Data Rate:	6.00 MBit/s
Power Setting:	22	Tested By:	OC

Test Measurement Results

2310.00 - 2422.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	2390.00	18.79	2.26	31.96	53.01	Max Avg	Horizontal	151	89	54.0	-1.0	Pass
#2	2390.00	34.22	2.26	31.96	68.44	Max Peak	Horizontal	151	89	74.0	-5.6	Pass
#3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 61 of 191

Equipment Configuration for Radiated - Lower Restricted Band-Edge Emissions

Antenna:	Mikrotik	Variant:	802.11n HT-20
Antenna Gain (dBi):	2.50	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2412.00	Data Rate:	6.50 MBit/s
Power Setting:	24	Tested By:	OC

Test Measurement Results

2310.00 - 2422.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	2387.66	18.38	2.26	31.95	52.59	Max Avg	Horizontal	151	89	54.0	-1.4	Pass
#2	2389.01	33.16	2.26	31.95	67.37	Max Peak	Horizontal	151	89	74.0	-6.6	Pass
#3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 62 of 191

Equipment Configuration for Radiated - Lower Restricted Band-Edge Emissions

Antenna:	Mikrotik	Variant:	802.11n HT-40
Antenna Gain (dBi):	2.50	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2422.00	Data Rate:	13.50 MBit/s
Power Setting:	17	Tested By:	OC

Test Measurement Results

2310.00 - 2421.97760112.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	2389.45	33.38	2.26	31.95	67.59	Max Peak	Horizontal	151	89	74.0	-6.4	Pass
#2	2390.00	19.17	2.26	31.96	53.39	Max Avg	Horizontal	151	89	54.0	-0.6	Pass
#3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 63 of 191

Upper Band-Edge Emissions

Mikrotik		Band-Edge Freq	Limit 74.0dBµV/m	Limit 54.0dBµV/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dBµV/m	dBµV/m	
802.11b	2462.00	2483.50	62.54	52.57	20
802.11g	2462.00	2483.50	67.37	52.56	23
802.11n HT-20	2462.00	2483.50	67.45	51.15	24
802.11n HT-40	2452.00	2483.50	70.94	52.99	22

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 64 of 191

Equipment Configuration for Radiated - Upper Restricted Band-Edge Emissions

Antenna:	Mikrotik	Variant:	802.11b
Antenna Gain (dBi):	2.50	Modulation:	CCK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2462.00	Data Rate:	1.00 MBit/s
Power Setting:	20	Tested By:	OC

Test Measurement Results

2452.00 - 2520.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#2	2487.70	17.99	2.25	32.33	52.57	Max Avg	Horizontal	151	89	54.0	-1.4	Pass
#3	2489.20	27.97	2.25	32.32	62.54	Max Peak	Horizontal	151	89	74.0	-11.5	Pass
#1	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 65 of 191

Equipment Configuration for Radiated - Upper Restricted Band-Edge Emissions

Antenna:	Mikrotik	Variant:	802.11g
Antenna Gain (dBi):	2.50	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2462.00	Data Rate:	6.00 MBit/s
Power Setting:	23	Tested By:	OC

Test Measurement Results

2452.00 - 2520.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#2	2484.57	17.98	2.25	32.33	52.56	Max Avg	Horizontal	151	89	54.0	-1.4	Pass
#3	2484.57	32.79	2.25	32.33	67.37	Max Peak	Horizontal	151	89	74.0	-6.6	Pass
#1	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--
Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 66 of 191

Equipment Configuration for Radiated - Upper Restricted Band-Edge Emissions

Antenna:	Mikrotik	Variant:	802.11n HT-20
Antenna Gain (dBi):	2.50	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2462.00	Data Rate:	6.50 MBit/s
Power Setting:	24	Tested By:	OC

Test Measurement Results

2452.00 - 2520.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#2	2484.30	32.87	2.25	32.33	67.45	Max Peak	Horizontal	151	89	74.0	-6.6	Pass
#3	2485.66	16.57	2.25	32.33	51.15	Max Avg	Horizontal	151	89	54.0	-2.9	Pass
#1	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--
Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table. PS from 25 to 24												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 67 of 191

Equipment Configuration for Radiated - Upper Restricted Band-Edge Emissions

Antenna:	Mikrotik	Variant:	802.11n HT-40
Antenna Gain (dBi):	2.50	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2452.00	Data Rate:	13.50 MBit/s
Power Setting:	22	Tested By:	OC

Test Measurement Results

2456.00 - 2520.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#2	2484.18	36.36	2.25	32.33	70.94	Max Peak	Horizontal	151	89	74.0	-3.1	Pass
#3	2485.03	18.41	2.25	32.33	52.99	Max Avg	Horizontal	151	89	54.0	-1.0	Pass
#1	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 68 of 191

9.4.3. Digital Emissions (0.03 - 1 GHz)

Radiated Test Conditions for Radiated Digital Emissions (0.03 – 1 GHz)			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	20.0 - 24.5
Test Heading:	Digital Emissions	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.209	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Radiated Digital Emissions (0.03 – 1 GHz)

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed.

Test configuration and setup for Radiated Spurious and Band-Edge Measurement were per the Radiated Test Set-up specified in this document.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dBmV; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dBmV/m}$$

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are done as:

$$\text{Level (dBmV/m)} = 20 * \text{Log (level (mV/m))}$$

$$40 \text{ dBmV/m} = 100\text{mV/m}$$

$$48 \text{ dBmV/m} = 250\text{mV/m}$$

Limits for Radiated Digital Emissions (0.03 – 1 GHz)

(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength		Measurement Distance (m)
	$\mu\text{V/m}$ (microvolts/meter)	$\text{dB}\mu\text{V/m}$ (dB microvolts/meter)	
0.009-0.490	2400/F(kHz)	--	300

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 69 of 191

0.490-1.705	24000/F(kHz)	--	30
1.705-30.0	30	29.5	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46.0	3
Above 960	500	54.0	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241. (b) In the emission table above, the tighter limit applies at the band edges. (c) The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other sections within this part and which are required to reduce their unwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emission and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency. (d) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. (e) The provisions in §§15.31, 15.33, and 15.35 for measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part. (f) In accordance with §15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in §15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in §15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit. Emissions which must be measured above the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator and which fall within the restricted bands shall comply with the general radiated emission limits in §15.109 that are applicable to the incorporated digital device. (g) Perimeter protection systems may operate in the 54-72 MHz and 76-88 MHz bands under the provisions of this section. The use of such perimeter protection systems is limited to industrial, business and commercial applications.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 70 of 191

Equipment Configuration for Digital Emissions

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	30.66	37.63	3.41	-10.38	30.66	MaxQP	Vertical	100	157	40.0	-9.3	Pass
2	36.11	43.24	3.45	-15.57	31.12	MaxQP	Vertical	100	356	40.0	-8.9	Pass
3	50.51	47.10	3.55	-22.95	27.70	MaxQP	Vertical	100	71	40.0	-12.3	Pass
4	98.09	49.54	3.82	-21.18	32.18	MaxQP	Vertical	100	88	43.5	-11.3	Pass
Test Notes: Model: RBD52G-5HacD2HnD-TC. AC/DC + PoE configuration. Placed 80cm non-conductive table.												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 71 of 191

Equipment Configuration for Digital Emissions

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
<u>1</u>	30.66	34.93	3.41	-10.38	27.96	MaxQP	Vertical	98	117	40.0	-12.0	Pass
<u>2</u>	148.16	42.18	4.04	-18.76	27.46	MaxQP	Vertical	99	242	43.5	-16.0	Pass
Test Notes: Model: RBD52G-5HacD2HnD-TC. AC/DC configuration. Placed 80cm non-conductive table.												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



9.4.4. AC Wireline Emissions

Test Conditions for AC Wireline			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	20.0 - 24.5
Test Heading:	Digital Emissions	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.207	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		
Scope			
This test assesses the ability of the EUT to limit its internal noise from being present on the AC mains power input/output ports.			
Test Method			
The test method shall be in accordance with §15.207 and the Artificial Mains Networks (AMNs) shall be connected to the AC mains power source.			
The measurement frequency range extends from 150 kHz to 30 MHz. When the EUT is a transmitter operating at frequencies below 30 MHz, then the exclusion band for transmitters applies for measurements in the transmit mode of operation.			
Test Procedure			
The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.			
Limits			
The equipment shall meet the class B limits given in §15.207. Alternatively, for equipment intended to be used in telecommunication centres only, the class A limits given in §15.207 may be used.			
Class B Emissions			
* Decreases with the logarithm of the frequency			
Frequency of Emission (MHz)	Conducted Limit (dBµV)		
	Quasi-peak	Quasi-peak	
0.15-0.5	66 to 56*	56 to 46*	
0.5-5	56	46	
5-30	60	50	
Class A Emissions			
Frequency of Emission (MHz)	Conducted Limit (dBµV)		
	Quasi-peak	Average	
0.15-0.5	79	66	
0.5-30	73	60	
Traceability			
All conducted emission measurements are traceable to national standards. The uncertainty of measurement at a confidence level of not less than 95 %, with a coverage factor of k=2, in the range 9 kHz – 30 MHz (Average & Quasi-peak) is ±2.64 dB.			
Laboratory Measurement Uncertainty			
Measurement uncertainty		Measurement uncertainty	
Method			
Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions'			

Equipment Configuration for AC Wireline Emissions

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 73 of 191

Num	Frequency MHz	Raw dBµV	Cable Loss dB	Factor dB	Total Correction dBµV	Corrected Value dBµV	Measurement Type	Line	Limit dBµV	Margin dB	Pass /Fail
1	0.460	15.82	0.07	9.93	10.00	25.82	Max Avg	Live	47.1	-21.3	Pass
2	0.460	26.61	0.07	9.93	10.00	36.61	Max Qp	Live	57.1	-20.5	Pass
3	0.464	15.38	0.07	9.93	10.00	25.38	Max Avg	Neutral	47.0	-21.7	Pass
4	0.464	26.88	0.07	9.93	10.00	36.88	Max Qp	Neutral	57.0	-20.2	Pass
5	23.129	28.97	0.64	10.85	11.49	40.46	Max Avg	Neutral	50.0	-9.5	Pass
6	23.129	32.15	0.64	10.85	11.49	43.64	Max Qp	Neutral	60.0	-16.4	Pass
7	26.610	28.29	0.73	10.88	11.61	39.90	Max Avg	Live	50.0	-10.1	Pass
8	26.610	31.82	0.73	10.88	11.61	43.43	Max Qp	Live	60.0	-16.6	Pass
9	26.488	25.86	0.72	10.88	11.60	37.46	Max Avg	Neutral	50.0	-12.5	Pass
10	26.488	29.85	0.72	10.88	11.60	41.45	Max Qp	Neutral	60.0	-18.6	Pass
11	0.151	16.43	0.05	9.92	9.97	26.40	Max Avg	Neutral	56.0	-29.6	Pass
12	0.151	31.64	0.05	9.92	9.97	41.61	Max Qp	Neutral	66.0	-24.4	Pass

Test Notes: Model hAP ac2. AC/DC + PoE configuration. 120V 60Hz. AC Mains.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 74 of 191

Equipment Configuration for AC Wireline Emissions

Num	Frequency MHz	Raw dBµV	Cable Loss dB	Factor dB	Total Correction dBµV	Corrected Value dBµV	Measurement Type	Line	Limit dBµV	Margin dB	Pass /Fail
1	0.990	14.22	0.07	9.93	10.00	24.22	Max Avg	Neutral	46.0	-21.8	Pass
2	0.990	21.72	0.07	9.93	10.00	31.72	Max Qp	Neutral	56.0	-24.3	Pass
3	1.024	8.67	0.07	9.94	10.01	18.68	Max Avg	Live	46.0	-27.3	Pass
4	1.024	18.99	0.07	9.94	10.01	29.00	Max Qp	Live	56.0	-27.0	Pass
5	0.858	17.03	0.10	9.94	10.04	27.07	Max Avg	Neutral	46.0	-18.9	Pass
6	0.858	24.85	0.10	9.94	10.04	34.89	Max Qp	Neutral	56.0	-21.1	Pass
7	0.526	16.05	0.09	9.92	10.01	26.06	Max Avg	Live	46.0	-19.9	Pass
8	0.526	23.47	0.09	9.92	10.01	33.48	Max Qp	Live	56.0	-22.5	Pass
9	0.844	16.51	0.10	9.94	10.04	26.55	Max Avg	Live	46.0	-19.5	Pass
10	0.844	24.89	0.10	9.94	10.04	34.93	Max Qp	Live	56.0	-21.1	Pass
11	0.191	11.20	0.06	9.92	9.98	21.18	Max Avg	Live	54.8	-33.7	Pass
12	0.191	27.08	0.06	9.92	9.98	37.06	Max Qp	Live	64.8	-27.8	Pass

Test Notes: Model hAP ac2. AC/DC configuration. 120V 60Hz. AC Mains.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 75 of 191


A. APPENDIX - GRAPHICAL IMAGES

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 76 of 191

A.1. 6 dB & 99% Bandwidth

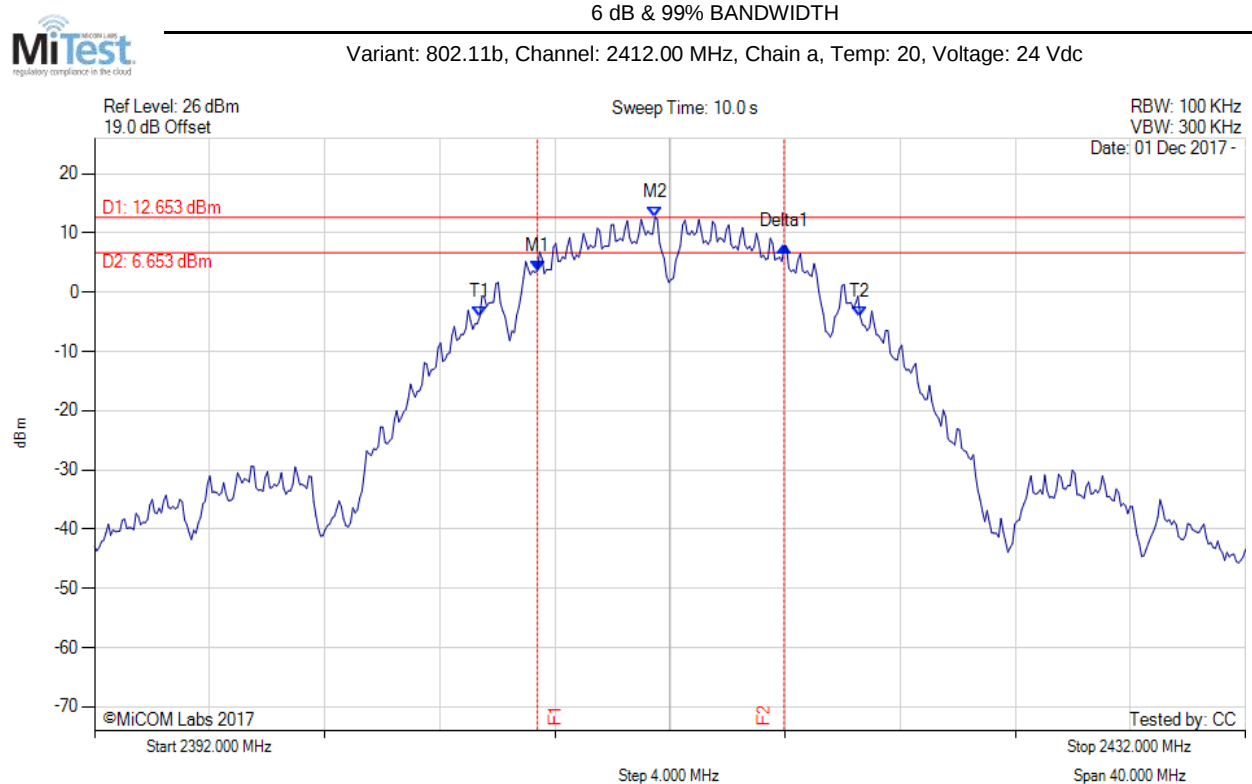

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2407.391 MHz : 3.602 dBm M2 : 2411.479 MHz : 12.653 dBm Delta1 : 8.577 MHz : 4.175 dB T1 : 2405.387 MHz : -4.128 dBm T2 : 2418.613 MHz : -4.126 dBm OBW : 13.226 MHz	Measured 6 dB Bandwidth: 8.577 MHz Limit: ≥ 500.0 kHz Margin: -8.08 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 77 of 191



6 dB & 99% BANDWIDTH

Variant: 802.11b, Channel: 2412.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

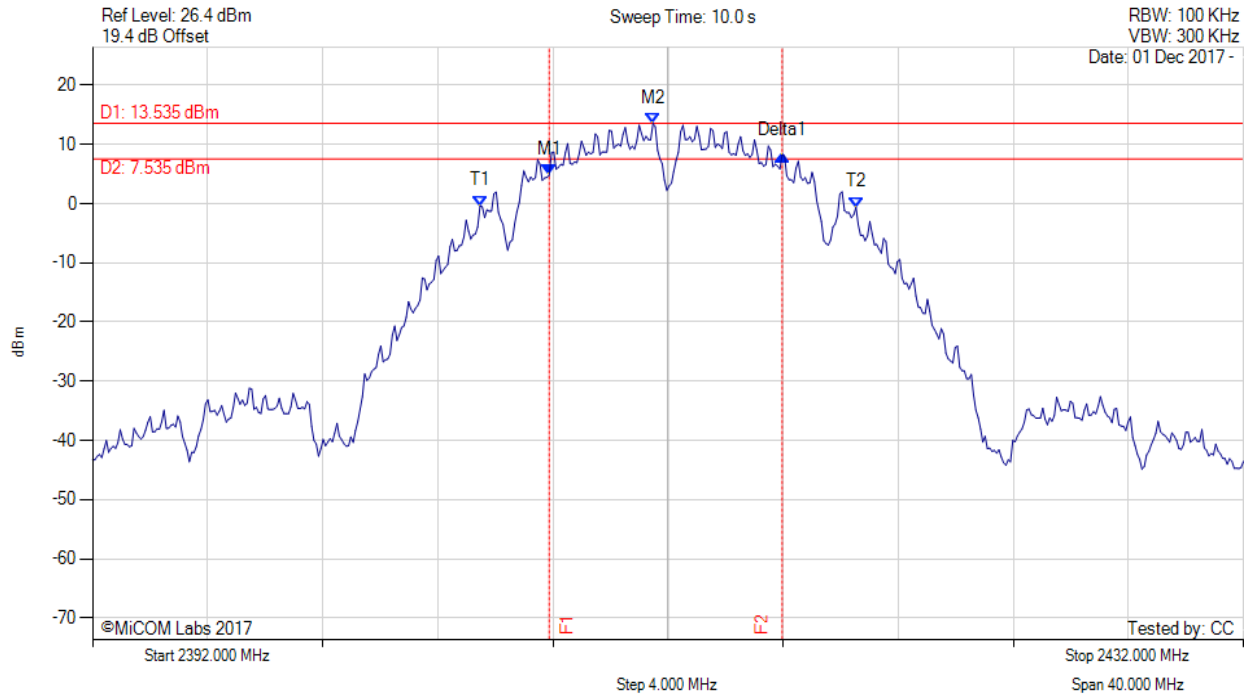

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2407.872 MHz : 4.767 dBm M2 : 2411.479 MHz : 13.535 dBm Delta1 : 8.096 MHz : 3.435 dB T1 : 2405.467 MHz : -0.393 dBm T2 : 2418.533 MHz : -0.635 dBm OBW : 13.066 MHz	Measured 6 dB Bandwidth: 8.096 MHz Limit: ≥500.0 kHz Margin: -7.60 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 78 of 191



6 dB & 99% BANDWIDTH

Variant: 802.11b, Channel: 2437.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

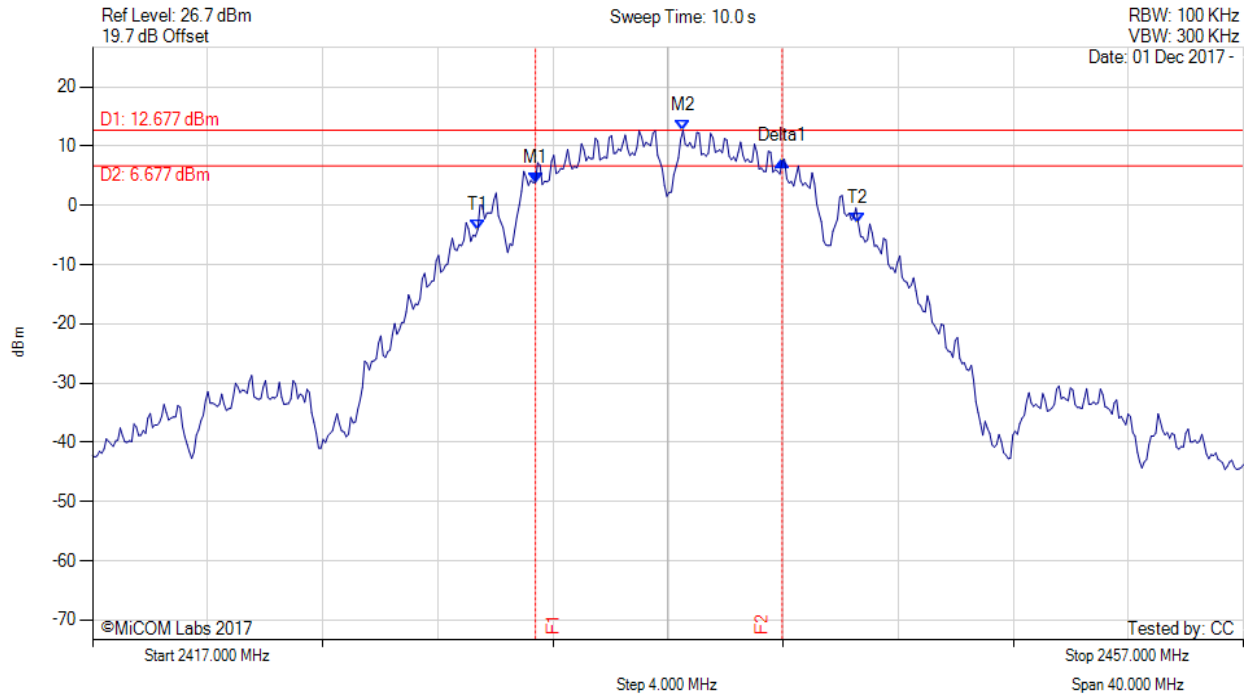

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2432.391 MHz : 3.851 dBm M2 : 2437.521 MHz : 12.677 dBm Delta1 : 8.577 MHz : 3.632 dB T1 : 2430.387 MHz : -4.140 dBm T2 : 2443.613 MHz : -2.960 dBm OBW : 13.226 MHz	Measured 6 dB Bandwidth: 8.577 MHz Limit: ≥500.0 kHz Margin: -8.08 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 79 of 191



6 dB & 99% BANDWIDTH

Variant: 802.11b, Channel: 2437.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

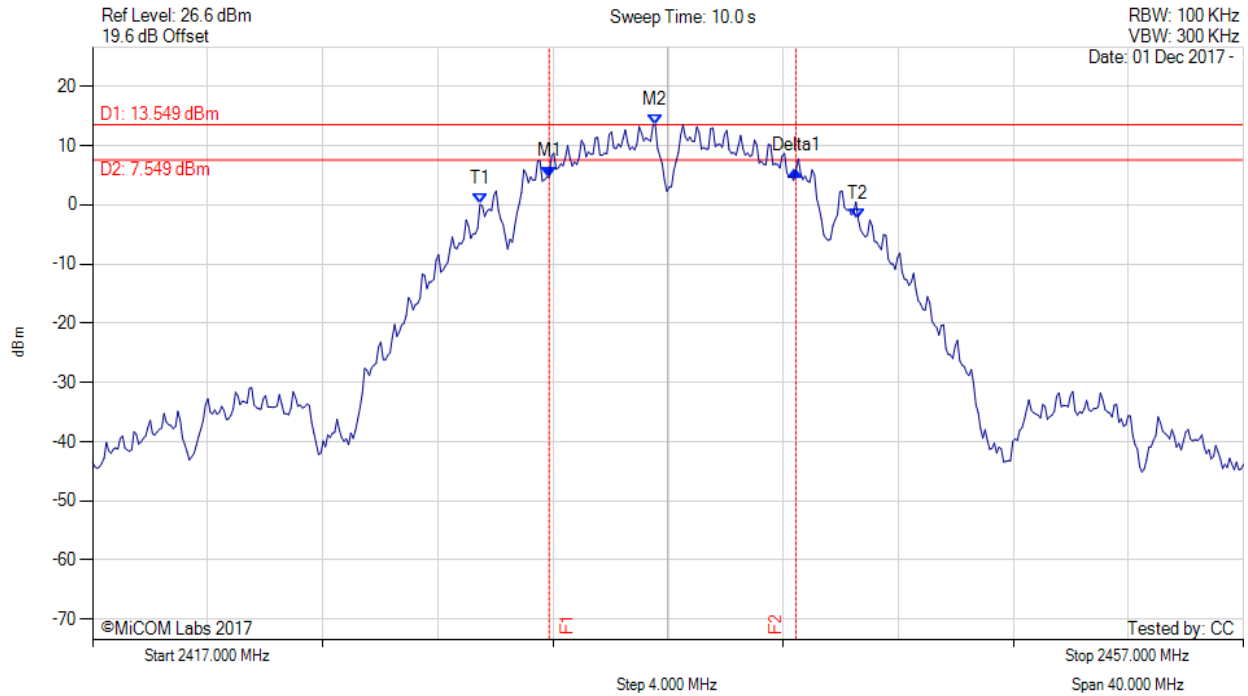

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2432.872 MHz : 4.733 dBm M2 : 2436.559 MHz : 13.549 dBm Delta1 : 8.577 MHz : 1.106 dB T1 : 2430.467 MHz : 0.084 dBm T2 : 2443.613 MHz : -2.450 dBm OBW : 13.146 MHz	Measured 6 dB Bandwidth: 8.577 MHz Limit: ≥500.0 kHz Margin: -8.08 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 80 of 191



6 dB & 99% BANDWIDTH

Variant: 802.11b, Channel: 2462.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

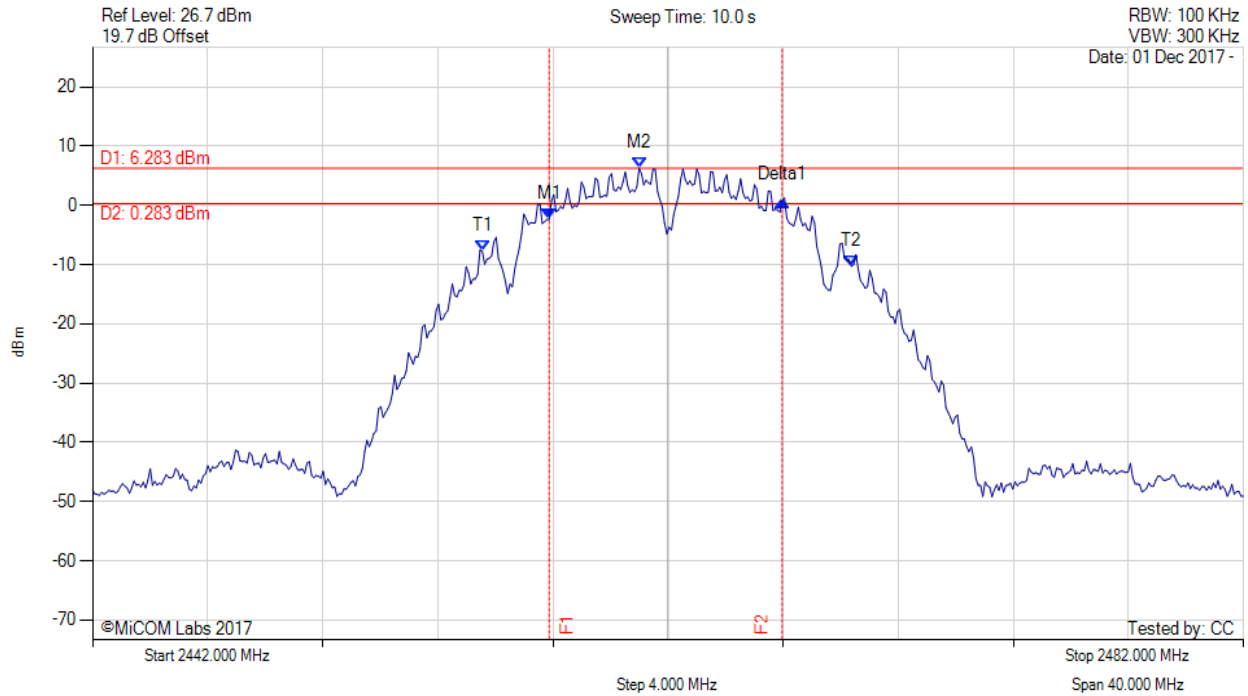

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2457.872 MHz : -2.362 dBm M2 : 2460.998 MHz : 6.283 dBm Delta1 : 8.096 MHz : 3.207 dB T1 : 2455.547 MHz : -7.766 dBm T2 : 2468.373 MHz : -10.276 dBm OBW : 12.826 MHz	Measured 6 dB Bandwidth: 8.096 MHz Limit: ≥500.0 kHz Margin: -7.60 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 81 of 191



6 dB & 99% BANDWIDTH

Variant: 802.11b, Channel: 2462.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

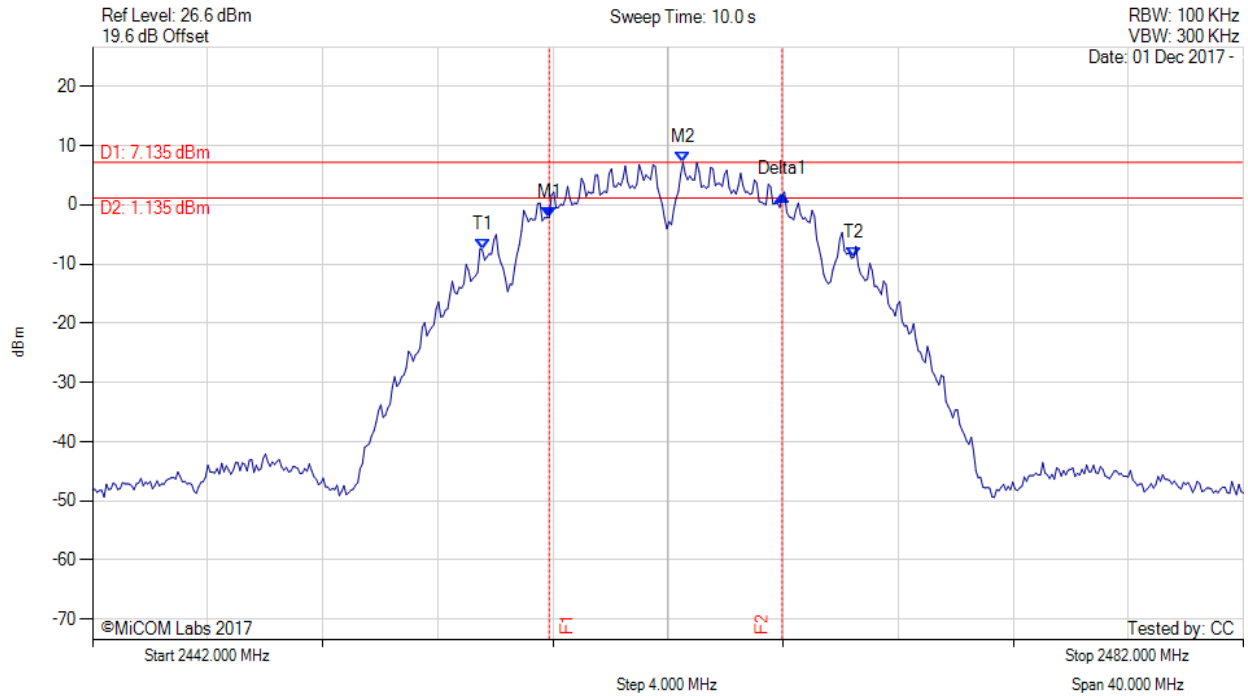

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2457.872 MHz : -2.102 dBm M2 : 2462.521 MHz : 7.135 dBm Delta1 : 8.096 MHz : 3.781 dB T1 : 2455.547 MHz : -7.579 dBm T2 : 2468.453 MHz : -8.869 dBm OBW : 12.906 MHz	Measured 6 dB Bandwidth: 8.096 MHz Limit: ≥500.0 kHz Margin: -7.60 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 82 of 191



6 dB & 99% BANDWIDTH

Variant: 802.11g, Channel: 2412.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

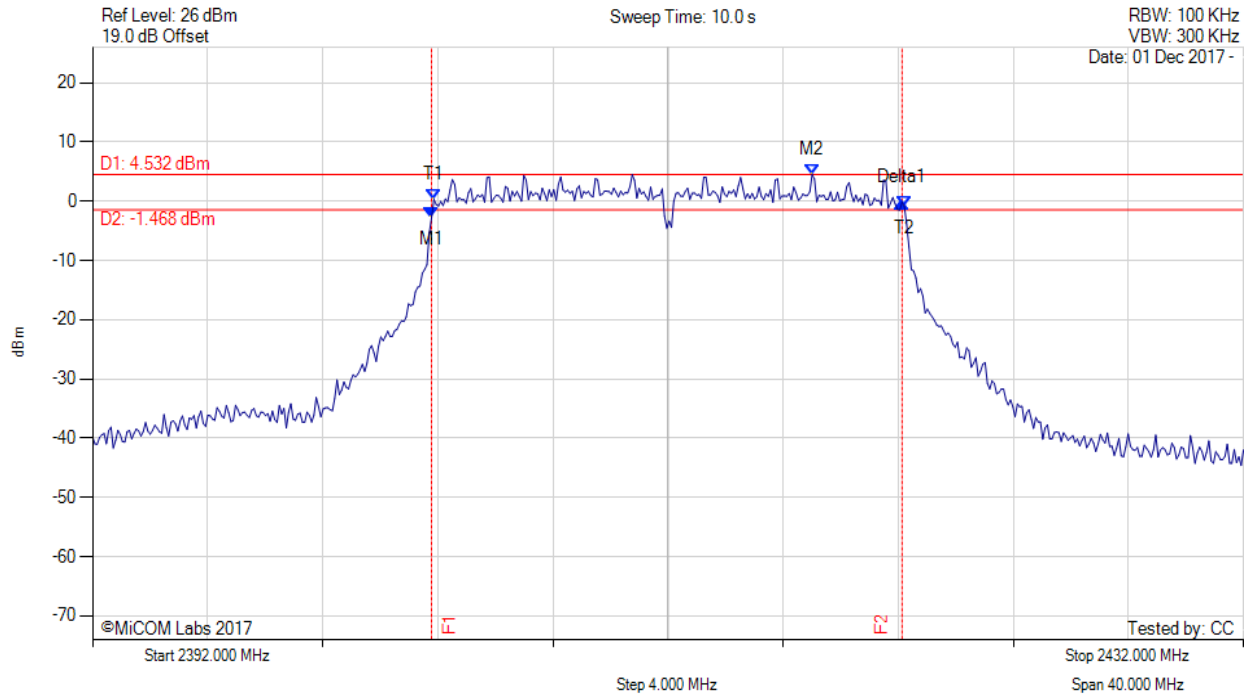

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2403.784 MHz : -2.784 dBm M2 : 2417.010 MHz : 4.532 dBm Delta1 : 16.353 MHz : 2.664 dB T1 : 2403.864 MHz : 0.293 dBm T2 : 2420.216 MHz : -0.976 dBm OBW : 16.353 MHz	Measured 6 dB Bandwidth: 16.353 MHz Limit: ≥ 500.0 kHz Margin: -15.85 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 83 of 191



6 dB & 99% BANDWIDTH

Variant: 802.11g, Channel: 2412.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

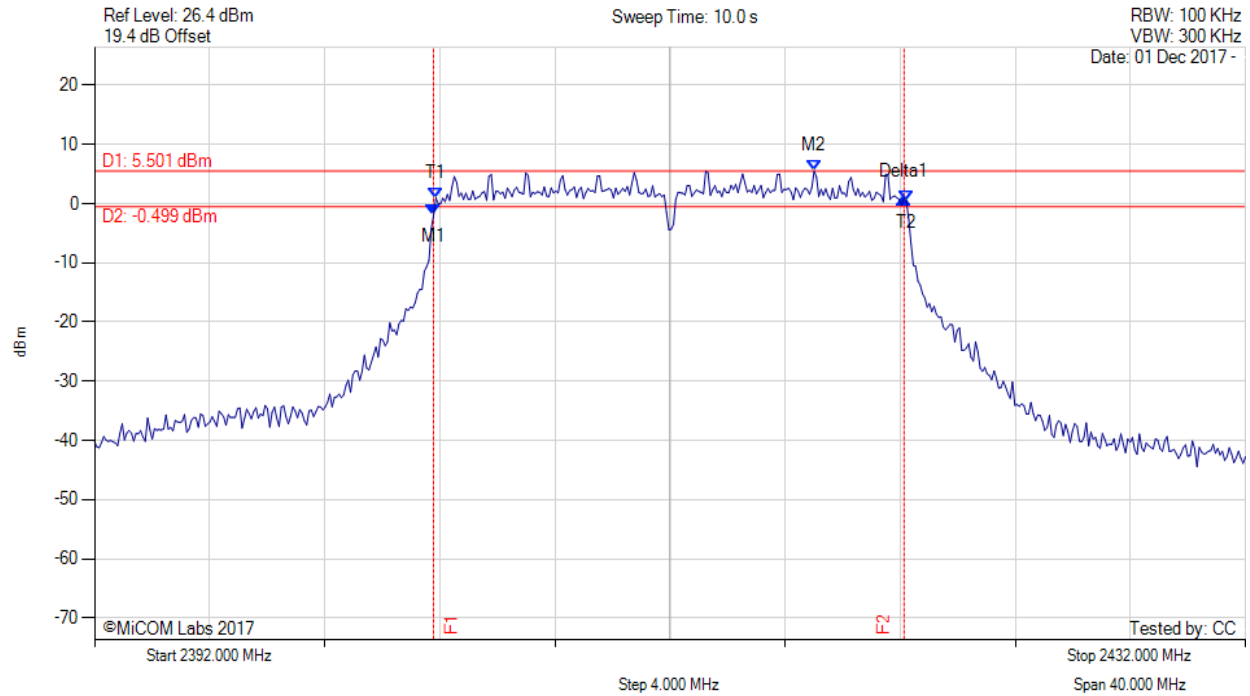

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2403.784 MHz : -1.983 dBm M2 : 2417.010 MHz : 5.501 dBm Delta1 : 16.353 MHz : 2.994 dB T1 : 2403.864 MHz : 0.966 dBm T2 : 2420.216 MHz : 0.340 dBm OBW : 16.353 MHz	Measured 6 dB Bandwidth: 16.353 MHz Limit: ≥ 500.0 kHz Margin: -15.85 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 84 of 191



6 dB & 99% BANDWIDTH

Variant: 802.11g, Channel: 2437.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

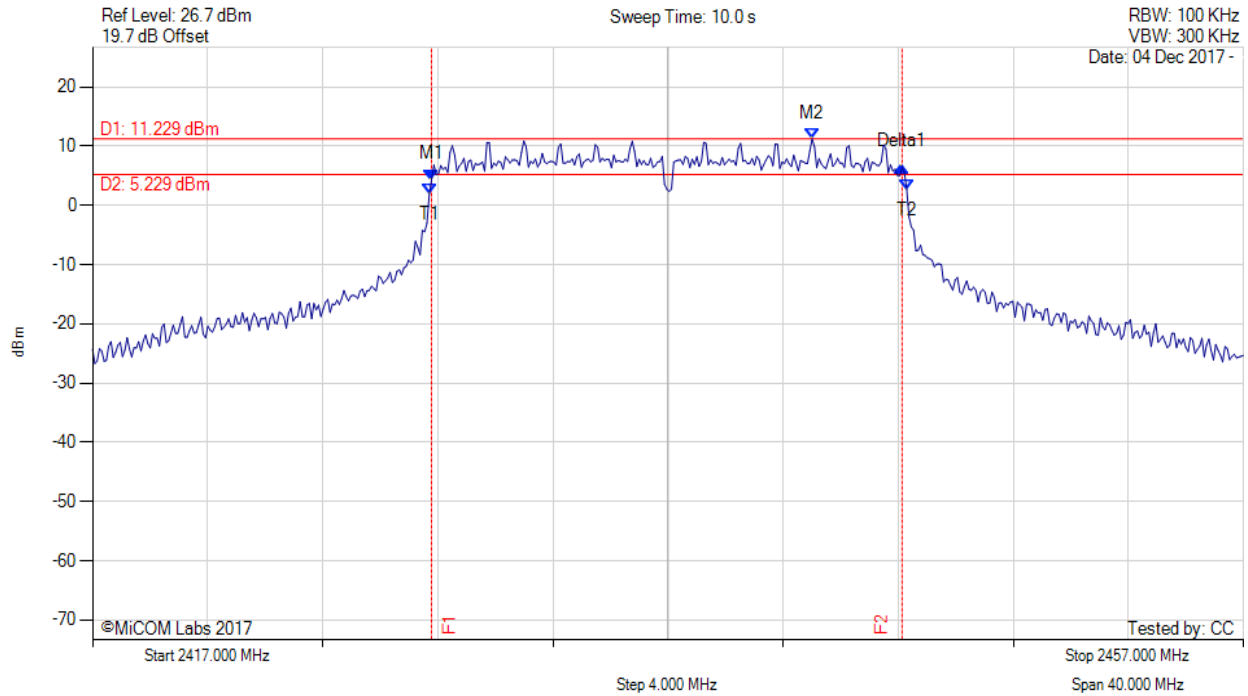

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2428.784 MHz : 4.351 dBm M2 : 2442.010 MHz : 11.229 dBm Delta1 : 16.353 MHz : 2.144 dB T1 : 2428.703 MHz : 1.992 dBm T2 : 2445.297 MHz : 2.690 dBm OBW : 16.593 MHz	Measured 6 dB Bandwidth: 16.353 MHz Limit: ≥ 500.0 kHz Margin: -15.85 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 85 of 191



6 dB & 99% BANDWIDTH

Variant: 802.11g, Channel: 2437.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

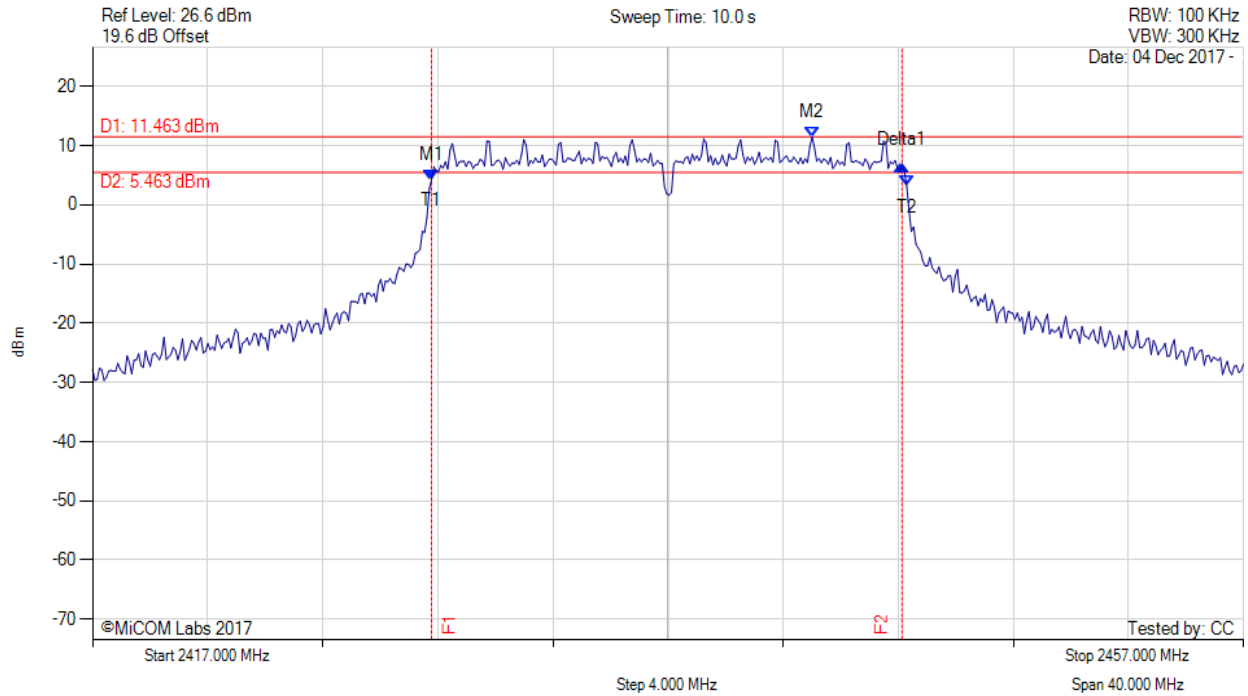

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2428.784 MHz : 4.231 dBm M2 : 2442.010 MHz : 11.463 dBm Delta1 : 16.353 MHz : 2.449 dB T1 : 2428.784 MHz : 4.231 dBm T2 : 2445.297 MHz : 3.133 dBm OBW : 16.513 MHz	Measured 6 dB Bandwidth: 16.353 MHz Limit: ≥ 500.0 kHz Margin: -15.85 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 86 of 191



6 dB & 99% BANDWIDTH

Variant: 802.11g, Channel: 2462.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

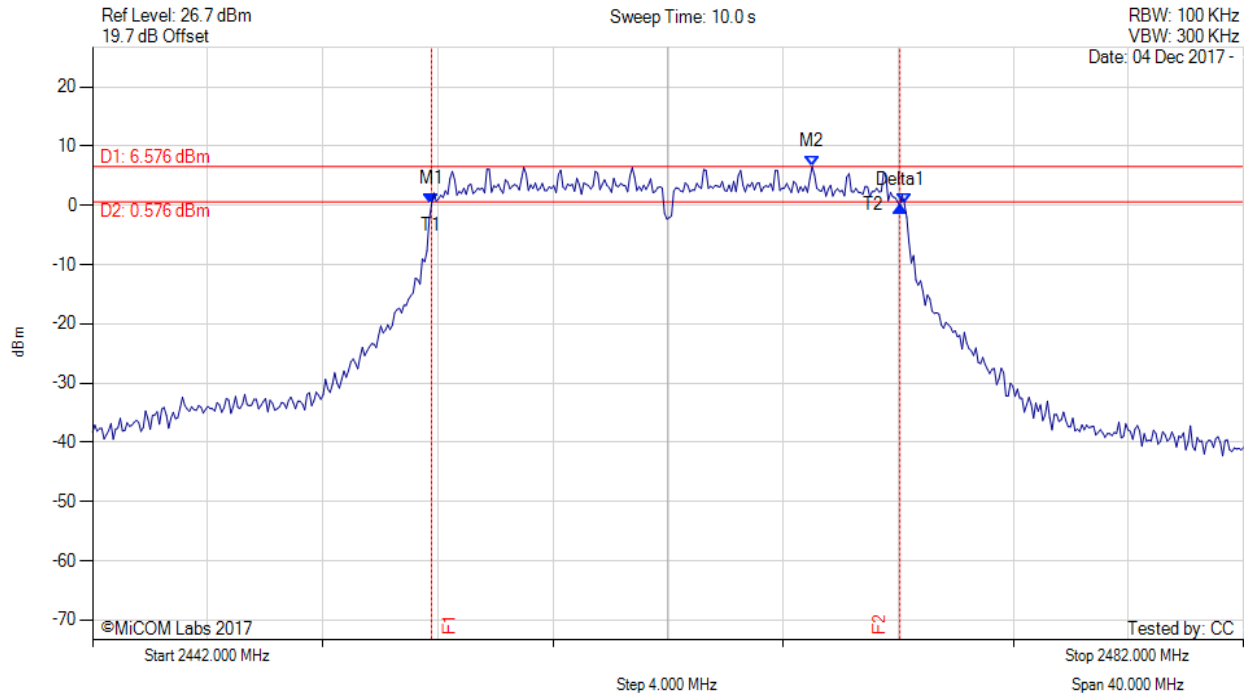

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2453.784 MHz : 0.178 dBm M2 : 2467.010 MHz : 6.576 dBm Delta1 : 16.273 MHz : -0.266 dB T1 : 2453.784 MHz : 0.178 dBm T2 : 2470.216 MHz : 0.276 dBm OBW : 16.433 MHz	Measured 6 dB Bandwidth: 16.273 MHz Limit: ≥ 500.0 kHz Margin: -15.77 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 87 of 191



6 dB & 99% BANDWIDTH

Variant: 802.11g, Channel: 2462.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

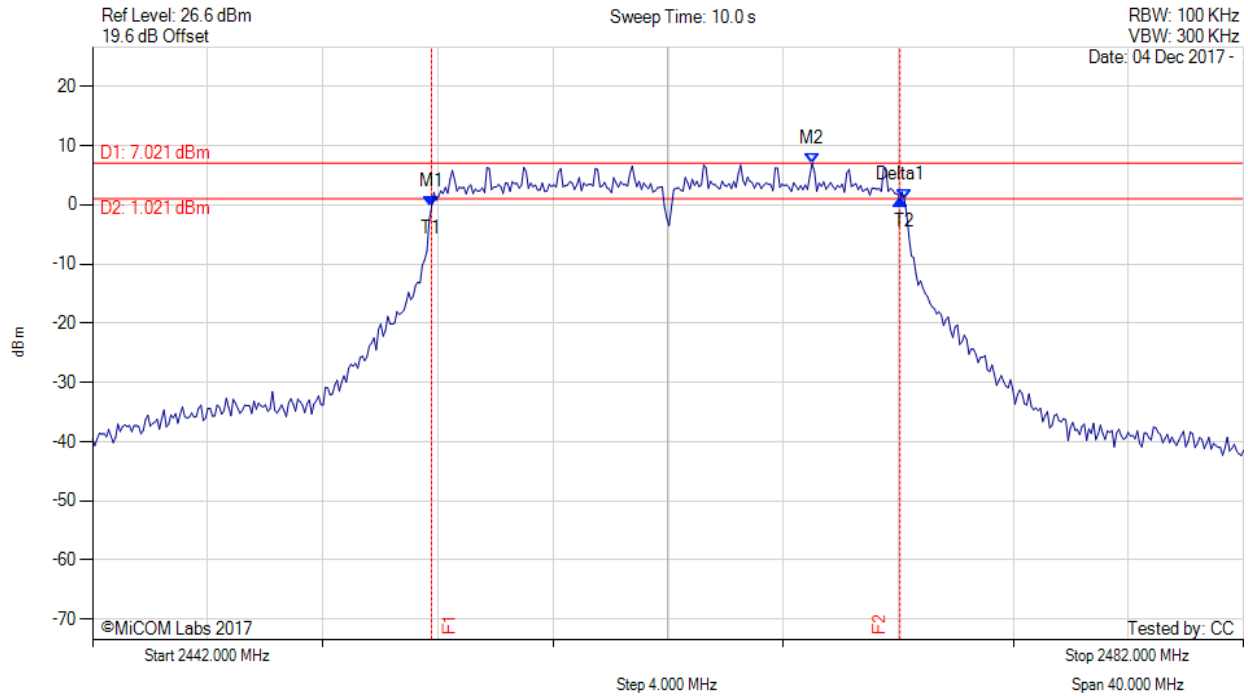

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2453.784 MHz : -0.370 dBm M2 : 2467.010 MHz : 7.021 dBm Delta1 : 16.273 MHz : 1.173 dB T1 : 2453.784 MHz : -0.370 dBm T2 : 2470.216 MHz : 0.843 dBm OBW : 16.433 MHz	Measured 6 dB Bandwidth: 16.273 MHz Limit: ≥ 500.0 kHz Margin: -15.77 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 88 of 191



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

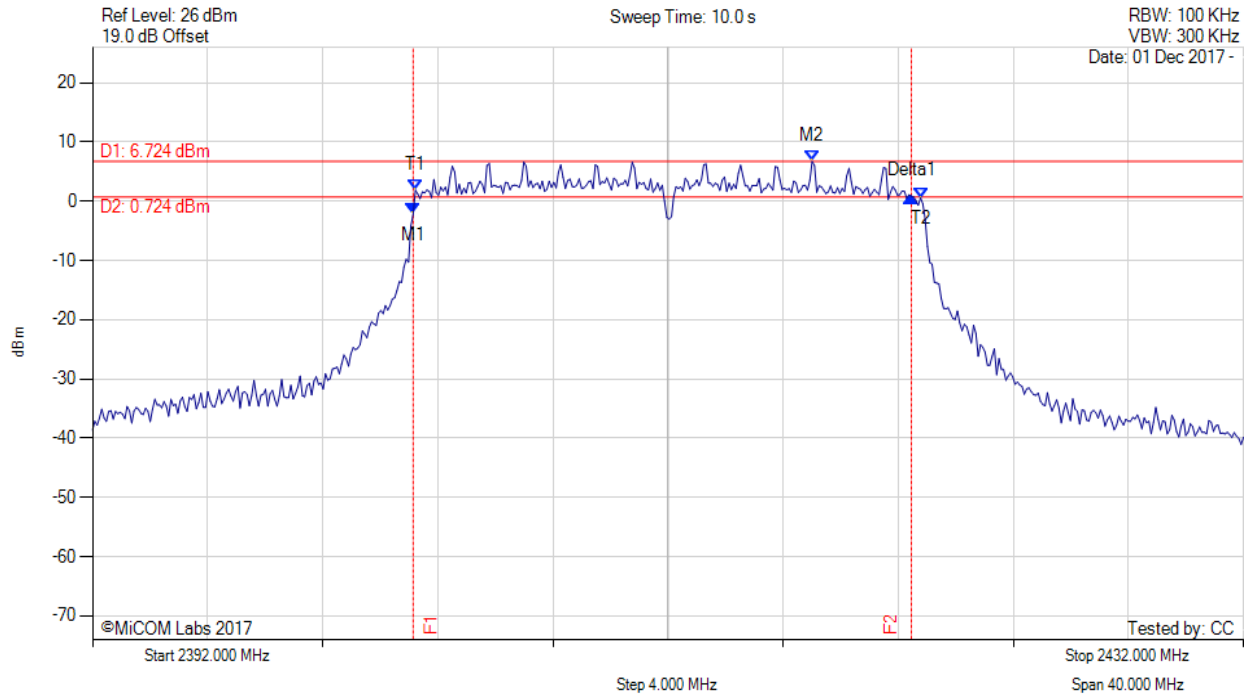

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2403.142 MHz : -2.173 dBm M2 : 2417.010 MHz : 6.724 dBm Delta1 : 17.315 MHz : 3.024 dB T1 : 2403.222 MHz : 1.876 dBm T2 : 2420.778 MHz : 0.586 dBm OBW : 17.555 MHz	Measured 6 dB Bandwidth: 17.315 MHz Limit: ≥500.0 kHz Margin: -16.82 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 89 of 191



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

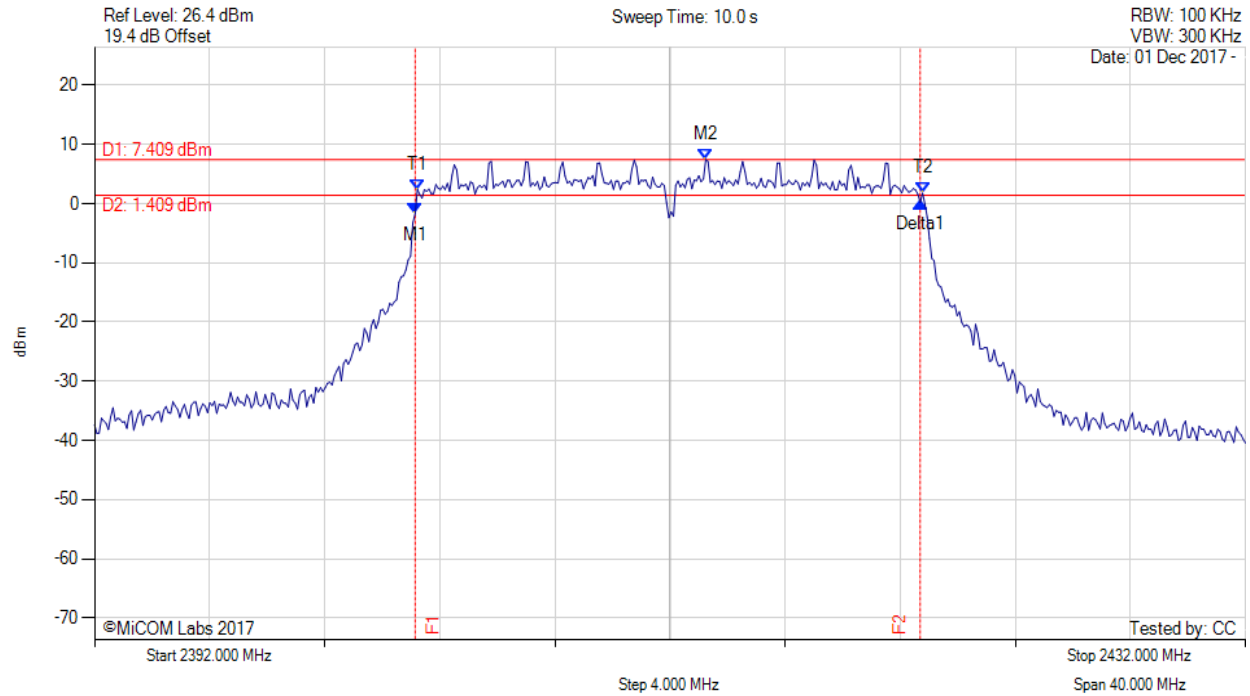

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2403.142 MHz : -1.717 dBm M2 : 2413.242 MHz : 7.409 dBm Delta1 : 17.555 MHz : 1.914 dB T1 : 2403.222 MHz : 2.392 dBm T2 : 2420.778 MHz : 1.794 dBm OBW : 17.555 MHz	Measured 6 dB Bandwidth: 17.555 MHz Limit: ≥500.0 kHz Margin: -17.06 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 90 of 191



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

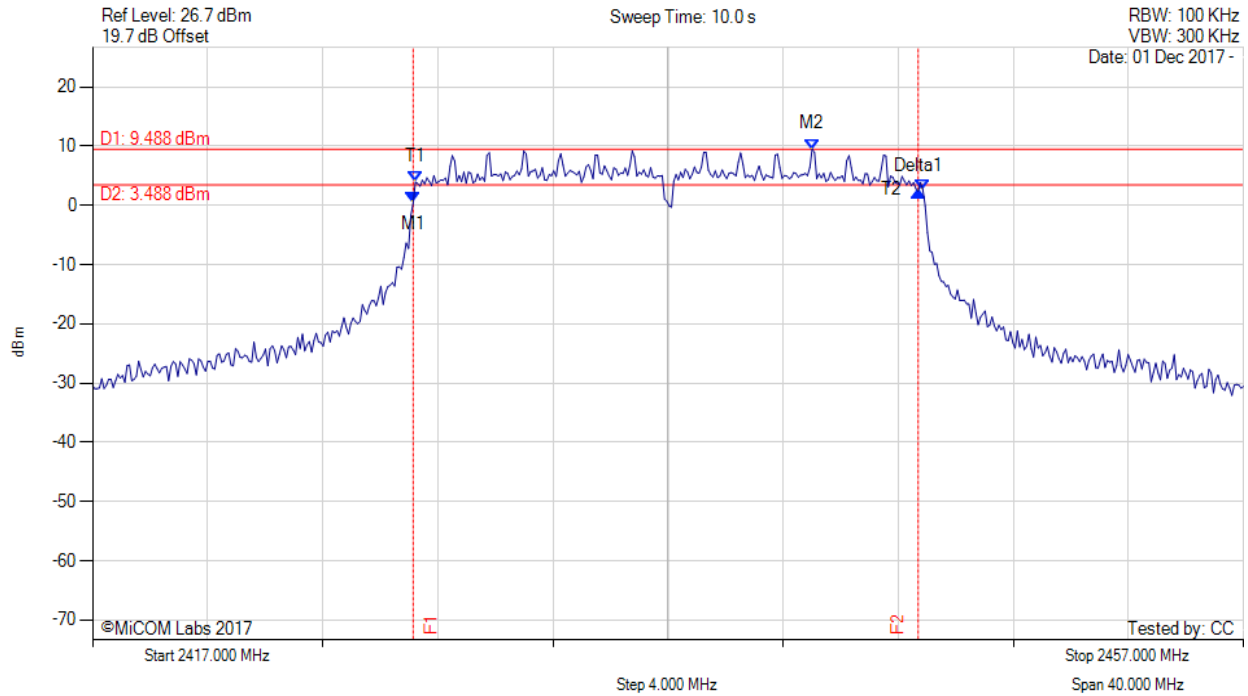

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2428.142 MHz : 0.418 dBm M2 : 2442.010 MHz : 9.488 dBm Delta1 : 17.555 MHz : 2.024 dB T1 : 2428.222 MHz : 3.944 dBm T2 : 2445.858 MHz : 2.671 dBm OBW : 17.635 MHz	Measured 6 dB Bandwidth: 17.555 MHz Limit: ≥ 500.0 kHz Margin: -17.06 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 91 of 191



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

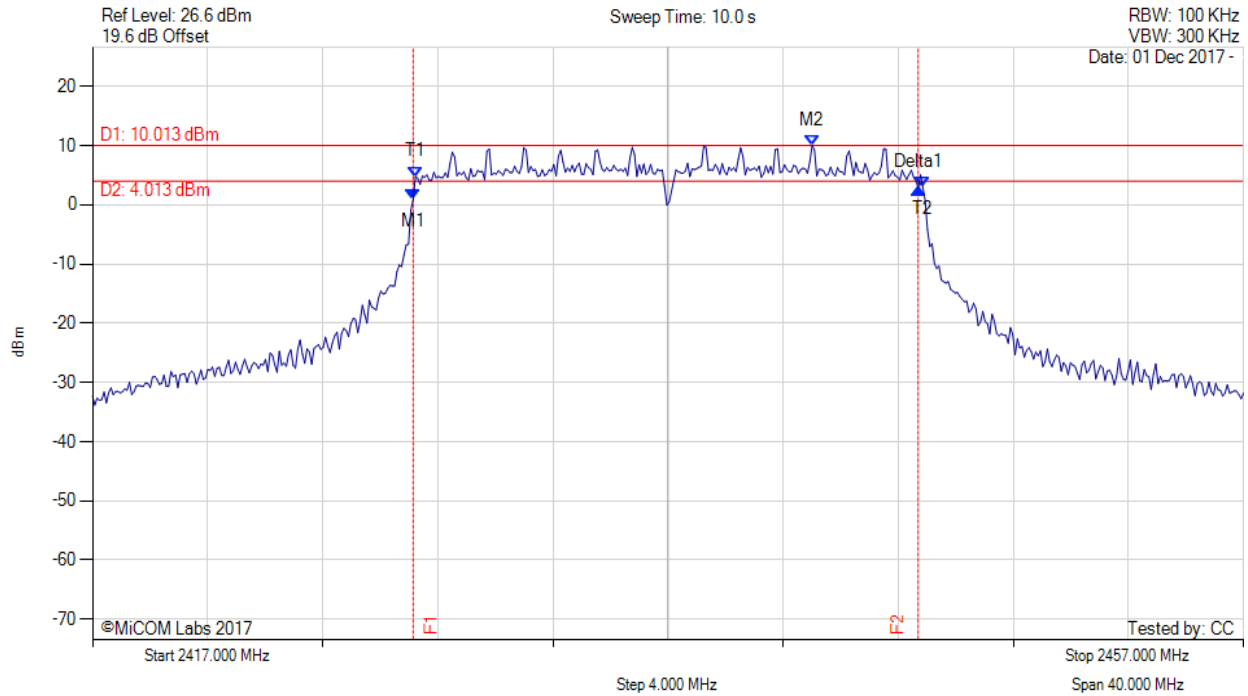

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2428.142 MHz : 0.865 dBm M2 : 2442.010 MHz : 10.013 dBm Delta1 : 17.555 MHz : 1.985 dB T1 : 2428.222 MHz : 4.729 dBm T2 : 2445.858 MHz : 2.968 dBm OBW : 17.635 MHz	Measured 6 dB Bandwidth: 17.555 MHz Limit: ≥ 500.0 kHz Margin: -17.06 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 92 of 191



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

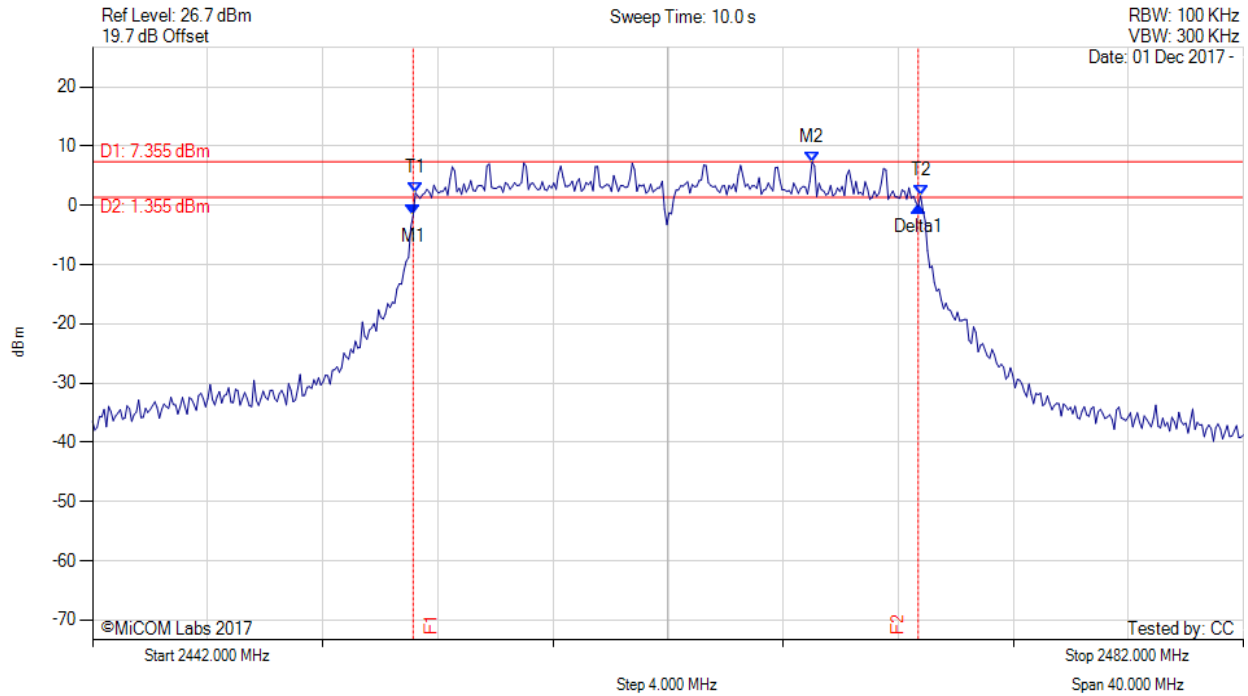

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2453.142 MHz : -1.673 dBm M2 : 2467.010 MHz : 7.355 dBm Delta1 : 17.555 MHz : 1.540 dB T1 : 2453.222 MHz : 2.126 dBm T2 : 2470.778 MHz : 1.634 dBm OBW : 17.555 MHz	Measured 6 dB Bandwidth: 17.555 MHz Limit: ≥ 500.0 kHz Margin: -17.06 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 93 of 191



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

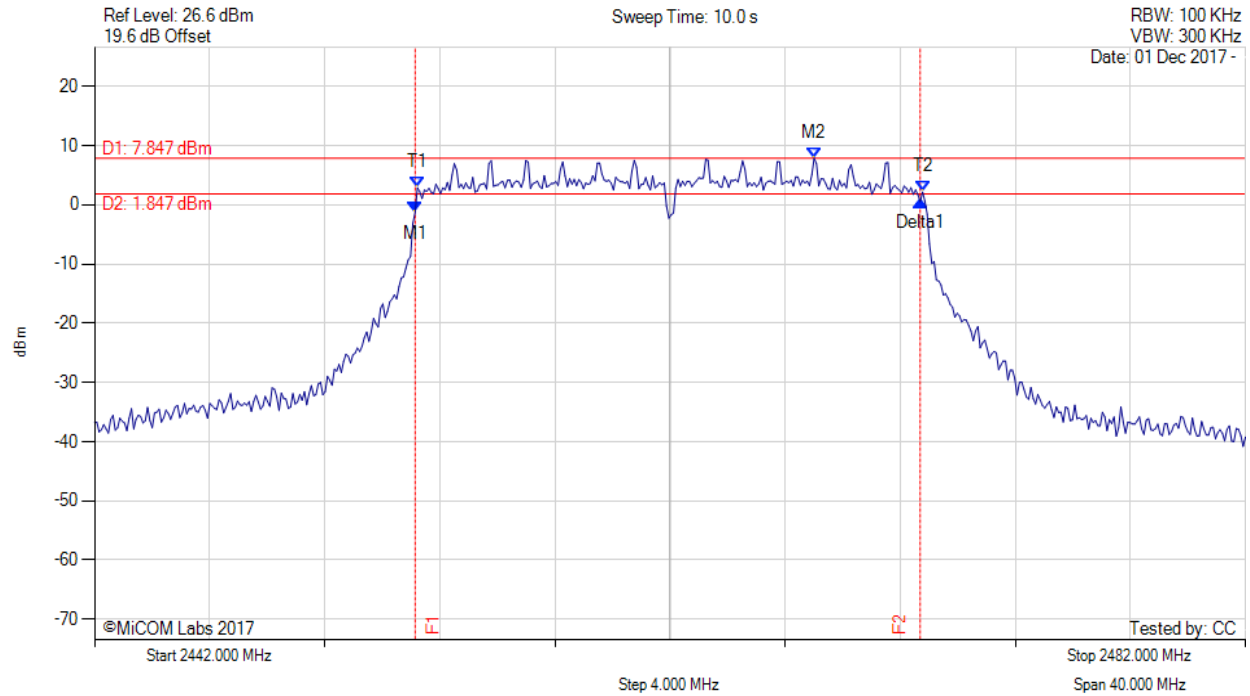

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2453.142 MHz : -1.266 dBm M2 : 2467.010 MHz : 7.847 dBm Delta1 : 17.555 MHz : 1.849 dB T1 : 2453.222 MHz : 2.880 dBm T2 : 2470.778 MHz : 2.175 dBm OBW : 17.555 MHz	Measured 6 dB Bandwidth: 17.555 MHz Limit: ≥ 500.0 kHz Margin: -17.06 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 94 of 191



6 dB & 99% BANDWIDTH


Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

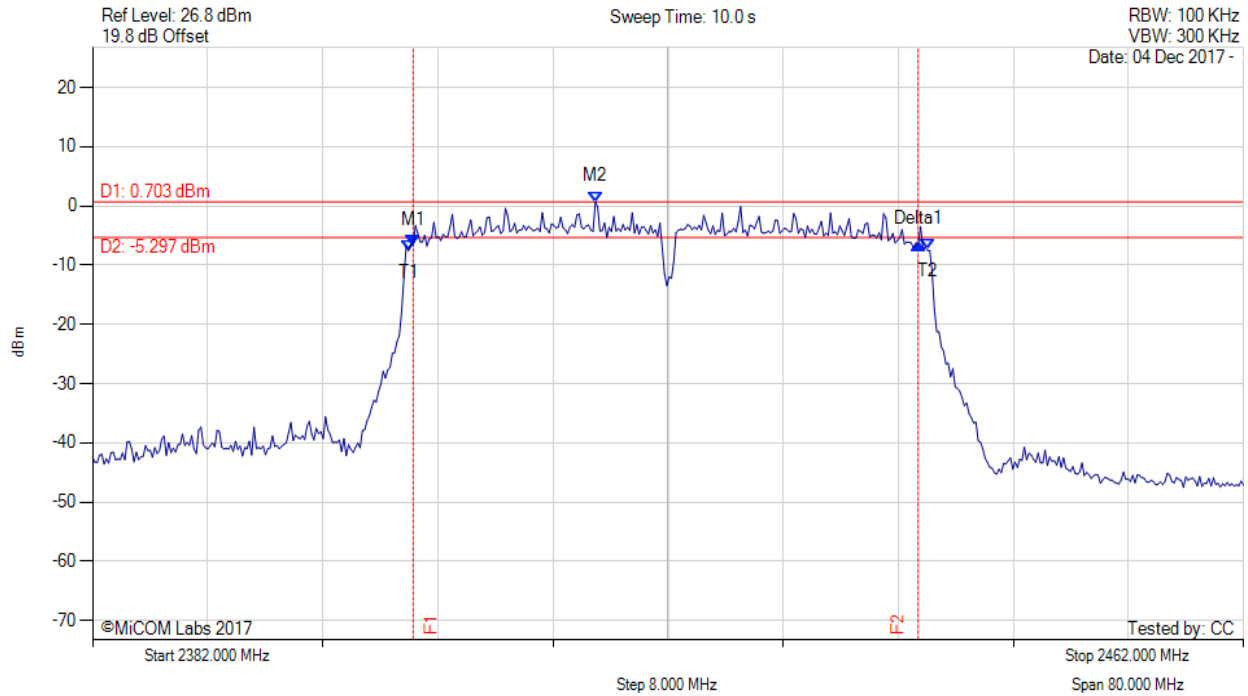

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2404.285 MHz : -6.667 dBm M2 : 2416.950 MHz : 0.703 dBm Delta1 : 35.110 MHz : 0.266 dB T1 : 2403.964 MHz : -7.568 dBm T2 : 2440.036 MHz : -7.444 dBm OBW : 36.072 MHz	Measured 6 dB Bandwidth: 35.110 MHz Limit: ≥500.0 kHz Margin: -34.61 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

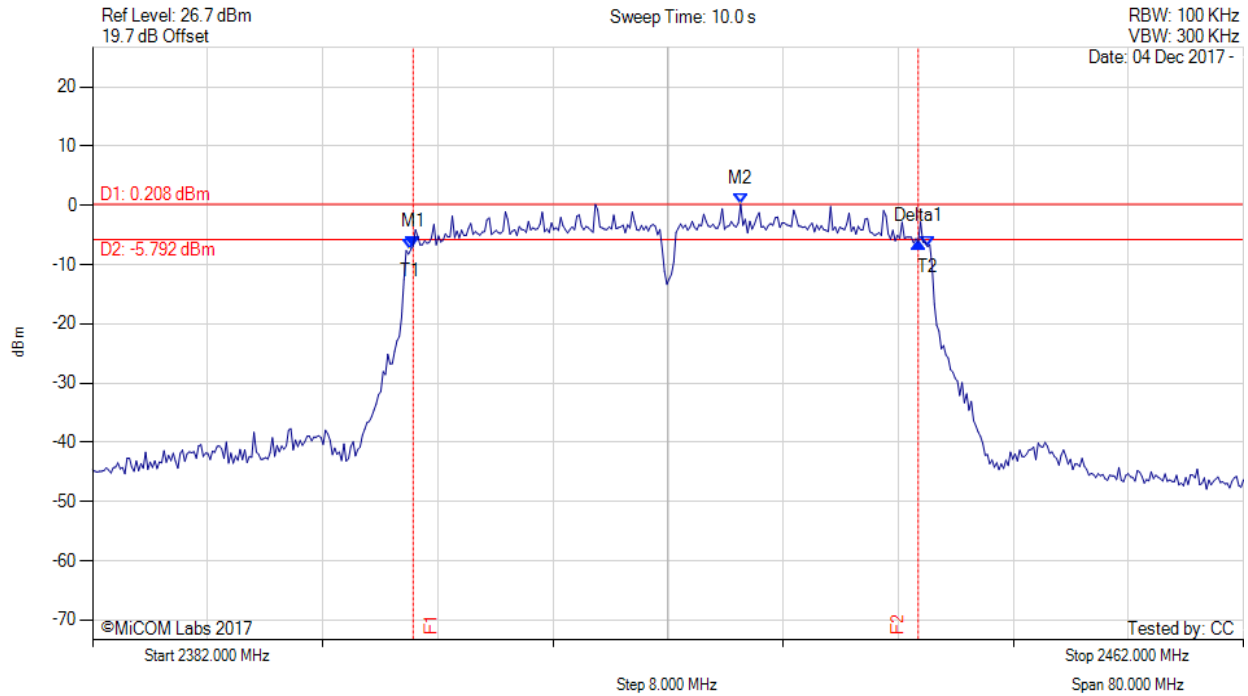

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2404.285 MHz : -6.900 dBm M2 : 2427.050 MHz : 0.208 dBm Delta1 : 35.110 MHz : 0.730 dB T1 : 2404.124 MHz : -7.449 dBm T2 : 2440.036 MHz : -6.942 dBm OBW : 35.912 MHz	Measured 6 dB Bandwidth: 35.110 MHz Limit: ≥500.0 kHz Margin: -34.61 MHz

[back to matrix](#)




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 96 of 191



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

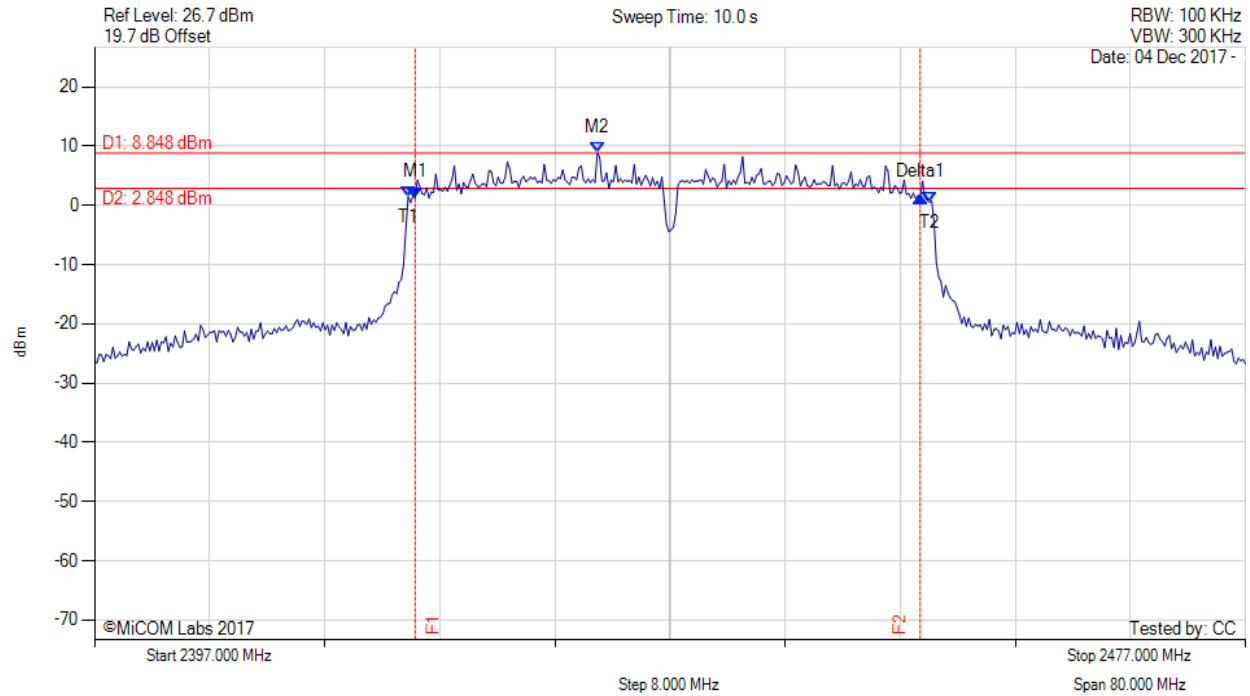

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2419.285 MHz : 1.307 dBm M2 : 2431.950 MHz : 8.848 dBm Delta1 : 35.110 MHz : 0.104 dB T1 : 2418.804 MHz : 1.469 dBm T2 : 2455.036 MHz : 0.562 dBm OBW : 36.232 MHz	Measured 6 dB Bandwidth: 35.110 MHz Limit: ≥500.0 kHz Margin: -34.61 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 97 of 191



6 dB & 99% BANDWIDTH


Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

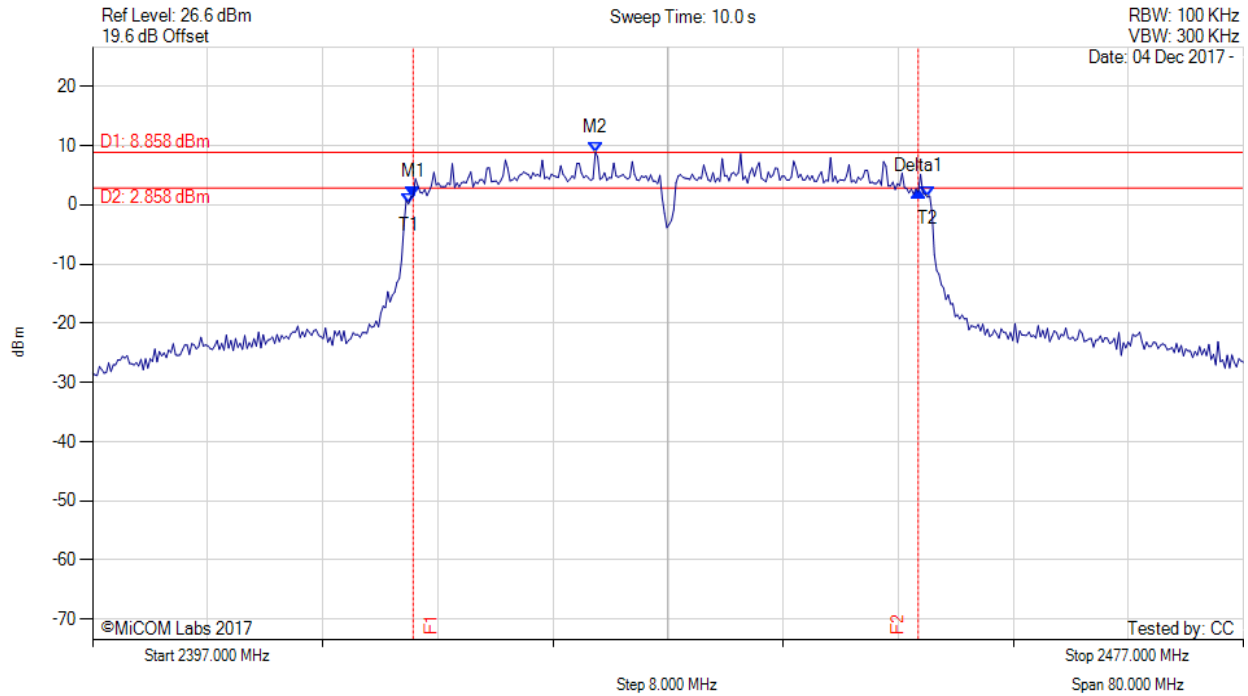

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2419.285 MHz : 1.420 dBm M2 : 2431.950 MHz : 8.858 dBm Delta1 : 35.110 MHz : 0.777 dB T1 : 2418.964 MHz : 0.159 dBm T2 : 2455.036 MHz : 1.298 dBm OBW : 36.072 MHz	Measured 6 dB Bandwidth: 35.110 MHz Limit: ≥500.0 kHz Margin: -34.61 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

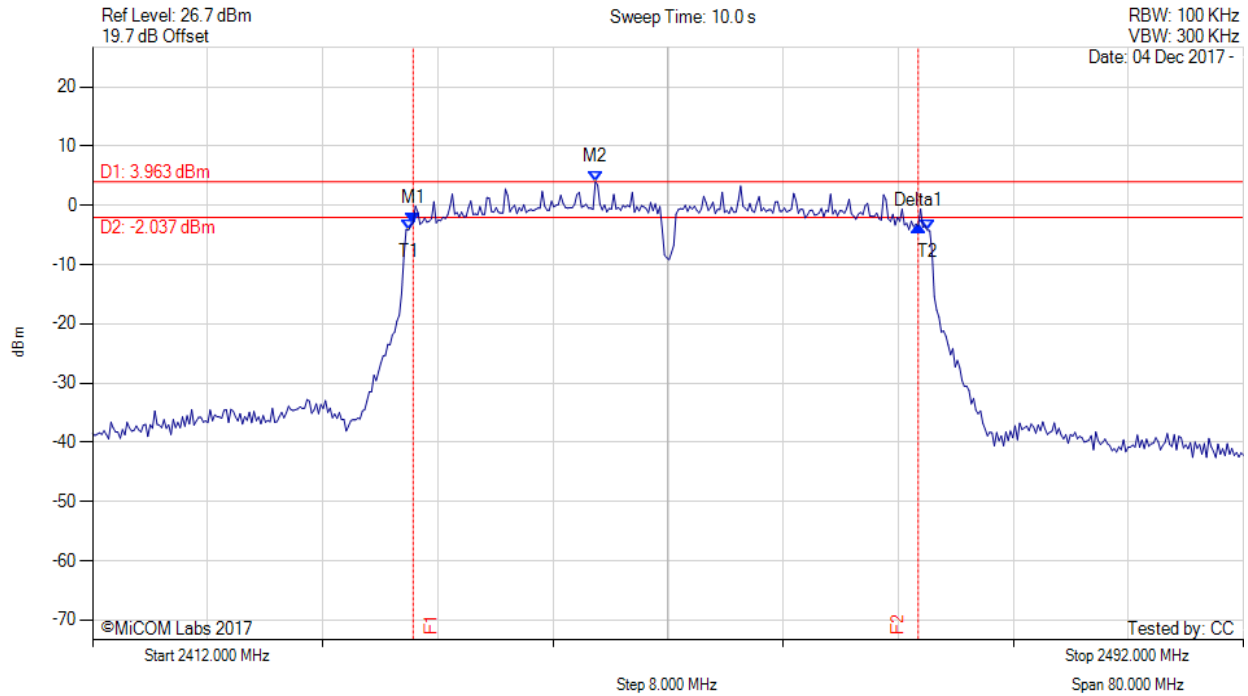

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2434.285 MHz : -2.972 dBm M2 : 2446.950 MHz : 3.963 dBm Delta1 : 35.110 MHz : -0.517 dB T1 : 2433.964 MHz : -4.176 dBm T2 : 2470.036 MHz : -4.189 dBm OBW : 36.072 MHz	Measured 6 dB Bandwidth: 35.110 MHz Limit: ≥500.0 kHz Margin: -34.61 MHz

[back to matrix](#)




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 99 of 191



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

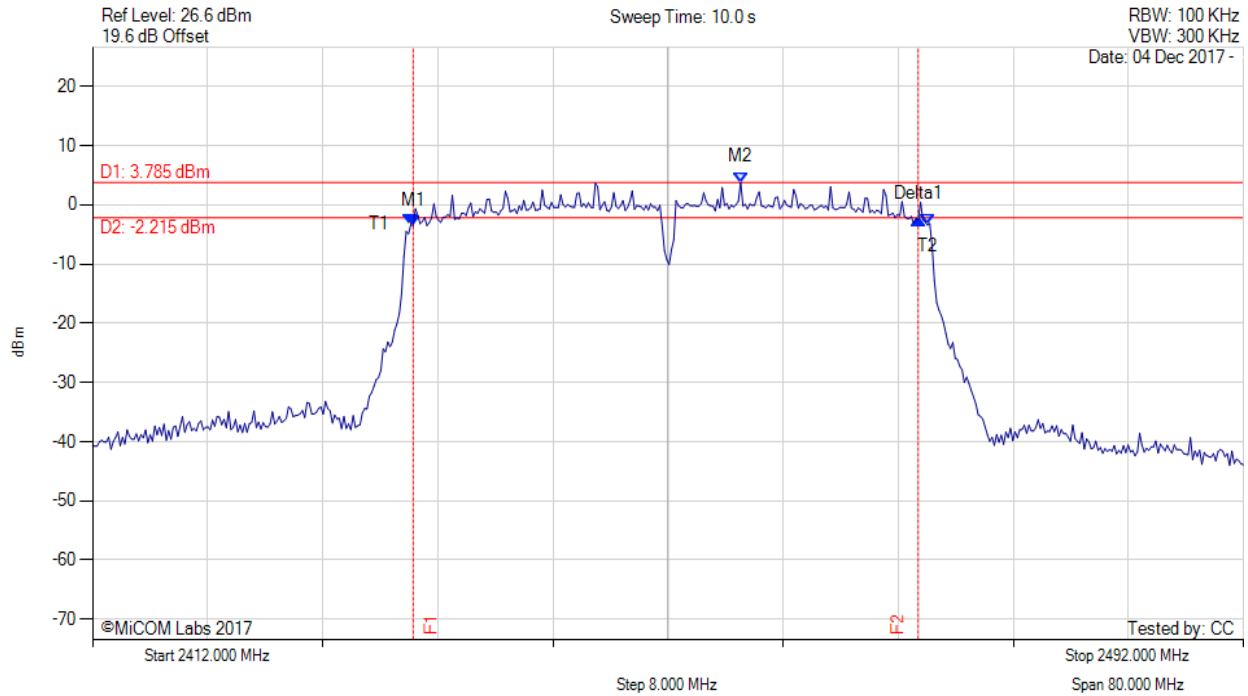

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2434.285 MHz : -3.546 dBm M2 : 2457.050 MHz : 3.785 dBm Delta1 : 35.110 MHz : 1.074 dB T1 : 2434.124 MHz : -3.278 dBm T2 : 2470.036 MHz : -3.404 dBm OBW : 35.912 MHz	Measured 6 dB Bandwidth: 35.110 MHz Limit: ≥500.0 kHz Margin: -34.61 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 100 of 191

A.2. Power Spectral Density



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11b, Channel: 2412.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

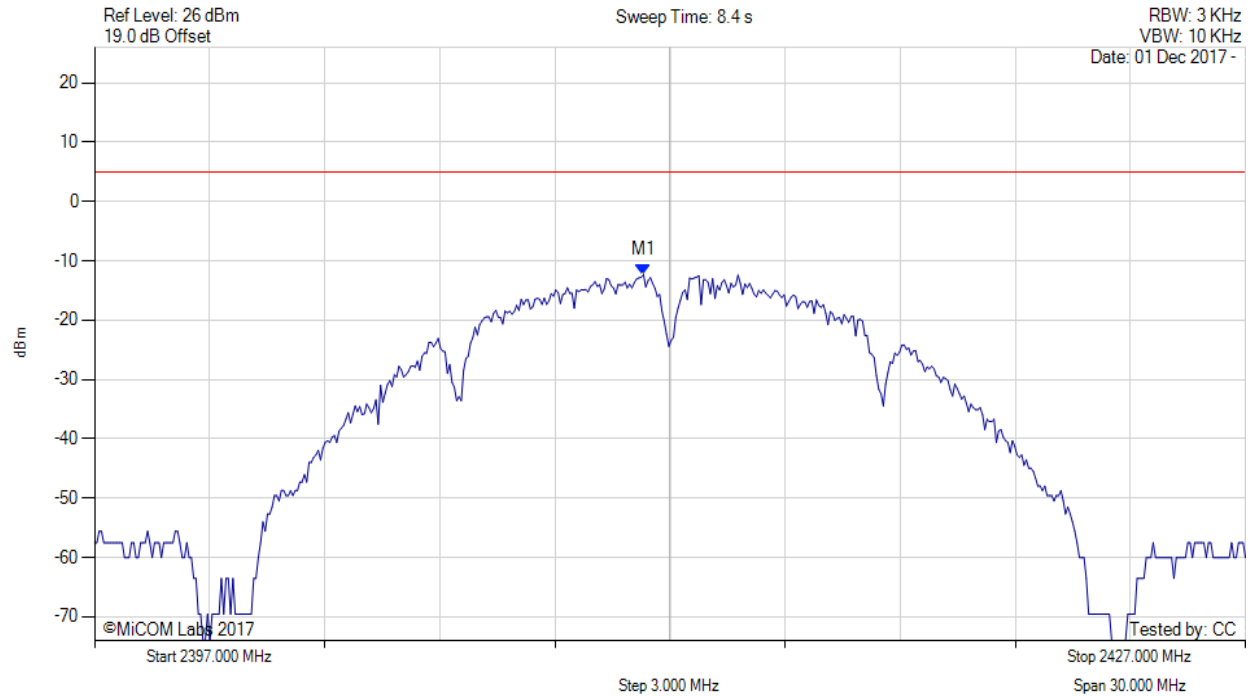

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2411.309 MHz : -12.311 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 101 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11b, Channel: 2412.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

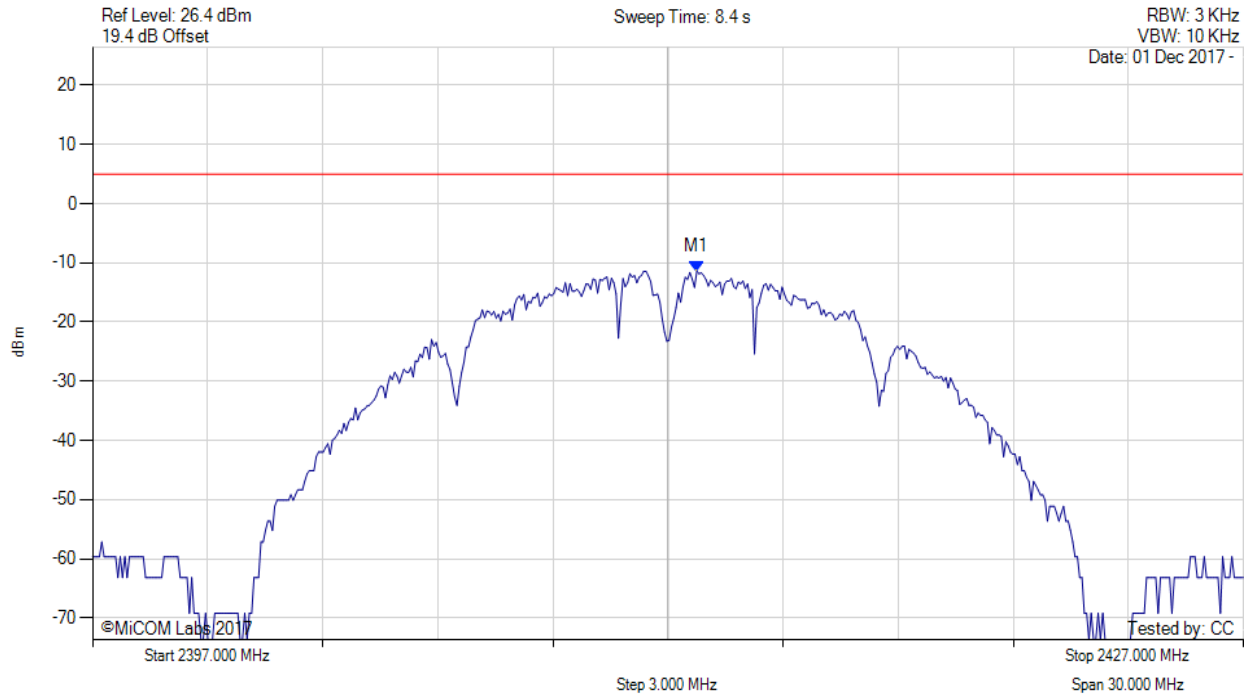

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2412.752 MHz : -11.391 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 102 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11b, Channel: 2412.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

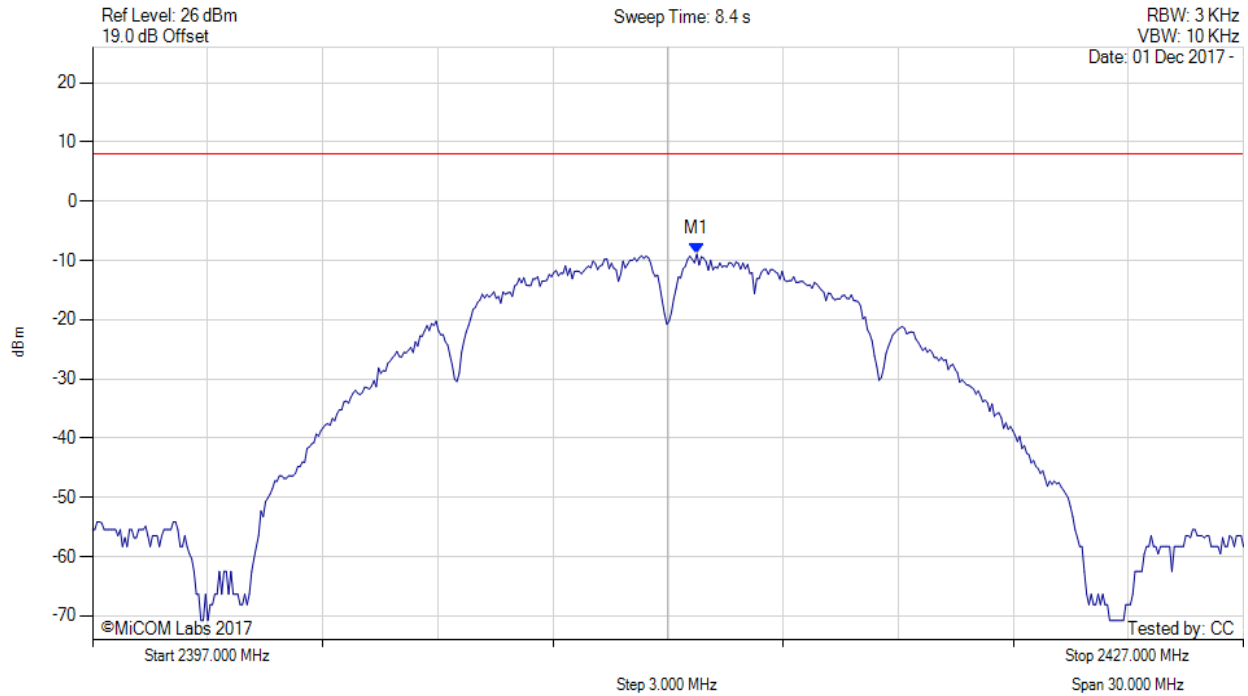

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2412.800 MHz : -8.906 dBm M1 + DCCF : 2412.800 MHz : -8.862 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 8.0 dBm Margin: -16.9 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 103 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11b, Channel: 2437.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

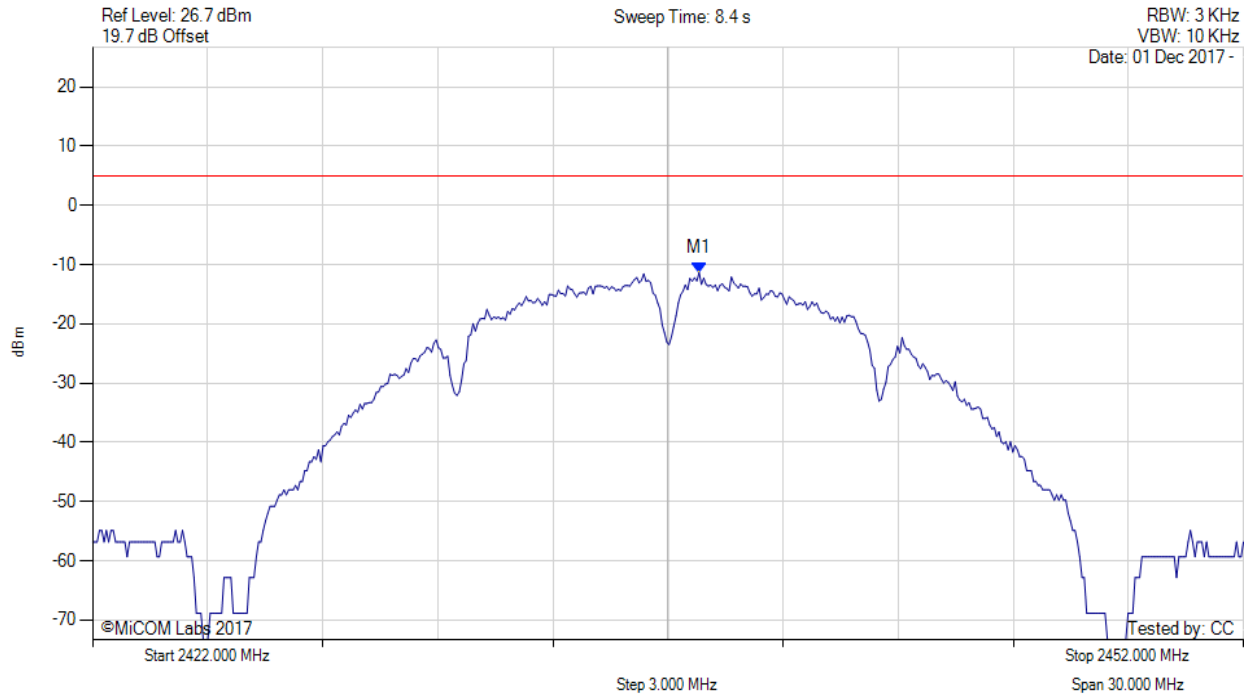

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2437.812 MHz : -11.364 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 104 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11b, Channel: 2437.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

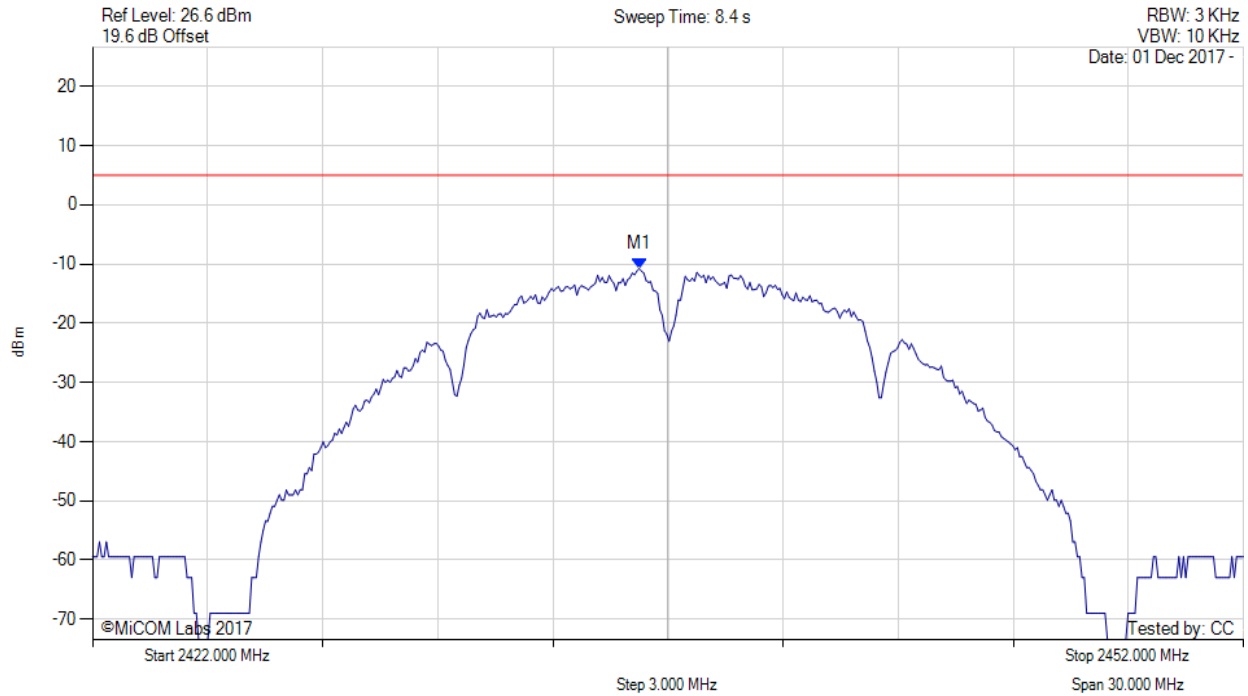

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2436.248 MHz : -10.764 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 105 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11b, Channel: 2437.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

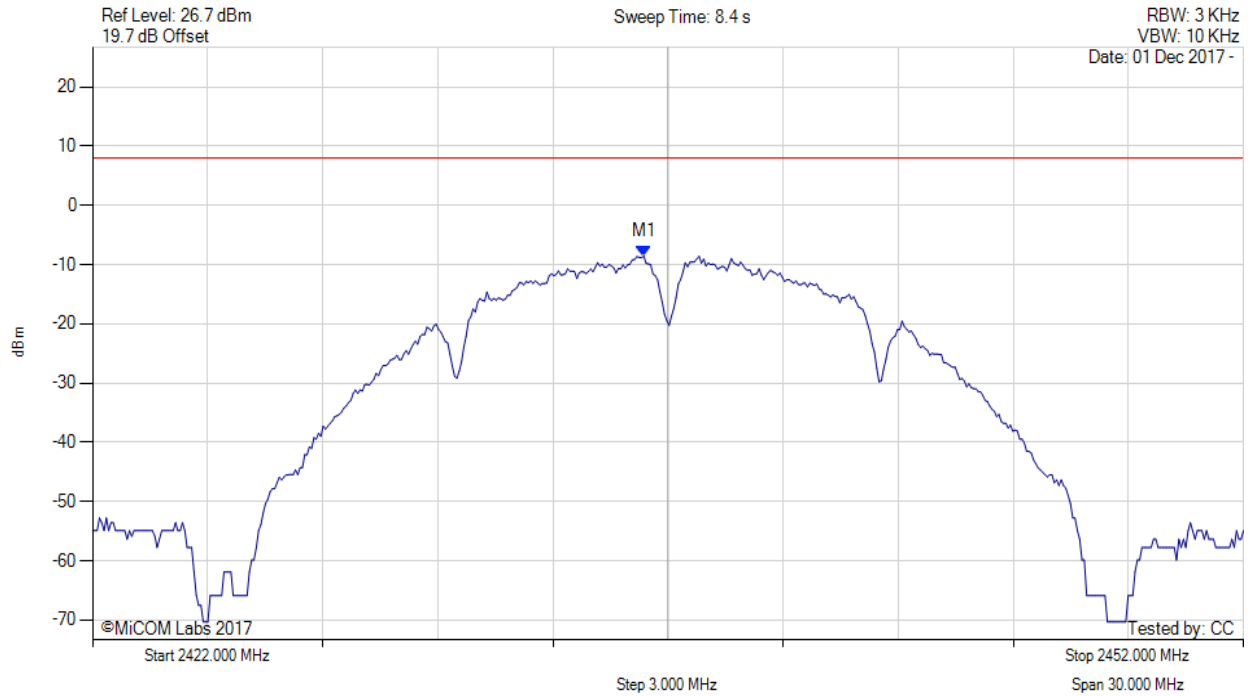

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2436.400 MHz : -8.538 dBm M1 + DCCF : 2436.400 MHz : -8.494 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 8.0 dBm Margin: -16.5 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 106 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11b, Channel: 2462.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

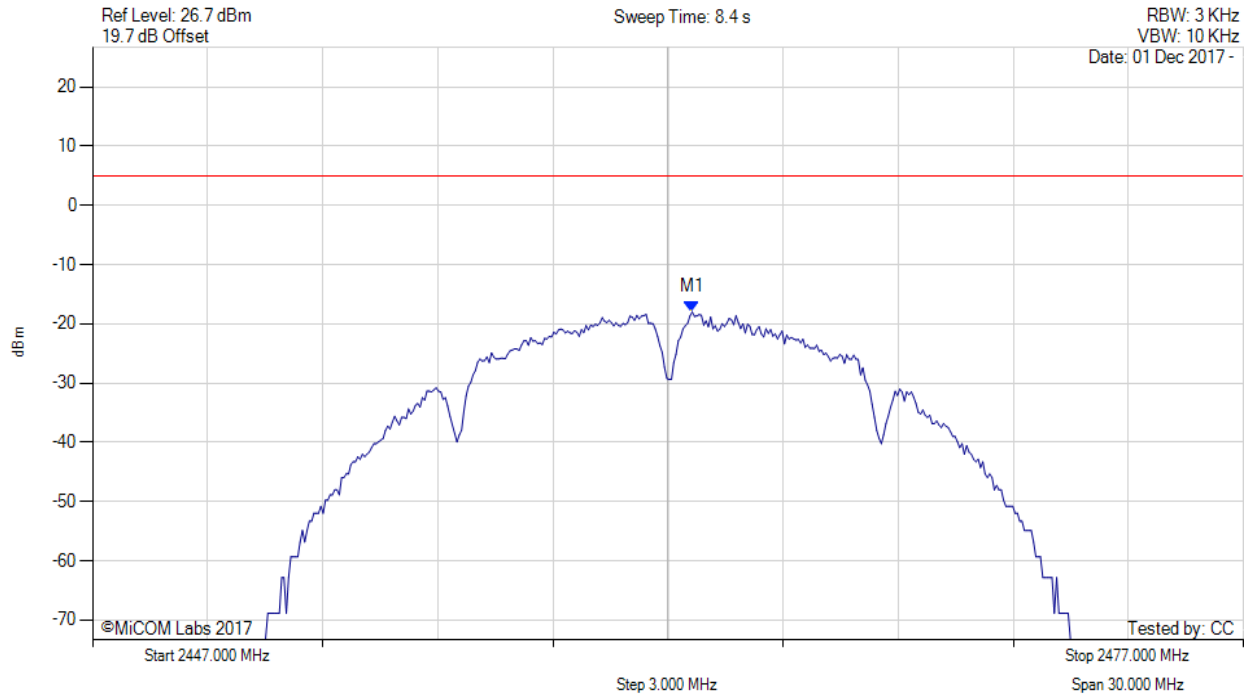

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2462.631 MHz : -17.984 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 107 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11b, Channel: 2462.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

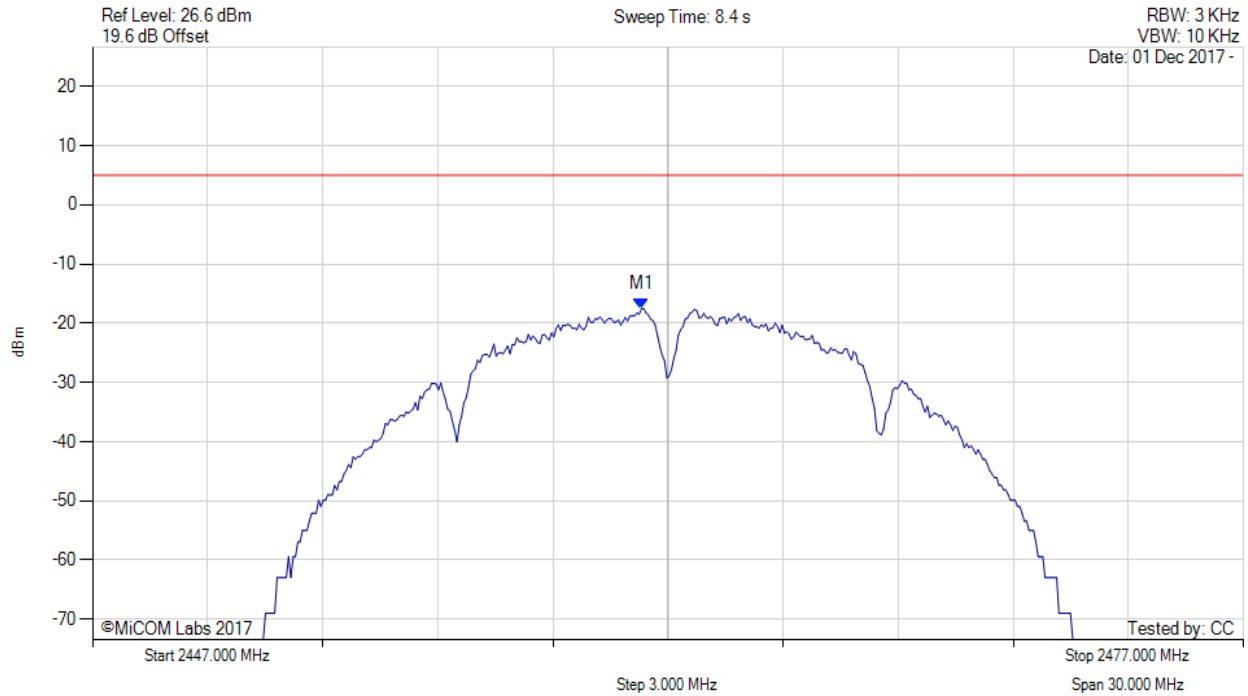

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2461.309 MHz : -17.508 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 108 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11b, Channel: 2462.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

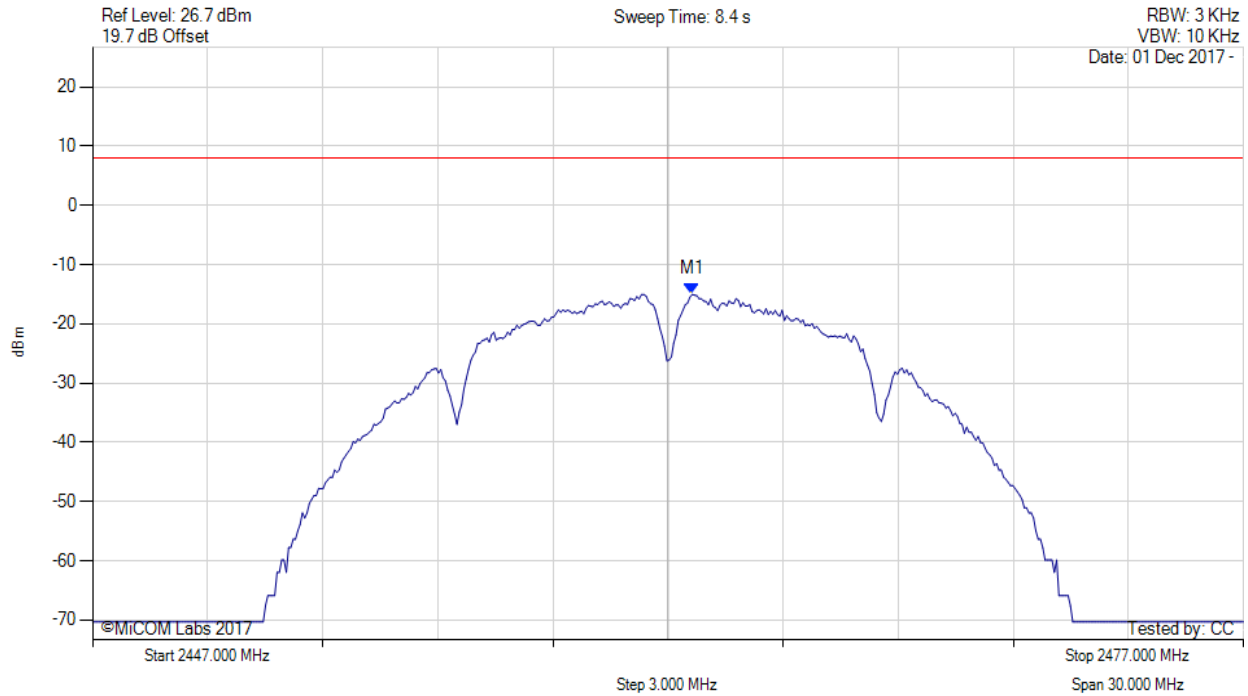

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2462.600 MHz : -15.023 dBm M1 + DCCF : 2462.600 MHz : -14.979 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 8.0 dBm Margin: -23.0 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 109 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11g, Channel: 2412.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

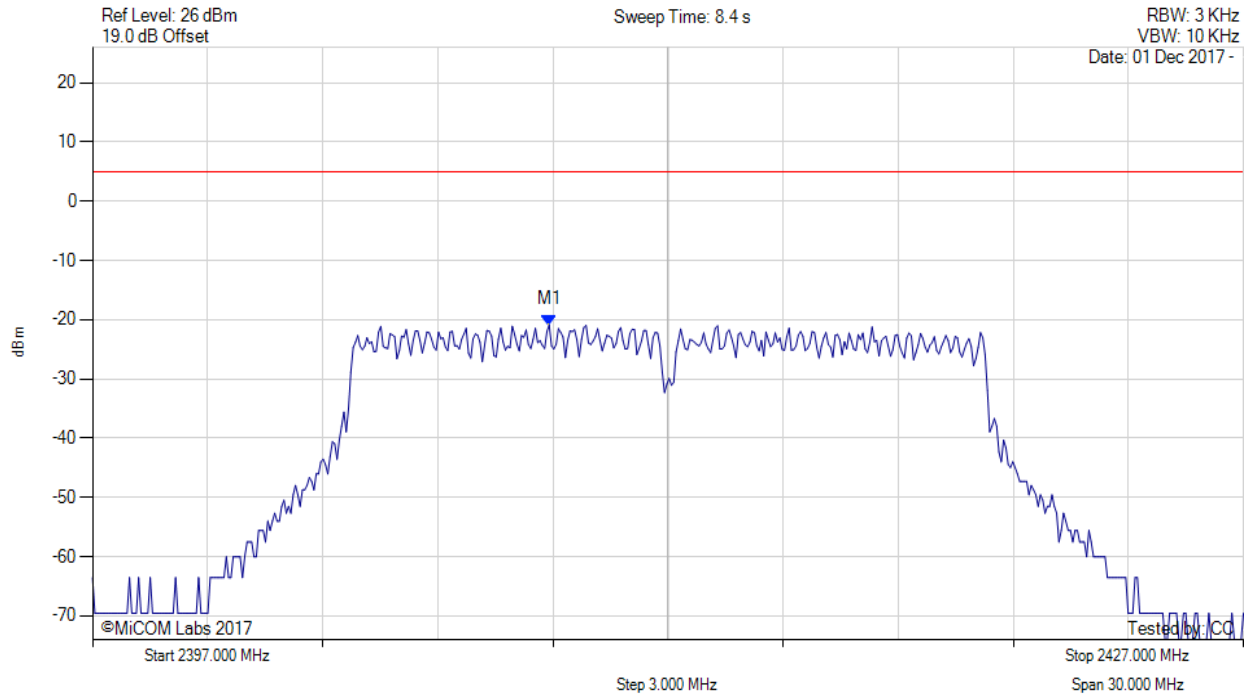

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2408.904 MHz : -20.874 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 110 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11g, Channel: 2412.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

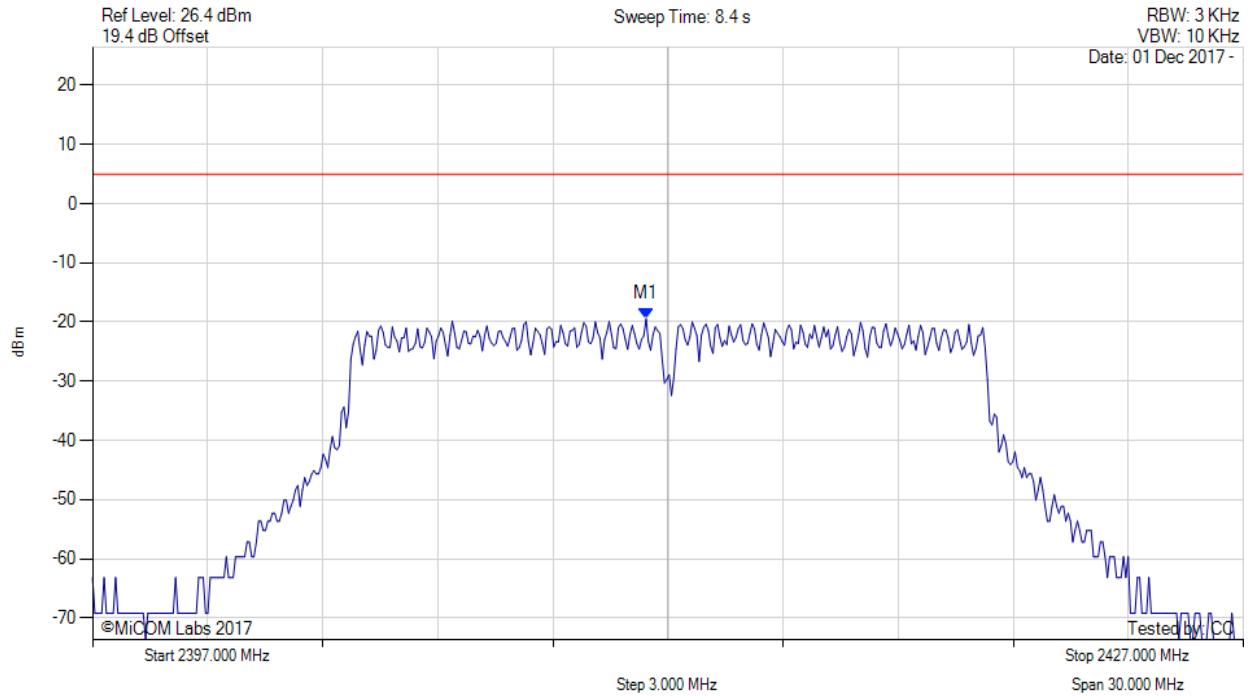

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2411.429 MHz : -19.451 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 111 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11g, Channel: 2412.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

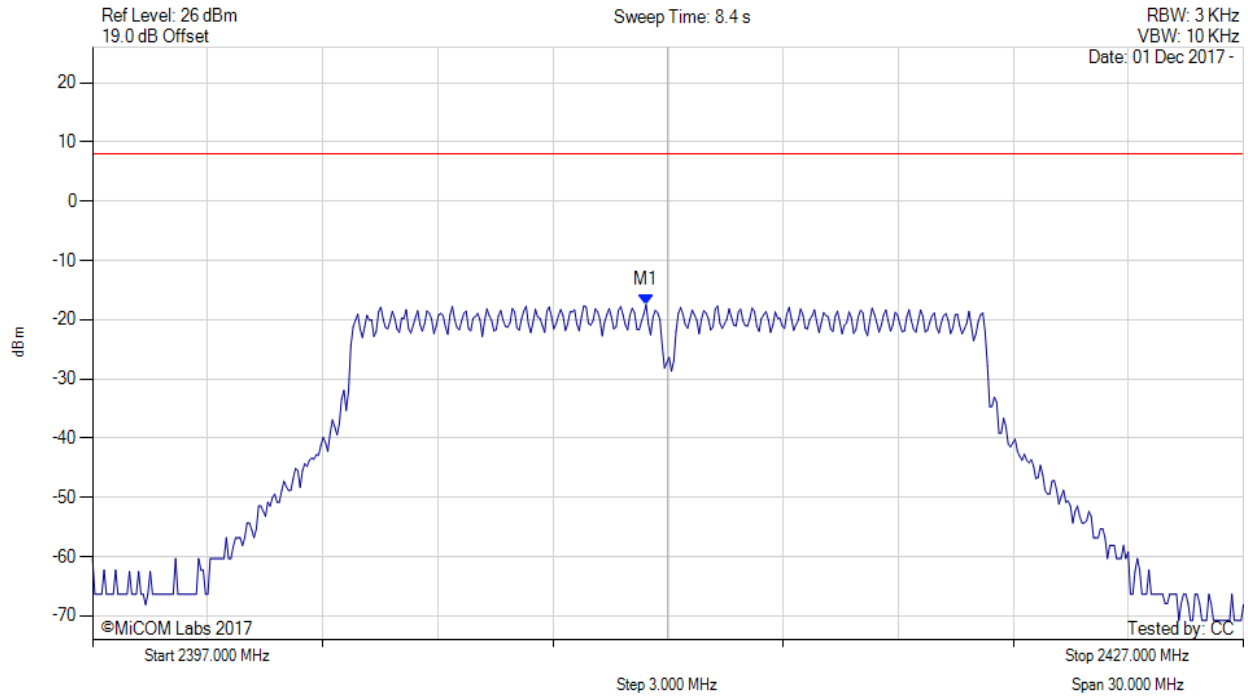

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2411.400 MHz : -17.465 dBm M1 + DCCF : 2411.400 MHz : -17.421 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 8.0 dBm Margin: -25.4 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 112 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11g, Channel: 2437.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

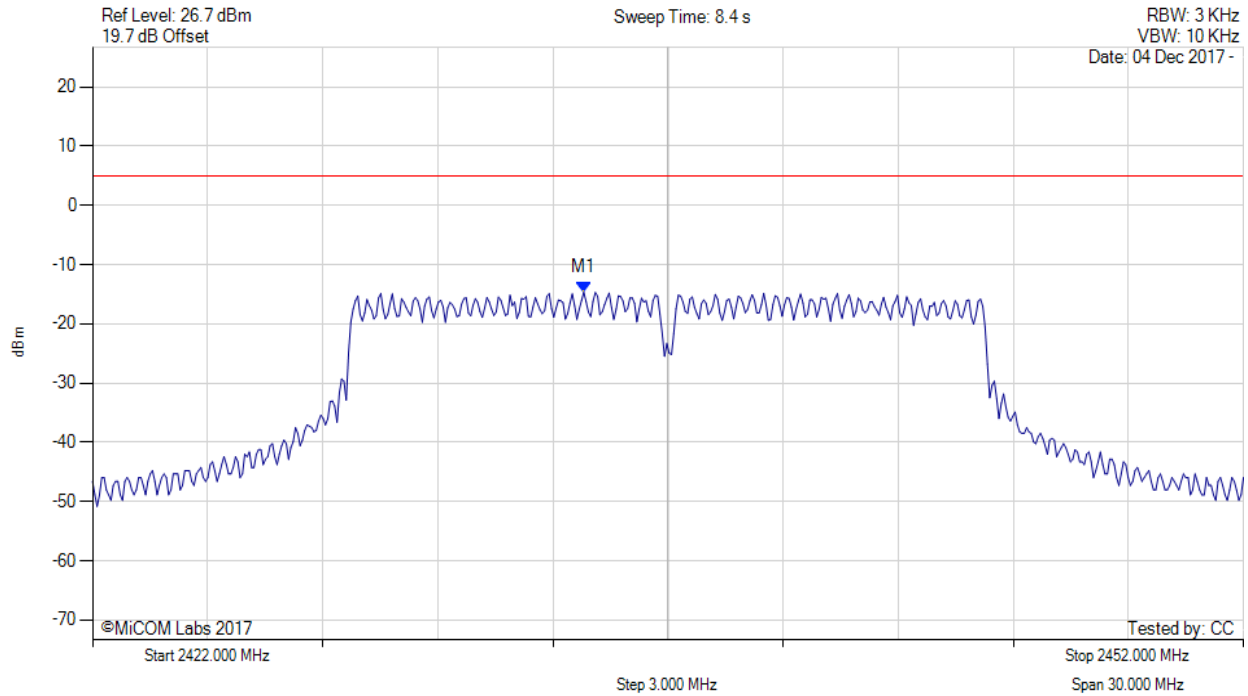

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2434.806 MHz : -14.646 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 113 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11g, Channel: 2437.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

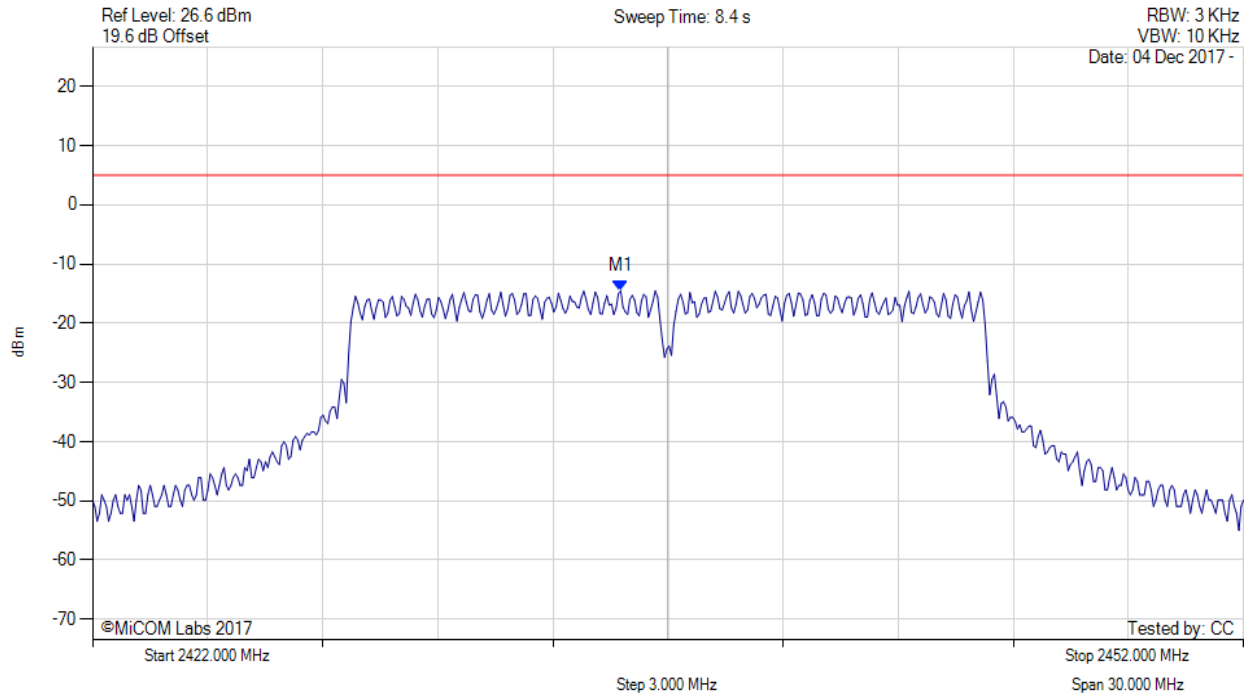

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2435.768 MHz : -14.546 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 114 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11g, Channel: 2437.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

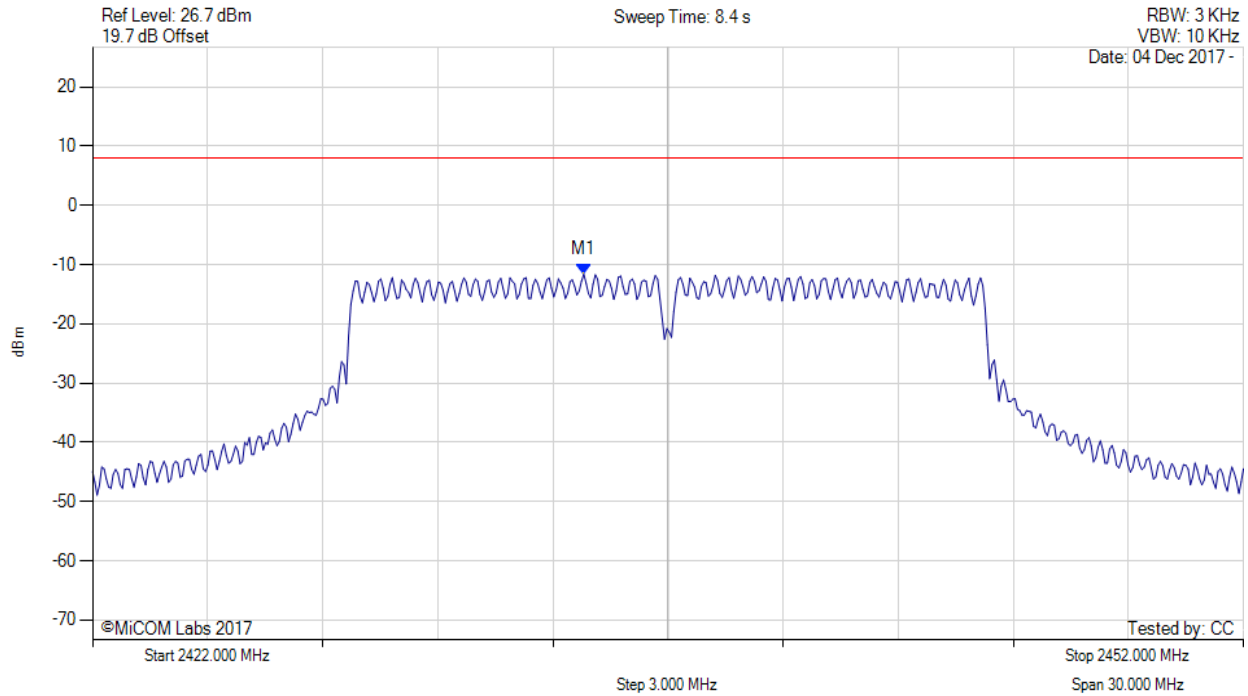

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2434.800 MHz : -11.602 dBm M1 + DCCF : 2434.800 MHz : -11.558 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 8.0 dBm Margin: -19.6 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 115 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11g, Channel: 2462.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

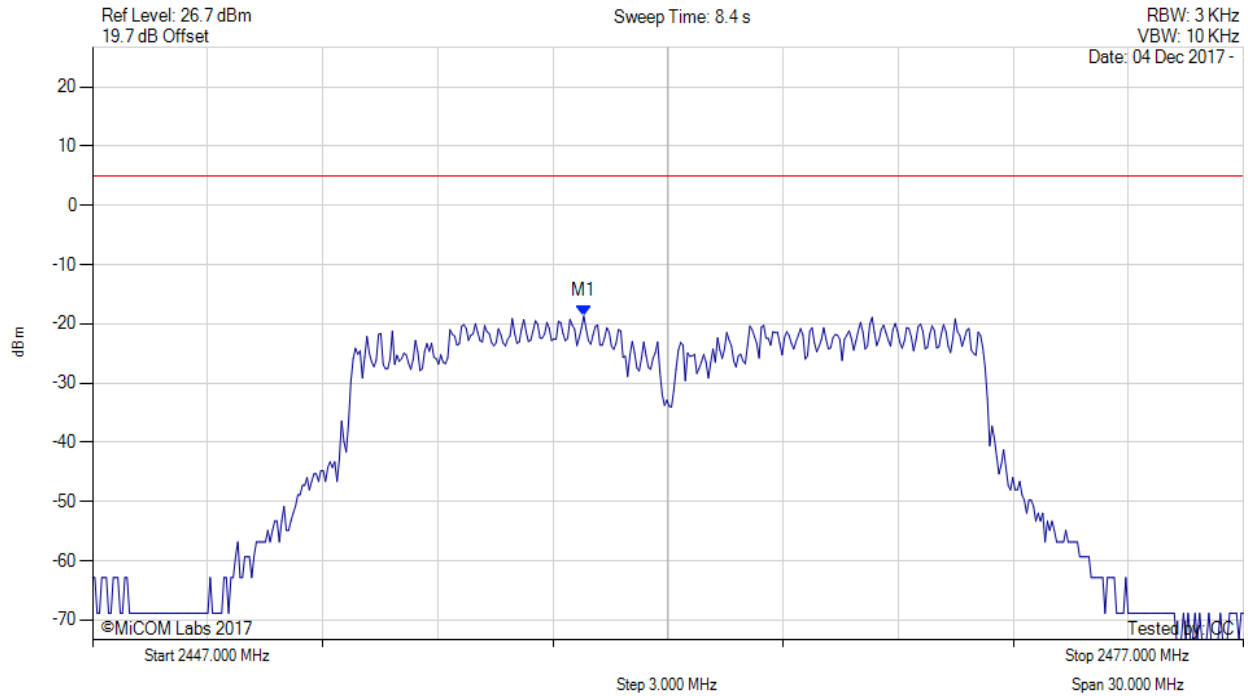

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2459.806 MHz : -18.681 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 116 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11g, Channel: 2462.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

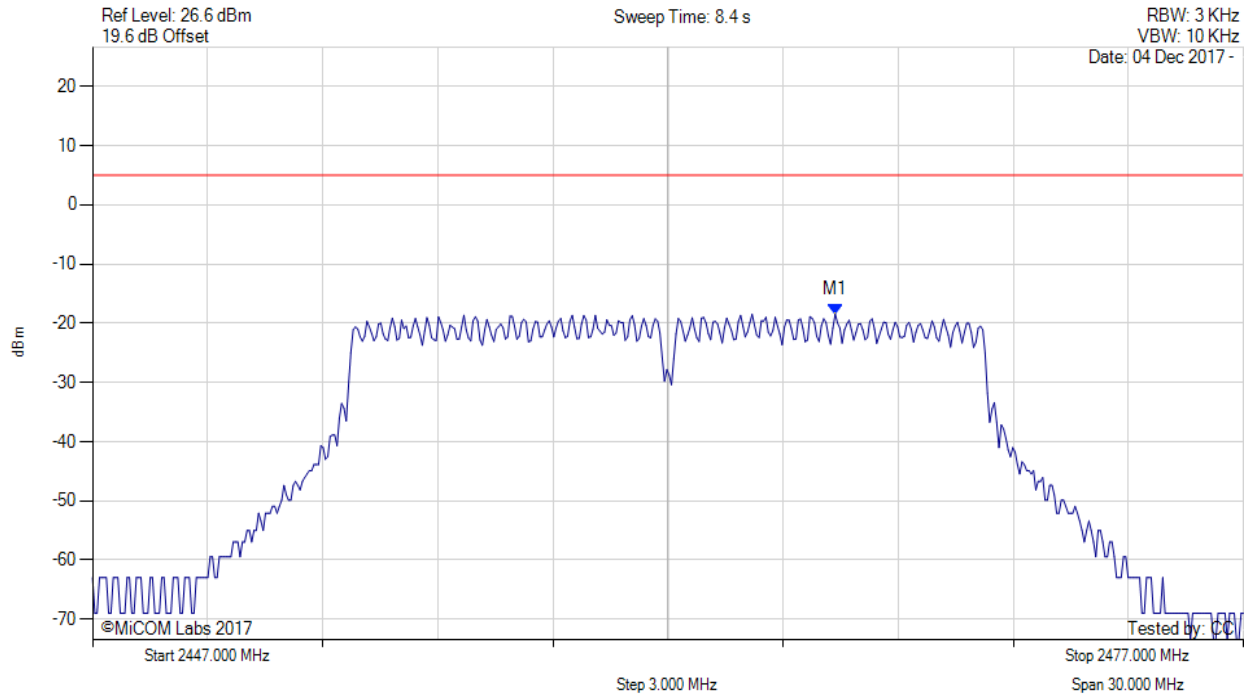

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2466.359 MHz : -18.439 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 117 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11g, Channel: 2462.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

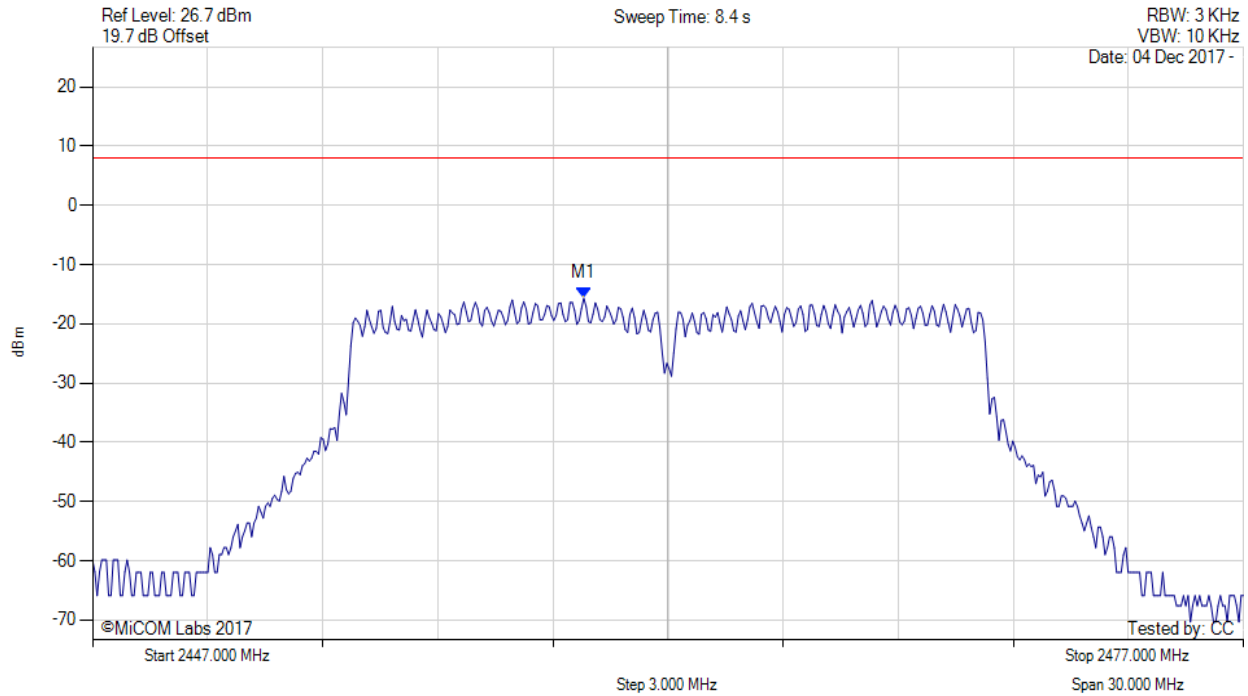

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2459.800 MHz : -15.681 dBm M1 + DCCF : 2459.800 MHz : -15.637 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 8.0 dBm Margin: -23.6 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 118 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

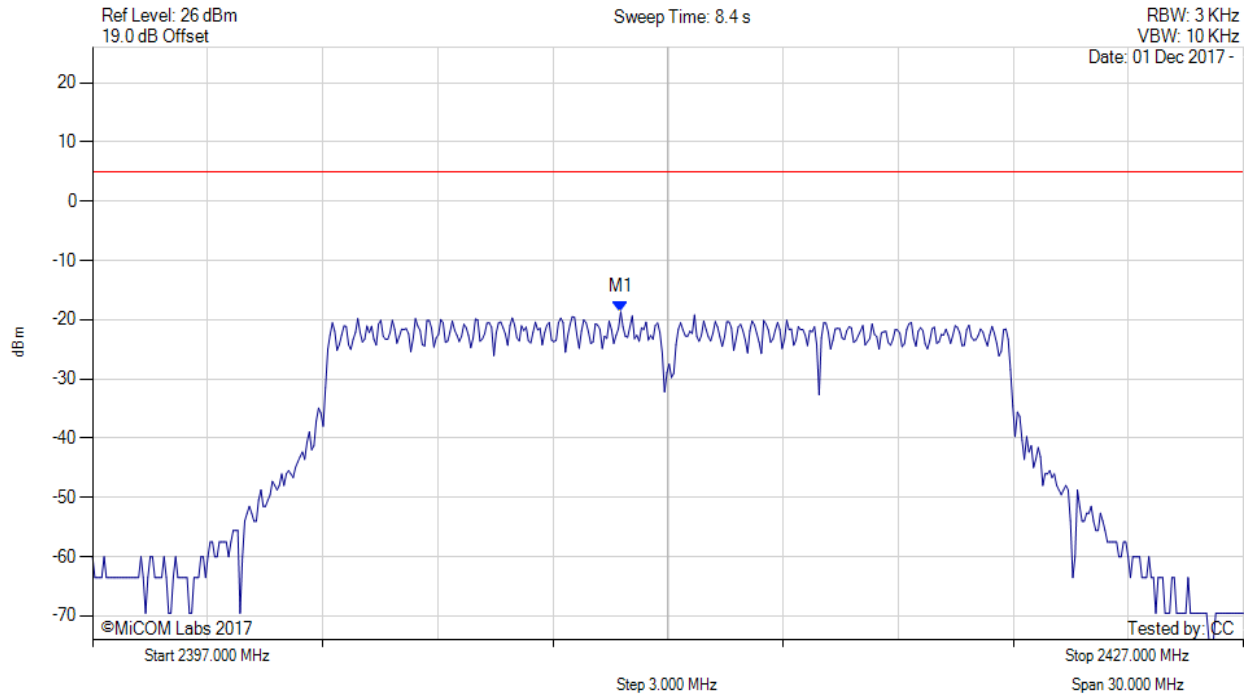

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2410.768 MHz : -18.684 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 119 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

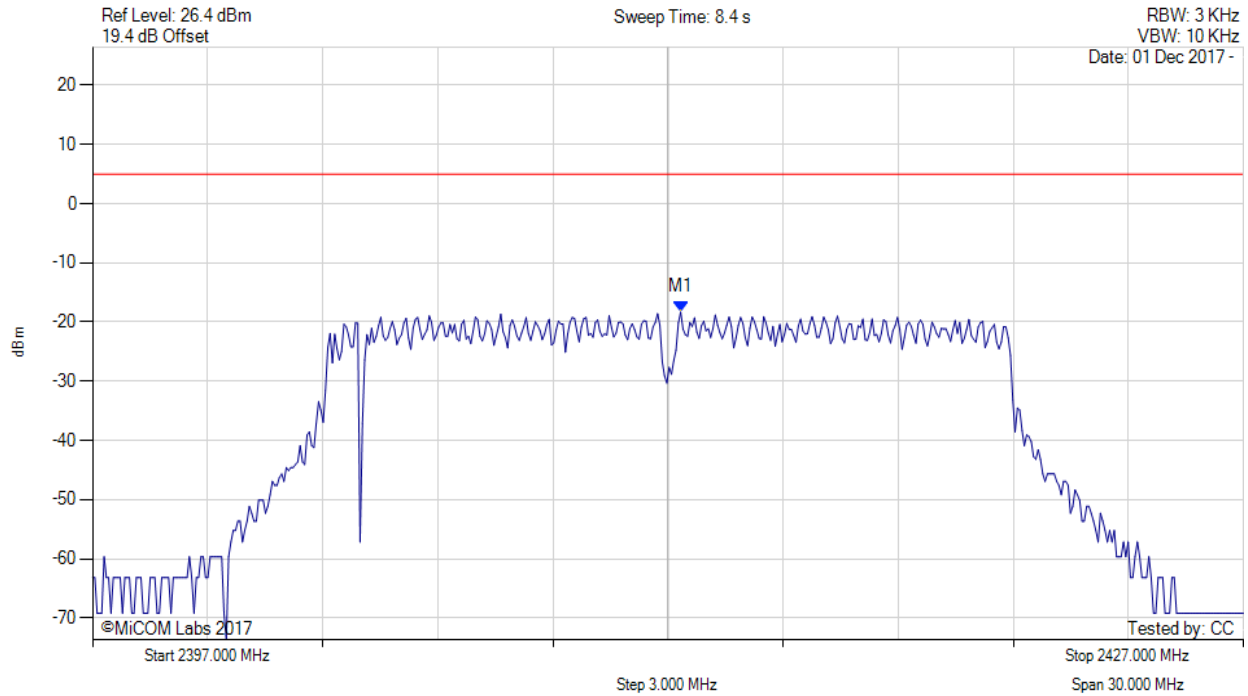

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2412.331 MHz : -18.309 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 120 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-20, Channel: 2412.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

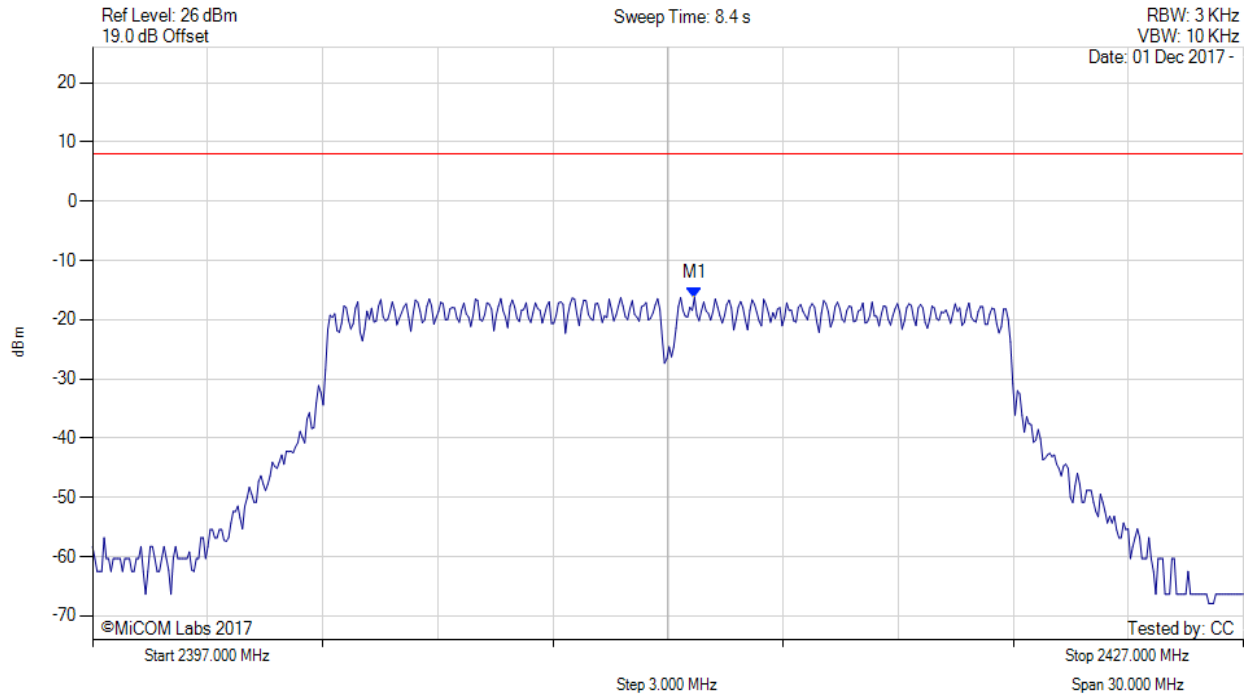

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2412.700 MHz : -16.228 dBm M1 + DCCF : 2412.700 MHz : -16.184 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 8.0 dBm Margin: -24.2 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 121 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

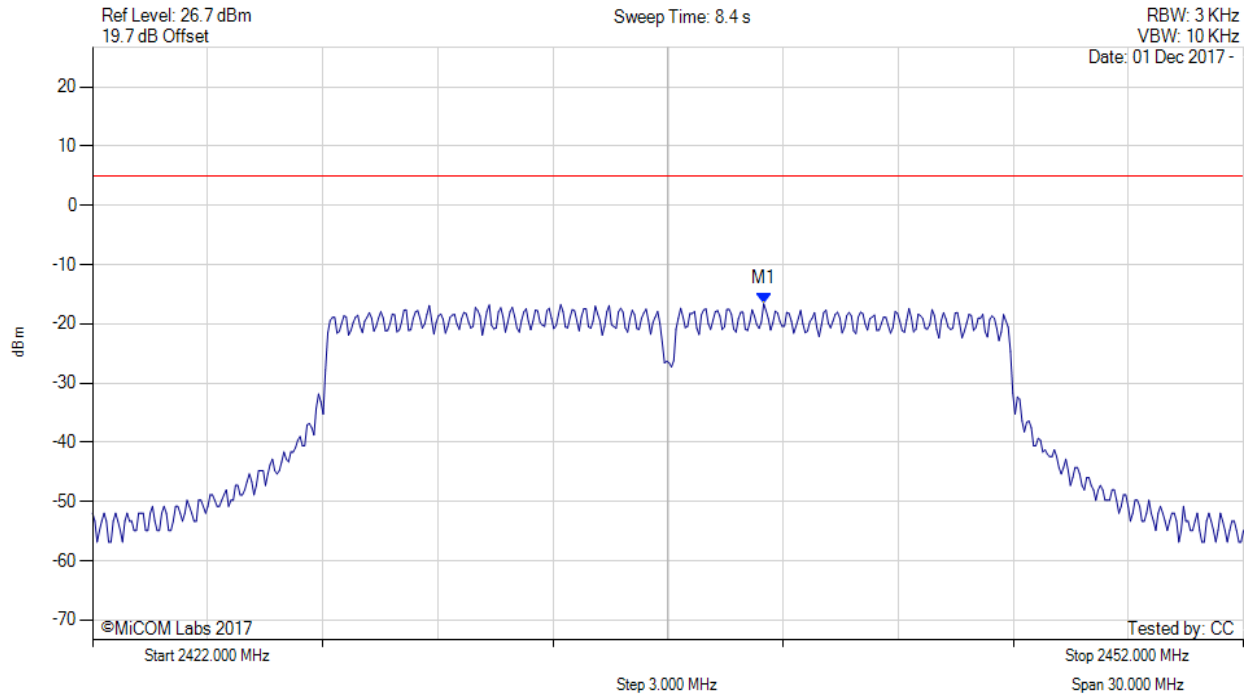

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2439.495 MHz : -16.589 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 122 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

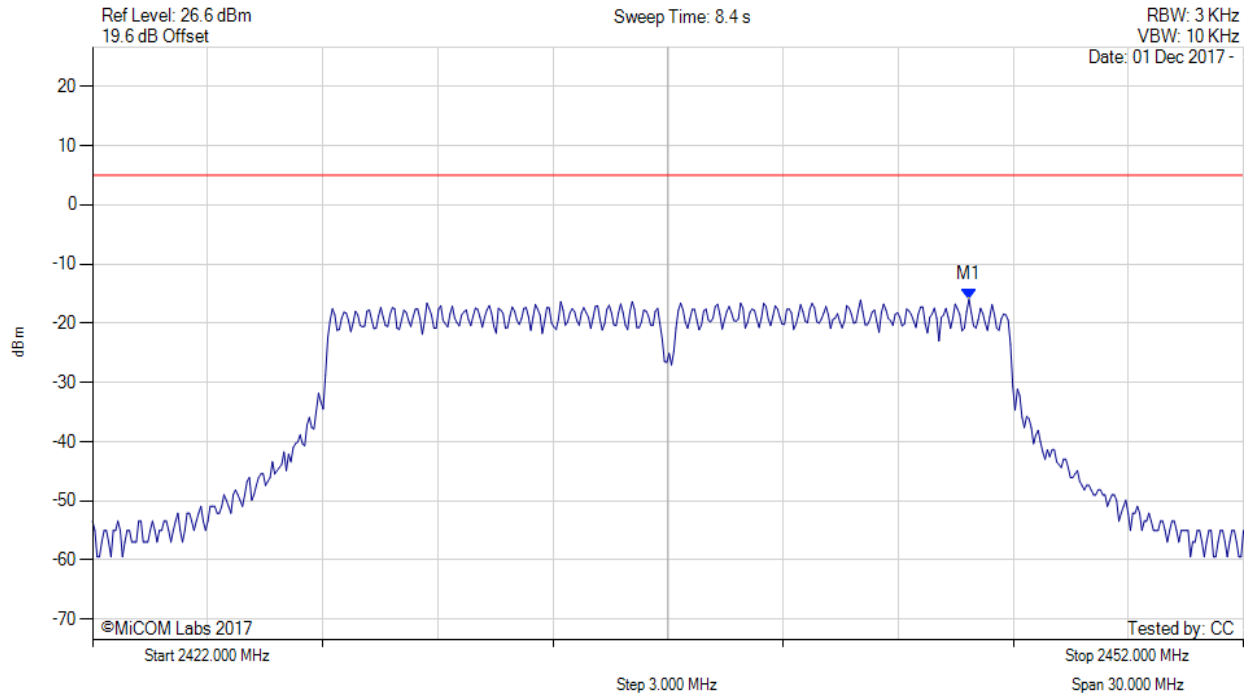

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2444.846 MHz : -15.940 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 123 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-20, Channel: 2437.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

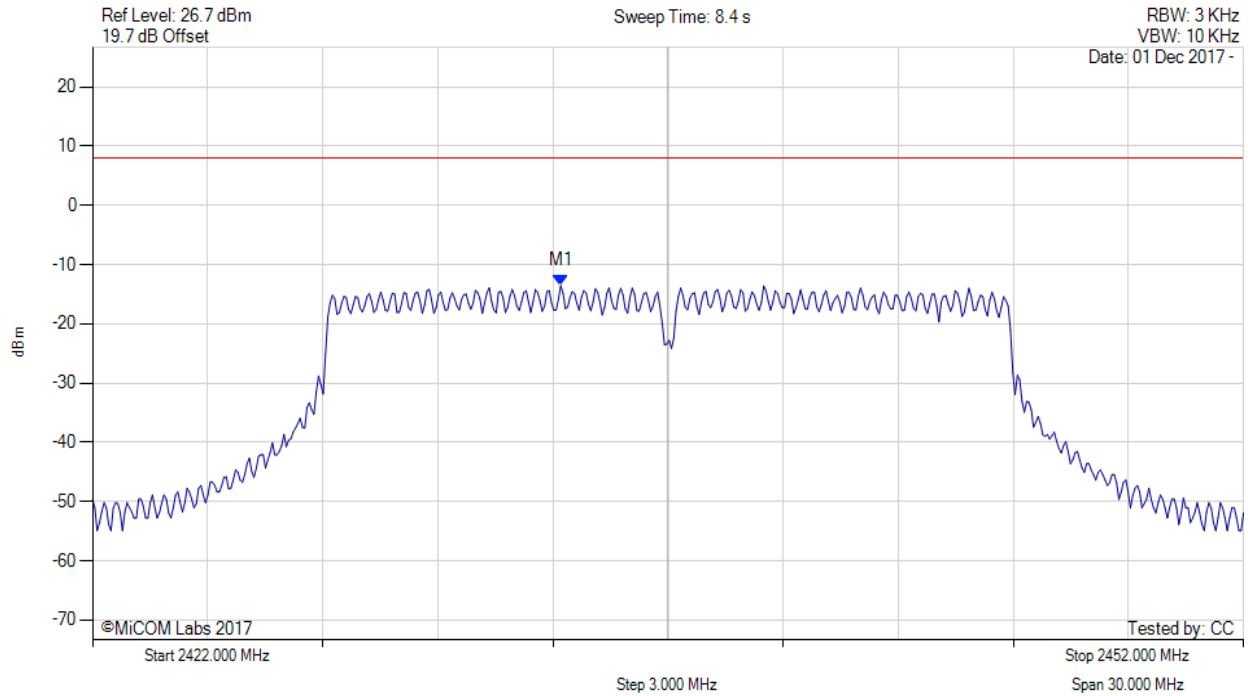

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2434.200 MHz : -13.543 dBm M1 + DCCF : 2434.200 MHz : -13.499 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 8.0 dBm Margin: -21.5 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 124 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

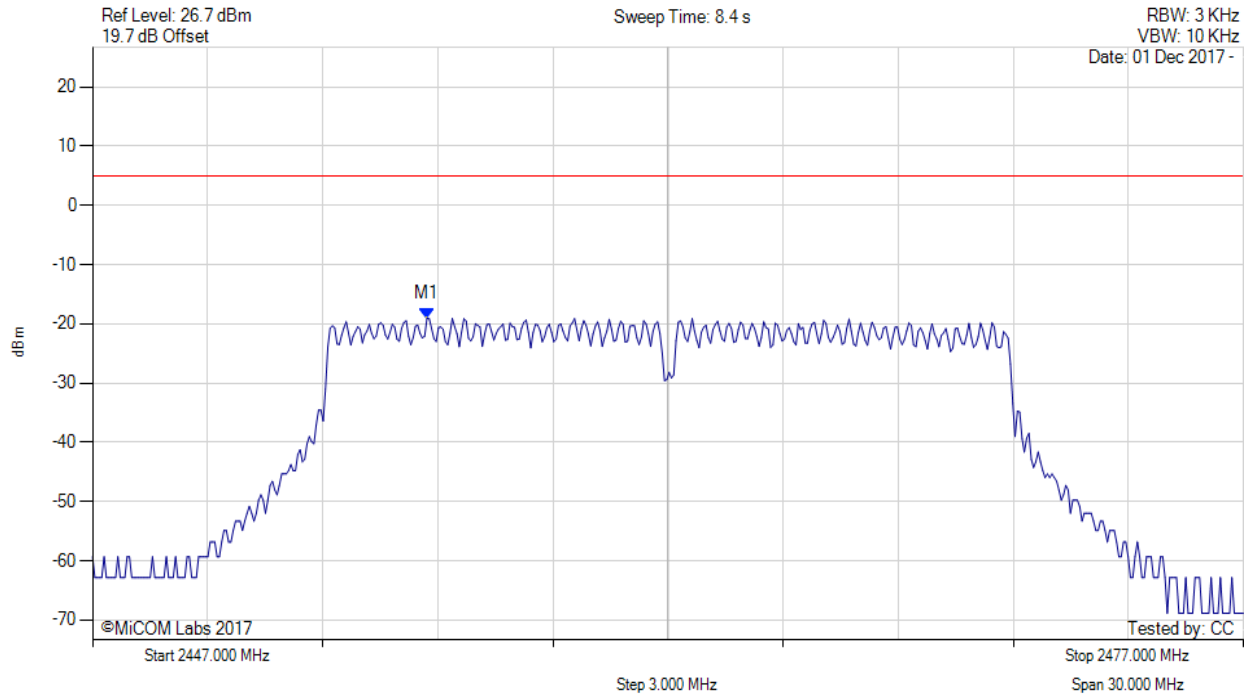

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2455.717 MHz : -19.066 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 125 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

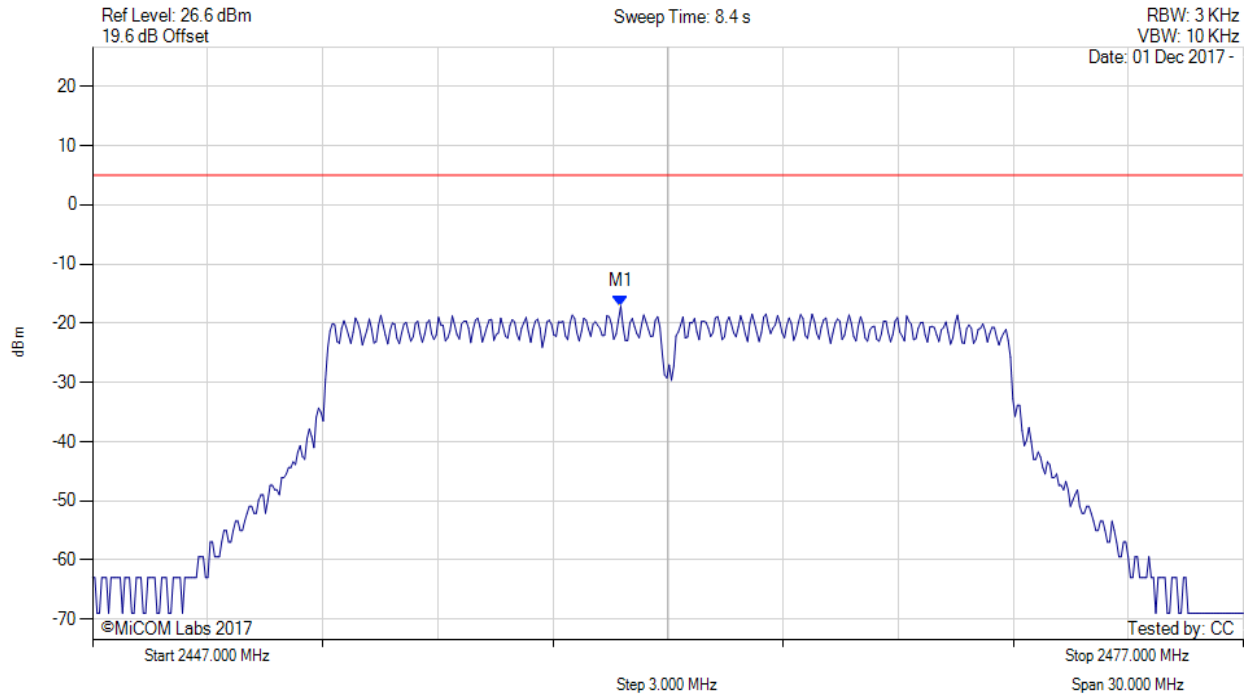

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2460.768 MHz : -17.122 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 126 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-20, Channel: 2462.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

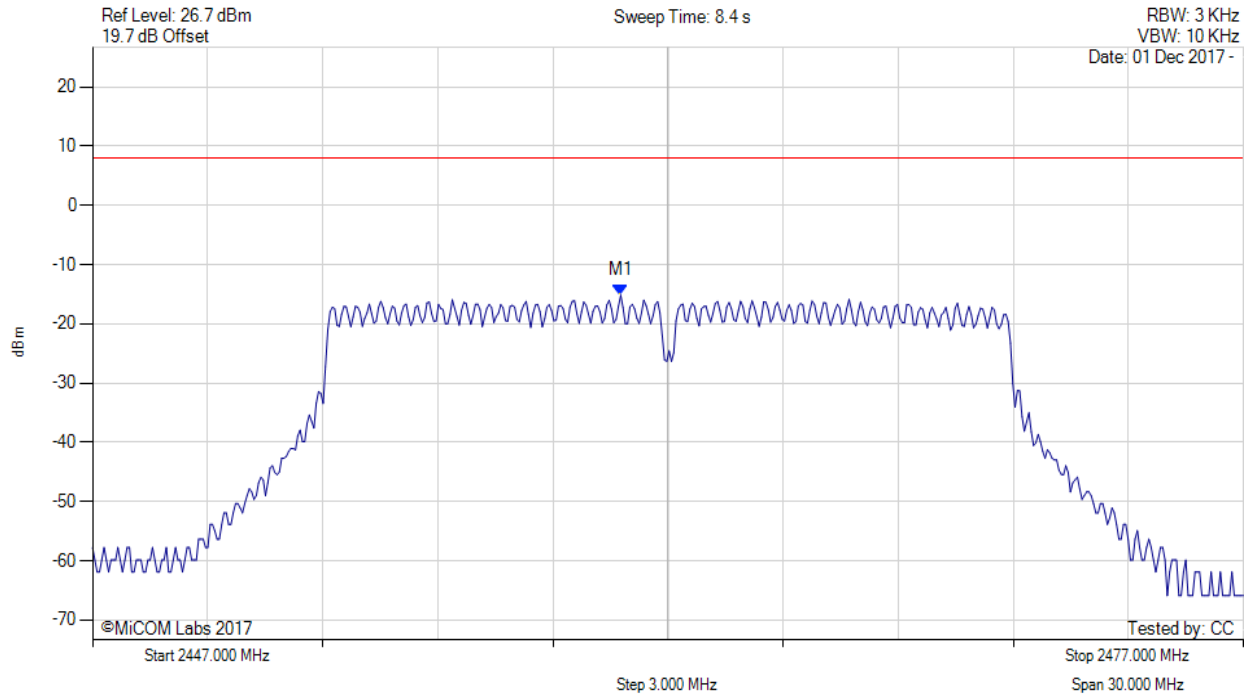

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2460.800 MHz : -15.172 dBm M1 + DCCF : 2460.800 MHz : -15.128 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 8.0 dBm Margin: -23.1 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 127 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

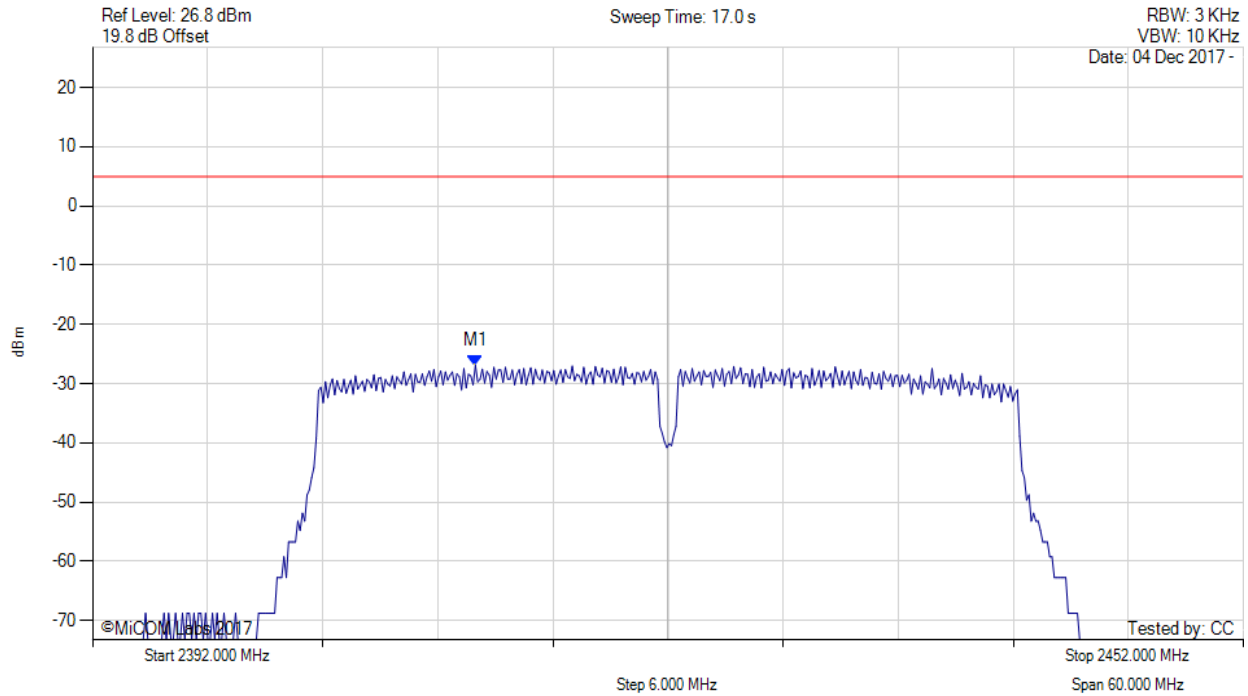

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2411.960 MHz : -26.897 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 128 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

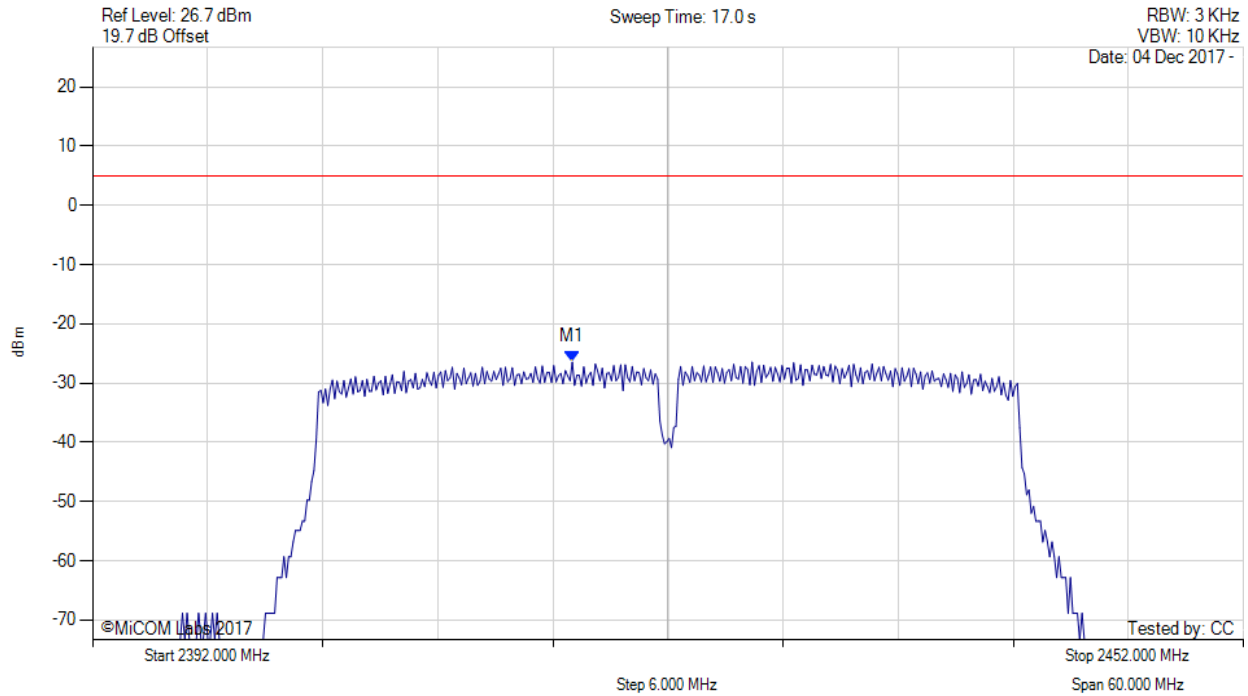

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2417.010 MHz : -26.454 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 129 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-40, Channel: 2422.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

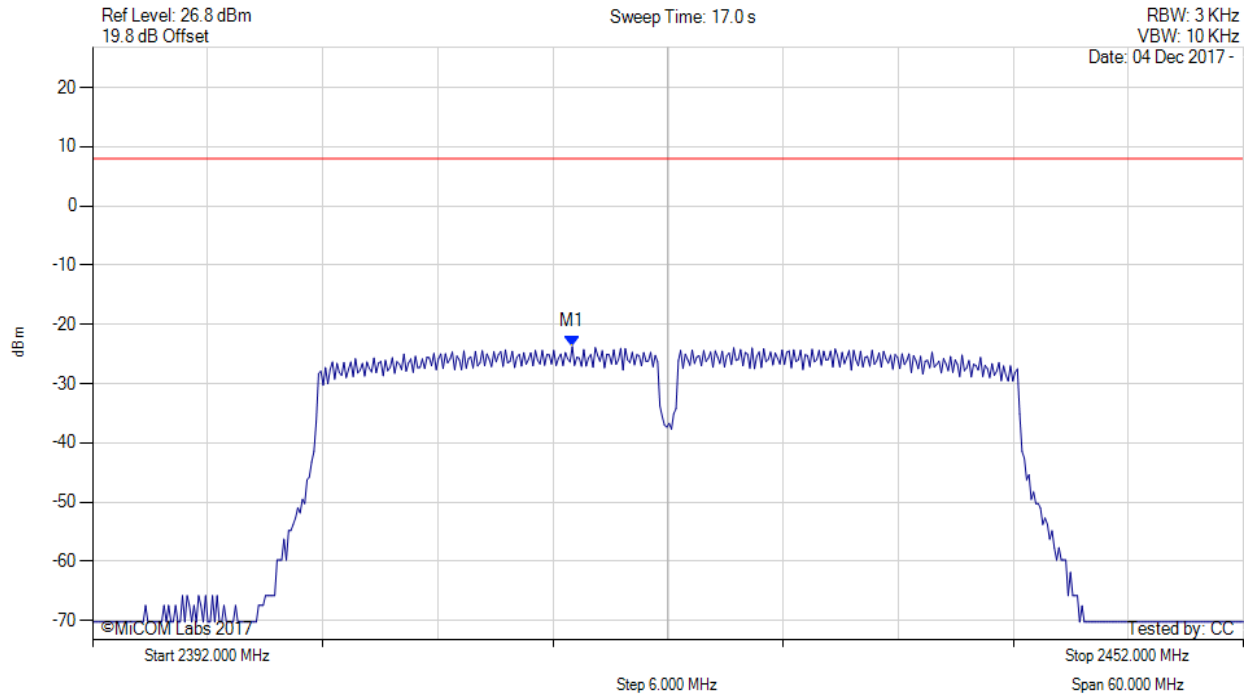

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2417.000 MHz : -23.726 dBm M1 + DCCF : 2417.000 MHz : -23.682 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 8.0 dBm Margin: -31.7 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 130 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

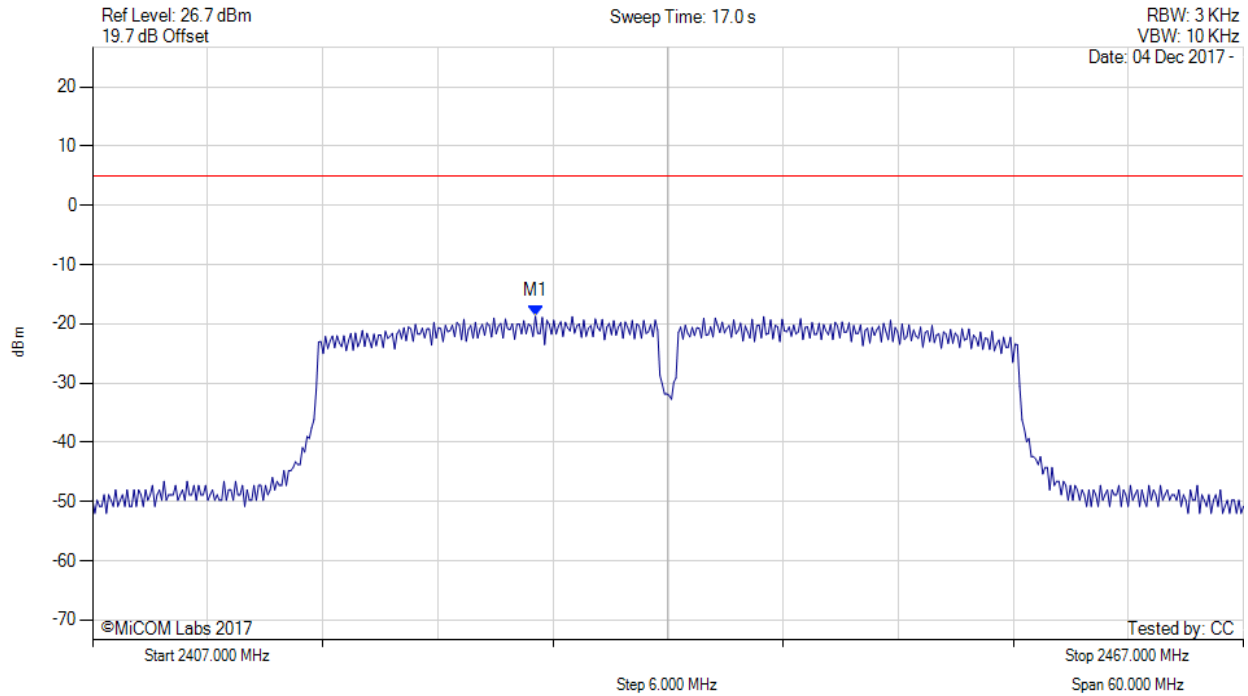

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2430.086 MHz : -18.708 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 131 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

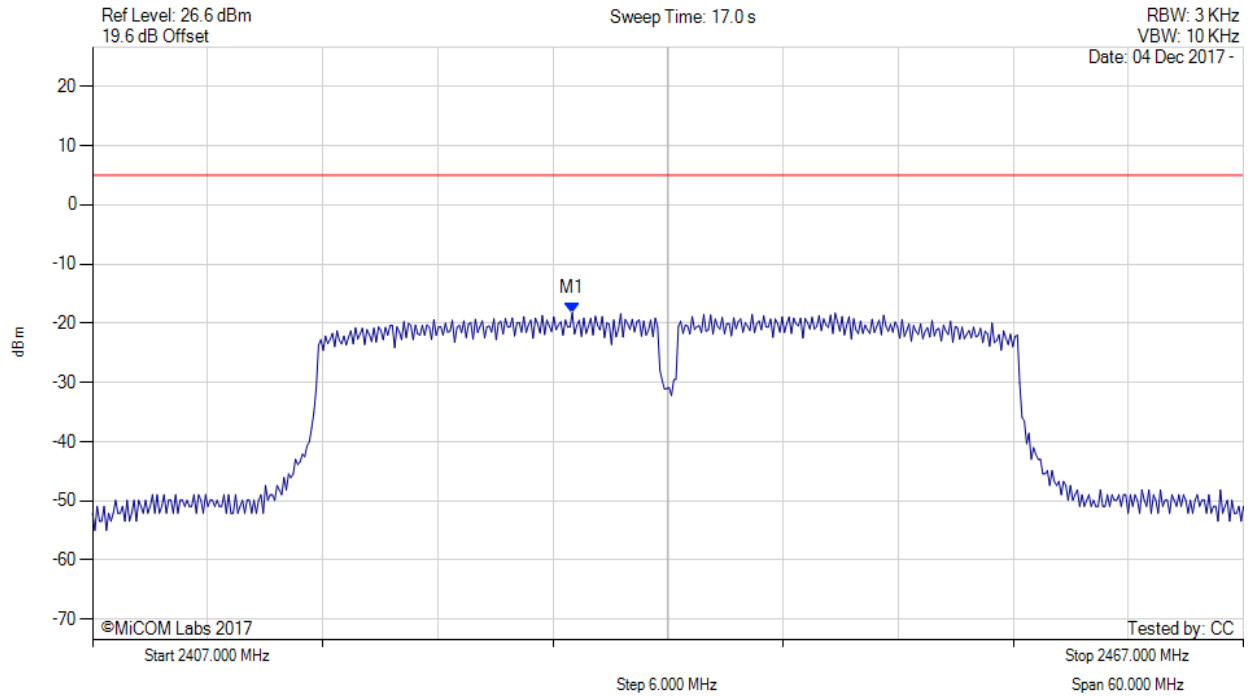

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2432.010 MHz : -18.234 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 132 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-40, Channel: 2437.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

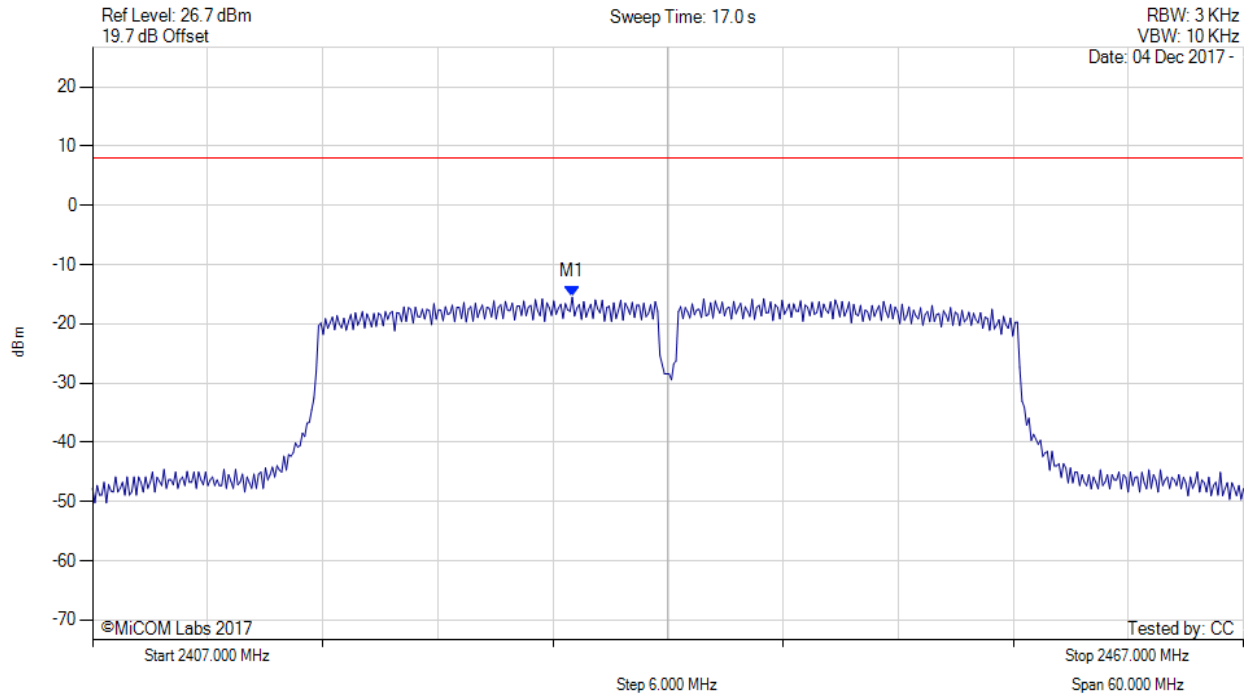

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2432.000 MHz : -15.493 dBm M1 + DCCF : 2432.000 MHz : -15.449 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 8.0 dBm Margin: -23.5 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 133 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

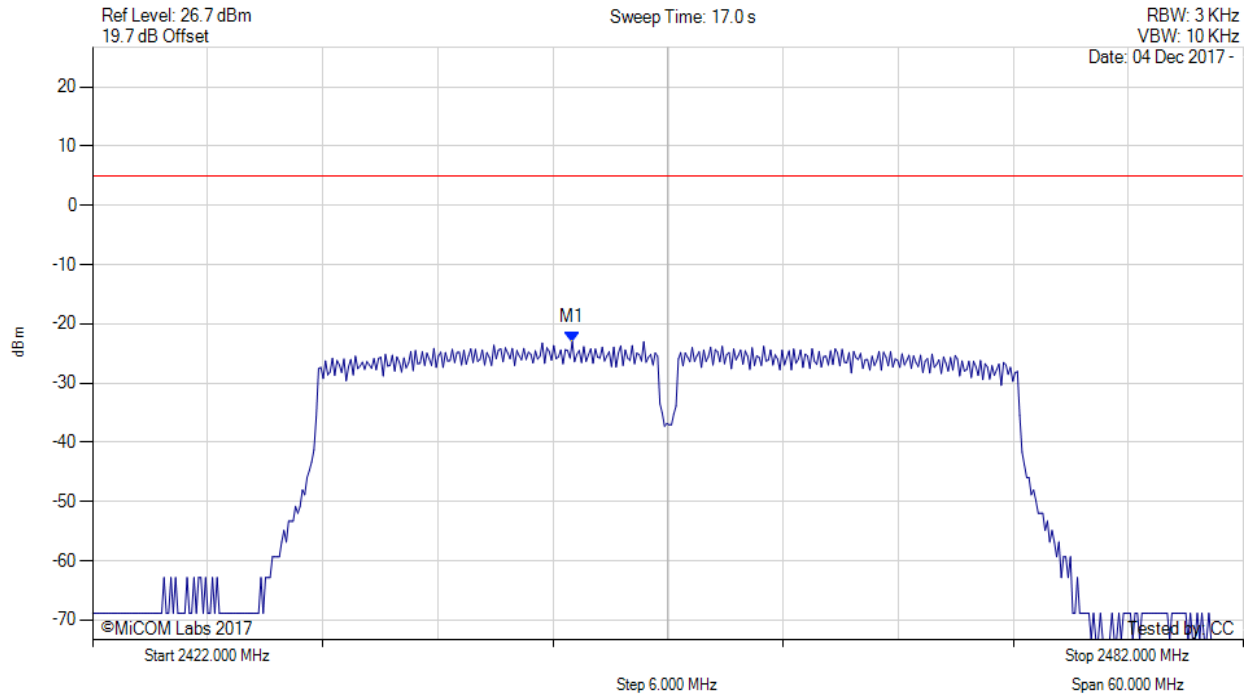

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2447.010 MHz : -23.020 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 134 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

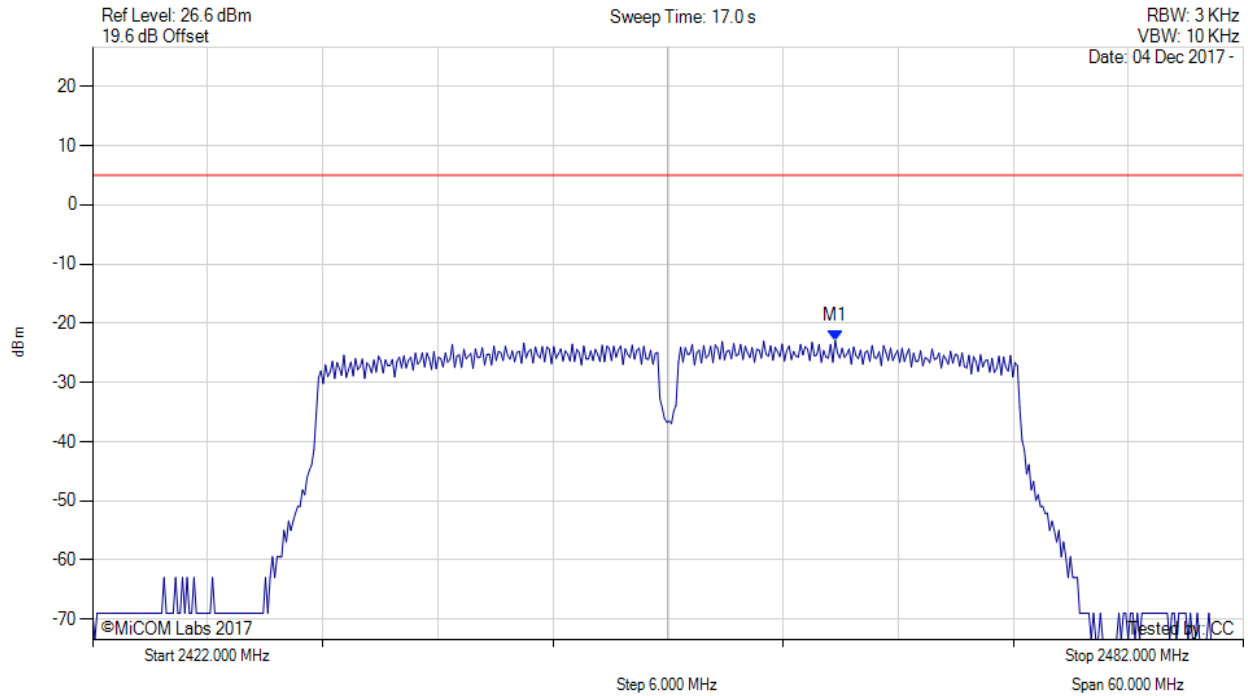

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2460.717 MHz : -22.901 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 135 of 191



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-40, Channel: 2452.00 MHz, SUM, Temp: 20, Voltage: 24 Vdc

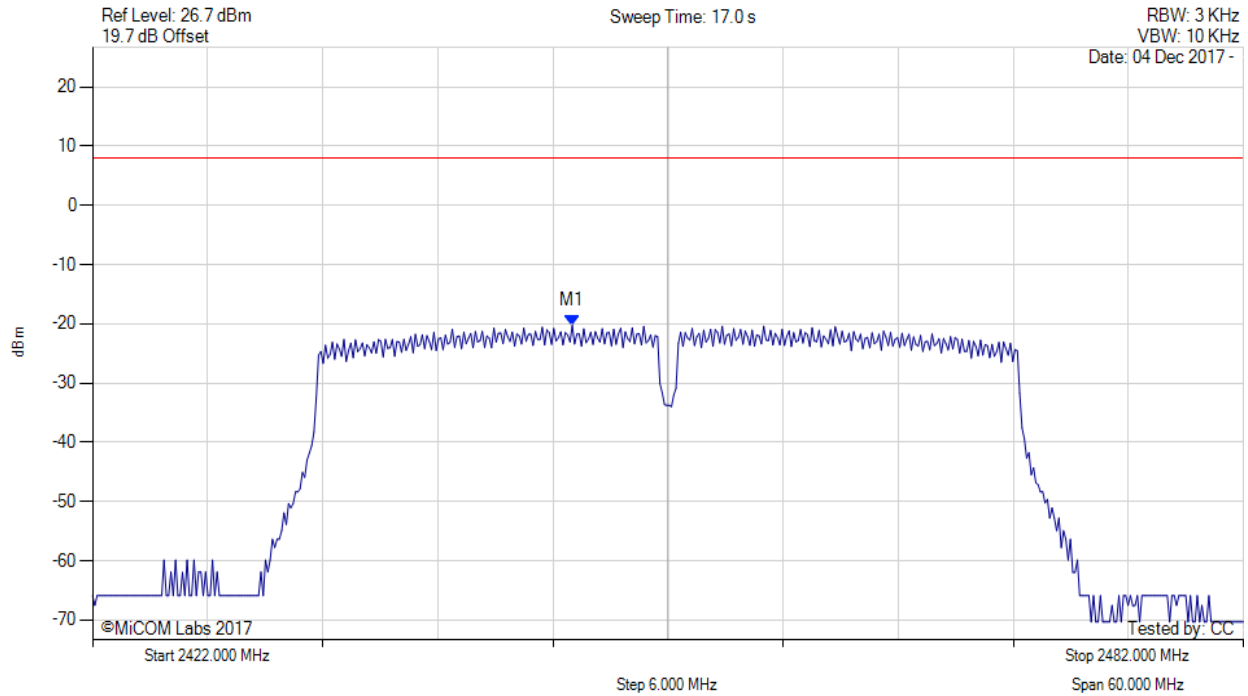

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2447.000 MHz : -20.257 dBm M1 + DCCF : 2447.000 MHz : -20.213 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 8.0 dBm Margin: -28.2 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 136 of 191

A.3. Emissions

A.3.1. Conducted Emissions

A.3.1.1. Conducted Spurious Emissions

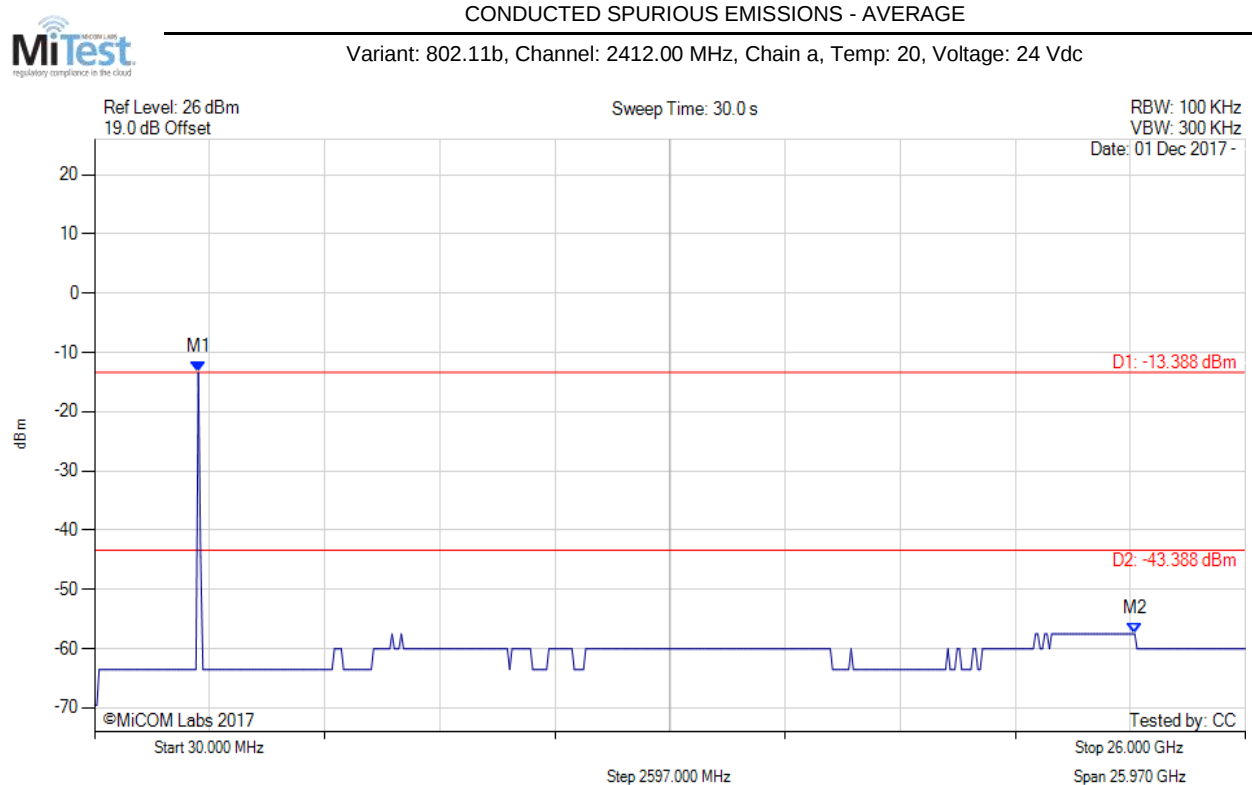

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2371.984 MHz : -13.388 dBm M2 : 23.502 GHz : -57.524 dBm	Limit: -43.39 dBm Margin: -14.13 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 137 of 191



CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 802.11b, Channel: 2412.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

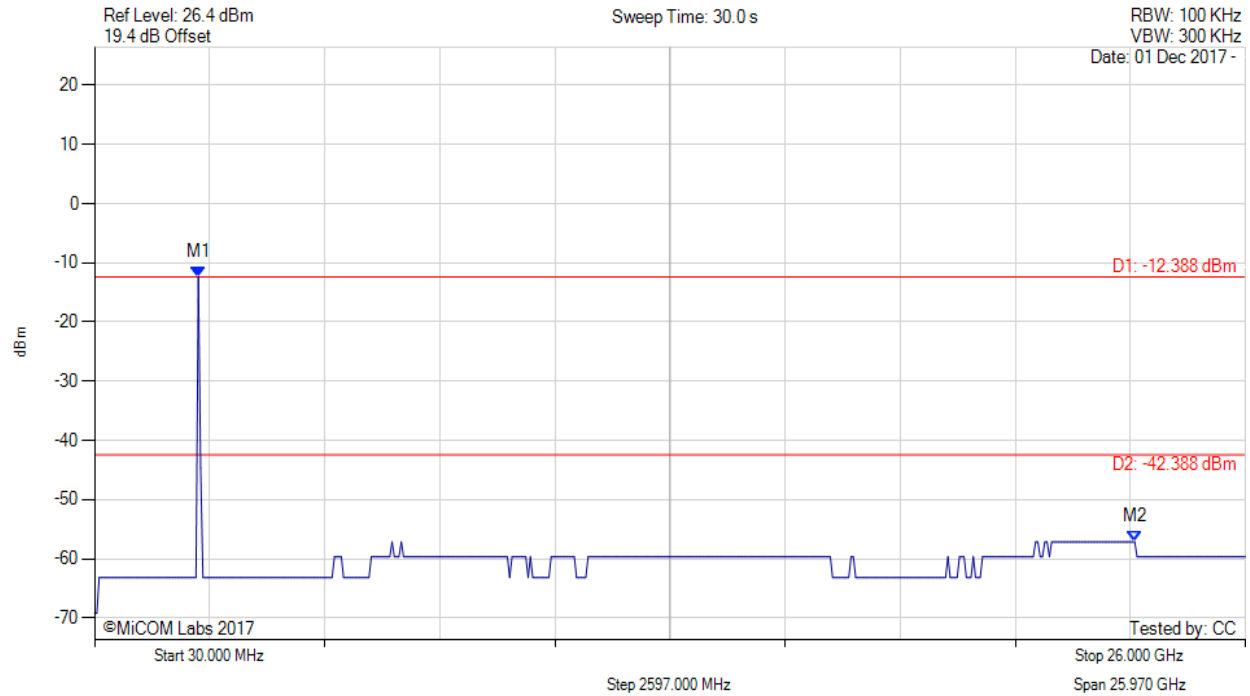

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2371.984 MHz : -12.388 dBm M2 : 23.502 GHz : -57.124 dBm	Limit: -42.39 dBm Margin: -14.73 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 138 of 191



CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 802.11b, Channel: 2437.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

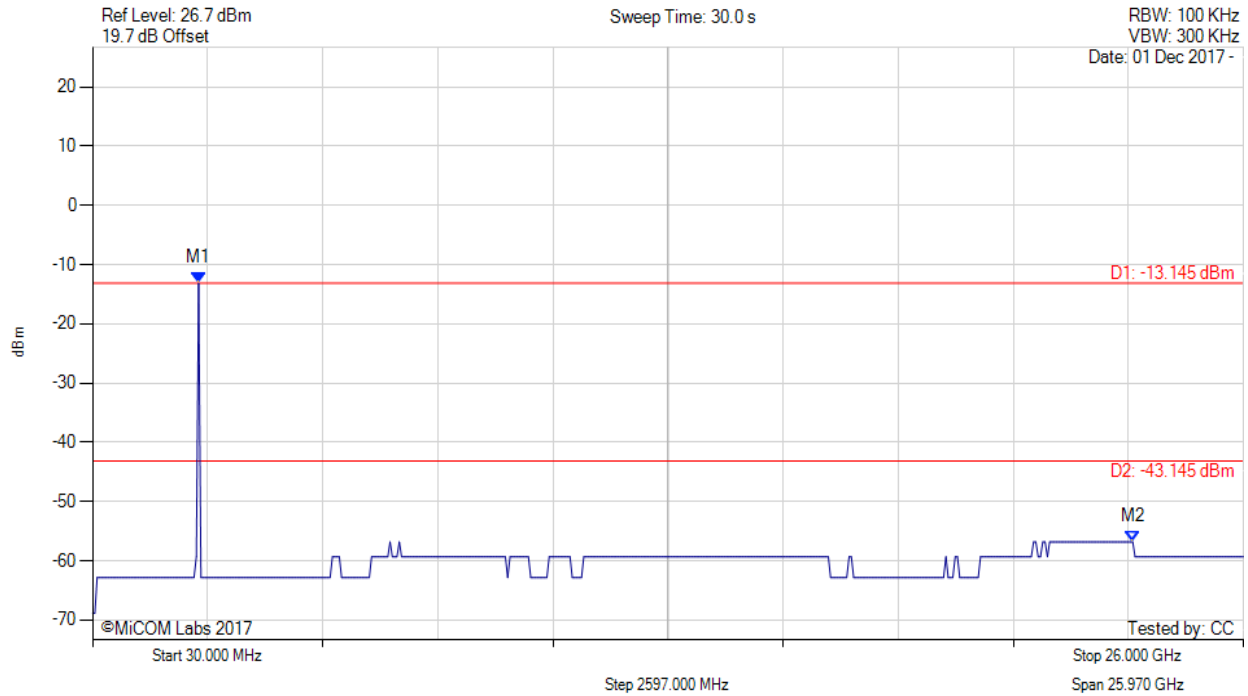

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2424.028 MHz : -13.145 dBm M2 : 23.502 GHz : -56.824 dBm	Limit: -43.15 dBm Margin: -13.67 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 139 of 191



CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 802.11b, Channel: 2437.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

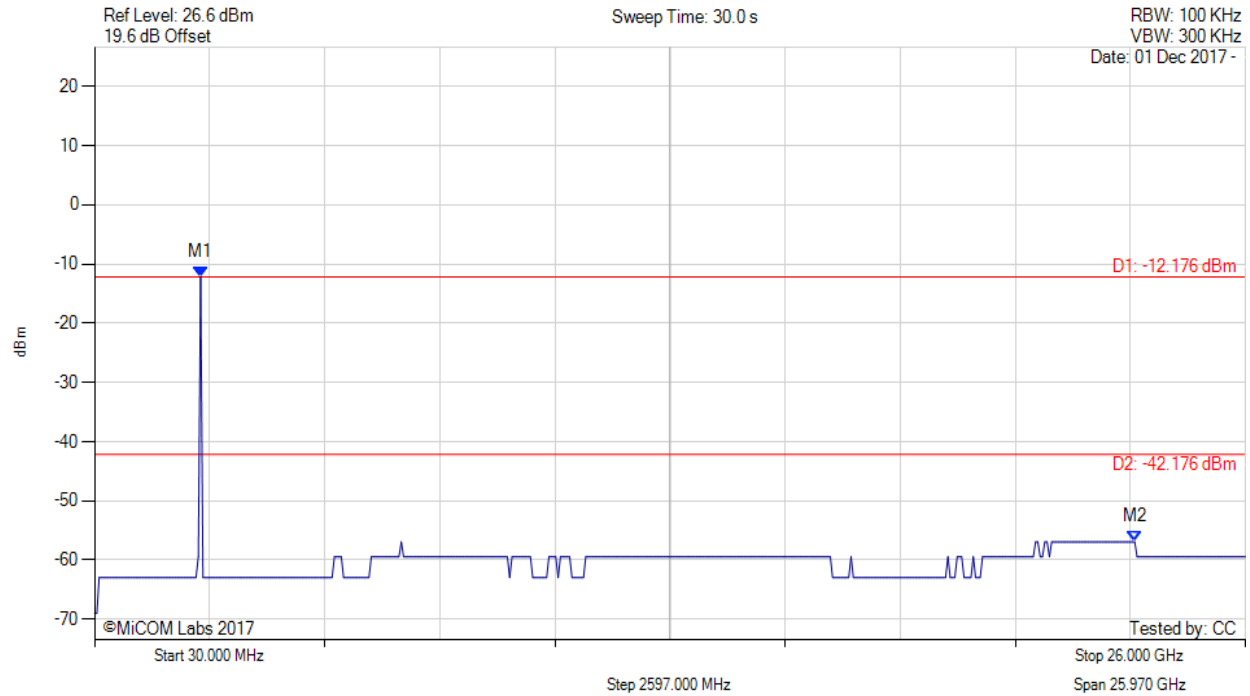

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2424.028 MHz : -12.176 dBm M2 : 23.502 GHz : -56.924 dBm	Limit: -42.18 dBm Margin: -14.74 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 140 of 191



CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 802.11b, Channel: 2462.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

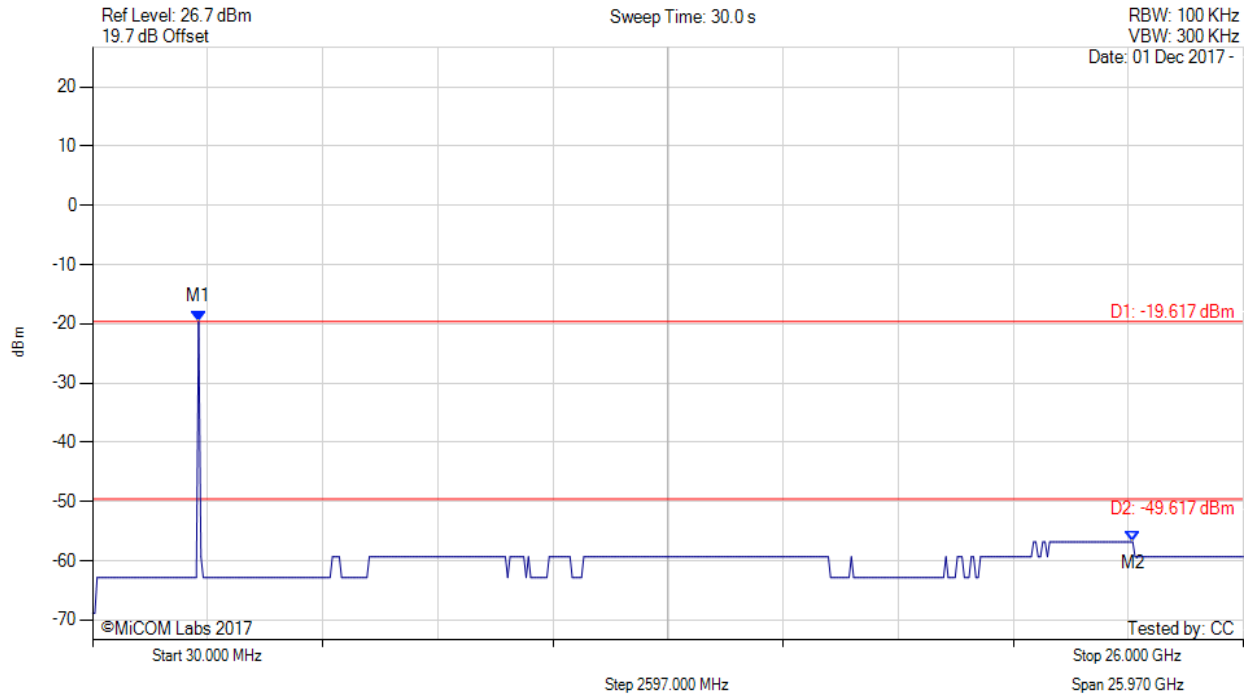

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2424.028 MHz : -19.617 dBm M2 : 23.502 GHz : -56.824 dBm	Limit: -49.62 dBm Margin: -7.20 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 141 of 191



CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 802.11b, Channel: 2462.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

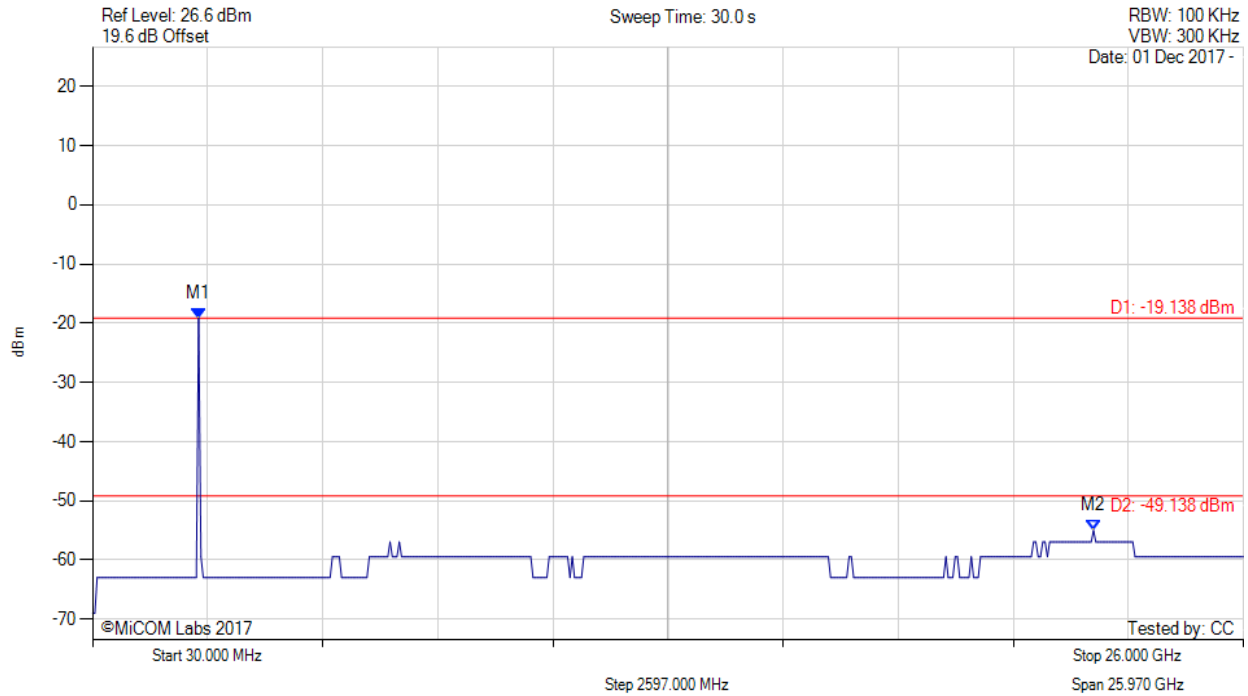

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2424.028 MHz : -19.138 dBm M2 : 22.617 GHz : -49.986 dBm	Limit: -49.14 dBm Margin: -5.85 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 142 of 191



CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 802.11g, Channel: 2412.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

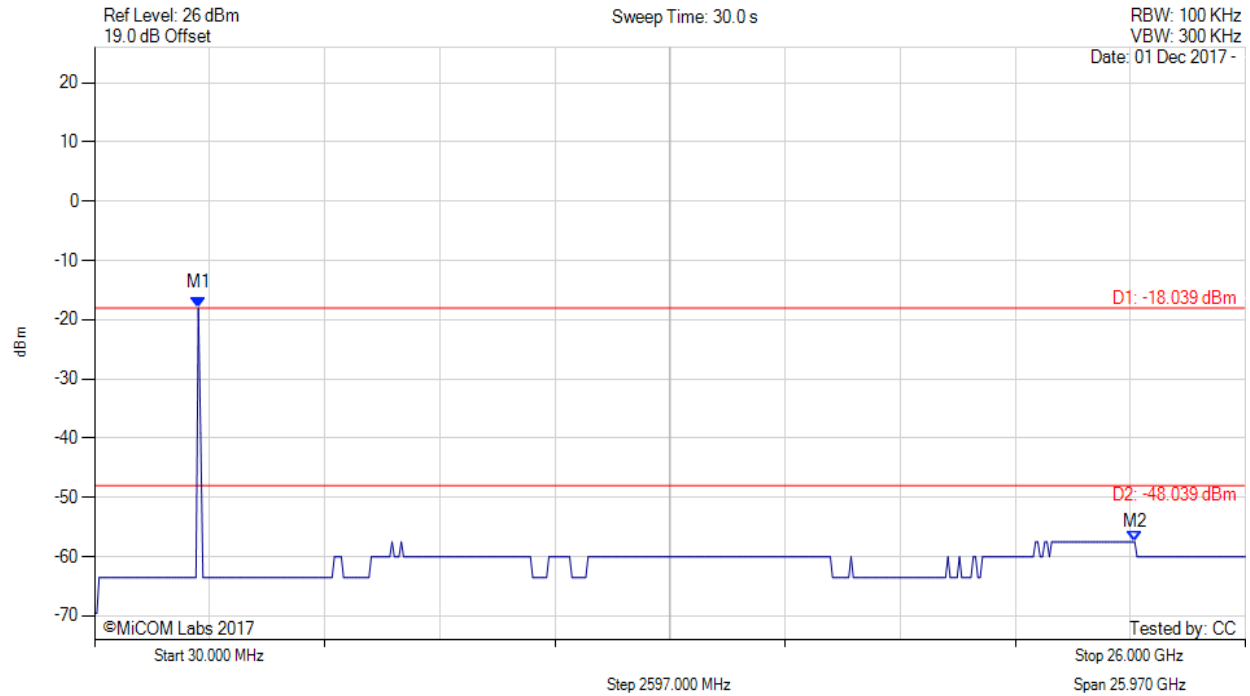

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2371.984 MHz : -18.039 dBm M2 : 23.502 GHz : -57.524 dBm	Limit: -48.04 dBm Margin: -9.48 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 143 of 191



CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 802.11g, Channel: 2412.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

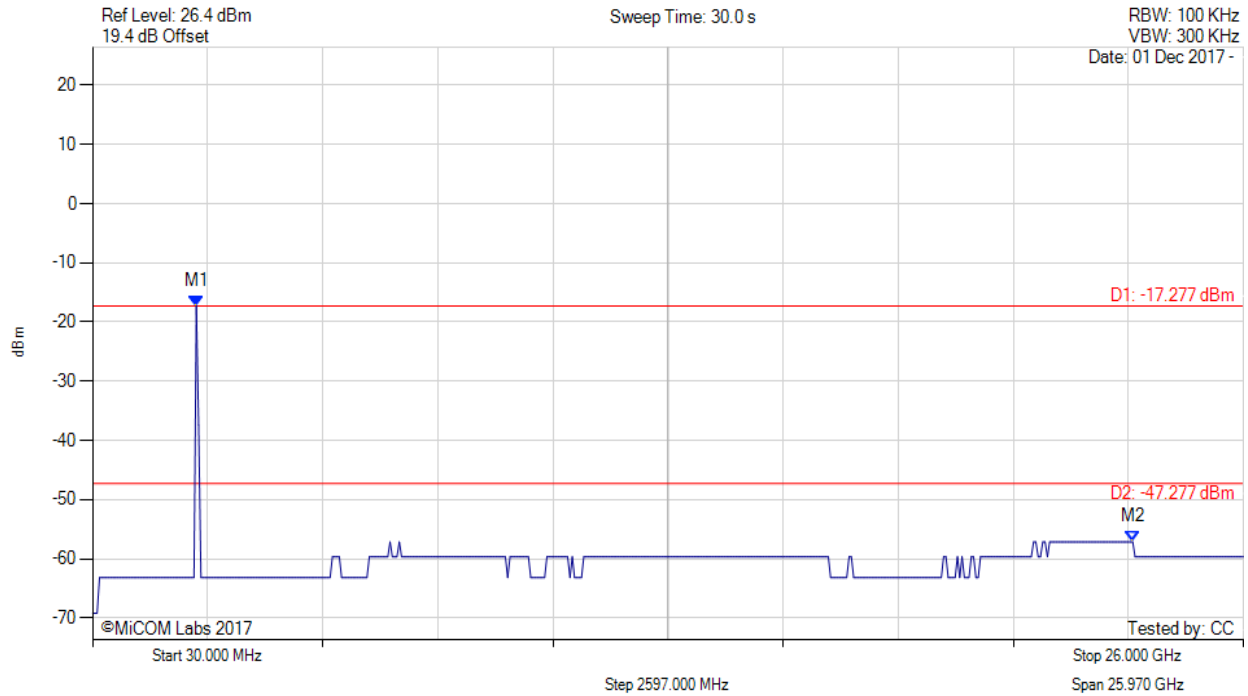

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2371.984 MHz : -17.277 dBm M2 : 23.502 GHz : -57.124 dBm	Limit: -47.28 dBm Margin: -9.84 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 144 of 191



CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 802.11g, Channel: 2437.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

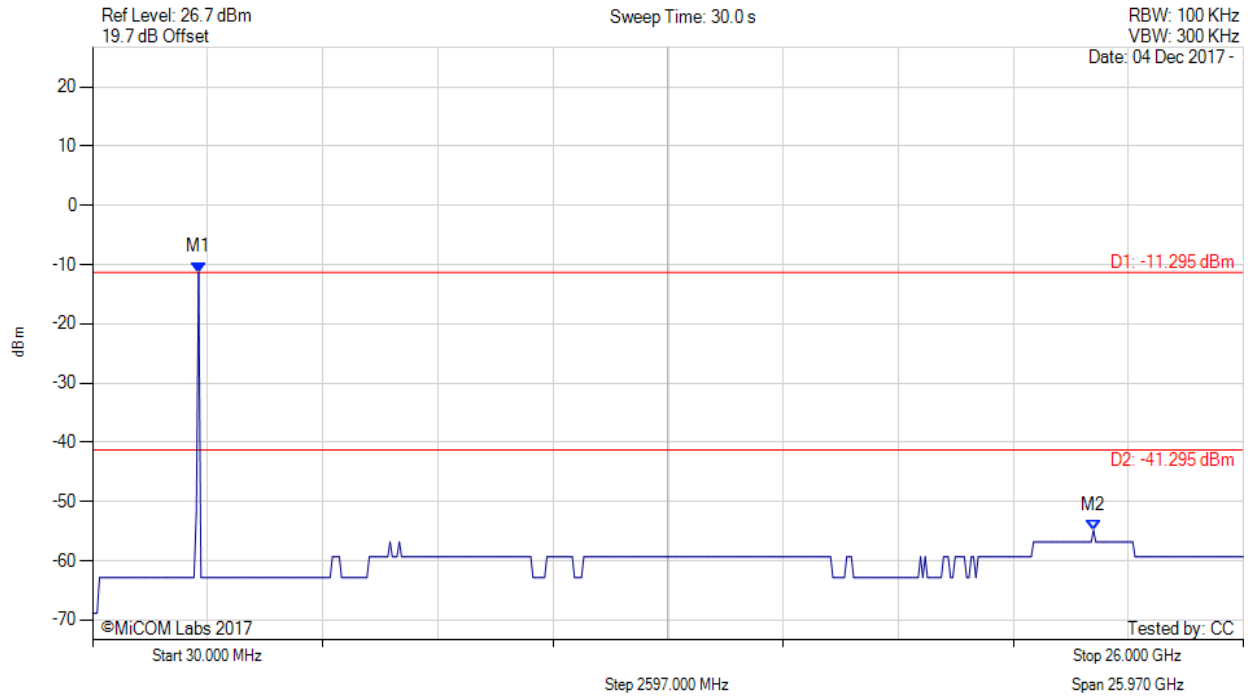

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2424.028 MHz : -11.295 dBm M2 : 22.617 GHz : -54.886 dBm	Limit: -41.30 dBm Margin: -13.59 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 145 of 191



CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 802.11g, Channel: 2437.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

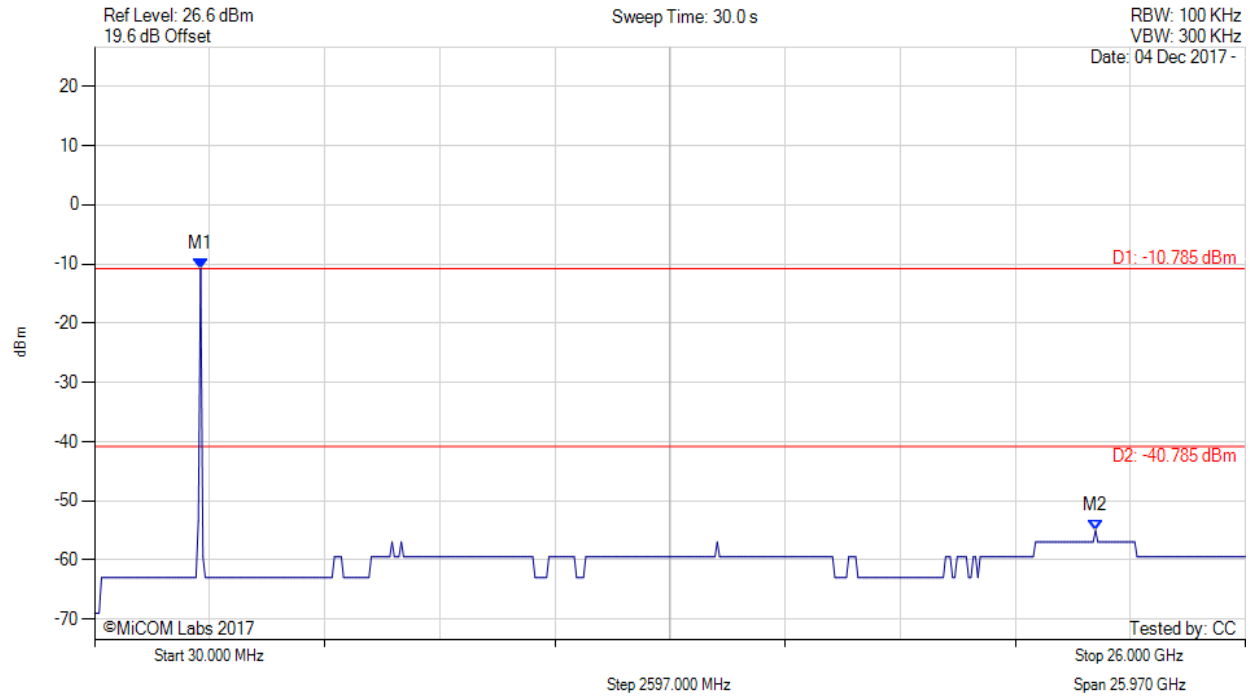

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2424.028 MHz : -10.785 dBm M2 : 22.617 GHz : -54.986 dBm	Limit: -40.79 dBm Margin: -14.20 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 146 of 191



CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 802.11g, Channel: 2462.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

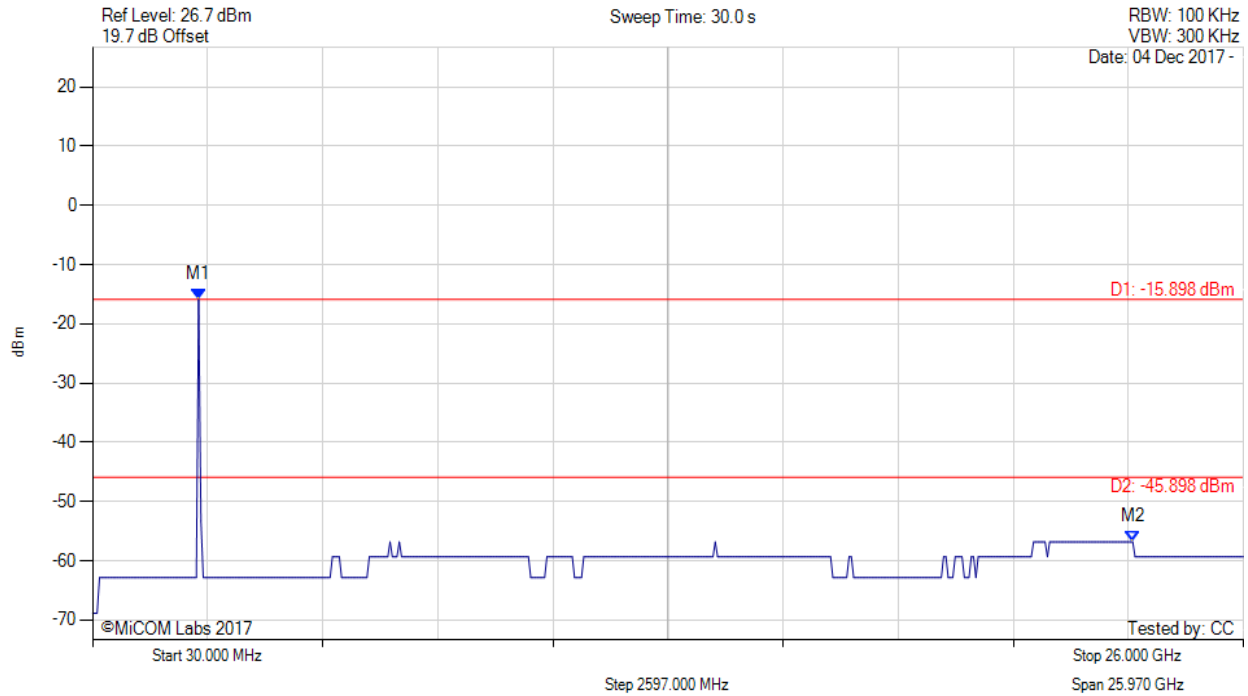

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2424.028 MHz : -15.898 dBm M2 : 23.502 GHz : -56.824 dBm	Limit: -45.90 dBm Margin: -10.92 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 147 of 191



CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 802.11g, Channel: 2462.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

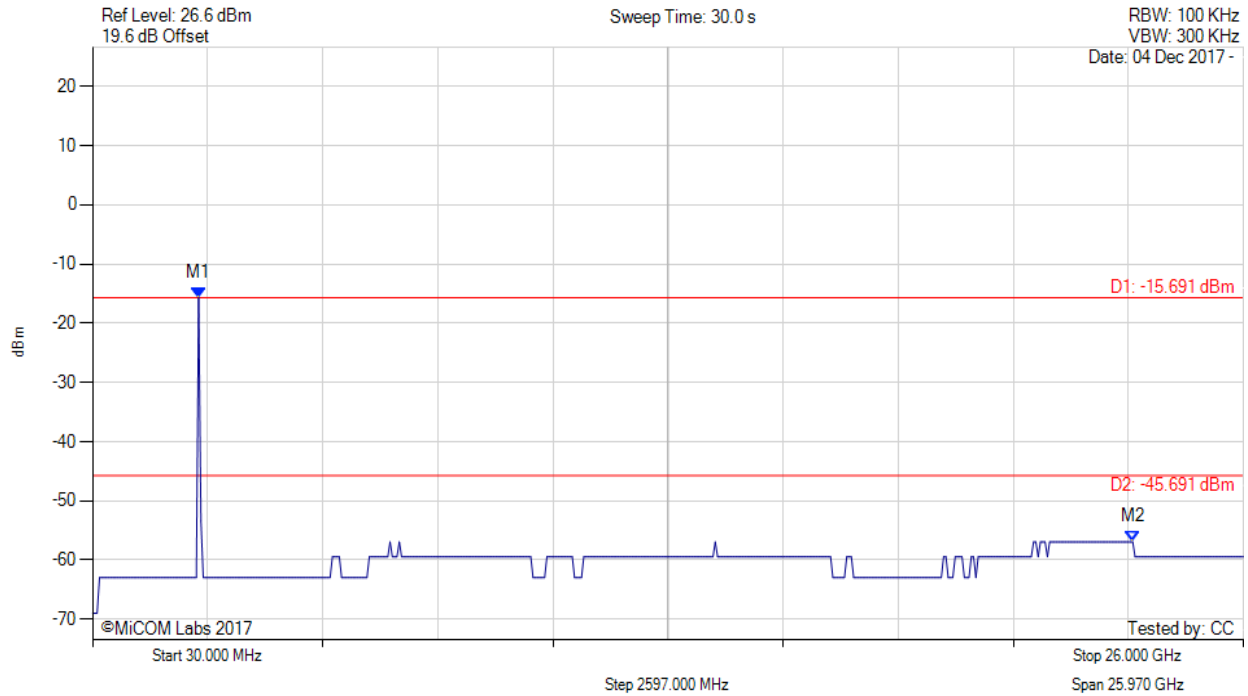

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2424.028 MHz : -15.691 dBm M2 : 23.502 GHz : -56.924 dBm	Limit: -45.69 dBm Margin: -11.23 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 148 of 191



CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

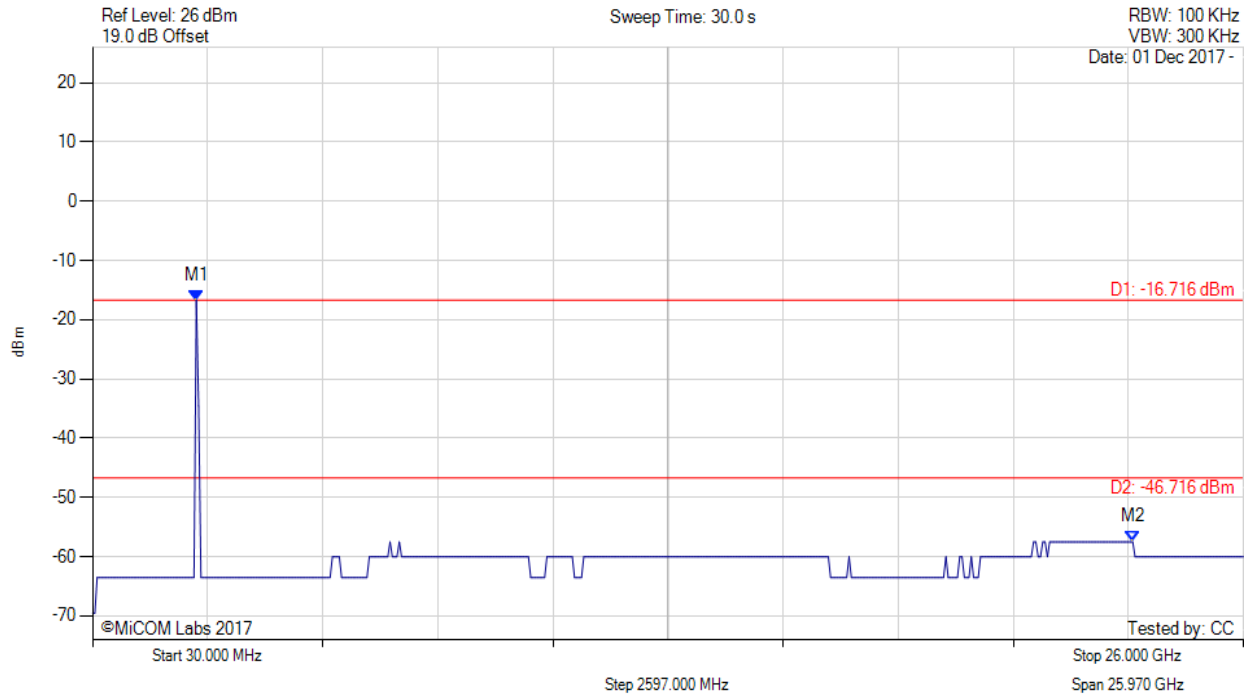

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2371.984 MHz : -16.716 dBm M2 : 23.502 GHz : -57.524 dBm	Limit: -46.72 dBm Margin: -10.80 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 149 of 191



CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

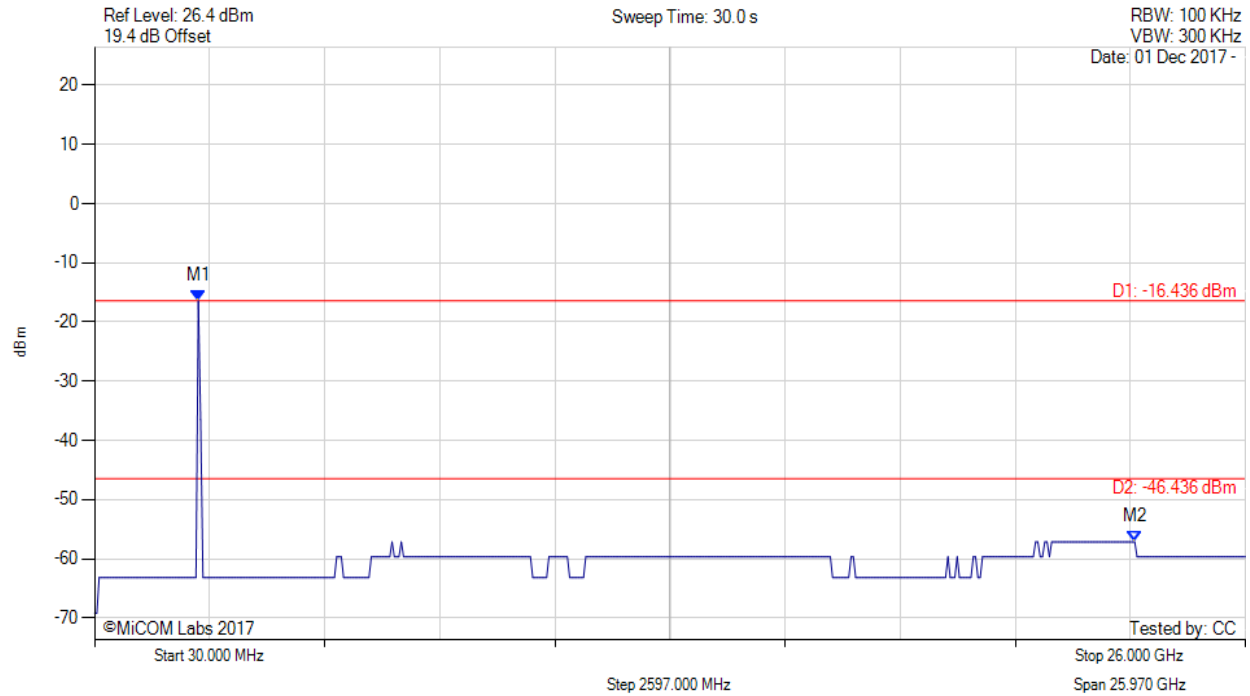

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2371.984 MHz : -16.436 dBm M2 : 23.502 GHz : -57.124 dBm	Limit: -46.44 dBm Margin: -10.68 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 150 of 191



CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

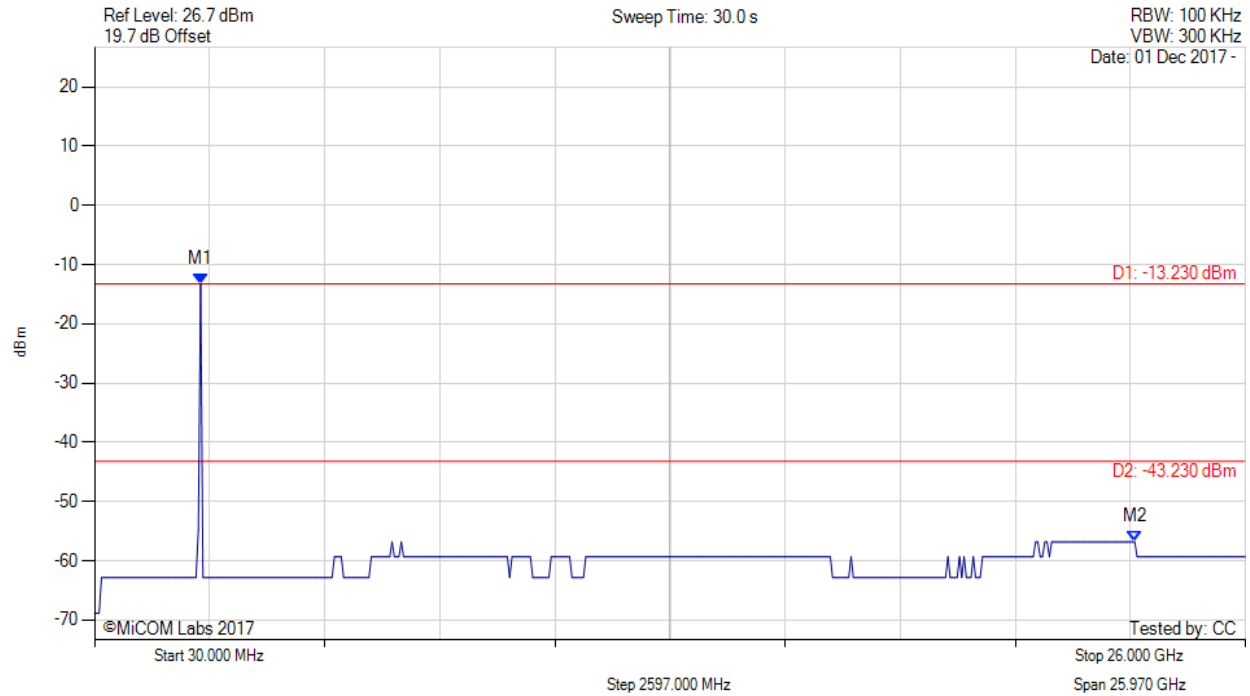

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2424.028 MHz : -13.230 dBm M2 : 23.502 GHz : -56.824 dBm	Limit: -43.23 dBm Margin: -13.59 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 151 of 191



CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

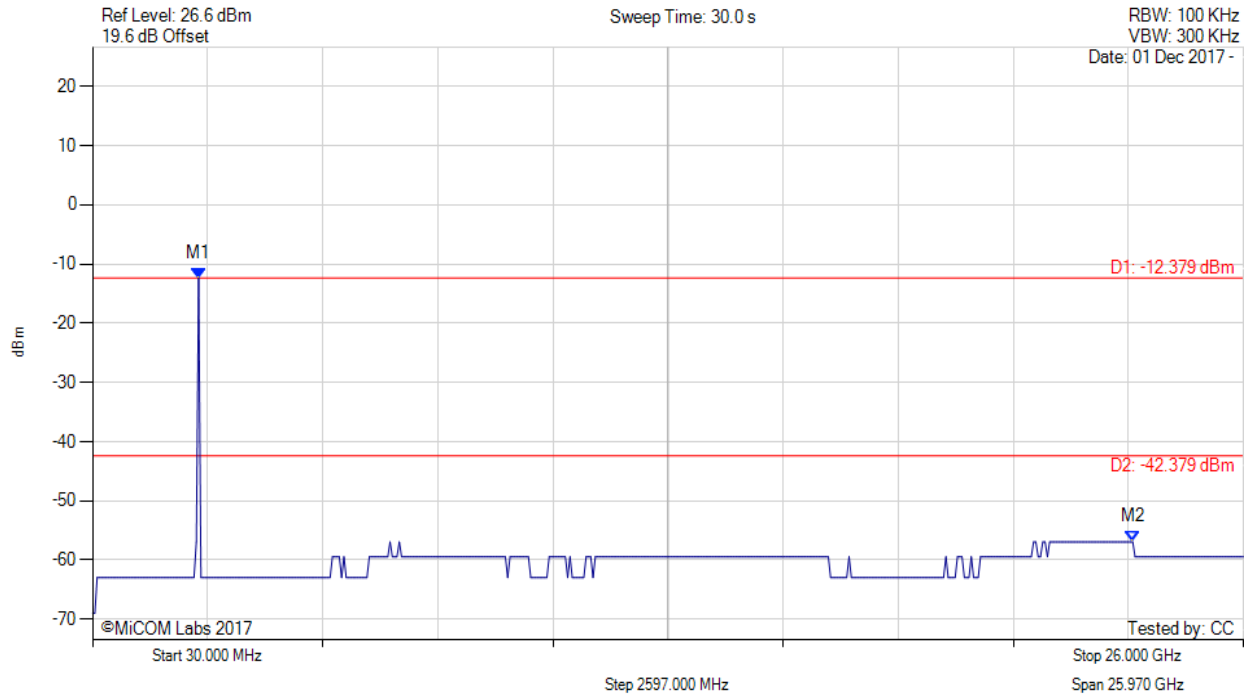

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2424.028 MHz : -12.379 dBm M2 : 23.502 GHz : -56.924 dBm	Limit: -42.38 dBm Margin: -14.54 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 152 of 191



CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

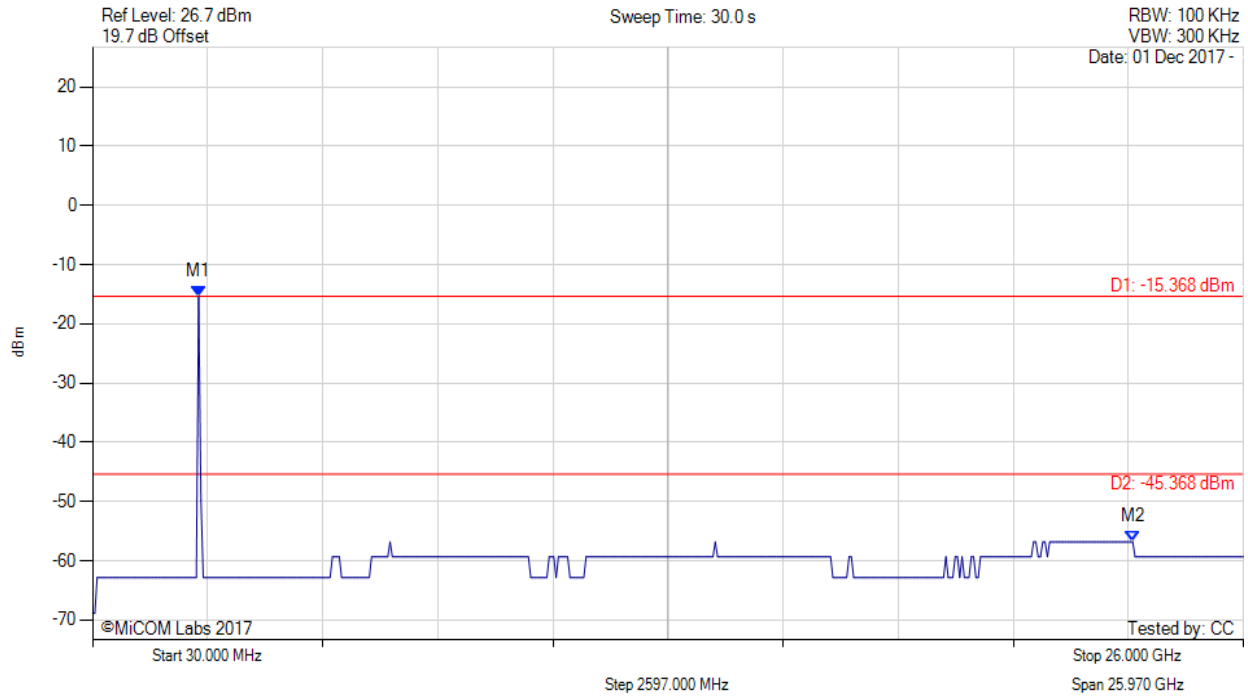

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2424.028 MHz : -15.368 dBm M2 : 23.502 GHz : -56.824 dBm	Limit: -45.37 dBm Margin: -11.45 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 153 of 191



CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

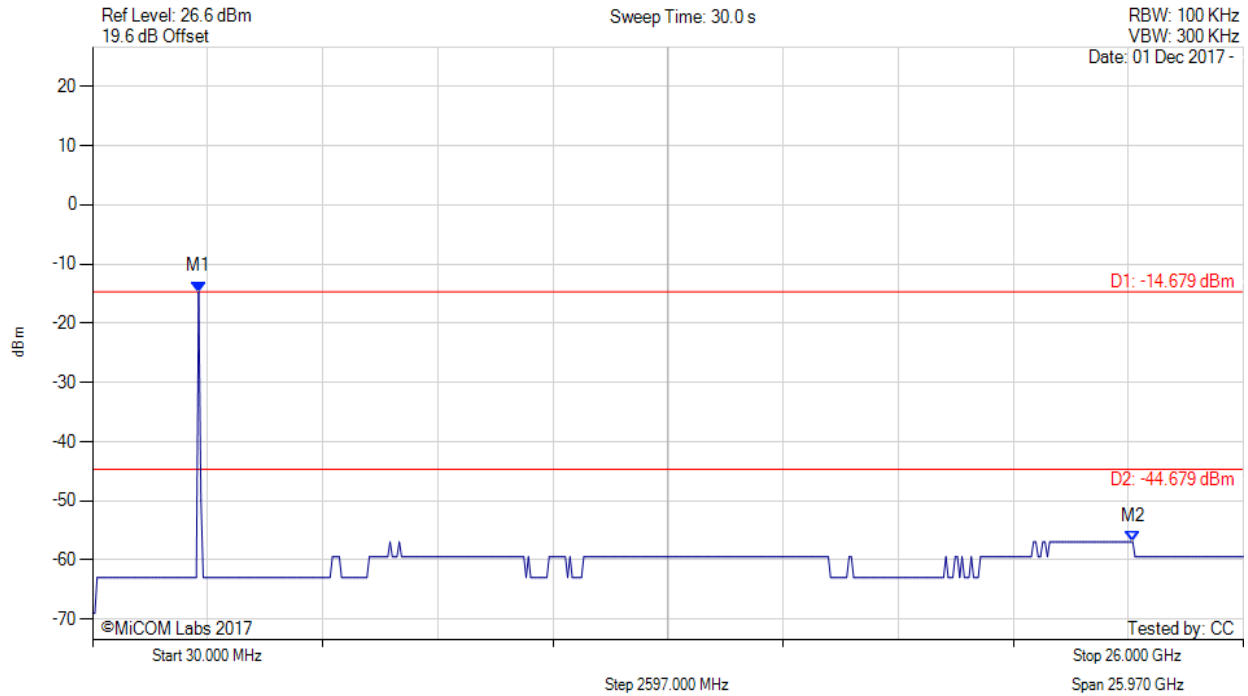

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2424.028 MHz : -14.679 dBm M2 : 23.502 GHz : -56.924 dBm	Limit: -44.68 dBm Margin: -12.24 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 154 of 191



CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

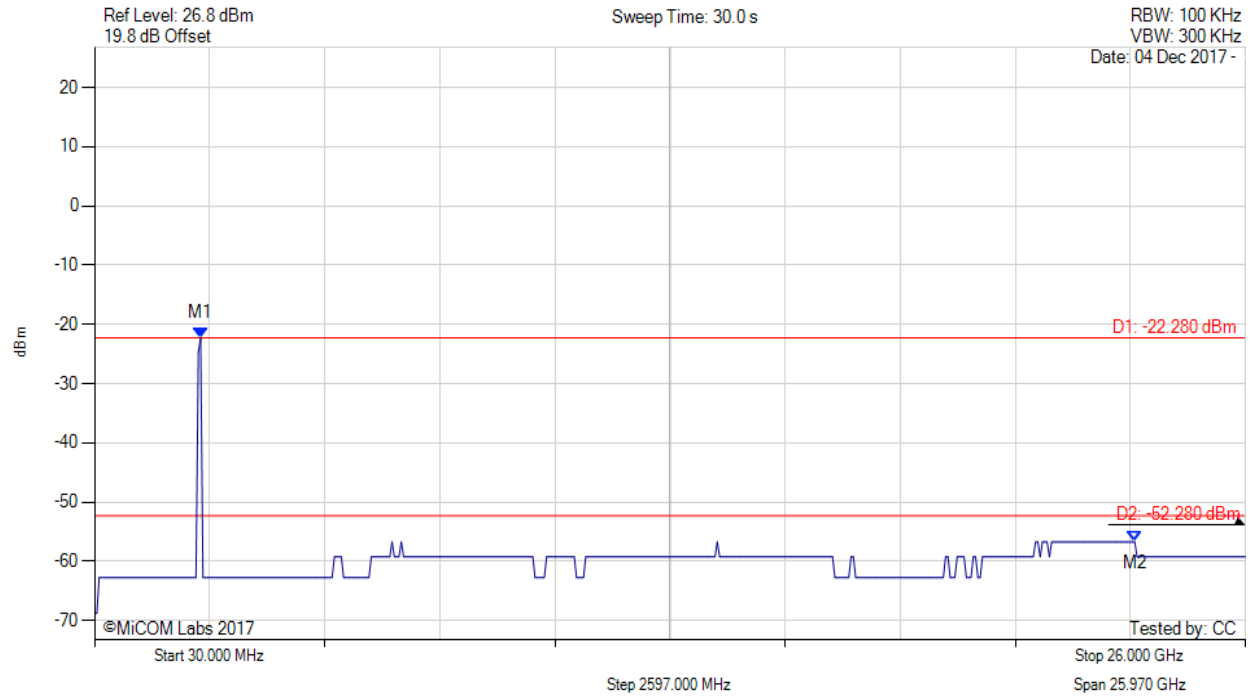

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2424.028 MHz : -22.280 dBm M2 : 23.502 GHz : -56.724 dBm	Limit: -52.28 dBm Margin: -4.44 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 155 of 191



CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

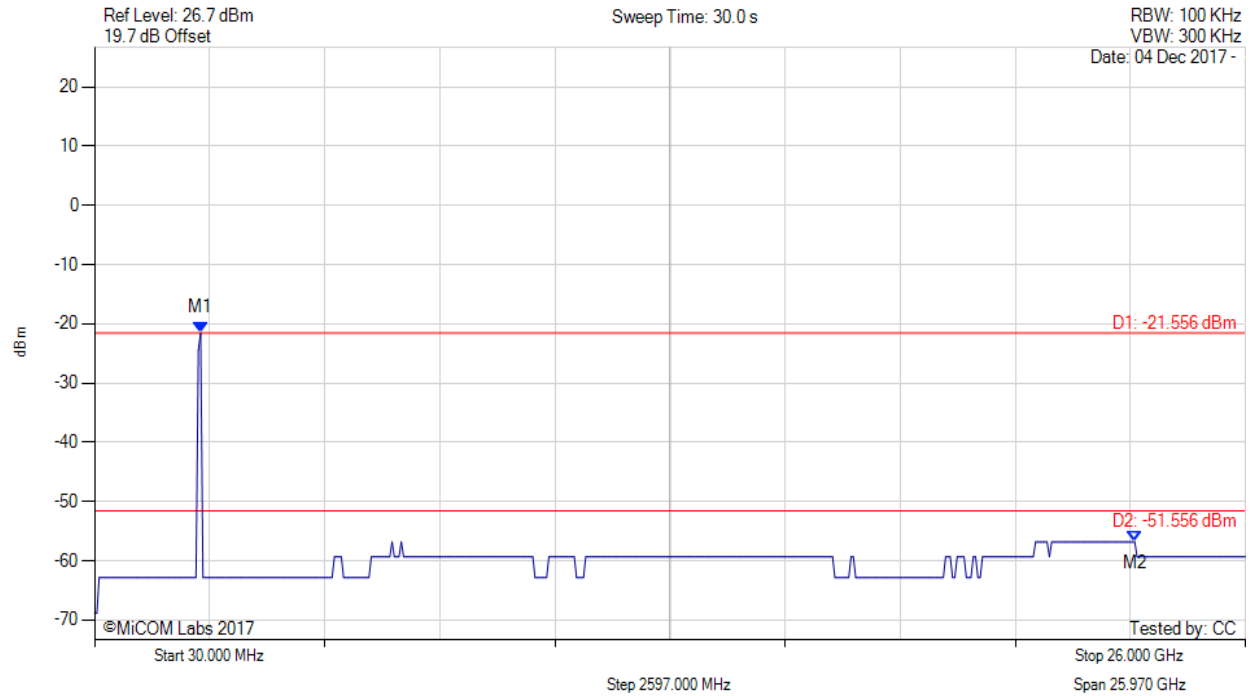

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2424.028 MHz : -21.556 dBm M2 : 23.502 GHz : -56.824 dBm	Limit: -51.56 dBm Margin: -5.26 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 156 of 191



CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

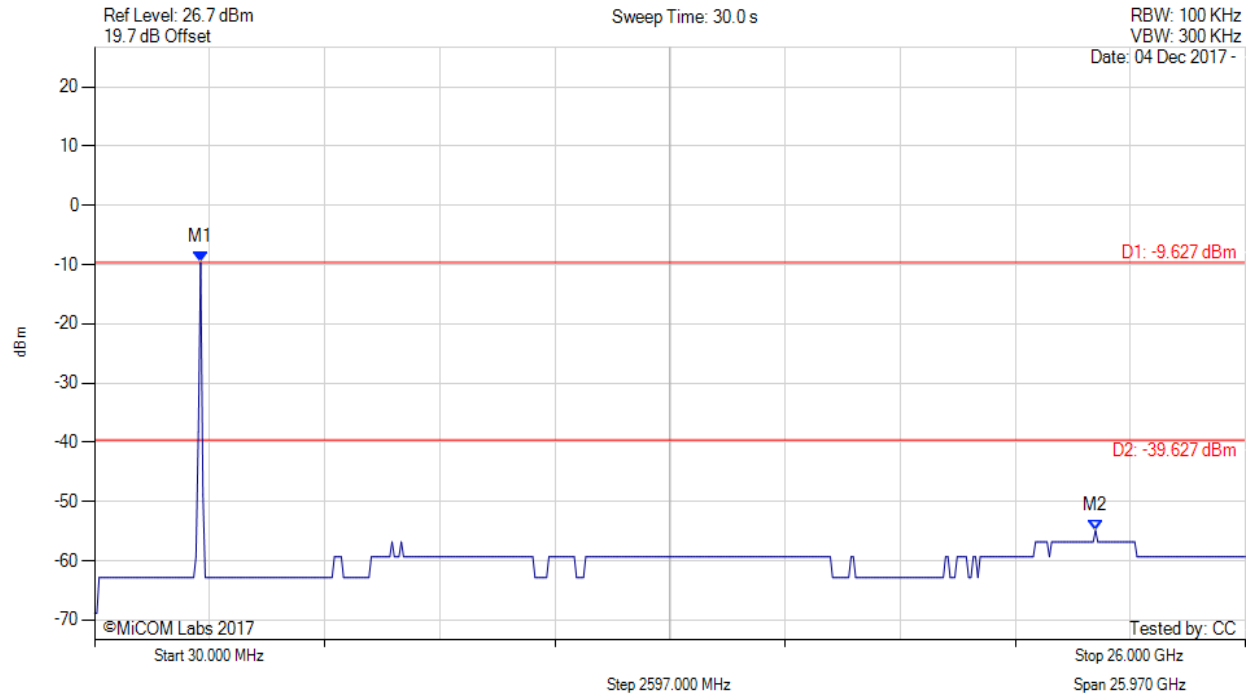

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2424.028 MHz : -9.627 dBm M2 : 22.617 GHz : -54.886 dBm	Limit: -39.63 dBm Margin: -15.26 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 157 of 191



CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

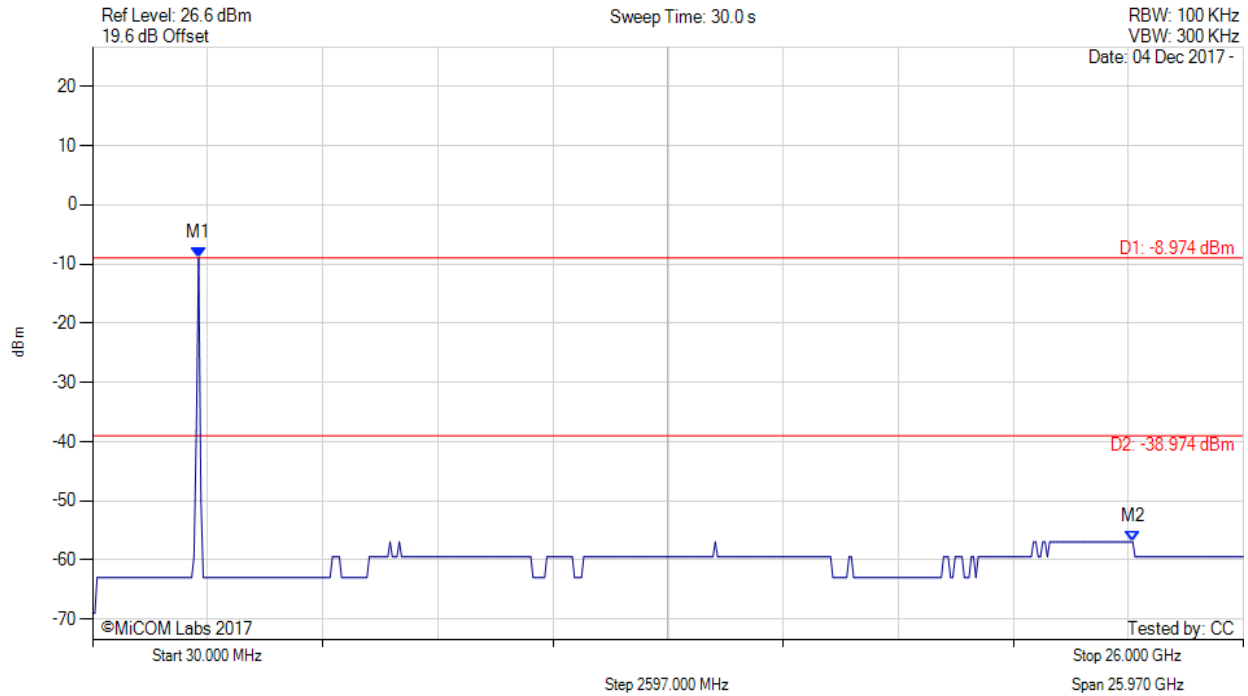

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2424.028 MHz : -8.974 dBm M2 : 23.502 GHz : -56.924 dBm	Limit: -38.97 dBm Margin: -17.95 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 158 of 191



CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

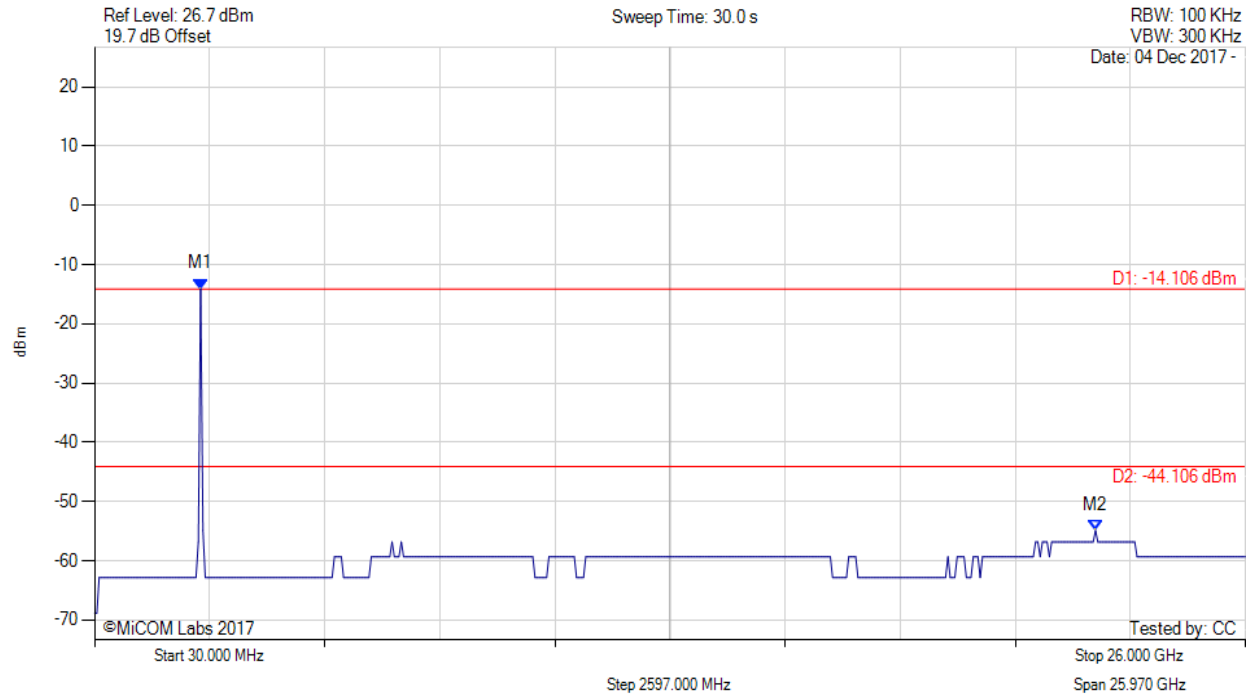

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2424.028 MHz : -14.106 dBm M2 : 22.617 GHz : -54.886 dBm	Limit: -44.11 dBm Margin: -10.78 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 159 of 191



CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

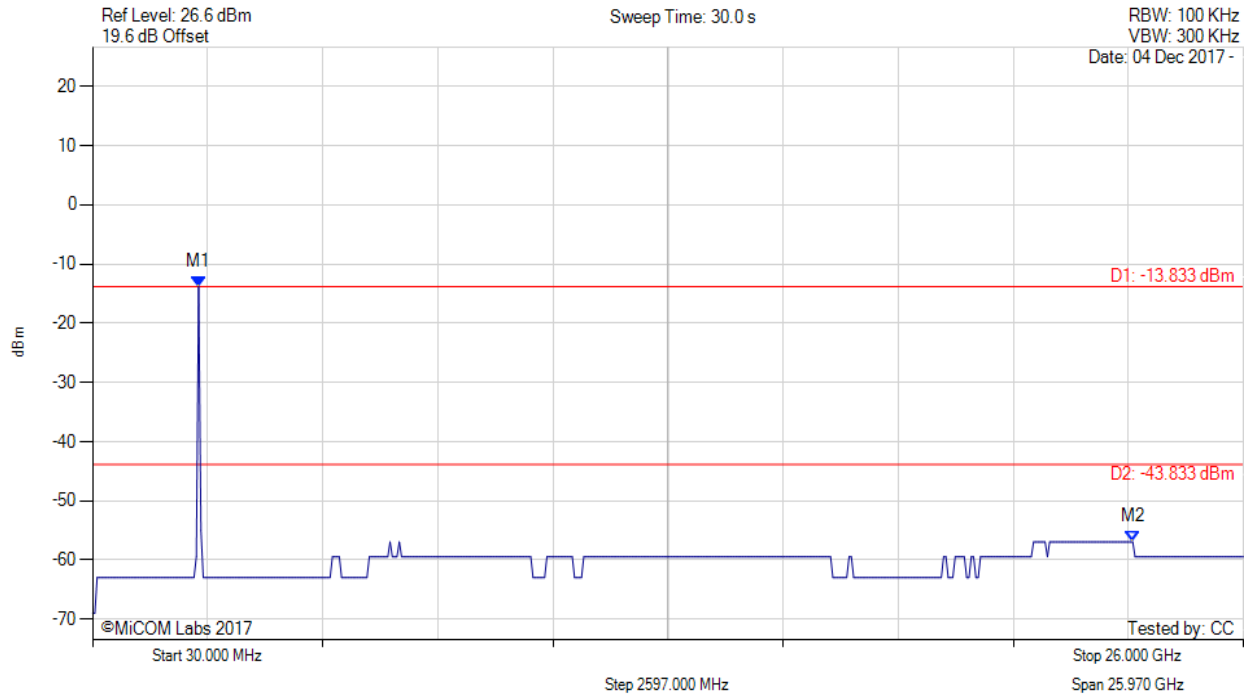

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2424.028 MHz : -13.833 dBm M2 : 23.502 GHz : -56.924 dBm	Limit: -43.83 dBm Margin: -13.09 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 160 of 191


Conducted Band-Edge Emissions

Low Band-Edge Emissions



CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE

Variant: 802.11b, Channel: 2412.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

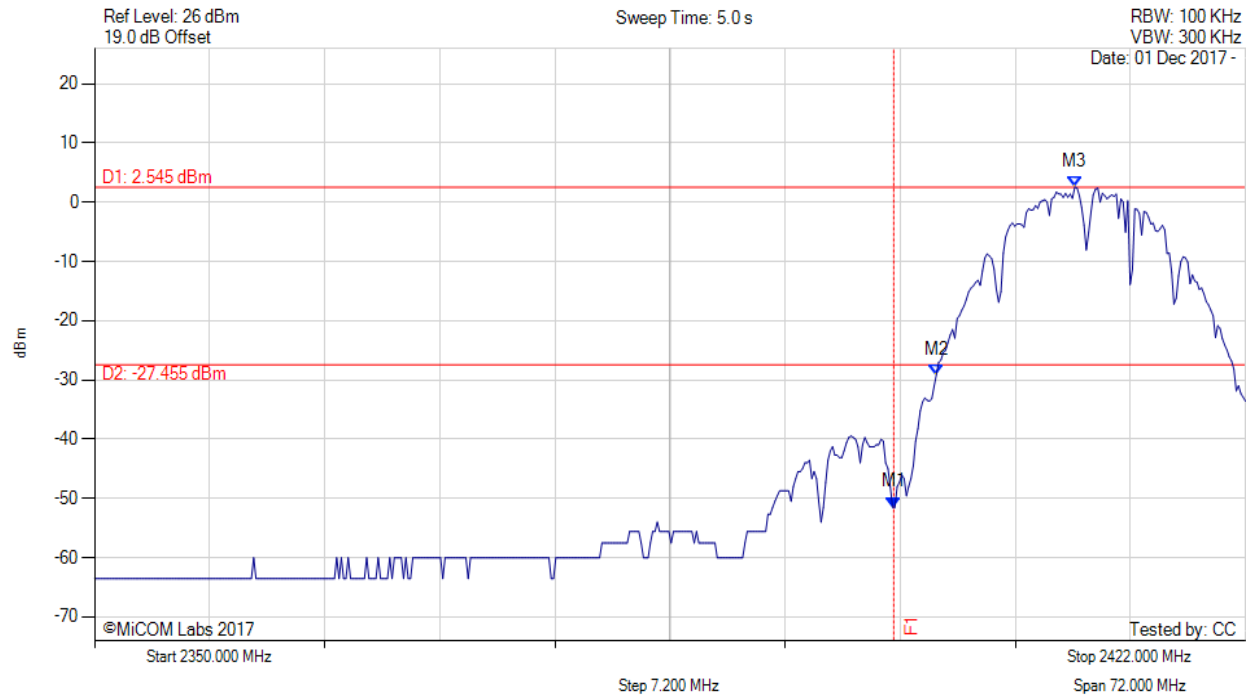

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2400.000 MHz : -51.504 dBm M2 : 2402.665 MHz : -29.142 dBm M3 : 2411.323 MHz : 2.545 dBm	Channel Frequency: 2412.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 161 of 191



CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE

Variant: 802.11b, Channel: 2412.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

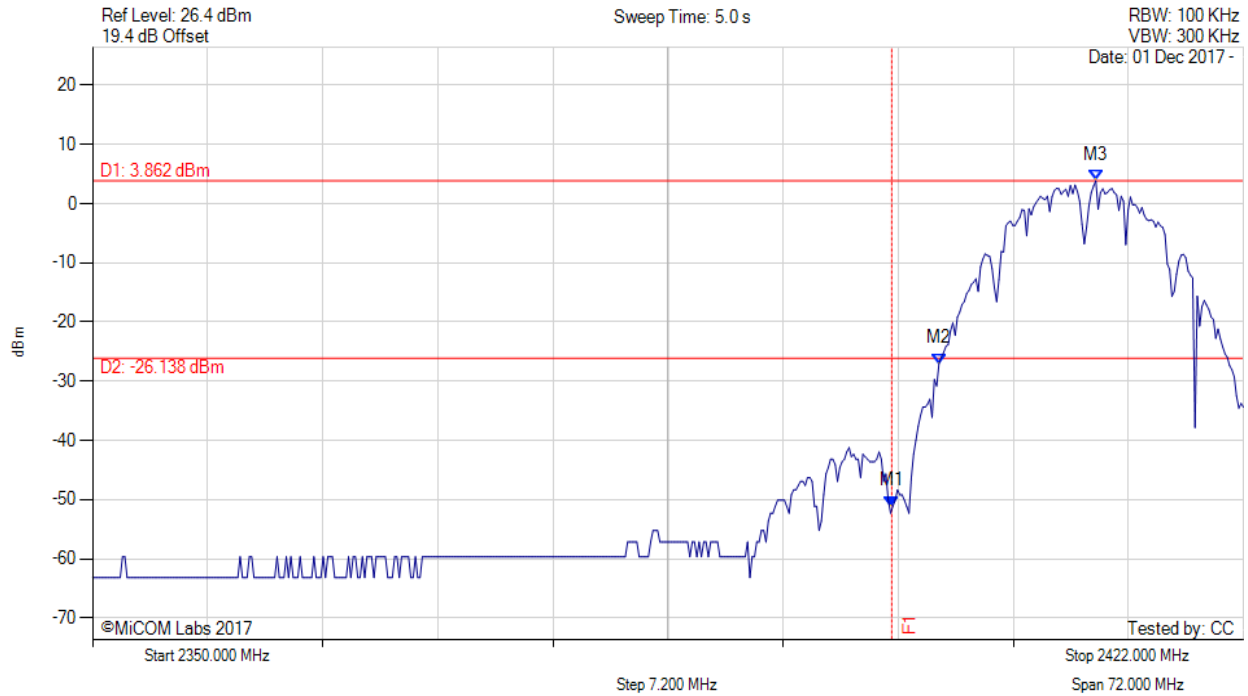

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2400.000 MHz : -51.104 dBm M2 : 2402.954 MHz : -27.021 dBm M3 : 2412.766 MHz : 3.862 dBm	Channel Frequency: 2412.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 162 of 191



CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE

Variant: 802.11g, Channel: 2412.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

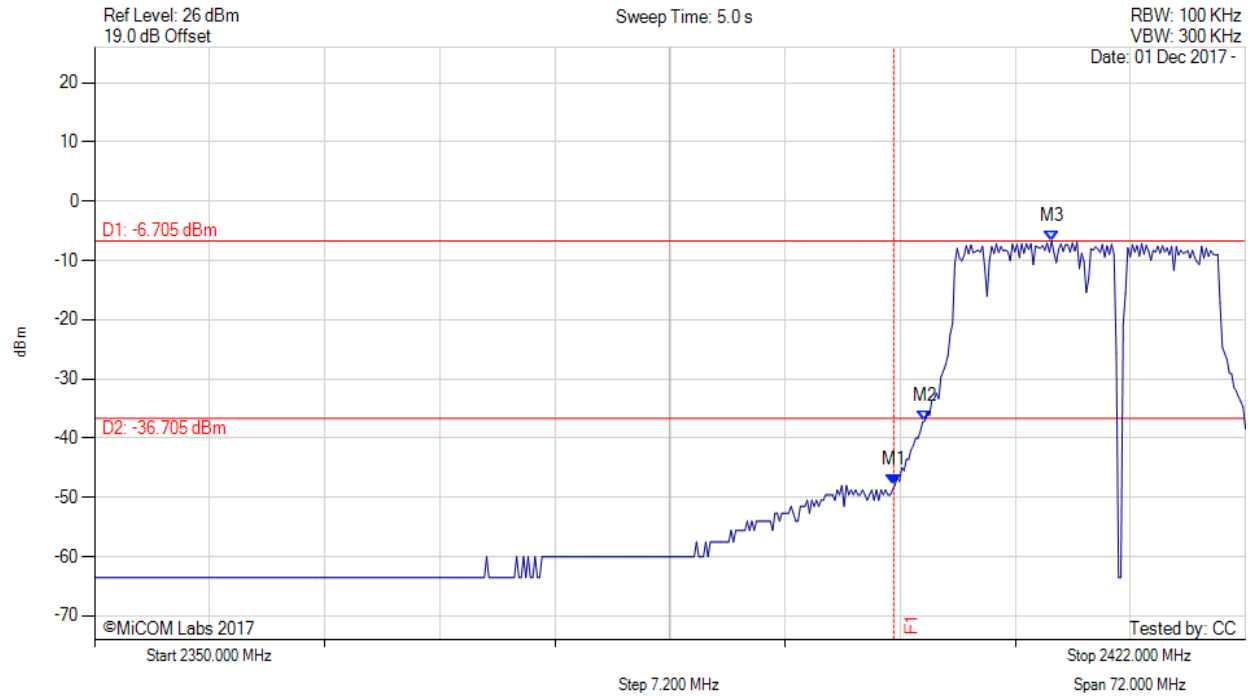

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2400.000 MHz : -47.982 dBm M2 : 2401.944 MHz : -37.100 dBm M3 : 2409.880 MHz : -6.705 dBm	Channel Frequency: 2412.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 163 of 191



CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE

Variant: 802.11g, Channel: 2412.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

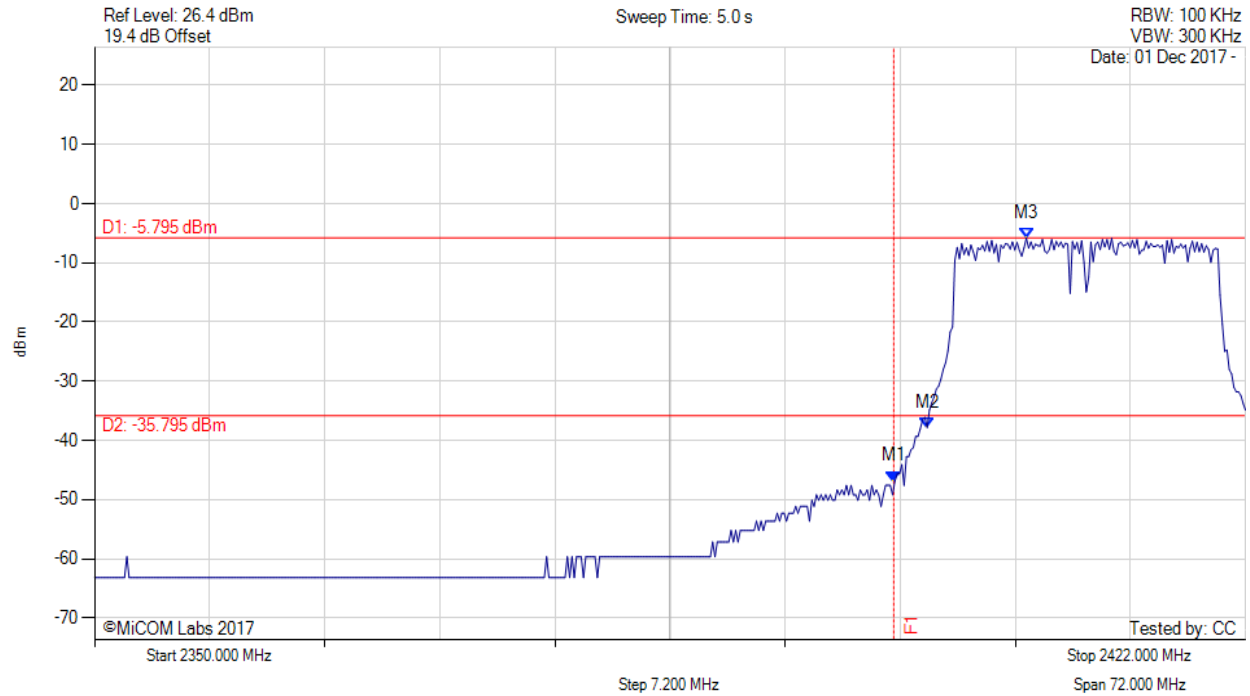

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2400.000 MHz : -46.886 dBm M2 : 2402.088 MHz : -37.801 dBm M3 : 2408.293 MHz : -5.795 dBm	Channel Frequency: 2412.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 164 of 191



CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE

Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

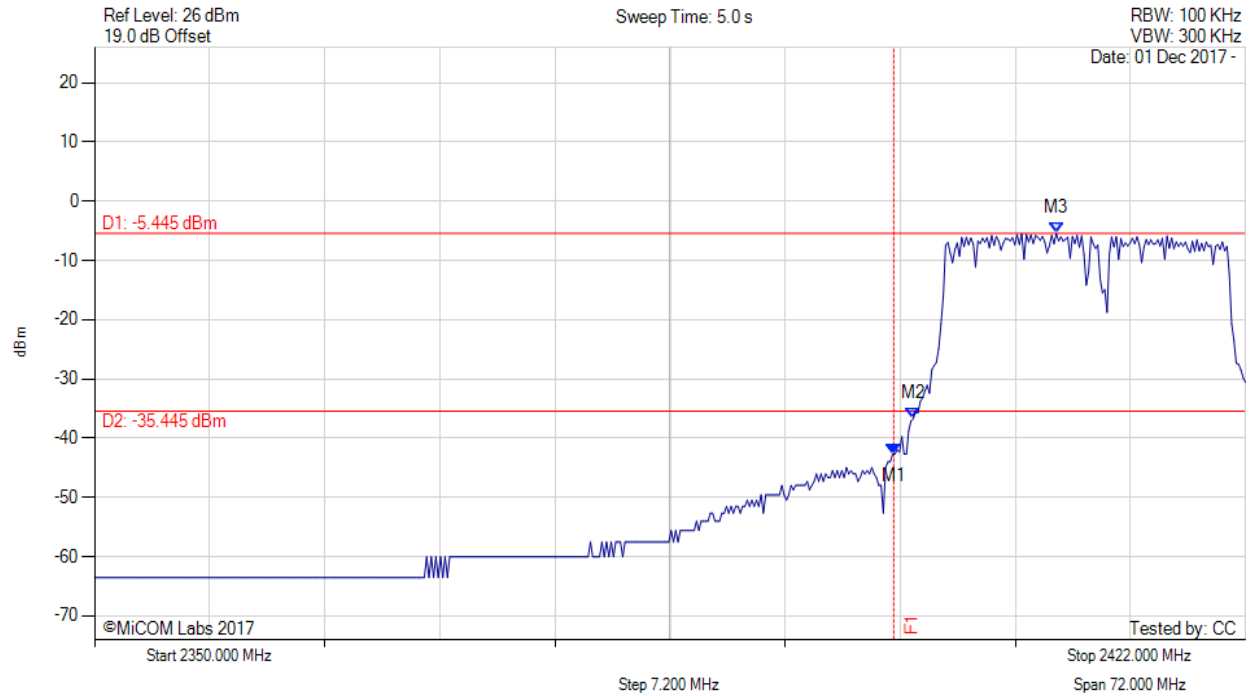

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2400.000 MHz : -42.717 dBm M2 : 2401.222 MHz : -36.696 dBm M3 : 2410.168 MHz : -5.445 dBm	Channel Frequency: 2412.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 165 of 191



CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE

Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

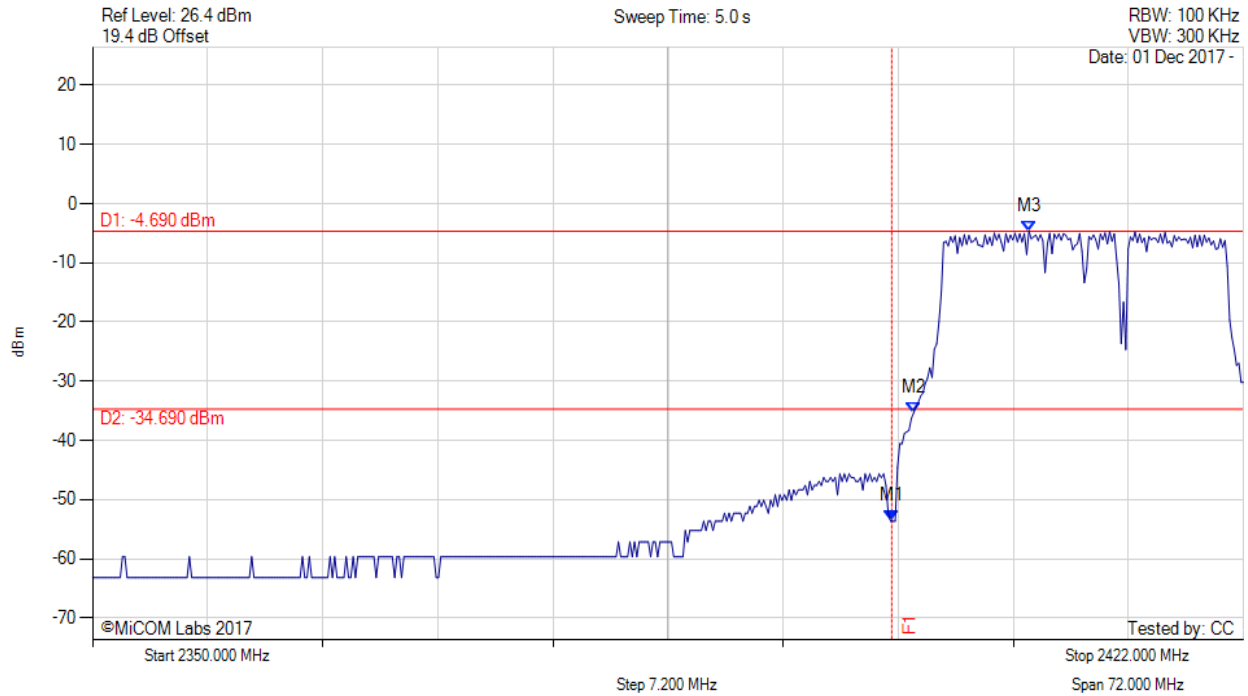

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2400.000 MHz : -53.602 dBm M2 : 2401.367 MHz : -35.361 dBm M3 : 2408.581 MHz : -4.690 dBm	Channel Frequency: 2412.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 166 of 191



CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE

Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

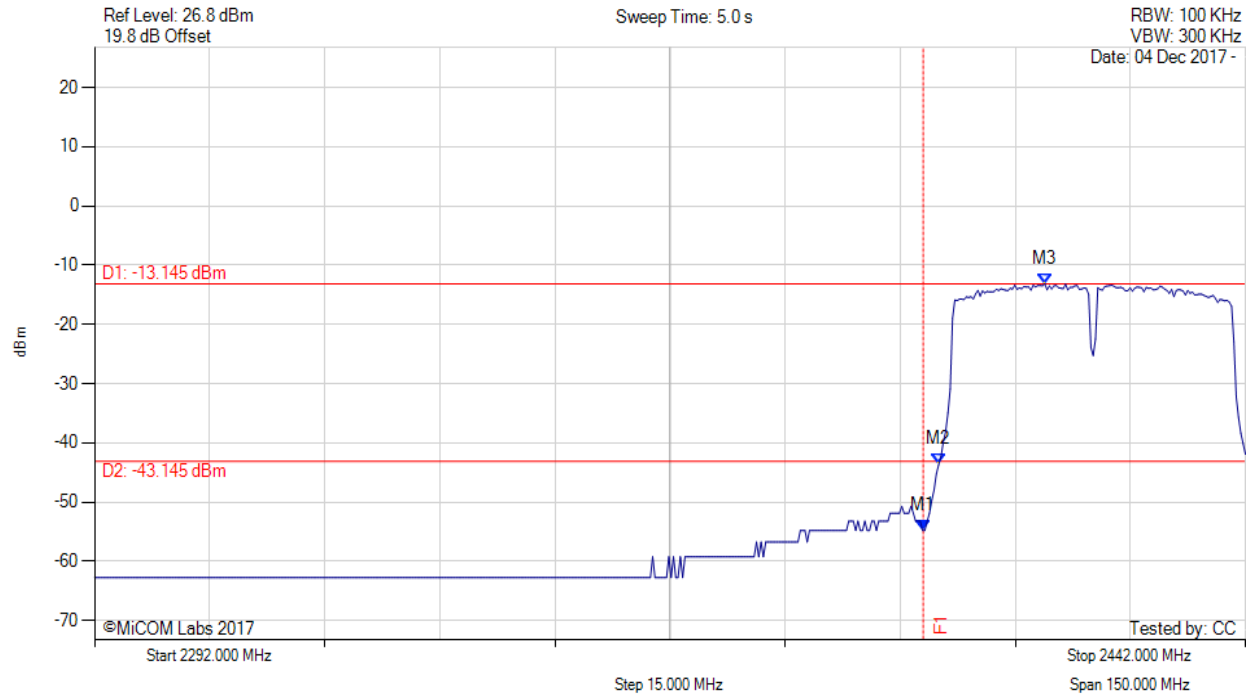

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2400.000 MHz : -54.786 dBm M2 : 2402.020 MHz : -43.660 dBm M3 : 2415.848 MHz : -13.145 dBm	Channel Frequency: 2422.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 167 of 191



CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE

Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

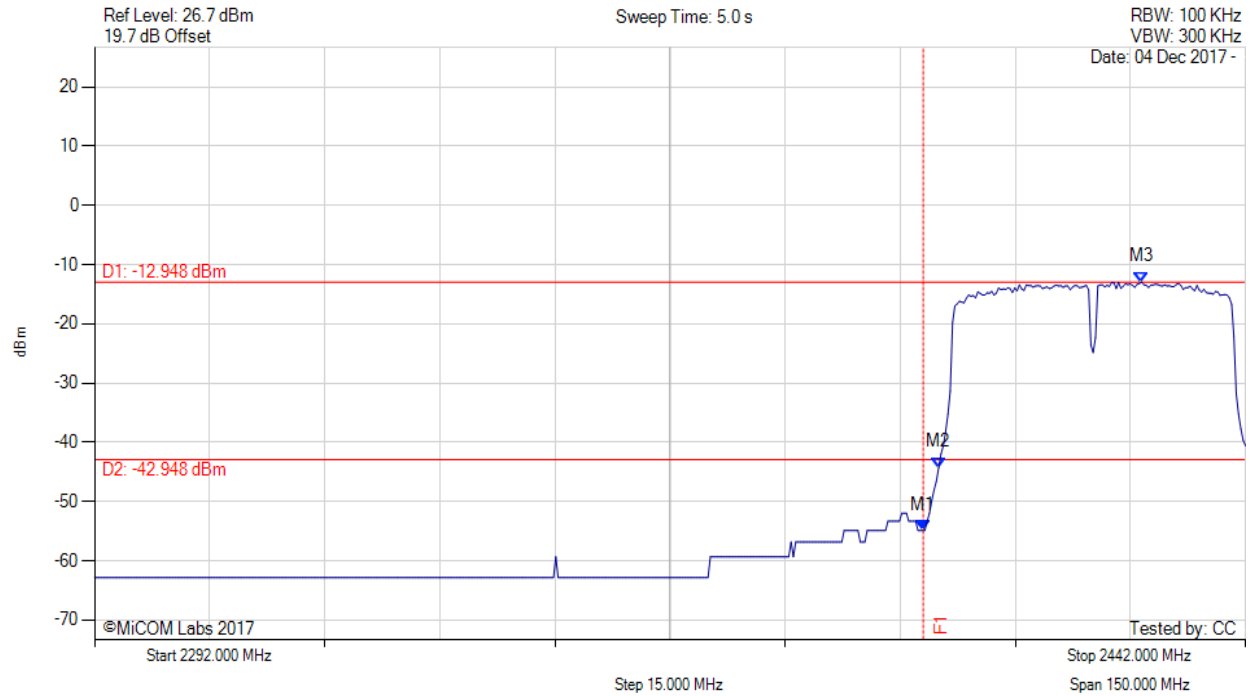

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2400.000 MHz : -54.886 dBm M2 : 2402.020 MHz : -44.256 dBm M3 : 2428.473 MHz : -12.948 dBm	Channel Frequency: 2422.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 168 of 191

High Band-Edge Emissions



CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE

Variant: 802.11b, Channel: 2462.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

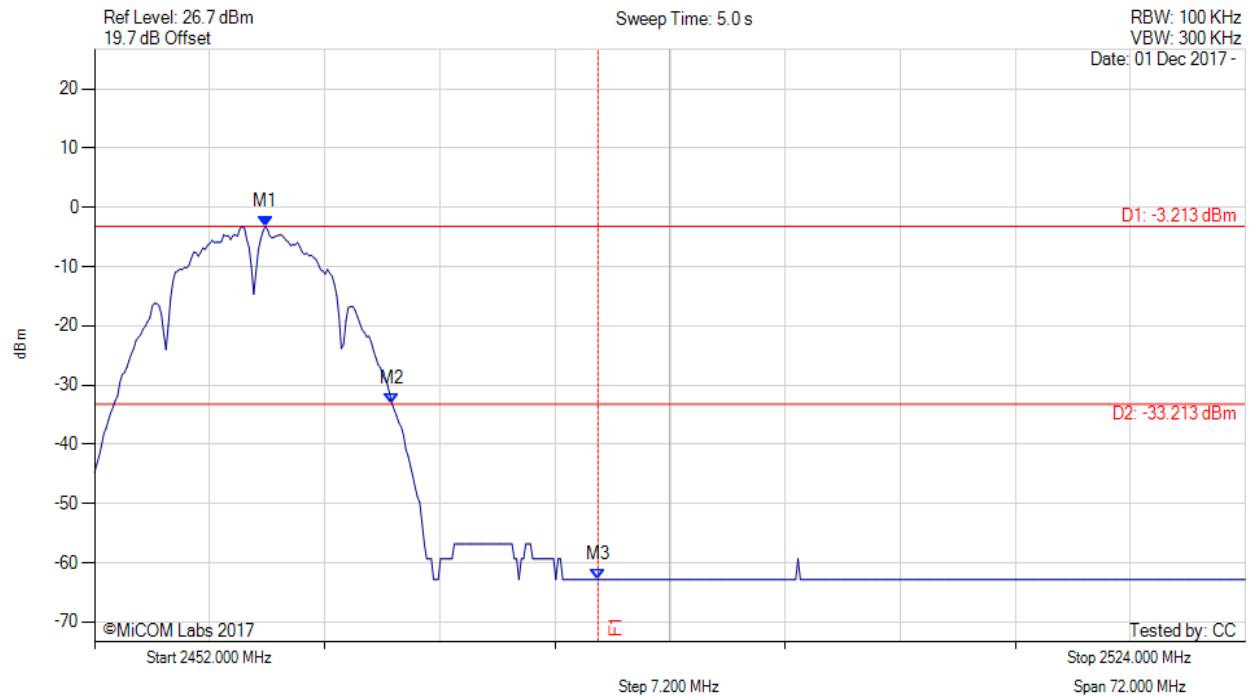

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2462.677 MHz : -3.213 dBm M2 : 2470.613 MHz : -33.159 dBm M3 : 2483.500 MHz : -62.845 dBm	Channel Frequency: 2462.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 169 of 191



CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE

Variant: 802.11b, Channel: 2462.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

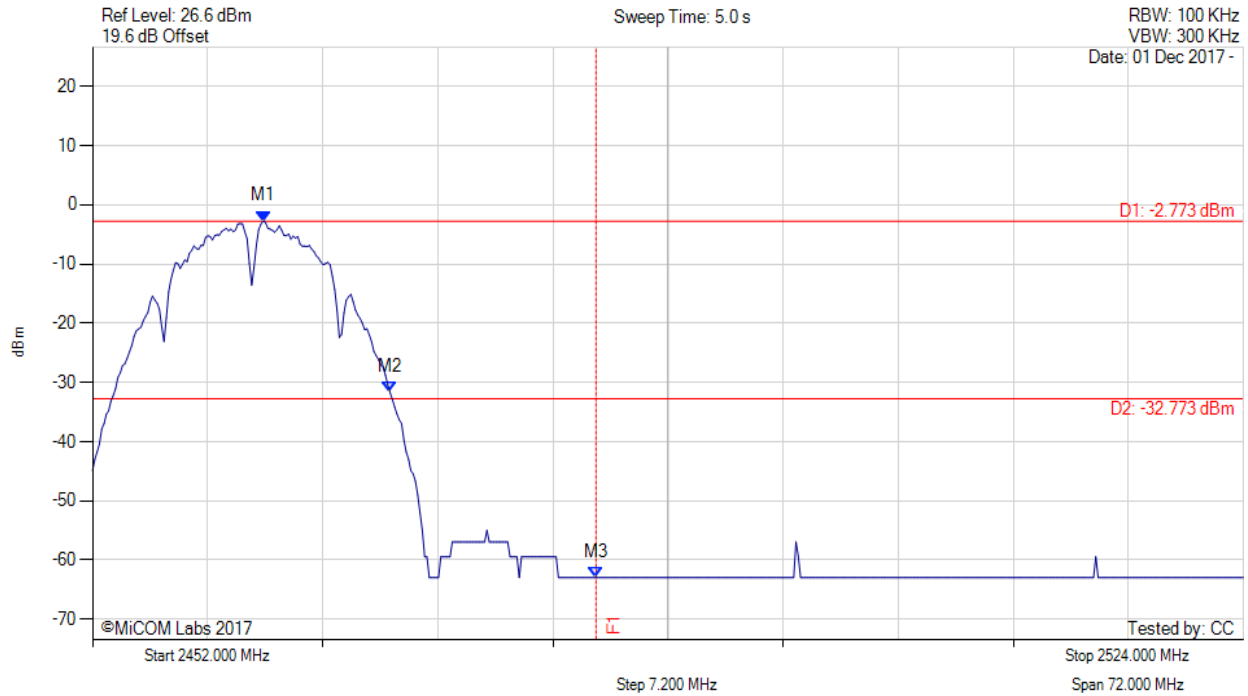

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2462.677 MHz : -2.773 dBm M2 : 2470.613 MHz : -31.699 dBm M3 : 2483.500 MHz : -62.945 dBm	Channel Frequency: 2462.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 170 of 191



CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE

Variant: 802.11g, Channel: 2462.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

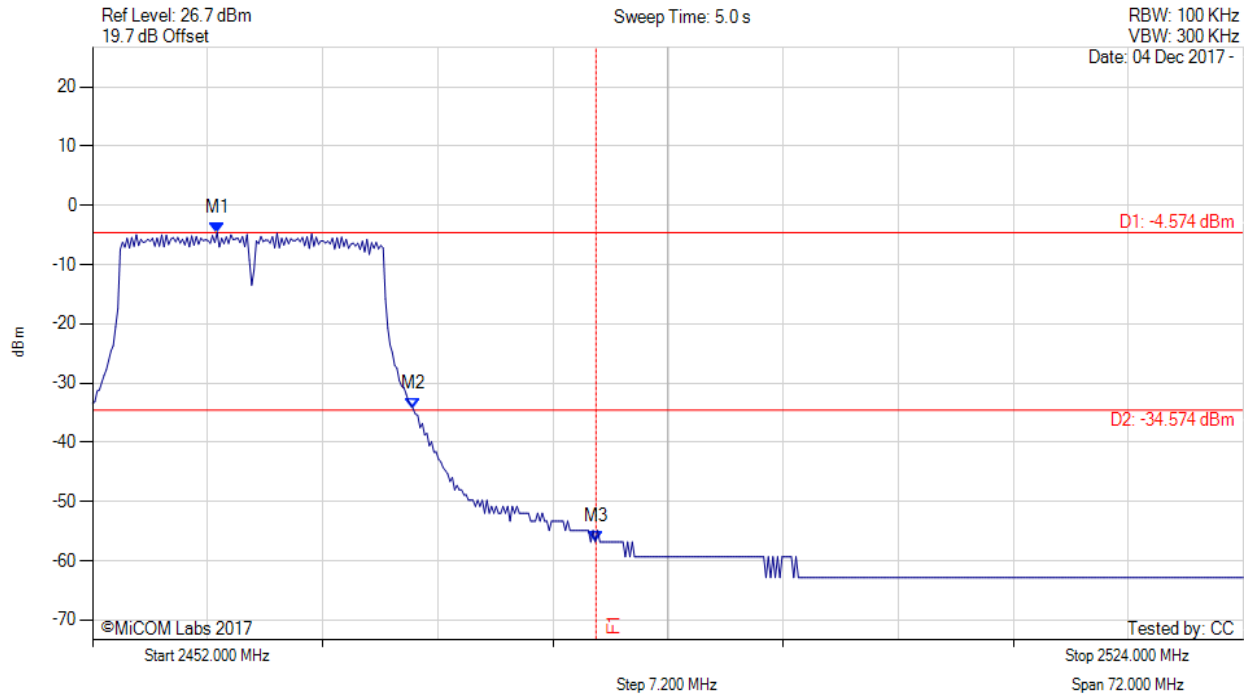

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2459.792 MHz : -4.574 dBm M2 : 2472.056 MHz : -34.380 dBm M3 : 2483.500 MHz : -56.824 dBm	Channel Frequency: 2462.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 171 of 191



CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE

Variant: 802.11g, Channel: 2462.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

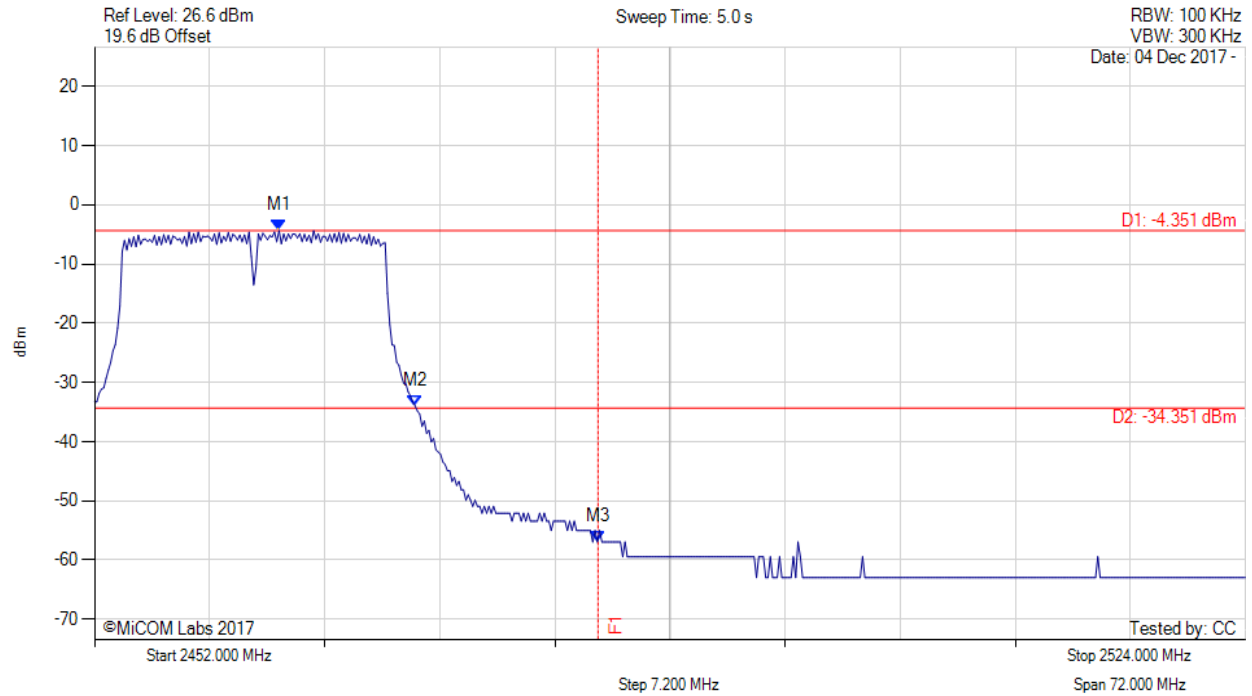

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2463.543 MHz : -4.351 dBm M2 : 2472.056 MHz : -34.002 dBm M3 : 2483.500 MHz : -56.924 dBm	Channel Frequency: 2462.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 172 of 191



CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE

Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

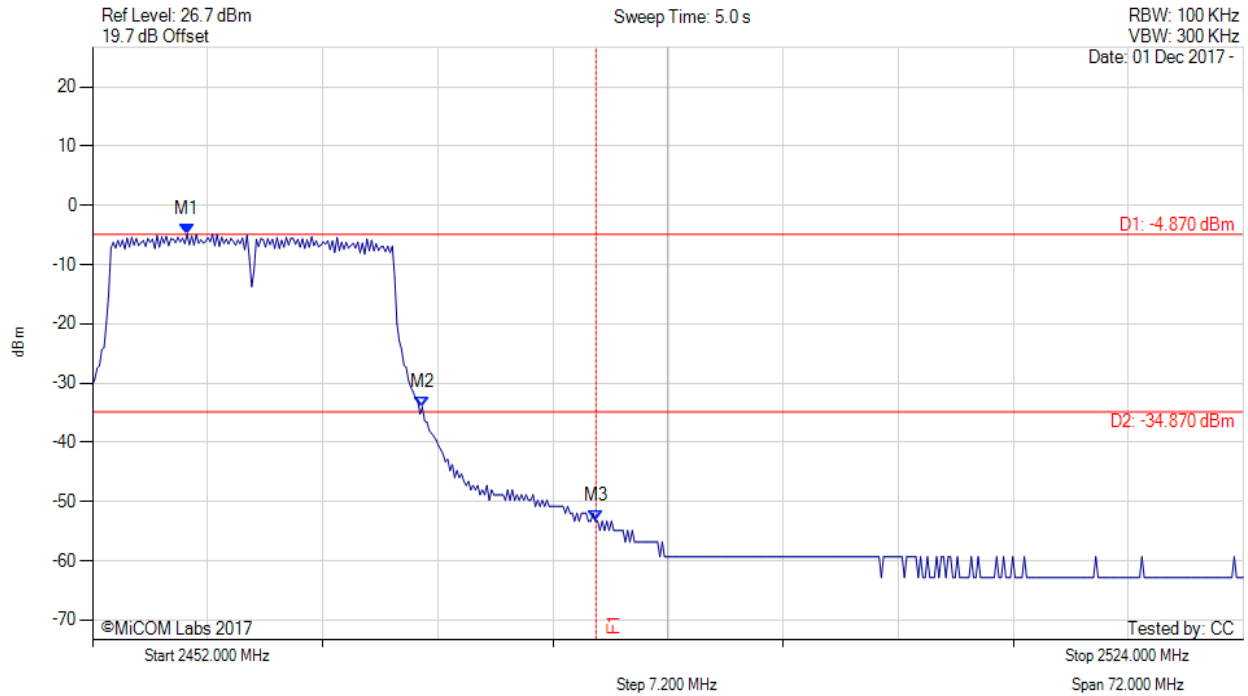

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2457.916 MHz : -4.870 dBm M2 : 2472.633 MHz : -34.058 dBm M3 : 2483.500 MHz : -53.302 dBm	Channel Frequency: 2462.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 173 of 191



CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE

Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

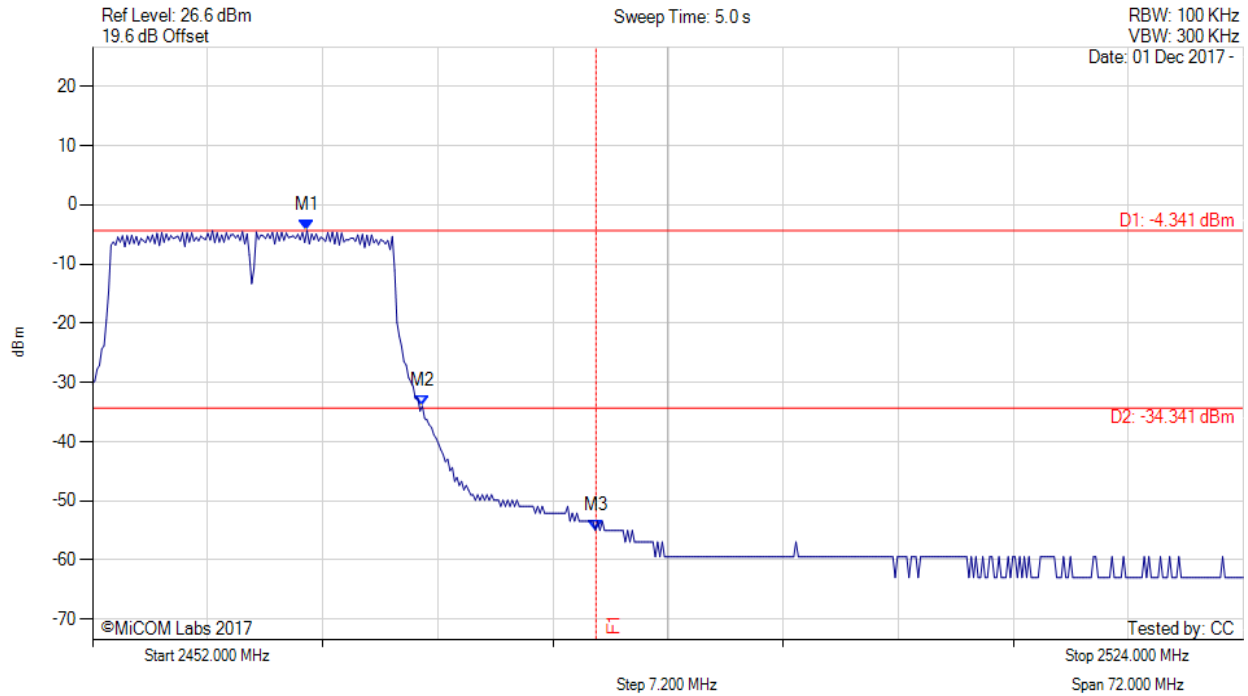

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2465.419 MHz : -4.341 dBm M2 : 2472.633 MHz : -34.002 dBm M3 : 2483.500 MHz : -54.986 dBm	Channel Frequency: 2462.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 174 of 191



CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE

Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain a, Temp: 20, Voltage: 24 Vdc

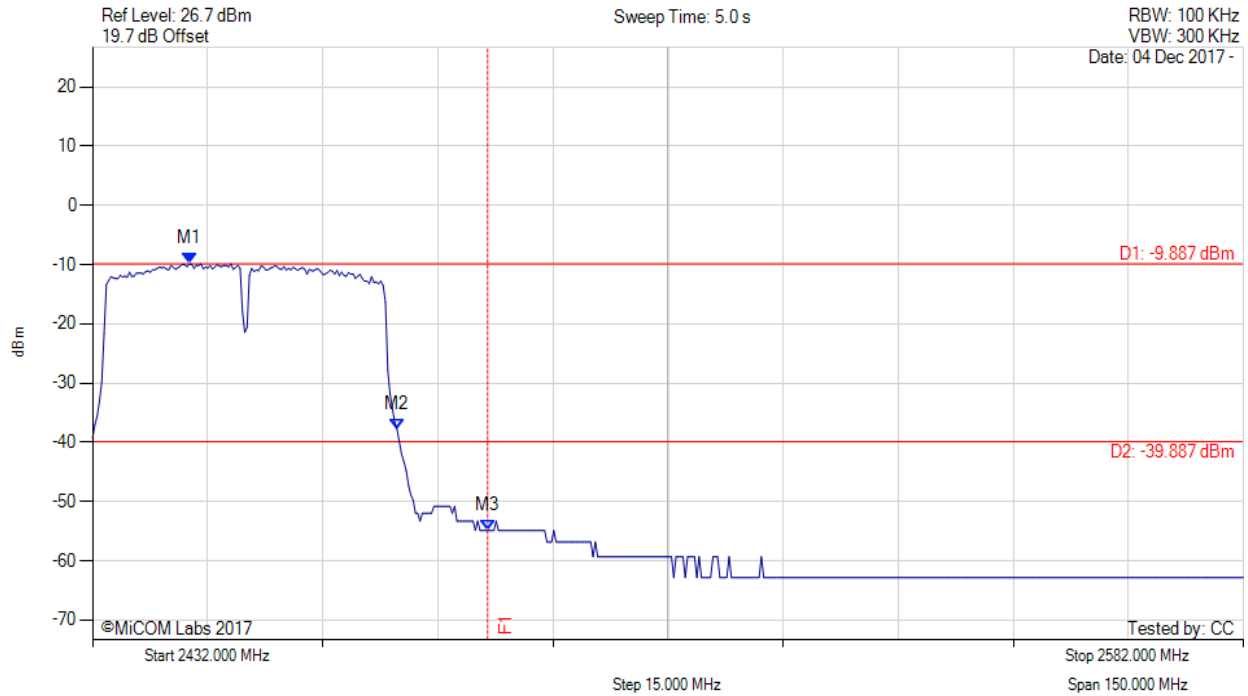

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2444.625 MHz : -9.887 dBm M2 : 2471.679 MHz : -37.739 dBm M3 : 2483.500 MHz : -54.886 dBm	Channel Frequency: 2452.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 175 of 191



CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE

Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain b, Temp: 20, Voltage: 24 Vdc

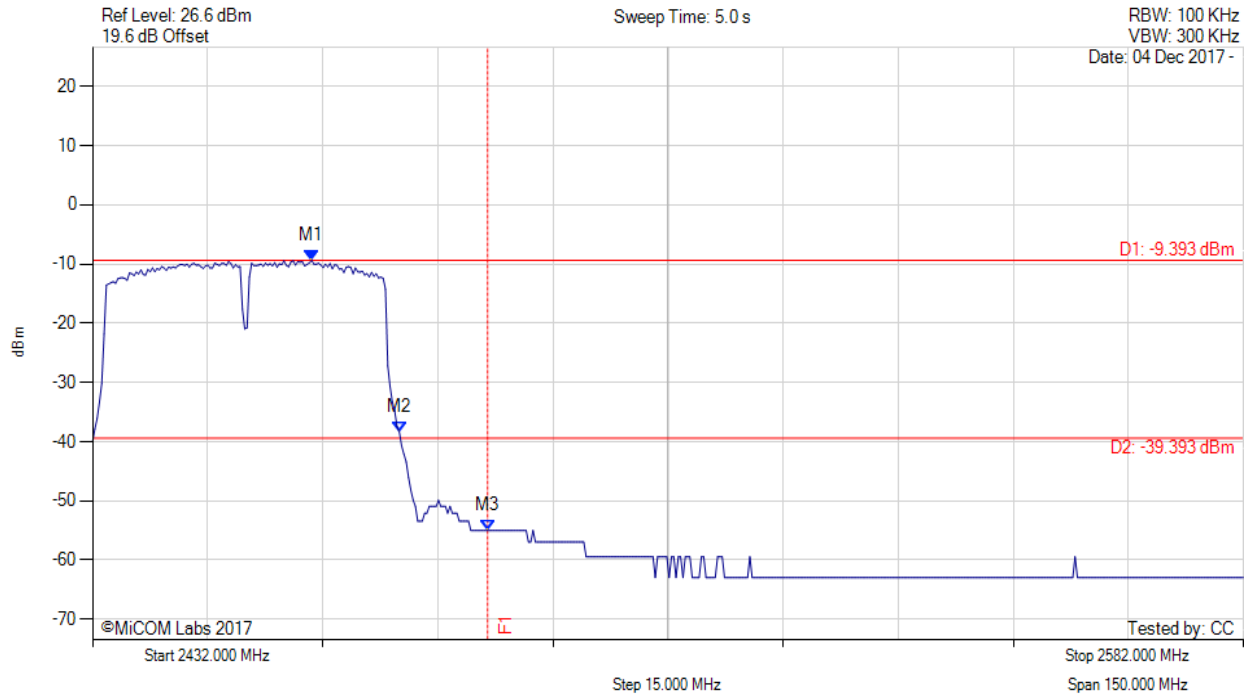

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2460.557 MHz : -9.393 dBm M2 : 2471.980 MHz : -38.336 dBm M3 : 2483.500 MHz : -54.986 dBm	Channel Frequency: 2452.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 176 of 191


A.3.2. Radiated Emissions

A.3.2.2. TX Spurious & Restricted Band Emissions



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11b, Test Freq: 2412.00 MHz, Power Setting: 27, Duty Cycle (%): 99

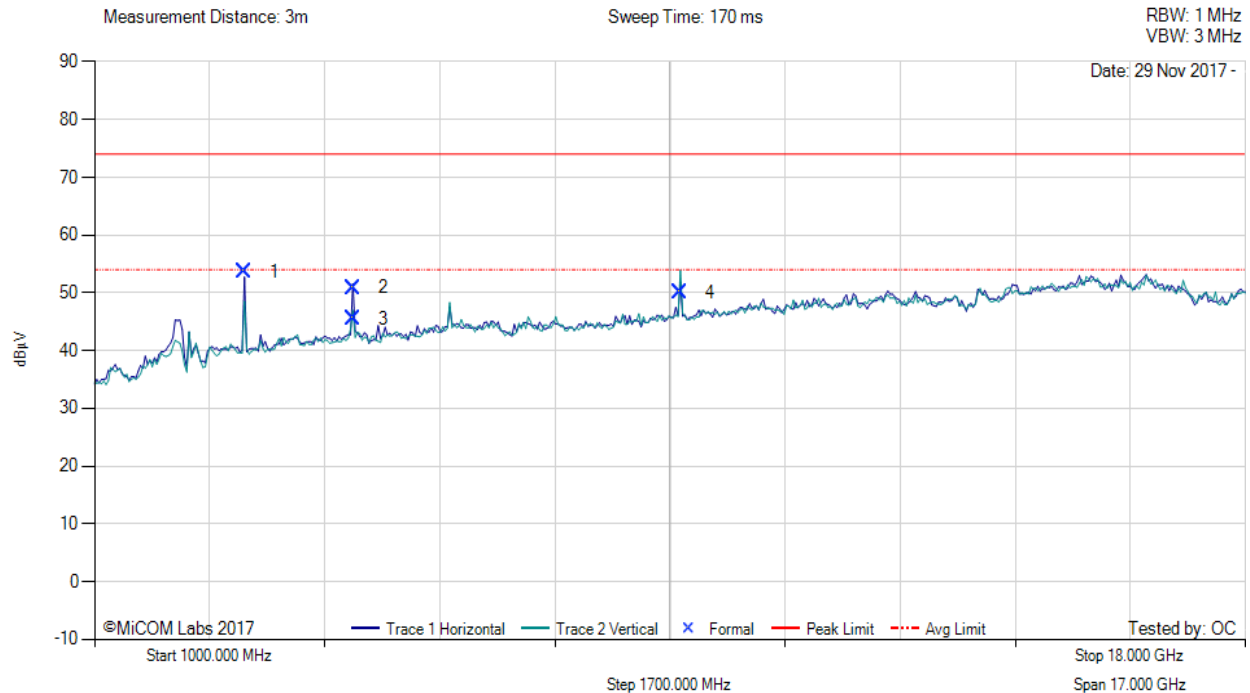

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	3215.94	62.72	2.57	-11.58	53.71	Peak (NRB)	Horizontal	100	0	--	--	Pass
2	4823.98	60.33	2.97	-12.43	50.87	Max Peak	Horizontal	98	141	74.0	-23.1	Pass
3	4823.98	55.01	2.97	-12.43	45.55	Max Avg	Horizontal	98	141	54.0	-8.5	Pass
4	9647.87	51.96	4.23	-6.20	49.99	Peak (NRB)	Vertical	100	158	--	--	Pass

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

NRB- Non Restricted Band emissions.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 177 of 191



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11b, Test Freq: 2437.00 MHz, Power Setting: 27, Duty Cycle (%): 99

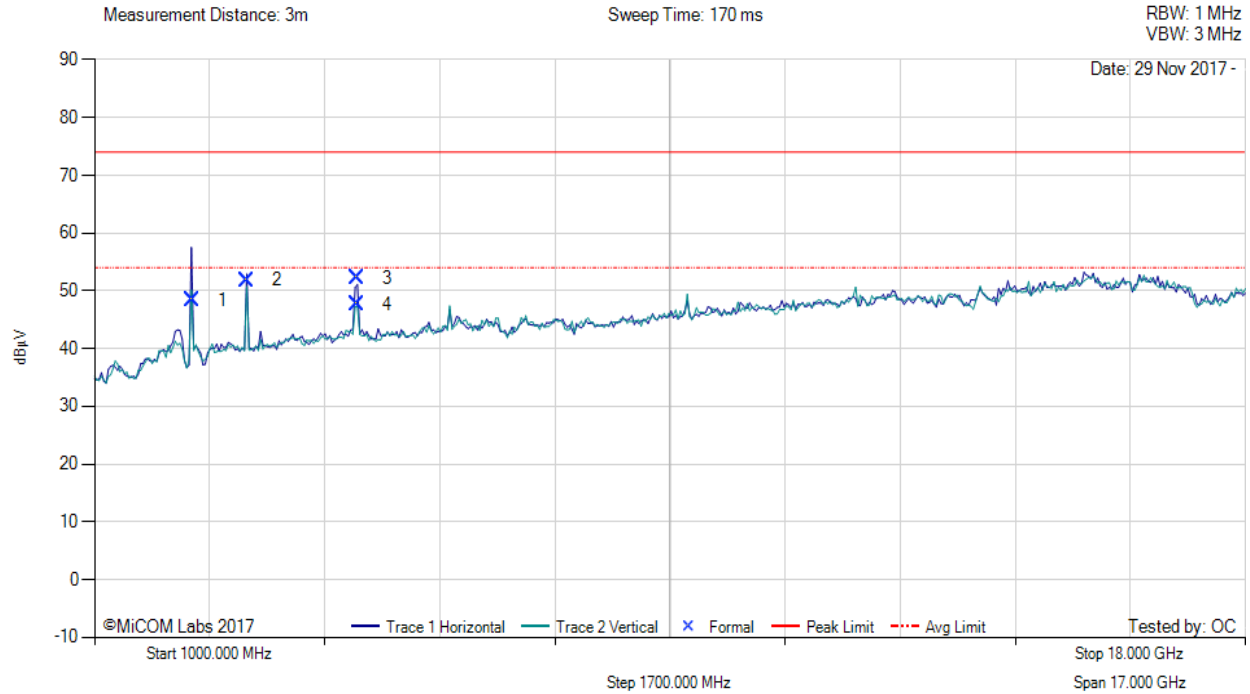

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2438.05	58.28	2.26	-12.10	48.44	Fundamental	Vertical	100	42	--	--	
2	3249.33	60.93	2.55	-11.61	51.87	Peak (NRB)	Horizontal	100	42	--	--	Pass
3	4873.99	61.67	3.07	-12.61	52.13	Max Peak	Horizontal	103	185	74.0	-21.9	Pass
4	4873.99	57.22	3.07	-12.61	47.68	Max Avg	Horizontal	103	185	54.0	-6.3	Pass

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

NRB- Non Restricted Band emissions.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 178 of 191



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11b, Test Freq: 2462.00 MHz, Power Setting: 20, Duty Cycle (%): 99

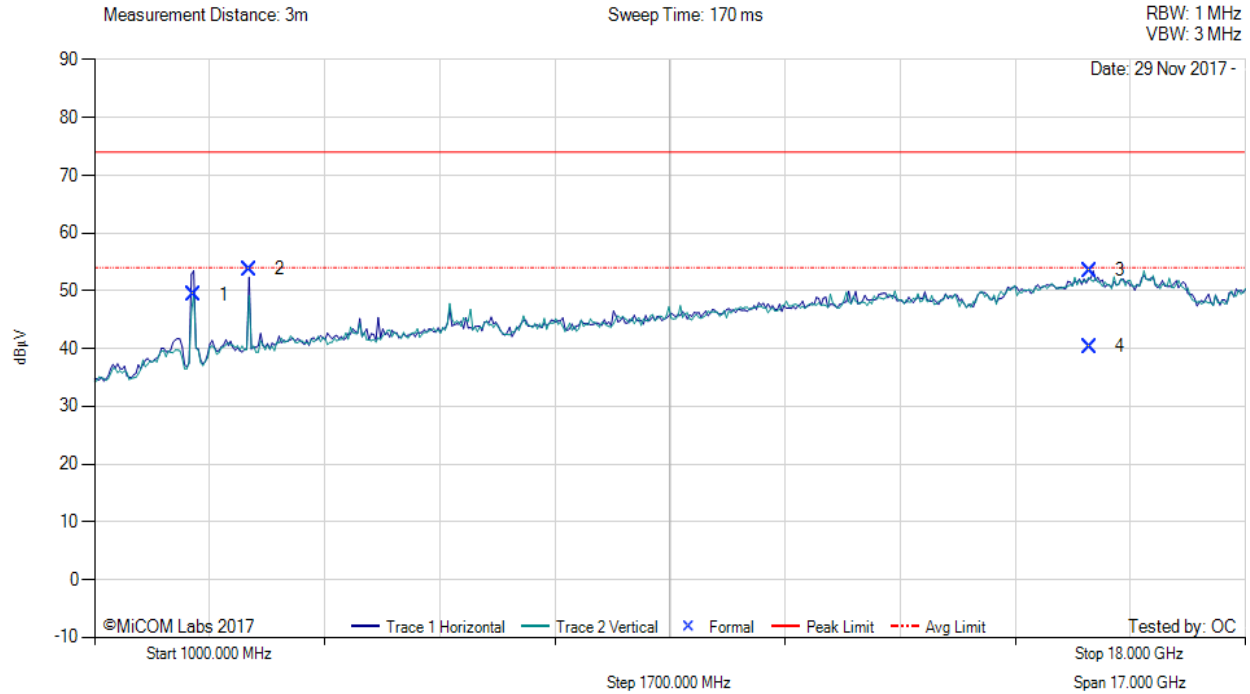

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2463.00	59.06	2.28	-11.96	49.38	Fundamental	Horizontal	100	0	--	--	
2	3282.66	62.94	2.55	-11.69	53.80	Peak (NRB)	Horizontal	100	0	--	--	Pass
3	15698.30	49.68	5.48	-1.67	53.49	Max Peak	Vertical	172	301	74.0	-20.5	Pass
4	15698.30	36.56	5.48	-1.67	40.37	Max Avg	Vertical	172	301	54.0	-13.6	Pass

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

NRB- Non Restricted Band emissions.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 179 of 191


A.3.2.3. Restricted Edge & Band-Edge Emissions

Low Band-Edge Emissions



RADIATED - LOWER RESTRICTED BAND-EDGE EMISSIONS

Variant: 802.11b, Test Freq: 2412.00 MHz, Power Setting: 27, Duty Cycle (%): 99

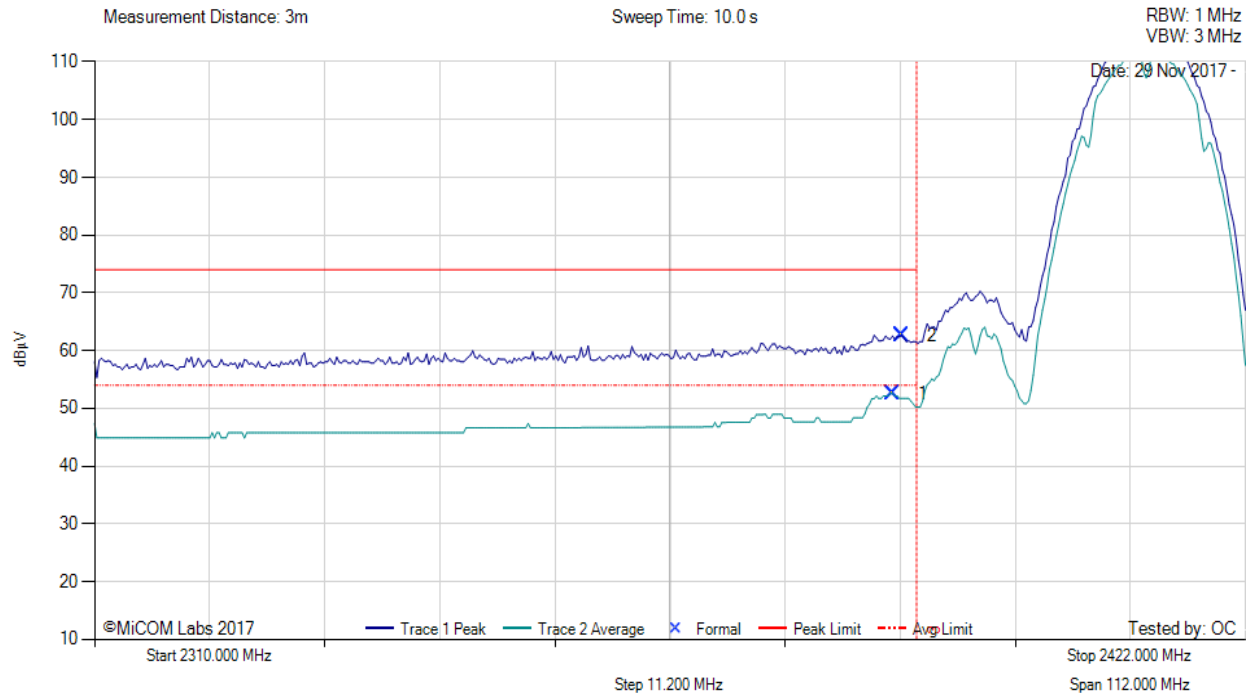

2310.00 - 2422.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2387.66	18.38	2.26	31.95	52.59	Max Avg	Horizontal	151	89	54.0	-1.4	Pass
2	2388.56	28.46	2.26	31.95	62.67	Max Peak	Horizontal	151	89	74.0	-11.3	Pass
3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 180 of 191



RADIATED - LOWER RESTRICTED BAND-EDGE EMISSIONS

Variant: 802.11g, Test Freq: 2412.00 MHz, Power Setting: 22, Duty Cycle (%): 99

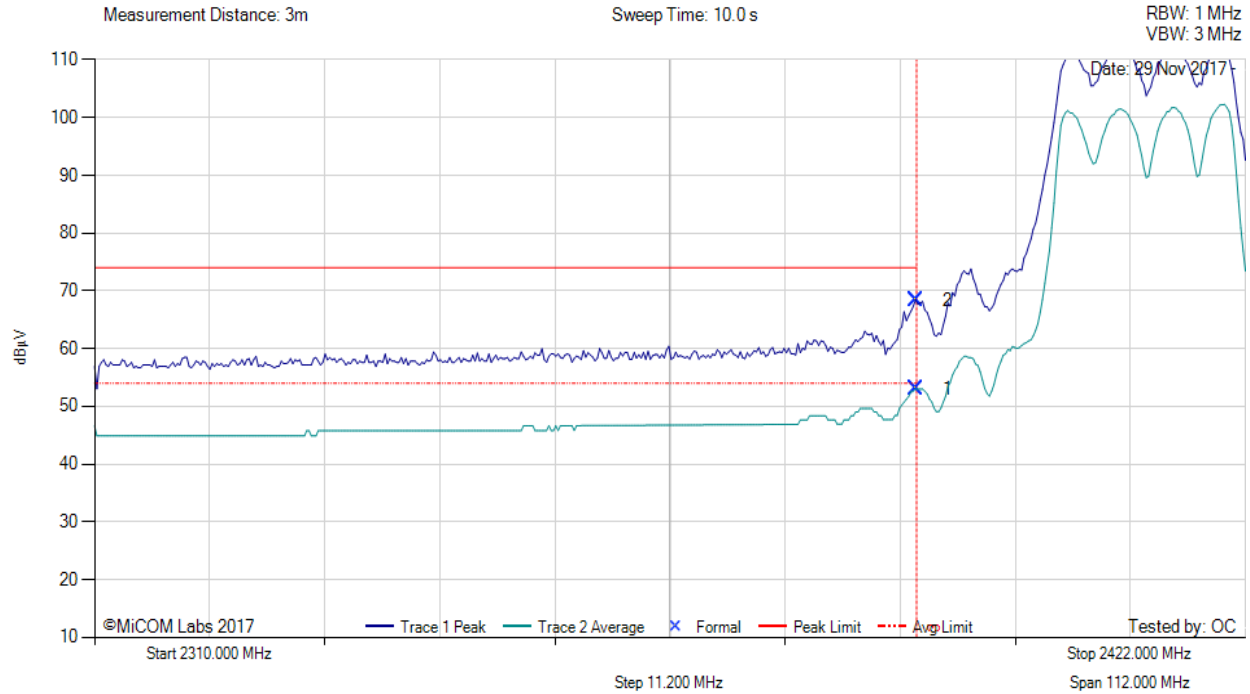

2310.00 - 2422.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2390.00	18.79	2.26	31.96	53.01	Max Avg	Horizontal	151	89	54.0	-1.0	Pass
2	2390.00	34.22	2.26	31.96	68.44	Max Peak	Horizontal	151	89	74.0	-5.6	Pass
3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 181 of 191



RADIATED - LOWER RESTRICTED BAND-EDGE EMISSIONS

Variant: 802.11n HT-20, Test Freq: 2412.00 MHz, Power Setting: 24, Duty Cycle (%): 99

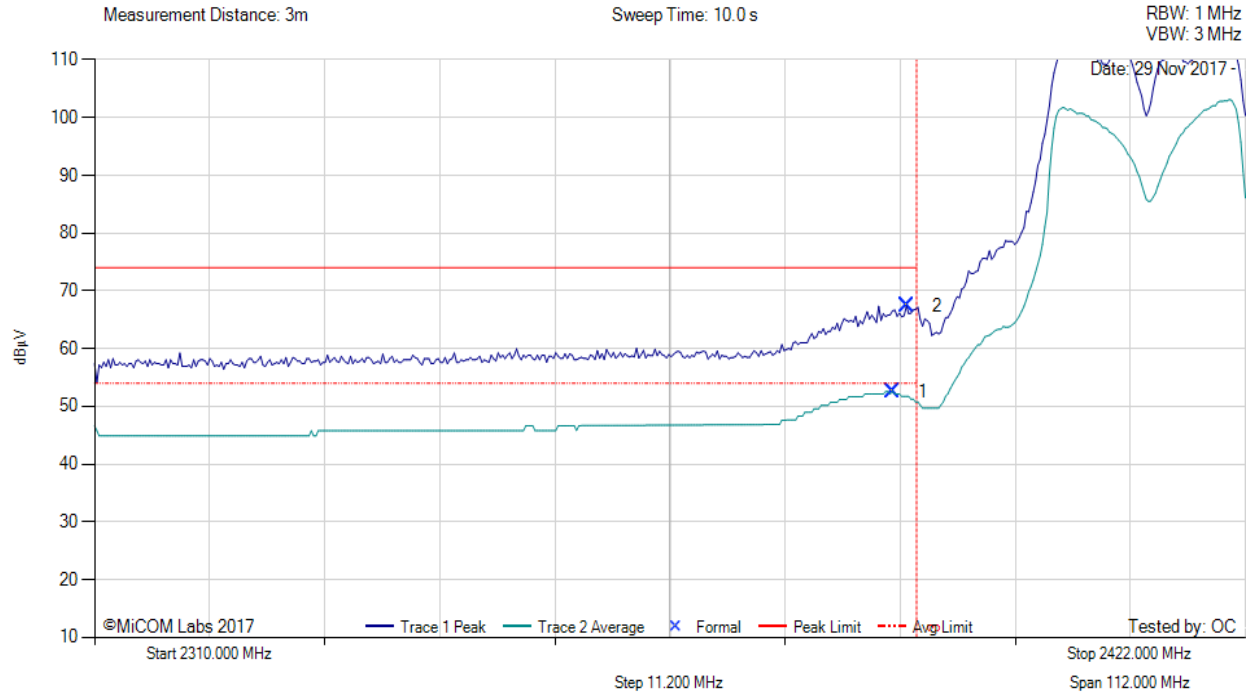

2310.00 - 2422.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2387.66	18.38	2.26	31.95	52.59	Max Avg	Horizontal	151	89	54.0	-1.4	Pass
2	2389.01	33.16	2.26	31.95	67.37	Max Peak	Horizontal	151	89	74.0	-6.6	Pass
3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 182 of 191



RADIATED - LOWER RESTRICTED BAND-EDGE EMISSIONS

Variant: 802.11n HT-40, Test Freq: 2422.00 MHz, Power Setting: 17, Duty Cycle (%): 99

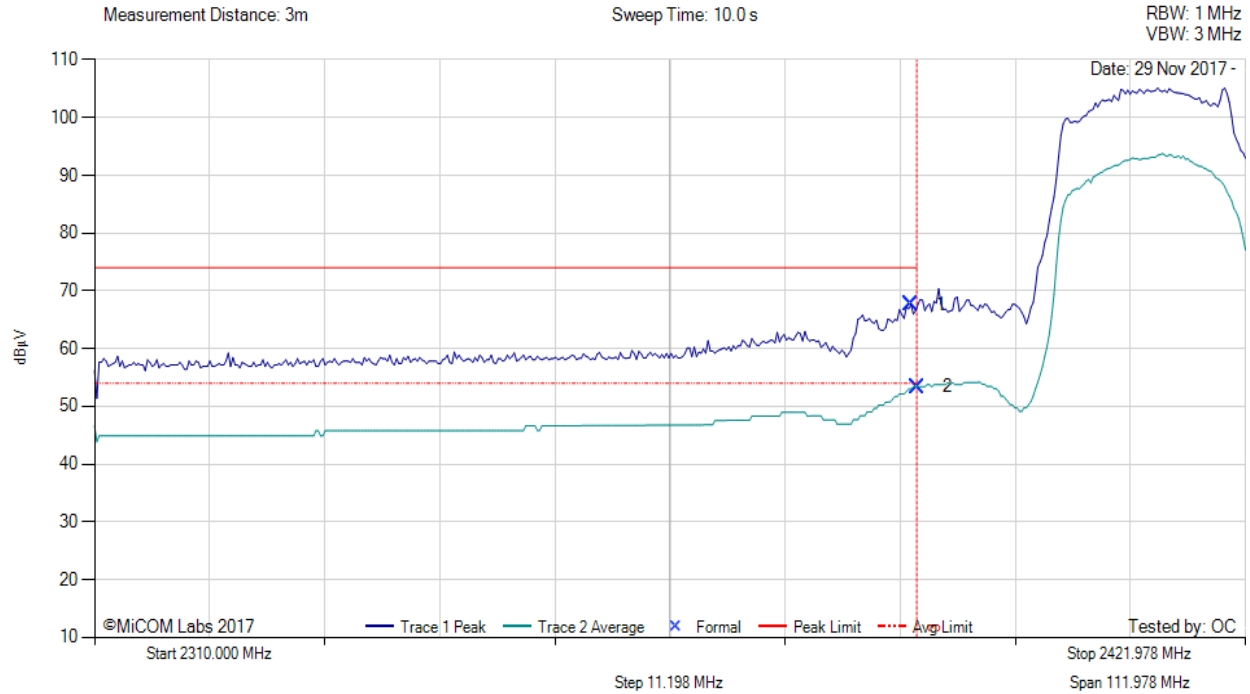

2310.00 - 2421.97760112.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2389.45	33.38	2.26	31.95	67.59	Max Peak	Horizontal	151	89	74.0	-6.4	Pass
2	2390.00	19.17	2.26	31.96	53.39	Max Avg	Horizontal	151	89	54.0	-0.6	Pass
3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 183 of 191

High Band-Edge Emissions



RADIATED - UPPER RESTRICTED BAND-EDGE EMISSIONS

Variant: 802.11b, Test Freq: 2462.00 MHz, Power Setting: 20, Duty Cycle (%): 99

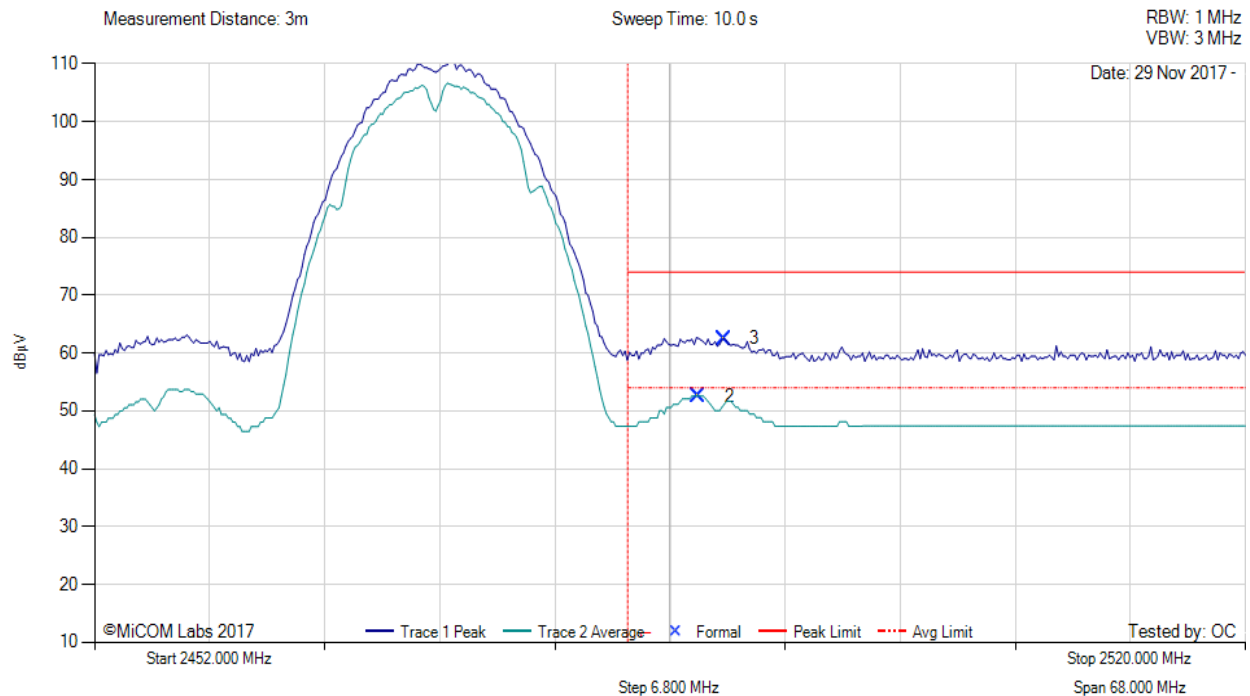

2452.00 - 2520.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
2	2487.70	17.99	2.25	32.33	52.57	Max Avg	Horizontal	151	89	54.0	-1.4	Pass
3	2489.20	27.97	2.25	32.32	62.54	Max Peak	Horizontal	151	89	74.0	-11.5	Pass
1	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--
Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.												

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 184 of 191



RADIATED - UPPER RESTRICTED BAND-EDGE EMISSIONS

Variant: 802.11g, Test Freq: 2462.00 MHz, Power Setting: 23, Duty Cycle (%): 99

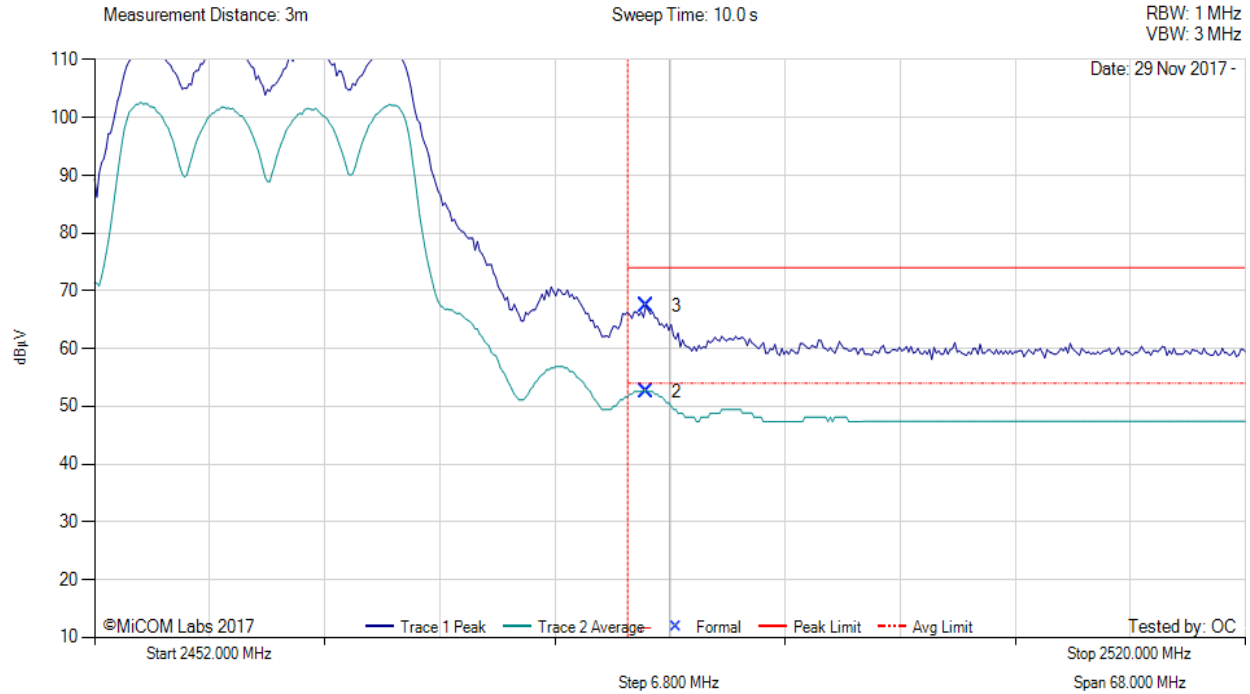

2452.00 - 2520.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
2	2484.57	17.98	2.25	32.33	52.56	Max Avg	Horizontal	151	89	54.0	-1.4	Pass
3	2484.57	32.79	2.25	32.33	67.37	Max Peak	Horizontal	151	89	74.0	-6.6	Pass
1	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 185 of 191



RADIATED - UPPER RESTRICTED BAND-EDGE EMISSIONS

Variant: 802.11n HT-20, Test Freq: 2462.00 MHz, Power Setting: 24, Duty Cycle (%): 99

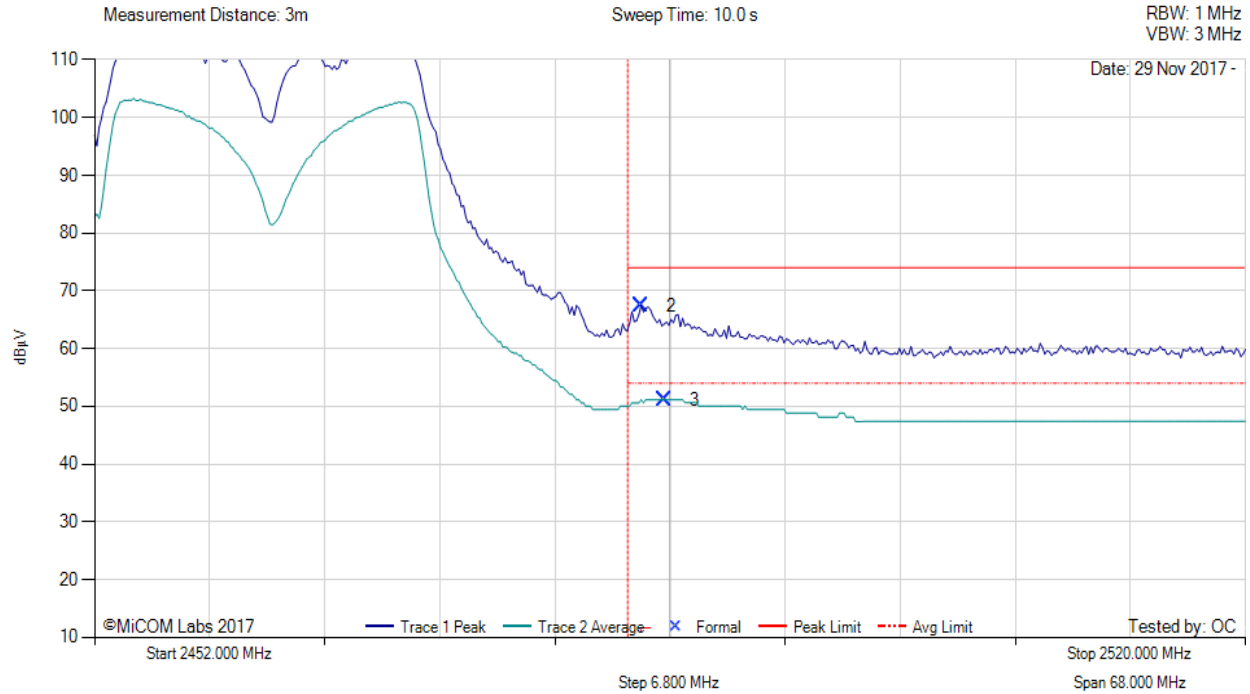

2452.00 - 2520.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
2	2484.30	32.87	2.25	32.33	67.45	Max Peak	Horizontal	151	89	74.0	-6.6	Pass
3	2485.66	16.57	2.25	32.33	51.15	Max Avg	Horizontal	151	89	54.0	-2.9	Pass
1	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table. PS from 25 to 24

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 186 of 191



RADIATED - UPPER RESTRICTED BAND-EDGE EMISSIONS

Variant: 802.11n HT-40, Test Freq: 2452.00 MHz, Power Setting: 22, Duty Cycle (%): 99

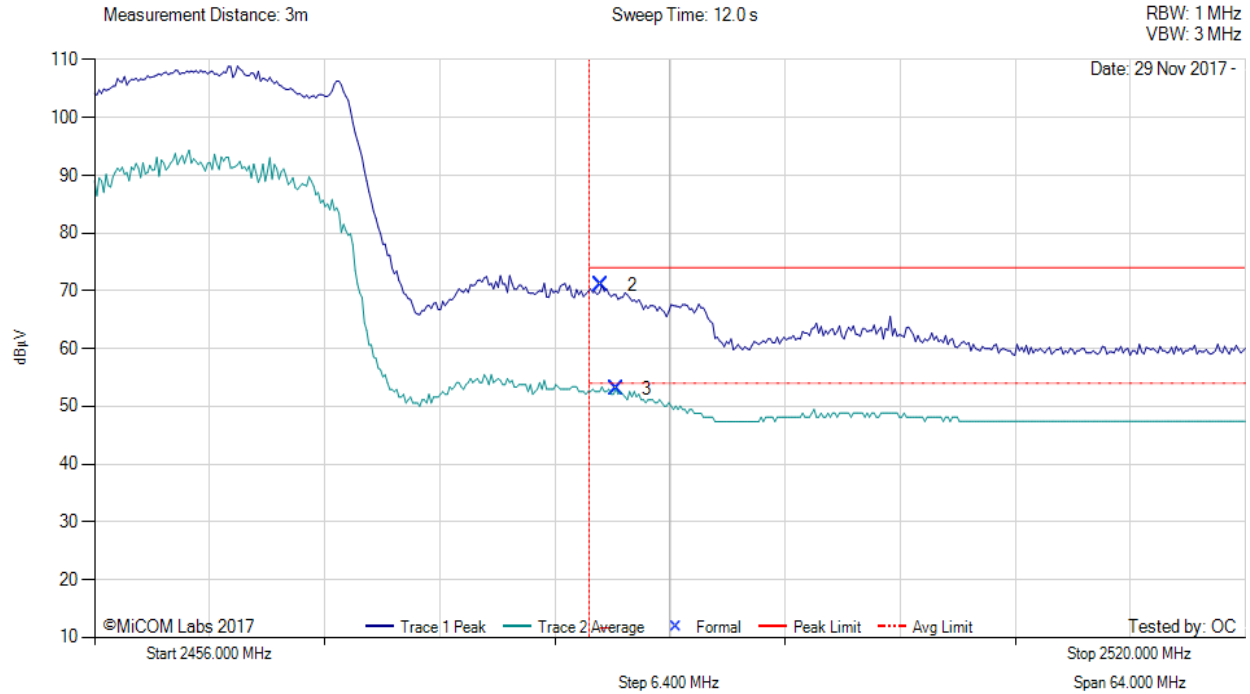

2456.00 - 2520.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
2	2484.18	36.36	2.25	32.33	70.94	Max Peak	Horizontal	151	89	74.0	-3.1	Pass
3	2485.03	18.41	2.25	32.33	52.99	Max Avg	Horizontal	151	89	54.0	-1.0	Pass
1	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: RBD52G-5HacD2HnD-TC. Placed 150cm non-conductive table.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 187 of 191

A.3.3. Digital Emissions (0.03 – 1 GHz)



Variant: Digital Emissions, Test Freq: 30 - 1000 MHz

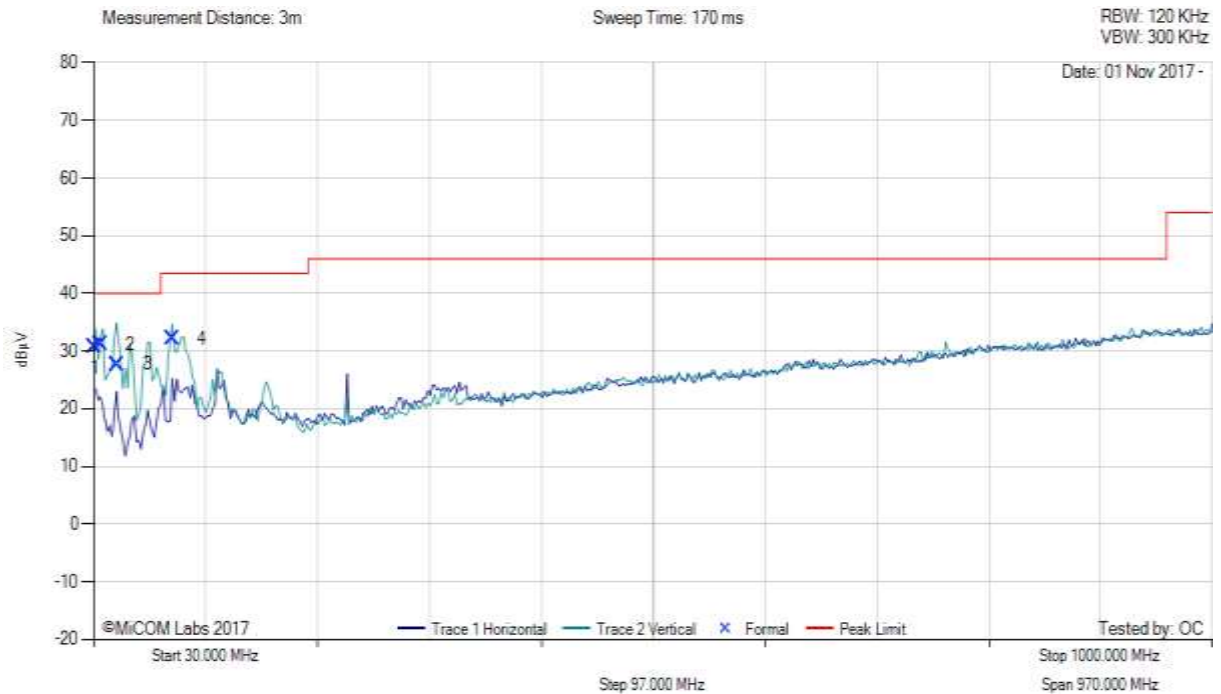

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	30.66	37.63	3.41	-10.38	30.66	MaxQP	Vertical	100	157	40.0	-9.3	Pass
2	36.11	43.24	3.45	-15.57	31.12	MaxQP	Vertical	100	356	40.0	-8.9	Pass
3	50.51	47.10	3.55	-22.95	27.70	MaxQP	Vertical	100	71	40.0	-12.3	Pass
4	98.09	49.54	3.82	-21.18	32.18	MaxQP	Vertical	100	88	43.5	-11.3	Pass

Test Notes: Model: RBD52G-5HacD2HnD-TC. AC/DC + PoE configuration. Placed 80cm non-conductive table.

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 188 of 191



Variant: Digital Emissions, Test Freq: 30 - 1000 MHz

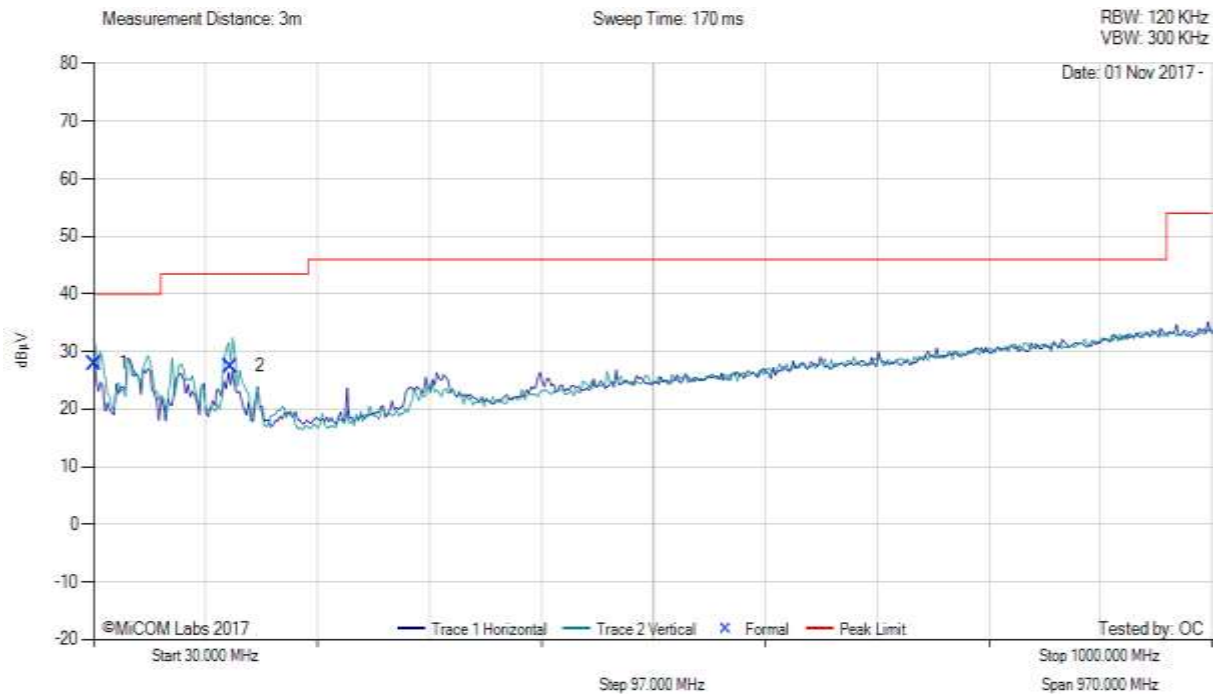

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	30.66	34.93	3.41	-10.38	27.96	MaxQP	Vertical	98	117	40.0	-12.0	Pass
2	148.16	42.18	4.04	-18.76	27.46	MaxQP	Vertical	99	242	43.5	-16.0	Pass

Test Notes: Model: RBD52G-5HacD2HnD-TC. AC/DC configuration. Placed 80cm non-conductive table.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 189 of 191

A.3.4. AC Wireline Emissions



Variant: AC Wireline, Test Freq: 0.15 - 30 MHz

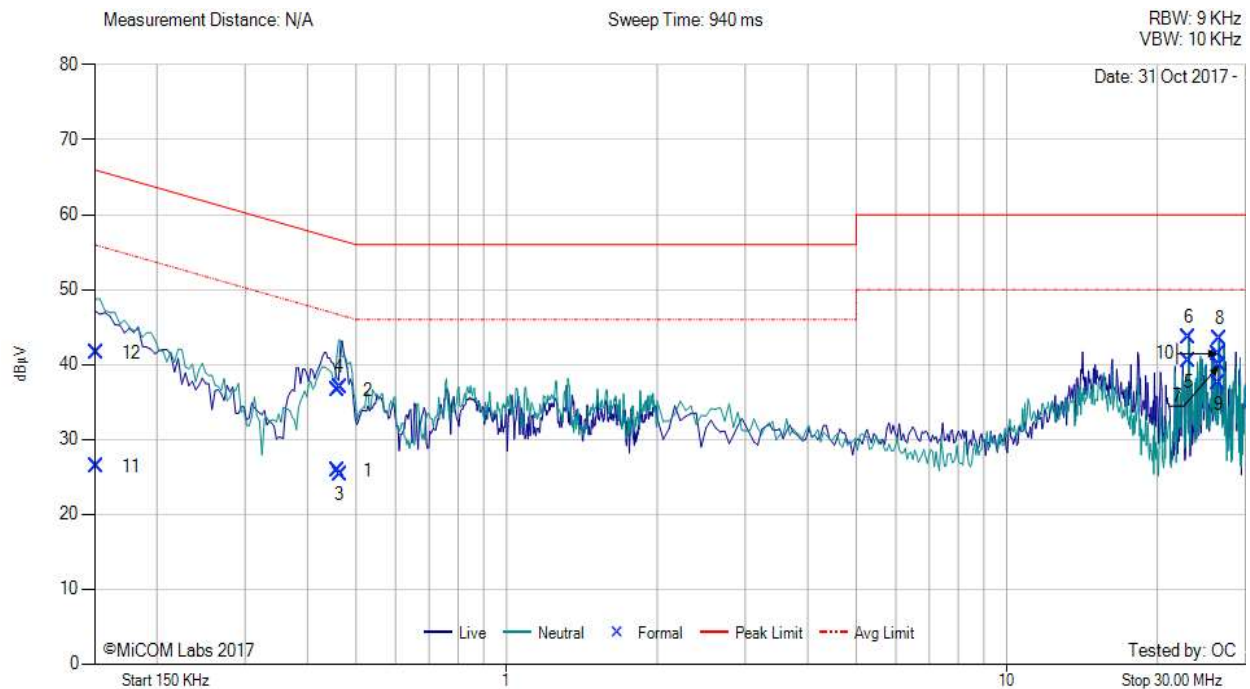

Num	Frequency MHz	Raw dBµV	Cable Loss dB	Factor dB	Total Correction dBµV	Corrected Value dBµV	Measurement Type	Line	Limit dBµV	Margin dB	Pass /Fail
1	0.460	15.82	0.07	9.93	10.00	25.82	Max Avg	Live	47.1	-21.3	Pass
2	0.460	26.61	0.07	9.93	10.00	36.61	Max Qp	Live	57.1	-20.5	Pass
3	0.464	15.38	0.07	9.93	10.00	25.38	Max Avg	Neutral	47.0	-21.7	Pass
4	0.464	26.88	0.07	9.93	10.00	36.88	Max Qp	Neutral	57.0	-20.2	Pass
5	23.129	28.97	0.64	10.85	11.49	40.46	Max Avg	Neutral	50.0	-9.5	Pass
6	23.129	32.15	0.64	10.85	11.49	43.64	Max Qp	Neutral	60.0	-16.4	Pass
7	26.610	28.29	0.73	10.88	11.61	39.90	Max Avg	Live	50.0	-10.1	Pass
8	26.610	31.82	0.73	10.88	11.61	43.43	Max Qp	Live	60.0	-16.6	Pass
9	26.488	25.86	0.72	10.88	11.60	37.46	Max Avg	Neutral	50.0	-12.5	Pass
10	26.488	29.85	0.72	10.88	11.60	41.45	Max Qp	Neutral	60.0	-18.6	Pass
11	0.151	16.43	0.05	9.92	9.97	26.40	Max Avg	Neutral	56.0	-29.6	Pass
12	0.151	31.64	0.05	9.92	9.97	41.61	Max Qp	Neutral	66.0	-24.4	Pass

Test Notes: Model hAP ac2. AC/DC + PoE configuration. 120V 60Hz. AC Mains.

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: MikroTik RBD52G-5HacD2HnD-TC
To: FCC Subpart C 15.247 (DTS), IC RSS-247
Serial #: MIKO65-U3 Rev A
Issue Date: 22nd December 2017
Page: 190 of 191



Variant: AC Wireline, Test Freq: 0.15 - 30 MHz

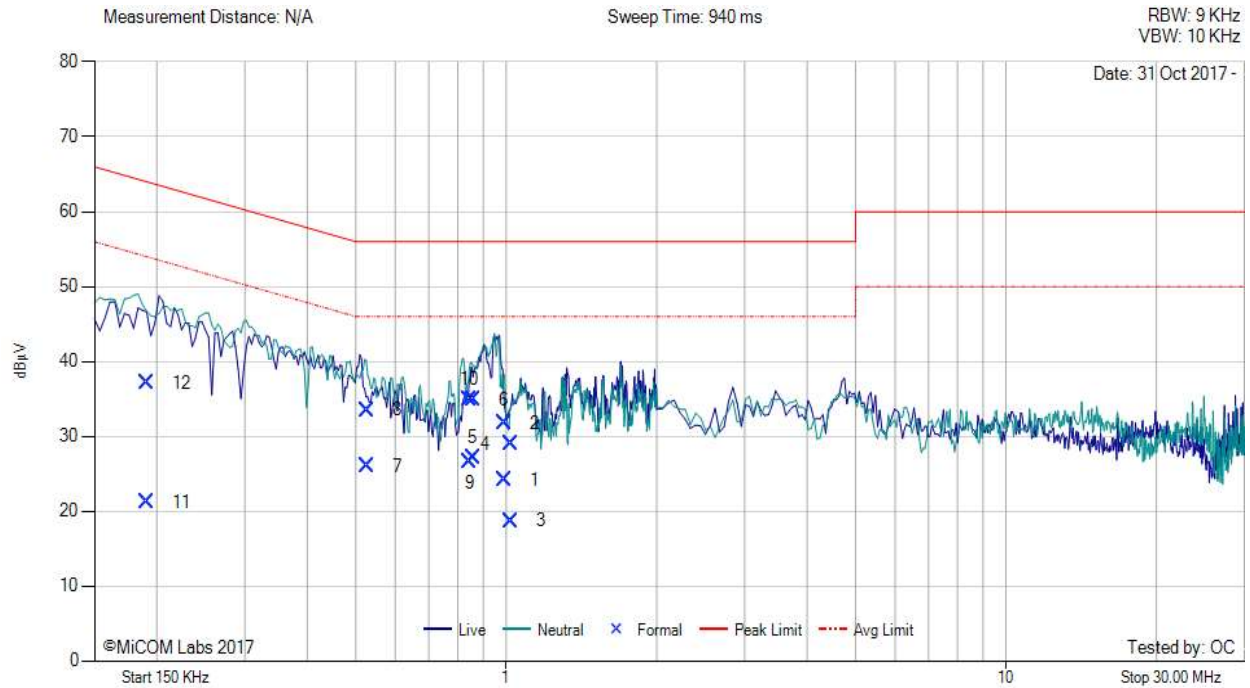

Num	Frequency MHz	Raw dBμV	Cable Loss dB	Factor dB	Total Correction dBμV	Corrected Value dBμV	Measurement Type	Line	Limit dBμV	Margin dB	Pass /Fail
1	0.990	14.22	0.07	9.93	10.00	24.22	Max Avg	Neutral	46.0	-21.8	Pass
2	0.990	21.72	0.07	9.93	10.00	31.72	Max Qp	Neutral	56.0	-24.3	Pass
3	1.024	8.67	0.07	9.94	10.01	18.68	Max Avg	Live	46.0	-27.3	Pass
4	1.024	18.99	0.07	9.94	10.01	29.00	Max Qp	Live	56.0	-27.0	Pass
5	0.858	17.03	0.10	9.94	10.04	27.07	Max Avg	Neutral	46.0	-18.9	Pass
6	0.858	24.85	0.10	9.94	10.04	34.89	Max Qp	Neutral	56.0	-21.1	Pass
7	0.526	16.05	0.09	9.92	10.01	26.06	Max Avg	Live	46.0	-19.9	Pass
8	0.526	23.47	0.09	9.92	10.01	33.48	Max Qp	Live	56.0	-22.5	Pass
9	0.844	16.51	0.10	9.94	10.04	26.55	Max Avg	Live	46.0	-19.5	Pass
10	0.844	24.89	0.10	9.94	10.04	34.93	Max Qp	Live	56.0	-21.1	Pass
11	0.191	11.20	0.06	9.92	9.98	21.18	Max Avg	Live	54.8	-33.7	Pass
12	0.191	27.08	0.06	9.92	9.98	37.06	Max Qp	Live	64.8	-27.8	Pass

Test Notes: Model hAP ac2. AC/DC configuration. 120V 60Hz. AC Mains.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



575 Boulder Court
Pleasanton, California 94566, USA
Tel: +1 (925) 462 0304
Fax: +1 (925) 462 0306
www.micomlabs.com