

FCC Test Report

FCC ID : TVE-371BB072

Equipment : Secured Wireless Access Point

Brand Name : FORTINET

Model Name : FortiAP U231Fxxxxxx, FAP-U231Fxxxxxx,
FORTIAP-U231Fxxxxxx (Where "x" can be used as
"A-Z", or "0-9", or "-", or blank for software changes
or marketing purposes only)

Applicant : Fortinet, Inc.
899 Kifer Road, Sunnyvale, CA 94086, USA

Manufacturer : Universal Global Scientific Industrial Co., Ltd
141, Lane 351, Sec. 1, Taiping Road, Tsao-tuen,
Nantou 54261, Taiwan

Standard : 47 CFR FCC Part 15.247

The product was received on Jul. 08, 2020, and testing was started from Aug. 04, 2020 and completed on Sep. 14, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Allen Lin

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

Table of Contents

HISTORY OF THIS TEST REPORT	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Information.....	5
1.2 Testing Applied Standards	8
1.3 Testing Location Information	8
1.4 Measurement Uncertainty	9
2 TEST CONFIGURATION OF EUT.....	10
2.1 Test Condition	10
2.2 Test Channel Mode	10
2.3 The Worst Case Measurement Configuration.....	11
2.4 Support Equipment.....	12
2.5 Test Setup Diagram	13
3 TRANSMITTER TEST RESULT	14
3.1 AC Power-line Conducted Emissions	14
3.2 DTS Bandwidth.....	16
3.3 Maximum Conducted Output Power	17
3.4 Power Spectral Density	19
3.5 Emissions in Non-restricted Frequency Bands	20
3.6 Emissions in Restricted Frequency Bands.....	21
4 TEST EQUIPMENT AND CALIBRATION DATA	25
APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS	
APPENDIX B. TEST RESULTS OF DTS BANDWIDTH	
APPENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER	
APPENDIX D. TEST RESULTS OF POWER SPECTRAL DENSITY	
APPENDIX E. TEST RESULTS OF EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	
APPENDIX F. TEST RESULTS OF EMISSIONS IN RESTRICTED FREQUENCY BANDS	
APPENDIX G. TEST PHOTOS	
PHOTOGRAPHS OF EUT V01	



TEL : 886-3-3273456
FAX : 886-3-3270973
Report Template No.: HE1-C10 Ver3.9
FCC ID: TVE-371BB072

Summary of Test Result

Report Clause	Ref.Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and explanations:

None

Reviewed by: Sam Tsai

Report Producer: Debby Hung

1 General Description

1.1 Information

The EUT has Four radio chip.

Function	Radio 1	Radio 2	Radio 3	Radio 4
WiFi 2.4G	V	X	V	X
WiFi 5G	V	V	V	X
Bluetooth / Zigbee	X	X	X	V

1.1.1 RF General Information

Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number
2400-2483.5	LE	2402-2480	0-39 [40]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	BT-LE(1Mbps)	1.0	1TX
2.4-2.4835GHz	BT-LE(2Mbps)	2.0	1TX

Note:

- ♦ Bluetooth LE uses a GFSK (1Mbps/2Mbps) modulation.
- ♦ BWch is the nominal channel bandwidth.

1.1.2 Antenna Information

Ant.	Radio	Brand	Model Name	Antenna Type	Connector
1	1	ARISTOTLE	-	PIFA Antenna	IPEX
2		ARISTOTLE	-	PIFA Antenna	IPEX
3	2	ARISTOTLE	-	PIFA Antenna	IPEX
4		ARISTOTLE	-	PIFA Antenna	IPEX
5	3	ARISTOTLE	-	PIFA Antenna	IPEX
6		ARISTOTLE	-	PIFA Antenna	IPEX
7	4	ARISTOTLE	-	PIFA Antenna	IPEX

Ant.	Gain (dBi)							
	Radio 1		Radio 2		Radio 3		Radio 4	
	2.4G	5G	5G	5G	2.4G	5G	BT	Zigbee
1	3.89	4.53	-	-	-	-	-	-
2	3.86	5.07	-	-	-	-	-	-
3	-	-	5.89	-	-	-	-	-
4	-	-	-	5.07	-	-	-	-
5	-	-	-	-	3.78	5.26	-	-
6	-	-	-	-	3.97	5.44	-	-
7	-	-	-	-	-	-	3.69	3.69

Ant.	BF Gain (dBi)
	Radio 1 & 2 & 3
-	3.01

Directional gain = $G_{ANT\ MAX} + 10 \log(N_{ANT}/N_{SS})$ dBi, where N_{SS} = the number of independent spatial streams of data and $G_{ANT\ MAX}$ is the gain of the antenna having the highest gain (in dBi).

For 2.4GHz function:

For IEEE 802.11 b/g/n/ac/ax mode

Ant. 1, Ant.2, Ant.5 and Ant.6 could transmit/receive simultaneously.(2TX/2RX)

For 5GHz function:

For IEEE 802.11 a/n/ac/ax mode

Ant. 1, Ant.2, Ant.3, Ant.4, Ant.5 and Ant.6 could transmit/receive simultaneously.(2TX/2RX)

For Bluetooth function:

For IEEE 802.15.1 Bluetooth mode

Ant. 7 could transmit/receive. (1TX/1RX)

For Zigbee function:

For IEEE 802.15.3 Zigbee mode

Ant. 7 could transmit/receive. (1TX/1RX)

1.1.3 EUT Information

Operational Condition			
EUT Power Type	From AC Adapter		
EUT Function	☒ Point-to-multipoint	☐ Point-to-point	
Type of EUT			
☒	Stand-alone		
☐	Combined (EUT where the radio part is fully integrated within another device)		
	Combined Equipment - Brand Name / Model No.:		...
☐	Plug-in radio (EUT intended for a variety of host systems)		
	Host System - Brand Name / Model No.:		...
☐	Other:		

1.1.4 Table for Multiple Listing

Model Name	Description
FortiAP U231Fxxxxxx, FAP-U231Fxxxxxx, FORTIAP-U231Fxxxxxx (Where "x" can be used as "A-Z", or "0-9", or "-", or blank for software changes or marketing purposes only)	The difference of models is in sales marketing.

Note: The information from manufacturer.

1.1.5 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
BT-LE(1Mbps)	1	0	10m	10
BT-LE(2Mbps)	1	0	10m	10

Note. If $DC < 0.98$, the DCF was added while measuring Output power and PSD.

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF:

- ◆ KDB 558074 D01 v05r02
- ◆ KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location			
☒	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)	
		TEL : 886-3-327-3456	FAX : 886-3-327-0973
Test site Designation No. TW1190 with FCC.			
☐	JHUBEI	ADD : No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County, Taiwan (R.O.C.)	
		TEL : 886-3-656-9065	FAX : 886-3-656-9085
Test site Designation No. TW0006 with FCC.			
☐	Wen Shan	ADD : No.14-1, Ln. 19, Wen 33rd St., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)	
		TEL : 886-3-318-0787	FAX : 886-3-318-0287
Test site Designation No. TW1097 with FCC.			

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Edward	23.5~25.8°C / 58~60%	17/Aug/2020
RF Conducted	TH06-HY	Alan	20.1~26.9°C / 50~60%	04/Aug/2020~10/Sep/2020
Radiated	03CH03-HY	Edward	24.5~26.1°C / 54~68%	04/Aug/2020~14/Sep/2020

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	0.9 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.0 dB	Confidence levels of 95%
Temperature	0.41 °C	Confidence levels of 95%
Humidity	3.4 %	Confidence levels of 95%

2 Test Configuration of EUT

2.1 Test Condition

RF Conducted	Abbreviation	Remark
TnomVnom	Tnom	20°C
-	Vnom	120V

2.2 Test Channel Mode

Test Software Version	MTool3.1.0.1
-----------------------	--------------

Mode	Power Setting
BT-LE(1Mbps)	-
2402MHz	81
2440MHz	81
2480MHz	81
BT-LE(2Mbps)	-
2402MHz	81
2440MHz	81
2480MHz	81

2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	CTX
1	Adapter mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests			
Tests Item	Emissions in Restricted Frequency Bands		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
Operating Mode < 1GHz	CTX		
1	Adapter mode		
Operating Mode > 1GHz	CTX		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT			V

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis
Operating Mode	CTX
1	Bluetooth+WLAN 2.4GHz+WLAN 5GHz+Zigbee
Refer to Sporton Test Report No.: FA040829-01 for Co-location RF Exposure Evaluation.	



2.4 Support Equipment

Support Equipment – Conducted					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	Notebook	DELL	E5410	-	-
2	Adapter for NB	DELL	HA65NM130	-	-
3	AC adapter	APD	WA-30J12R	-	Customer provided

Support Equipment –conducted emissions					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	AC adapter	APD	WA-30J12R	-	Customer provided

Support Equipment – Radiated emissions					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	AC adapter	APD	WA-30J12R	-	Customer provided

2.5 Test Setup Diagram

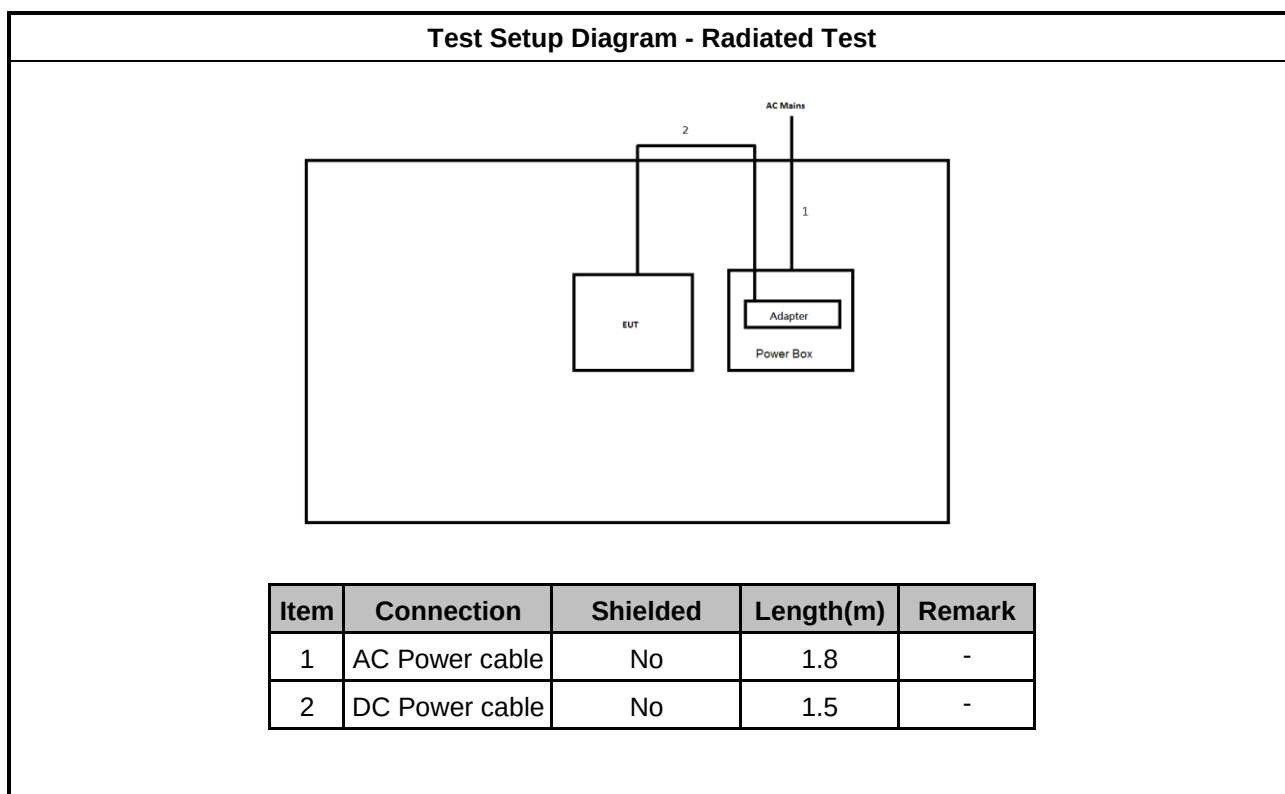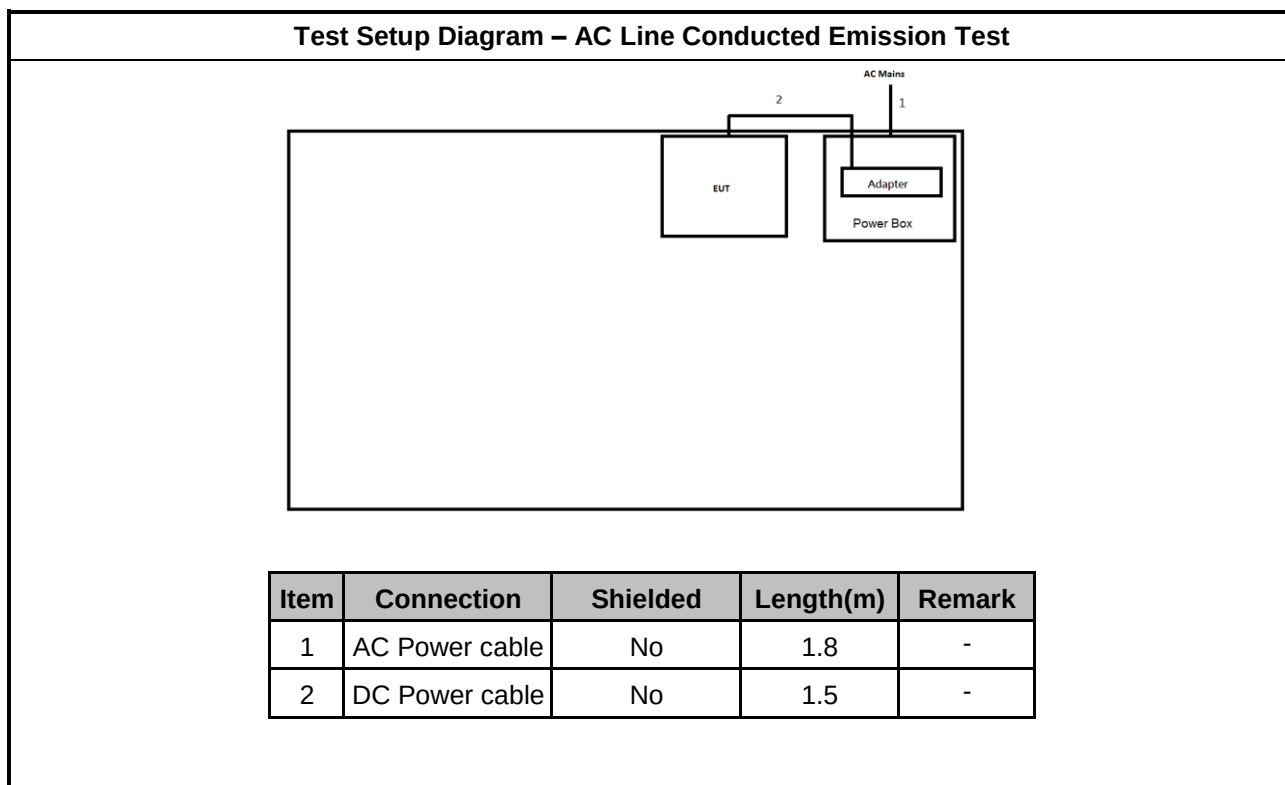

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		

3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures


Test Method
▪ Refer as ANSI C63.10-2013, clause 6.2 foray power-line conducted emissions.

3.1.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + LISN(LISN Factor) + CL(Cable Loss) + AT(Attenuator).

3.1.5 Test Setup

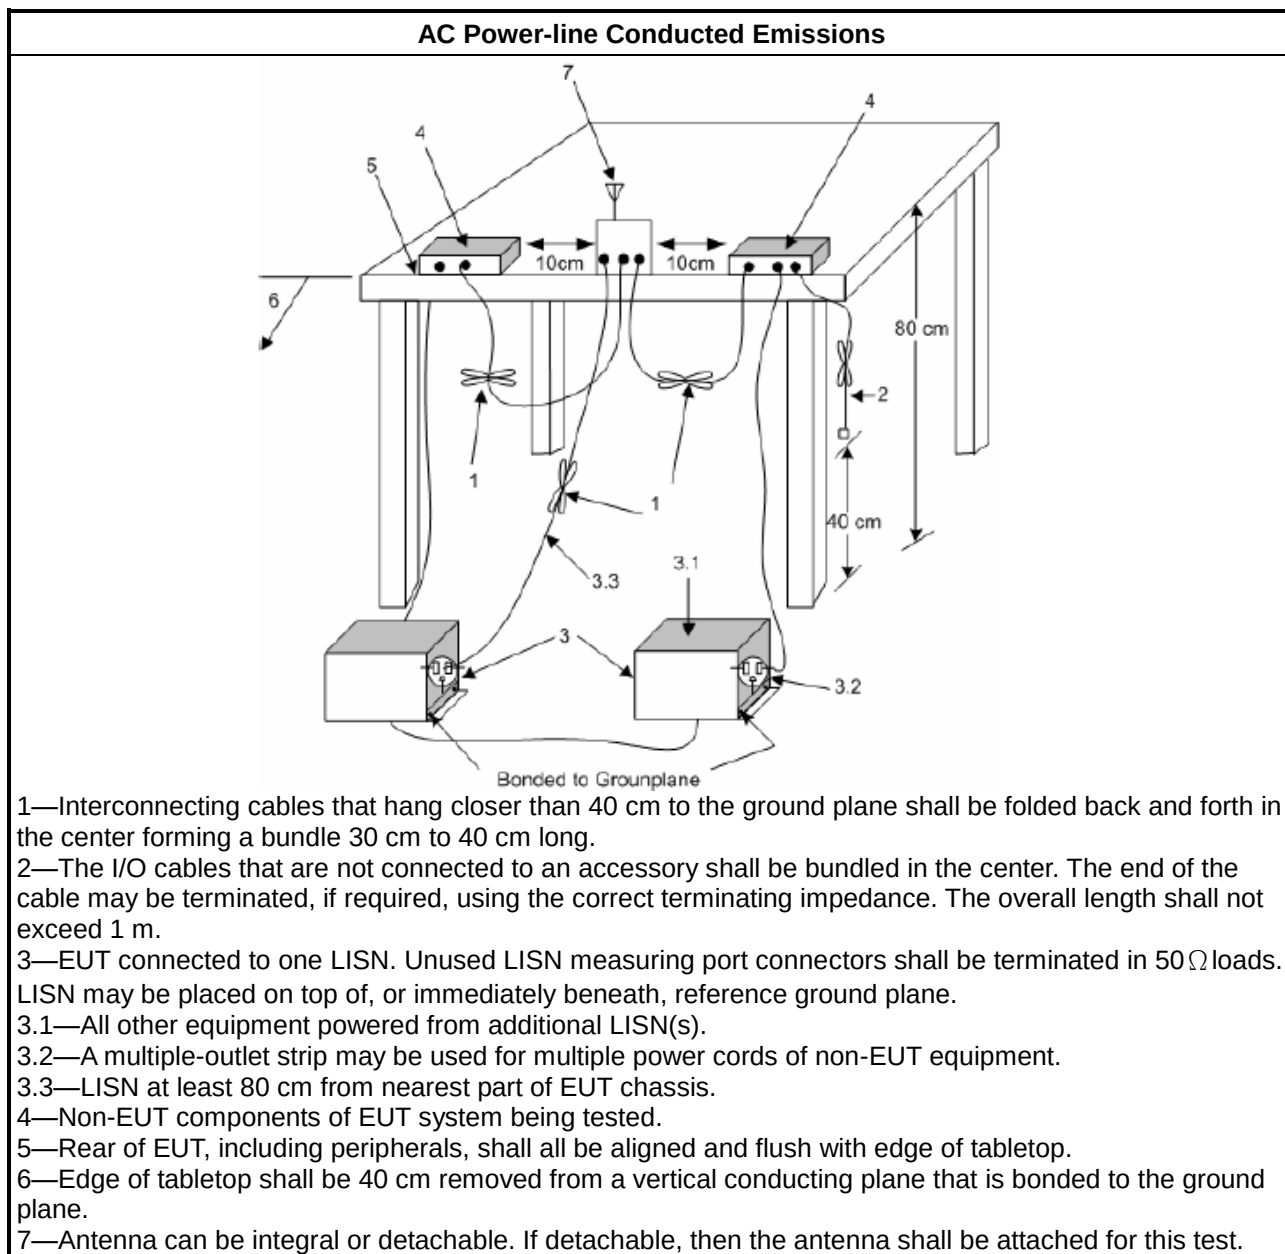

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit	
Systems using digital modulation techniques:	
▪	6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
▪ For the emission bandwidth shall be measured using one of the options below:	
☒	Refer as KDB 558074, clause 8.2 (11.8 of ANSI C63.10) DTS bandwidth measurement.
☐	Refer as RSS-Gen, clause 6.7 for occupied bandwidth testing.
☐	Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.

3.2.4 Test Setup

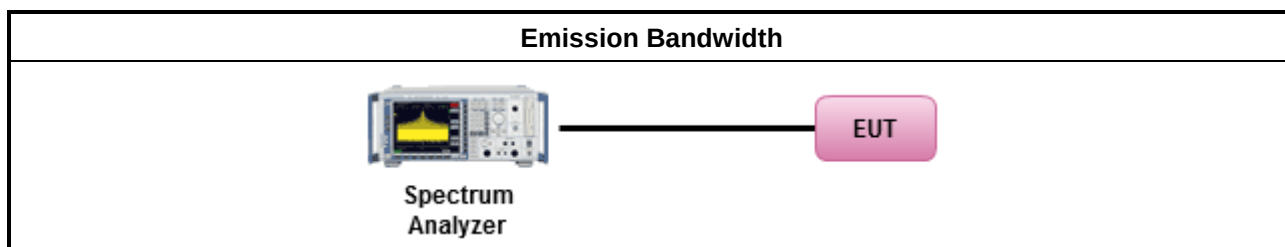

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	Smart antenna system (SAS):
	- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
e.i.r.p. Power Limit:	
	2400-2483.5 MHz Band
	Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)
	Point-to-point systems (P2P): $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])$ dBm
	Smart antenna system (SAS)
	- Single beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	- Overlap beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	- Aggregate power on all beams: $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])$ dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Maximum Peak Conducted Output Power	
☐	Refer as KDB 558074, clause 8.3.1.1 (11.9.1.1 of ANSI C63.10) RBW ≥ EBW method.
☐	Refer as KDB 558074, clause 8.3.1.2 (11.9.1.2 of ANSI C63.10) integrated band power method.
☐	Refer as KDB 558074, clause 8.3.1.3 (11.9.1.3 of ANSI C63.10) peak power meter.
Maximum Average Conducted Output Power	
☐	Refer as KDB 558074, clause 8.3.2.2 (11.9.2.2 of ANSI C63.10) using a spectrum analyzer.
☒	Refer as KDB 558074, clause 8.3.2.3 (11.9.2.3 of ANSI C63.10) using a power meter.
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	

3.3.4 Test Setup

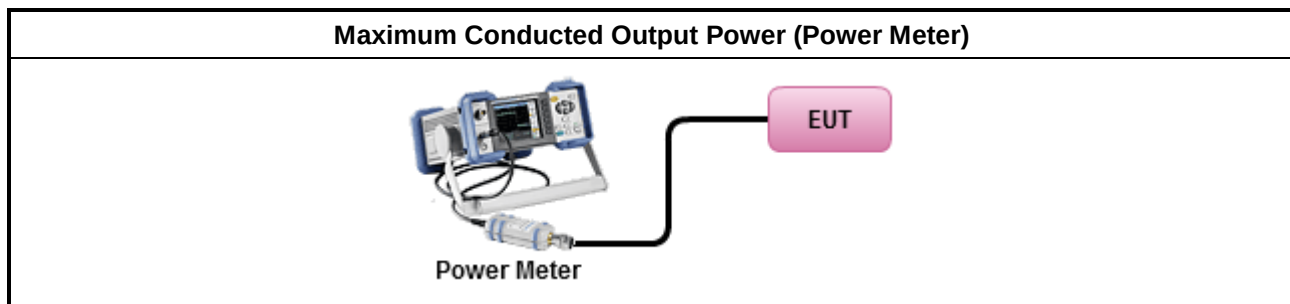

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit	
▪	Power Spectral Density (PSD) ≤ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
▪	Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
☒	Refer as KDB 558074, clause 8.4 (11.10 of ANSI C63.10) Max. PSD.
▪	For conducted measurement.
▪	If The EUT supports multiple transmit chains using options given below:
▪	Measure and sum the spectra across the outputs. Refer as KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.

3.4.4 Test Setup

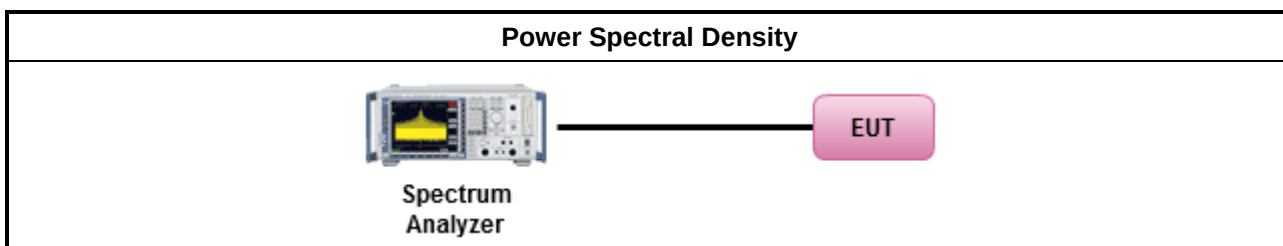

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30
Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak level. Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average level.	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
Refer as KDB 558074, clause 8.5 (11.11 of ANSI C63.10) for non-restricted frequency bands.

3.5.4 Test Setup

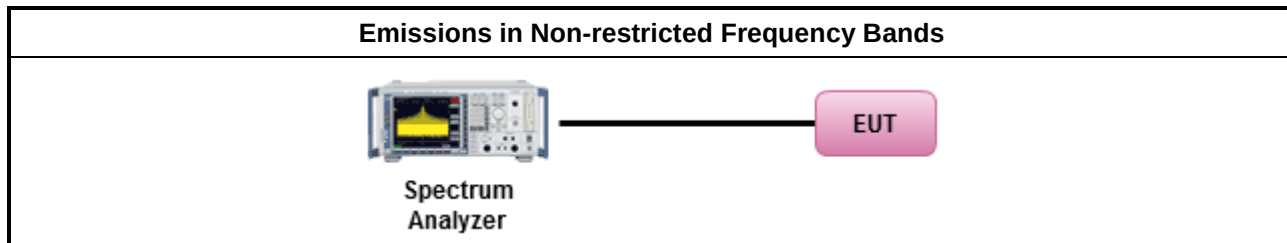

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures


Test Method	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as KDB 558074, clause 8.6 (11.12 of ANSI C63.10) for restricted frequency bands.
For the transmitter band-edge emissions shall be measured using following options below:	
	Refer as KDB 558074 clause 8.7.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	Refer as KDB 558074, clause 8.7.2 (6.10.6 of ANSI C63.10) for marker-delta method for band-edge measurements.
	Refer as KDB 558074, clause 8.7.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels.
Use the following spectrum analyzer settings:	
	Set RBW=100 kHz for $f < 1$ GHz; VBW=3 * RBW; Sweep = auto; Detector function = peak; Trace = max hold.
	Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. For average measurement, refer as 1.1.4.
KDB 414788 Open-Field Test Sites and Chamber Correlation Justification.	
	Based on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in regulations; however, an attempt should be made to avoid making measurements in the near field.
	Open-field site and chamber correlation testing had been performed and chamber measured test result is the worst case test result.


3.6.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + AF(Antenna Factor) + CL(Cable Loss) - PA(Preamplifier Factor)

3.6.5 Test Setup

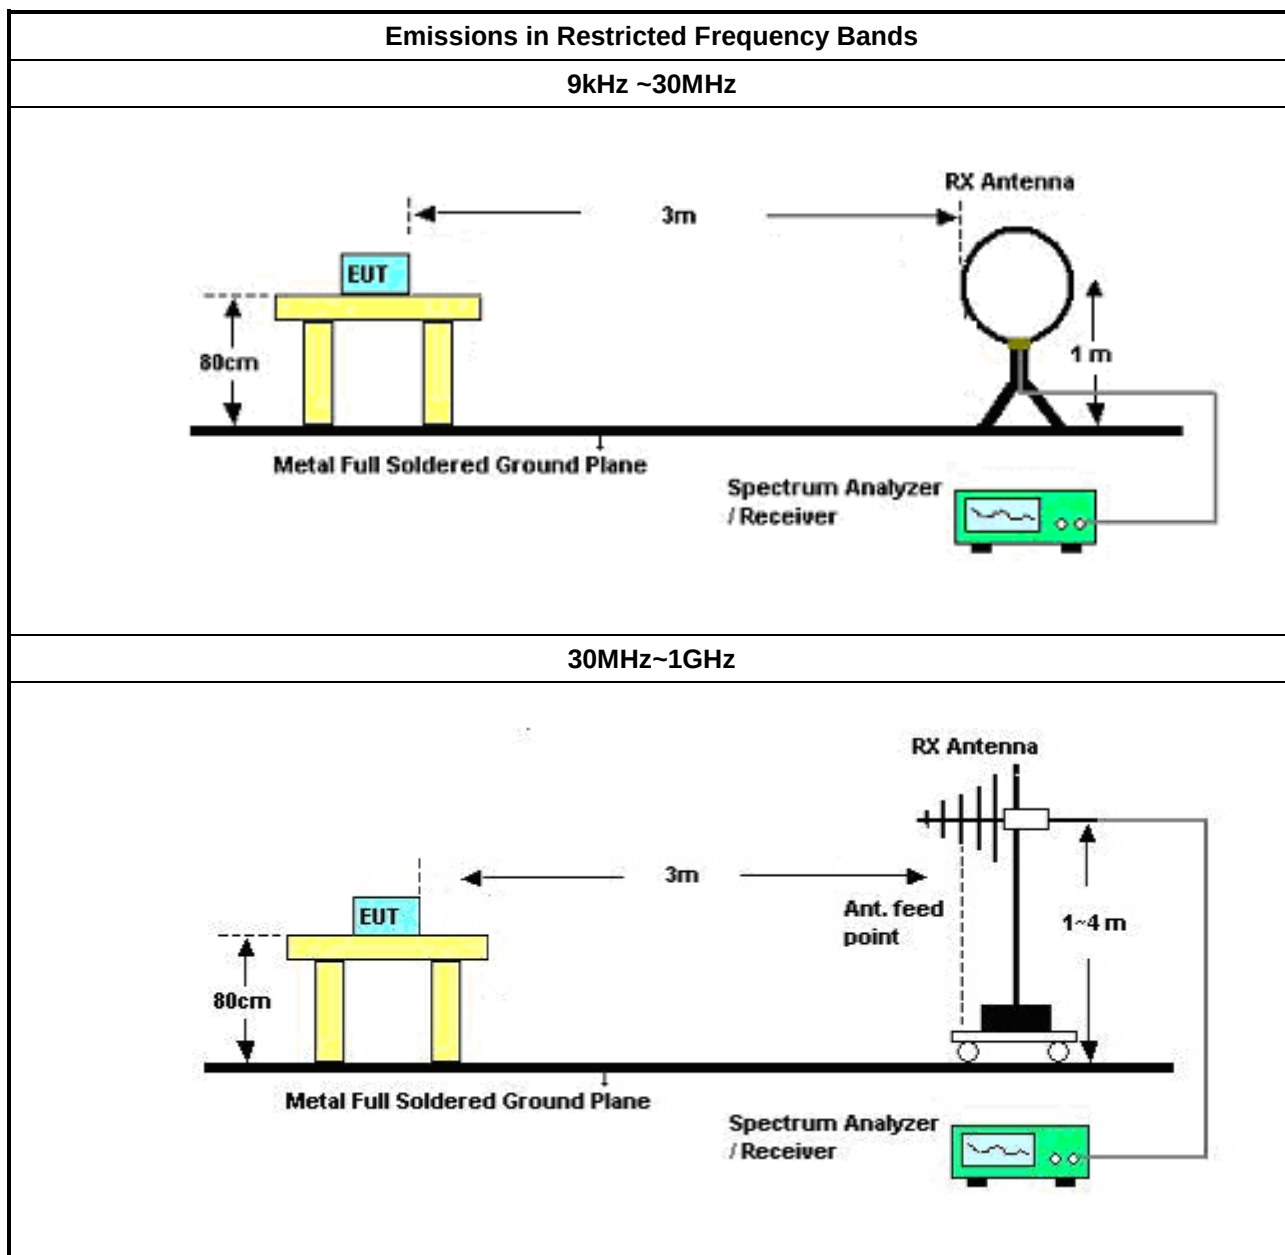

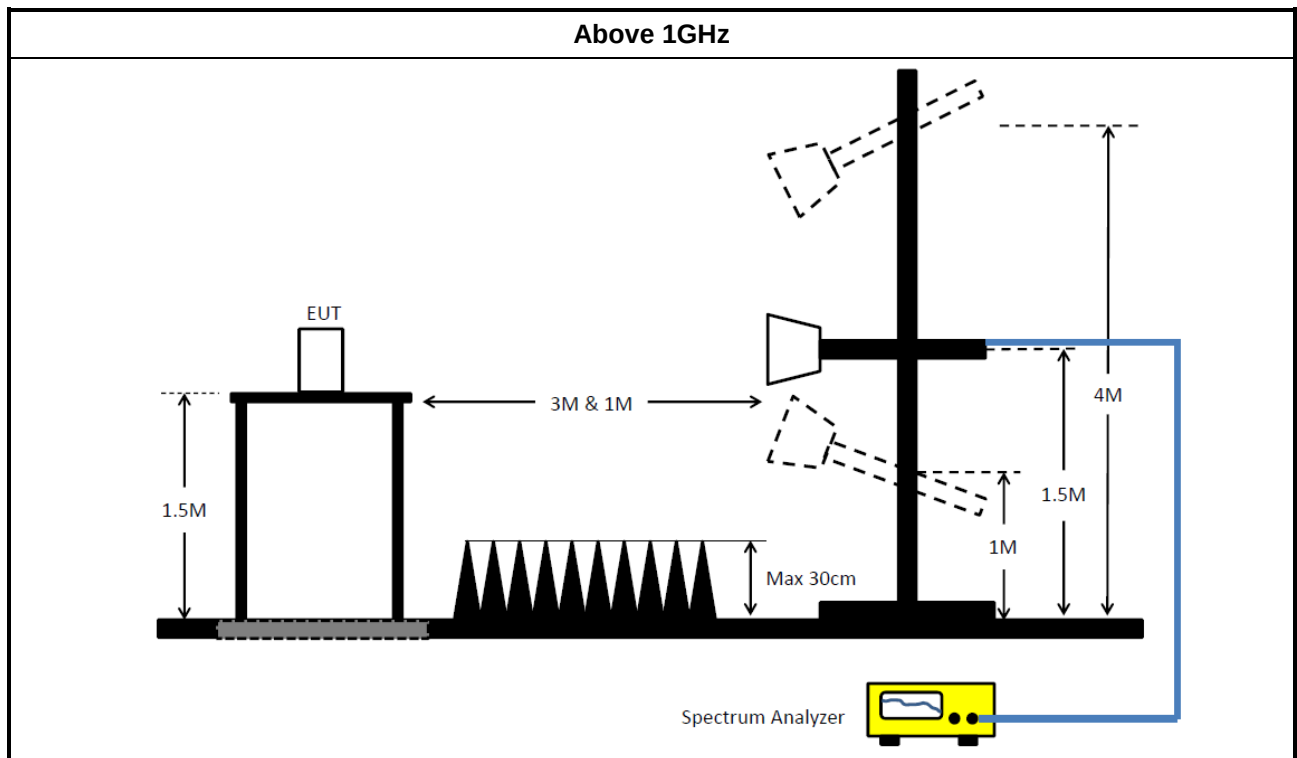

3.6.6 Test Result of Emissions in Restricted Frequency Bands (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F

4 Test Equipment and Calibration Data

Instrument for AC Conduction

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR3	102051	9kHz ~ 3.6GHz	29/May/2020	28/May/2021
LISN	R&S	ENV216	101295	9kHz ~ 30MHz	05/Nov/2019	04/Nov/2020
RF Cable-CON	MTJ	RG142	CB002-CO	9kHz ~ 200MHz	23/Sep/2019	22/Sep/2020
Impuls Begrenzer Pulse Limiter	SCHWARZBECK	VTSD 9561-F	9561-F041	9kHz ~ 30MHz	24/Sep/2019	23/Sep/2020

NCR: Non-Calibration Require

Instrument for Conducted Test

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV 40	101029	10KHz ~ 40GHz	01/Oct/2019	30/Sep/2020
SMB100A Signal Generator	R&S	SMB100A03	181147	100kHz~40GHz	12/Nov/2018	11/Nov/2020
Pulse Sensor	Anritsu	MA2411B	1027452	300MHz~40GHz	18/Mar/2020	17/Mar/2021
Power Meter	Anritsu	ML2495A	1124009	300MHz~40GHz	18/Mar/2020	17/Mar/2021

Instrument for Radiated Test

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz~1GHz 3m	06/Aug/2020	05/Aug/2021
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	1GHz~18GHz 3m	04/Aug/2020	03/Aug/2021
Signal Analyzer	R&S	FSV40	101500	10Hz~40GHz	15/Aug/2019	14/Aug/2020
Signal Analyzer	R&S	FSV40	101500	10Hz~40GHz	19/Aug/2020	18/Aug/2021
Amplifier	HP	8447D	2944A08033	10kHz~1.3GHz	14/Apr/2020	13/Apr/2021
Microwave System Preamplifier	KEYSIGHT	83017A	MY53270196	1GHz~26.5GHz	09/Sep/2019	08/Sep/2020
Microwave System Preamplifier	KEYSIGHT	83017A	MY53270197	1GHz~26.5GHz	27/Nov/2019	26/Nov/2020
Bilog Antenna & 6dB Attenuator	SCHAFFNER / EMCI	CBL6112B / N-6-05	22237 / AT-N-0603	30MHz~1GHz	19/Apr/2020	18/Apr/2021
Double Ridged Guide Horn Antenna	SCHWARZBEC K	BBHA 9120 D	BBHA 9120 D 1531	1GHz~18GHz	26/Mar/2020	25/Mar/2021
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz~30MHz	19/Jun/2020	18/Jun/2021
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz~1GHz	18/Mar/2020	17/Mar/2021
RF CABLE 5+6m	HUBER+SUHNER	SUOFLEX 104	SN MY38596/4+SN 804300/4	1GHz~40GHz	04/Aug/2020	03/Aug/2021
Broadband Horn Antenna	SCHWARZBEC K	BBHA 9170	BBHA 9170221	18GHz~40GHz	13/Mar/2020	12/Mar/2021
Preamplifier	MITEQ	TTA1840-35-HG	1864481	18GHz~40GHz	10/Mar/2020	09/Mar/2021
Loop Antenna	TESEQ	HLA 6120	31244	9kHz~30MHz	16/Mar/2020	15/Mar/2021
EMI Test Receiver	R&S	ESR3	102051	9kHz~3.6GHz	29/May/2020	28/May/2021



Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	AV	358.13k	39.64	48.77	-9.13	Line

Mode Configure

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition	Comments
Mode 1	Pass	QP	152.414k	51.52	65.87	-14.35	Line	-
Mode 1	Pass	AV	152.414k	32.06	55.87	-23.81	Line	-
Mode 1	Pass	QP	358.13k	46.03	58.77	-12.74	Line	-
Mode 1	Pass	AV	358.13k	39.64	48.77	-9.13	Line	"Worst"
Mode 1	Pass	QP	418.461k	32.19	57.47	-25.28	Line	-
Mode 1	Pass	AV	418.461k	26.40	47.47	-21.07	Line	-
Mode 1	Pass	QP	2.176M	25.75	56.00	-30.25	Line	-
Mode 1	Pass	AV	2.176M	21.69	46.00	-24.31	Line	-
Mode 1	Pass	QP	4.272M	24.24	56.00	-31.76	Line	-
Mode 1	Pass	AV	4.272M	20.08	46.00	-25.92	Line	-
Mode 1	Pass	QP	9.195M	21.84	60.00	-38.16	Line	-
Mode 1	Pass	AV	9.195M	18.44	50.00	-31.56	Line	-
Mode 1	Pass	QP	154.868k	51.23	65.73	-14.50	Neutral	-
Mode 1	Pass	AV	154.868k	34.87	55.73	-20.86	Neutral	-
Mode 1	Pass	QP	353.867k	45.73	58.87	-13.14	Neutral	-
Mode 1	Pass	AV	353.867k	38.10	48.87	-10.77	Neutral	"Worst"
Mode 1	Pass	QP	589.868k	30.03	56.00	-25.97	Neutral	-
Mode 1	Pass	AV	589.868k	25.60	46.00	-20.40	Neutral	-
Mode 1	Pass	QP	1.337M	28.03	56.00	-27.97	Neutral	-
Mode 1	Pass	AV	1.337M	24.09	46.00	-21.91	Neutral	-
Mode 1	Pass	QP	4.482M	24.24	56.00	-31.76	Neutral	-
Mode 1	Pass	AV	4.482M	19.79	46.00	-26.21	Neutral	-
Mode 1	Pass	QP	8.942M	23.49	60.00	-36.51	Neutral	-
Mode 1	Pass	AV	8.942M	20.01	50.00	-29.99	Neutral	-

Conducted Emissions at Powerline_Mode 1


17/08/2020

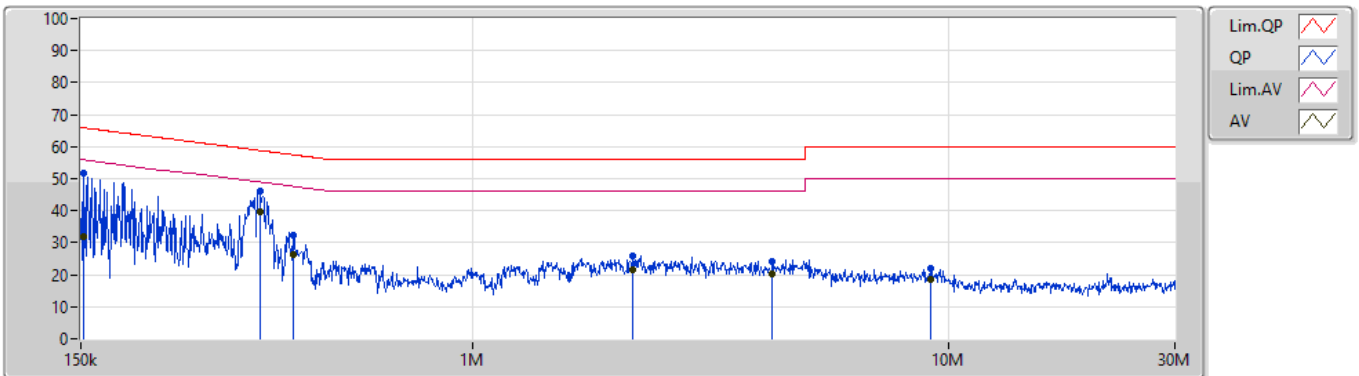

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	152.414k	51.52	65.87	-14.35	19.64	Line	-	31.88	9.66	0.11	9.87			
AV	152.414k	32.06	55.87	-23.81	19.64	Line	-	12.42	9.66	0.11	9.87			
QP	358.13k	46.03	58.77	-12.74	19.64	Line	-	26.39	9.64	0.13	9.87			
AV	358.13k	39.64	48.77	-9.13	19.64	Line	"Worst"	20.00	9.64	0.13	9.87			
QP	418.461k	32.19	57.47	-25.28	19.64	Line	-	12.55	9.64	0.13	9.87			
AV	418.461k	26.40	47.47	-21.07	19.64	Line	-	6.76	9.64	0.13	9.87			
QP	2.176M	25.75	56.00	-30.25	19.66	Line	-	6.09	9.65	0.14	9.87			
AV	2.176M	21.69	46.00	-24.31	19.66	Line	-	2.03	9.65	0.14	9.87			
QP	4.272M	24.24	56.00	-31.76	19.73	Line	-	4.51	9.66	0.19	9.88			
AV	4.272M	20.08	46.00	-25.92	19.73	Line	-	0.35	9.66	0.19	9.88			
QP	9.195M	21.84	60.00	-38.16	19.83	Line	-	2.01	9.69	0.26	9.88			
AV	9.195M	18.44	50.00	-31.56	19.83	Line	-	-1.39	9.69	0.26	9.88			

Conducted Emissions at Powerline_Mode 1

17/08/2020

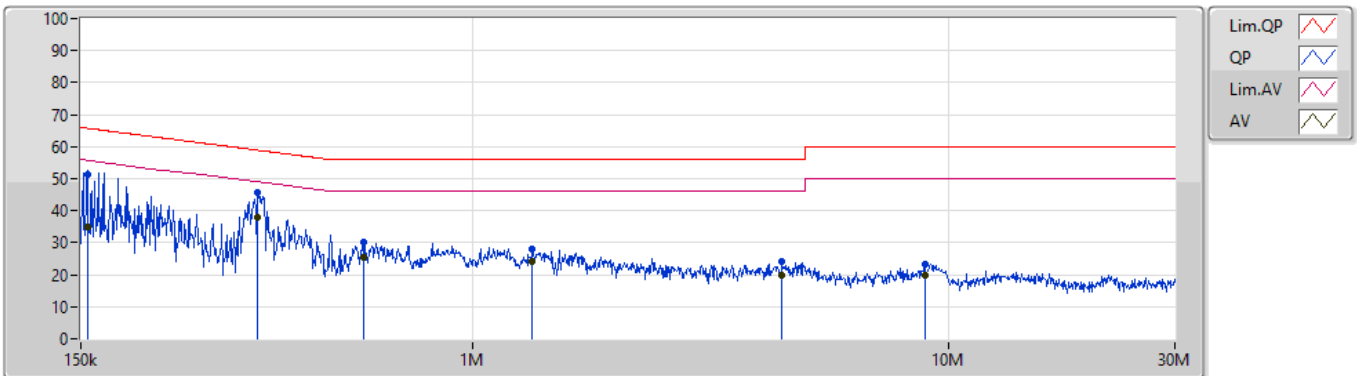

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	154.868k	51.23	65.73	-14.50	19.63	Neutral	-	31.60	9.65	0.11	9.87			
AV	154.868k	34.87	55.73	-20.86	19.63	Neutral	-	15.24	9.65	0.11	9.87			
QP	353.867k	45.73	58.87	-13.14	19.63	Neutral	-	26.10	9.63	0.13	9.87			
AV	353.867k	38.10	48.87	-10.77	19.63	Neutral	"Worst"	18.47	9.63	0.13	9.87			
QP	589.868k	30.03	56.00	-25.97	19.62	Neutral	-	10.41	9.63	0.12	9.87			
AV	589.868k	25.60	46.00	-20.40	19.62	Neutral	-	5.98	9.63	0.12	9.87			
QP	1.337M	28.03	56.00	-27.97	19.64	Neutral	-	8.39	9.64	0.12	9.88			
AV	1.337M	24.09	46.00	-21.91	19.64	Neutral	-	4.45	9.64	0.12	9.88			
QP	4.482M	24.24	56.00	-31.76	19.73	Neutral	-	4.51	9.66	0.19	9.88			
AV	4.482M	19.79	46.00	-26.21	19.73	Neutral	-	0.06	9.66	0.19	9.88			
QP	8.942M	23.49	60.00	-36.51	19.84	Neutral	-	3.65	9.70	0.26	9.88			
AV	8.942M	20.01	50.00	-29.99	19.84	Neutral	-	0.17	9.70	0.26	9.88			

**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	693.75k	1.036M	1M04F1D	687.5k	1.035M
BT-LE(2Mbps)	1.345M	2.109M	2M11F1D	1.343M	2.099M


Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	693.75k	1.036M
2440MHz	Pass	500k	688.75k	1.035M
2480MHz	Pass	500k	687.5k	1.035M
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	500k	1.345M	2.099M
2440MHz	Pass	500k	1.343M	2.105M
2480MHz	Pass	500k	1.343M	2.109M



Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

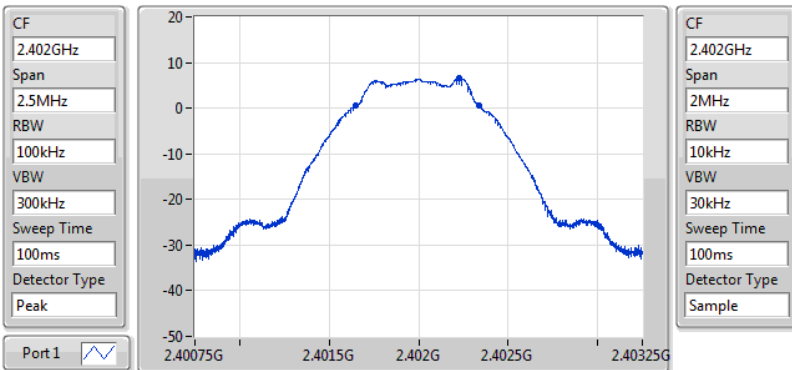BT-LE(1Mbps)
2402MHz


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
693.75k	2.401646G	2.40234G	1.036M	2.401479G	2.402516G	500k	1

EBW-DTS


07/08/2020

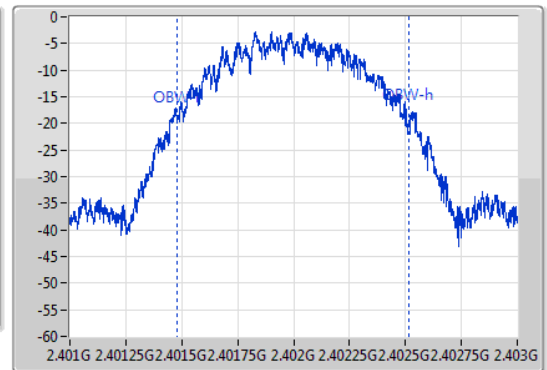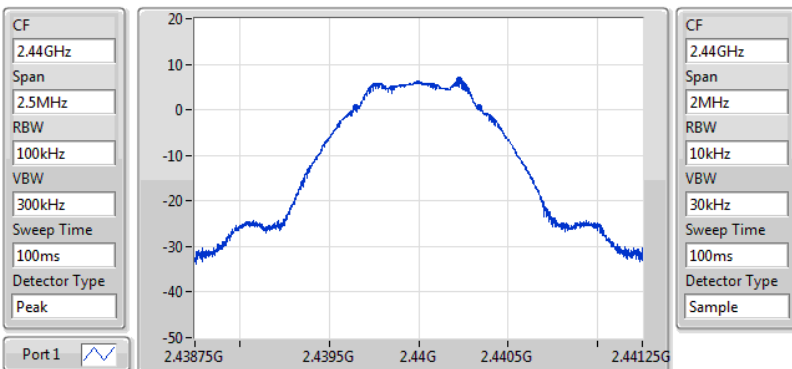
BT-LE(1Mbps)
2440MHz


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
688.75k	2.439648G	2.440336G	1.035M	2.439481G	2.440517G	500k	1


EBW-DTS

07/08/2020

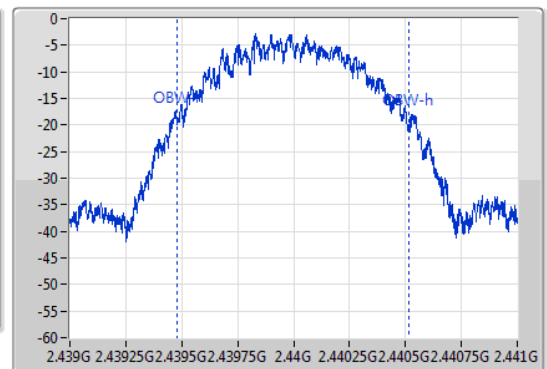


BT-LE(1Mbps)
EBW-DTS
2480MHz

07/08/2020

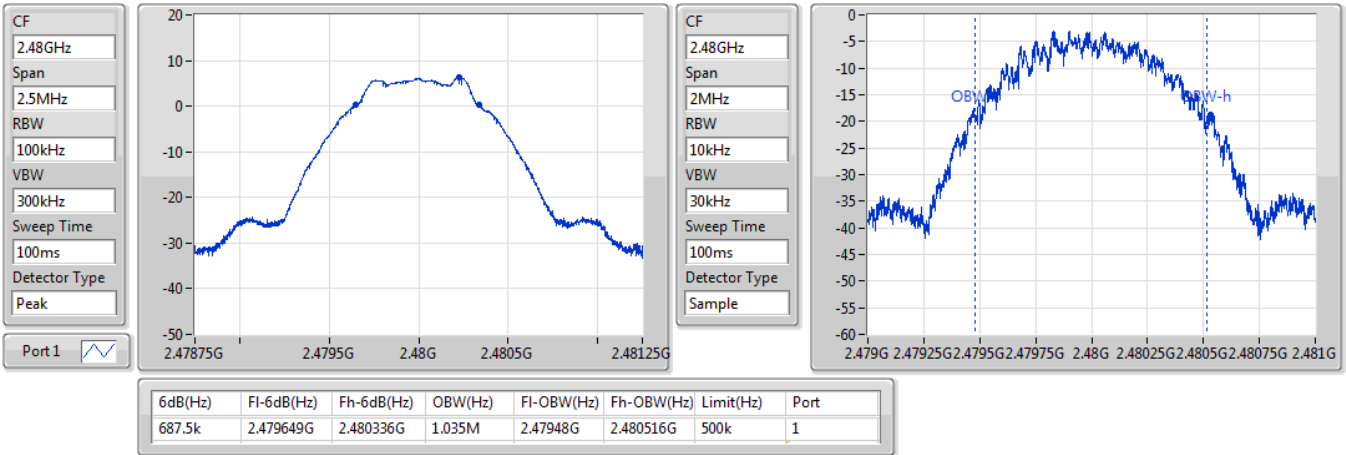

BT-LE(2Mbps)
EBW-DTS
2402MHz

07/08/2020

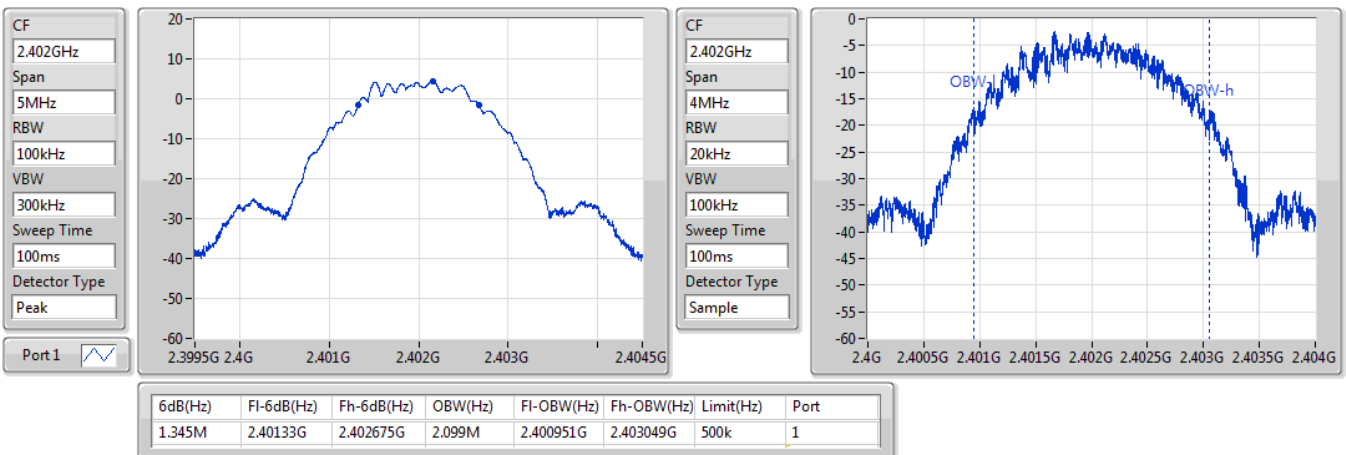


BT-LE(2Mbps)
EBW-DTS
2440MHz

07/08/2020

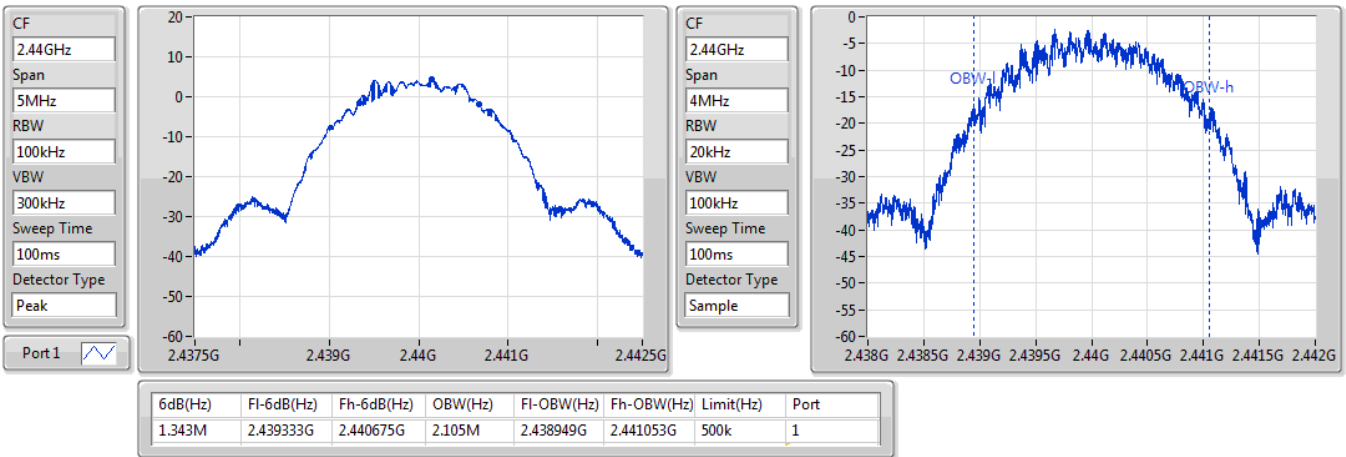
BT-LE(2Mbps)
EBW-DTS
2480MHz

07/08/2020

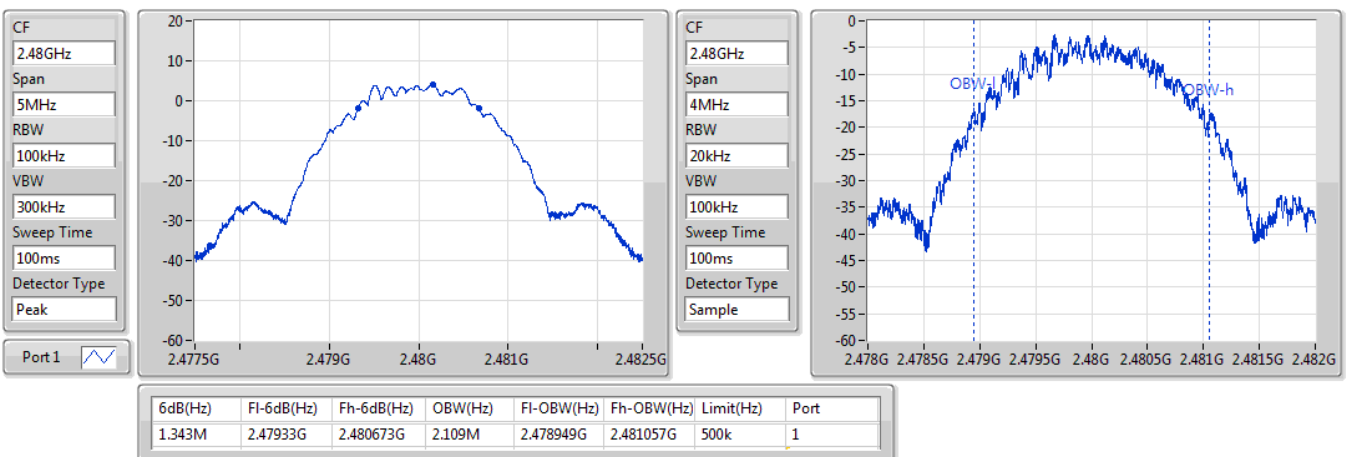



Summary

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	7.31	0.00538
BT-LE(2Mbps)	7.30	0.00537



Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	3.69	7.31	30.00
2440MHz	Pass	3.69	7.16	30.00
2480MHz	Pass	3.69	7.07	30.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	3.69	7.30	30.00
2440MHz	Pass	3.69	7.19	30.00
2480MHz	Pass	3.69	7.07	30.00

DG = Directional Gain; **Port X** = Port X output power



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-8.46
BT-LE(2Mbps)	-10.46

RBW=3 kHz.

Result

Mode	Result	Gain (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	3.69	-8.46	8.00
2440MHz	Pass	3.69	-8.58	8.00
2480MHz	Pass	3.69	-8.69	8.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	3.69	-10.46	8.00
2440MHz	Pass	3.69	-10.46	8.00
2480MHz	Pass	3.69	-10.62	8.00

DG = Directional Gain; RBW=3 kHz;


PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

BT-LE(1Mbps)

2402MHz

PSD

07/08/2020

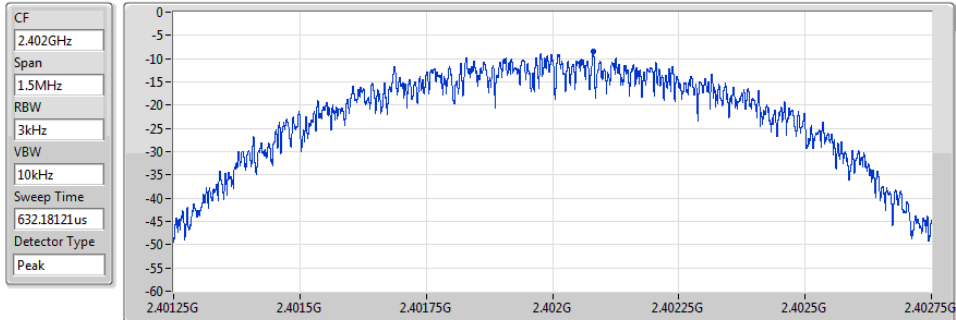


BT-LE(1Mbps)

2440MHz

PSD

07/08/2020

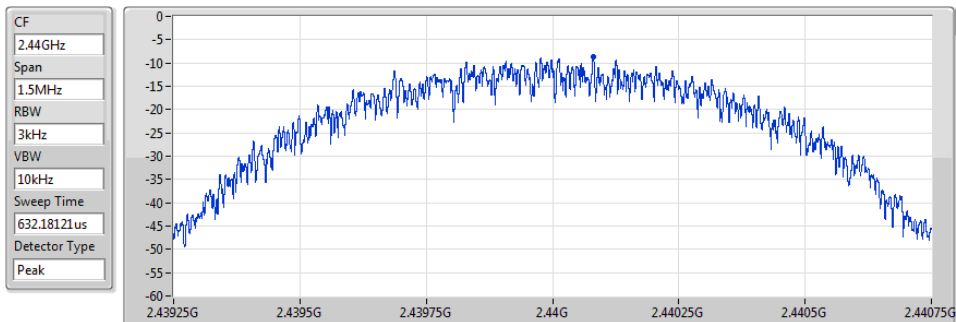


BT-LE(1Mbps)

2480MHz

PSD

07/08/2020

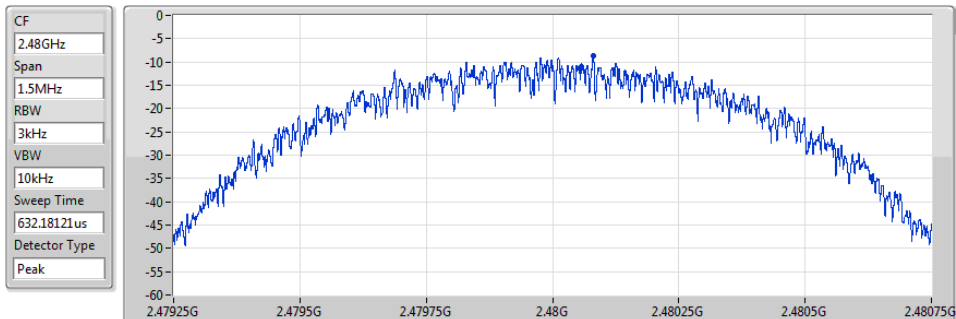


BT-LE(2Mbps)

2402MHz

PSD

07/08/2020

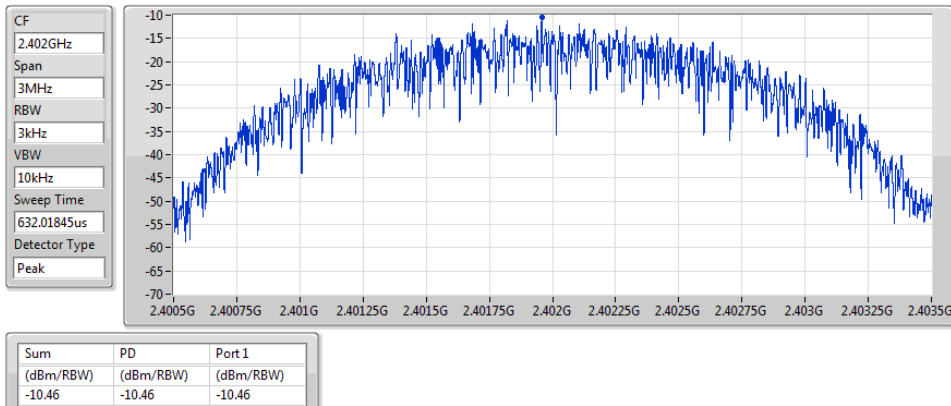


BT-LE(2Mbps)

2440MHz

PSD

07/08/2020

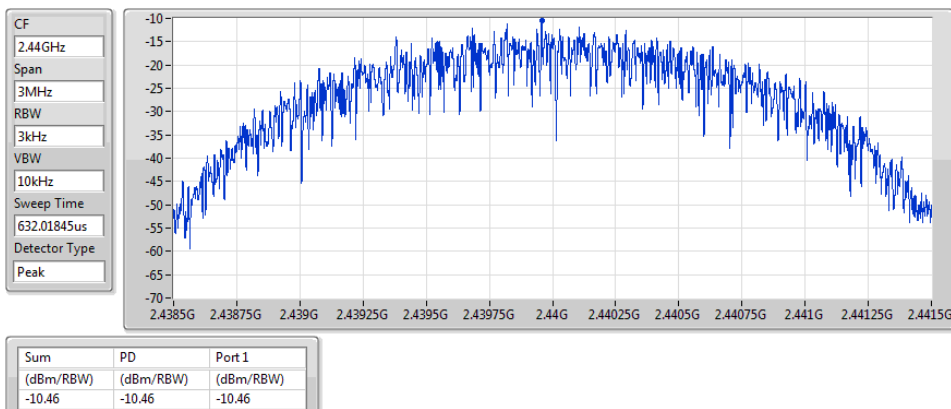


BT-LE(2Mbps)

2480MHz

PSD

07/08/2020

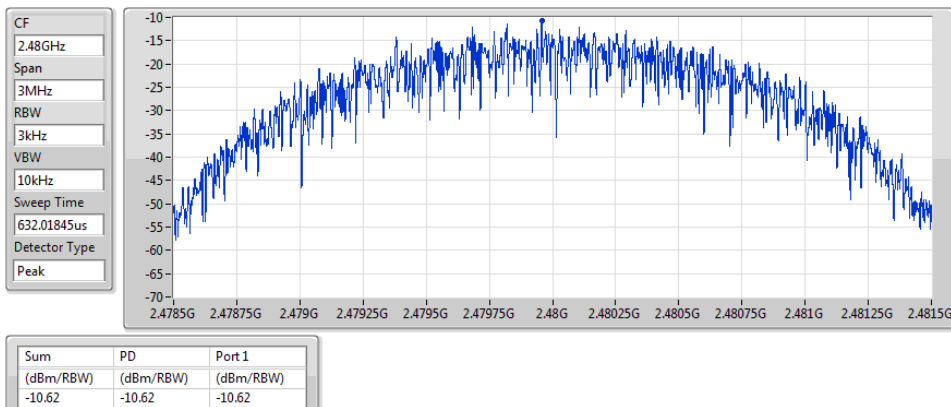



Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	2.40221G	6.51	-23.49	2.06892G	-54.82	2.3996G	-43.88	2.4G	-47.04	2.48628G	-52.21	24.89877G	-42.11	1
BT-LE(2Mbps)	Pass	2.40213G	4.32	-25.68	1.96111G	-55.01	2.4G	-26.93	2.4G	-28.05	2.49885G	-52.58	24.44884G	-41.66	1


Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.40221G	6.51	-23.49	2.06892G	-54.82	2.3996G	-43.88	2.4G	-47.04	2.48628G	-52.21	24.89877G	-42.11	1
2440MHz	Pass	2.40221G	6.51	-23.49	2.30568G	-53.44	2.39063G	-53.47	2.4G	-56.46	2.48577G	-52.18	16.94907G	-41.48	1
2480MHz	Pass	2.40221G	6.51	-23.49	2.30627G	-53.93	2.39511G	-53.38	2.4835G	-52.16	2.48413G	-49.10	15.04811G	-41.72	1
BT-LE(2Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.40213G	4.32	-25.68	1.96111G	-55.01	2.4G	-26.93	2.4G	-28.05	2.49885G	-52.58	24.44884G	-41.66	1
2440MHz	Pass	2.40213G	4.32	-25.68	1.96258G	-53.49	2.39985G	-53.44	2.4G	-55.94	2.49016G	-51.56	21.94048G	-41.84	1
2480MHz	Pass	2.40213G	4.32	-25.68	2.08596G	-54.79	2.39461G	-53.71	2.4835G	-48.74	2.48352G	-46.61	24.91845G	-42.00	1

BT-LE(1Mbps)

CSEndB-DTS


2402MHz

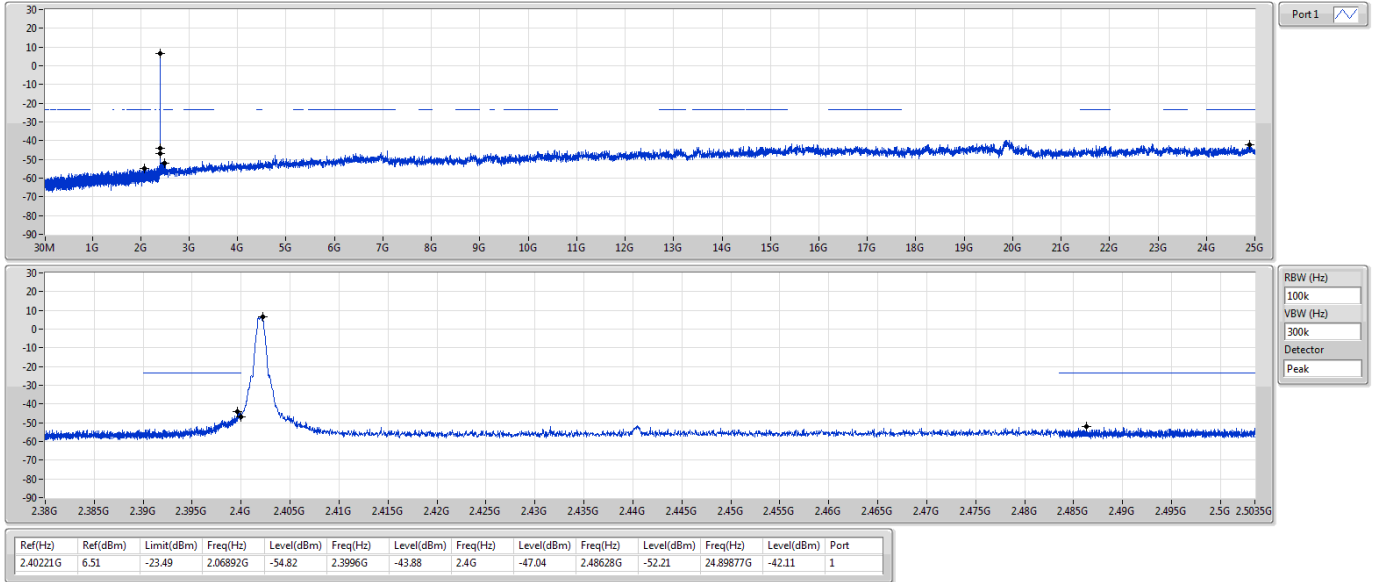

BT-LE(1Mbps)

CSEndB-DTS


2440MHz

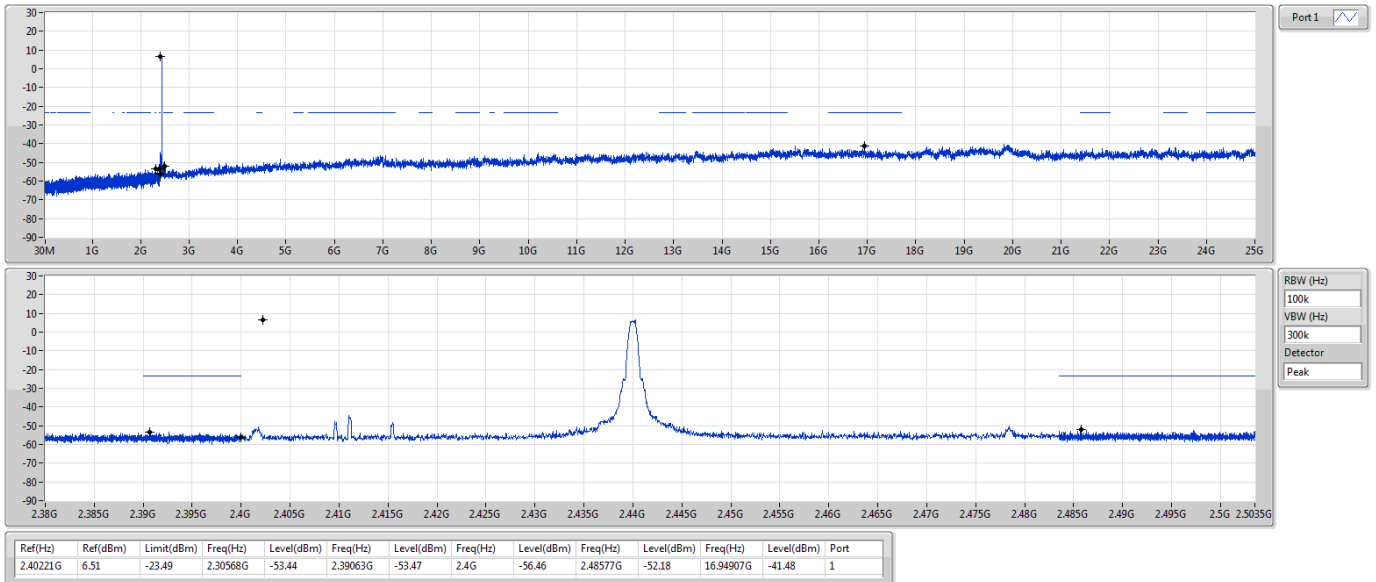

BT-LE(1Mbps)

CSEndB-DTS


2480MHz

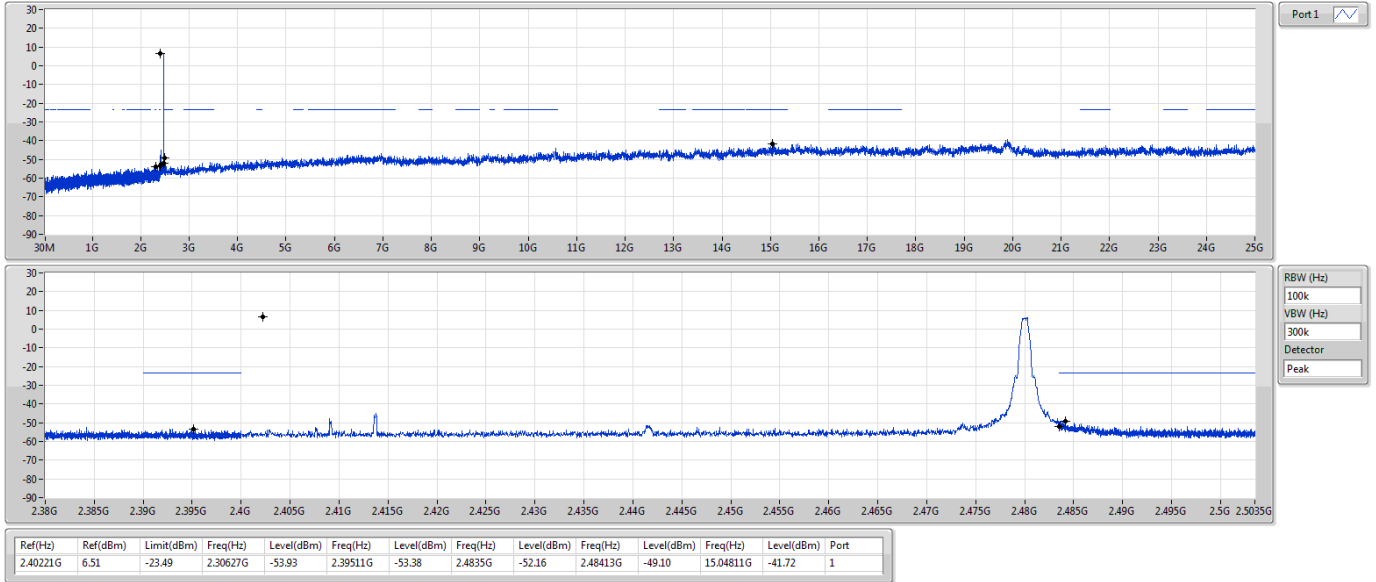

BT-LE(2Mbps)

CSEndB-DTS


2402MHz

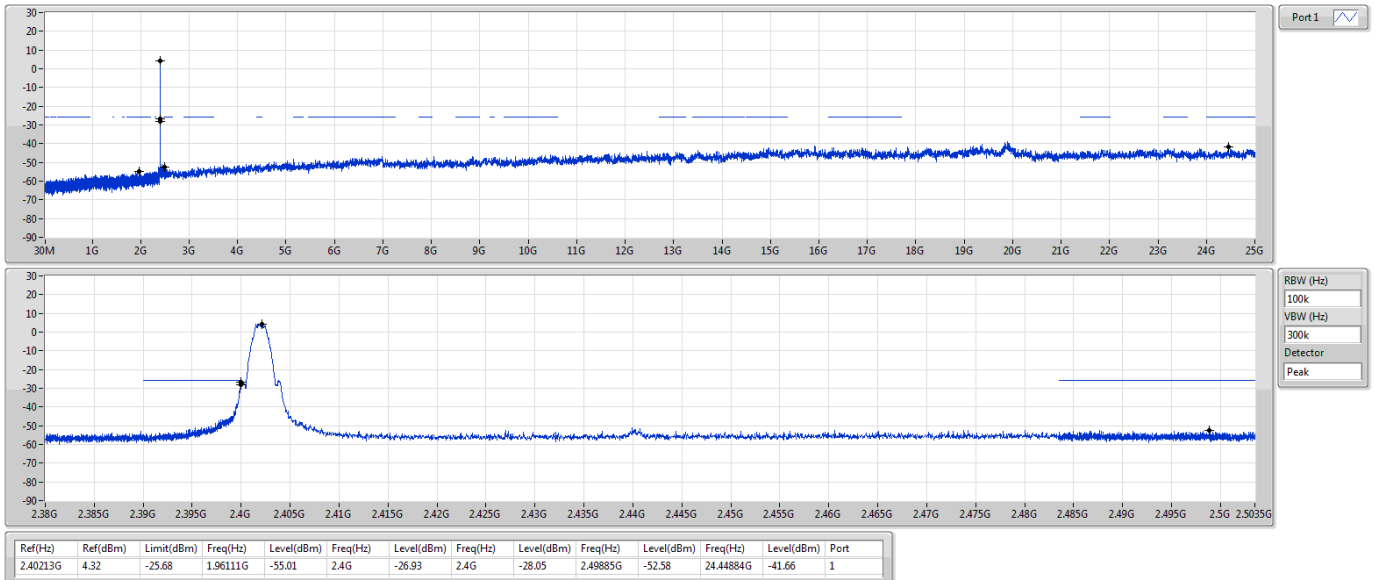

BT-LE(2Mbps)

CSEndB-DTS


2440MHz

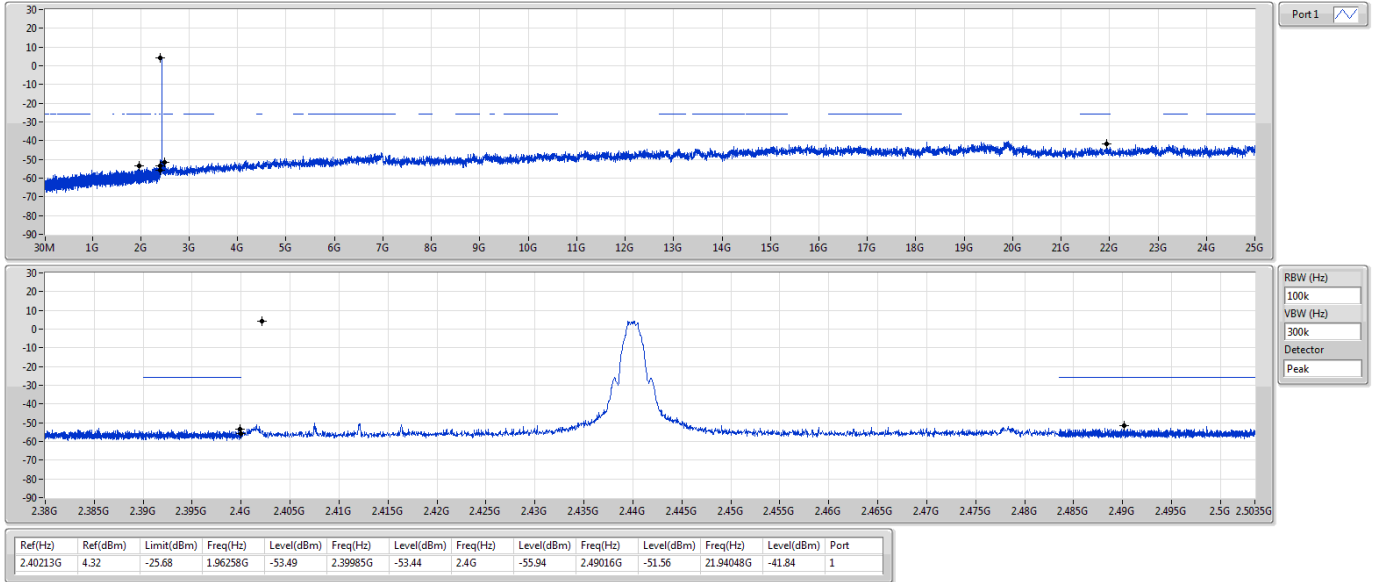

BT-LE(2Mbps)

CSEndB-DTS

2480MHz

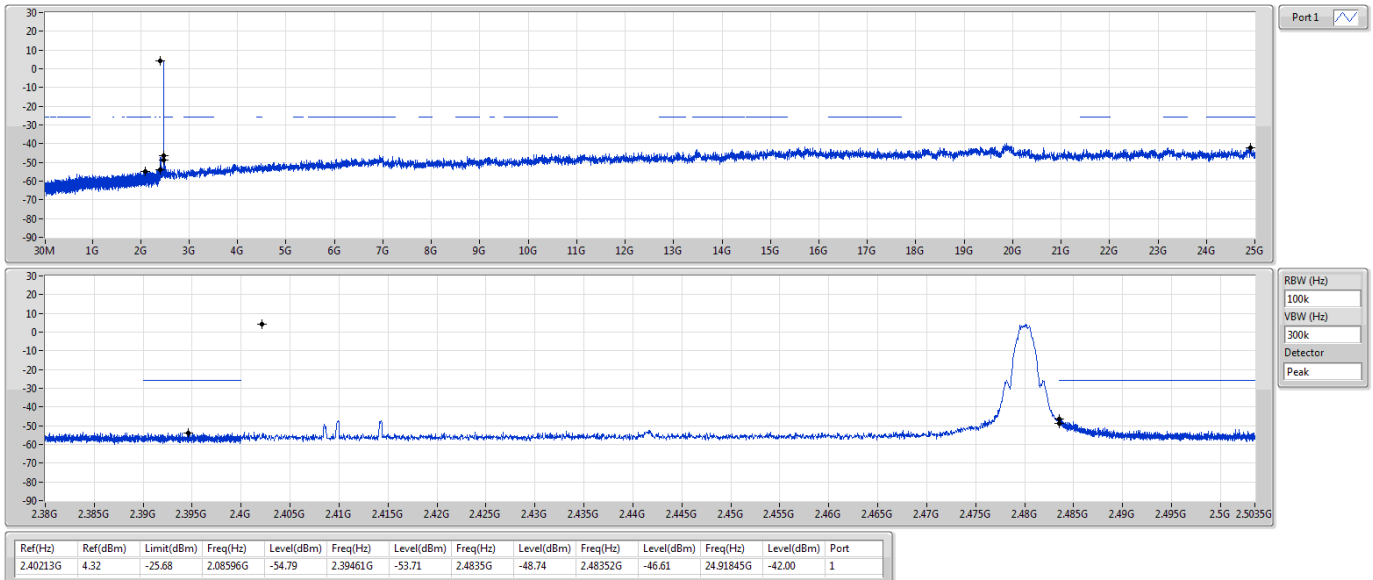



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
BT-LE(2Mbps)	Pass	PK	61.04M	36.00	40.00	-4.00	3	Vertical	0	1.00	-


Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
BT-LE(2Mbps)	-	-	-	-	-	-	-	-	-	-	-
2440MHz	Pass	PK	41.64M	35.45	40.00	-4.55	3	Vertical	0	1.00	-
2440MHz	Pass	PK	61.04M	36.00	40.00	-4.00	3	Vertical	0	1.00	-
2440MHz	Pass	PK	99.84M	27.57	43.50	-15.93	3	Vertical	0	1.00	-
2440MHz	Pass	PK	311.3M	27.47	46.00	-18.53	3	Vertical	0	1.00	-
2440MHz	Pass	PK	423.82M	29.21	46.00	-16.79	3	Vertical	0	1.00	-
2440MHz	Pass	PK	542.16M	30.51	46.00	-15.49	3	Vertical	0	1.00	-
2440MHz	Pass	PK	61.04M	30.99	40.00	-9.01	3	Horizontal	360	1.00	-
2440MHz	Pass	PK	99.84M	27.81	43.50	-15.69	3	Horizontal	360	1.00	-
2440MHz	Pass	PK	268.62M	24.91	46.00	-21.09	3	Horizontal	360	1.00	-
2440MHz	Pass	PK	332.64M	26.66	46.00	-19.34	3	Horizontal	360	1.00	-
2440MHz	Pass	PK	419.94M	28.69	46.00	-17.31	3	Horizontal	360	1.00	-
2440MHz	Pass	PK	625.58M	33.03	46.00	-12.97	3	Horizontal	360	1.00	-

BT-LE(2Mbps)

2440MHz_Adapter

12/08/2020

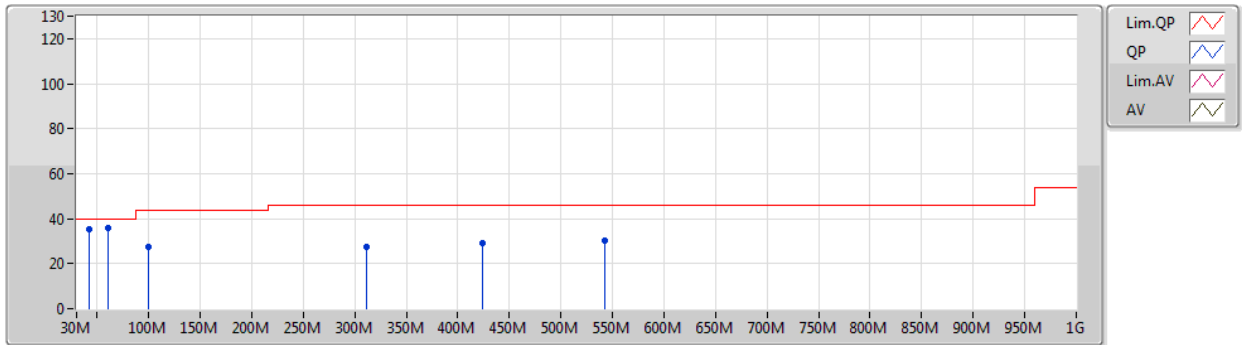


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	41.64M	35.45	40.00	-4.55	-9.82	3	Vertical	0	1.00	-	45.27	16.72	1.00	27.54
PK	61.04M	36.00	40.00	-4.00	-14.99	3	Vertical	0	1.00	-	50.99	11.28	1.22	27.49
PK	99.84M	27.57	43.50	-15.93	-9.86	3	Vertical	0	1.00	-	37.43	15.93	1.60	27.39
PK	311.3M	27.47	46.00	-18.53	-5.09	3	Vertical	0	1.00	-	32.56	18.68	2.95	26.72
PK	423.82M	29.21	46.00	-16.79	-2.30	3	Vertical	0	1.00	-	31.51	21.81	3.35	27.46
PK	542.16M	30.51	46.00	-15.49	-0.21	3	Vertical	0	1.00	-	30.72	23.90	3.87	27.98

BT-LE(2Mbps)

2440MHz_Adapter

12/08/2020

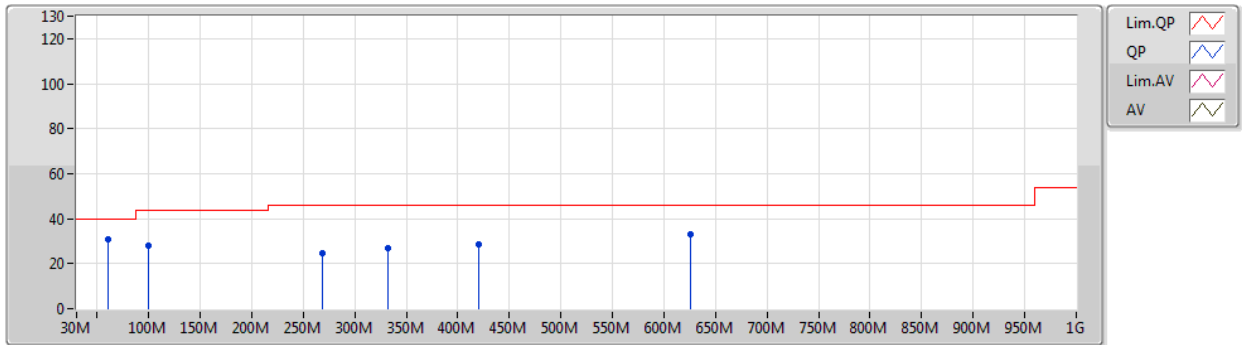

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	61.04M	30.99	40.00	-9.01	-14.99	3	Horizontal	360	1.00	-	45.98	11.28	1.22	27.49
PK	99.84M	27.81	43.50	-15.69	-9.86	3	Horizontal	360	1.00	-	37.67	15.93	1.60	27.39
PK	268.62M	24.91	46.00	-21.09	-5.93	3	Horizontal	360	1.00	-	30.84	18.05	2.71	26.69
PK	332.64M	26.66	46.00	-19.34	-4.88	3	Horizontal	360	1.00	-	31.54	18.93	3.03	26.84
PK	419.94M	28.69	46.00	-17.31	-2.28	3	Horizontal	360	1.00	-	30.97	21.81	3.34	27.43
PK	625.58M	33.03	46.00	-12.97	-0.01	3	Horizontal	360	1.00	-	33.04	23.85	4.20	28.06

**Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	AV	2.4835G	49.33	54.00	-4.67	3	Vertical	16	2.71	-
BT-LE(2Mbps)	Pass	AV	2.4835G	52.09	54.00	-1.91	3	Vertical	29	2.15	-

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	AV	2.3634G	45.46	54.00	-8.54	3	Vertical	29	2.28	-
2402MHz	Pass	AV	2.402G	103.99	Inf	-Inf	3	Vertical	29	2.28	-
2402MHz	Pass	PK	2.3534G	56.01	74.00	-17.99	3	Vertical	29	2.28	-
2402MHz	Pass	PK	2.4022G	105.57	Inf	-Inf	3	Vertical	29	2.28	-
2402MHz	Pass	AV	2.3636G	44.40	54.00	-9.60	3	Horizontal	50	2.73	-
2402MHz	Pass	AV	2.402G	100.20	Inf	-Inf	3	Horizontal	50	2.73	-
2402MHz	Pass	PK	2.3848G	56.47	74.00	-17.53	3	Horizontal	50	2.73	-
2402MHz	Pass	PK	2.4018G	101.79	Inf	-Inf	3	Horizontal	50	2.73	-
2402MHz	Pass	AV	4.80397G	41.66	54.00	-12.34	3	Vertical	97	1.05	-
2402MHz	Pass	PK	4.80439G	50.29	74.00	-23.71	3	Vertical	97	1.05	-
2402MHz	Pass	AV	4.80395G	40.14	54.00	-13.86	3	Horizontal	222	2.93	-
2402MHz	Pass	PK	4.80353G	49.95	74.00	-24.05	3	Horizontal	222	2.93	-
2440MHz	Pass	AV	2.34G	44.02	54.00	-9.98	3	Vertical	30	2.00	-
2440MHz	Pass	AV	2.44G	103.32	Inf	-Inf	3	Vertical	30	2.00	-
2440MHz	Pass	AV	2.498G	43.56	54.00	-10.44	3	Vertical	30	2.00	-
2440MHz	Pass	PK	2.3716G	55.72	74.00	-18.28	3	Vertical	30	2.00	-
2440MHz	Pass	PK	2.4404G	104.87	Inf	-Inf	3	Vertical	30	2.00	-
2440MHz	Pass	PK	2.4844G	55.79	74.00	-18.21	3	Vertical	30	2.00	-
2440MHz	Pass	AV	2.3424G	44.05	54.00	-9.95	3	Horizontal	13	1.48	-
2440MHz	Pass	AV	2.44G	98.34	Inf	-Inf	3	Horizontal	13	1.48	-
2440MHz	Pass	AV	2.4988G	43.54	54.00	-10.46	3	Horizontal	13	1.48	-
2440MHz	Pass	PK	2.3804G	56.67	74.00	-17.33	3	Horizontal	13	1.48	-
2440MHz	Pass	PK	2.4404G	99.89	Inf	-Inf	3	Horizontal	13	1.48	-
2440MHz	Pass	PK	2.4924G	55.22	74.00	-18.78	3	Horizontal	13	1.48	-
2440MHz	Pass	AV	4.88G	38.96	54.00	-15.04	3	Vertical	95	3.00	-
2440MHz	Pass	PK	4.87951G	49.05	74.00	-24.95	3	Vertical	95	3.00	-
2440MHz	Pass	AV	4.87995G	37.48	54.00	-16.52	3	Horizontal	11	2.54	-
2440MHz	Pass	PK	4.88017G	48.30	74.00	-25.70	3	Horizontal	11	2.54	-
2480MHz	Pass	AV	2.48G	101.49	Inf	-Inf	3	Vertical	16	2.71	-
2480MHz	Pass	AV	2.4835G	49.33	54.00	-4.67	3	Vertical	16	2.71	-
2480MHz	Pass	PK	2.4798G	103.08	Inf	-Inf	3	Vertical	16	2.71	-
2480MHz	Pass	PK	2.4835G	59.91	74.00	-14.09	3	Vertical	16	2.71	-
2480MHz	Pass	AV	2.48G	97.61	Inf	-Inf	3	Horizontal	15	1.38	-
2480MHz	Pass	AV	2.4835G	46.86	54.00	-7.14	3	Horizontal	15	1.38	-
2480MHz	Pass	PK	2.4802G	99.20	Inf	-Inf	3	Horizontal	15	1.38	-
2480MHz	Pass	PK	2.4835G	56.48	74.00	-17.52	3	Horizontal	15	1.38	-
2480MHz	Pass	AV	4.95999G	39.01	54.00	-14.99	3	Vertical	97	1.03	-
2480MHz	Pass	PK	4.95942G	48.28	74.00	-25.72	3	Vertical	97	1.03	-
2480MHz	Pass	AV	4.96G	39.90	54.00	-14.10	3	Horizontal	12	2.73	-
2480MHz	Pass	PK	4.95985G	49.80	74.00	-24.20	3	Horizontal	12	2.73	-
BT-LE(2Mbps)	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	AV	2.3636G	45.21	54.00	-8.79	3	Vertical	28	2.28	-
2402MHz	Pass	AV	2.402G	102.37	Inf	-Inf	3	Vertical	28	2.28	-
2402MHz	Pass	PK	2.3632G	56.26	74.00	-17.74	3	Vertical	28	2.28	-
2402MHz	Pass	PK	2.4024G	105.93	Inf	-Inf	3	Vertical	28	2.28	-
2402MHz	Pass	AV	2.3634G	44.27	54.00	-9.73	3	Horizontal	50	2.74	-
2402MHz	Pass	AV	2.402G	98.45	Inf	-Inf	3	Horizontal	50	2.74	-




Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2402MHz	Pass	PK	2.3654G	55.80	74.00	-18.20	3	Horizontal	50	2.74	-
2402MHz	Pass	PK	2.4016G	101.99	Inf	-Inf	3	Horizontal	50	2.74	-
2402MHz	Pass	AV	4.80491G	38.05	54.00	-15.95	3	Vertical	95	1.05	-
2402MHz	Pass	PK	4.80498G	49.64	74.00	-24.36	3	Vertical	95	1.05	-
2402MHz	Pass	AV	4.80307G	36.50	54.00	-17.50	3	Horizontal	10	2.97	-
2402MHz	Pass	PK	4.80284G	48.40	74.00	-25.60	3	Horizontal	10	2.97	-
2440MHz	Pass	AV	2.3408G	44.01	54.00	-9.99	3	Vertical	30	2.01	-
2440MHz	Pass	AV	2.44G	101.40	Inf	-Inf	3	Vertical	30	2.01	-
2440MHz	Pass	AV	2.4912G	43.55	54.00	-10.45	3	Vertical	30	2.01	-
2440MHz	Pass	PK	2.35G	55.59	74.00	-18.41	3	Vertical	30	2.01	-
2440MHz	Pass	PK	2.4404G	104.95	Inf	-Inf	3	Vertical	30	2.01	-
2440MHz	Pass	PK	2.4952G	55.45	74.00	-18.55	3	Vertical	30	2.01	-
2440MHz	Pass	AV	2.3408G	44.03	54.00	-9.97	3	Horizontal	14	1.48	-
2440MHz	Pass	AV	2.44G	96.31	Inf	-Inf	3	Horizontal	14	1.48	-
2440MHz	Pass	AV	2.4868G	43.55	54.00	-10.45	3	Horizontal	14	1.48	-
2440MHz	Pass	PK	2.3404G	55.61	74.00	-18.39	3	Horizontal	14	1.48	-
2440MHz	Pass	PK	2.4404G	99.85	Inf	-Inf	3	Horizontal	14	1.48	-
2440MHz	Pass	PK	2.4996G	55.34	74.00	-18.66	3	Horizontal	14	1.48	-
2440MHz	Pass	AV	4.87908G	37.30	54.00	-16.70	3	Vertical	97	1.03	-
2440MHz	Pass	PK	4.87901G	49.11	74.00	-24.89	3	Vertical	97	1.03	-
2440MHz	Pass	AV	4.87904G	35.59	54.00	-18.41	3	Horizontal	0	2.53	-
2440MHz	Pass	PK	4.88102G	47.74	74.00	-26.26	3	Horizontal	0	2.53	-
2480MHz	Pass	AV	2.48G	99.99	Inf	-Inf	3	Vertical	29	2.15	-
2480MHz	Pass	AV	2.4835G	52.09	54.00	-1.91	3	Vertical	29	2.15	-
2480MHz	Pass	PK	2.4796G	103.59	Inf	-Inf	3	Vertical	29	2.15	-
2480MHz	Pass	PK	2.4835G	61.62	74.00	-12.38	3	Vertical	29	2.15	-
2480MHz	Pass	AV	2.48G	95.67	Inf	-Inf	3	Horizontal	15	1.14	-
2480MHz	Pass	AV	2.4835G	48.71	54.00	-5.29	3	Horizontal	15	1.14	-
2480MHz	Pass	PK	2.4796G	99.21	Inf	-Inf	3	Horizontal	15	1.14	-
2480MHz	Pass	PK	2.4835G	58.62	74.00	-15.38	3	Horizontal	15	1.14	-
2480MHz	Pass	AV	4.96096G	37.92	54.00	-16.08	3	Vertical	97	1.04	-
2480MHz	Pass	PK	4.96101G	49.89	74.00	-24.11	3	Vertical	97	1.04	-
2480MHz	Pass	AV	4.96098G	38.04	54.00	-15.96	3	Horizontal	13	2.73	-
2480MHz	Pass	PK	4.96103G	49.92	74.00	-24.08	3	Horizontal	13	2.73	-

BT-LE(1Mbps)

2402MHz_TX

12/08/2020

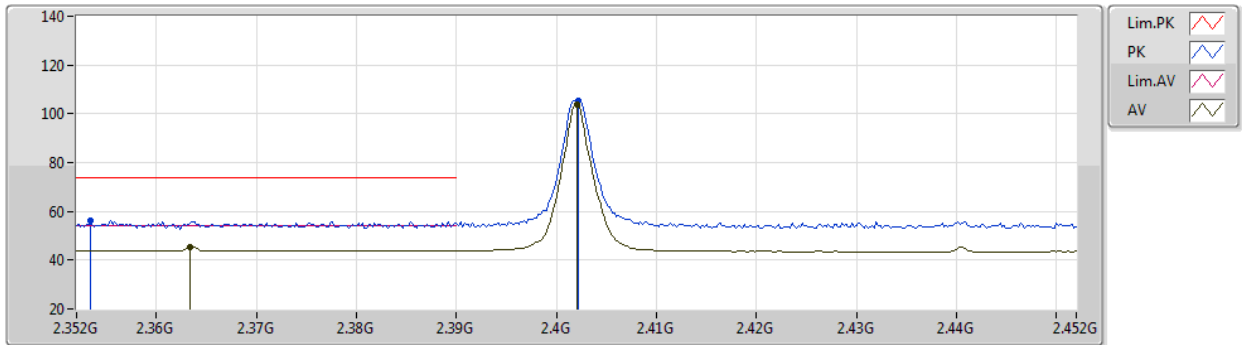


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.3634G	45.46	54.00	-8.54	31.93	3	Vertical	29	2.28	-	13.53	27.67	4.26	-
AV	2.402G	103.99	Inf	-Inf	31.90	3	Vertical	29	2.28	-	72.09	27.60	4.30	-
PK	2.3534G	56.01	74.00	-17.99	31.94	3	Vertical	29	2.28	-	24.07	27.69	4.25	-
PK	2.4022G	105.57	Inf	-Inf	31.90	3	Vertical	29	2.28	-	73.67	27.60	4.30	-

BT-LE(1Mbps)

2402MHz_TX

12/08/2020

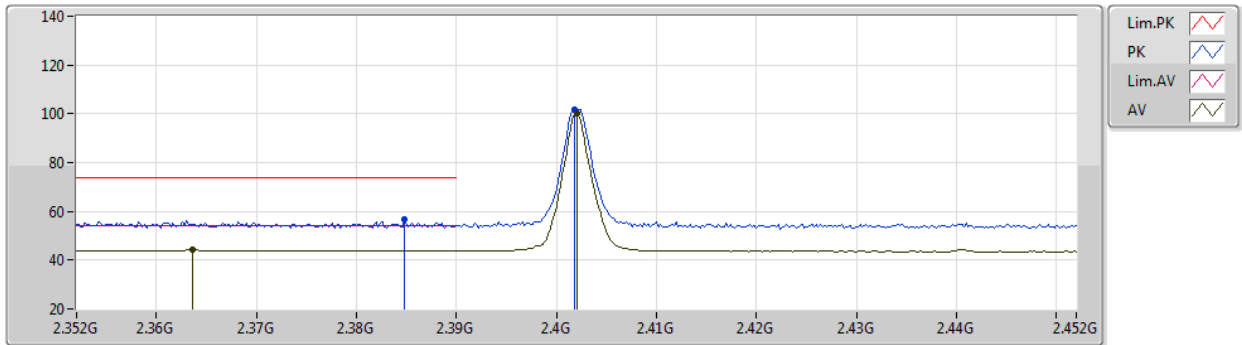


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.3636G	44.40	54.00	-9.60	31.93	3	Horizontal	50	2.73	-	12.47	27.67	4.26	-
AV	2.402G	100.20	Inf	-Inf	31.90	3	Horizontal	50	2.73	-	68.30	27.60	4.30	-
PK	2.3848G	56.47	74.00	-17.53	31.91	3	Horizontal	50	2.73	-	24.56	27.63	4.28	-
PK	2.4018G	101.79	Inf	-Inf	31.90	3	Horizontal	50	2.73	-	69.89	27.60	4.30	-

BT-LE(1Mbps)

2402MHz_TX

12/08/2020

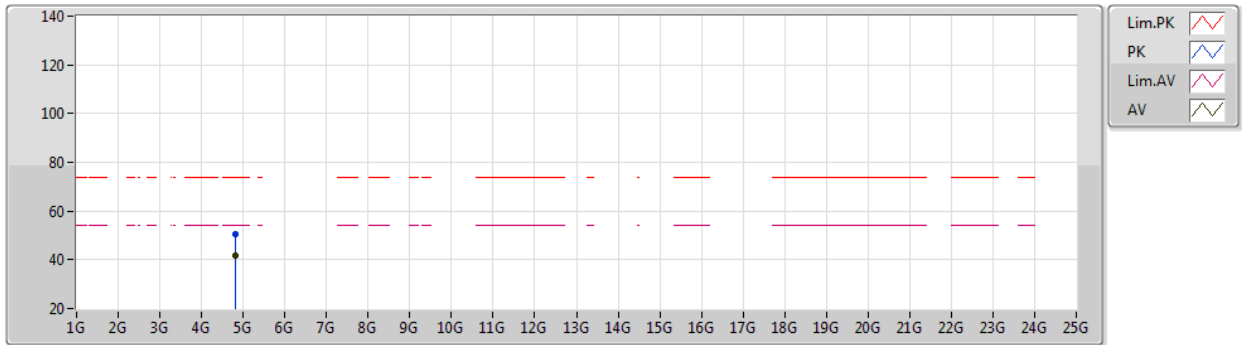


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	4.80397G	41.66	54.00	-12.34	8.19	3	Vertical	97	1.05	-	33.47	31.10	6.50	29.41
PK	4.80439G	50.29	74.00	-23.71	8.19	3	Vertical	97	1.05	-	42.10	31.10	6.50	29.41

BT-LE(1Mbps)

2402MHz_TX

12/08/2020

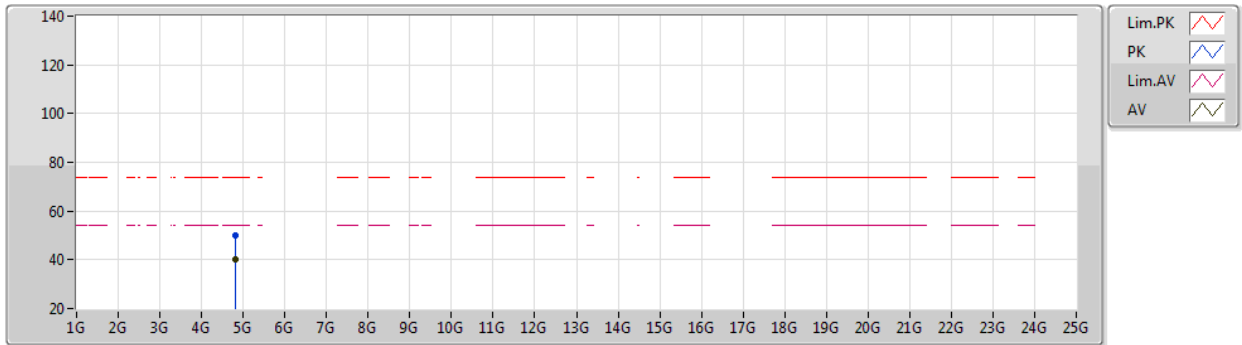


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	4.80395G	40.14	54.00	-13.86	8.19	3	Horizontal	222	2.93	-	31.95	31.10	6.50	29.41
PK	4.80353G	49.95	74.00	-24.05	8.19	3	Horizontal	222	2.93	-	41.76	31.10	6.50	29.41

BT-LE(1Mbps)

2440MHz_TX

12/08/2020

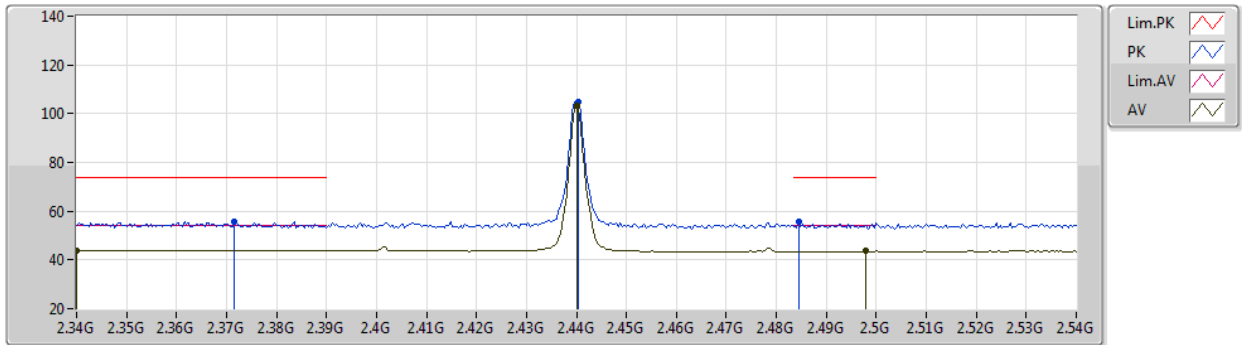


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.34G	44.02	54.00	-9.98	31.98	3	Vertical	30	2.00	-	12.04	27.74	4.24	-
AV	2.44G	103.32	Inf	-Inf	31.86	3	Vertical	30	2.00	-	71.46	27.52	4.34	-
AV	2.498G	43.56	54.00	-10.44	31.80	3	Vertical	30	2.00	-	11.76	27.40	4.40	-
PK	2.3716G	55.72	74.00	-18.28	31.93	3	Vertical	30	2.00	-	23.79	27.66	4.27	-
PK	2.4404G	104.87	Inf	-Inf	31.86	3	Vertical	30	2.00	-	73.01	27.52	4.34	-
PK	2.4844G	55.79	74.00	-18.21	31.81	3	Vertical	30	2.00	-	23.98	27.43	4.38	-

BT-LE(1Mbps)

2440MHz_TX

12/08/2020

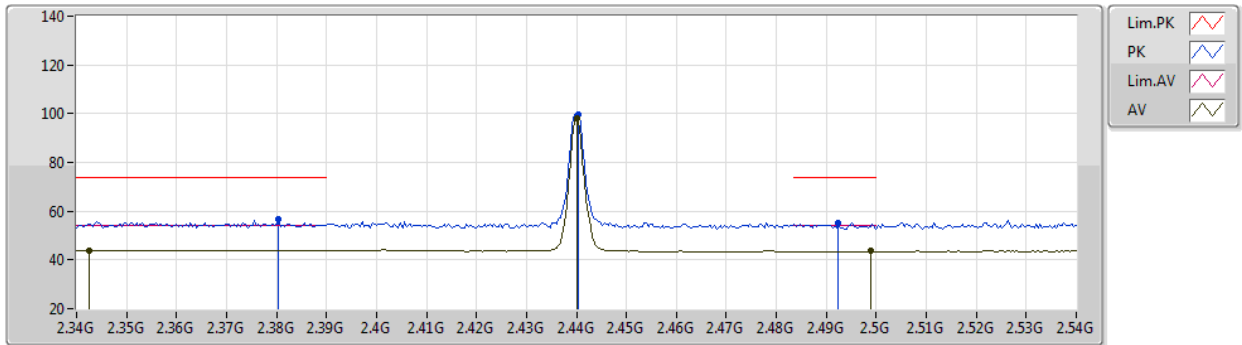


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.3424G	44.05	54.00	-9.95	31.97	3	Horizontal	13	1.48	-	12.08	27.73	4.24	-
AV	2.44G	98.34	Inf	-Inf	31.86	3	Horizontal	13	1.48	-	66.48	27.52	4.34	-
AV	2.4988G	43.54	54.00	-10.46	31.80	3	Horizontal	13	1.48	-	11.74	27.40	4.40	-
PK	2.3804G	56.67	74.00	-17.33	31.92	3	Horizontal	13	1.48	-	24.75	27.64	4.28	-
PK	2.4404G	99.89	Inf	-Inf	31.86	3	Horizontal	13	1.48	-	68.03	27.52	4.34	-
PK	2.4924G	55.22	74.00	-18.78	31.81	3	Horizontal	13	1.48	-	23.41	27.42	4.39	-

BT-LE(1Mbps)

2440MHz_TX

12/08/2020

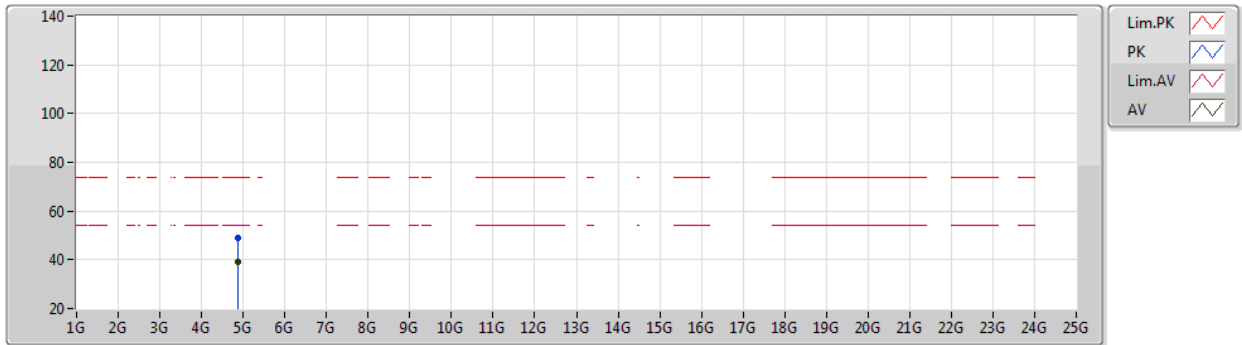


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	4.88G	38.96	54.00	-15.04	8.30	3	Vertical	95	3.00	-	30.66	31.10	6.58	29.38
PK	4.87951G	49.05	74.00	-24.95	8.30	3	Vertical	95	3.00	-	40.75	31.10	6.58	29.38

BT-LE(1Mbps)

2440MHz_TX

12/08/2020

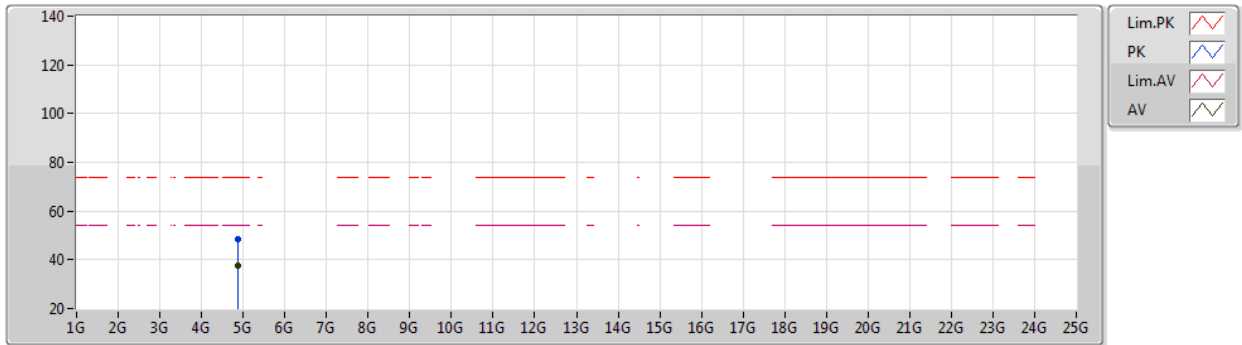


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	4.87995G	37.48	54.00	-16.52	8.30	3	Horizontal	11	2.54	-	29.18	31.10	6.58	29.38
PK	4.88017G	48.30	74.00	-25.70	8.30	3	Horizontal	11	2.54	-	40.00	31.10	6.58	29.38

BT-LE(1Mbps)

2480MHz_TX

12/08/2020

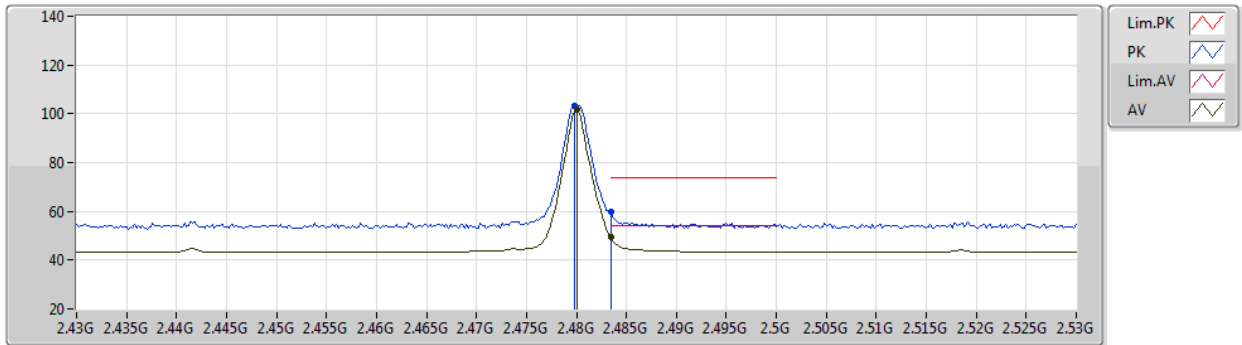


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.48G	101.49	Inf	-Inf	31.82	3	Vertical	16	2.71	-	69.67	27.44	4.38	-
AV	2.4835G	49.33	54.00	-4.67	31.81	3	Vertical	16	2.71	-	17.52	27.43	4.38	-
PK	2.4798G	103.08	Inf	-Inf	31.82	3	Vertical	16	2.71	-	71.26	27.44	4.38	-
PK	2.4835G	59.91	74.00	-14.09	31.81	3	Vertical	16	2.71	-	28.10	27.43	4.38	-

BT-LE(1Mbps)

2480MHz_TX

12/08/2020

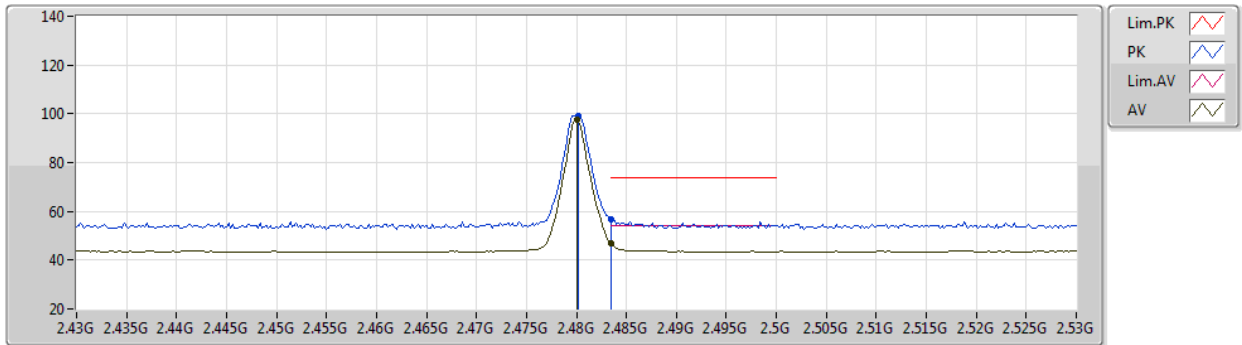


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.48G	97.61	Inf	-Inf	31.82	3	Horizontal	15	1.38	-	65.79	27.44	4.38	-
AV	2.4835G	46.86	54.00	-7.14	31.81	3	Horizontal	15	1.38	-	15.05	27.43	4.38	-
PK	2.4802G	99.20	Inf	-Inf	31.82	3	Horizontal	15	1.38	-	67.38	27.44	4.38	-
PK	2.4835G	56.48	74.00	-17.52	31.81	3	Horizontal	15	1.38	-	24.67	27.43	4.38	-

BT-LE(1Mbps)

2480MHz_TX

12/08/2020

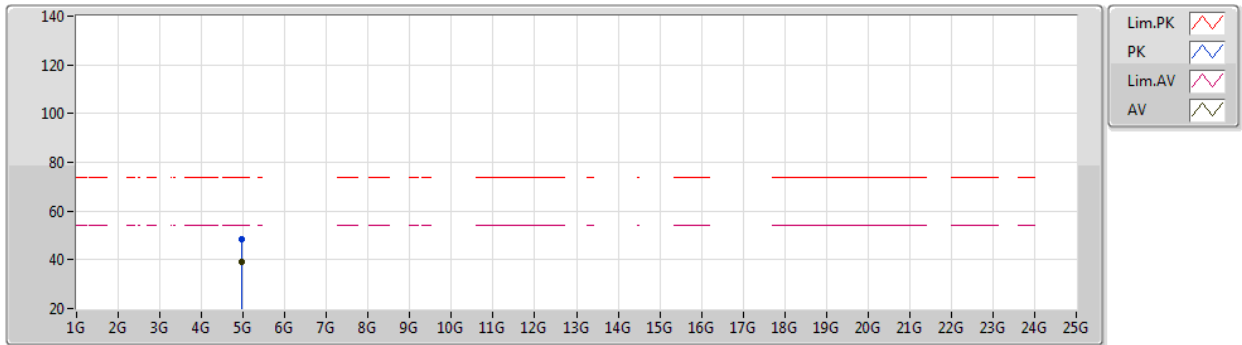


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	4.95999G	39.01	54.00	-14.99	8.52	3	Vertical	97	1.03	-	30.49	31.20	6.66	29.34
PK	4.95942G	48.28	74.00	-25.72	8.52	3	Vertical	97	1.03	-	39.76	31.20	6.66	29.34

BT-LE(1Mbps)

2480MHz_TX

12/08/2020

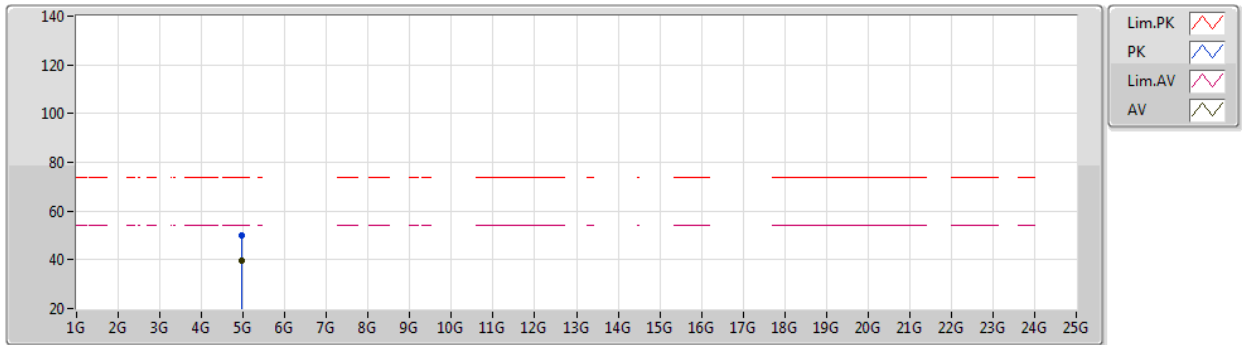


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	4.96G	39.90	54.00	-14.10	8.52	3	Horizontal	12	2.73	-	31.38	31.20	6.66	29.34
PK	4.95985G	49.80	74.00	-24.20	8.52	3	Horizontal	12	2.73	-	41.28	31.20	6.66	29.34

BT-LE(2Mbps)

2402MHz_TX

12/08/2020

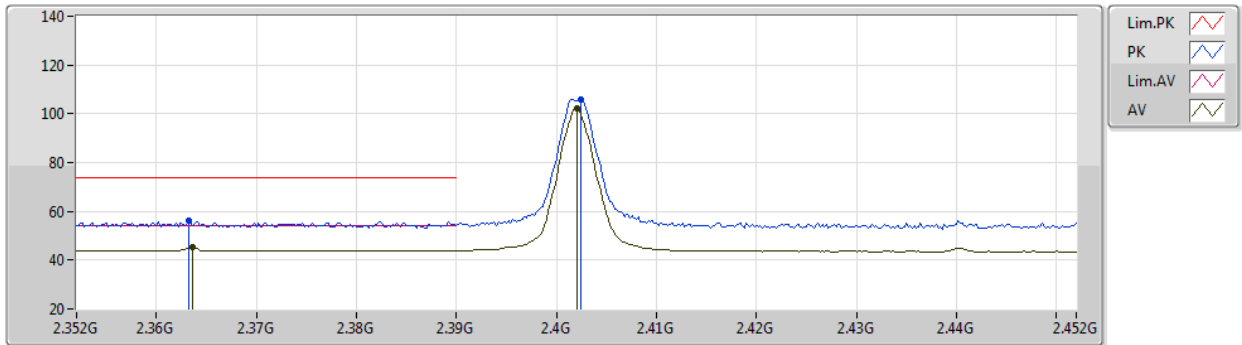


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.3636G	45.21	54.00	-8.79	31.93	3	Vertical	28	2.28	-	13.28	27.67	4.26	-
AV	2.402G	102.37	Inf	-Inf	31.90	3	Vertical	28	2.28	-	70.47	27.60	4.30	-
PK	2.3632G	56.26	74.00	-17.74	31.93	3	Vertical	28	2.28	-	24.33	27.67	4.26	-
PK	2.4024G	105.93	Inf	-Inf	31.90	3	Vertical	28	2.28	-	74.03	27.60	4.30	-

BT-LE(2Mbps)

2402MHz_TX

12/08/2020

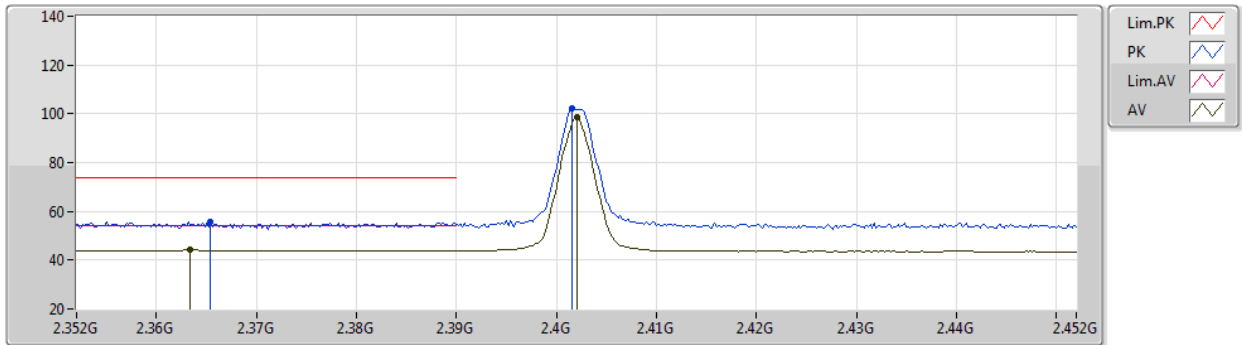


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.3634G	44.27	54.00	-9.73	31.93	3	Horizontal	50	2.74	-	12.34	27.67	4.26	-
AV	2.402G	98.45	Inf	-Inf	31.90	3	Horizontal	50	2.74	-	66.55	27.60	4.30	-
PK	2.3654G	55.80	74.00	-18.20	31.94	3	Horizontal	50	2.74	-	23.86	27.67	4.27	-
PK	2.4016G	101.99	Inf	-Inf	31.90	3	Horizontal	50	2.74	-	70.09	27.60	4.30	-

BT-LE(2Mbps)

2402MHz_TX

12/08/2020

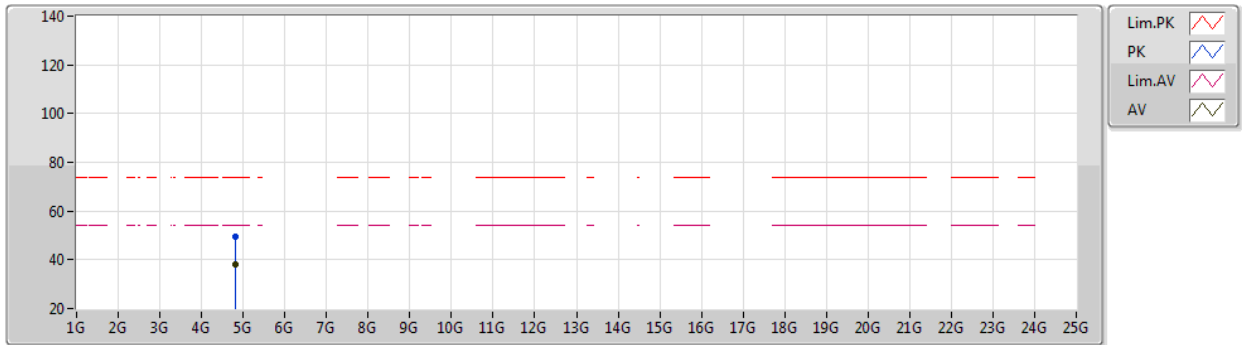


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	4.80491G	38.05	54.00	-15.95	8.19	3	Vertical	95	1.05	-	29.86	31.10	6.50	29.41
PK	4.80498G	49.64	74.00	-24.36	8.19	3	Vertical	95	1.05	-	41.45	31.10	6.50	29.41

BT-LE(2Mbps)

2402MHz_TX

12/08/2020

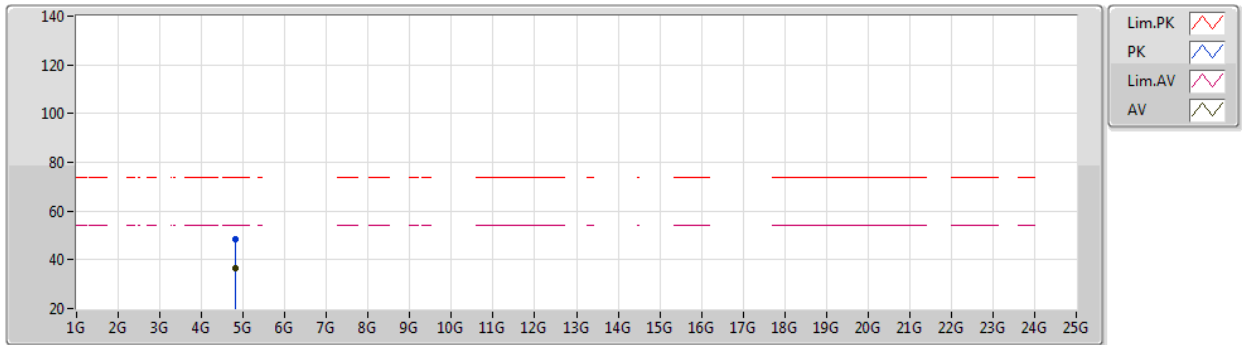


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	4.80307G	36.50	54.00	-17.50	8.19	3	Horizontal	10	2.97	-	28.31	31.10	6.50	29.41
PK	4.80284G	48.40	74.00	-25.60	8.19	3	Horizontal	10	2.97	-	40.21	31.10	6.50	29.41

BT-LE(2Mbps)

2440MHz_TX

12/08/2020

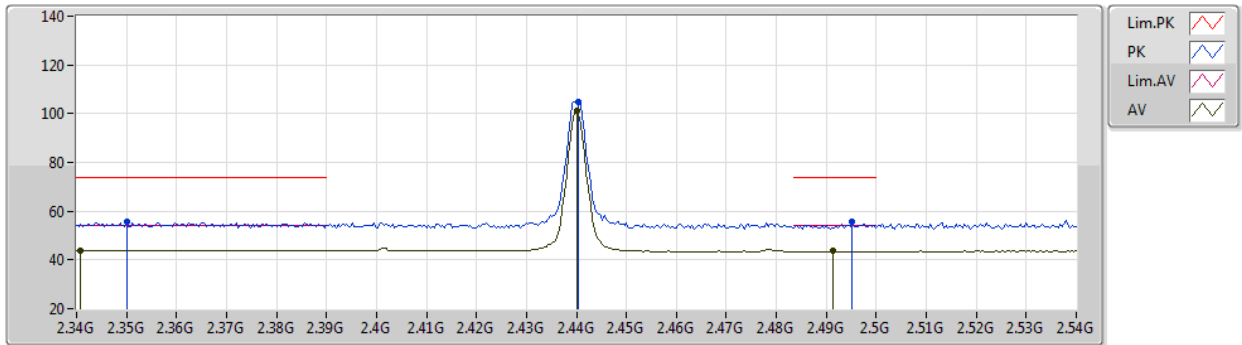


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.3408G	44.01	54.00	-9.99	31.98	3	Vertical	30	2.01	-	12.03	27.74	4.24	-
AV	2.44G	101.40	Inf	-Inf	31.86	3	Vertical	30	2.01	-	69.54	27.52	4.34	-
AV	2.4912G	43.55	54.00	-10.45	31.81	3	Vertical	30	2.01	-	11.74	27.42	4.39	-
PK	2.35G	55.59	74.00	-18.41	31.95	3	Vertical	30	2.01	-	23.64	27.70	4.25	-
PK	2.4404G	104.95	Inf	-Inf	31.86	3	Vertical	30	2.01	-	73.09	27.52	4.34	-
PK	2.4952G	55.45	74.00	-18.55	31.81	3	Vertical	30	2.01	-	23.64	27.41	4.40	-

BT-LE(2Mbps)

2440MHz_TX

12/08/2020

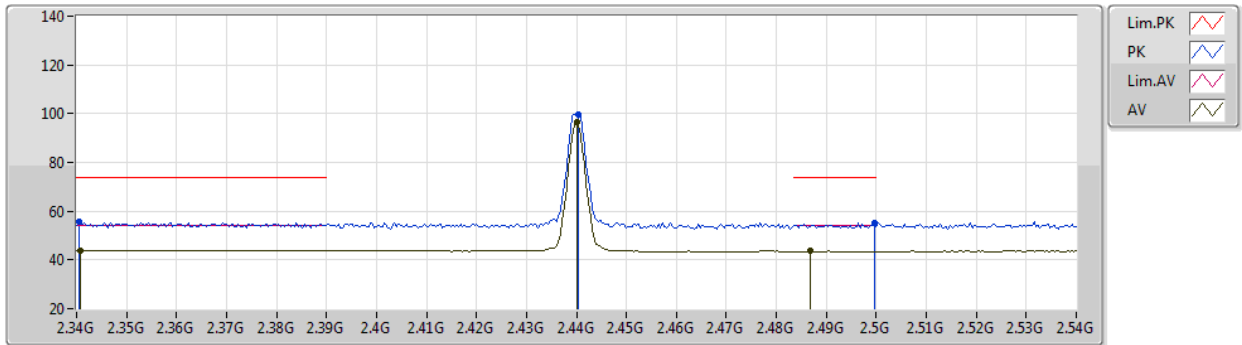


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.3408G	44.03	54.00	-9.97	31.98	3	Horizontal	14	1.48	-	12.05	27.74	4.24	-
AV	2.44G	96.31	Inf	-Inf	31.86	3	Horizontal	14	1.48	-	64.45	27.52	4.34	-
AV	2.4868G	43.55	54.00	-10.45	31.82	3	Horizontal	14	1.48	-	11.73	27.43	4.39	-
PK	2.3404G	55.61	74.00	-18.39	31.98	3	Horizontal	14	1.48	-	23.63	27.74	4.24	-
PK	2.4404G	99.85	Inf	-Inf	31.86	3	Horizontal	14	1.48	-	67.99	27.52	4.34	-
PK	2.4996G	55.34	74.00	-18.66	31.80	3	Horizontal	14	1.48	-	23.54	27.40	4.40	-

BT-LE(2Mbps)

2440MHz_TX

12/08/2020

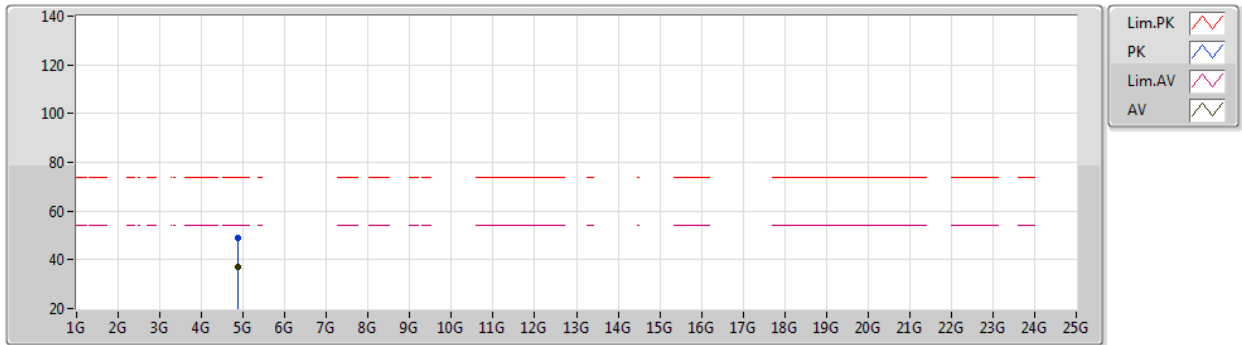


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	4.87908G	37.30	54.00	-16.70	8.30	3	Vertical	97	1.03	-	29.00	31.10	6.58	29.38
PK	4.87901G	49.11	74.00	-24.89	8.30	3	Vertical	97	1.03	-	40.81	31.10	6.58	29.38

BT-LE(2Mbps)

2440MHz_TX

12/08/2020

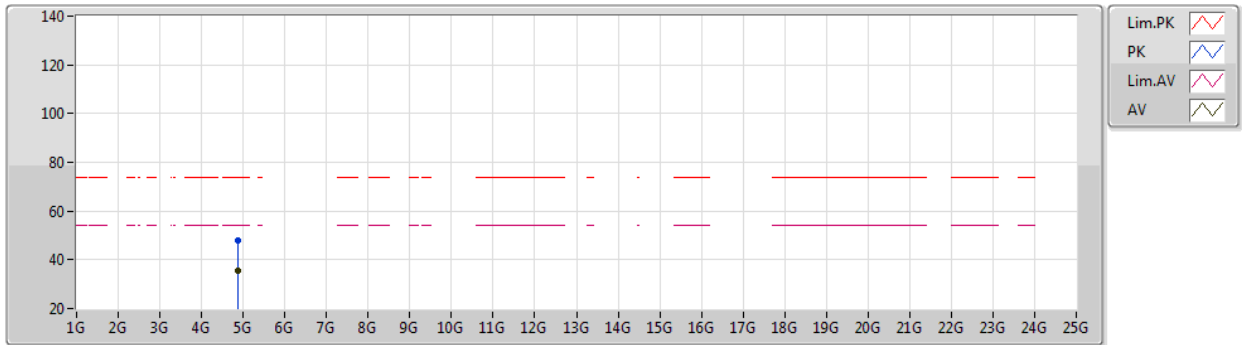


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	4.87904G	35.59	54.00	-18.41	8.30	3	Horizontal	0	2.53	-	27.29	31.10	6.58	29.38
PK	4.88102G	47.74	74.00	-26.26	8.31	3	Horizontal	0	2.53	-	39.43	31.10	6.58	29.37

BT-LE(2Mbps)

2480MHz_TX

12/08/2020

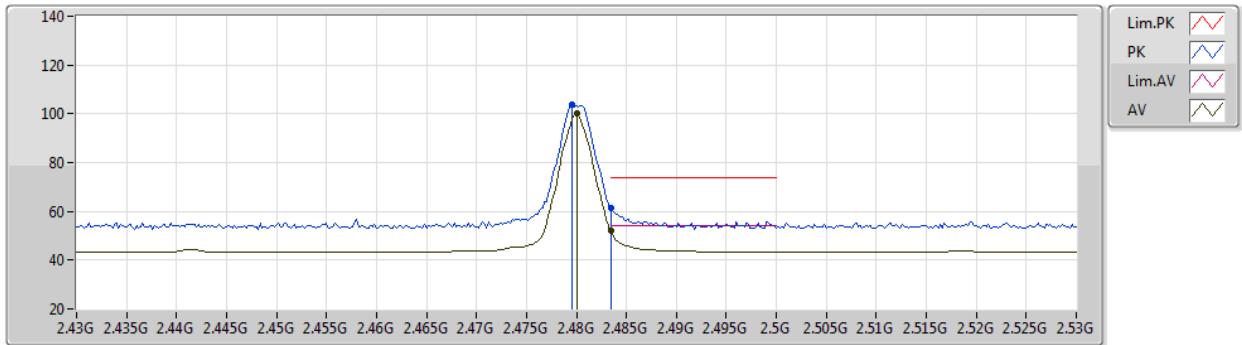


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.48G	99.99	Inf	-Inf	31.82	3	Vertical	29	2.15	-	68.17	27.44	4.38	-
AV	2.4835G	52.09	54.00	-1.91	31.81	3	Vertical	29	2.15	-	20.28	27.43	4.38	-
PK	2.4796G	103.59	Inf	-Inf	31.82	3	Vertical	29	2.15	-	71.77	27.44	4.38	-
PK	2.4835G	61.62	74.00	-12.38	31.81	3	Vertical	29	2.15	-	29.81	27.43	4.38	-

BT-LE(2Mbps)

2480MHz_TX

12/08/2020

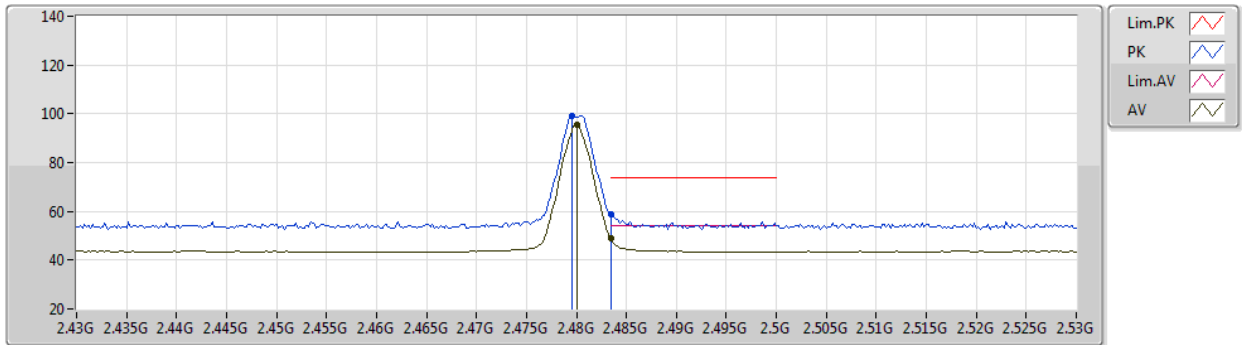


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.48G	95.67	Inf	-Inf	31.82	3	Horizontal	15	1.14	-	63.85	27.44	4.38	-
AV	2.4835G	48.71	54.00	-5.29	31.81	3	Horizontal	15	1.14	-	16.90	27.43	4.38	-
PK	2.4796G	99.21	Inf	-Inf	31.82	3	Horizontal	15	1.14	-	67.39	27.44	4.38	-
PK	2.4835G	58.62	74.00	-15.38	31.81	3	Horizontal	15	1.14	-	26.81	27.43	4.38	-

BT-LE(2Mbps)

2480MHz_TX

12/08/2020

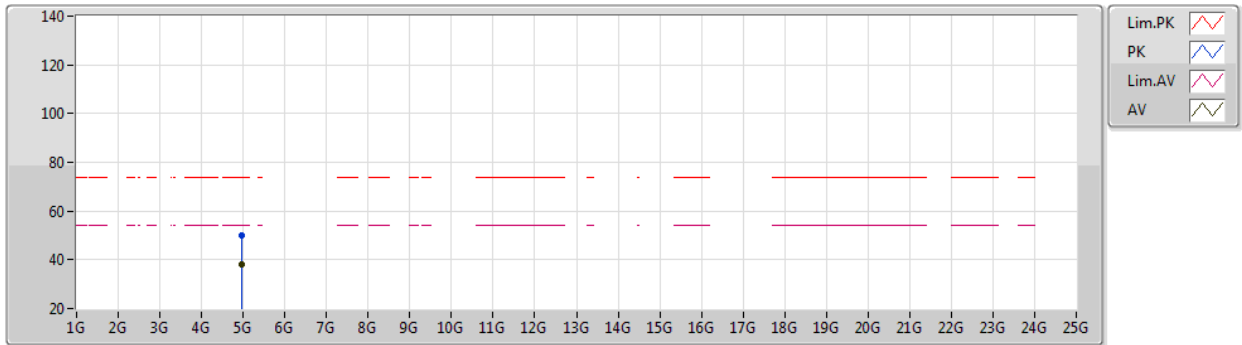


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	4.96096G	37.92	54.00	-16.08	8.52	3	Vertical	97	1.04	-	29.40	31.20	6.66	29.34
PK	4.96101G	49.89	74.00	-24.11	8.52	3	Vertical	97	1.04	-	41.37	31.20	6.66	29.34

BT-LE(2Mbps)

2480MHz_TX

12/08/2020

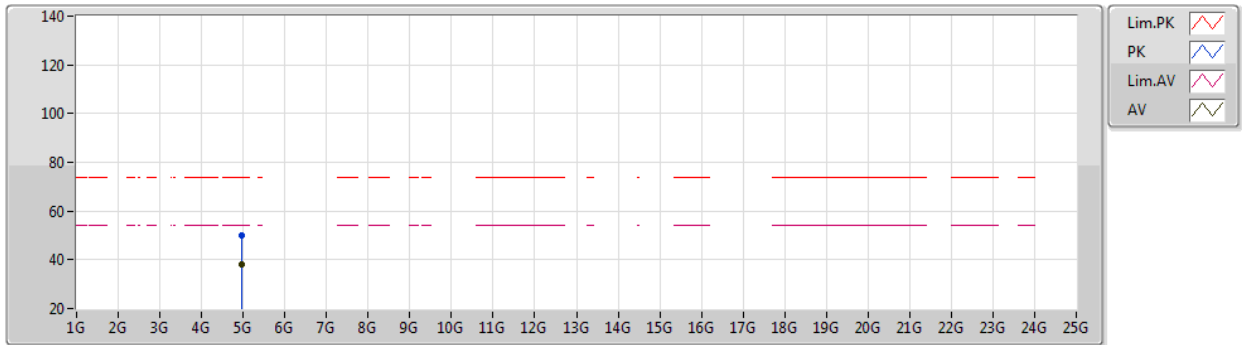

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	4.96098G	38.04	54.00	-15.96	8.52	3	Horizontal	13	2.73	-	29.52	31.20	6.66	29.34
PK	4.96103G	49.92	74.00	-24.08	8.52	3	Horizontal	13	2.73	-	41.40	31.20	6.66	29.34