

Conducted test results

No.1-8286-24-01-03_TR1-A201-R1

January 14, 2025

Test Standard(s)

NA - NI

FCC 15.247 - NI

FCC 15.247, ISED RSS247 - NI

This document is electronically signed and valid without handwritten signature.
Public keys for verification of the electronic signatures can be requested at the testing laboratory.

Authorized

Andreas Curette

Lab Manager
Radio Labs

Table of Content

NA # Peak output power 3MHz/3MHz ~ BT Classic Basic rate	3
FCC 15.247 # Maximum peak conducted output power FHSS ~ BT Classic Basic rate	9
FCC 15.247 # Number of hopping channels FHSS ~ BT Classic Basic rate	15
FCC 15.247 # Carrier frequency separation FHSS ~ BT Classic Basic rate	22
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic Basic rate	26
FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic Basic rate	37
FCC 15.247 # Maximum peak conducted output power FHSS ~ BT Classic EDR Pi/4DQPSK	45
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR Pi/4DQPSK	51
FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic EDR Pi/4DQPSK	62
FCC 15.247 # Maximum peak conducted output power FHSS ~ BT Classic EDR 8DPSK	70
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR 8DPSK	76
FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic EDR 8DPSK	87

NA # Peak output power 3MHz/3MHz ~ BT Classic Basic rate

References

TC start	13.01.2025 13:00:01
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	5.1.5.0
Standard Version	NA NI
Method	
Description	Peak OP 3MHz/3MHz - BT Classic Basic Rate
Information	

EUT Common Settings BT Classic

Intermodulation value N	3
Image freq. Low Mid High [MHz]	0 0 0
Power class	1
Power control	No
Longest supported packet type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	LOOPback
Perform inquiry	No
EUT BT address (if inquiry No)	589EC6757782
Signaling BT address	BABEBEDADBAD

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT Classic Basic rate
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/

Test Parameter

Switch bits

00010001:00010001:00000000:00000001


Test at TX 2402 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	2.93	dBm	INFO
Ref. frequency	---	---	2402.100	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.93 8.85 20
Start [MHz] Stop [MHz]	2399.500 2404.500
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

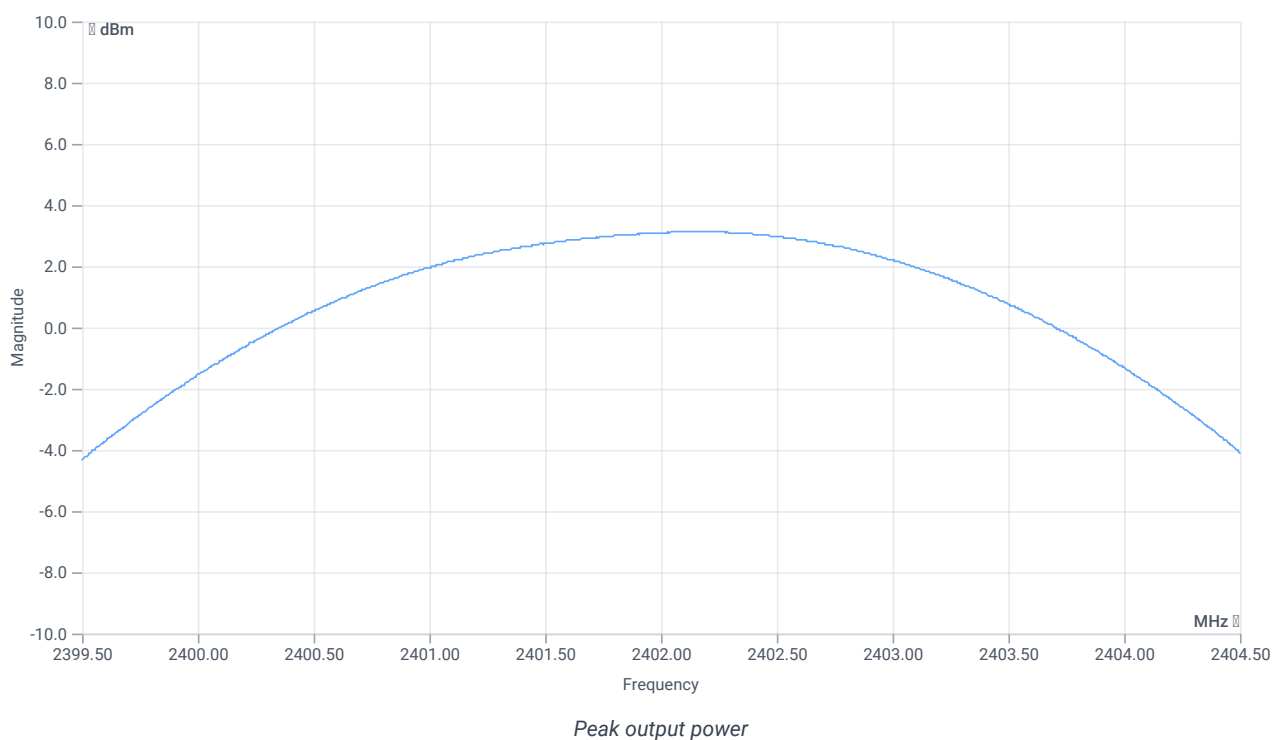

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	---	3.14	dBm	INFO
Peak power	---	---	2.06063	mW	INFO
Frequency at peak	---	---	2402.14	MHz	INFO


Test at TX 2441 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.16	dBm	INFO
Ref. frequency	---	---	2440.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.16 8.95 25
Start [MHz] Stop [MHz]	2438.500 2443.500
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

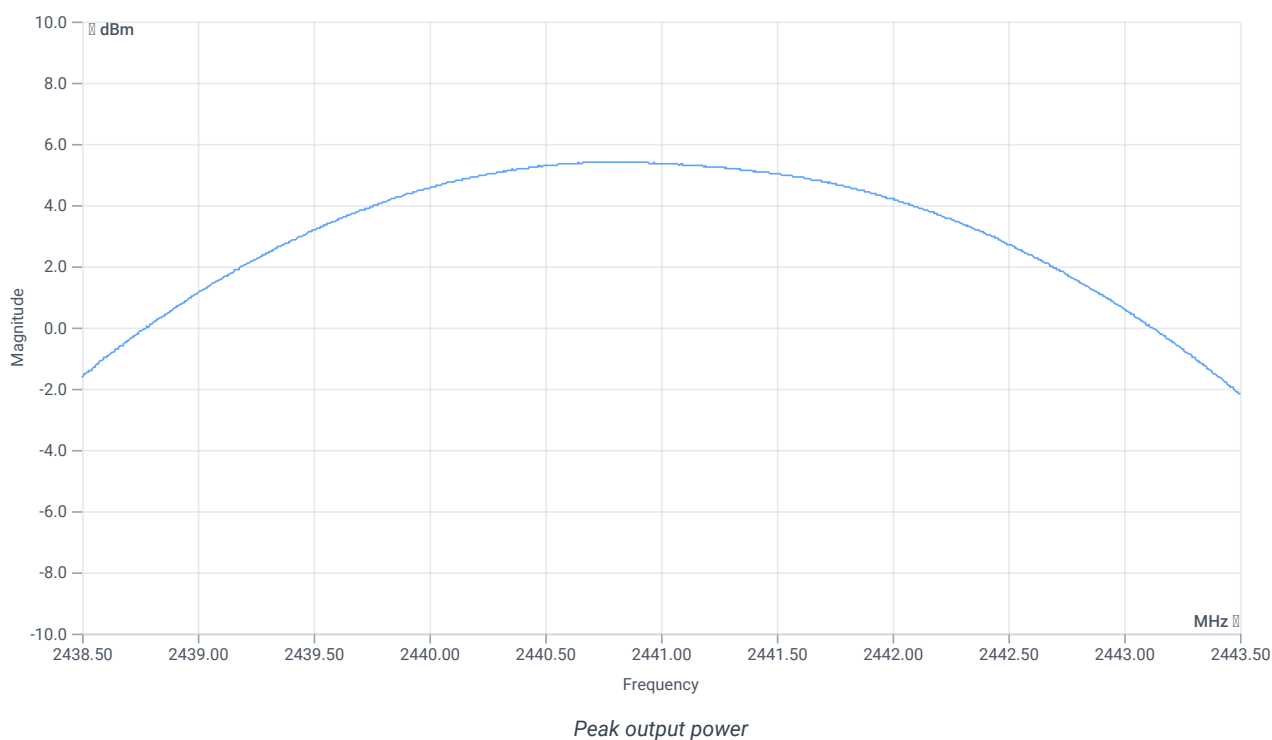

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	---	5.41	dBm	INFO
Peak power	---	---	3.475362	mW	INFO
Frequency at peak	---	---	2440.815	MHz	INFO


Test at TX 2480 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.51	dBm	INFO
Ref. frequency	---	---	2479.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.51 9.03 25
Start [MHz] Stop [MHz]	2477.500 2482.500
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

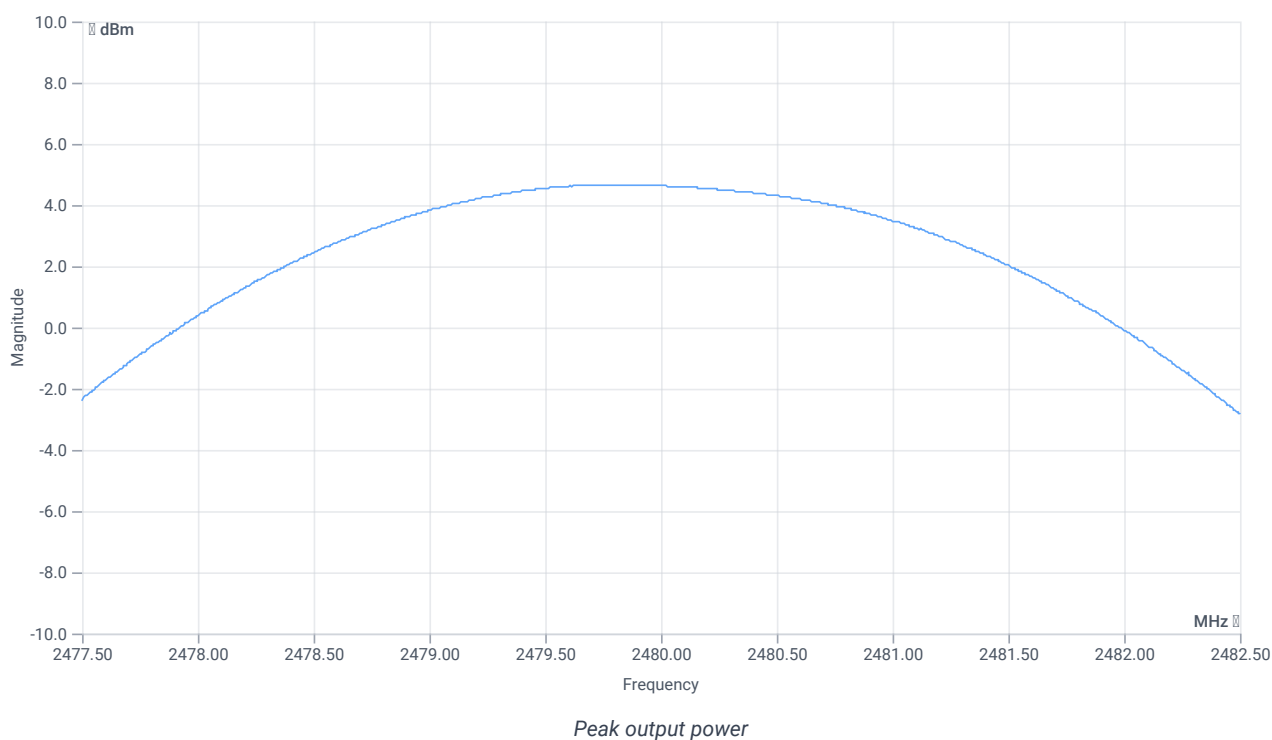

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	---	4.68	dBm	INFO
Peak power	---	---	2.93765	mW	INFO
Frequency at peak	---	---	2479.75	MHz	INFO

Verdict

PASS

FCC 15.247 # Maximum peak conducted output power FHSS ~ BT Classic Basic rate

References

TC start	13.01.2025 13:01:24
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	5.1.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Maximum peak output power conducted FHSS - BT Classic Basic Rate
Information	

EUT Common Settings BT Classic

Intermodulation value N	3
Image freq. Low Mid High [MHz]	0 0 0
Power class	1
Power control	No
Longest supported packet type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	LOOPback
Perform inquiry	No
EUT BT address (if inquiry No)	589EC6757782
Signaling BT address	BABEBEDADBAD

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT Classic Basic rate
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2402 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	2.91	dBm	INFO
Ref. frequency	---	---	2402.100	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.91 8.85 20
Start [MHz] Stop [MHz]	2399.500 2404.500
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

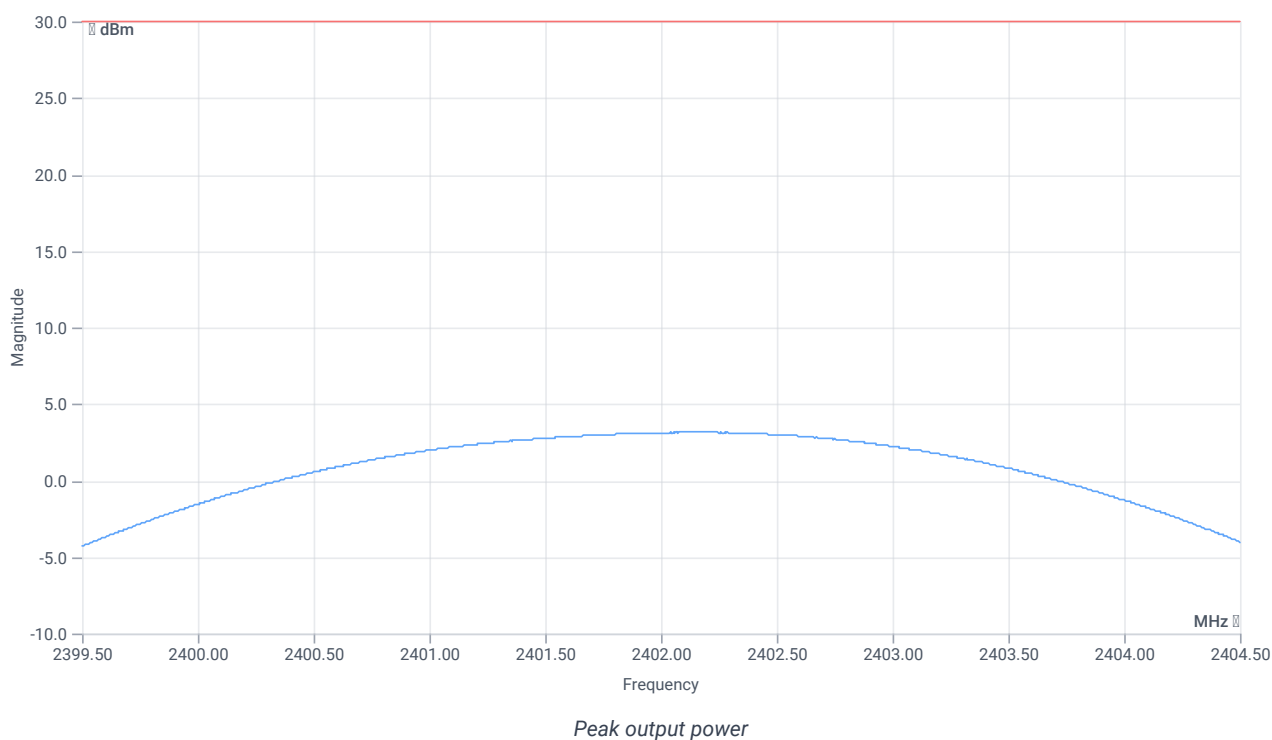

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	3.16	dBm	PASS
Peak power	---	1000	2.070141	mW	PASS
Frequency at peak	---	---	2402.17	MHz	INFO


Test at TX 2441 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.15	dBm	INFO
Ref. frequency	---	---	2440.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.15 8.95 25
Start [MHz] Stop [MHz]	2438.500 2443.500
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

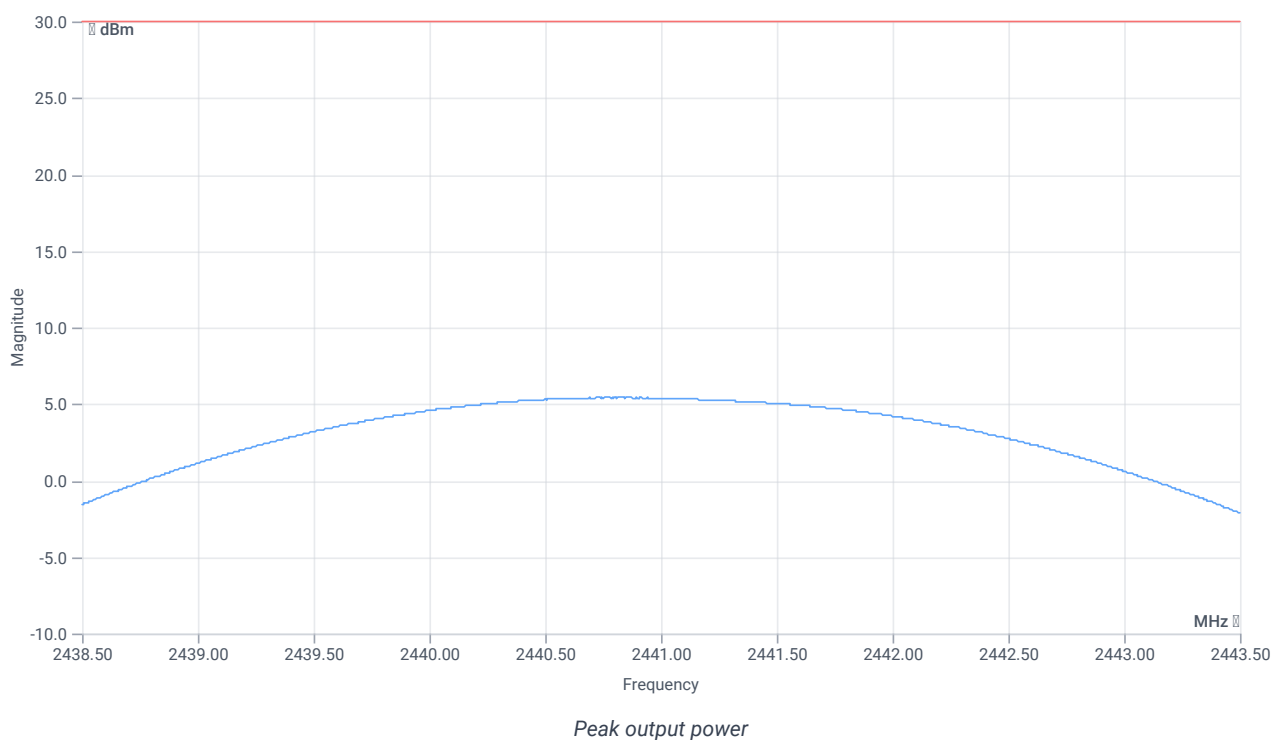

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	5.42	dBm	PASS
Peak power	---	1000	3.483373	mW	PASS
Frequency at peak	---	---	2440.8	MHz	INFO


Test at TX 2480 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.46	dBm	INFO
Ref. frequency	---	---	2479.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.46 9.03 25
Start [MHz] Stop [MHz]	2477.500 2482.500
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

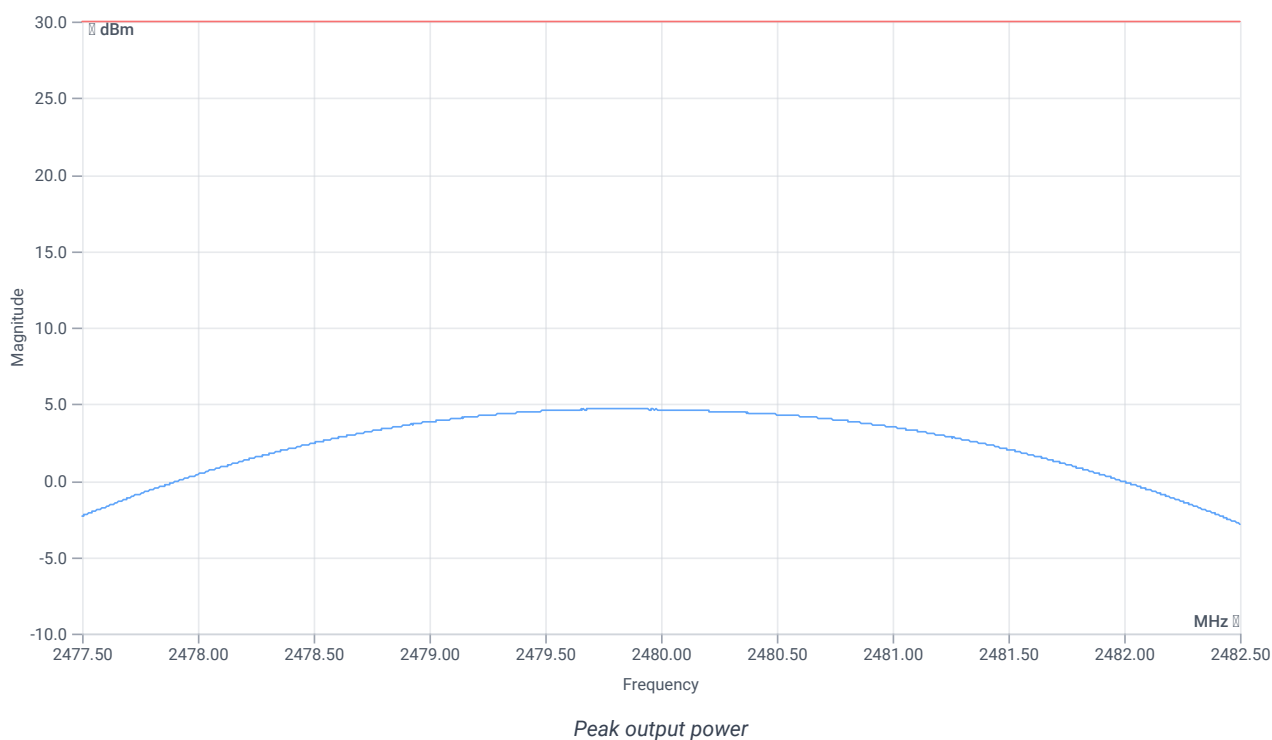

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	4.68	dBm	PASS
Peak power	---	1000	2.93765	mW	PASS
Frequency at peak	---	---	2479.86	MHz	INFO

Verdict

PASS

FCC 15.247 # Number of hopping channels FHSS ~ BT Classic Basic rate

References

TC start	13.01.2025 13:02:48
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	5.1.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Number of hopping Channels FHSS - BT Classic Basic Rate
Information	

EUT Common Settings BT Classic

Intermodulation value N	3
Image freq. Low Mid High [MHz]	0 0 0
Power class	1
Power control	No
Longest supported packet type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	LOOPback
Perform inquiry	No
EUT BT address (if inquiry No)	589EC6757782
Signaling BT address	BABEBEDADBAD

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT Classic Basic rate
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2441
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX hopping MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.32	dBm	INFO
Ref. frequency	---	---	2435.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.32 8.94 20
Start [MHz] Stop [MHz]	2399.000 2483.000
RBW [MHz] VBW [MHz]	0.200000 0.500000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 10000 1001 SWE

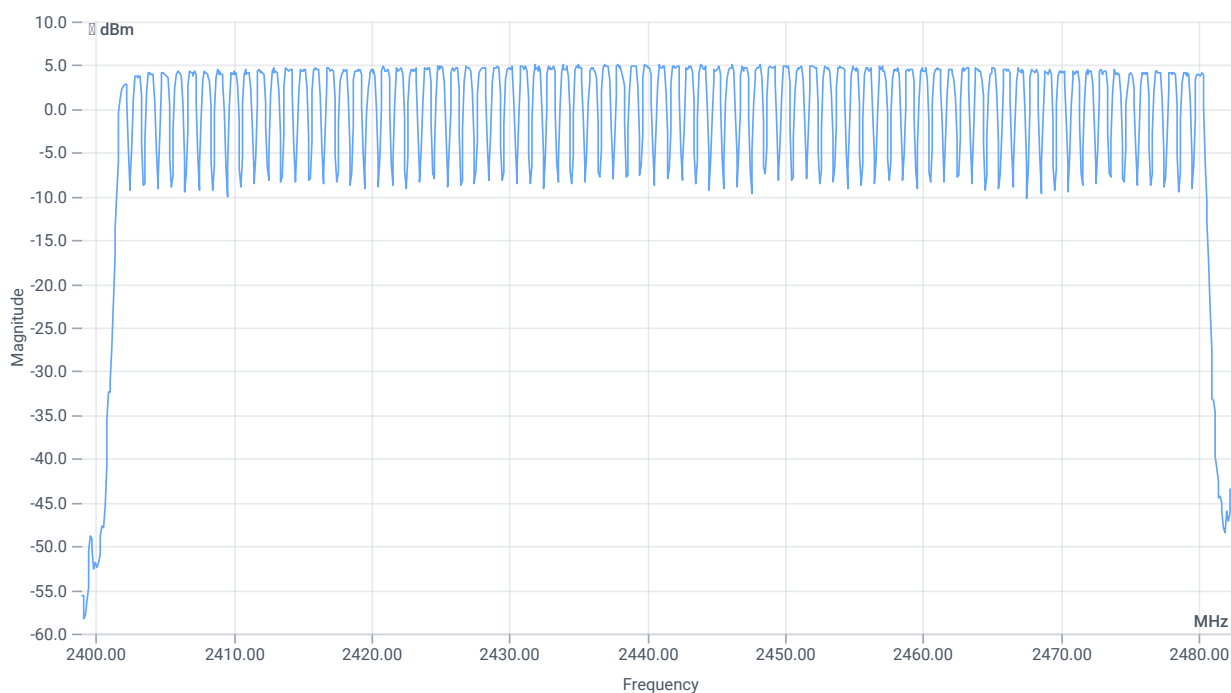

Number of hopping channels

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Hopp channel (rounded)	---	---	2402	MHz	INFO
Hopp channel (rounded)	---	---	2403	MHz	INFO
Hopp channel (rounded)	---	---	2404	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Hopp channel (rounded)	---	---	2405	MHz	INFO
Hopp channel (rounded)	---	---	2406	MHz	INFO
Hopp channel (rounded)	---	---	2407	MHz	INFO
Hopp channel (rounded)	---	---	2408	MHz	INFO
Hopp channel (rounded)	---	---	2409	MHz	INFO
Hopp channel (rounded)	---	---	2410	MHz	INFO
Hopp channel (rounded)	---	---	2411	MHz	INFO
Hopp channel (rounded)	---	---	2412	MHz	INFO
Hopp channel (rounded)	---	---	2413	MHz	INFO
Hopp channel (rounded)	---	---	2414	MHz	INFO
Hopp channel (rounded)	---	---	2415	MHz	INFO
Hopp channel (rounded)	---	---	2416	MHz	INFO
Hopp channel (rounded)	---	---	2417	MHz	INFO
Hopp channel (rounded)	---	---	2418	MHz	INFO
Hopp channel (rounded)	---	---	2419	MHz	INFO
Hopp channel (rounded)	---	---	2420	MHz	INFO
Hopp channel (rounded)	---	---	2421	MHz	INFO
Hopp channel (rounded)	---	---	2422	MHz	INFO
Hopp channel (rounded)	---	---	2423	MHz	INFO
Hopp channel (rounded)	---	---	2424	MHz	INFO
Hopp channel (rounded)	---	---	2425	MHz	INFO
Hopp channel (rounded)	---	---	2426	MHz	INFO
Hopp channel (rounded)	---	---	2427	MHz	INFO
Hopp channel (rounded)	---	---	2428	MHz	INFO
Hopp channel (rounded)	---	---	2429	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Hopp channel (rounded)	---	---	2430	MHz	INFO
Hopp channel (rounded)	---	---	2431	MHz	INFO
Hopp channel (rounded)	---	---	2432	MHz	INFO
Hopp channel (rounded)	---	---	2433	MHz	INFO
Hopp channel (rounded)	---	---	2434	MHz	INFO
Hopp channel (rounded)	---	---	2435	MHz	INFO
Hopp channel (rounded)	---	---	2436	MHz	INFO
Hopp channel (rounded)	---	---	2437	MHz	INFO
Hopp channel (rounded)	---	---	2438	MHz	INFO
Hopp channel (rounded)	---	---	2439	MHz	INFO
Hopp channel (rounded)	---	---	2440	MHz	INFO
Hopp channel (rounded)	---	---	2441	MHz	INFO
Hopp channel (rounded)	---	---	2442	MHz	INFO
Hopp channel (rounded)	---	---	2443	MHz	INFO
Hopp channel (rounded)	---	---	2444	MHz	INFO
Hopp channel (rounded)	---	---	2445	MHz	INFO
Hopp channel (rounded)	---	---	2446	MHz	INFO
Hopp channel (rounded)	---	---	2447	MHz	INFO
Hopp channel (rounded)	---	---	2448	MHz	INFO
Hopp channel (rounded)	---	---	2449	MHz	INFO
Hopp channel (rounded)	---	---	2450	MHz	INFO
Hopp channel (rounded)	---	---	2451	MHz	INFO
Hopp channel (rounded)	---	---	2452	MHz	INFO
Hopp channel (rounded)	---	---	2453	MHz	INFO
Hopp channel (rounded)	---	---	2454	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Hopp channel (rounded)	---	---	2455	MHz	INFO
Hopp channel (rounded)	---	---	2456	MHz	INFO
Hopp channel (rounded)	---	---	2457	MHz	INFO
Hopp channel (rounded)	---	---	2458	MHz	INFO
Hopp channel (rounded)	---	---	2459	MHz	INFO
Hopp channel (rounded)	---	---	2460	MHz	INFO
Hopp channel (rounded)	---	---	2461	MHz	INFO
Hopp channel (rounded)	---	---	2462	MHz	INFO
Hopp channel (rounded)	---	---	2463	MHz	INFO
Hopp channel (rounded)	---	---	2464	MHz	INFO
Hopp channel (rounded)	---	---	2465	MHz	INFO
Hopp channel (rounded)	---	---	2466	MHz	INFO
Hopp channel (rounded)	---	---	2467	MHz	INFO
Hopp channel (rounded)	---	---	2468	MHz	INFO
Hopp channel (rounded)	---	---	2469	MHz	INFO
Hopp channel (rounded)	---	---	2470	MHz	INFO
Hopp channel (rounded)	---	---	2471	MHz	INFO
Hopp channel (rounded)	---	---	2472	MHz	INFO
Hopp channel (rounded)	---	---	2473	MHz	INFO
Hopp channel (rounded)	---	---	2474	MHz	INFO
Hopp channel (rounded)	---	---	2475	MHz	INFO
Hopp channel (rounded)	---	---	2476	MHz	INFO
Hopp channel (rounded)	---	---	2477	MHz	INFO
Hopp channel (rounded)	---	---	2478	MHz	INFO
Hopp channel (rounded)	---	---	2479	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Hopp channel (rounded)	---	---	2480	MHz	INFO
Σ Hopping channels	15	---	79	Number	PASS

Verdict

PASS

FCC 15.247 # Carrier frequency separation FHSS ~ BT Classic Basic rate

References

TC start	13.01.2025 13:03:34
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	5.1.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Carrier frequency separation FHSS - BT Classic Basic Rate
Information	

EUT Common Settings BT Classic

Intermodulation value N	3
Image freq. Low Mid High [MHz]	0 0 0
Power class	1
Power control	No
Longest supported packet type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	LOOPback
Perform inquiry	No
EUT BT address (if inquiry No)	589EC6757782
Signaling BT address	BABEBEDADBAD

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT Classic Basic rate
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2441
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX hopping MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.32	dBm	INFO
Ref. frequency	---	---	2436.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.32 8.94 20
Start [MHz] Stop [MHz]	2435.500 2445.500
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 20000 1001 SWE

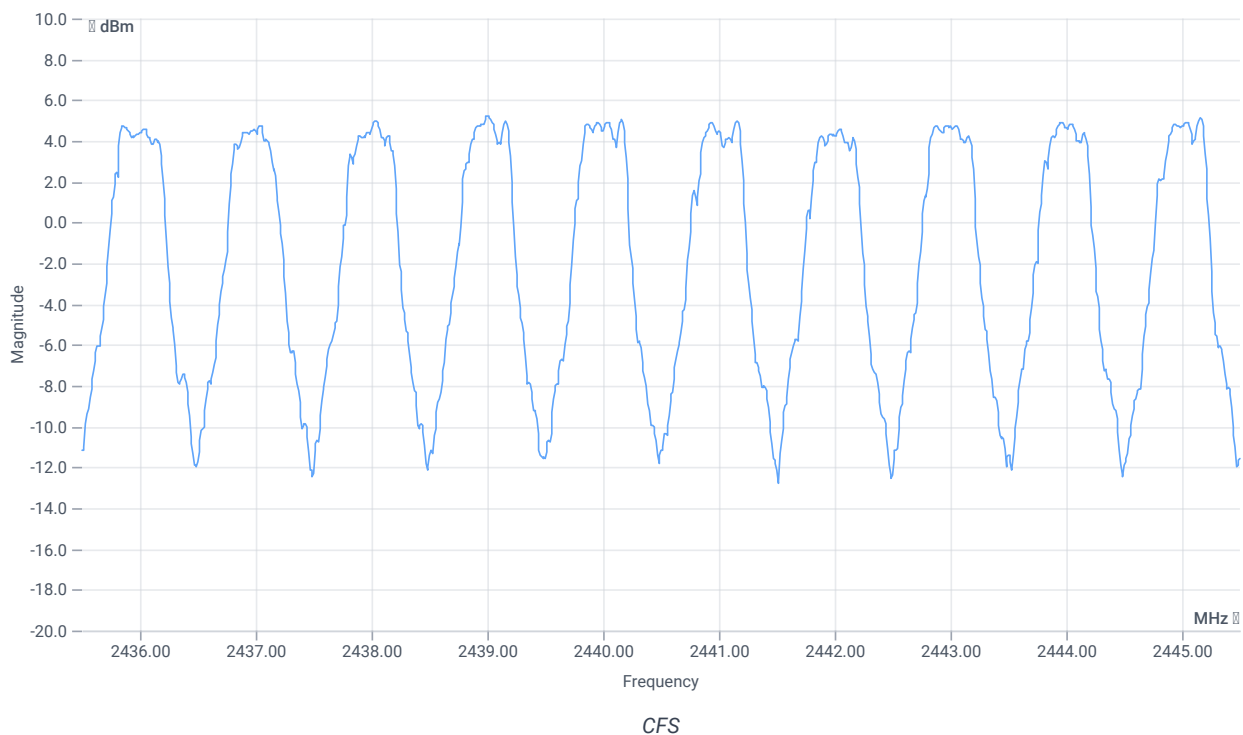

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
1 CFS n to n+1 (rnd)	0.025	---	1	MHz	PASS
1 CFS n to n+1 (rnd)	0.667 (2/3 Nom.BW)	---	1	MHz	PASS
2 CFS n to n+1 (rnd)	0.025	---	1	MHz	PASS
2 CFS n to n+1 (rnd)	0.667 (2/3 Nom.BW)	---	1	MHz	PASS
3 CFS n to n+1 (rnd)	0.025	---	1	MHz	PASS

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
3 CFS n to n+1 (rnd)	0.667 (2/3 Nom.BW)	---	1	MHz	PASS
4 CFS n to n+1 (rnd)	0.025	---	1	MHz	PASS
4 CFS n to n+1 (rnd)	0.667 (2/3 Nom.BW)	---	1	MHz	PASS
5 CFS n to n+1 (rnd)	0.025	---	1	MHz	PASS
5 CFS n to n+1 (rnd)	0.667 (2/3 Nom.BW)	---	1	MHz	PASS
6 CFS n to n+1 (rnd)	0.025	---	1	MHz	PASS
6 CFS n to n+1 (rnd)	0.667 (2/3 Nom.BW)	---	1	MHz	PASS
7 CFS n to n+1 (rnd)	0.025	---	1	MHz	PASS
7 CFS n to n+1 (rnd)	0.667 (2/3 Nom.BW)	---	1	MHz	PASS
8 CFS n to n+1 (rnd)	0.025	---	1	MHz	PASS
8 CFS n to n+1 (rnd)	0.667 (2/3 Nom.BW)	---	1	MHz	PASS
9 CFS n to n+1 (rnd)	0.025	---	1	MHz	PASS
9 CFS n to n+1 (rnd)	0.667 (2/3 Nom.BW)	---	1	MHz	PASS
Carrier freq. (rnd)	---	---	2436	MHz	INFO
Carrier freq. (rnd)	---	---	2437	MHz	INFO
Carrier freq. (rnd)	---	---	2438	MHz	INFO
Carrier freq. (rnd)	---	---	2439	MHz	INFO
Carrier freq. (rnd)	---	---	2440	MHz	INFO
Carrier freq. (rnd)	---	---	2441	MHz	INFO
Carrier freq. (rnd)	---	---	2442	MHz	INFO
Carrier freq. (rnd)	---	---	2443	MHz	INFO
Carrier freq. (rnd)	---	---	2444	MHz	INFO
Carrier freq. (rnd)	---	---	2445	MHz	INFO

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic Basic rate

References

TC start	13.01.2025 13:05:34
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	5.1.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT - 20dB FHSS - BT Classic Basic Rate
Information	

EUT Common Settings BT Classic

Intermodulation value N	3
Image freq. Low Mid High [MHz]	0 0 0
Power class	1
Power control	No
Longest supported packet type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	LOOPback
Perform inquiry	No
EUT BT address (if inquiry No)	589EC6757782
Signaling BT address	BABEBEDADBAD

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT Classic Basic rate
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path type	EUT_SA_GEN_SIG

Test Parameter

Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2402 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	2.97	dBm	INFO
Ref. frequency	---	---	2402.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.97 8.85 15
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

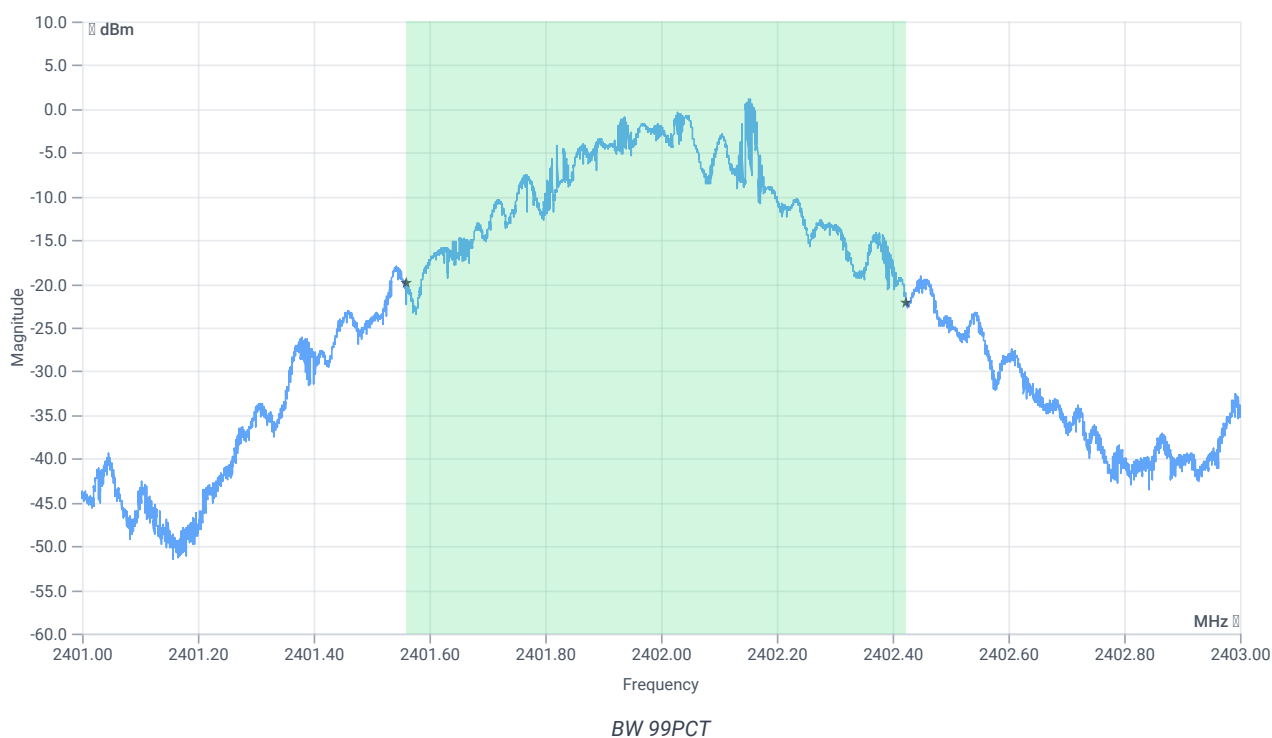


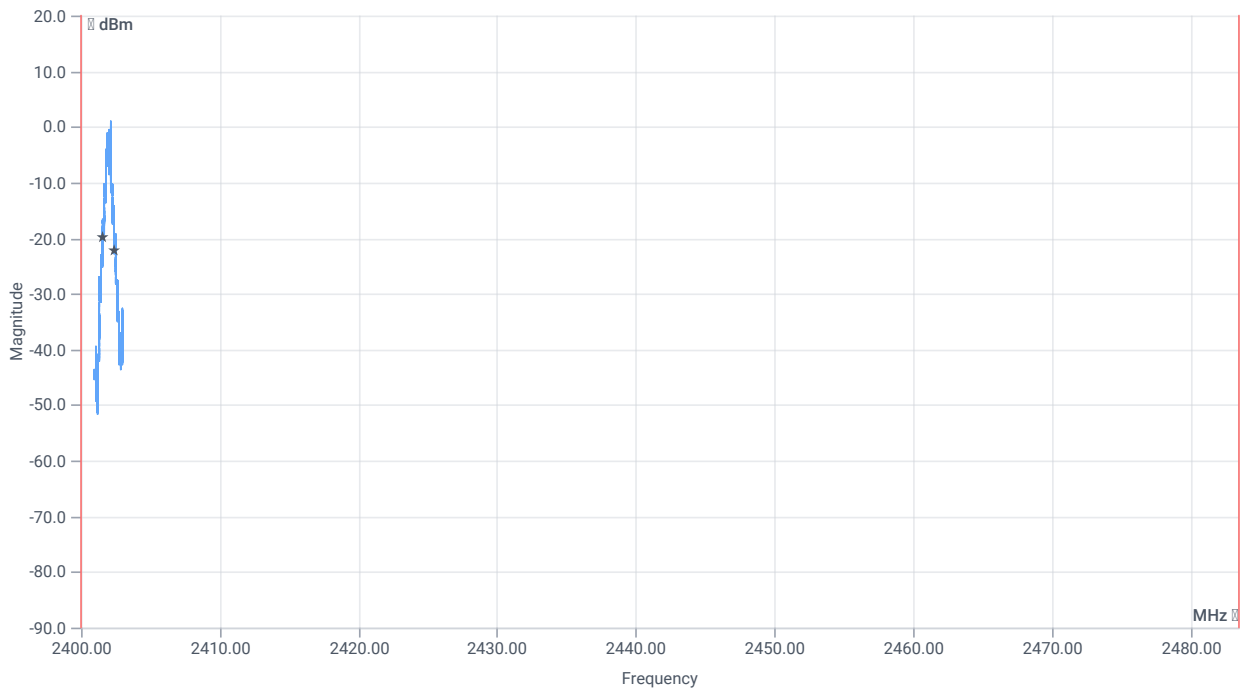


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	864.000	kHz	INFO
T1 99%	2400.000000	---	2401.5596	MHz	PASS
T2 99%	---	2483.500000	2402.4240	MHz	PASS

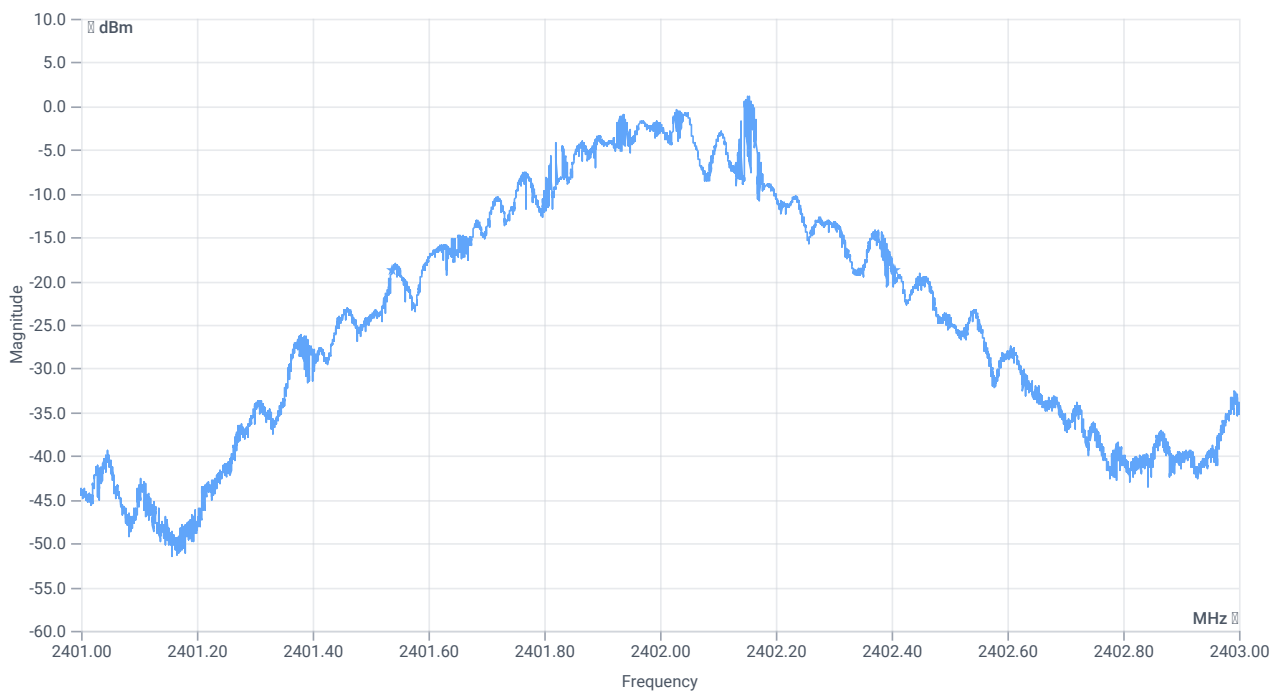

BW 20dB

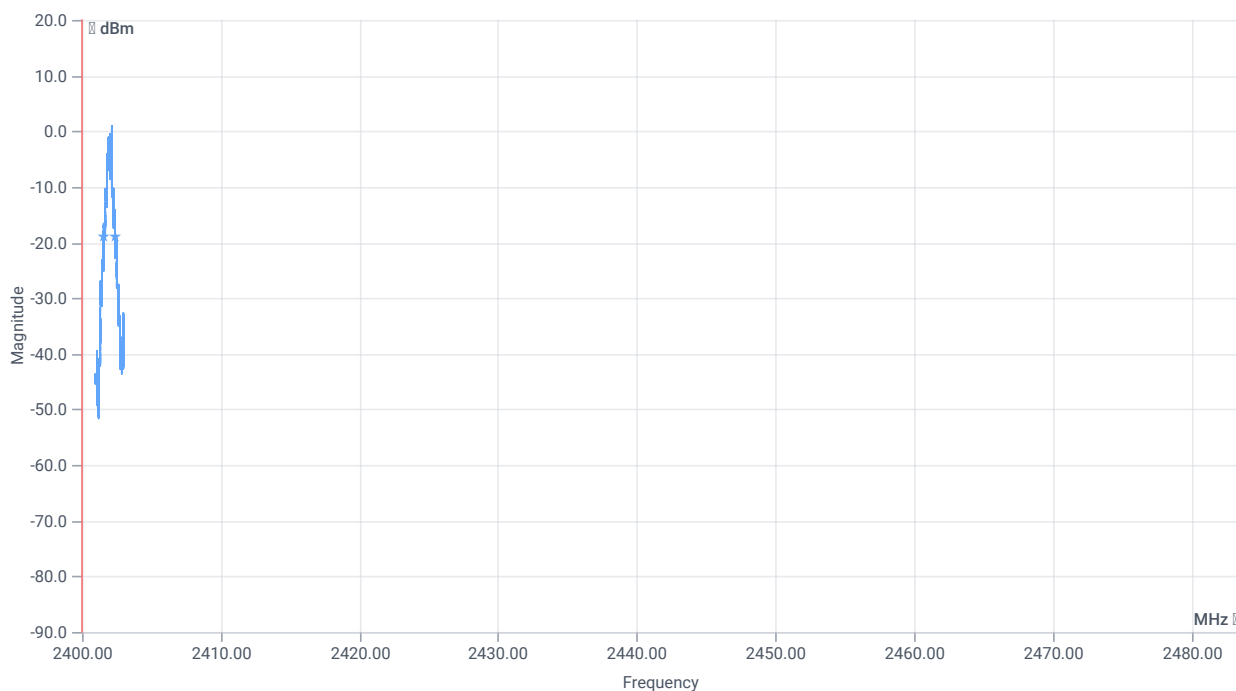

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	868	kHz	INFO
T1 20dB	2400.000000	---	2401.5370	MHz	PASS
T2 20dB	---	2483.500000	2402.4048	MHz	PASS


Test at TX 2441 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.19	dBm	INFO
Ref. frequency	---	---	2440.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.19 8.95 20
Start [MHz] Stop [MHz]	2440.000 2442.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

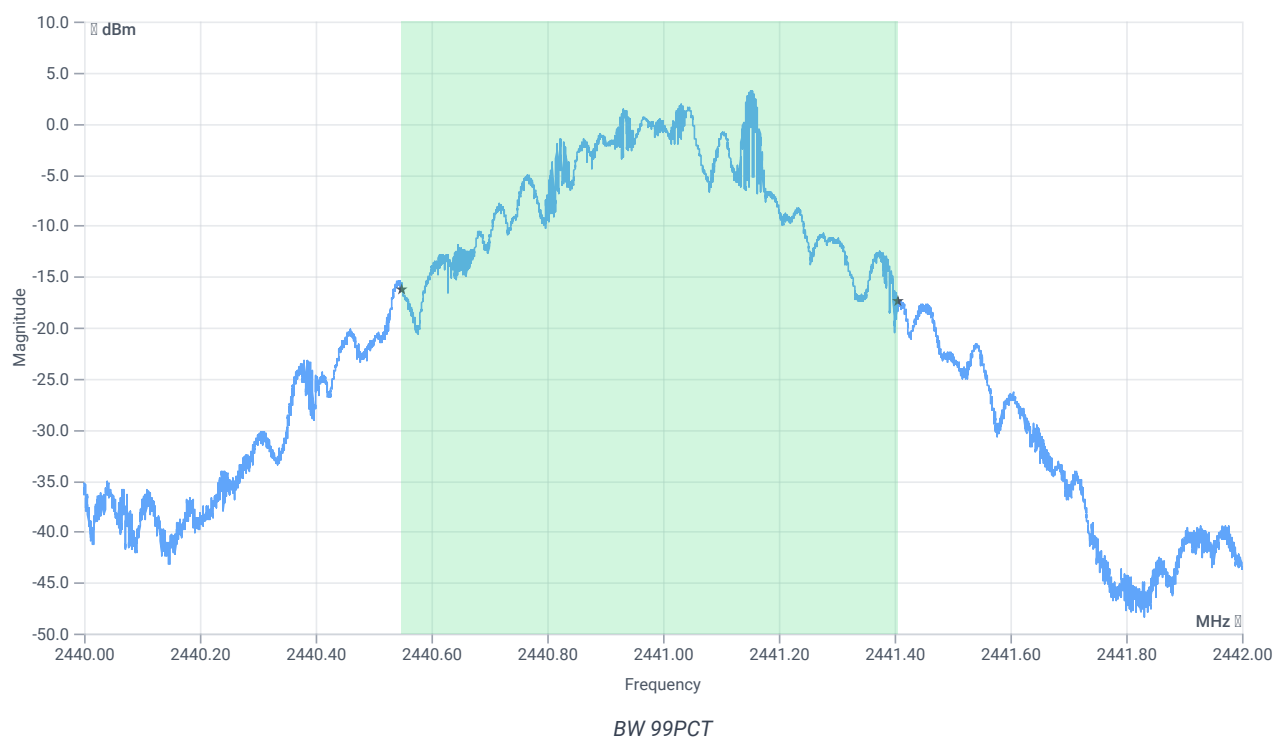

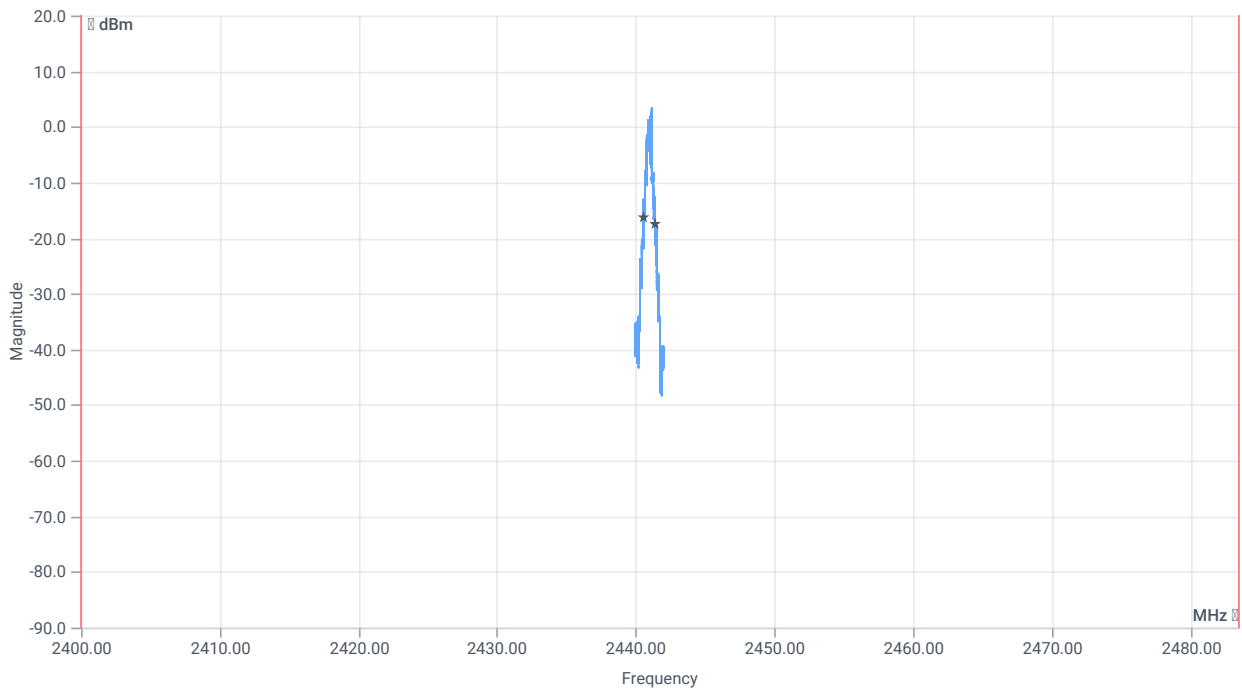


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	855.000	kHz	INFO
T1 99%	2400.000000	---	2440.5496	MHz	PASS
T2 99%	---	2483.500000	2441.4050	MHz	PASS



BW 20dB

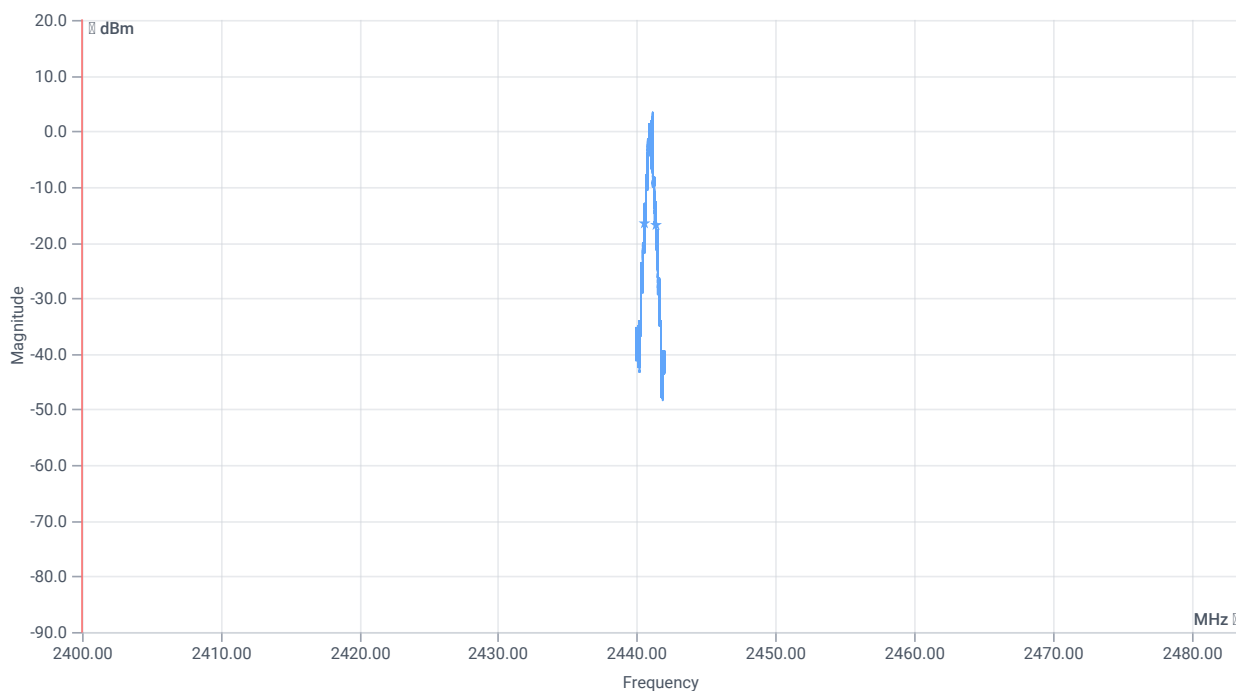

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	868	kHz	INFO
T1 20dB	2400.000000	---	2440.5338	MHz	PASS
T2 20dB	---	2483.500000	2441.4020	MHz	PASS


Test at TX 2480 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.49	dBm	INFO
Ref. frequency	---	---	2479.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.49 9.03 20
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

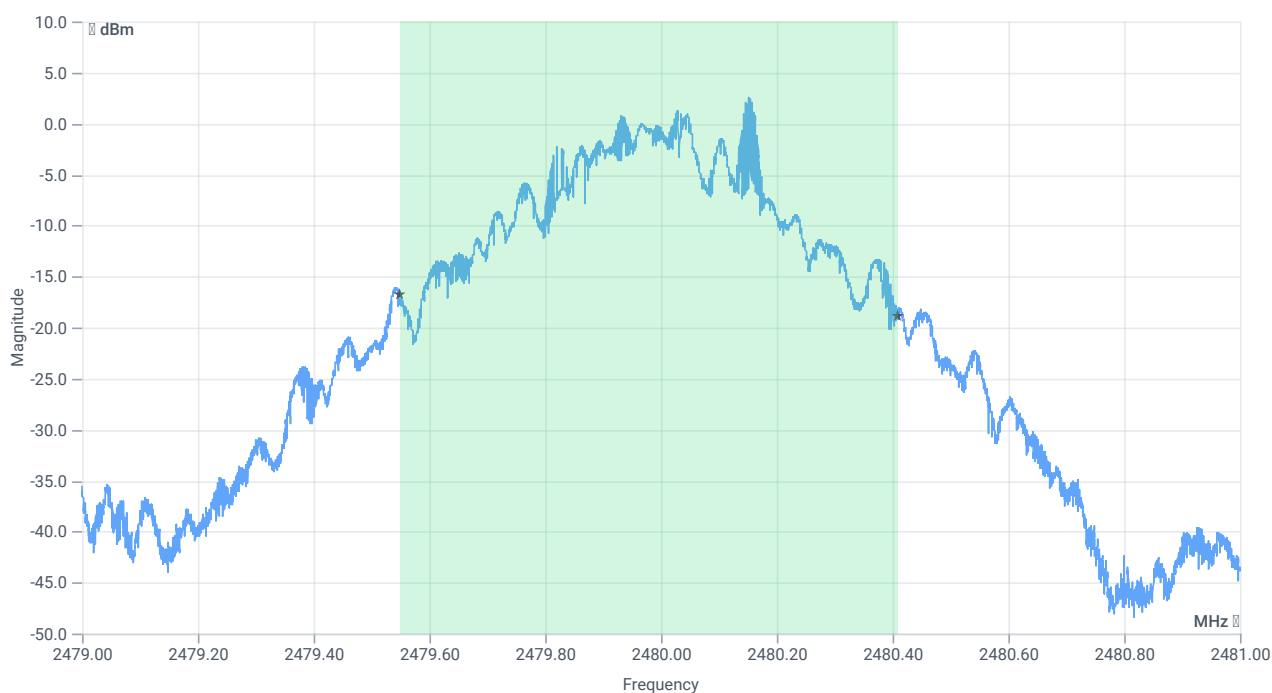

BW 99PCT

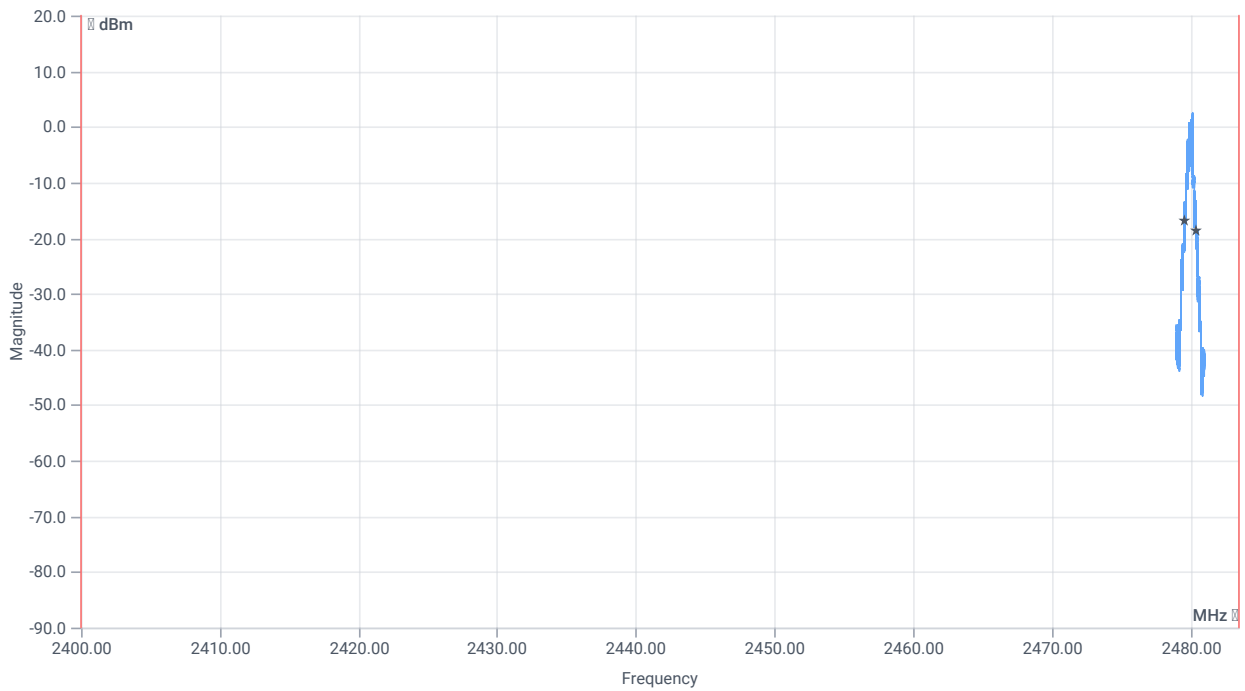


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	859.000	kHz	INFO
T1 99%	2400.000000	---	2479.5486	MHz	PASS
T2 99%	---	2483.500000	2480.4074	MHz	PASS



BW 20dB

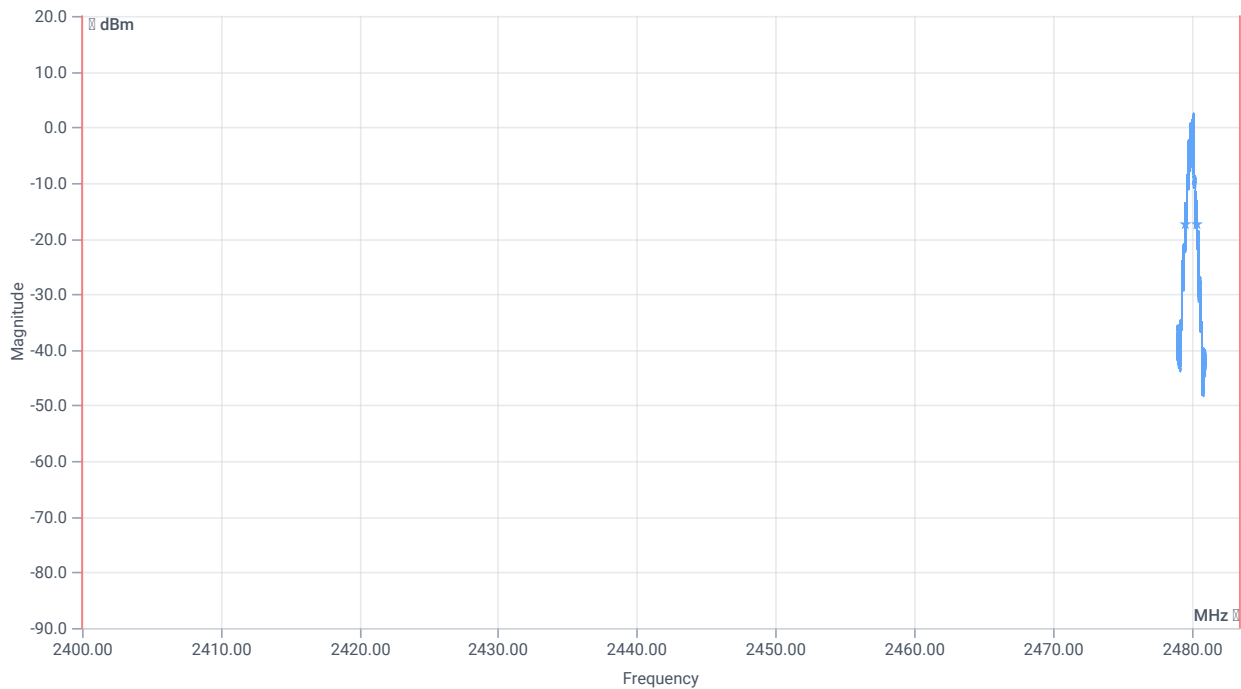

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	868	kHz	INFO
T1 20dB	2400.000000	---	2479.5334	MHz	PASS
T2 20dB	---	2483.500000	2480.4014	MHz	PASS

Verdict
PASS

FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic Basic rate

References

TC start	13.01.2025 14:36:44
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	5.1.5.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX emissions conducted FHSS - BT Classic Basic Rate
Information	

EUT Common Settings BT Classic

Intermodulation value N	3
Image freq. Low Mid High [MHz]	0 0 0
Power class	1
Power control	No
Longest supported packet type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	LOOPback
Perform inquiry	No
EUT BT address (if inquiry No)	589EC6757782
Signaling BT address	BABEBEDADBAD

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT Classic Basic rate
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path type	EUT_SA_GEN_SIG


Test Parameter

Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2402 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	2.98	dBm	INFO
Ref. frequency	---	---	2402.100	MHz	INFO

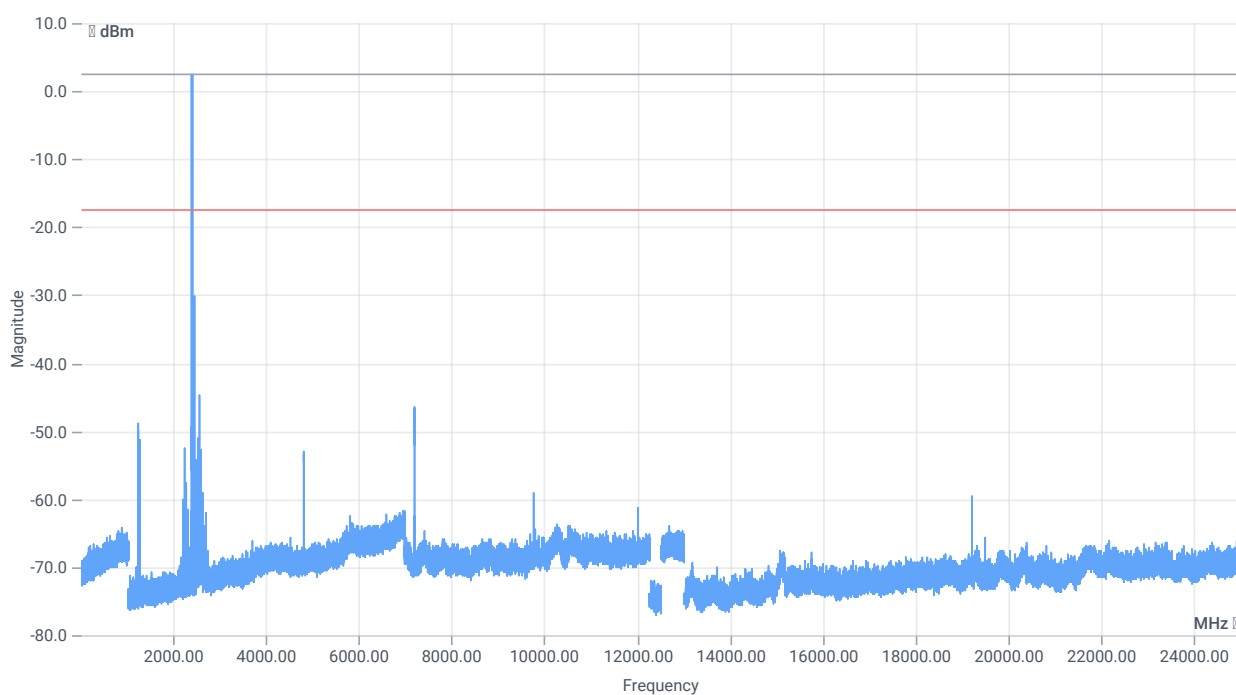

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.98 17.03 5
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

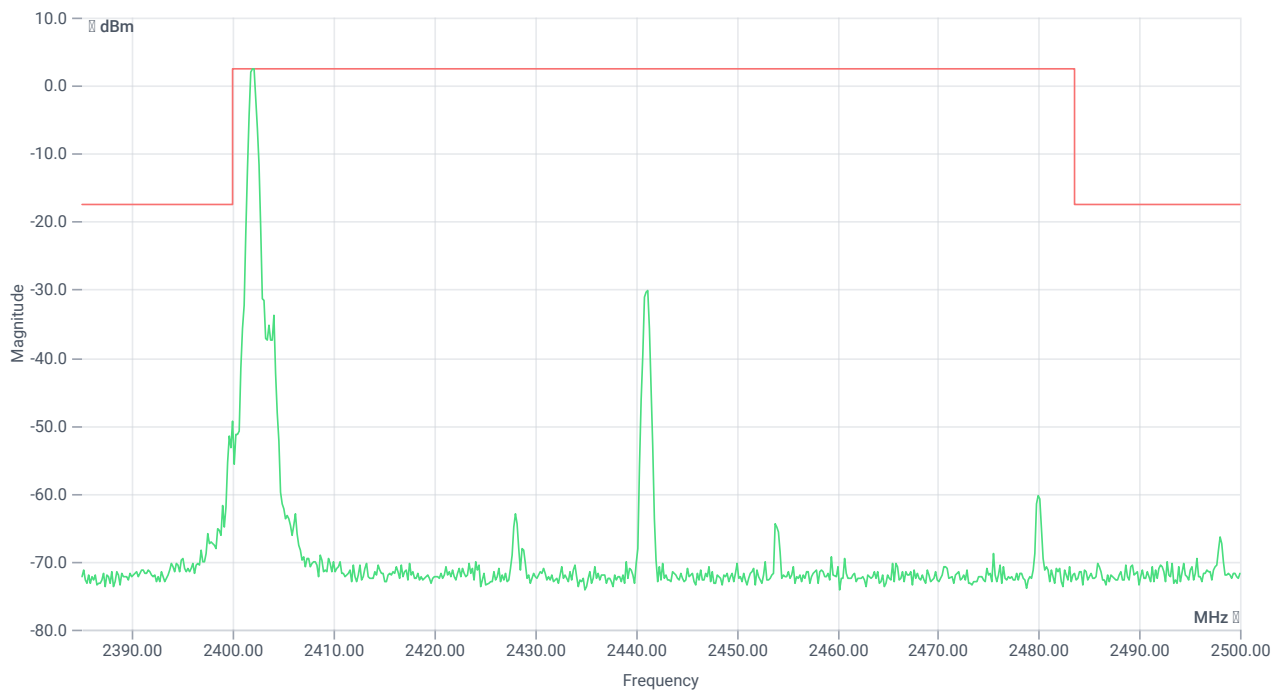


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2402.17 MHz	---	---	2.54	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 30 MHz	0	---	-129.66	dB	INFO

Test at TX 2441 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.29	dBm	INFO
Ref. frequency	---	---	2440.800	MHz	INFO

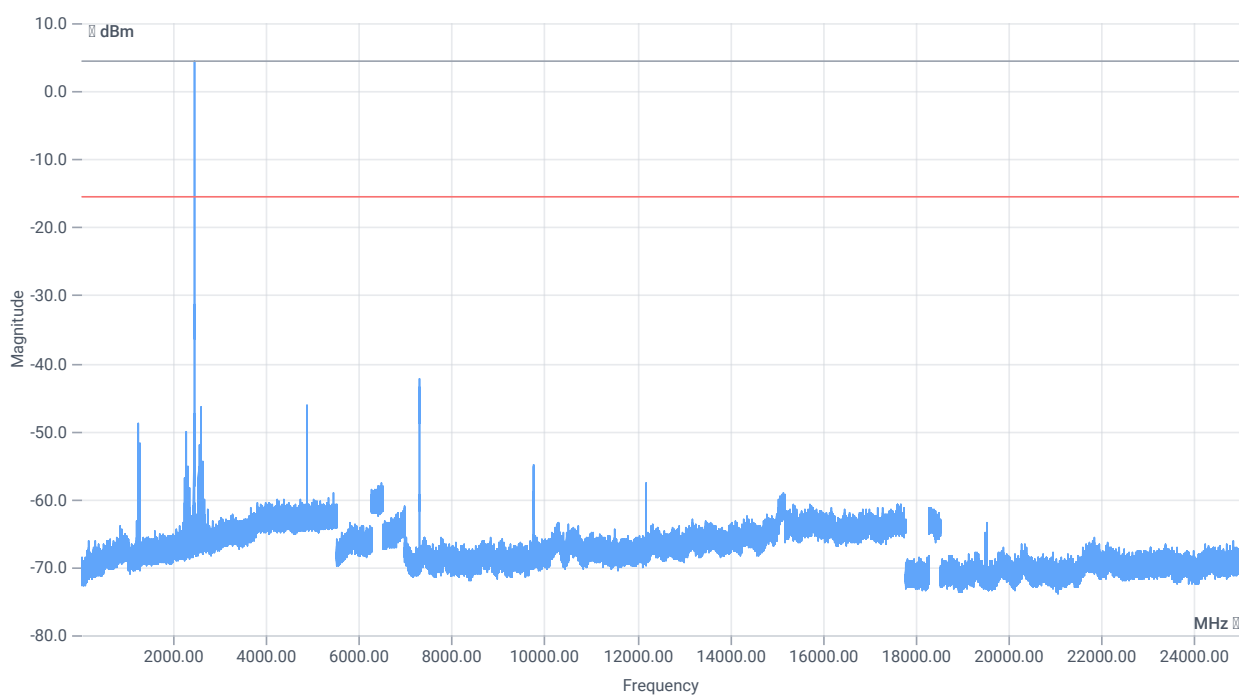

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.29 17.03 5
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

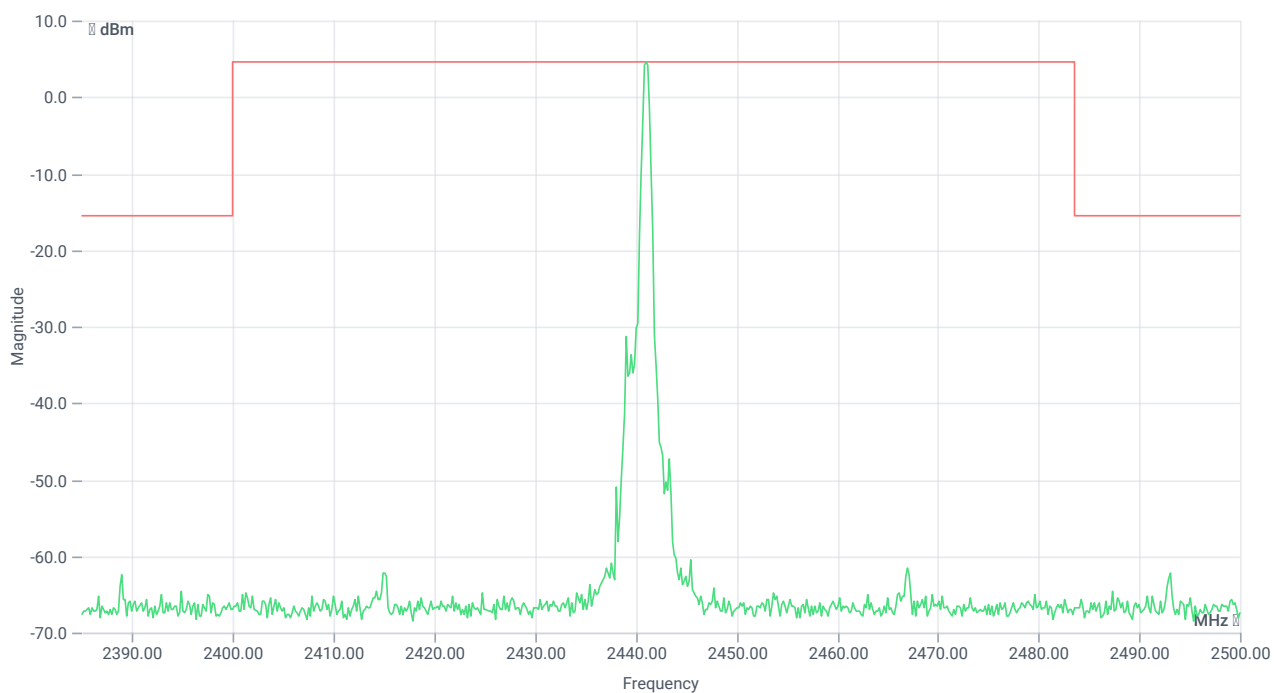


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2441.00 MHz	---	---	4.51	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 7323.333 MHz	0	---	26.93	dB	INFO

Test at TX 2480 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.58	dBm	INFO
Ref. frequency	---	---	2479.800	MHz	INFO

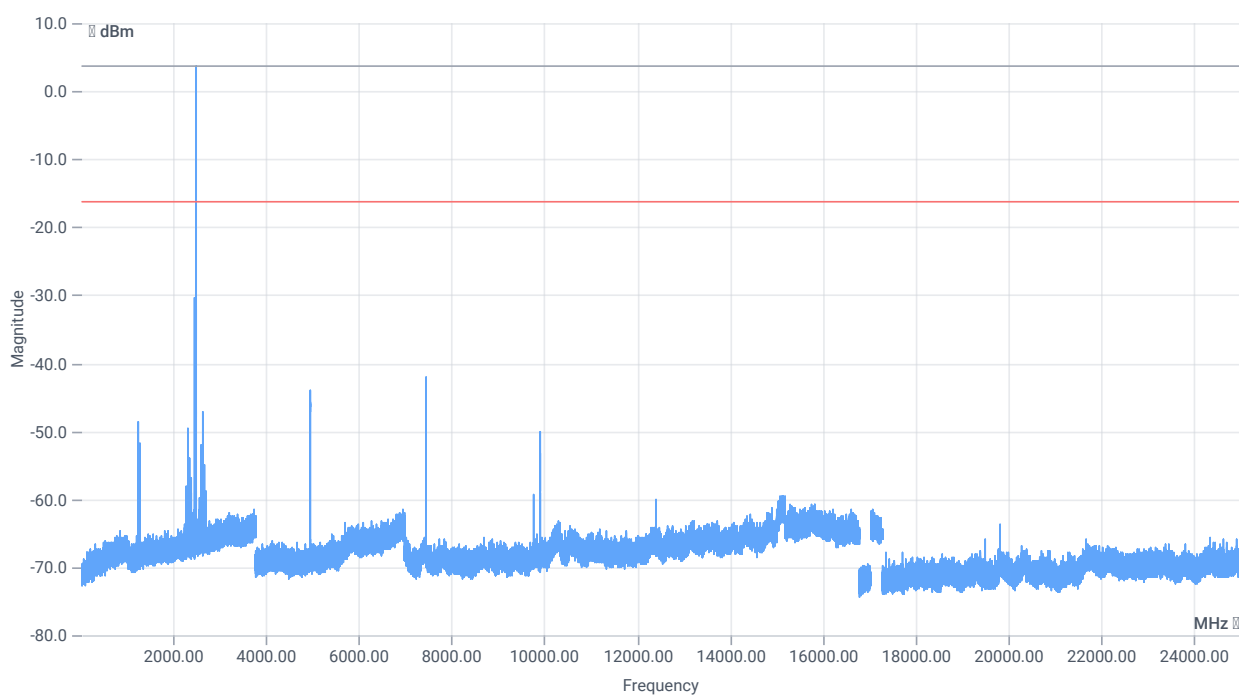

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.58 17.03 5
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE



RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2480.00 MHz	---	---	3.74	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 30 MHz	0	---	-129.96	dB	INFO

Verdict

PASS

FCC 15.247 # Maximum peak conducted output power FHSS ~ BT Classic EDR Pi/4DQPSK

References

TC start	13.01.2025 13:07:39
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	5.1.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Maximum peak output power conducted FHSS - BT Classic EDR Pi/4DQPSK
Information	

EUT Common Settings BT Classic

Intermodulation value N	3
Image freq. Low Mid High [MHz]	0 0 0
Power class	1
Power control	No
Longest supported packet type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	LOOPback
Perform inquiry	No
EUT BT address (if inquiry No)	589EC6757782
Signaling BT address	BABEBEDADBAD

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT Classic EDR Pi/4DQPSK
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2402 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	0.73	dBm	INFO
Ref. frequency	---	---	2401.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.73 8.85 20
Start [MHz] Stop [MHz]	2398.750 2405.250
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

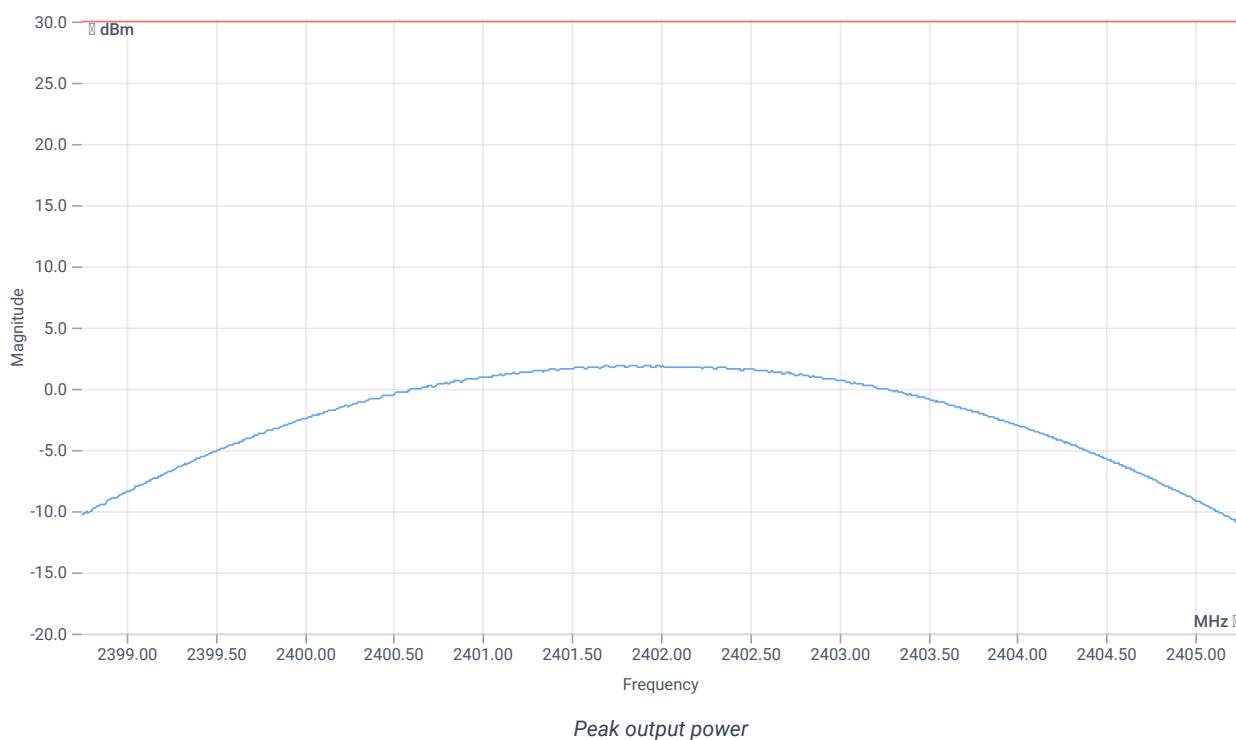

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	1.86	dBm	PASS
Peak power	---	1000	1.534617	mW	PASS
Frequency at peak	---	---	2401.922	MHz	INFO


Test at TX 2441 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	2.89	dBm	INFO
Ref. frequency	---	---	2441.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.89 8.95 20
Start [MHz] Stop [MHz]	2437.750 2444.250
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

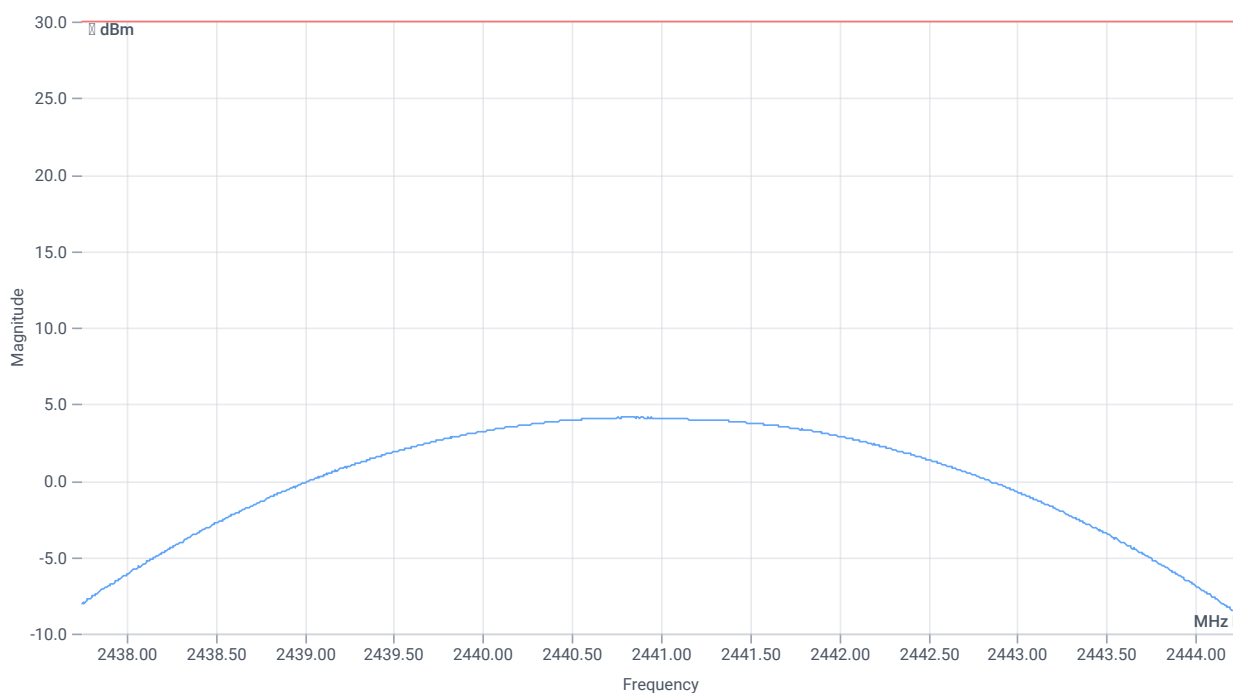

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	4.13	dBm	PASS
Peak power	---	1000	2.588213	mW	PASS
Frequency at peak	---	---	2440.838	MHz	INFO


Test at TX 2480 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	2.15	dBm	INFO
Ref. frequency	---	---	2479.700	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.15 9.03 20
Start [MHz] Stop [MHz]	2476.750 2483.250
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

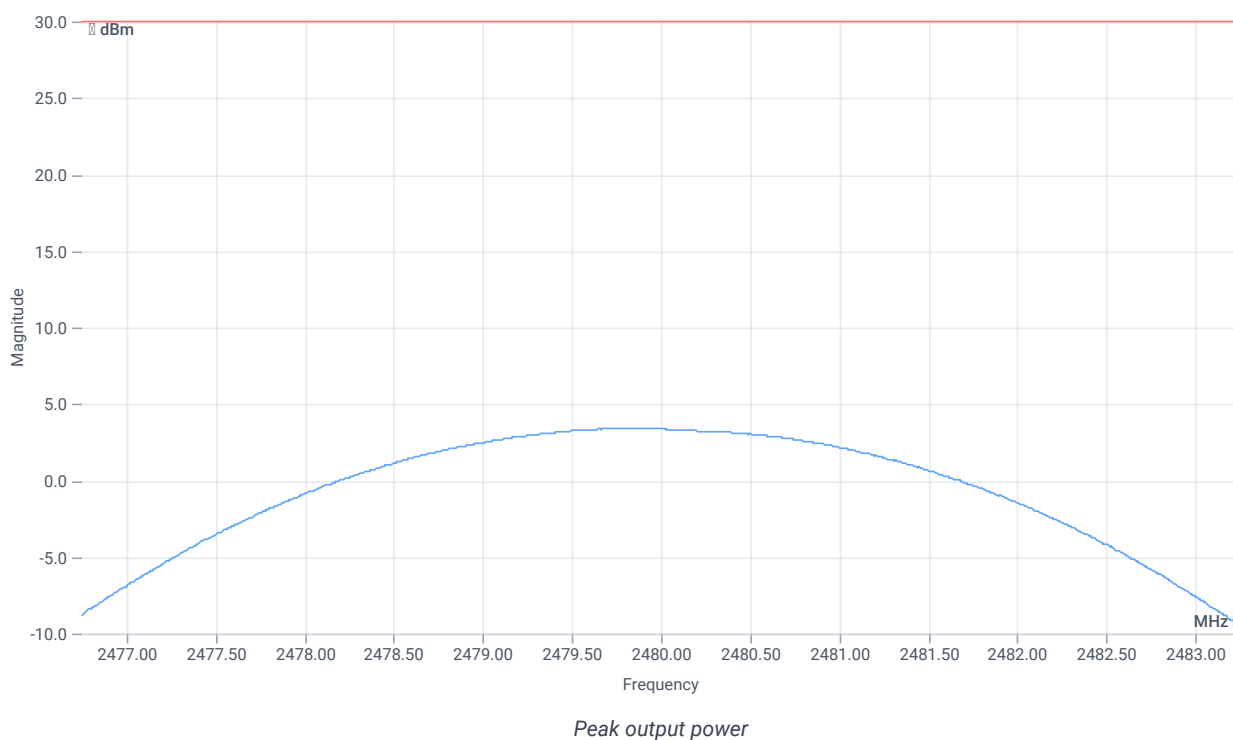

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	3.4	dBm	PASS
Peak power	---	1000	2.187762	mW	PASS
Frequency at peak	---	---	2479.812	MHz	INFO

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR Pi/4DQPSK

References

TC start	13.01.2025 13:09:03
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	5.1.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT - 20dB FHSS - BT Classic EDR Pi/4DQPSK
Information	

EUT Common Settings BT Classic

Intermodulation value N	3
Image freq. Low Mid High [MHz]	0 0 0
Power class	1
Power control	No
Longest supported packet type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	LOOPback
Perform inquiry	No
EUT BT address (if inquiry No)	589EC6757782
Signaling BT address	BABEBEDADBAD

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT Classic EDR Pi/4DQPSK
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2402 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	0.75	dBm	INFO
Ref. frequency	---	---	2401.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.75 8.85 15
Start [MHz] Stop [MHz]	2400.700 2403.300
RBW [MHz] VBW [MHz]	0.030000 0.100000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

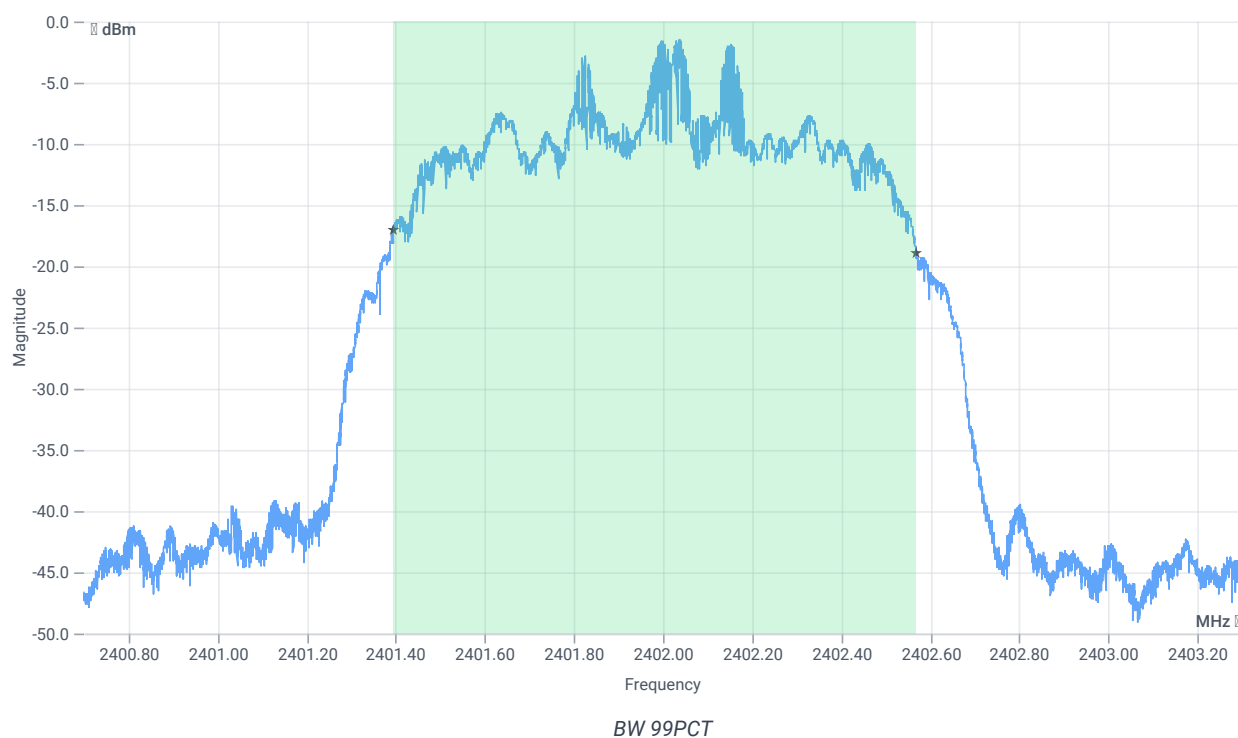


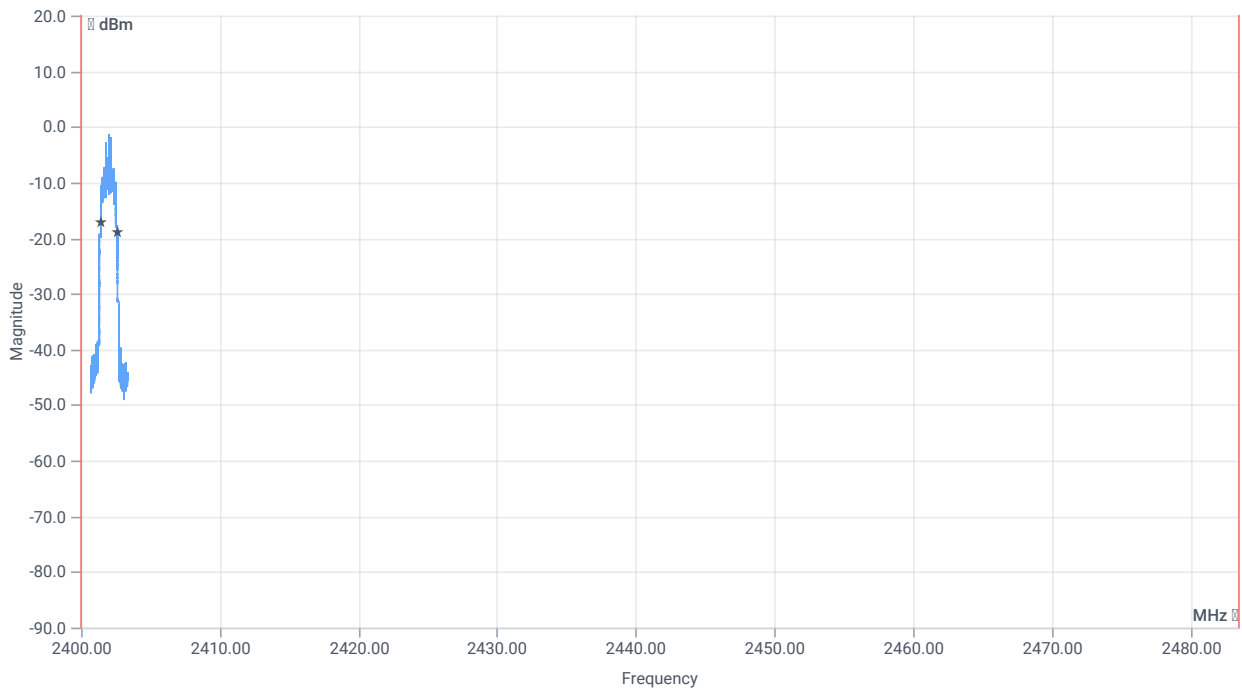


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	1175.000	kHz	INFO
T1 99%	2400.000000	---	2401.3940	MHz	PASS
T2 99%	---	2483.500000	2402.5688	MHz	PASS

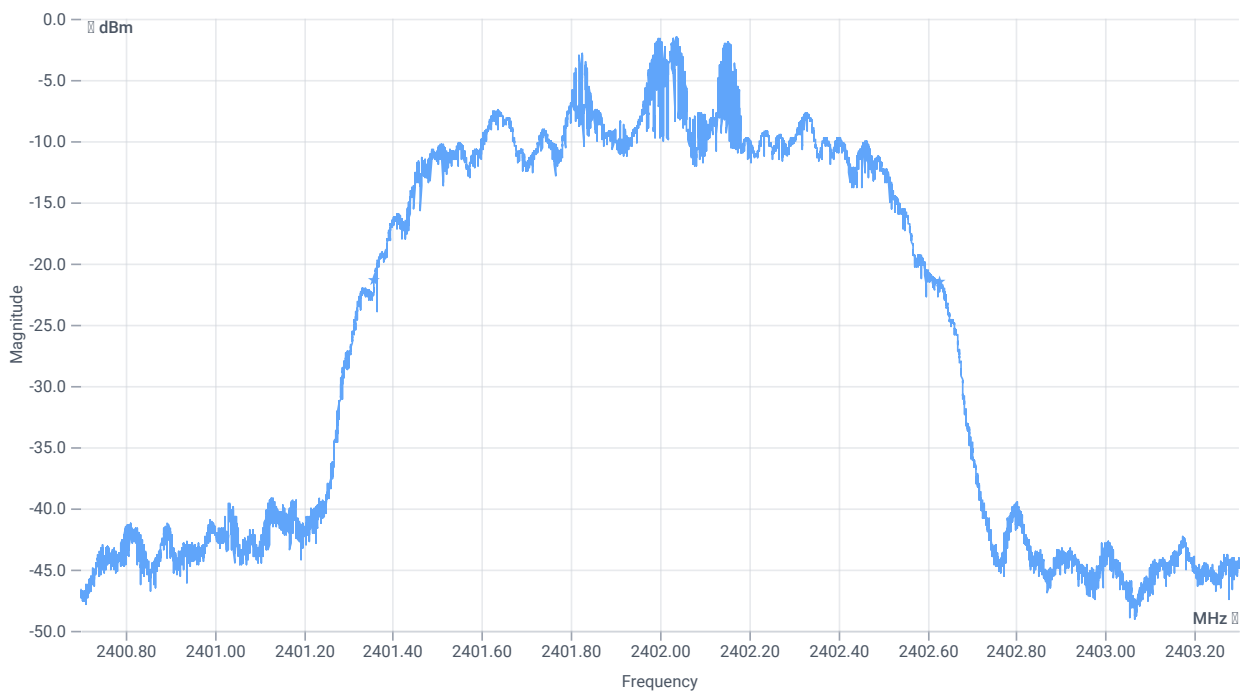

BW 20dB

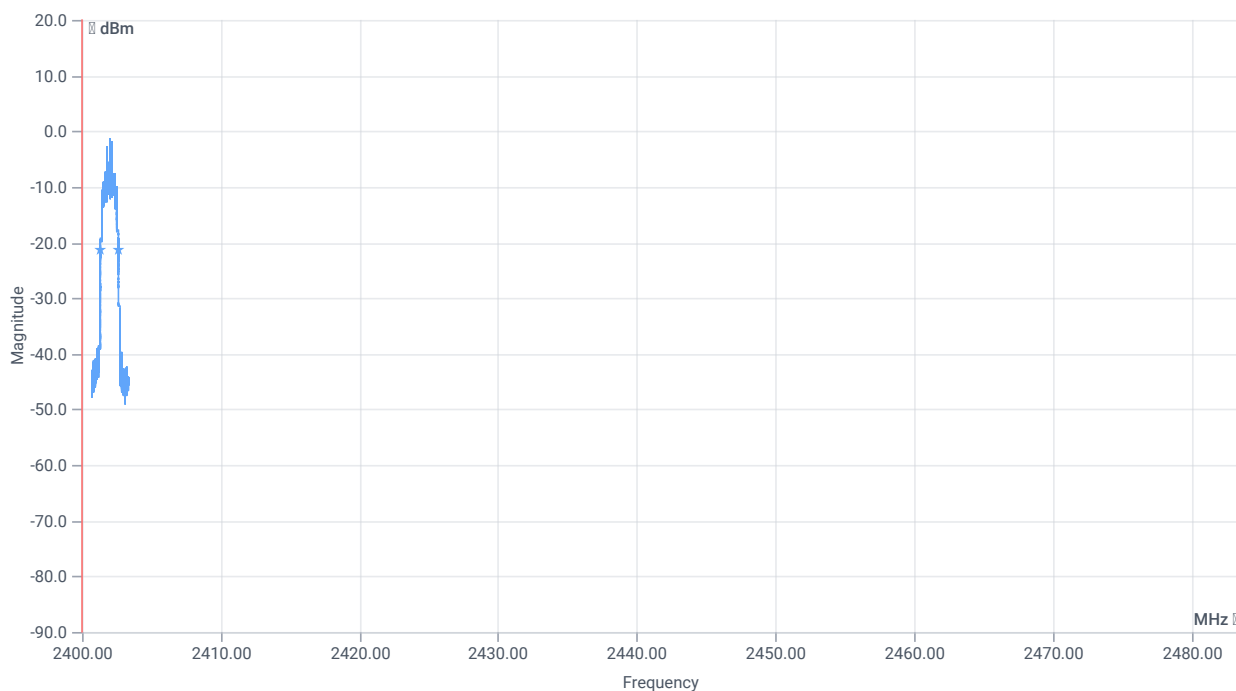

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	1270	kHz	INFO
T1 20dB	2400.000000	---	2401.3588	MHz	PASS
T2 20dB	---	2483.500000	2402.6284	MHz	PASS


Test at TX 2441 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.00	dBm	INFO
Ref. frequency	---	---	2440.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.00 8.95 15
Start [MHz] Stop [MHz]	2439.700 2442.300
RBW [MHz] VBW [MHz]	0.030000 0.100000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

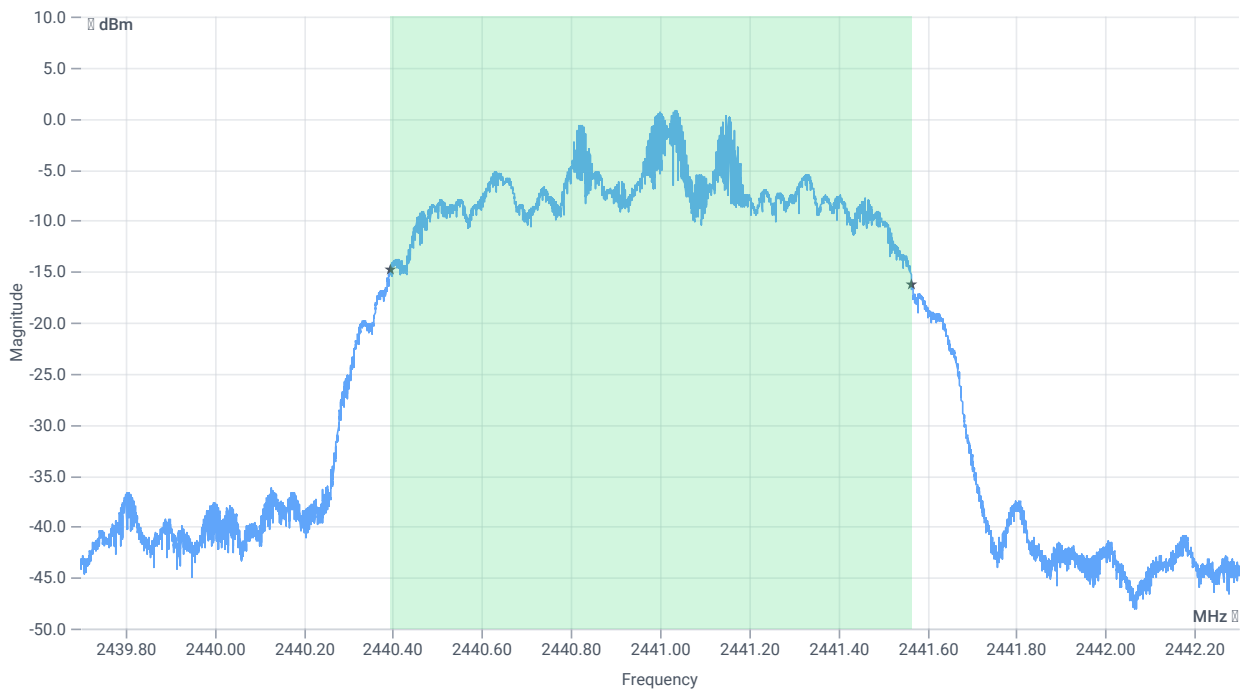


BW 99PCT

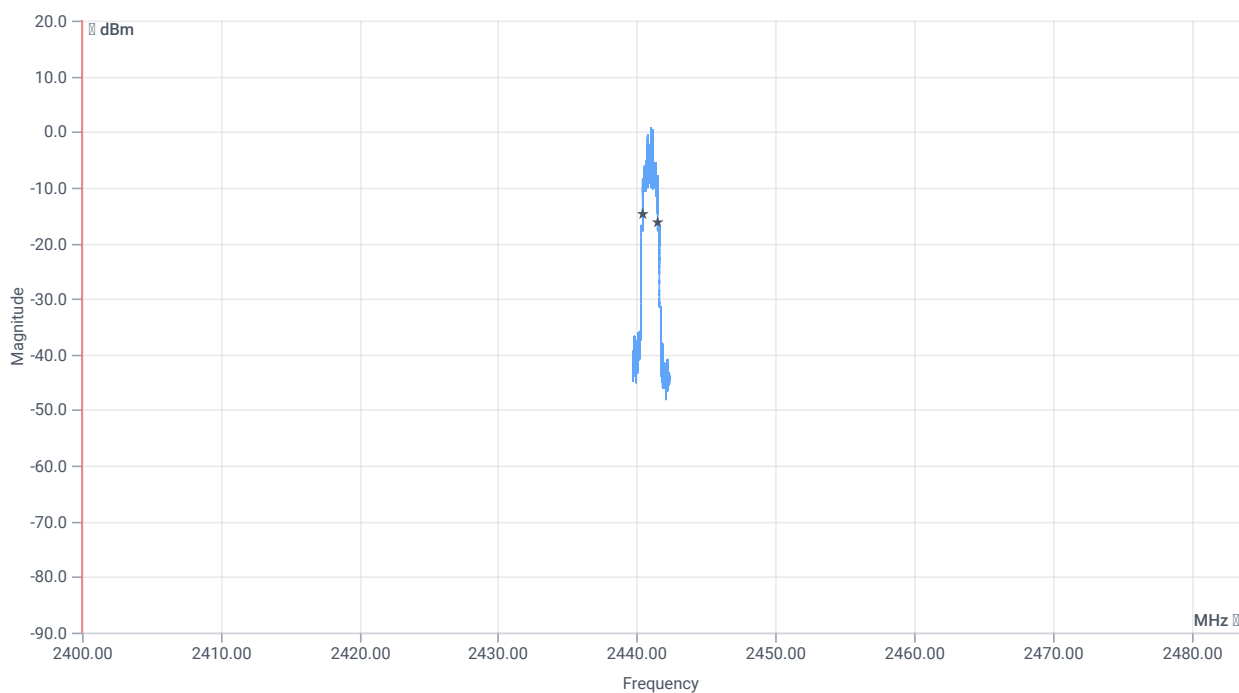


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	1171.000	kHz	INFO
T1 99%	2400.000000	---	2440.3943	MHz	PASS
T2 99%	---	2483.500000	2441.5657	MHz	PASS

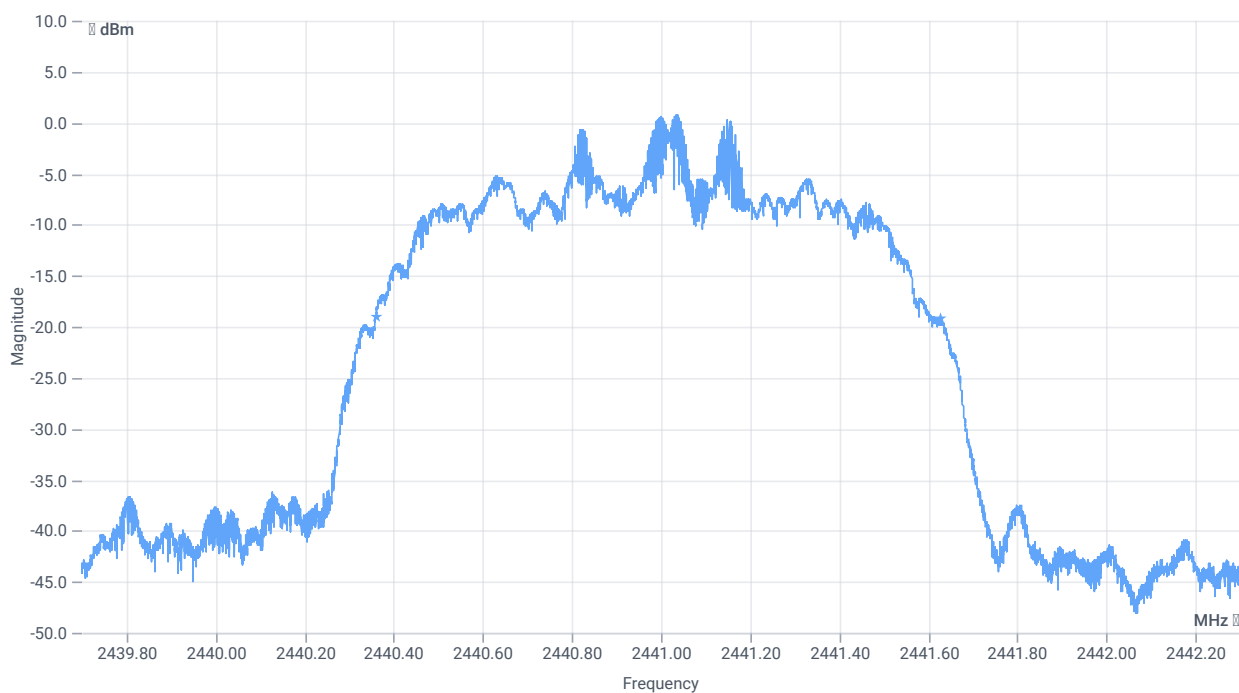

BW 20dB

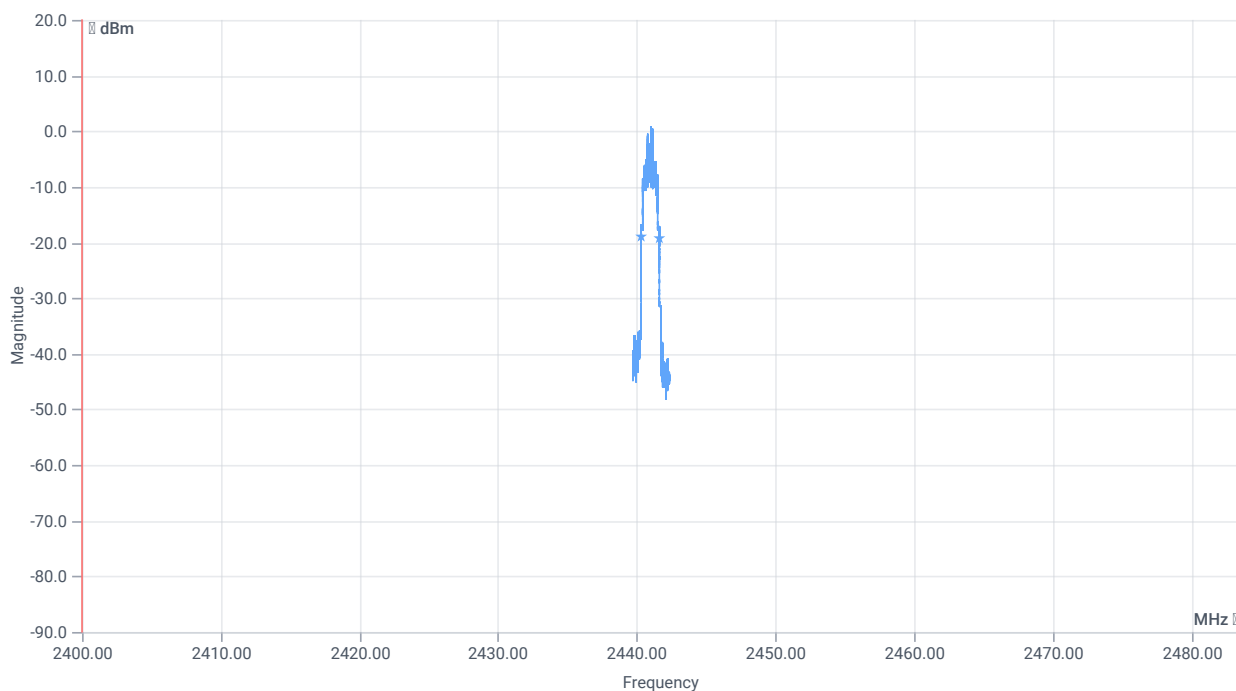

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	1267	kHz	INFO
T1 20dB	2400.000000	---	2440.3594	MHz	PASS
T2 20dB	---	2483.500000	2441.6263	MHz	PASS


Test at TX 2480 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	2.22	dBm	INFO
Ref. frequency	---	---	2480.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.22 9.03 15
Start [MHz] Stop [MHz]	2478.700 2481.300
RBW [MHz] VBW [MHz]	0.030000 0.100000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

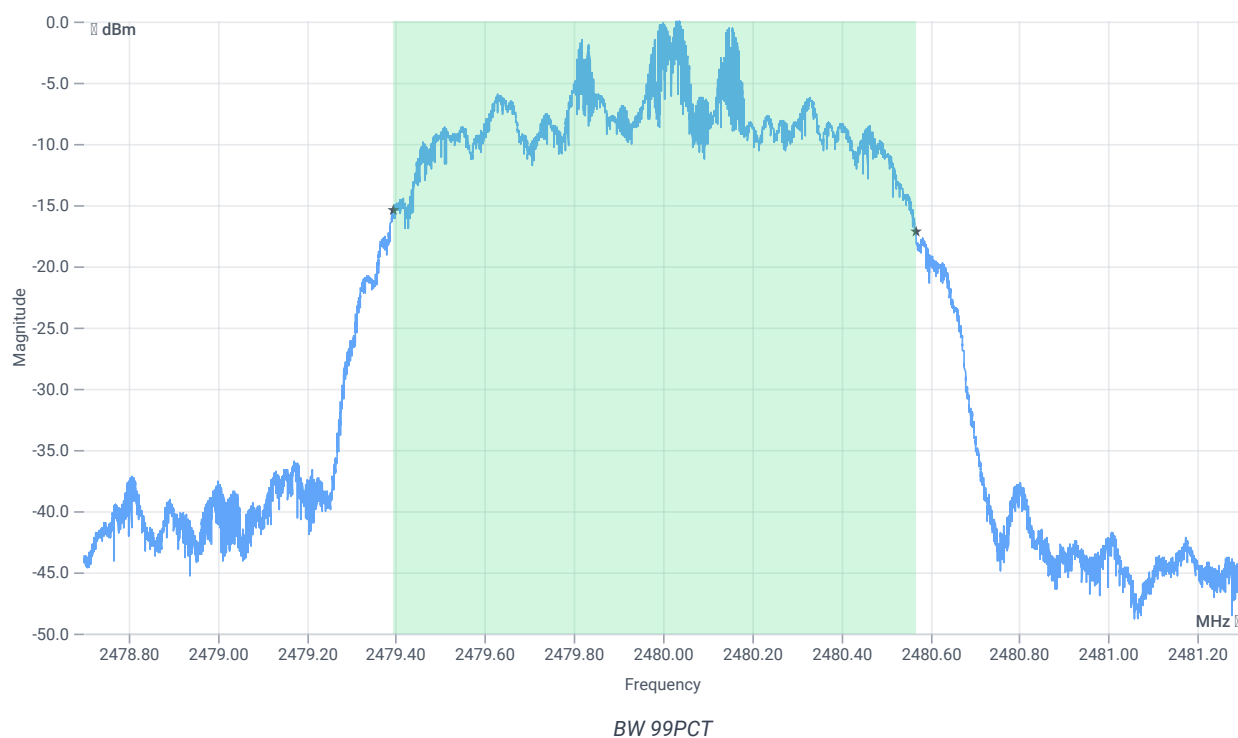


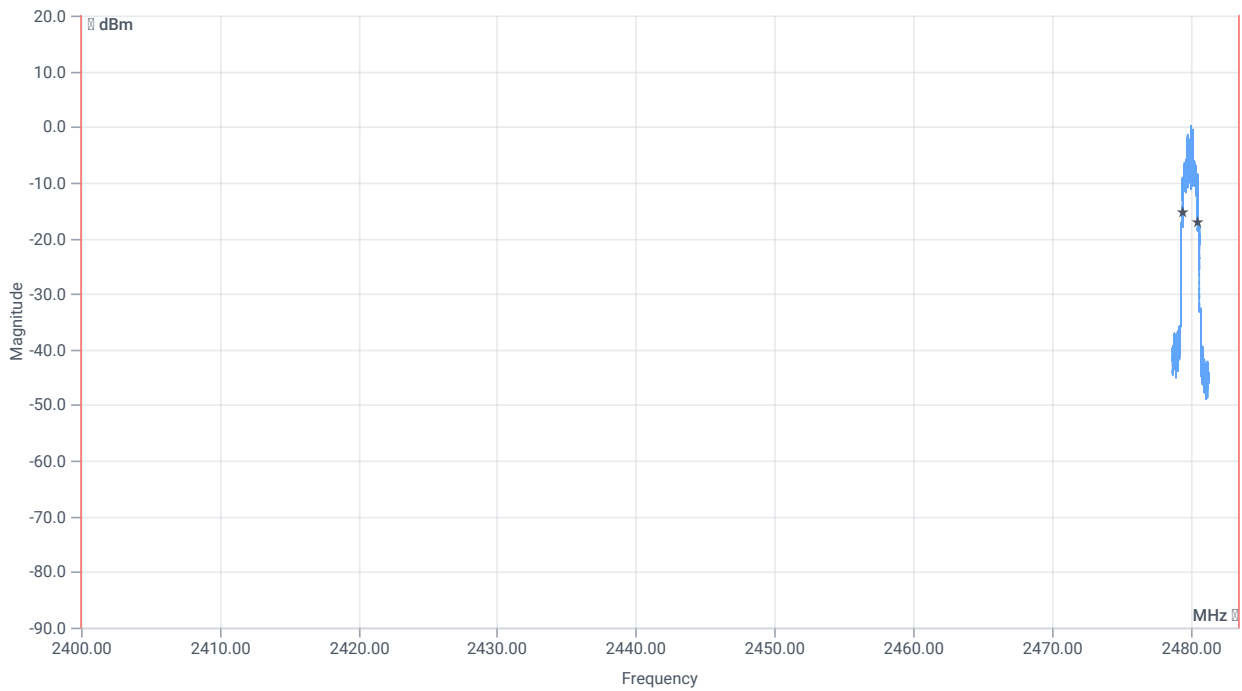


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	1173.000	kHz	INFO
T1 99%	2400.000000	---	2479.3943	MHz	PASS
T2 99%	---	2483.500000	2480.5675	MHz	PASS

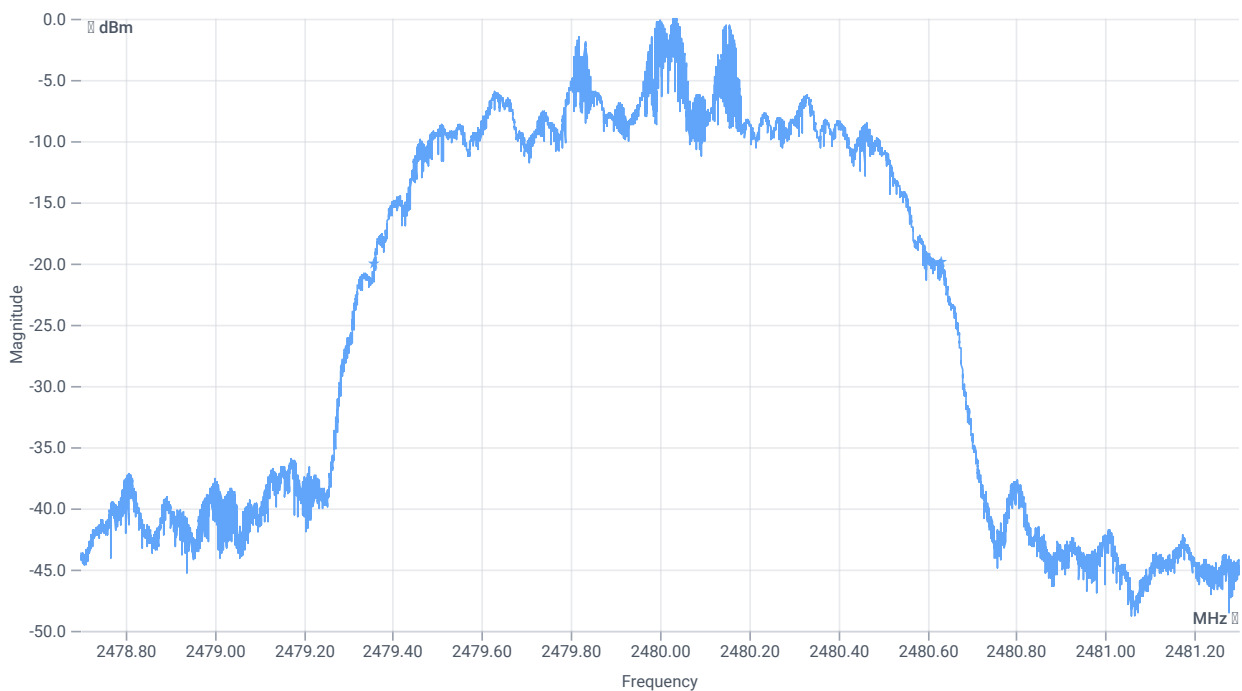

BW 20dB

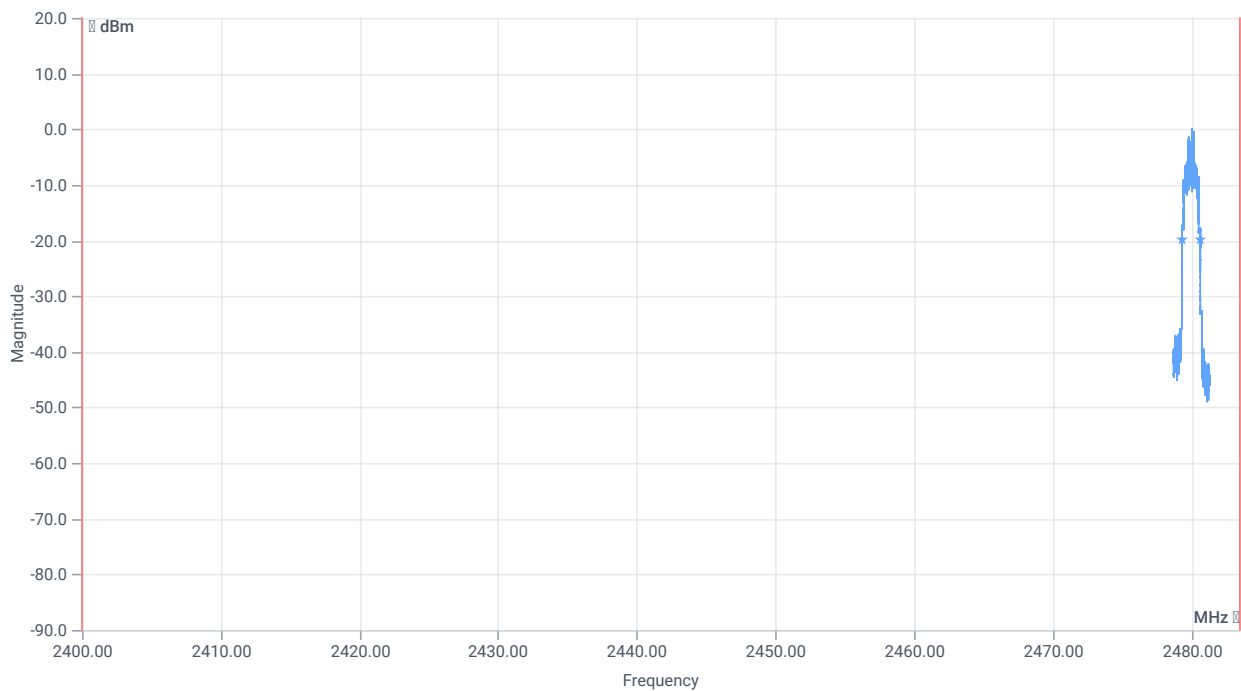

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	1272	kHz	INFO
T1 20dB	2400.000000	---	2479.3578	MHz	PASS
T2 20dB	---	2483.500000	2480.6300	MHz	PASS

Verdict
PASS

FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic EDR Pi/4DQPSK

References

TC start	13.01.2025 13:10:53
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	5.1.5.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX emissions conducted FHSS - BT Classic EDR Pi/4DQPSK
Information	

EUT Common Settings BT Classic

Intermodulation value N	3
Image freq. Low Mid High [MHz]	0 0 0
Power class	1
Power control	No
Longest supported packet type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	LOOPback
Perform inquiry	No
EUT BT address (if inquiry No)	589EC6757782
Signaling BT address	BABEBEDADBAD

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT Classic EDR Pi/4DQPSK
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7


Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2402 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	0.81	dBm	INFO
Ref. frequency	---	---	2402.200	MHz	INFO

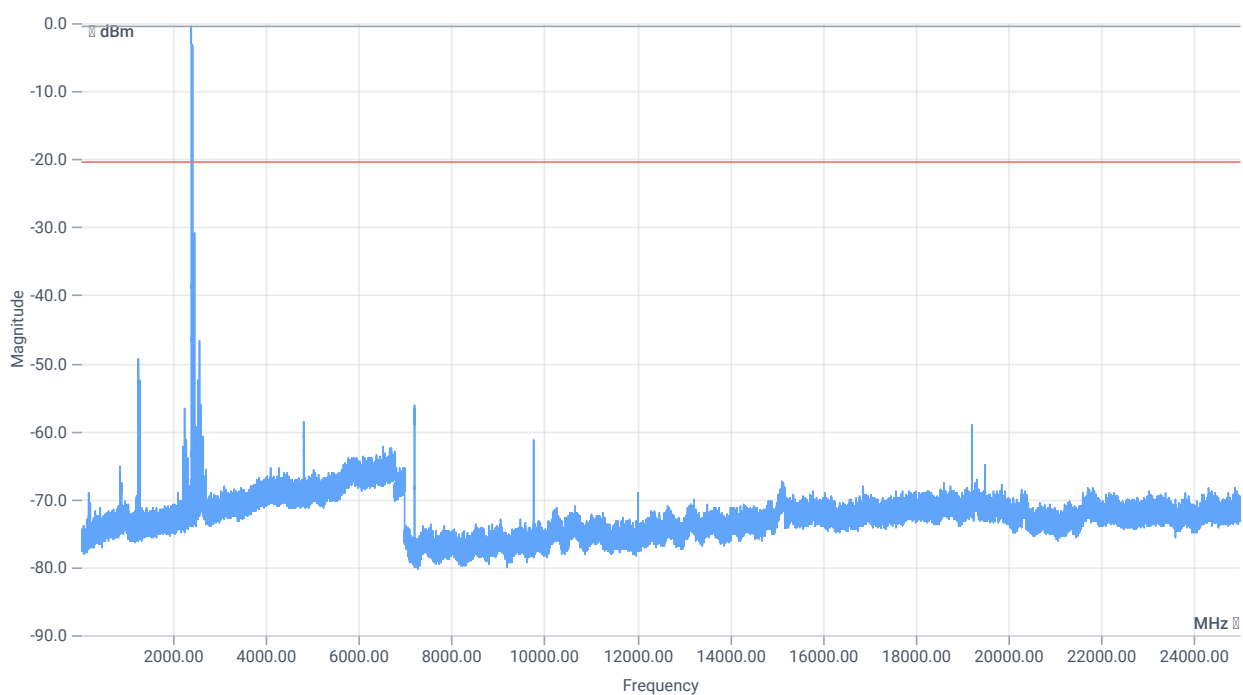

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	0.81 17.03 0
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

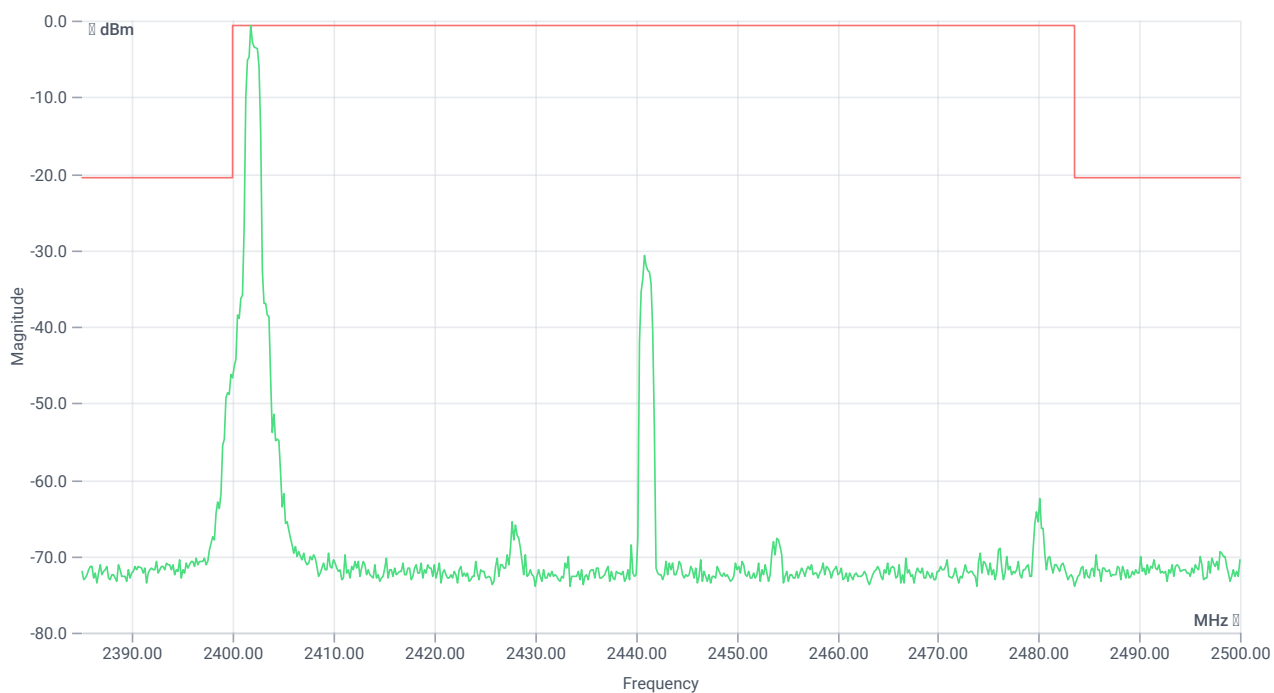

TX emissions band zoomed


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2401.83 MHz	---	---	-0.54	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 2399.833 MHz	0	---	25.66	dB	INFO

Test at TX 2441 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.23	dBm	INFO
Ref. frequency	---	---	2440.800	MHz	INFO

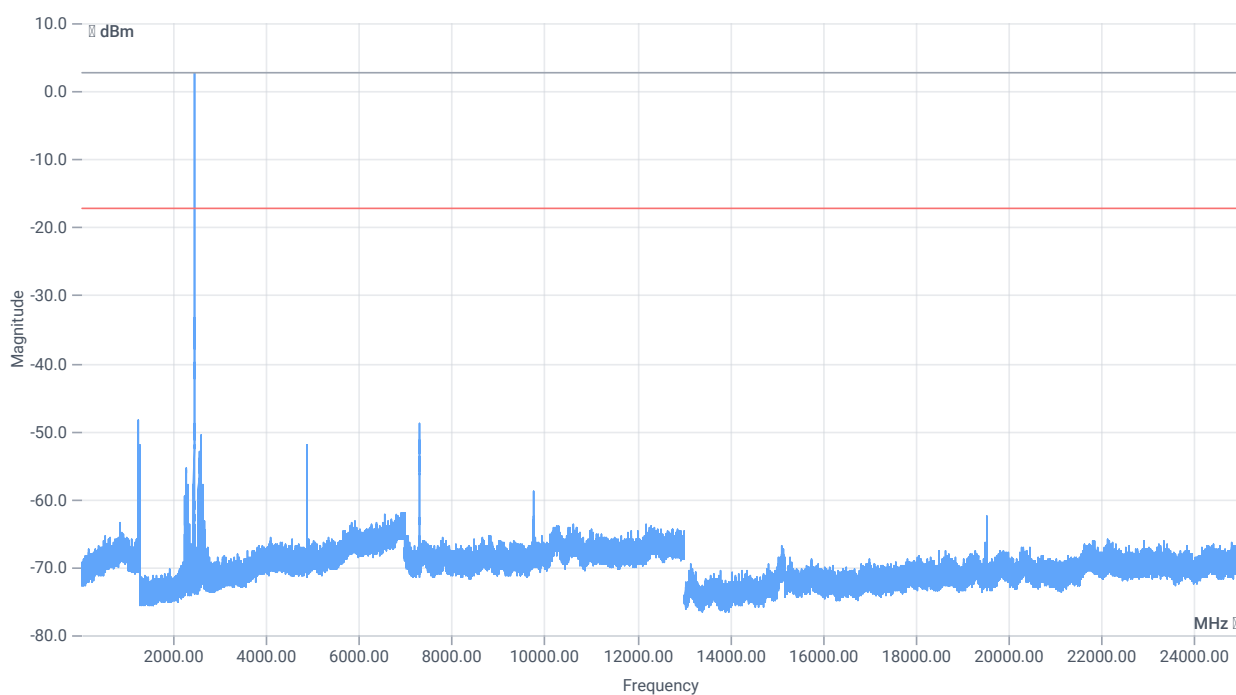

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.23 17.03 5
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

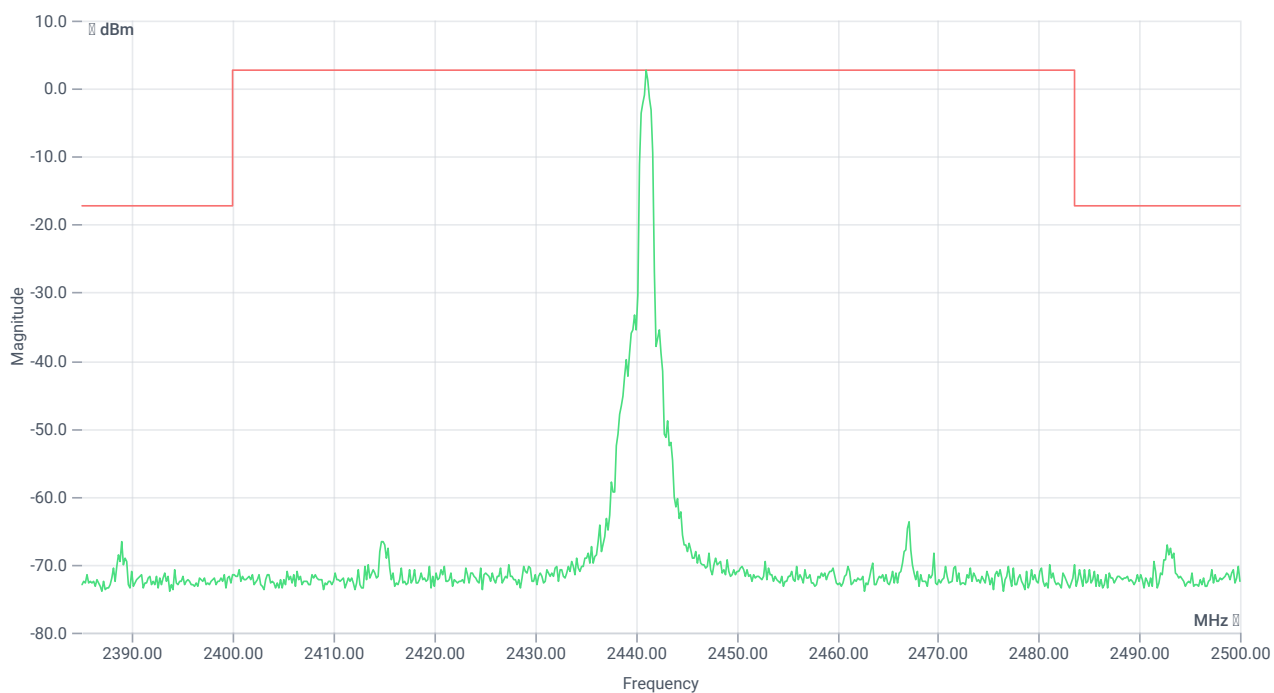


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2441.00 MHz	---	---	2.69	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 1254.5 MHz	0	---	30.99	dB	INFO

Test at TX 2480 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	2.08	dBm	INFO
Ref. frequency	---	---	2479.700	MHz	INFO

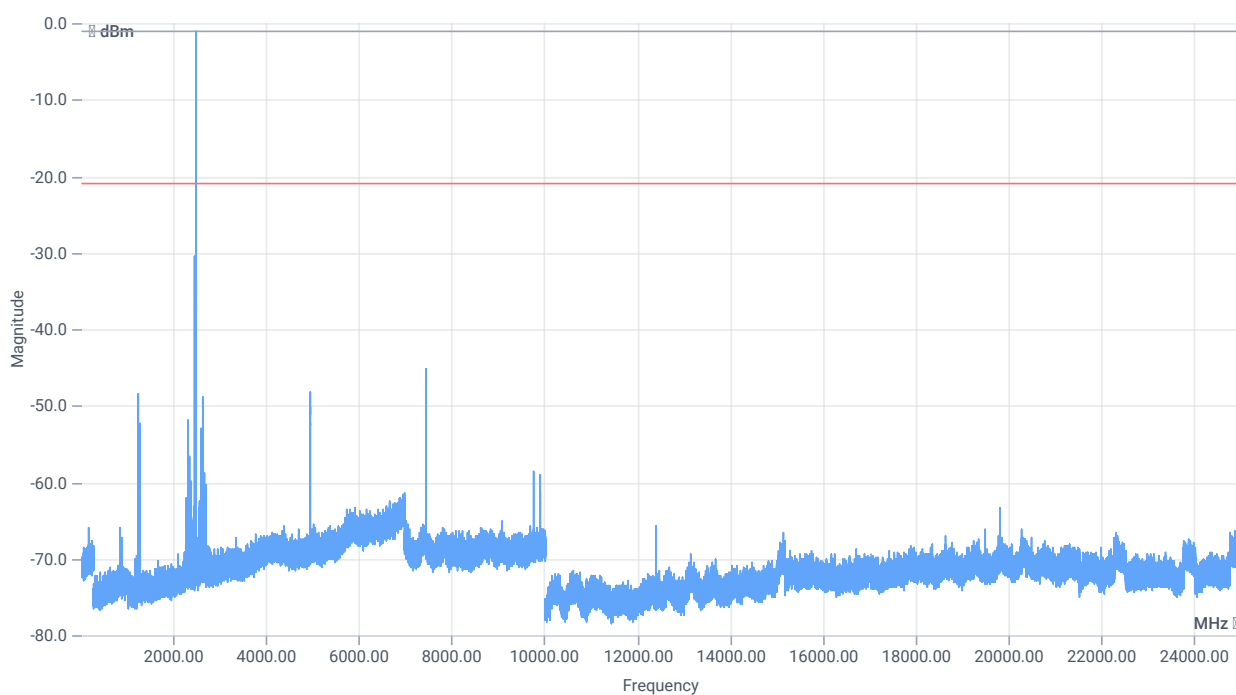

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.08 17.03 5
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE



RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2480.00 MHz	---	---	-1.05	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 7439.5 MHz	0	---	24.22	dB	INFO

Verdict

PASS

FCC 15.247 # Maximum peak conducted output power FHSS ~ BT Classic EDR 8DPSK

References

TC start	13.01.2025 13:52:36
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	5.1.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Maximum peak output power conducted FHSS - BT Classic EDR 8DPSK
Information	

EUT Common Settings BT Classic

Intermodulation value N	3
Image freq. Low Mid High [MHz]	0 0 0
Power class	1
Power control	No
Longest supported packet type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	LOOPback
Perform inquiry	No
EUT BT address (if inquiry No)	589EC6757782
Signaling BT address	BABEBEDADBAD

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT Classic EDR 8DPSK
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2402 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	0.73	dBm	INFO
Ref. frequency	---	---	2402.100	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.73 8.85 20
Start [MHz] Stop [MHz]	2398.750 2405.250
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

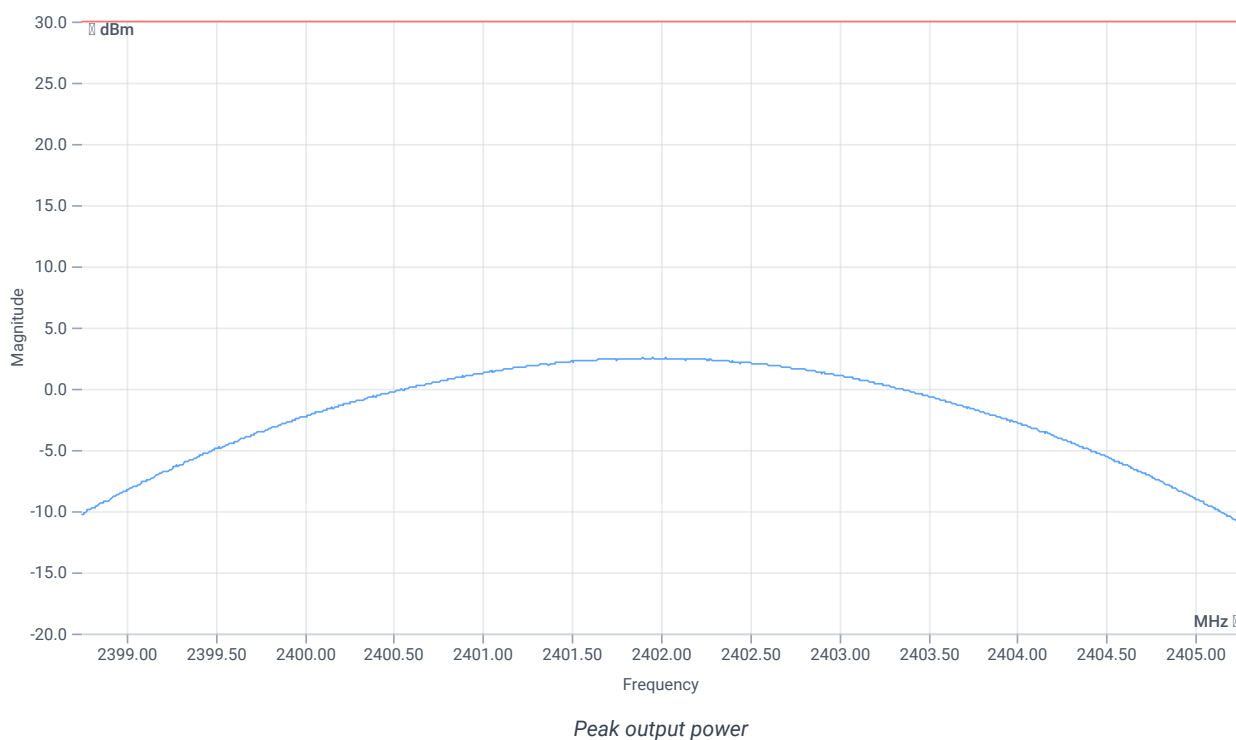

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	2.51	dBm	PASS
Peak power	---	1000	1.782379	mW	PASS
Frequency at peak	---	---	2401.954	MHz	INFO


Test at TX 2441 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.01	dBm	INFO
Ref. frequency	---	---	2441.100	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.01 8.95 20
Start [MHz] Stop [MHz]	2437.750 2444.250
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

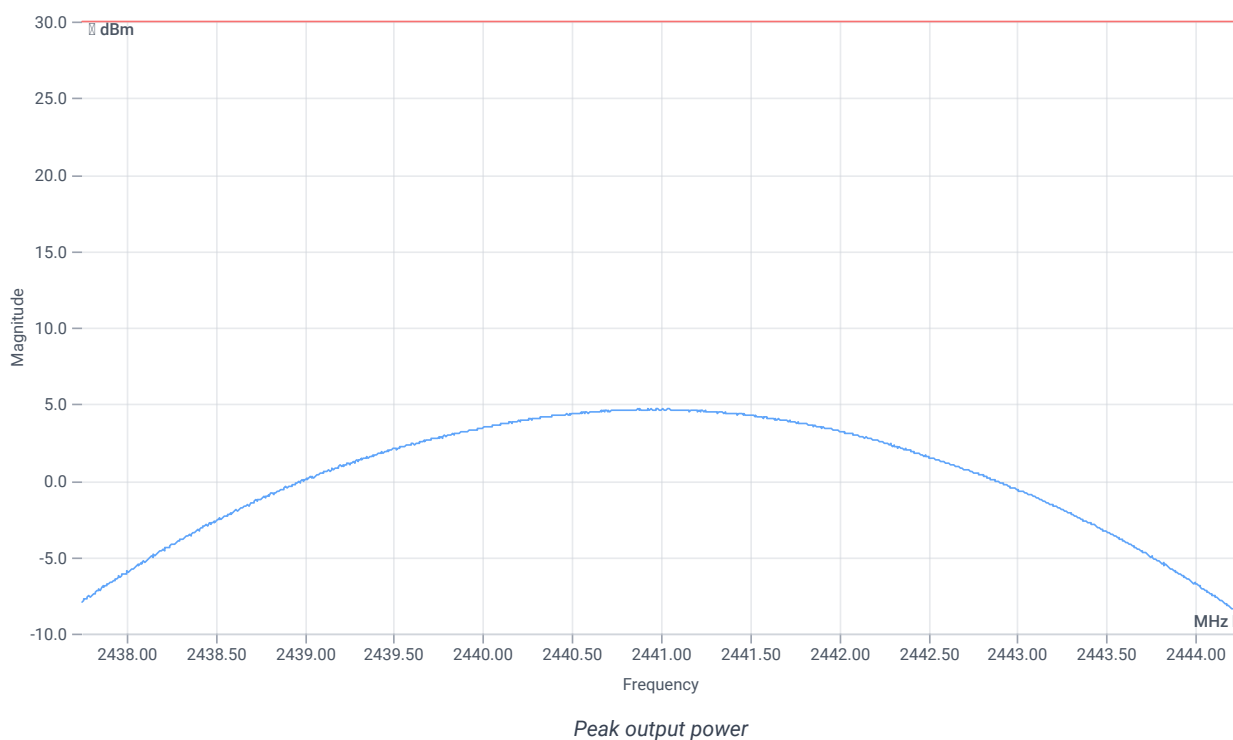

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	4.67	dBm	PASS
Peak power	---	1000	2.930893	mW	PASS
Frequency at peak	---	---	2441.006	MHz	INFO


Test at TX 2480 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	2.23	dBm	INFO
Ref. frequency	---	---	2480.100	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.23 9.03 20
Start [MHz] Stop [MHz]	2476.750 2483.250
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

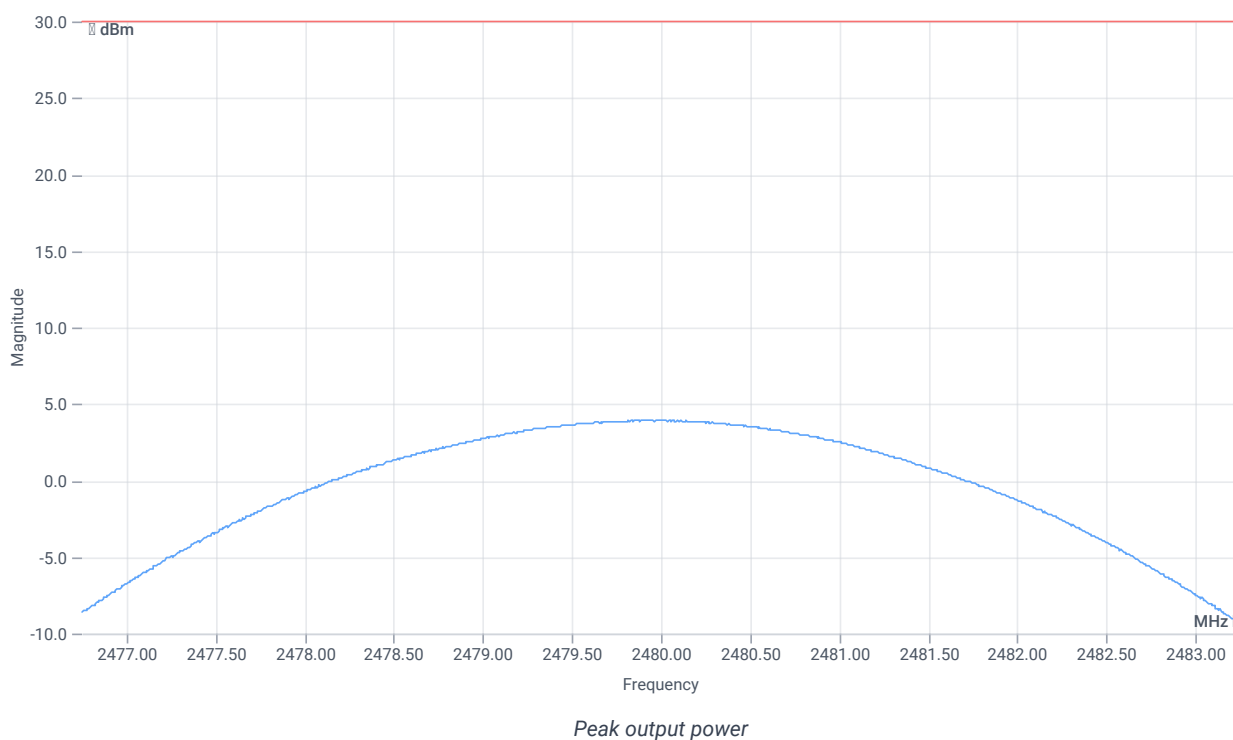

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	3.94	dBm	PASS
Peak power	---	1000	2.477422	mW	PASS
Frequency at peak	---	---	2479.896	MHz	INFO

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT Classic EDR 8DPSK

References

TC start	13.01.2025 13:54:01
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	5.1.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT - 20dB FHSS - BT Classic EDR 8DPSK
Information	

EUT Common Settings BT Classic

Intermodulation value N	3
Image freq. Low Mid High [MHz]	0 0 0
Power class	1
Power control	No
Longest supported packet type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	LOOPback
Perform inquiry	No
EUT BT address (if inquiry No)	589EC6757782
Signaling BT address	BABEBEDADBAD

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT Classic EDR 8DPSK
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path type	EUT_SA_GEN_SIG

Test Parameter

Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2402 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	0.70	dBm	INFO
Ref. frequency	---	---	2401.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.70 8.85 15
Start [MHz] Stop [MHz]	2400.700 2403.300
RBW [MHz] VBW [MHz]	0.030000 0.100000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

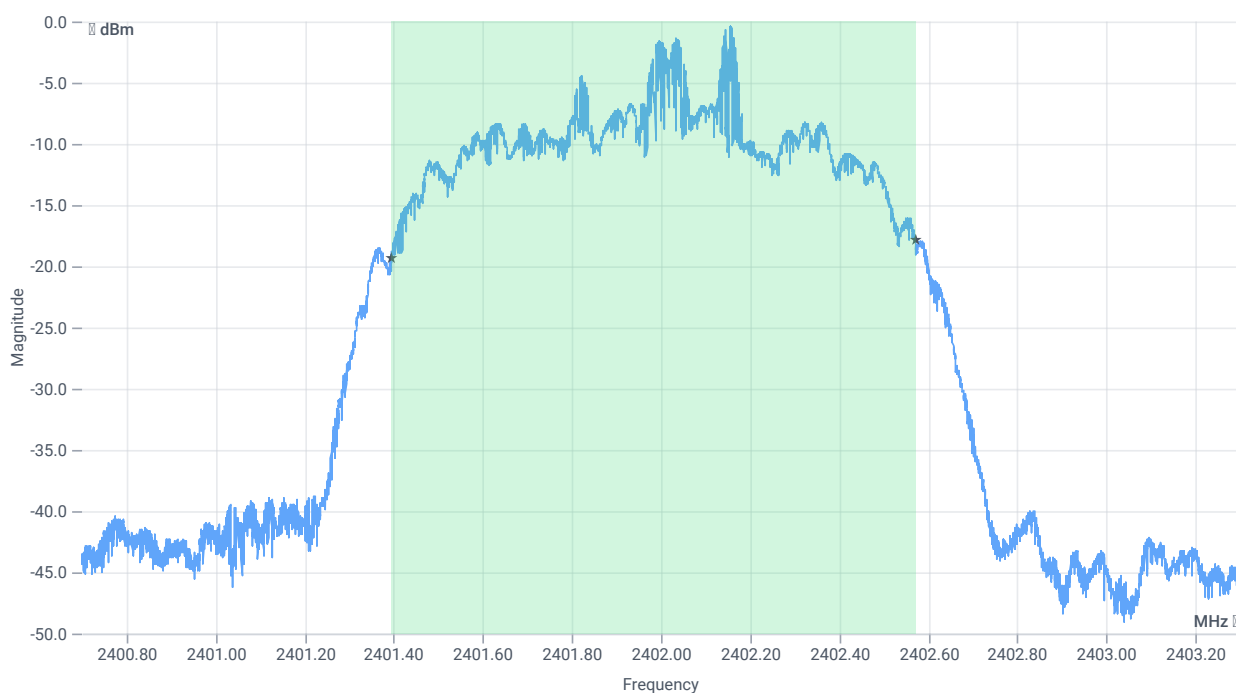


BW 99PCT

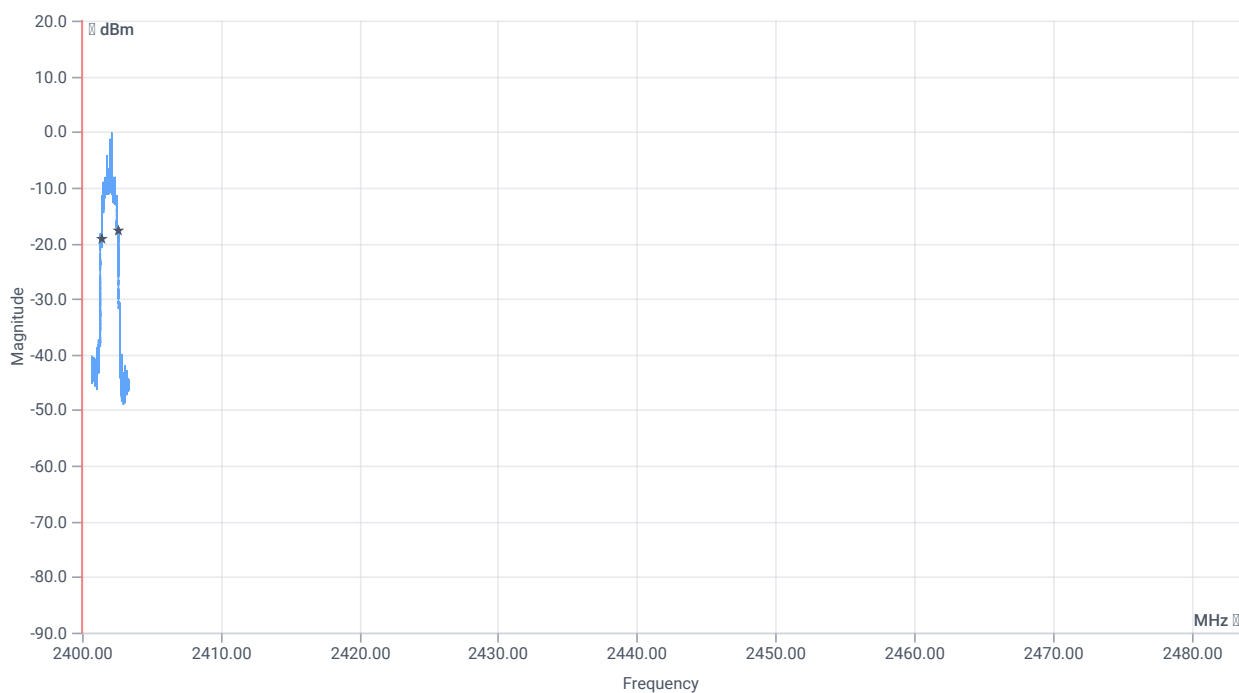


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	1176.000	kHz	INFO
T1 99%	2400.000000	---	2401.3943	MHz	PASS
T2 99%	---	2483.500000	2402.5706	MHz	PASS

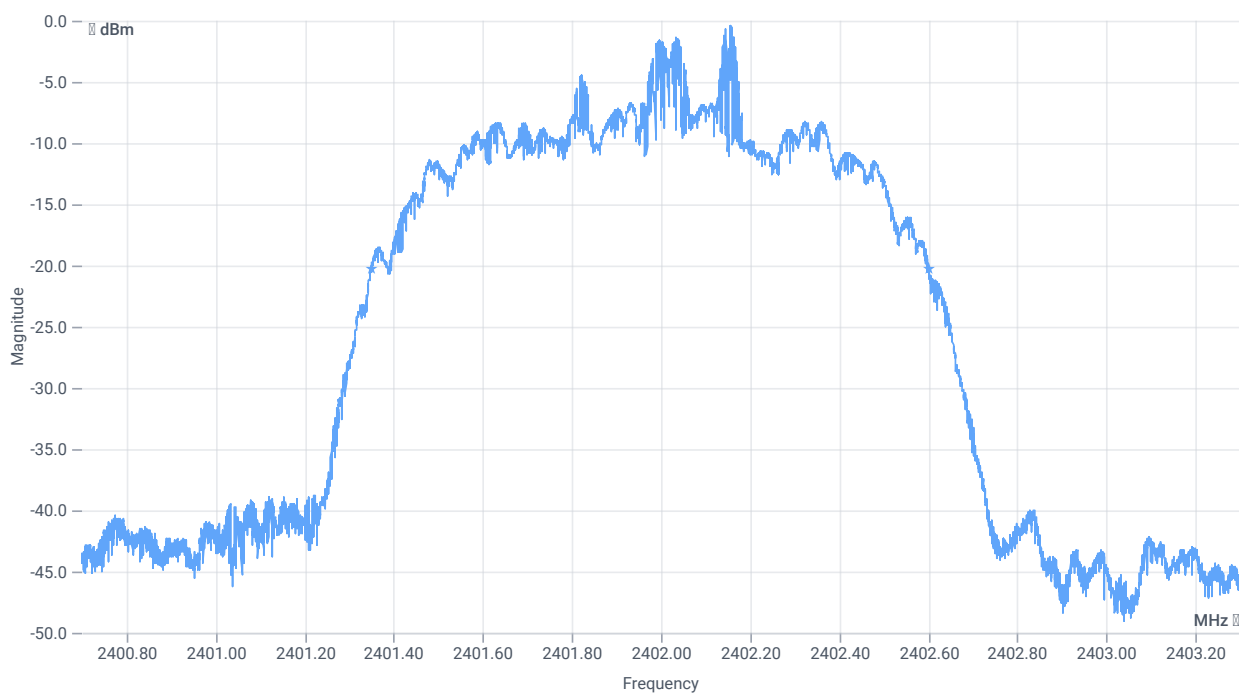

BW 20dB

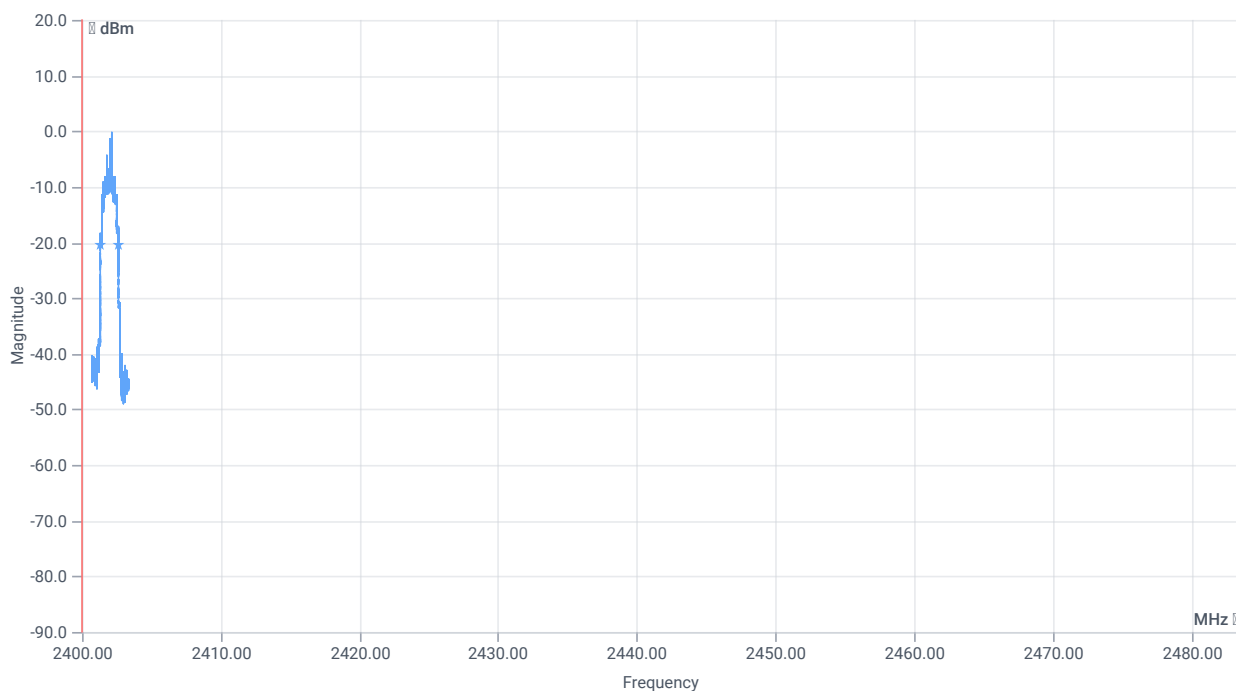

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	1251	kHz	INFO
T1 20dB	2400.000000	---	2401.3487	MHz	PASS
T2 20dB	---	2483.500000	2402.6001	MHz	PASS


Test at TX 2441 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.36	dBm	INFO
Ref. frequency	---	---	2440.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.36 8.95 15
Start [MHz] Stop [MHz]	2439.700 2442.300
RBW [MHz] VBW [MHz]	0.030000 0.100000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

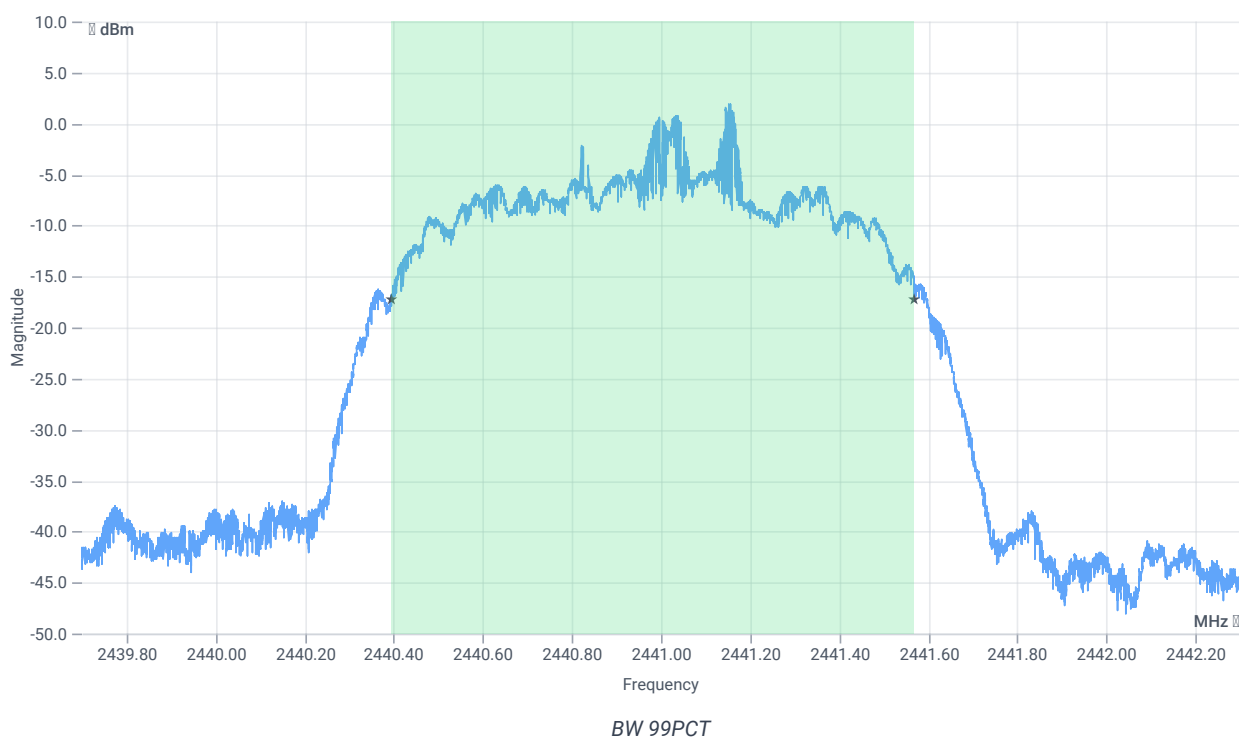


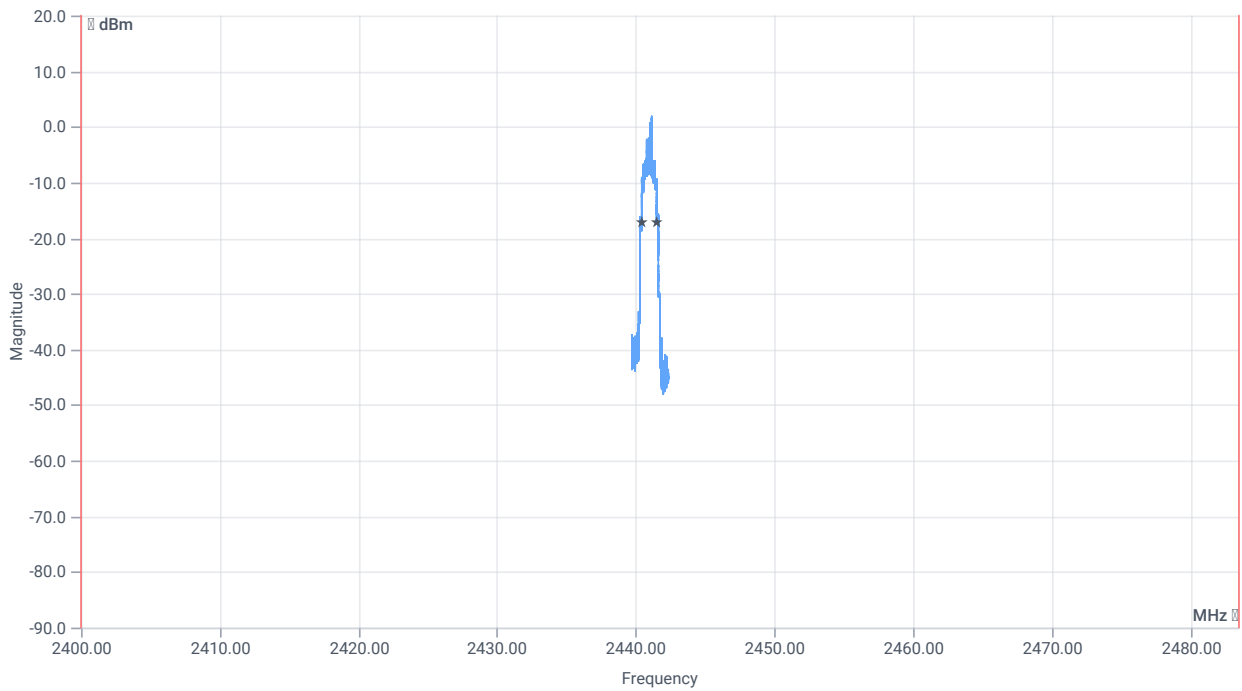


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	1176.000	kHz	INFO
T1 99%	2400.000000	---	2440.3937	MHz	PASS
T2 99%	---	2483.500000	2441.5696	MHz	PASS

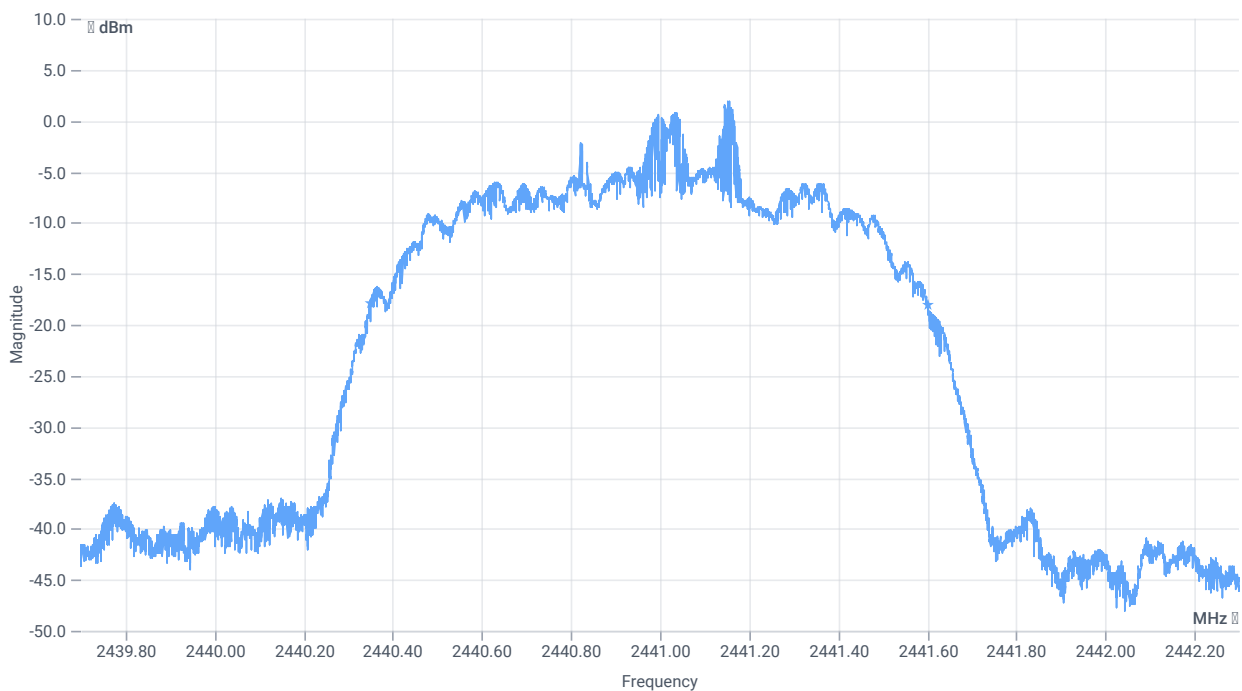

BW 20dB

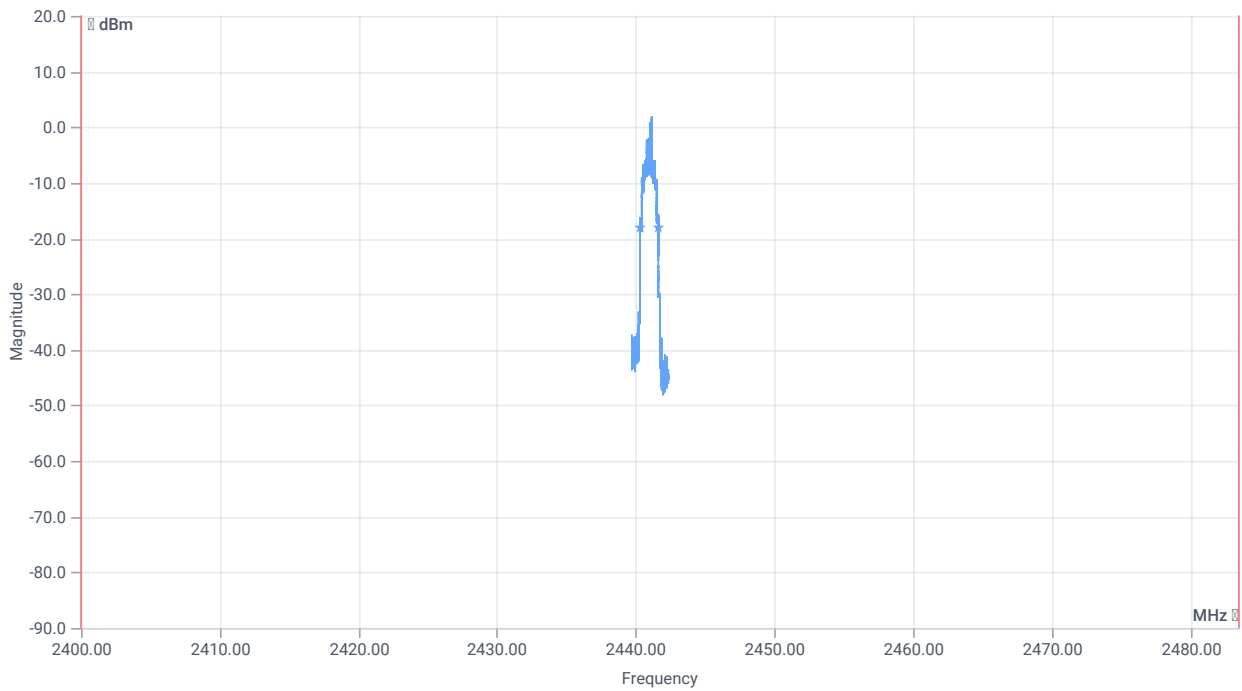

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	1252	kHz	INFO
T1 20dB	2400.000000	---	2440.3484	MHz	PASS
T2 20dB	---	2483.500000	2441.6009	MHz	PASS


Test at TX 2480 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	2.59	dBm	INFO
Ref. frequency	---	---	2480.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.59 9.03 15
Start [MHz] Stop [MHz]	2478.700 2481.300
RBW [MHz] VBW [MHz]	0.030000 0.100000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

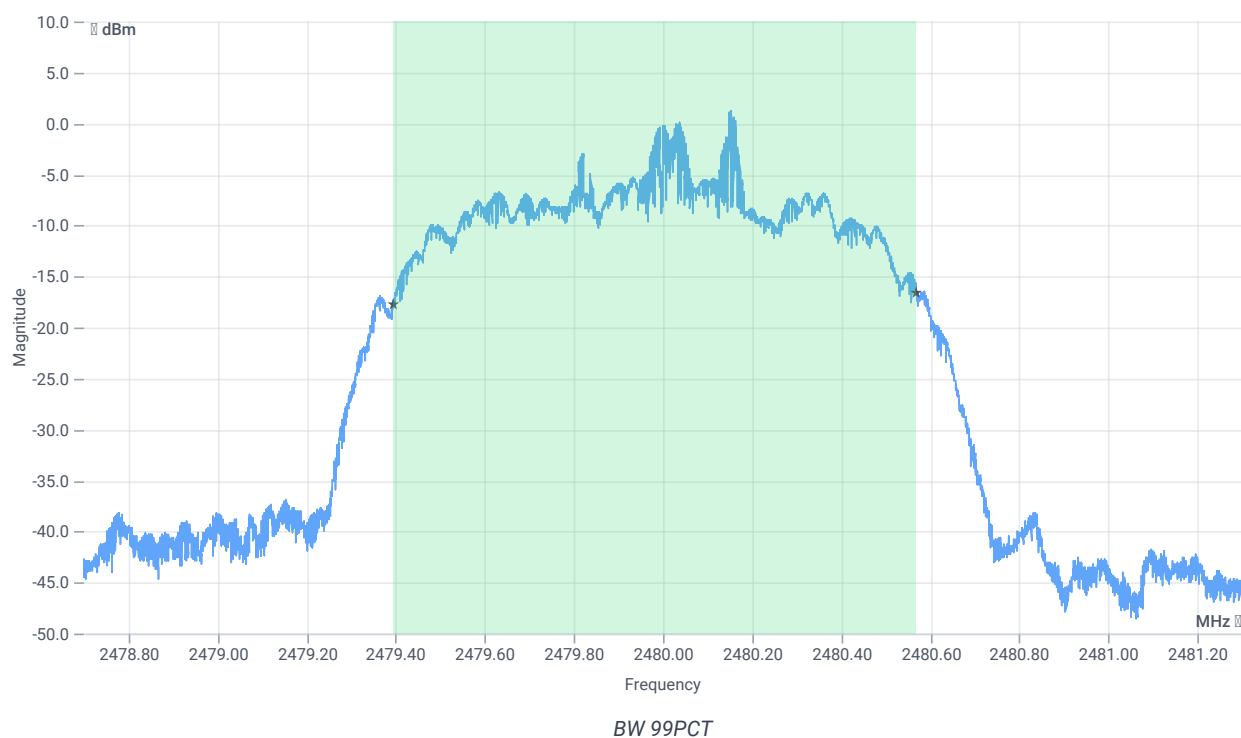


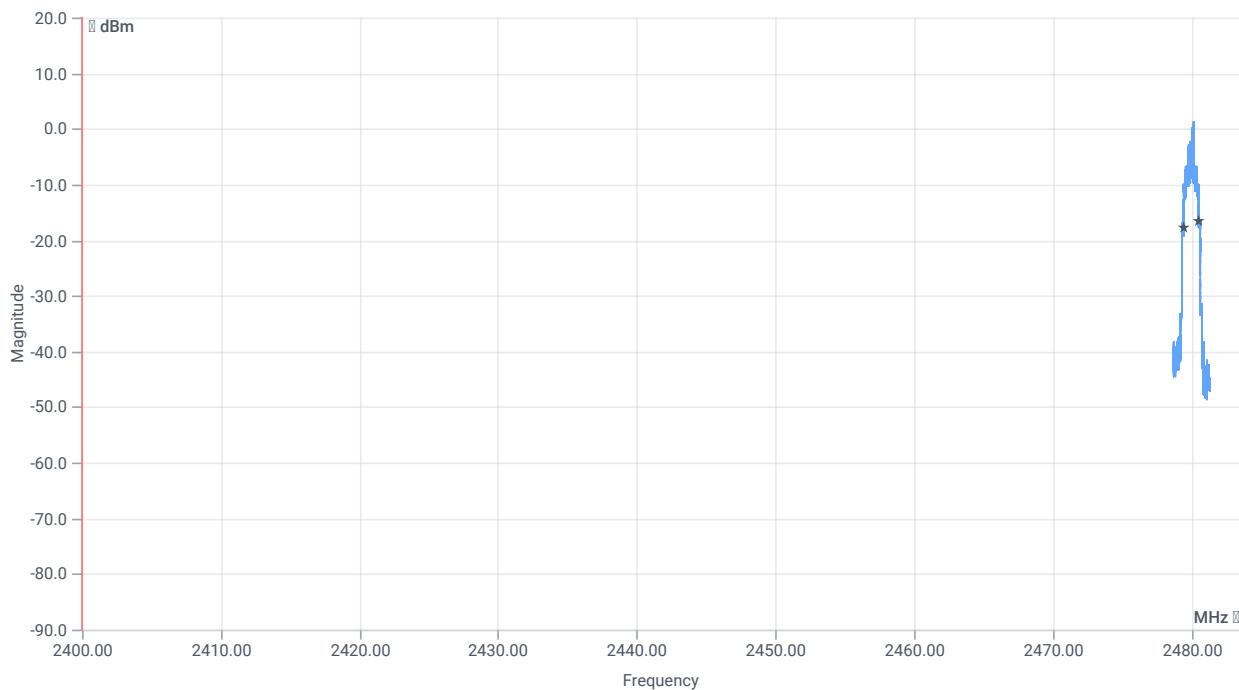


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	1177.000	kHz	INFO
T1 99%	2400.000000	---	2479.3932	MHz	PASS
T2 99%	---	2483.500000	2480.5699	MHz	PASS

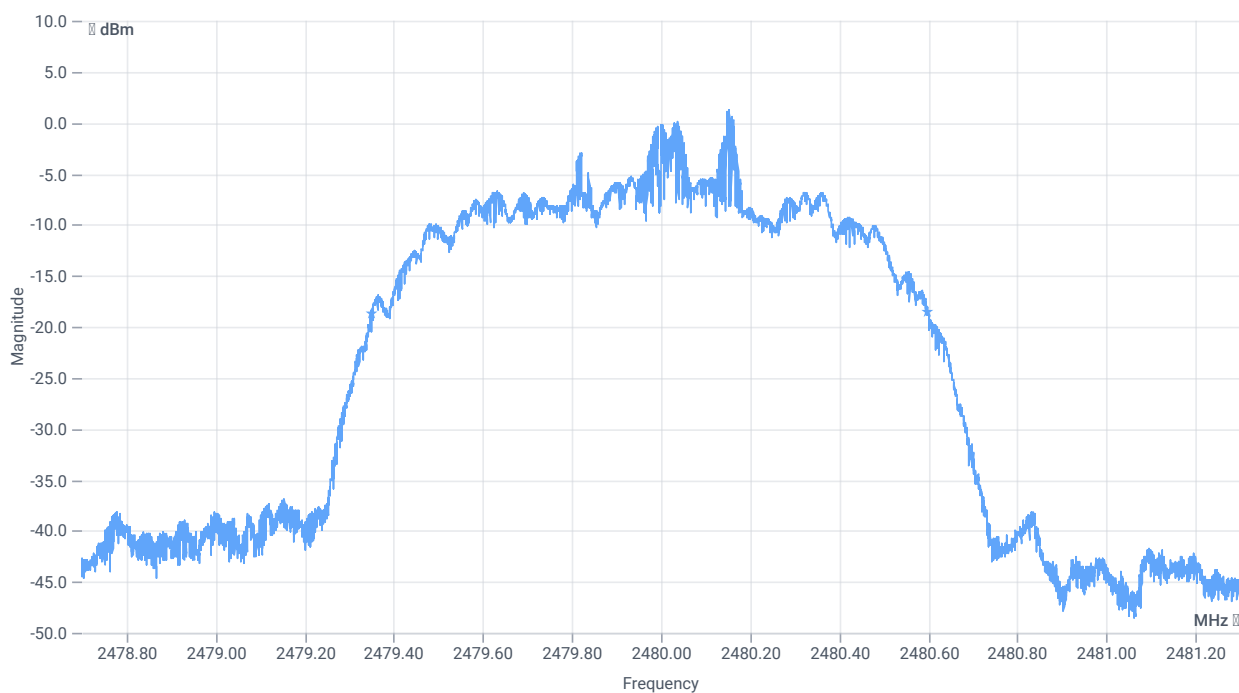

BW 20dB

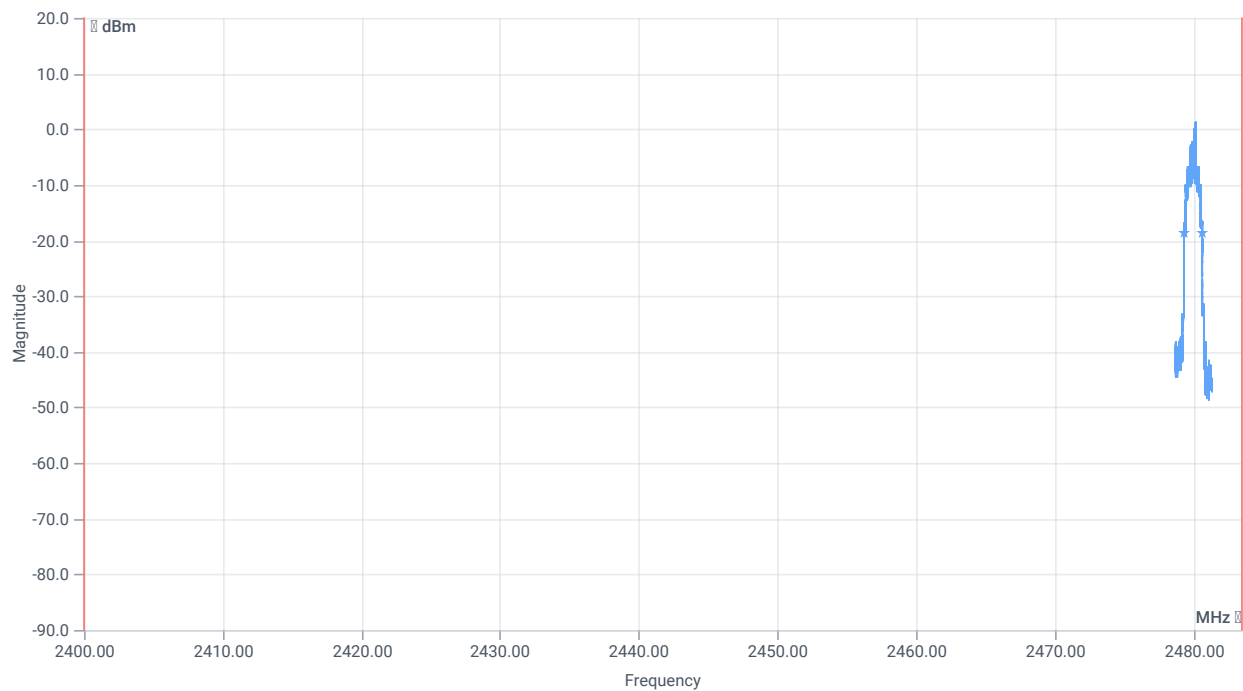

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	1250	kHz	INFO
T1 20dB	2400.000000	---	2479.3495	MHz	PASS
T2 20dB	---	2483.500000	2480.5996	MHz	PASS

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ BT Classic EDR 8DPSK

References

TC start	13.01.2025 13:55:50
Ambit temp (test rack) [°C] humidity [rel%]	not enabled not enabled
System version	5.1.5.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX emissions conducted FHSS - BT Classic EDR 8DPSK
Information	

EUT Common Settings BT Classic

Intermodulation value N	3
Image freq. Low Mid High [MHz]	0 0 0
Power class	1
Power control	No
Longest supported packet type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	LOOPback
Perform inquiry	No
EUT BT address (if inquiry No)	589EC6757782
Signaling BT address	BABEBEDADBAD

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT Classic EDR 8DPSK
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path type	EUT_SA_GEN_SIG


Test Parameter

Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2402 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	0.93	dBm	INFO
Ref. frequency	---	---	2402.100	MHz	INFO

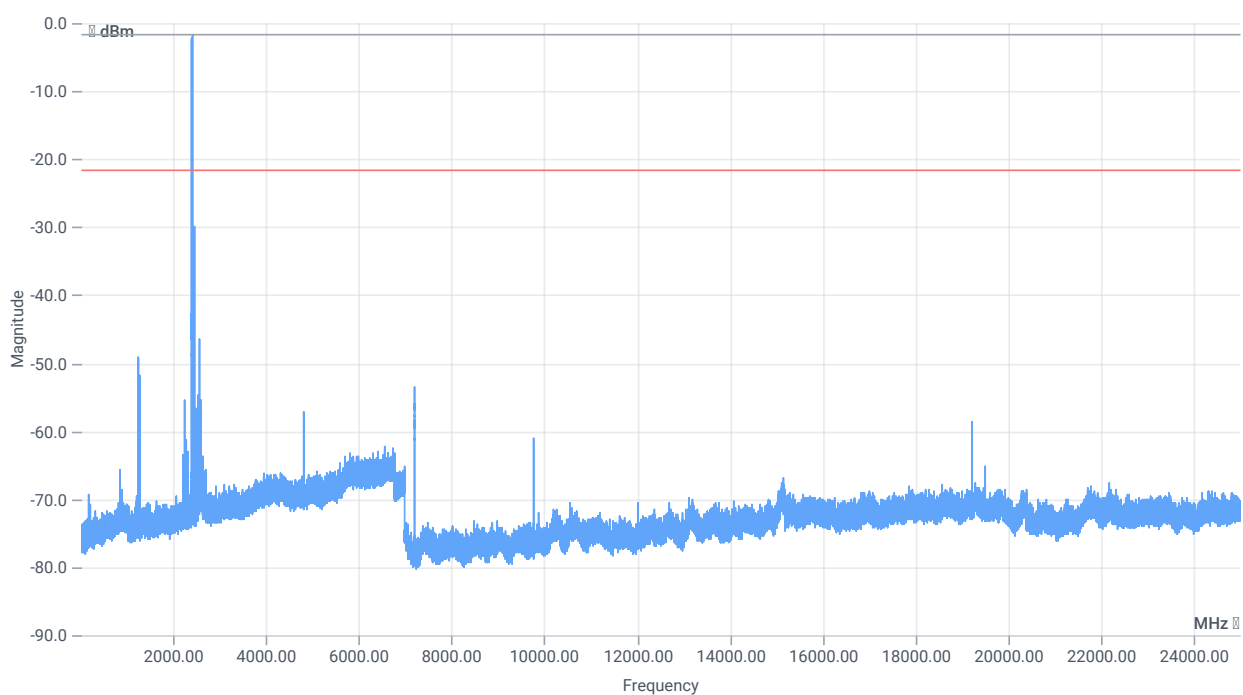

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	0.93 17.03 0
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE



TX emissions band zoomed


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2402.17 MHz	---	---	-1.71	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 2558.167 MHz	0	---	24.8	dB	INFO

Test at TX 2441 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.40	dBm	INFO
Ref. frequency	---	---	2440.800	MHz	INFO

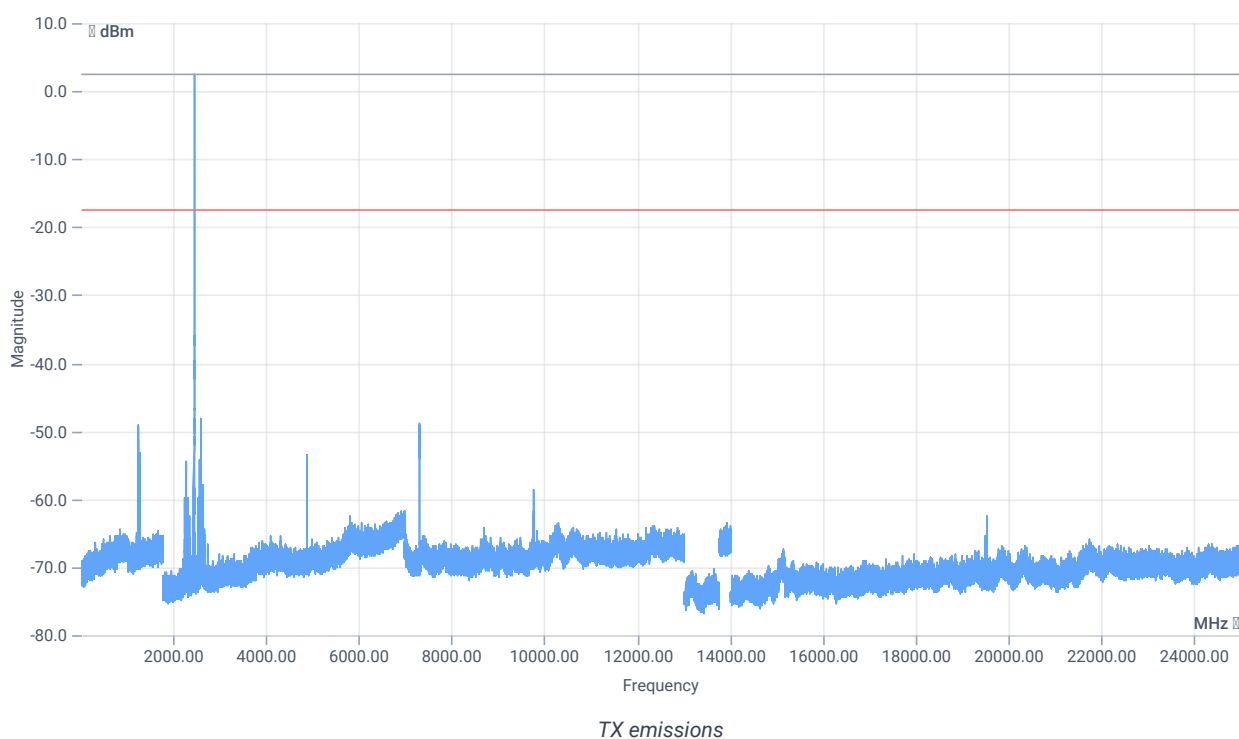

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.40 17.03 5
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

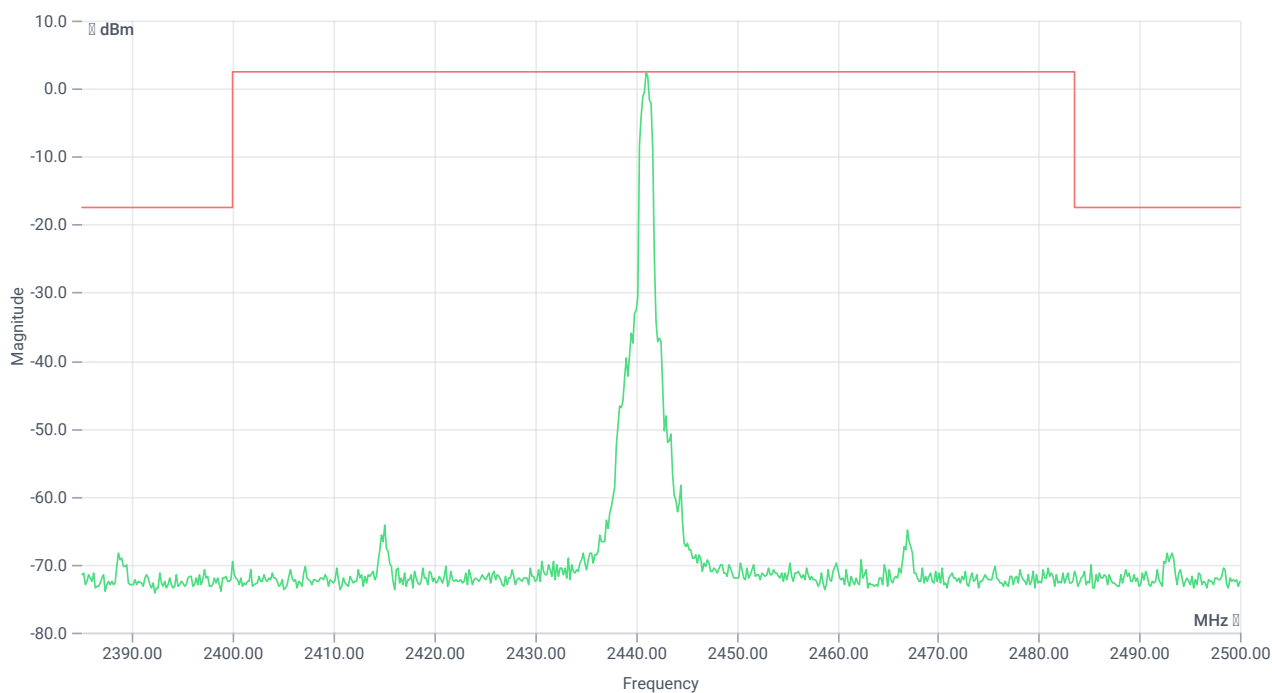


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2441.00 MHz	---	---	2.50	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 2597 MHz	0	---	30.57	dB	INFO

Test at TX 2480 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	2.21	dBm	INFO
Ref. frequency	---	---	2480.200	MHz	INFO

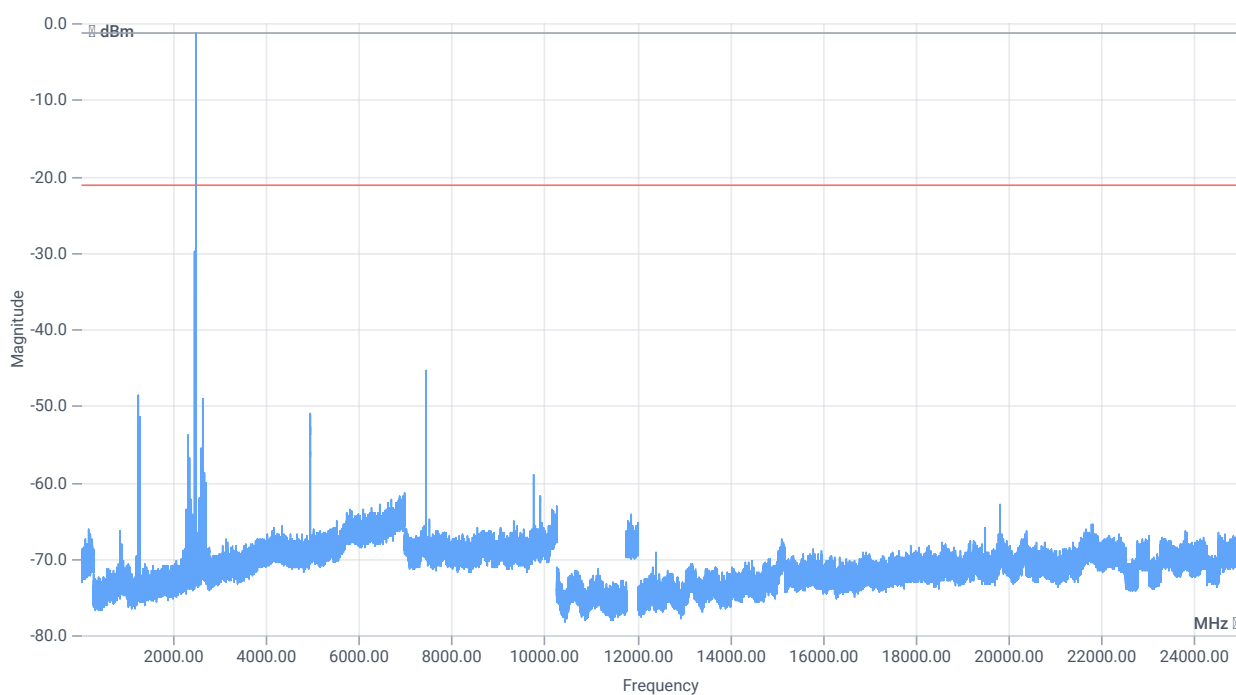

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.21 17.03 5
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

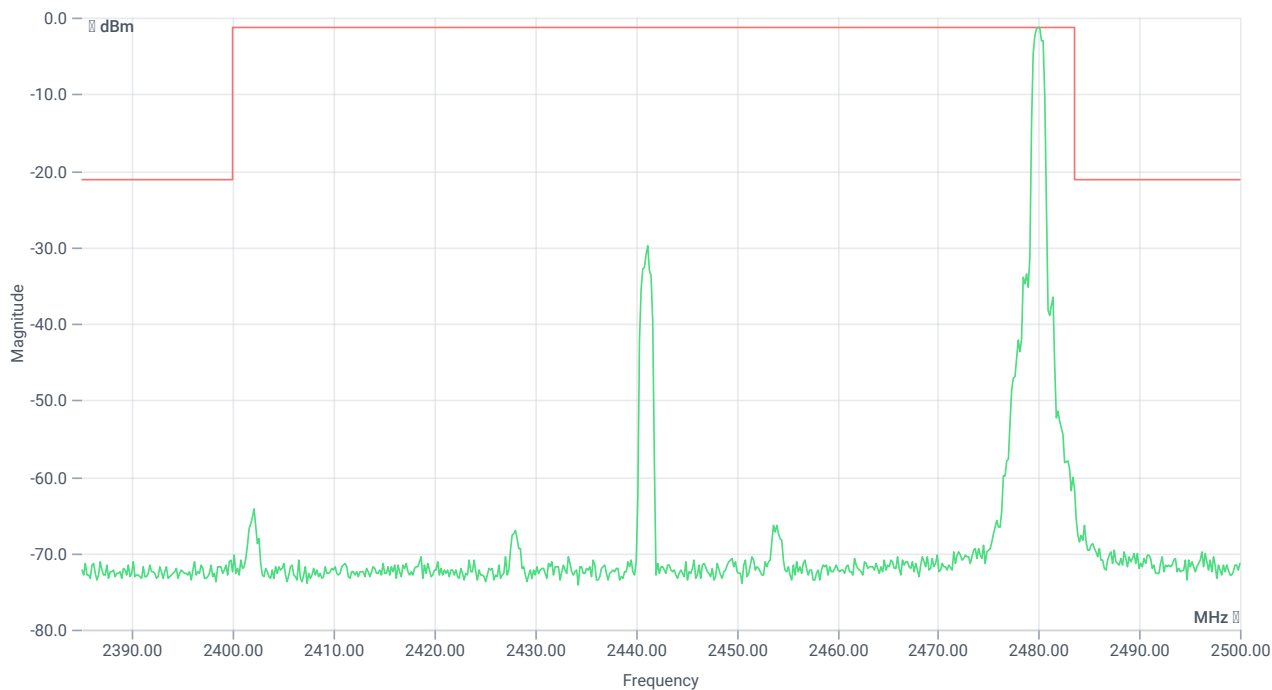

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2480.00 MHz	---	---	-1.27	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 7440.5 MHz	0	---	24.04	dB	INFO

Verdict

PASS

- END OF DOCUMENT -