

Operation Guide

2.4GHz Wireless One Receiver Attaches Multi Camera Series Model: ZT-811T ZT-820T

Warning

This product is for the sole purpose of security and applicable for monitoring in residential houses, shops and companies. The user shall observe local rules, regulations and laws, and shall be solely liable in this regard. This company shall not be liable for any illegalities therein.

Caution:

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.


FCC Statement:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

SPECIFICATIONS


CAMERA		
Imaging Sensor	CMOS	
CMOS Total Pixels	628 × 582(PAL); 510 × 492(NTSC)	
View Angle	62°	
Transmission Frequency	ISM 2,400MHz–2,483MHz	
Transmission Power	10mW/CE; 2mW/FCC	
Modulation Type	FM	
Bandwidth	18MHz	
Power Supply	+8V _{DC}	
Unobstructed Effective Range	100m	
Consumption Current	80mA	80mA(IR OFF) 120mA(IR ON)
Night Vision Range	Not Available	7m
Dimensions(W × D × H) (Excluding bracket)	23×24×23(mm)	Ø 44 x 56(mm)
Weight	20g	220g

DIAGRAM

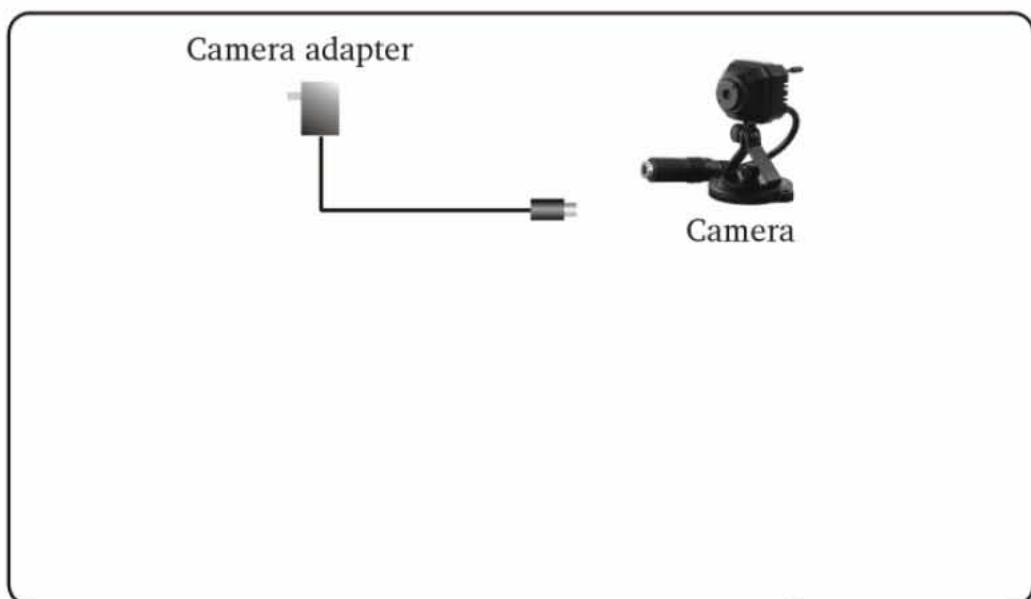

STRUCTURE

CAMERA

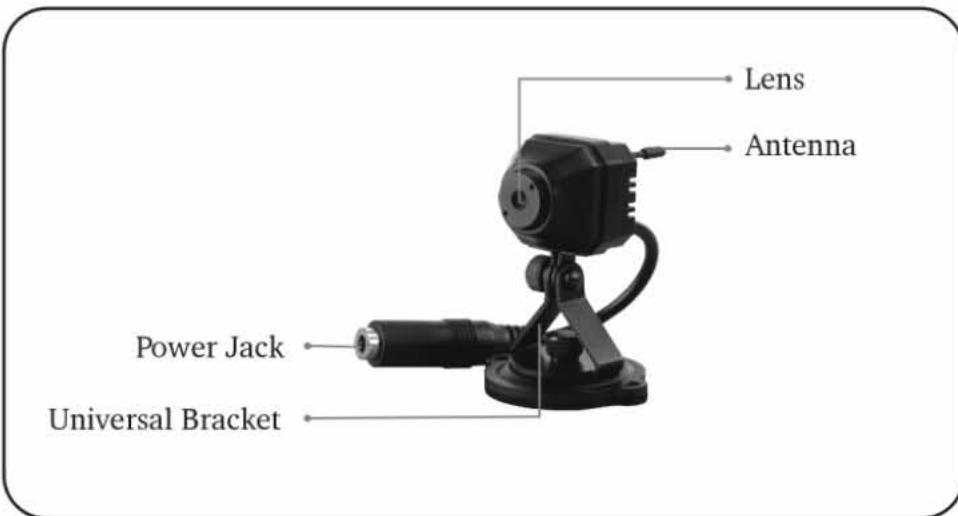


CAMERA CHANNEL SETUP

The channel number of the camera was marked on the unit. The label ① means **CH1** is available; ② means **CH2** is available; ③ means **CH3** is available and ④ means **CH4** is available.

Press the receiver's channel button to select the channel same as the camera's, and the pictures are displayed on the screen.

INSTALLATION

1. Locate the camera to a specific position and then adjust it to a suitable angle.

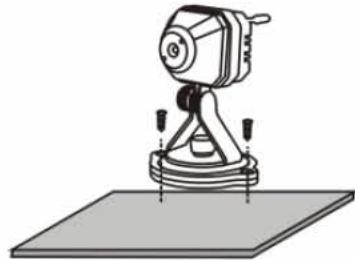

2. Connect the adapter to each camera.

