

FCC Radio TEST Report FCC ID: TW4-AT202-900M

This report concerns (check one): Original Grant Class I Change

Issued Date: Mar. 18, 2008 Report No.: 0803C021

Equipment : WIRELESS IP CAMERA

Model Name: AT202-900

Applicant : SHENZHEN AEE WIRELESS TECHNOLOGY

CO.,LTD

Address: 1/F., Blog, B, Tsinghua Hi-Tech Park, Northern Hi-Tech

Industrial Park, Nanshan District, Shenzhen, P.R.C.

Tested by:

Neutron Engineering Inc. EMC Laboratory

Date of Test:

Mar. 06, 2008 ~ Mar. 18, 2008

Testing Engineer :

lendy Huary

(Tendy Huang)

Technical Manager

(Steven Lu)

Authorized Signatory

(Vic Chiu)

NEUTRON ENGINEERING INC.

No. 132-1, Lane 329, Sec. 2, Palain Rd., Shijr City, Taipei, Taiwan TEL: (02) 2646-5426 FAX: (02) 2646-6815









Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

Neutron's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron**'s authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Report No.: NEI-FCCP-1-0803C021 Page 2 of 38



	Table of Contents	Page
1	. CERTIFICATION	5
2	. SUMMARY OF TEST RESULTS	6
	2.1 TEST FACILITY	7
	2.2 MEASUREMENT UNCERTAINTY	7
3	. GENERAL INFORMATION	8
	3.1 GENERAL DESCRIPTION OF EUT	8
	3.2 DESCRIPTION OF TEST MODES	9
	3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	9
	3.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	_
	3.5 DESCRIPTION OF SUPPORT UNITS	11
4	. EMC EMISSION TEST	12
	4.1 CONDUCTED EMISSION MEASUREMENT	12
	4.1.1 POWER LINE CONDUCTED EMISSION LIMITS 4.1.2 MEASUREMENT INSTRUMENTS LIST	12 12
	4.1.3 TEST PROCEDURE	13
	4.1.4 DEVIATION FROM TEST STANDARD 4.1.5 TEST SETUP	13 13
	4.1.7 TEST RESULTS	14
	4.2 RADIATED EMISSION MEASUREMENT	16
	4.2.1 RADIATED EMISSION LIMITS	16 17
	4.2.2 MEASUREMENT INSTRUMENTS LIST 4.2.3 TEST PROCEDURE	17
	4.2.4 DEVIATION FROM TEST STANDARD	18
	4.2.5 TEST SETUP 4.2.6 EUT OPERATING CONDITIONS	19 19
	4.2.7 TEST RESULTS (Between 30 – 1000 MHz)	20
	4.2.8 TEST RESULTS (Above 1000 MHz include fundamental frequency)	22
_	4.2.9 TEST RESULTS (Restricted Bands Requirements)	30
5	. BANDWIDTH TEST	34
	5.1 APPLIED PROCEDURES / LIMIT 5.1.1 MEASUREMENT INSTRUMENTS LIST	34 34
	5.1.2 TEST PROCEDURE	34
	5.1.3 DEVIATION FROM STANDARD 5.1.4 TEST SETUP	34 34
	5.1.4 TEST SETUP 5.1.5 EUT OPERATION CONDITIONS	34 34
	5.1.6 TEST RESULTS	35

Report No.: NEI-FCCP-1-0803C021 Page 3 of 38

	Table of Contents	Page
6 . EUT TEST PHOTO		37

Report No.: NEI-FCCP-1-0803C021 Page 4 of 38



1. CERTIFICATION

Equipment: WIRELESS IP CAMERA

Trade Name: AEE

Model Name: AT202-900

Applicant: SHENZHEN AEE WIRELESS TECHNOLOGY CO.,LTD

Date of Test: Mar. 06, 2008 ~ Mar. 18, 2008 Test Item: ENGINEERING SAMPLE

Standards: FCC Part15, Subpart C(15.249)/ ANCI C63.4: 2003

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-1-0803C021) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP and TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Report No.: NEI-FCCP-1-0803C021 Page 5 of 38



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

	FCC Part15, Subpart C (15.249)					
Standard Section	Test Item	Judgment	Remark			
15.207	Conducted Emission	PASS				
15.249	Radiated Spurious Emission	PASS				

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

Report No.: NEI-FCCP-1-0803C021 Page 6 of 38



2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **C01/OS02** at the location of No.132-1, Lane 329, Sec. 2, Palain Road, Shijr City, Taipei, Taiwan.

Neurtron's test firm number is: 95335.

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $\mathbf{y} \pm \mathbf{U}$, where expended uncertainty \mathbf{U} is based on a standard uncertainty multiplied by a coverage factor of $\mathbf{k=2}$, providing a level of confidence of approximately 95 % $^{\circ}$

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
C01	ANSI	150 KHz ~ 30MHz	1.94	

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)	NOTE
OS-01	ANSI	30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	Н	3.60	
		200MHz ~ 1,000MHz	V	3.86	
		200MHz ~ 1,000MHz	Н	3.94	
OS-02	ANSI	30MHz ~ 200MHz	V	2.48	
		30MHz ~ 200MHz	Н	2.16	
		200MHz ~ 1,000MHz	V	2.50	
		200MHz ~ 1,000MHz	Н	2.66	

Report No.: NEI-FCCP-1-0803C021 Page 7 of 38



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	WIRELESS IP CAMERA			
Trade Name	AEE			
Model Name	AT202-900			
OEM Brand/Model No.	N/A			
Model Difference	N/A			
	The EUT is a WIRELES	S IP CAMERA.		
	Operation Frequency:	902~928 MHz		
	Product Class:	Class 1		
	Receiver Class:	Class 3		
	Modulation Type:	FM		
	Number Of Channel	2 CH, Please see Note 2.		
Product Description	Antenna Designation:	Please see Note 3.		
	Antenna Gain(Peak)			
	Output Power:	-22.28dBm		
	Based on the application, features, or specification exhibited			
	in User's Manual, the EUT is considered as an			
	ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.			
<u> </u>				
Channel List	Please refer to the Note	2.		
	DC Voltage supplied from	m AC/DC adapter		
Power Source	Brand name:IE			
	Model name:ILD35-08-0300S			
Power Rating	#AC/DC Adapter			
r ower Rauling	I/P 120VAC~ 60Hz, O/P 7.5V, 0.3A			

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.	Freqeuncy Band	Channel No.	Frequency
	902~928MHz	1	906 MHz
	902 - 920WII IZ	2	924 MHz

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	-	=	Cable Antenna	N/A	1.6
2	REF	AR202-900	Dipole Antenna	R-SMA	2.0

Ant.1 for TX Sample (AT202-900) Ant.2 for RX Sample (AR202-900)

Report No.: NEI-FCCP-1-0803C021 Page 8 of 38



3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description	
Mode 1	TX CH01-906MHz	
Mode 2	TX CH02-924MHz	
Mode 3	Normal Link with RX Sample (AR202-900)	

For Conducted Test		
Final Test Mode	Description	
Mode 3	Normal Link with RX Sample (AR202-900)	

For Radiated Test		
Final Test Mode	Description	
Mode 1	TX CH01-906MHz	
Mode 2	TX CH02-924MHz	

Note:

(1) The measurements are performed at the highest, middle, lowest available channels.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters


Test Software Version	Hardware Control		
Frequency (MHz)	906 MHz 924 MHz		
	Def.	Def.	

Report No.: NEI-FCCP-1-0803C021 Page 9 of 38



3.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted/Radiated Mode

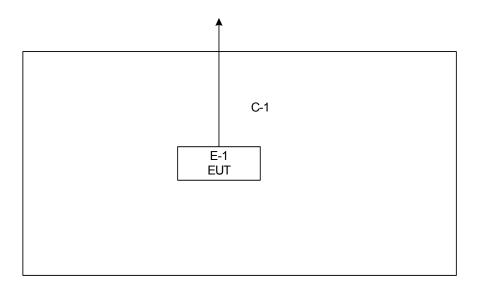

C-1 DC Power Line

Report No.: NEI-FCCP-1-0803C021 Page 10 of 38



3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	WIRELESS IP CAMERA	AEE	AT202-900	TW4-AT202-900M	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.9M	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <code>"Length_"</code> column.

Report No.: NEI-FCCP-1-0803C021 Page 11 of 38



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard	
TREQUENCT (MHZ)	Quasi-peak	Average	Quasi-peak	Average	Stanuaru	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR	
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR	
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR	

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00042991	Jan. 24, 2009
2	LISN	EMCO	3816/2	00042990	Jan. 24, 2009
3	Pulse Limiter	Electro-Metrics	EM-7600	112644	Nov. 27, 2008
4	50Ω Terminator	N/A	N/A	N/A	May.13, 2008
5	Test Cable	N/A	C01	N/A	Nov. 27, 2008
6	EMI Test Receiver	R&S	ESCI	100082	Mar. 07, 2009

Remark: "N/A" denotes No Model No., Serial No. or No Calibration specified.

The following table is the setting of the receiver

Receiver Parameters	Setting		
Attenuation	10 dB		
Start Frequency	0.15 MHz		
Stop Frequency	30 MHz		
IF Bandwidth	9 kHz		

Report No.: NEI-FCCP-1-0803C021 Page 12 of 38




4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

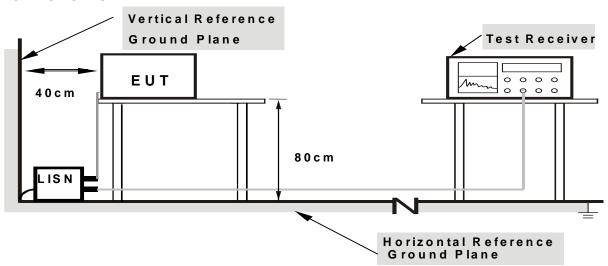

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.6 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

Report No.: NEI-FCCP-1-0803C021 Page 13 of 38




4.1.7 TEST RESULTS

EUT:	WIRELESS IP CAMERA	Model Name :	AT202-900		
Temperature :	25 ℃	Relative Humidity:	60 %		
Pressure:	1010 hPa	Test Power :	AC 120V/60Hz		
Test Mode :	st Mode : Normal Link with RX Sample (AR202-900)				

Freq.	Terminal	Measured(dBuV)		Limits(dBuV)		Margin	Note
(MHz)	L/N	QP-Mode	AV-Mode	QP-Mode	AV-Mode	(dB)	NOLE
0.40	Line	20.88	*	57.85	47.85	-36.97	(QP)
0.72	Line	20.10	*	56.00	46.00	-35.90	(QP)
1.03	Line	20.20	*	56.00	46.00	-35.80	(QP)
3.31	Line	20.68	*	56.00	46.00	-35.32	(QP)
7.65	Line	23.98	*	60.00	50.00	-36.02	(QP)
12.19	Line	24.53	*	60.00	50.00	-35.47	(QP)

Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of Note ... If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform In this case, a " * " marked in AVG Mode column of Interference Voltage Measured In the Normal Republic Norma
- (2) Measuring frequency range from 150KHz to 30MHz $^{\circ}$

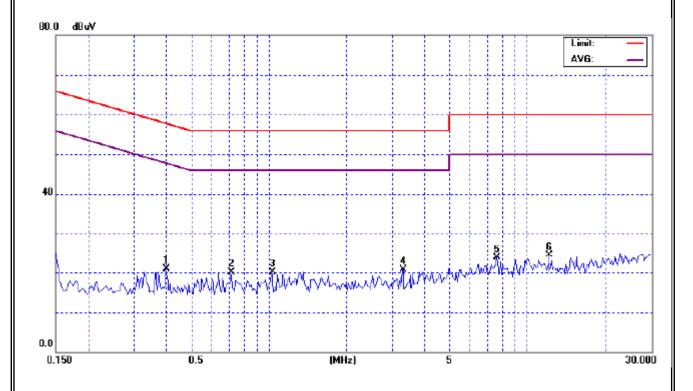

Report No.: NEI-FCCP-1-0803C021 Page 14 of 38




EUT:	WIRELESS IP CAMERA	Model Name :	AT202-900		
Temperature :	25 ℃	Relative Humidity:	60 %		
Pressure:	1010 hPa	Test Power :	AC 120V/60Hz		
Test Mode :	Normal Link with RX Sample (AR202-900)				

Freq.	Terminal	Measured(dBuV)		Limits(dBuV)		Margin	Note
(MHz)	L/N	QP-Mode	AV-Mode	QP-Mode	AV-Mode	(dB)	NOLE
0.18	Neutral	33.85	*	64.72	54.72	-30.87	(QP)
0.59	Neutral	24.68	*	56.00	46.00	-31.32	(QP)
1.68	Neutral	26.32	*	56.00	46.00	-29.68	(QP)
5.00	Neutral	32.56	*	56.00	46.00	-23.44	(QP)
6.58	Neutral	35.83	*	60.00	50.00	-24.17	(QP)
10.12	Neutral	35.07	*	60.00	50.00	-24.93	(QP)

Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of Note ... If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform In this case, a " * " marked in AVG Mode column of Interference Voltage Measured In the Normal Republic Norma
- (2) Measuring frequency range from 150KHz to 30MHz •

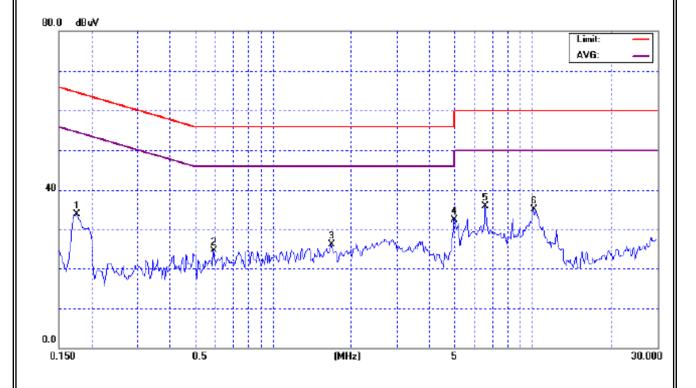

Report No.: NEI-FCCP-1-0803C021 Page 15 of 38



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies	Field Strength	Measurement Distance
(MHz)	(micorvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

	Class A (dBu	ıV/m) (at 3m)	Class B (dBuV/m) (at 3m)		
FREQUENCY (MHz)	PEAK	AVERAGE	PEAK	AVERAGE	
Above 1000	80	60	74	54	

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RADIATED EMISSION MEASUREMENT (FCC Part 15.249)

FCC Part15 (15.249) , Subpart C					
Limit	Frequency Range (MHz)				
Field strength of fundamental 50000 μV/m (94 dBμV/m) @ 3 m	2400-2483.5				
Field strength of harmonics 500 μV/m (54 dBμV/m) @ 3 m	Above 2483.5				

Report No.: NEI-FCCP-1-0803C021 Page 16 of 38



4.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	Schwarzbeck	VULB 9160	3058	Nov. 27, 2008
2	Test Cable	N/A	10M_OS02	N/A	Nov. 27, 2008
3	Test Cable	N/A	OS02-1/-2/-3	N/A	Nov. 27, 2008
4	Pre-Amplifier	Anritsu	MH648A	M09961	Nov. 27, 2008
5	EMI Test Receiver	R&S	ESCI	100082	Jan. 30, 2009
6	Antenna Mast	Chance Most	CMTB-1.5	N/A	N/A
7	Turn Table	Chance Most	CMTB-1.5	N/A	N/A
8	Spectrum Analyzer	R&S	FSP_40	100129	Jan. 07, 2009
9	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-325	Oct. 24, 2008
10	Horn Antenna	Schwarzbeck	BBHA9170	9170187	Oct. 24, 2008
11	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Mar. 09, 2009
12	Microflex Cable	United Microwave	57793	1m	Mar. 09, 2009
13	Microflex Cable	United Microwave	A30A30-500 6	10M	Jul. 07, 2008

Remark: "N/A" denotes No Model Name / Serial No. and No Calibration specified.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (other emission)	100KHz / 100KHz for peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

Report No.: NEI-FCCP-1-0803C021 Page 17 of 38



4.2.3 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.


4.2.4	DEVIATION FROM TEST STANDARD
No de	eviation

Report No.: NEI-FCCP-1-0803C021 Page 18 of 38




4.2.5 TEST SETUP

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

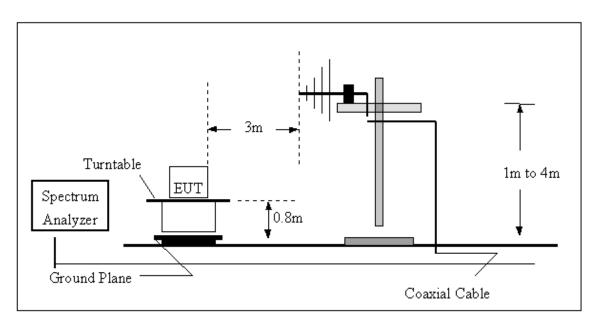

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

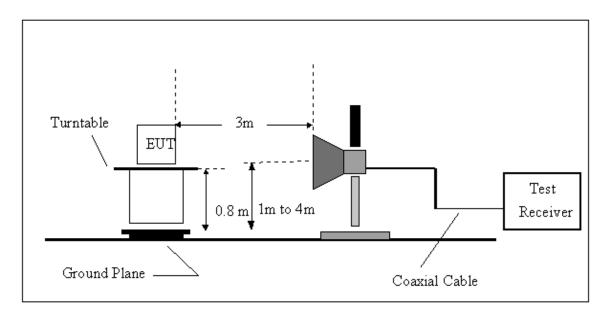

4.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **4.1.6** Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: NEI-FCCP-1-0803C021 Page 19 of 38




4.2.7 TEST RESULTS (Between 30 – 1000 MHz)

EUT:	WIRELESS IP CAMERA	Model Name :	AT202-900
Temperature :	26 ℃	Relative Humidity:	60 %
Pressure :	1010 hPa	Test Power :	AC 120V/60Hz
Test Mode :	TX Mode		

Freq.	Ant.	Reading(RA)	` ,	, ,	Limits(QP)	Margin	Note
(MHz)	H/V	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
55.22	V	49.66	-22.18	27.48	40.00	- 12.52	
61.04	V	50.48	-22.94	27.54	40.00	- 12.46	
119.24	V	41.45	-21.70	19.75	43.50	- 23.75	
165.80	V	52.13	-20.10	32.03	43.50	- 11.47	
604.24	V	39.85	-8.27	31.58	46.00	- 14.42	
747.80	V	40.02	-6.41	33.61	46.00	- 12.39	

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of ${}^{\mathbb{F}}$ Note ${}_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ${}_{\circ}$
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode or QP detector mode of the emission
- (4) Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

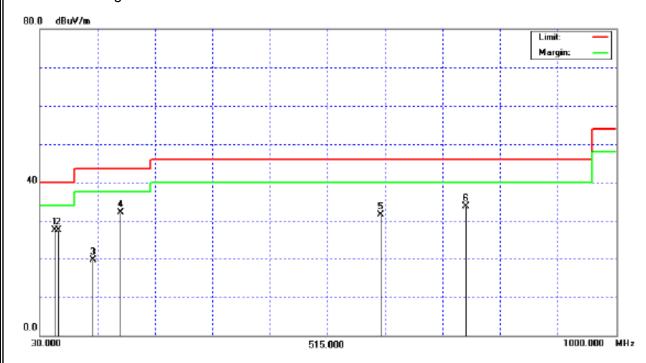

Report No.: NEI-FCCP-1-0803C021 Page 20 of 38




EUT:	WIRELESS IP CAMERA	Model Name :	AT202-900
Temperature :	26 ℃	Relative Humidity:	60%
Pressure:	1010 hPa	Test Power :	AC 120V/60Hz
Test Mode :	TX Mode		

Freq.	Ant.	Reading(RA)	Corr.Factor(CF)	Measured(FS)	Limits(QP)	Margin	Note
(MHz)	H/V	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	NOLE
57.16	Ι	41.23	-22.49	18.74	40.00	- 21.26	
88.20	Ι	42.69	-21.31	21.38	43.50	- 22.12	
130.88	Н	39.87	-21.93	17.94	43.50	- 25.56	
167.74	Н	45.26	-20.14	25.12	43.50	- 18.38	
210.42	Н	43.97	-18.72	25.25	43.50	- 18.25	
297.72	Η	42.16	-15.16	27.00	46.00	- 19.00	

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of ${}^{\mathbb{F}}$ Note ${}_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ${}_{\circ}$
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode or QP detector mode of the emission
- (4) Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

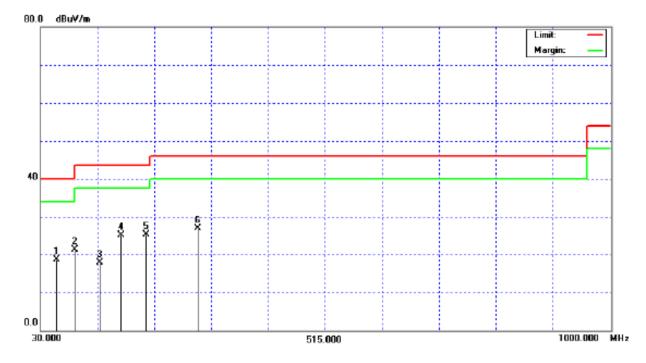

Report No.: NEI-FCCP-1-0803C021 Page 21 of 38



4.2.8 TEST RESULTS (Above 1000 MHz include fundamental frequency)

EUT:	WIRELESS IP CAMERA	Model Name :	AT202-900
Temperature :	26 ℃	Relative Humidity:	60 %
Pressure:	1010 hPa	Test Power :	AC 120V/60Hz
Test Mode :	TX CH01 - 906MHz		

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		
		Peak	QP		Peak	QP	Peak	QP	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
900.08	V	45.69	35.26	-3.62	42.07	31.64	46.00	46.00	X/E
900.88	V	47.58	37.12	-3.62	43.96	33.50	46.00	46.00	X/E
902.00	V	46.58	37.45	-3.61	42.97	33.84	46.00	46.00	X/E

Freq.	Ant.Pol.	Reading		Ant./CF	A	Act.		Limit	
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
905.38	V	73.71	46.58	-3.60	70.11	42.98	114.00	94.00	X/F

Freq.	Ant.Pol.	Rea	ding	Ant./CF	A	ct.	Limit		
		Peak	Peak AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
1811.96	V	42.19	32.36	-5.29	36.90	27.07	74.00	54.00	X/H


Remark:

- (1) All readings are Peak unless otherwise stated QP in column of ${}^{\mathbb{F}}$ Note ${}_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ${}_{\circ}$
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission •
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axes:

"X" - denotes Laid on Table; "Y" - denotes Vertical Stand; "Z" - denotes Side Stand

Report No.: NEI-FCCP-1-0803C021 Page 22 of 38



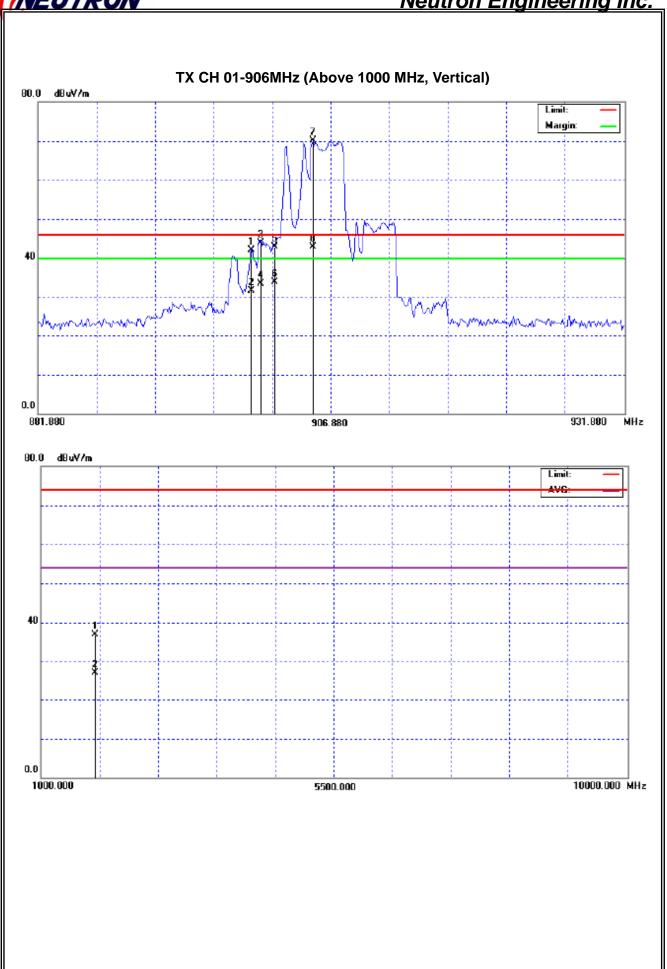

Report No.: NEI-FCCP-1-0803C021 Page 23 of 38



EUT:	WIRELESS IP CAMERA	Model Name :	AT202-900
Temperature :	26 ℃	Relative Humidity:	60 %
Pressure :	1010 hPa	Test Power :	AC 120V/60Hz
Test Mode :	TX CH01 - 906MHz		

Ī	Freq.	Ant.Pol.	Rea	ding	Ant./CF	Α	ct.	Limit		
			Peak	QP		Peak	QP	Peak	QP	Note
	(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
ſ	902.00	Н	42.01	37.52	-3.61	38.40	33.91	46.00	46.00	X/E

Freq.	Ant.Pol.	Rea	ding	Ant./CF	A	ct.	Lir	mit	
		Peak	QP		Peak	QP	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
907.58	Н	65.98	63.95	-3.59	62.39	60.36	114.00	94.00	X/F

Freq.	Ant.Pol.	Rea	ding	Ant./CF	A	ct.	Limit		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
1812.03	Н	44.66	33.60	-5.29	39.37	28.31	74.00	54.00	X/H


Remark:

- (1) All readings are Peak unless otherwise stated QP in column of ${}^{\mathbb{F}}$ Note ${}_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ${}_{\circ}$
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axes:

"X" - denotes Laid on Table; "Y" - denotes Vertical Stand; "Z" - denotes Side Stand

Report No.: NEI-FCCP-1-0803C021 Page 24 of 38



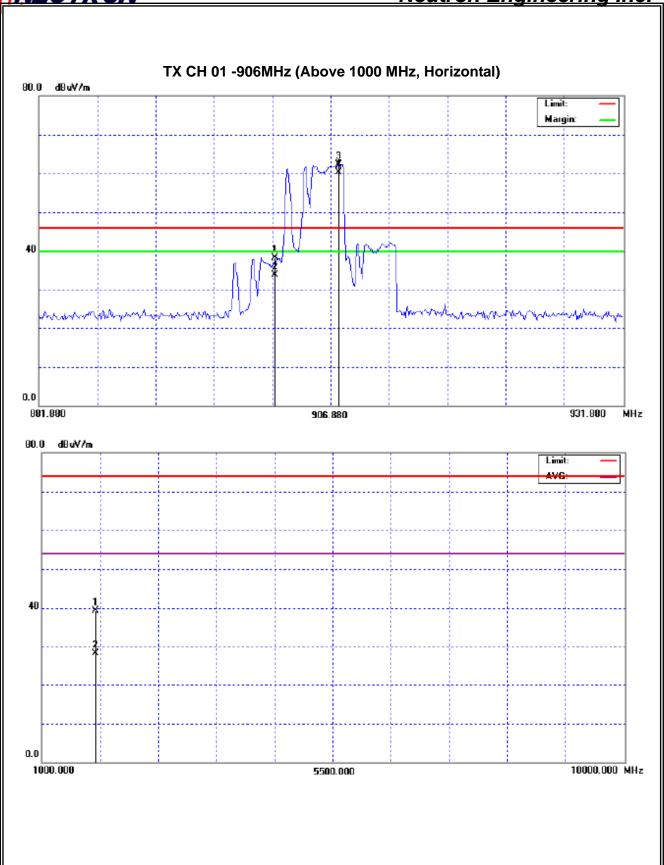

Report No.: NEI-FCCP-1-0803C021 Page 25 of 38



EUT:	WIRELESS IP CAMERA	Model Name :	AT202-900
Temperature:	26 ℃	Relative Humidity:	60 %
Pressure :	1010 hPa	Test Power :	AC 120V/60Hz
Test Mode :	TX CH 02 - 924 MHz		

Freq.	Ant.Pol.	Rea	ding	Ant./CF	Act.		Lir		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
924.88	V	68.85	49.23	-3.51	65.34	45.72	114.00	94.00	X/F

Freq.	Ant.Pol.	Rea	ding	Ant./CF	A	ct.	Limit		
		Peak			Peak	QP	Peak	QP	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
928.00	V	47.43	32.57	-3.50	43.93	29.07	46.00	46.00	X/E

Freq.	Ant.Pol.	Rea	ding	Ant./CF	A	ct.	Limit		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
1848.06	V	41.42	32.87	-5.08	36.16	27.79	74.00	54.00	X/H


Remark:

- (1) All readings are Peak unless otherwise stated QP in column of ${}^{\mathbb{F}}$ Note ${}_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ${}_{\circ}$
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission •
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axes:

"X" - denotes Laid on Table; "Y" - denotes Vertical Stand; "Z" - denotes Side Stand

Report No.: NEI-FCCP-1-0803C021 Page 26 of 38



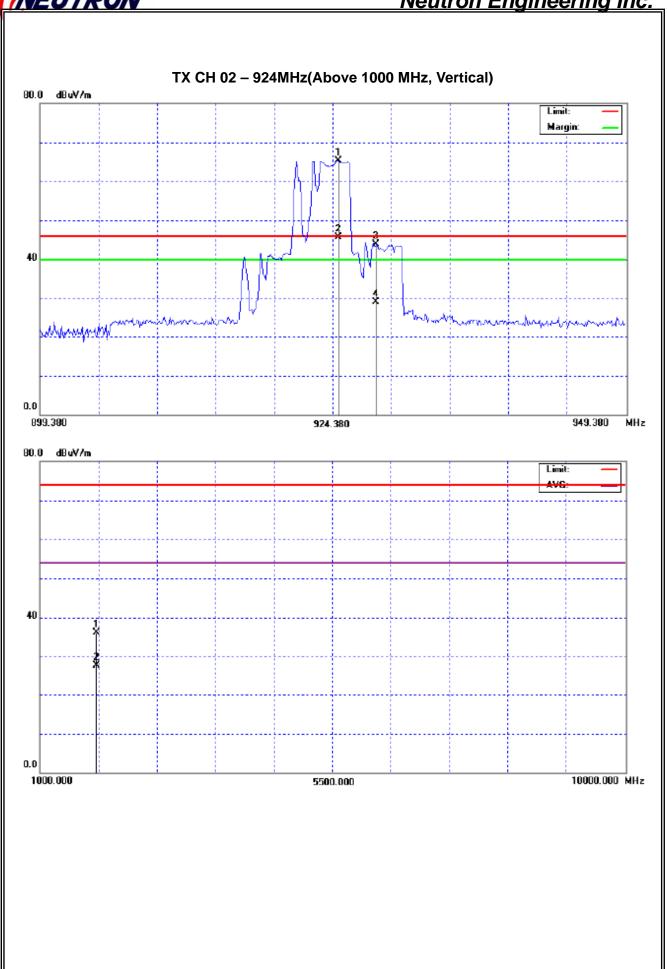

Report No.: NEI-FCCP-1-0803C021 Page 27 of 38



EUT:	WIRELESS IP CAMERA	Model Name :	AT202-900
Temperature :	26 ℃	Relative Humidity:	60%
Pressure:	1010 hPa	Test Power :	AC 120V/60Hz
Test Mode :	TX CH 02 - 924 MHz		

Freq.	Ant.Pol.	Rea	ding	Ant./CF	A	ct.	Limit		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
925.78	Н	66.24	43.12	-3.51	62.73	39.61	114.00	94.00	X/F

Freq.	Ant.Pol.	Rea	ding	Ant./CF	A	ct.	Limit		
		Peak	QP		Peak	QP	Peak	QP	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
928.00	Н	45.33	25.56	-3.50	41.83	22.06	46.00	46.00	X/E

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
1848.06	Н	44.24	33.20	-3.50	39.16	28.12	74.00	54.00	X/H


Remark:

- (1) All readings are Peak unless otherwise stated QP in column of ${}^{\mathbb{F}}$ Note ${}_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ${}_{\circ}$
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axes:

"X" - denotes Laid on Table; "Y" - denotes Vertical Stand; "Z" - denotes Side Stand

Report No.: NEI-FCCP-1-0803C021 Page 28 of 38



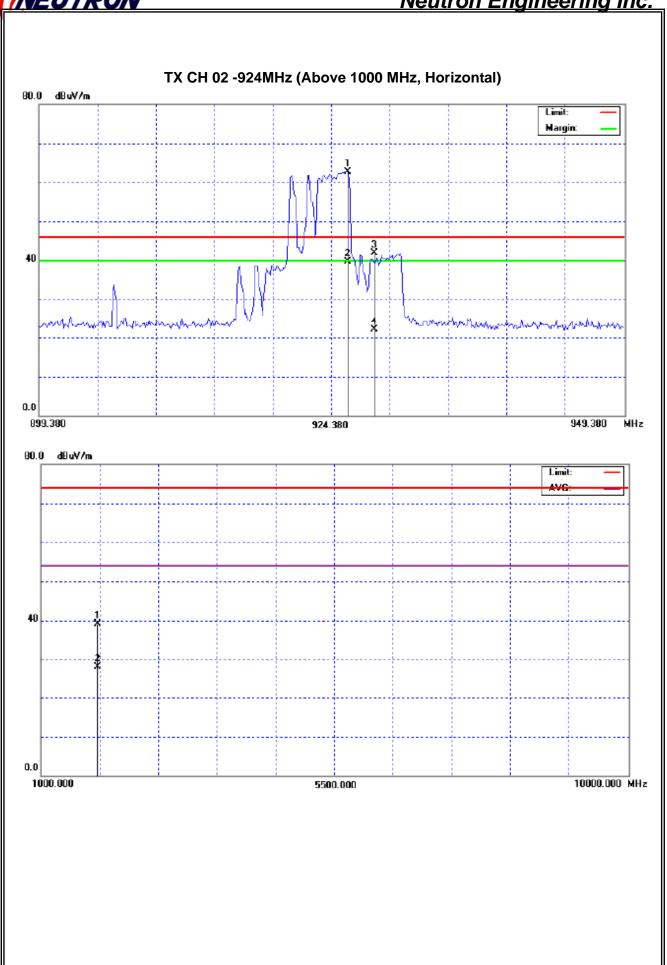

Report No.: NEI-FCCP-1-0803C021 Page 29 of 38



4.2.9 TEST RESULTS (Restricted Bands Requirements)

EUT:	WIRELESS IP CAMERA	Model Name :	AT202-900				
Temperature :	26 ℃	Relative Humidity:	56 %				
Pressure:	1010 hPa	Test Power :	AC 120V/60Hz				
Test Mode :	TX CH 01/02(Vertical)						
Note:	 The emission of the carrier radi AV) as following: 1. The transmitter was then corto transmit at the lowest charmeasured at 902~928 MHz. 2. The transmitter was configuratransmit at the highest charmeasured at 902~928 MHz. 	nfigured with the wor nnel (CH01). Then the	st case antenna and setup the field strength was se antenna and setup to				

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		
		QP	AV		QP	AV	QP	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
902.00	V	46.58	37.45	-3.61	42.97	33.84	46.00		CH01
928.00	V	47.43	32.57	-3.50	43.93	29.07	46.00		CH02


Remark:

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission $\,^{\circ}$
- (2) EUT Orthogonal Axes:

"X" - denotes Laid on Table; "Y" - denotes Vertical Stand; "Z" - denotes Side Stand

Report No.: NEI-FCCP-1-0803C021 Page 30 of 38



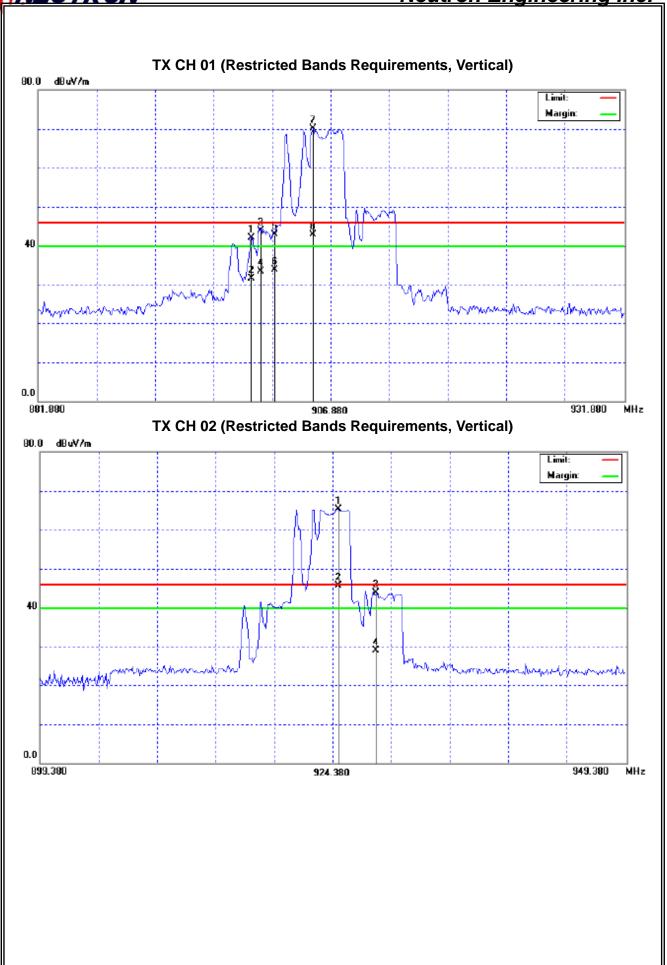

Report No.: NEI-FCCP-1-0803C021 Page 31 of 38



EUT:	WIRELESS IP CAMERA	Model Name :	AT202-900			
Temperature :	26 ℃	Relative Humidity:	56 %			
Pressure :	1010 hPa	Test Power :	AC 120V/60Hz			
Test Mode :	TX CH 01/02 (Horizontal)					
Note:	 The emission of the carrier rad AV) as following: 1. The transmitter was then conto transmit at the lowest chameasured at 902~928 MHz. 2. The transmitter was configur transmit at the highest chanmeasured at 902~928 MHz. 	nfigured with the wor nnel (CH01). Then the	st case antenna and setup ne field strength was se antenna and setup to			

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		
		QP	AV		QP	AV	QP	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
902.00	Н	42.01	37.52	-3.61	38.40	33.91	46.00		CH01
928.00	Н	94.21	94.01	-3.56	90.65	90.45	46.00		CH02


Remark:

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission •
- (2) EUT Orthogonal Axes:

"X" - denotes Laid on Table; "Y" - denotes Vertical Stand; "Z" - denotes Side Stand

Report No.: NEI-FCCP-1-0803C021 Page 32 of 38



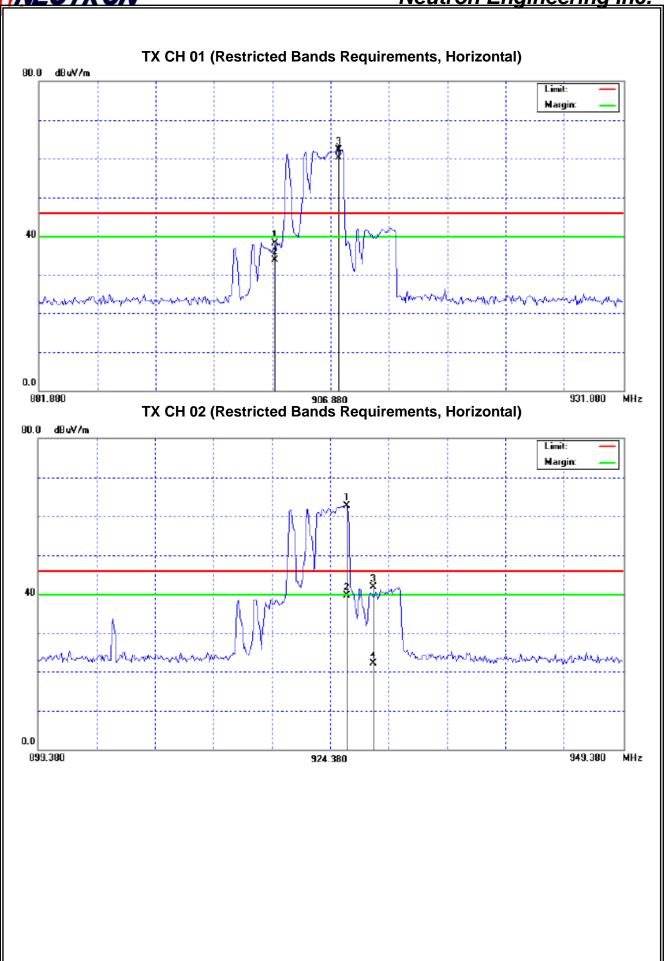

Report No.: NEI-FCCP-1-0803C021 Page 33 of 38



5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

1								
	FCC Part15 (15.247) , Subpart C							
	Section	Test Item	Limit	Frequency Range (MHz)	Result			
	15.247 (a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS			

5.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP_40	100129	Jan. 07, 2009

Remark: "N/A" denotes No Model Name, Serial No. or No Calibration specified.

5.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = 20 ms.

5.1.3 DEVIATION FROM STANDARD

No deviation.

5.1.4 TEST SETUP

EUT	•	SPECTRUM
		ANALYZER

5.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: NEI-FCCP-1-0803C021 Page 34 of 38




5.1.6 TEST RESULTS

EUT:	WIRELESS IP CAMERA	Model Name :	AT202-900
Temperature :	22 ℃	Relative Humidity:	66%
Pressure :	1004 hPa	Test Power :	AC 120V/60Hz
Test Mode :	TX CH 01/02		

Test Channel	Frequency	Bandwidth	99% Occupied BW	LIMIT
	(MHz)	(MHz)	(MHz)	(MHz)
CH01	906	7.64	9.92	>=500KHz
CH02	924	9.40	9.48	>=500KHz

Report No.: NEI-FCCP-1-0803C021 Page 35 of 38



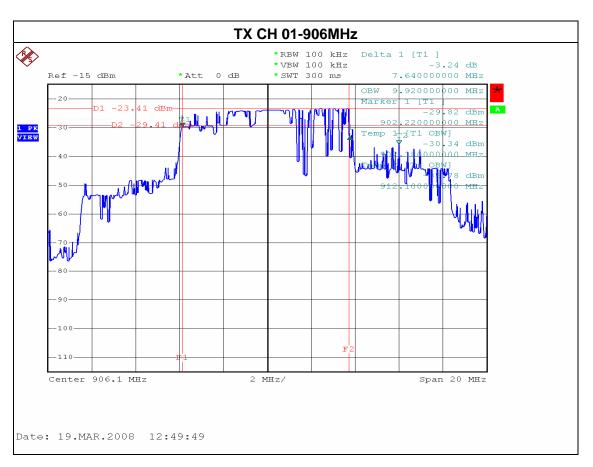



Report No.: NEI-FCCP-1-0803C021 Page 36 of 38



6. EUT TEST PHOTO

Conducted Measurement Photos






Report No.: NEI-FCCP-1-0803C021 Page 37 of 38



Radiated Measurement Photos



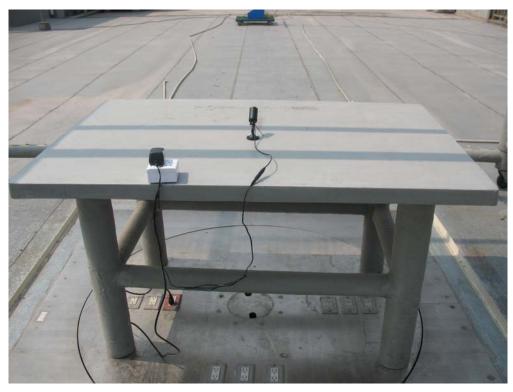

Report No.: NEI-FCCP-1-0803C021 Page 38 of 38