

FCC Radio Test Report

FCC ID: TW5GD7105

This report concerns	(check one):	Original Grant	Class II Change
Tilla report concerns (CHECK OHE).	Original Orant	Class II Change

Issued Date : Sep. 10, 2013 **Project No.** : 1308C129

Equipment: 4CH Digital Wireless Security System

Model Name: GD7105

Applicant: ShenZhen Gospell Smarthome Electronic

Co., Ltd.

Address : East of 01st-04st Floor, Block A,No.1

Industrial park, Fenghuanggang, South of No.1 Baotian Road, Xixiang street, Bao'an

District, Shenzhen City, Guangdong

Province 518126, P.R. China.

Tested by: Neutron Engineering Inc. EMC Laboratory

Date of Receipt: Aug. 15, 2013

Date of Test: Aug. 15, 2013~ Sep. 09, 2013

Testing Engineer : Javid Mao

(David Mao)

Technical Manager

(Leo Hung)

Authorized Signatory:

(Steven Lu)

Neutron Engineering Inc.

No.3, Jinshagang 1st Road, ShiXia, Dalang Town, Dong Guan, China.

TEL: 0769-8318-3000 FAX: 0769-8319-6000



Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **CHINA**, or National Institute of Standards and Technology (**NIST**) of **U.S.A**.

Neutron's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron**'s authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Report No.: NEI-FCCP-1-1308C129 Page 2 of 66

Table of Contents	Page
1. CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
	-
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	10
3.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTE	D 11
3.5 DESCRIPTION OF SUPPORT UNITS	12
4 . EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
4.1.2 MEASUREMENT INSTRUMENTS LIST AND SETTING	13
4.1.3 TEST PROCEDURE 4.1.4 DEVIATION FROM TEST STANDARD	14 14
4.1.5 TEST SETUP	14
4.1.6 EUT OPERATING CONDITIONS	14
4.1.7 TEST RESULTS	15
4.2 RADIATED EMISSION MEASUREMENT	18
4.2.1 RADIATED EMISSION LIMITS	18
4.2.2 MEASUREMENT INSTRUMENTS LIST ANS SETTING 4.2.3 TEST PROCEDURE	19 21
4.2.4 DEVIATION FROM TEST STANDARD	21
4.2.5 TEST SETUP	22
4.2.6 EUT OPERATING CONDITIONS	23
4.2.7 TEST RESULTS (BETWEEN30 – 1000 MHZ)	24
4.2.8 TEST RESULTS (ABOVE 1000 MHZ)	31
5 . NUMBER OF HOPPING CHANNEL	43
5.1 APPLIED PROCEDURES / LIMIT	43
5.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING 5.1.2 TEST PROCEDURE	43 43
5.1.3 DEVIATION FROM STANDARD	43 43
5.1.4 TEST SETUP	43
5.1.5 EUT OPERATION CONDITIONS	43
5.1.6 TEST RESULTS	44
6 . AVERAGE TIME OF OCCUPANCY	45

Report No.: NEI-FCCP-1-1308C129 Page 3 of 66

Neuti	ron Engineering Inc Table of Content
6.1 APPLIED F	PROCEDURES / LIMIT
6.1.1 MEAS	SUREMENT INSTRUMENTS I
6 1 2 TEST	PROCEDURE

Table of Contents	Page
6.1 APPLIED PROCEDURES / LIMIT	45
6.1.1 MEASUREMENT INSTRUMENTS LIST	45
6.1.2 TEST PROCEDURE	45
6.1.3. TEST SETUP LAYOUT 6.1.4. TEST DEVIATION	45 45
6.1.5. EUT OPERATION DURING TEST	45 45
6.1.6. TEST RESULTS	46
7 . HOPPING CHANNEL SEPARATION MEASUREMENT	48
7.1 APPLIED PROCEDURES / LIMIT	48
7.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING	48
7.1.2 TEST PROCEDURE	48
7.1.3 DEVIATION FROM STANDARD	48
7.1.4 TEST SETUP	48
7.1.5 EUT OPERATION CONDITIONS	48
7.1.6 TEST RESULTS	49
8 . BANDWIDTH TEST	51
8.1 APPLIED PROCEDURES / LIMIT	51
8.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING	51
8.1.2 TEST PROCEDURE	51
8.1.3 DEVIATION FROM STANDARD 8.1.4 TEST SETUP	51 51
8.1.5 EUT OPERATION CONDITIONS	51 51
8.1.6 TEST RESULTS	52
9 . PEAK OUTPUT POWER TEST	54
9.1 APPLIED PROCEDURES / LIMIT	54
9.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING	54
9.1.2 TEST PROCEDURE	54
9.1.3 DEVIATION FROM STANDARD	54
9.1.4 TEST SETUP	54
9.1.5 EUT OPERATION CONDITIONS	54
9.1.6 TEST RESULTS	55
10 . ANTENNA CONDUCTED SPURIOUS EMISSION	57
10.1 APPLIED PROCEDURES / LIMIT	57
10.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING	57
10.1.2 TEST PROCEDURE	57 57
10.1.3 DEVIATION FROM STANDARD 10.1.4 TEST SETUP	57 57
10.1.5 EUT OPERATION CONDITIONS	57 57
10.1.6 TEST RESULTS	58
11 . EUT PHOTOS	64

Report No.: NEI-FCCP-1-1308C129

1. CERTIFICATION

Equipment : 4CH Digital Wireless Security System

Brand Name: GOSCAM Model Name: GD7105

Applicant : ShenZhen Gospell Smarthome Electronic Co., Ltd. Manufacturer : ShenZhen Gospell Smarthome Electronic Co., Ltd.

Address East of 01st-04st Floor, Block A,No.1 Industrial park, Fenghuanggang, South of

: No.1 Baotian Road, Xixiang street, Bao'an District, Shenzhen City, Guangdong

Province 518126, P.R. China.

Factory : ShenZhen Gospell Smarthome Electronic Co., Ltd.

Address : East of 01st-04st Floor, Block A,No.1 Industrial park, Fenghuanggang, South of

No.1 Baotian Road, Xixiang street, Bao'an District, Shenzhen City, Guangdong

Province 518126, P.R. China.

Date of Test : Aug. 15, 2013~ Sep. 09, 2013 Test Item : ENGINEERING SAMPLE

Standard(s) : FCC Part15, Subpart C(15.247) / ANSI C63.4 : 2009

FCC Public Notice DA 00-705, March 30, 2000.

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-1-1308C129) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Report No.: NEI-FCCP-1-1308C129 Page 5 of 66

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): 47 CFR Part 15, Subpart C				
Standard(s) Section 47 CFR Part 15	Test Item	Judgment	Remark	
15.207	Conducted Emission	PASS		
15.247(d)	Antenna conducted Spurious Emission	PASS		
15.247 (a)(1)	Hopping Channel Separation PASS			
15.247 (b)(1)	Peak Output Power	PASS		
15.247(d) 15.209	Radiated Spurious Emission	PASS		
15.247 (a)(1)(iii)	Number of Hopping Frequency	PASS		
15.247 (a)(1)(iii)	Dwell Time	PASS		
15.205	Restricted Bands	PASS		
15.203	Antenna Requirement	PASS		

NOTE:

- (1)" N/A" denotes test is not applicable in this test report.
- (2) According to FCC Public Notice DA 00-705, March 30, 2000.

Report No.: NEI-FCCP-1-1308C129 Page 6 of 66

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **DG-C01/DG-CB03** at the location of No.3, Jinshagang 1st Road, ShiXia, Dalang Town, Dong Guan, China.523792 Neutron's test firm number for FCC 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The reported uncertainty of measurement $\mathbf{y} \pm \mathbf{U}$, where expended uncertainty \mathbf{U} is based on a standard uncertainty multiplied by a coverage factor of $\mathbf{k=2}$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U,(dB)	NOTE
DG-C01	CISPR	150 KHz ~ 30MHz	1.94	

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)	NOTE	
		9KHz~30MHz	V	3.79		
		9KHz~30MHz	Н	3.57		
		30MHz ~ 200MHz	V	3.82		
		30MHz ~ 200MHz	Н	3.60		
DG-CB03	CISPR	200MHz ~ 1,000MHz	V	3.86		
DO-CD03	CISEIX	200MHz ~ 1,000MHz	Н	3.94		
		1GHz~18GHz	V	3.12		
			1GHz~18GHz	Н	3.68	
		18GHz~40GHz	V	4.15		
		18GHz~40GHz	Н	4.14		

Report No.: NEI-FCCP-1-1308C129 Page 7 of 66

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	4CH Digital Wireless Security System		
Brand Name	GOSCAM		
Model Name	GD7105		
Model Difference	N/A		
Product Description	Operation Frequency: Modulation Technology: Bit Rate of Transmitter: Number Of Channel Antenna Designation: Antenna Gain(Peak) Output Power: More details of EUT tech User's Manual.	2406~2475MHz QPSK,BPSK 3Mbps 24 CH, Please see note 2. (Page 9) Please see note 3. (Page 9) 9.52dBm (Max) nical specification, please refer to the	
Power Source	DC Voltage supplied from AC/DC adapter. Model: GP303U-050-200		
Power Rating	I/P:100-240V~50/60Hz 0.8A O/P:5V/2A		
Connecting I/O Port(s)	Please refer to the User'	s Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

Report No.: NEI-FCCP-1-1308C129 Page 8 of 66



2

Channel List

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2406	09	2430	17	2454
02	2409	10	2433	18	2457
03	2412	11	2436	19	2460
04	2415	12	2439	20	2463
05	2418	13	2442	21	2466
06	2421	14	2445	22	2469
07	2424	15	2448	23	2472
08	2427	16	2451	24	2475

3. Table for Filed Antenna

Ant	. Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	Goscam	P/N:2.4GHZ	Dipole	R-SMA	2.0
I	Gostaili	antenna	Antenna	IV-OIVIA	2.0

Report No.: NEI-FCCP-1-1308C129 Page 9 of 66

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode NOTE (1)

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Emission		
Final Test Mode	Description	
Mode 1	TX Mode NOTE (1)	

For Radiated Emission				
Final Test Mode Description				
Mode 1 TX Mode NOTE (1)				

Note:

(1) The measurements are performed at the high, middle, low available channels.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS


Test software version	NA				
Frequency	2406MHz 2442MHz 2475MHz				
Parameters	8	8	8		

Report No.: NEI-FCCP-1-1308C129 Page 10 of 66




3.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated:

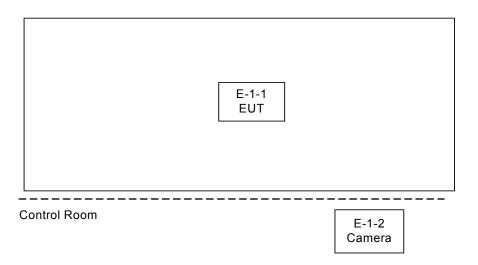

Conducted:

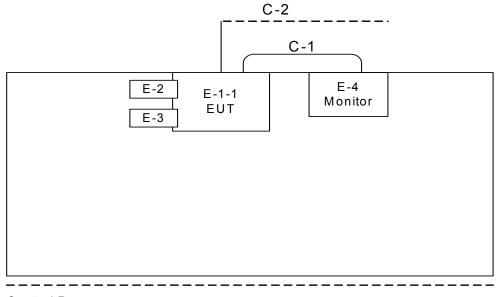

Control Room

E-2 Flash Disk

E-3 SD Card

C-1 Audio + Video In Cable

C-2 RJ45 Cable

E-1-2 Camera E-5 Wireless Router

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1-1 E-1-2	4CH Digital Wireless Security System	GOSCAM	GD7105	TW5GD7105	N/A	EUT
E-2	Flash Disk	Kingston	DTI/1GB	DOC	520B21E4-8199 57C	
E-3	SD Card	Hagiwara	HPC-SD64T	DOC	0326TA5355H	
E-4	LCD monitor	Dell	E177FPc	DOC	CNOFJ179-641 80-6AG-1WNS	
E-5	Wireless Router	Tenda	W300A	DOC	NA	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.5m	
C-2	YES	NO	10m	

Note:

(1) For detachable type I/O cable should be specified the length in m in <code>"Length_"</code> column.

Report No.: NEI-FCCP-1-1308C129 Page 12 of 66

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B	Standard		
TREQUENCT (MITZ)	Quasi-peak	Quasi-peak Average Quasi-pea		Average	Standard	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR	
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR	
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR	

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

4.1.2 MEASUREMENT INSTRUMENTS LIST AND SETTING

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00052765	Apr. 25, 2014
2	LISN	R&S	ENV216	100087	Nov.16.2013
3	Test Cable	N/A	C_17	N/A	Mar.15.2014
4	EMI TEST RECEIVER	R&S	ESCS30	826547/022	Apr. 25, 2014
5	50Ω Terminator	SHX	TF2-3G-A	08122902	Apr. 25, 2014

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of Equipment List is One Year.

The following table is the setting of the receiver

Receiver Parameters	Setting		
Attenuation	10 dB		
Start Frequency	0.15 MHz		
Stop Frequency	30 MHz		
IF Bandwidth	9 kHz		

Report No.: NEI-FCCP-1-1308C129 Page 13 of 66


4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

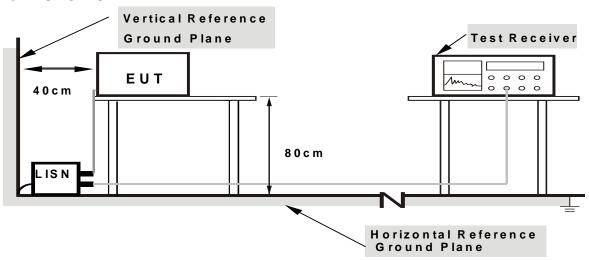

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.6 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT is continued Transmitter/Receive data or Hopping on mode.

Report No.: NEI-FCCP-1-1308C129 Page 14 of 66

4.1.7 TEST RESULTS

R	۵	m	2	r	L
\boldsymbol{L}	H		a	ш	ĸ


(1) All readings are QP Mode value unless otherwise stated AVG in column of Note. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.

(2)	Measuring	frequency	range from	150KHz to	30MHz
-----	-----------	-----------	------------	-----------	-------

Report No.: NEI-FCCP-1-1308C129 Page 15 of 66



EUT:	4CH Digital Wireless Security System	Model Name :	GD7105
Temperature:	26 ℃	Relative Humidity:	53 %
Test Power:	AC 120V/60Hz	Phase:	Line
Test Mode:	TX Mode		

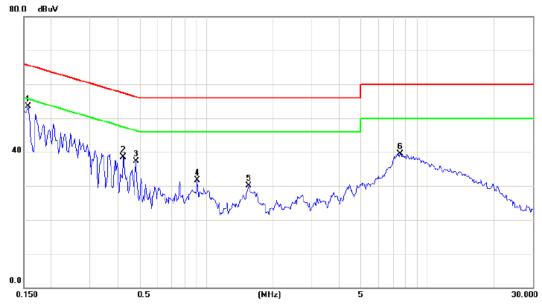


No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	0.1572	43.98	9.50	53.48	65.61	-12.13	peak	
2	0.4213	29.05	9.52	38.57	57.42	-18.85	peak	
3	0.4811	27.81	9.52	37.33	56.32	-18.99	peak	
4	0.9082	22.20	9.54	31.74	56.00	-24.26	peak	
5	1.5600	20.59	9.56	30.15	56.00	-25.85	peak	
6	7.5255	29.94	9.64	39.58	60.00	-20.42	peak	

Report No.: NEI-FCCP-1-1308C129 Page 16 of 66



EUT:	4CH Digital Wireless Security System	Model Name :	GD7105
Temperature:	26 ℃	Relative Humidity:	53 %
Test Power:	AC 120V/60Hz	Phase:	Neutral
Test Mode:	TX Mode		

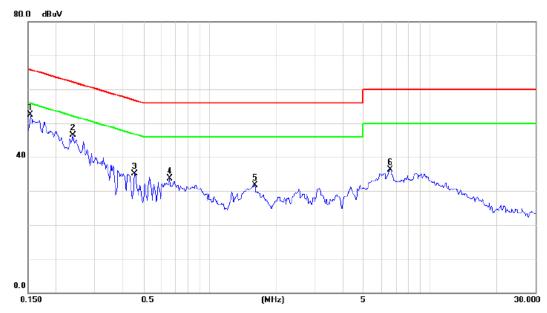

No. Mk	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	0.1532	43.01	9.50	52.51	65.82	-13.31	peak	
2	0.2391	36.97	9.51	46.48	62.13	-15.65	peak	
3	0.4561	25.61	9.52	35.13	56.76	-21.63	peak	
4	0.6572	24.23	9.53	33.76	56.00	-22.24	peak	
5	1.6020	22.14	9.56	31.70	56.00	-24.30	peak	
6	6.5921	26.67	9.62	36.29	60.00	-23.71	peak	

Report No.: NEI-FCCP-1-1308C129 Page 17 of 66

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies	Field Strength	Measurement Distance
(MHz)	(micorvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)				
TINEQUENCT (MITZ)	PEAK	AVERAGE			
Above 1000	74	54			

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

Report No.: NEI-FCCP-1-1308C129 Page 18 of 66

4.2.2 MEASUREMENT INSTRUMENTS LIST ANS SETTING

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Apr. 25, 2014
2	Amplifier	HP	8447D	2944A09673	Apr. 25, 2014
3	Test Receiver	R&S	ESCI	100382	Apr. 25, 2014
4	Test Cable	N/A	C-01_CB03	N/A	Jun.30.2014
5	Antenna	ETS	3115	00075789	Apr. 25, 2014
6	Amplifier	Agilent	8449B	3008A02274	Apr. 25, 2014
7	Spectrum	Agilent	E4408B	US39240143	Nov. 16.2013
8	Test Cable	HUBER+SUH NER	C-45	N/A	Apr. 30, 2014
9	Controller	CT	SC100	N/A	N/A
10	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Apr. 25, 2014
11	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Oct.12.2013
12	Horn Antenna	EMCO	3115	9605-4803	Apr. 25, 2014

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of Equipment List is One Year.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz for PK/AVG detector
Start ~ Stop Frequency	90kHz~110kHz for QP detector
Start ~ Stop Frequency	110kHz~490kHz for PK/AVG detector
Start ~ Stop Frequency	490kHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

Report No.: NEI-FCCP-1-1308C129 Page 19 of 66


Channel: TX 2406MHz

Duty Cycle=ON/(ON+OFF)

Duty Cycle=0.32/5

Average = Peak value +20log (Duty cycle)

Final AV=PK-23.88

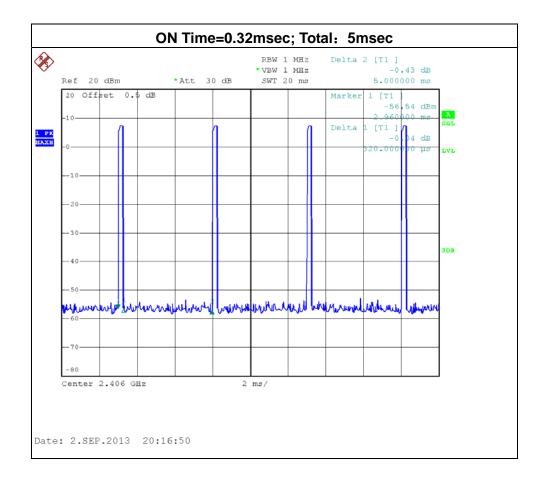

Report No.: NEI-FCCP-1-1308C129 Page 20 of 66

4.2.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.4 D	EVIATION F	ROM TEST	STANDARD


No deviation

Report No.: NEI-FCCP-1-1308C129 Page 21 of 66




4.2.5 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

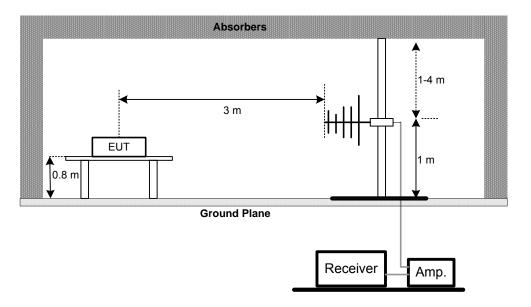


(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

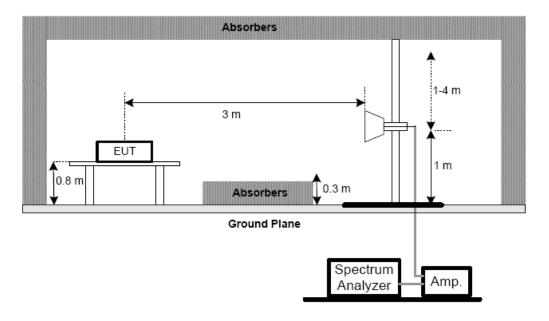

Report No.: NEI-FCCP-1-1308C129 Page 22 of 66



(C) For radiated emissions below 30MHz

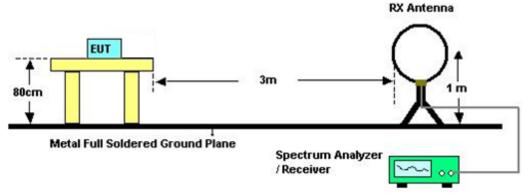

4.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **4.1.6** Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: NEI-FCCP-1-1308C129 Page 23 of 66

4.2.7 TEST RESULTS (BETWEEN30 - 1000 MHZ)


Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of <code>『Note』</code>. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

Report No.: NEI-FCCP-1-1308C129 Page 24 of 66



EUI.	4CH Digital Wireless Security System	Model Name :	GD7105
Temperature:	25 ℃	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX Mode 2406MHz	Polarization:	Vertical

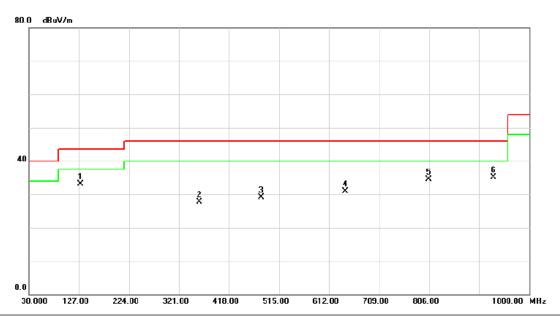


MHz dBuV dB dBuV/m dB uV/m dB Detector Comment 1 * 129.9100 46.48 -13.34 33.14 43.50 -10.36 peak 2 359.8000 38.86 -11.15 27.71 46.00 -18.29 peak 3 480.0800 38.79 -9.77 29.02 46.00 -16.98 peak 4 643.0400 36.80 -5.92 30.88 46.00 -15.12 peak 5 805.0300 37.63 -3.17 34.46 46.00 -11.54 peak 6 931.1300 35.94 -0.81 35.13 46.00 -10.87 peak		No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
2 359.8000 38.86 -11.15 27.71 46.00 -18.29 peak 3 480.0800 38.79 -9.77 29.02 46.00 -16.98 peak 4 643.0400 36.80 -5.92 30.88 46.00 -15.12 peak 5 805.0300 37.63 -3.17 34.46 46.00 -11.54 peak				MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
3 480.0800 38.79 -9.77 29.02 46.00 -16.98 peak 4 643.0400 36.80 -5.92 30.88 46.00 -15.12 peak 5 805.0300 37.63 -3.17 34.46 46.00 -11.54 peak		1	*	129.9100	46.48	-13.34	33.14	43.50	-10.36	peak	
4 643.0400 36.80 -5.92 30.88 46.00 -15.12 peak 5 805.0300 37.63 -3.17 34.46 46.00 -11.54 peak		2		359.8000	38.86	-11.15	27.71	46.00	-18.29	peak	
5 805.0300 37.63 -3.17 34.46 46.00 -11.54 peak		3		480.0800	38.79	-9.77	29.02	46.00	-16.98	peak	
	_	4		643.0400	36.80	-5.92	30.88	46.00	-15.12	peak	
6 931.1300 35.94 -0.81 35.13 46.00 -10.87 peak		5		805.0300	37.63	-3.17	34.46	46.00	-11.54	peak	
		6		931.1300	35.94	-0.81	35.13	46.00	-10.87	peak	

Report No.: NEI-FCCP-1-1308C129 Page 25 of 66



EUI.	4CH Digital Wireless Security System	Model Name :	GD7105
Temperature:	25 ℃	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX Mode 2406MHz	Polarization:	Horizontal

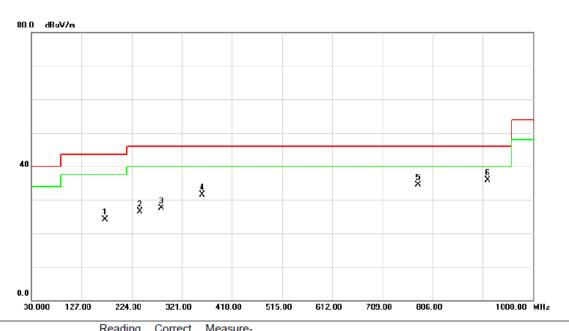

No.	Mk	. Freq.	Level	Factor	ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		172.5900	36.84	-12.75	24.09	43.50	-19.41	peak	
2		239.5200	41.39	-14.80	26.59	46.00	-19.41	peak	
3		281.2300	40.05	-12.45	27.60	46.00	-18.40	peak	
4		359.8000	42.59	-11.15	31.44	46.00	-14.56	peak	
5		777.8700	38.44	-3.91	34.53	46.00	-11.47	peak	
6	*	912.7000	36.90	-1.08	35.82	46.00	-10.18	peak	

Report No.: NEI-FCCP-1-1308C129 Page 26 of 66




IFUI .	4CH Digital Wireless Security System	Model Name :	GD7105
Temperature:	25 ℃	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX Mode 2442MHz	Polarization:	Vertical



No.	Mk	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		124.0900	47.74	-13.66	34.08	43.50	-9.42	peak	
2		423.8200	36.92	-9.42	27.50	46.00	-18.50	peak	
3		615.8800	37.66	-7.30	30.36	46.00	-15.64	peak	
4		643.0400	37.12	-5.92	31.20	46.00	-14.80	peak	
5		805.0300	36.99	-3.17	33.82	46.00	-12.18	peak	
6	*	912.7000	40.16	-1.08	39.08	46.00	-6.92	peak	

Report No.: NEI-FCCP-1-1308C129 Page 27 of 66

EUI.	4CH Digital Wireless Security System	Model Name :	GD7105
Temperature:	25 ℃	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX Mode 2442MHz	Polarization:	Horizontal

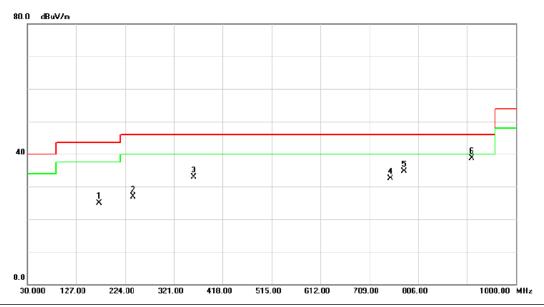


	No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
_			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
Ī	1		172.5900	37.70	-12.75	24.95	43.50	-18.55	peak	
Ī	2		240.4900	41.82	-14.83	26.99	46.00	-19.01	peak	
	3		359.8000	44.00	-11.15	32.85	46.00	-13.15	peak	
Ī	4		750.7100	37.47	-4.88	32.59	46.00	-13.41	peak	
Ī	5		777.8700	38.62	-3.91	34.71	46.00	-11.29	peak	
_	6	*	912.7000	39.72	-1.08	38.64	46.00	-7.36	peak	

Report No.: NEI-FCCP-1-1308C129 Page 28 of 66



EUT:	4CH Digital Wireless Security System	Model Name :	GD7105
Temperature:	25 ℃	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX Mode 2475MHz	Polarization:	Vertical

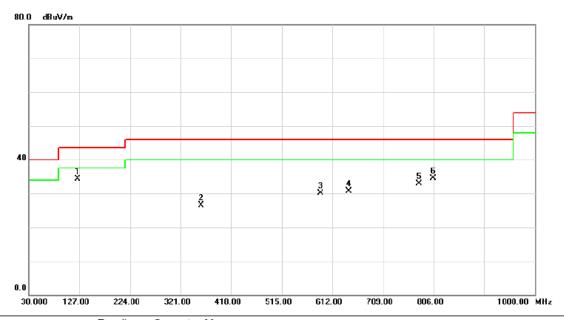


	No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
_	1	*	124.0900	48.04	-13.66	34.38	43.50	-9.12	peak	
_	2		359.8000	37.59	-11.15	26.44	46.00	-19.56	peak	
_	3		588.7200	38.10	-7.99	30.11	46.00	-15.89	peak	
_	4		643.0400	36.60	-5.92	30.68	46.00	-15.32	peak	
_	5		777.8700	36.84	-3.91	32.93	46.00	-13.07	peak	
	6		805.0300	37.63	-3.17	34.46	46.00	-11.54	peak	

Report No.: NEI-FCCP-1-1308C129 Page 29 of 66



ICUI.	4CH Digital Wireless Security System	Model Name :	GD7105
Temperature:	25 ℃	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX Mode 2475MHz	Polarization:	Horizontal

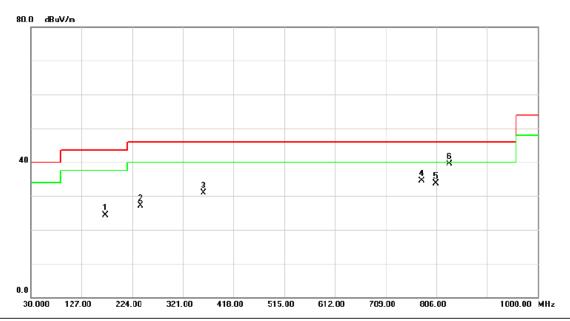

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		172.5900	37.06	-12.75	24.31	43.50	-19.19	peak	
2		239.5200	41.94	-14.80	27.14	46.00	-18.86	peak	
3		359.8000	42.15	-11.15	31.00	46.00	-15.00	peak	
4		777.8700	38.35	-3.91	34.44	46.00	-11.56	peak	
5		805.0300	36.82	-3.17	33.65	46.00	-12.35	peak	
6	*	831.2200	42.98	-3.46	39.52	46.00	-6.48	peak	

Report No.: NEI-FCCP-1-1308C129 Page 30 of 66

4.2.8 TEST RESULTS (ABOVE 1000 MHZ)

EUT:	4CH Digital Wireless Security System	Model Name :	GD7105
Temperature:	25 ℃	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 2406MHz		


Freq.	Ant.Pol.	Rea	ding	Ant./CF	A	Act.		Limit		Margin	
		Peak	AV		Peak	AV	Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2390.00	V	24.90	1.02	34.09	58.99	35.11	74.00	54.00	-15.01	-18.89	X/E
2406.10	V	70.15	46.27	34.14	104.29	80.41					X/F
4812.08	V	45.28	21.40	6.41	51.69	27.81	74.00	54.00	-22.31	-26.19	X/H

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of <code>『Note』</code>. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (8) The average value of fundamental frequency is:

 Average = Peak value + 20log(Duty cycle) , Final AV=PK-23.88

Report No.: NEI-FCCP-1-1308C129 Page 31 of 66

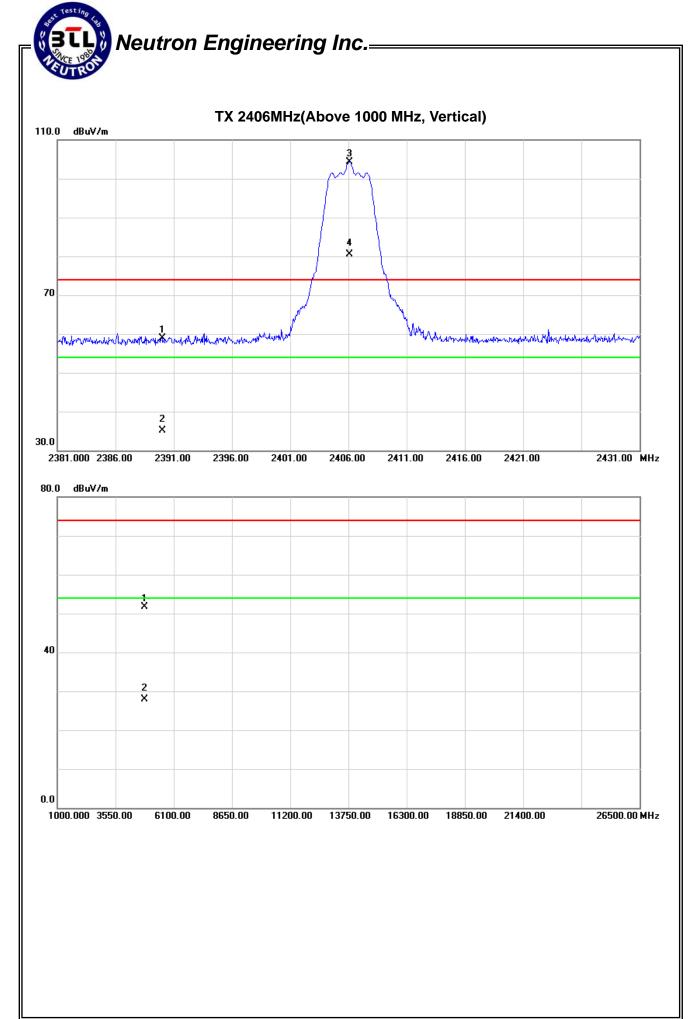

EUT:	4CH Digital Wireless Security System	Model Name :	GD7105
Temperature:	25 ℃	Relative Humidity:	58 %
Pressure:	1010hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 2406MHz		


Freq.	Ant.Pd.	Reading		Ant./CF	Act.		Limit		Margin		
		Peak	AV		Peak	AV	Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2390.00	Н	23.48	-0.40	34.09	57.57	33.69	74.00	54.00	-16.43	-20.31	X/E
2406.05	Н	67.51	43.63	34.14	101.65	77.77					X/F
4812.22	Н	44.29	20.41	6.41	50.70	26.82	74.00	54.00	-23.30	-27.18	X/H

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of <code>『Note』</code>. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (8) The average value of fundamental frequency is:

 Average = Peak value + 20log(Duty cycle) , Final AV=PK-23.88

Report No.: NEI-FCCP-1-1308C129 Page 33 of 66

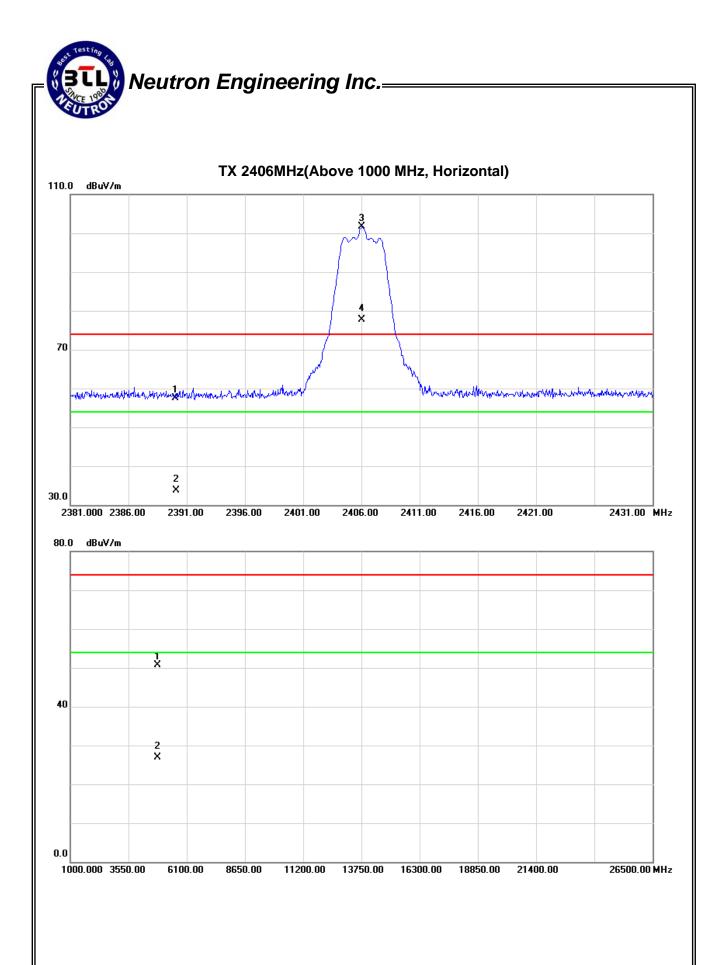

EUI.	4CH Digital Wireless Security System	Model Name :	GD7105
Temperature:	25 ℃	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 2442MHz		


Freq. (MHz) 2442.10 4884.33	Ant.Pol.	Rea	ding	Ant./CF	Act.		Limit		Margin		
		Peak	AV		Peak	AV	Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	dBuV/m	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2442.10	V	70.10	46.22	34.25	104.35	80.47					X/F
4884.33	V	44.62	20.74	6.62	51.24	27.36	74.00	54.00	-22.76	-26.64	X/H

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of <code>『Note』</code>. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (8) The average value of fundamental frequency is:

 Average = Peak value + 20log(Duty cycle) , Final AV=PK-23.88

Report No.: NEI-FCCP-1-1308C129 Page 35 of 66

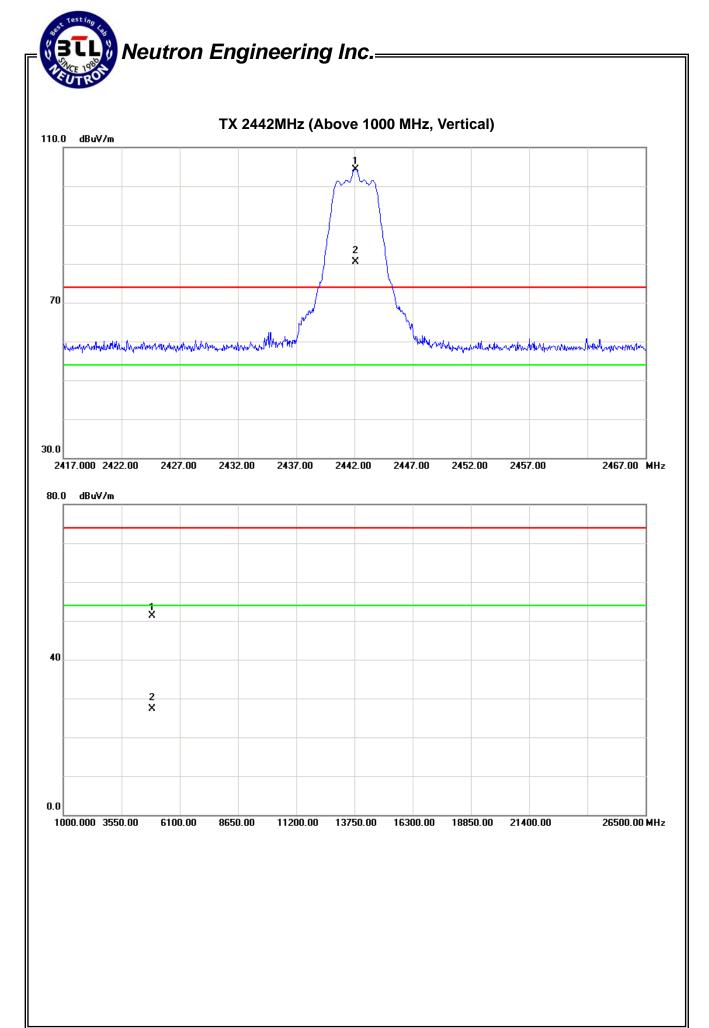

EUT:	4CH Digital Wireless Security System	Model Name :	GD7105
Temperature:	25 ℃	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 2442MHz		


Freq.	Ant.Pol.	Rea	ding	Ant./CF	Ac	t.	Lir	nit	Ma	rgin	
i ieq.	AHLF OI.	Peak	AV		Peak	AV	Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	dBuV/m	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2442.10	Н	68.49	44.61	34.25	102.74	78.86					X/F
4884.24	Н	43.28	19.40	6.62	49.90	26.02	74.00	54.00	-24.10	-27.98	X/H

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (8) The average value of fundamental frequency is:

 Average = Peak value + 20log(Duty cycle) , Final AV=PK-23.88

Report No.: NEI-FCCP-1-1308C129 Page 37 of 66

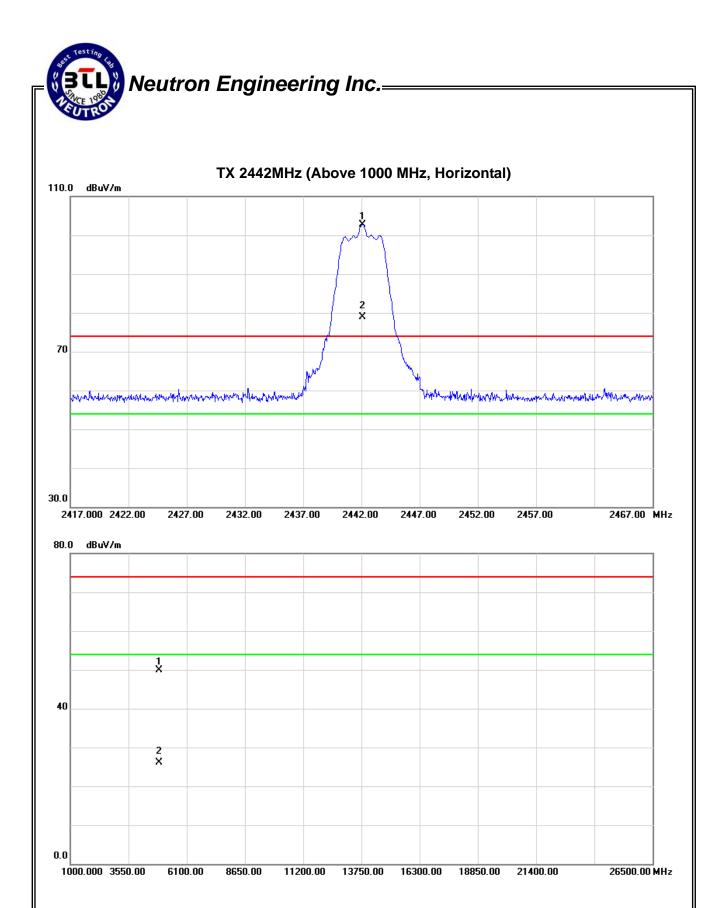

EUT:	4CH Digital Wireless Security System	Model Name :	GD7105
Temperature:	25 ℃	Relative Humidity:	58 %
Pressure:	1010hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 2475MHz		


Freq.	Ant.Pol.	Rea	ding	Ant./CF	A	ct.	Lir	nit	Ma	rgin	
		Peak	AV		Peak	AV	Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2475.05	V	68.85	44.97	34.35	103.20	79.32					X/F
2483.50	V	24.10	0.22	34.37	58.47	34.59	74.00	54.00	-15.53	-19.41	X/E
4950.18	V	43.39	19.15	6.81	50.20	25.96	74.00	54.00	-23.80	-28.04	X/H

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of <code>『Note』</code>. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (8) The average value of fundamental frequency is:

 Average = Peak value + 20log(Duty cycle) , Final AV=PK-23.88

Report No.: NEI-FCCP-1-1308C129 Page 39 of 66

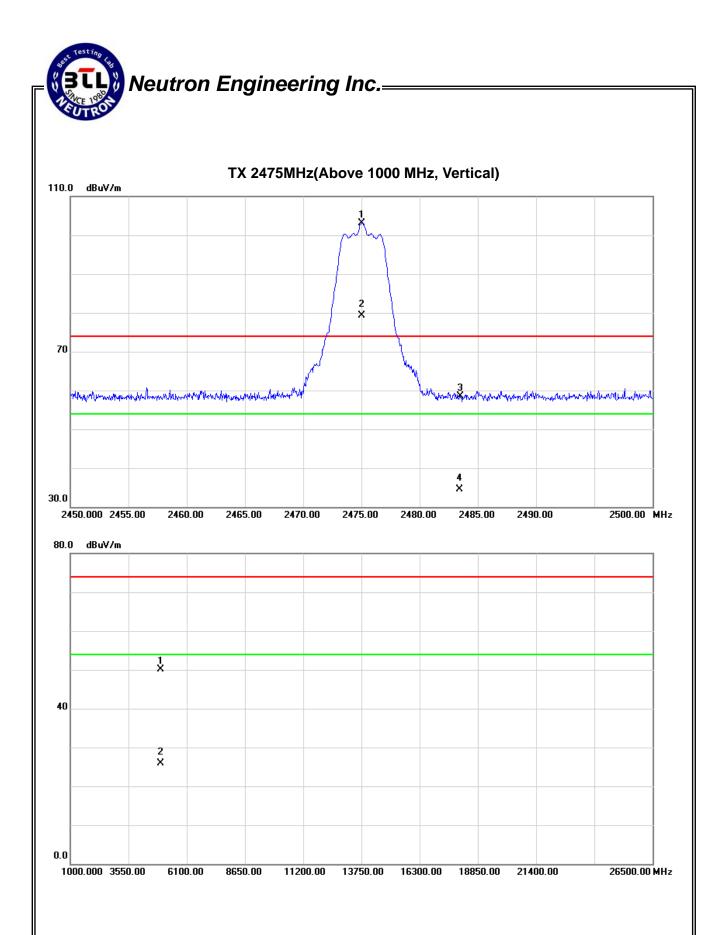

	4CH Digital Wireless Security System	Model Name :	GD7105
Temperature:	25 ℃	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 2475MHz		


Freq.	Ant.Pol.	Rea	ding	Ant./CF	A	ct.	Lir	nit	Ma	rgin	
		Peak	AV		Peak	AV	Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2475.05	Н	67.98	44.10	34.35	102.33	78.45					X/F
2483.50	Н	24.68	0.80	34.37	59.05	35.17	74.00	54.00	-14.95	-18.83	X/E
4949.98	Н	42.31	18.43	6.80	49.11	25.23	74.00	54.00	-24.89	-28.77	X/H

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of <code>『Note』</code>. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (8) The average value of fundamental frequency is:

 Average = Peak value + 20log(Duty cycle) , Final AV=PK-23.88

Report No.: NEI-FCCP-1-1308C129 Page 41 of 66

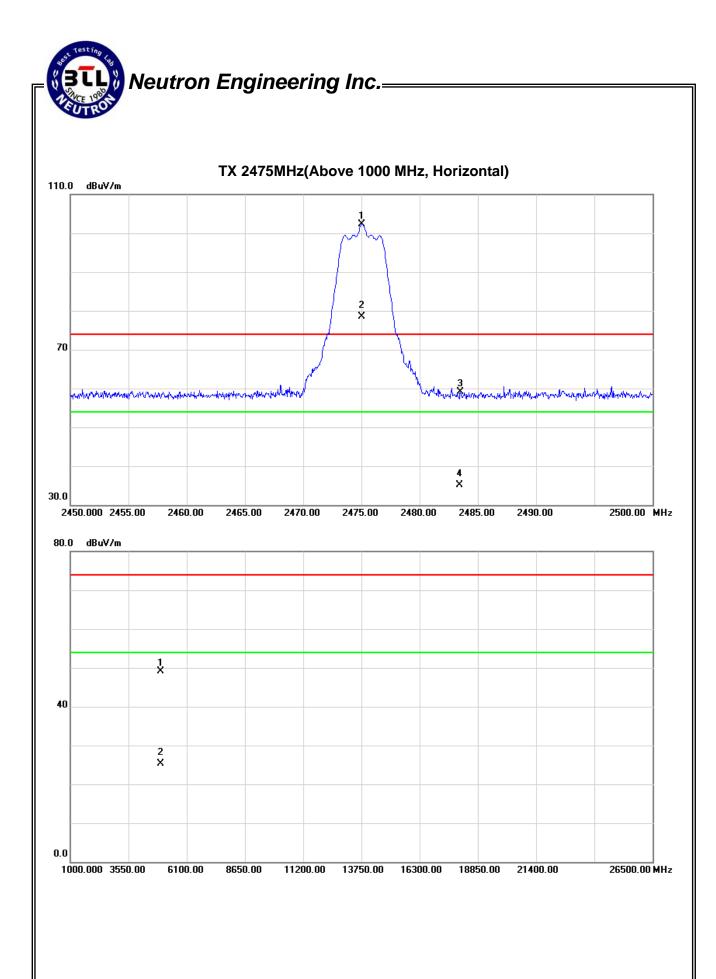

5. NUMBER OF HOPPING CHANNEL

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C					
Section	Test Item	Frequency Range (MHz)	Result		
15.247 (a)(1)(iii)	Number of Hopping Channel	2400-2483.5	PASS		

5.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov.25.2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of Equipment List is One Year.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

5.1.3 DEVIATION FROM STANDARD

No deviation.

5.1.4 TEST SETUP

EUT	SPECTRUM
	ANALYZER

5.1.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: NEI-FCCP-1-1308C129 Page 43 of 66

5.1.6 TEST RESULTS

EUT:	4CH Digital Wireless Security System	Model Name :	GD7105
Temperature:	25 ℃	Relative Humidity:	58 %
Pressure:	1009 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Hopping Mode		

Number of Hopping Channel	24
11 5	

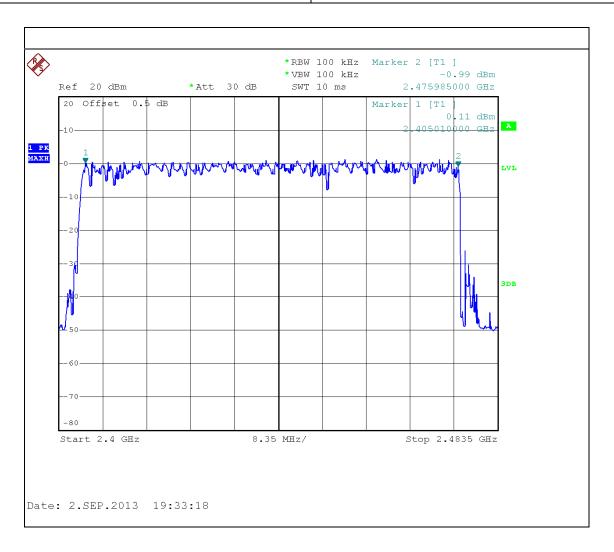

Report No.: NEI-FCCP-1-1308C129

6. AVERAGE TIME OF OCCUPANCY

6.1 APPLIED PROCEDURES / LIMIT

	FCC Part15 (15.247) , Subpart C					
Section	Test Item	Limit	Frequency Range (MHz)	Result		
15.247 (a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS		

6.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov.25.2013


Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of Equipment List is One Year.

6.1.2 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f Measure the maximum time duration of one single pulse.
- q. Set the EUT for packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. Dwell time = [spreading rate/16] x duty-cycle x 0.4 seconds

6.1.3. TEST SETUP LAYOUT



6.1.4. TEST DEVIATION

There is no deviation with the original standard.

6.1.5. EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting/Hopping mode.

Report No.: NEI-FCCP-1-1308C129 Page 45 of 66

6.1.6. TEST RESULTS


IFUI.	4CH Digital Wireless Security System	Model Name :	GD7105
Temperature:	25 ℃	Relative Humidity:	58 %
Pressure:	1009 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Hopping Mode		

Mode	Number of transmission in a 9.6 (24Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
2475 MHz	(5/1) *9.6=48 times Note1	0.32	15.36	400

Note1: 5 times of occupied channels per 1 second.

	Results
Measured cycle (sec)	24 CH*0.4=9.6
The total number of frequency-hopping per second	((5/1)*9.6)=48
The number of occupied channels per second	48/9.6=5(number/sec)
occupied time for each channel(1)	0.32ms
The total number of channels occupied within one	(5/1) *9.6=48 times
cycle (2)	
The average time of occupancy within one cycle(1)*(2)	15.36msec
LIMIT (msec)	400msec

Report No.: NEI-FCCP-1-1308C129 Page 46 of 66

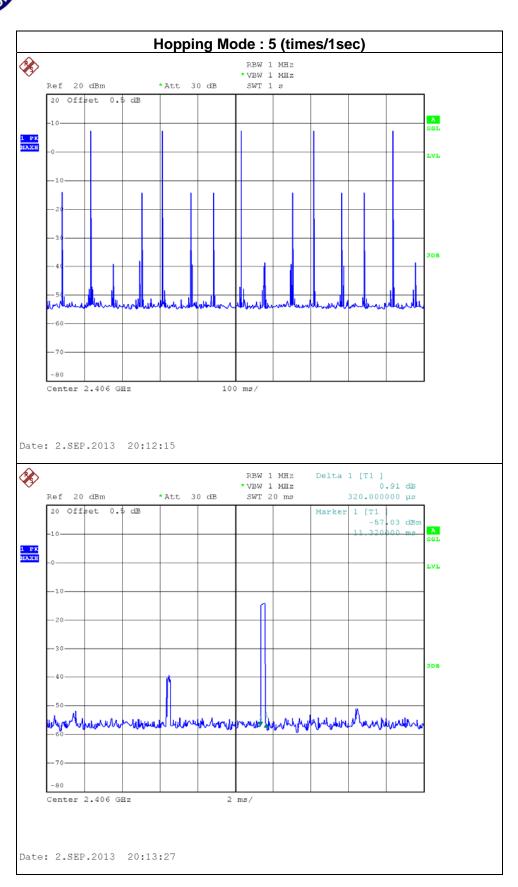

7. HOPPING CHANNEL SEPARATION MEASUREMENT

7.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

7.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov.25.2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of Equipment List is One Year.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


7.1.2 TEST PROCEDURE

- a. The EUT must have its hopping function enabled
- b. Span = wide enough to capture the peaks of two adjacent channels Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span Video (or Average) Bandwidth (VBW) ≥ RBW Sweep = auto Detector function = peak Trace = max hold

7.1.3 DEVIATION FROM STANDARD

No deviation.

7.1.4 TEST SETUP



7.1.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in hopping mode.


Report No.: NEI-FCCP-1-1308C129 Page 48 of 66

7.1.6 TEST RESULTS


ICUI.	4CH Digital Wireless Security System	Model Name :	GD7105
Temperature:	25 ℃	Relative Humidity:	58 %
Pressure:	1009 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	CH01/CH13/CH24		


Frequency (MHz)	Ch. Separation (MHz)	2/3 of 20dB Bandwidth (MHz)	Result
2406	3.32	2.92	Complies
2442	3.00	2.92	Complies
2475	3.00	2.91	Complies

Ch. Separation Limits: >20dB bandwidth or >2/3 of 20dB bandwidth

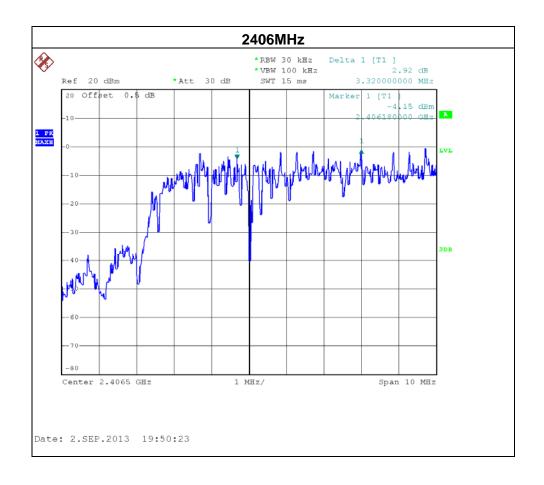

Report No.: NEI-FCCP-1-1308C129 Page 49 of 66

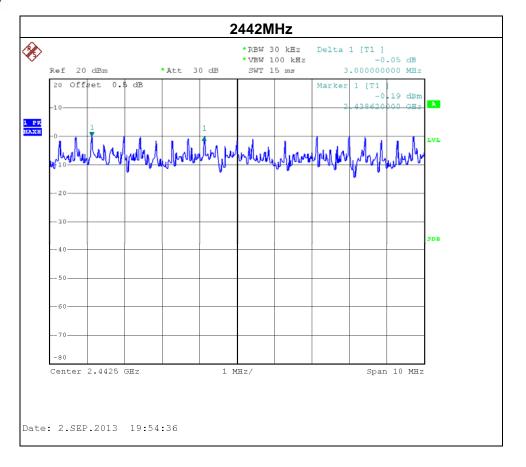

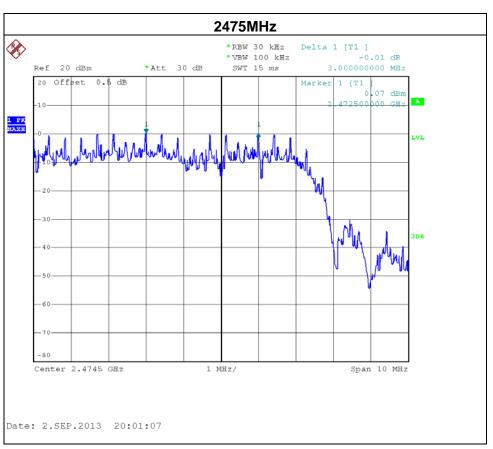

8. BANDWIDTH TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C					
Section	Test Item	Frequency Range (MHz)	Result		
15.247 (a)(1)	Bandwidth	2400-2483.5	PASS		

8.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov.25.2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of Equipment List is One Year.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 30 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 30KHz, VBW=100KHz, Sweep time = Auto.

8.1.3 DEVIATION FROM STANDARD

No deviation.

8.1.4 TEST SETUP

EUT	SPECTRUM
	ANALYZER

8.1.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: NEI-FCCP-1-1308C129 Page 51 of 66


8.1.6 TEST RESULTS

EUI.	4CH Digital Wireless Security System	Model Name :	GD7105
Temperature:	25 ℃	Relative Humidity:	58 %
Pressure:	1009 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	CH01/CH13/CH24		

Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Result
2406	4.38	3.94	PASS
2442	4.38	3.96	PASS
2475	4.36	3.94	PASS

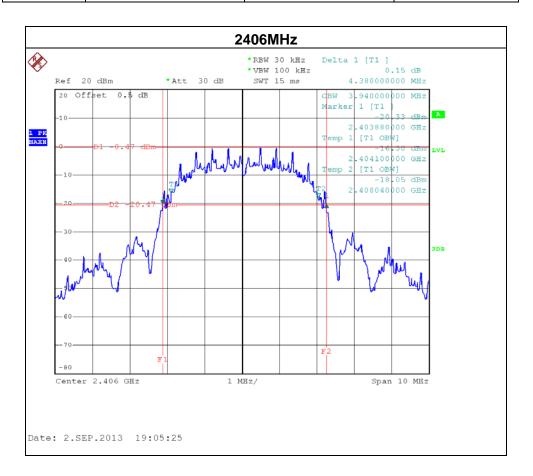

Report No.: NEI-FCCP-1-1308C129 Page 52 of 66

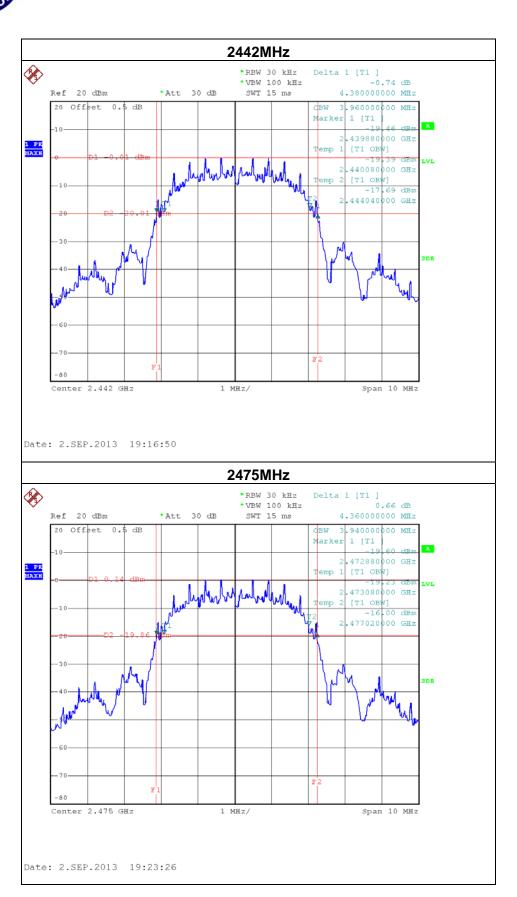

9. PEAK OUTPUT POWER TEST

9.1 APPLIED PROCEDURES / LIMIT

	FCC Part15 (15.247) , Subpart C					
Section	Test Item	Limit	Frequency Range (MHz)	Result		
15.247 (b)(1)	Peak Output Power	0.125 watt or 21dBm	2400-2483.5	PASS		

9.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov.25.2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of Equipment List is One Year.

9.1.2 TEST PROCEDURE

a. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram below,

9.1.3 DEVIATION FROM STANDARD

No deviation.

9.1.4 TEST SETUP

EUT	SPECTRUM
	ANALYZER

9.1.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: NEI-FCCP-1-1308C129 Page 54 of 66


9.1.6 TEST RESULTS

EUT:	4CH Digital Wireless Security System	Model Name :	GD7105
Temperature:	25 ℃	Relative Humidity:	58 %
Pressure:	1009 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	CH01/CH13/CH24		

Frequency	Peak Output Power	LIMIT	LIMIT
(MHz)	(dBm)	(dBm)	(W)
2406	8.90	21	0.125
2442	9.38	21	0.125
2475	9.52	21	0.125

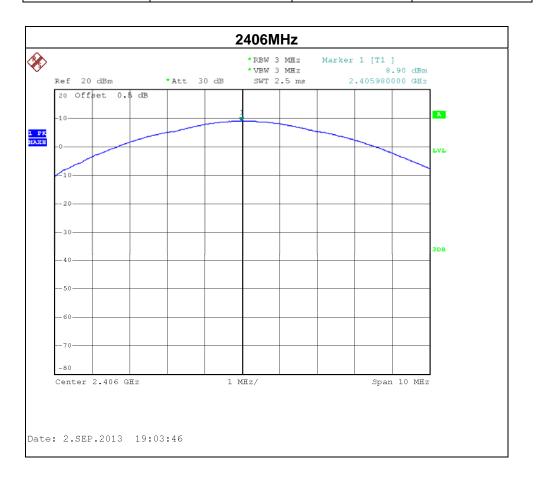

Report No.: NEI-FCCP-1-1308C129 Page 55 of 66

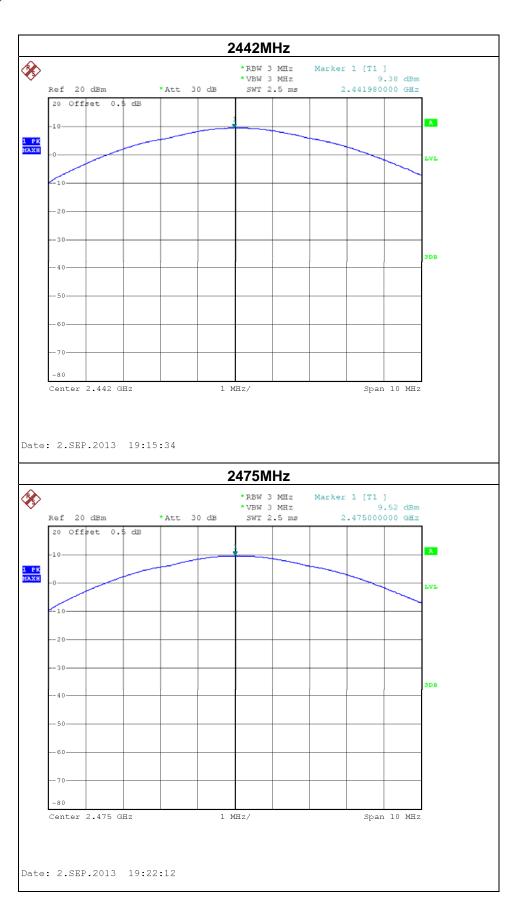

10. ANTENNA CONDUCTED SPURIOUS EMISSION

10.1 APPLIED PROCEDURES / LIMIT

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

10.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov.25.2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of Equipment List is One Year.

10.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

10.1.3 DEVIATION FROM STANDARD

No deviation.

10.1.4 TEST SETUP



10.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: NEI-FCCP-1-1308C129 Page 57 of 66


10.1.6 TEST RESULTS


EUT:	4CH Digital Wireless Security System	Model Name :	GD7105	
Temperature:	25 ℃	Relative Humidity:	58 %	
Pressure:	1009 hPa	Test Voltage :	AC 120V/60Hz	
Test Mode :	CH01/CH13/CH24 & Hopping on mode			


The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequence bandwidth within the	<i>y</i> .	
FREQUENCY(MHz) POWER(dBm)		FREQUENCY(MHz)	POWER(dBm)	
2399.00 -45.55 2500.00 -49.11				
Result				


In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest lever of the desired power.


Report No.: NEI-FCCP-1-1308C129 Page 58 of 66

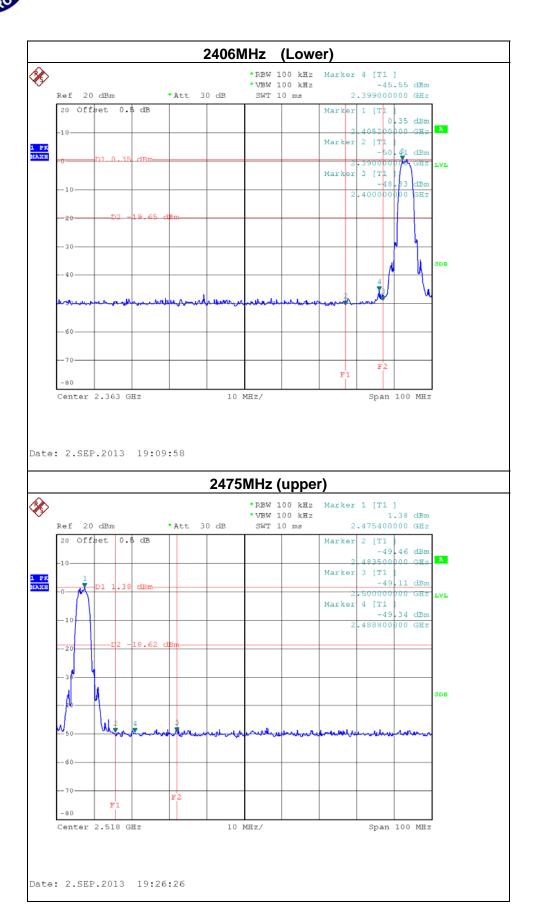

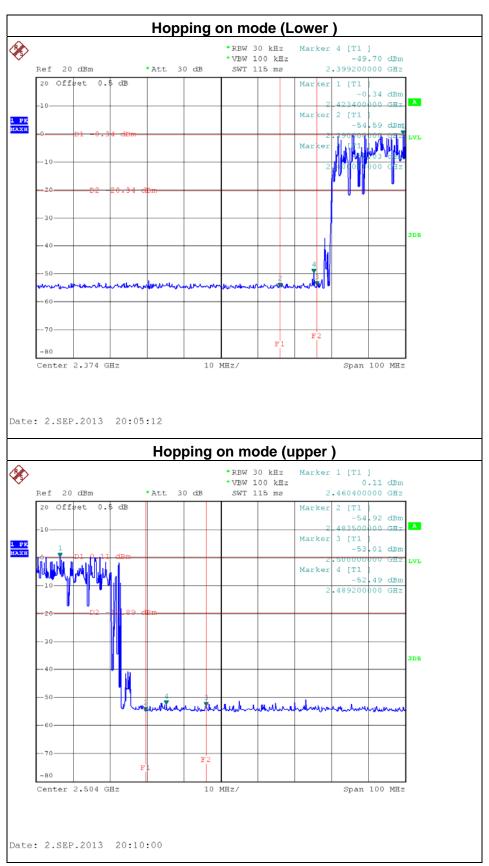

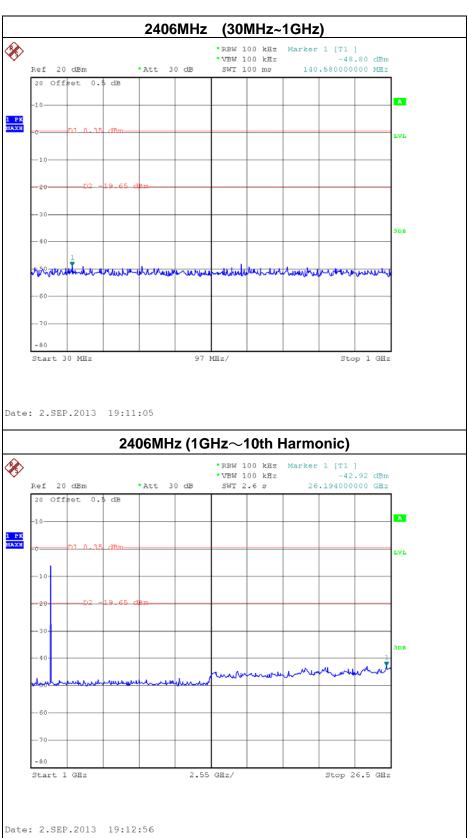


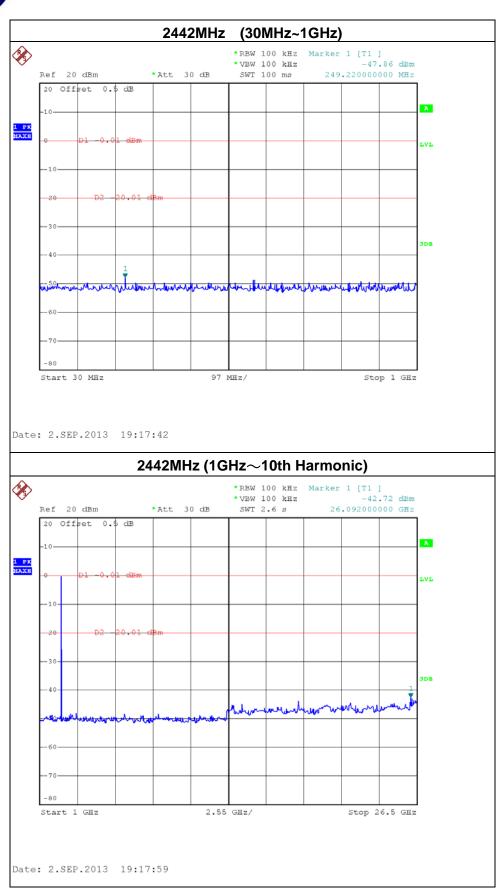

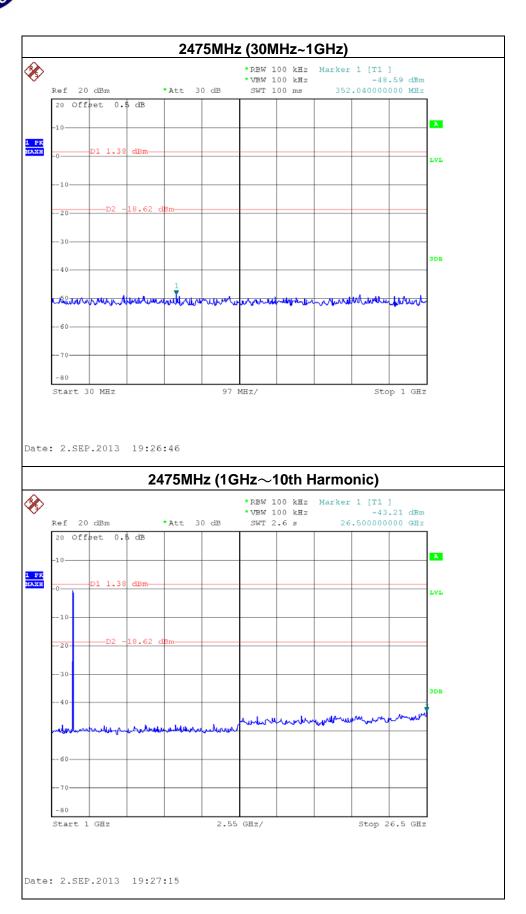

11. EUT PHOTOS

Conducted Measurement Photos

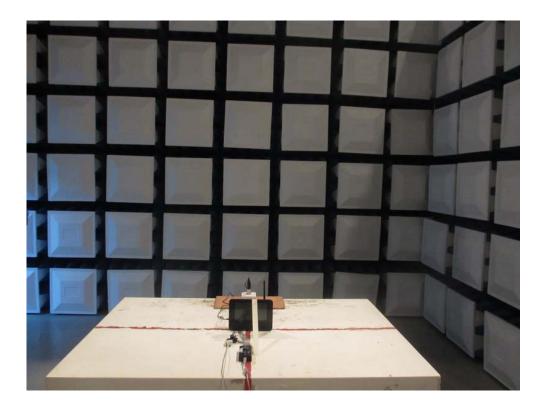





Report No.: NEI-FCCP-1-1308C129 Page 64 of 66



Radiated Measurement Photos 30MHz~1000MHz

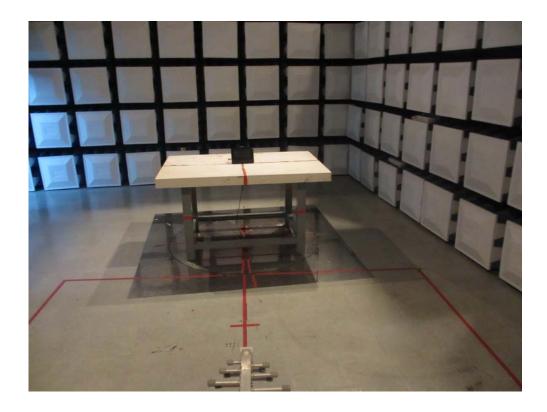


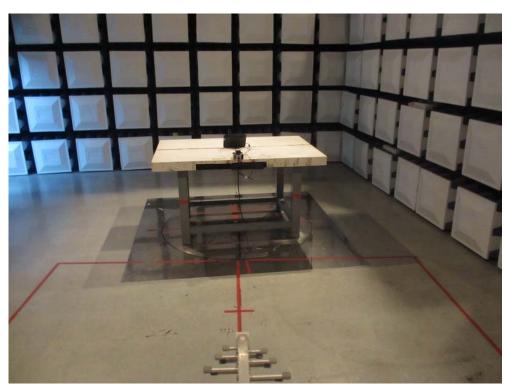


Report No.: NEI-FCCP-1-1308C129 Page 65 of 66



Radiated Measurement Photos Above 1G

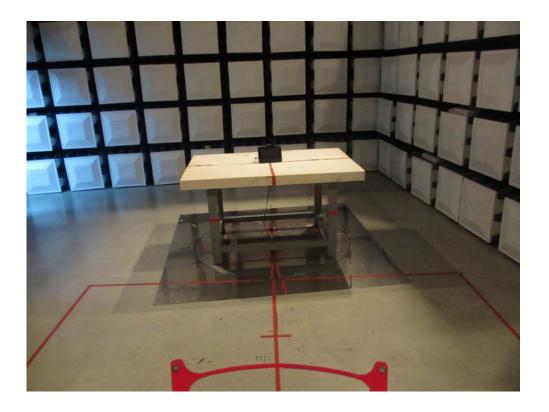

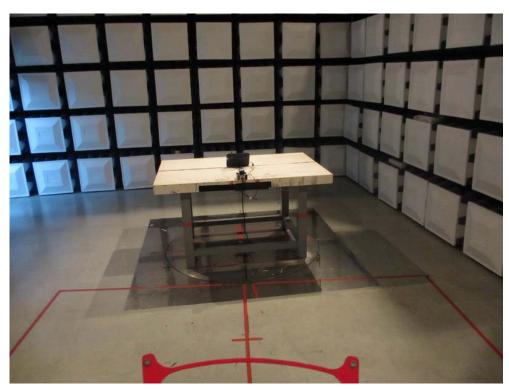

Report No.: NEI-FCCP-1-1308C129 Page 66 of 66