




FCC C2PC Test Report

Equipment : 802.11abgn 1x with BT
Brand Name : Summit
Model No. : SDC-SSD40NBT
FCC ID : TWG-SDCSSD40NBT
Standard : 47 CFR FCC Part 15.247
Operating Band : 2400 MHz – 2483.5 MHz
Applicant : Summit Data Communications, Inc.
526 South Main Street Suite 805 Akron, OH 44311

The product sample received on Mar. 07, 2013 and completely tested on Mar. 18, 2013. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Wayne Hsu / Assistant Manager



Testing Laboratory
1190



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Support Equipment.....	7
1.3	Testing Applied Standards	7
1.4	Testing Location Information	7
1.5	Measurement Uncertainty	8
2	TEST CONFIGURATION OF EUT.....	9
2.1	The Worst Case Modulation Configuration	9
2.2	Test Channel Frequencies Configuration.....	9
2.3	The Worst Case Power Setting Parameter	9
2.4	The Worst Case Measurement Configuration.....	10
2.5	Test Setup Diagram	12
3	TRANSMITTER TEST RESULT	13
3.1	AC Power-line Conducted Emissions	13
3.2	RF Output Power.....	16
3.3	Transmitter Radiated Bandedge Emissions	19
3.4	Transmitter Radiated Unwanted Emissions	23
4	TEST EQUIPMENT AND CALIBRATION DATA	40
APPENDIX A. TEST PHOTOS		A1
APPENDIX B. PHOTOGRAPHS OF EUT		B1



Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.3	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	0.2291780MHz: 41.15dBuV (11.33dB) - AV 46.27dBuV (16.21dB) - QP	FCC 15.207	Complied
3.2	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm] Basic: -0.12 EDR: 2.03	Power [dBm] Basic: 21 EDR: 21	Complied
3.3	15.247(c)	Transmitter Radiated Bandedge Emissions	Non-Restricted Bands: 2399.87MHz: 51.96dB Restricted Bands [dBuV/m at 3m]: 2483.50MHz 51.15 (Margin 22.85dB) - PK 35.16 (Margin 18.84dB) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied
3.4	15.247(c)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]: 292.51MHz 44.89 (Margin 1.11dB) - QP	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied

Remark: This is a C2PC Report only, and please see Section 1.1.1 for the detail description and information.



Revision History



1 General Description

1.1 Information

1.1.1 Product Details

This report is prepared for FCC class II permissive change. The difference compared with original design is adding two sets of antenna. Please refer to item 1.1.3 for antenna information. In this report, conducted output power, conducted emission and radiated emission tests had been re-tested and only its data was recorded in the following sections.

1.1.2 RF General Information

RF General Information				
Frequency Range (MHz)	Bluetooth Version	Ch. Frequency (MHz)	Channel Number	RF Output Power (dBm)
2400-2483.5	v2.1 Basic	2402-2480	0-78 [79]	-0.12
2400-2483.5	v2.1 + EDR	2402-2480	0-78 [79]	2.03

Note 1: Bluetooth EDR uses a combination of GFSK (1Mbps), $\pi/4$ -DQPSK (2Mbps) and 8DPSK (3Mbps).
Note 2: Bluetooth EDR uses as a system using FHSS modulation.
Note 3: RF output power specifies that Maximum Peak Conducted Output Power.

1.1.3 Antenna Information

Antenna Category	
<input type="checkbox"/>	Equipment placed on the market without antennas
<input type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	Temporary RF connector provided
<input type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
<input checked="" type="checkbox"/>	External antenna (dedicated antennas)
<input checked="" type="checkbox"/>	Single power level with corresponding antenna(s).
<input type="checkbox"/>	Multiple power level and corresponding antenna(s).
<input checked="" type="checkbox"/>	RF connector provided
<input checked="" type="checkbox"/>	Unique antenna connector. (e.g., MMCX, U.FL, IPX, and RP-SMA, RP-N type...)
<input type="checkbox"/>	Standard antenna connector. (e.g., SMA, N, BNC, and TNC type...)



Antenna General Information							
No.	Ant. Cat.	Brand	Model	Ant. Type	Connector	Gain	Cable
1	External	Venture	M01-50908010-R	Omni-directional	MHF IPEX	2 dBi	Length 100mm
2	External	Venture	M01-50908011-R	Omni-directional	MHF IPEX	2 dBi	Length 180mm
Note: The antenna No.1 and No.2 had been pre-tested and found that the antenna No. 2 was the worst case for final test.							

1.1.4 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input checked="" type="checkbox"/> Pre-Production ; <input checked="" type="checkbox"/> Prototype
Type of EUT	
<input type="checkbox"/> Stand-alone	
<input type="checkbox"/> Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...	
<input checked="" type="checkbox"/> Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...	
<input type="checkbox"/> Other:	

1.1.5 EUT Operational Condition

Supply Voltage	<input type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input checked="" type="checkbox"/> Host	<input type="checkbox"/> Battery



1.2 Support Equipment

Support Equipment				
No.	Equipment	Brand Name	Model Name	Serial No.
1	PDA	HP	HSTNH-L05C-WL	-
2	Cradle	HP	HSTNH-F02X	-

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15
- ANSI C63.10-2009
- FCC Public Notice DA 00-705
- FCC KDB 412172 - Guidelines for Determining the ERP and EIRP

1.4 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD :	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.	
	TEL	:	886-3-327-3456	FAX : 886-3-327-0973
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Bill Hsiao	22°C / 54%	Mar. 18, 2013
RF Conducted	TH01-HY	Ian Du	24°C / 65%	Mar. 07, 2013
Radiated Emission	03CH05-HY	Daniel Hsu	25°C / 65 %	Mar. 18, 2013



1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty			
Test Item		Uncertainty	Limit
AC power-line conducted emissions		±2.26 dB	N/A
RF output power, conducted		±0.63 dB	N/A
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB	N/A
	1 – 18 GHz	±0.67 dB	N/A
	18 – 40 GHz	±0.83 dB	N/A
	40 – 200 GHz	N/A	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB	N/A
	1 – 18 GHz	±3.59 dB	N/A
	18 – 40 GHz	±3.82 dB	N/A
	40 – 200 GHz	N/A	N/A
Temperature		±0.8 °C	N/A
Humidity		±3 %	N/A
DC and low frequency voltages		±3 %	N/A
Time		±1.42 %	N/A
Duty Cycle		±1.42 %	N/A



2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing				
Bluetooth Version	Number of Transmit Chains (N _{TX})	Data Rate	Modulation Mode	RF Output Power (dBm)
v2.1 Basic	1	1 Mbps	BT-1M	-0.12
v2.1 + EDR	1	3 Mbps	BT-3M	2.03
Note 1: Bluetooth EDR uses a combination of GFSK (1Mbps), π/4-DQPSK (2Mbps) and 8DPSK (3Mbps). Note 2: Bluetooth EDR uses as a system using FHSS modulation. Note 3: Modulation modes consist of BT-1M, BT-2M, 1 BT-3M, FHSS BT-1M: GFSK (1Mbps), BT-2M: π/4-DQPSK (2Mbps), BT-3M: 8DPSK (3Mbps). Note 4: RF output power specifies that Maximum Peak Conducted Output Power.				

2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration		
Bluetooth Version	Modulation Mode	Test Channel Frequencies (MHz) – FX (Frequencies Abbreviations)
v2.1 Basic / EDR	BT-1M / BT-3M	2402-(F1), 2441-(F2), 2480-(F3)

2.3 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter					
Test Software Version		SRU V3.03.09.00			
Worst Modulation Mode	Number of Transmit Chains (N _{TX})	Frequency (MHz)	Power Setting	Data Rate	RF Output Power (dBm)
BT-1M	1	2402	default	1 Mbps	-1.84
BT-1M	1	2441	default	1 Mbps	-0.43
BT-1M	1	2480	default	1 Mbps	-0.12
BT-3M	1	2402	default	3 Mbps	0.48
BT-3M	1	2441	default	3 Mbps	1.48
BT-3M	1	2480	default	3 Mbps	2.03

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.



2.4 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	Normal Link

The Worst Case Mode for Following Conformance Tests			
Tests Item	RF Output Power		
Test Condition	Conducted measurement at transmit chains		
Modulation Mode	Number of Transmit Chains (N_{TX})	Data Rate / MCS	Test Frequency
BT-1M	1	1 Mbps	F1, F2, F3
BT-3M	1	3 Mbps	F1, F2, F3

The Worst Case Mode for Following Conformance Tests			
Tests Item	Transmitter Radiated Bandedge Emissions		
Test Condition	Radiated measurement		
Modulation Mode	Number of Transmit Chains (N_{TX})	Data Rate / MCS	Test Frequency
BT-1M	1	1 Mbps	F1, F3
BT-3M	1	3 Mbps	F1, F3



The Worst Case Mode for Following Conformance Tests			
Tests Item	Transmitter Radiated Unwanted Emissions		
Test Condition	Radiated measurement		
User Position	<input type="checkbox"/> EUT will be placed in fixed position. <input type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two or three orthogonal planes. <input checked="" type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes. The worst planes is X.		
Operating Mode < 1GHz	<input checked="" type="checkbox"/> 1. Normal Link		
Modulation Mode	Data Rate / MCS	Test Frequency	
BT-1M	1 Mbps	F1, F2, F3	
BT-3M	3 Mbps	F1, F2, F3	
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane




2.5 Test Setup Diagram


Test Setup Diagram – AC Line Conducted Emission Test



Test Setup Diagram - Radiated Below 1GHz Test

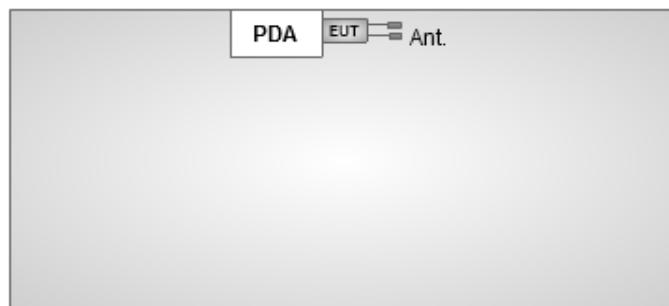

Test Setup Diagram - Radiated Above 1GHz Test

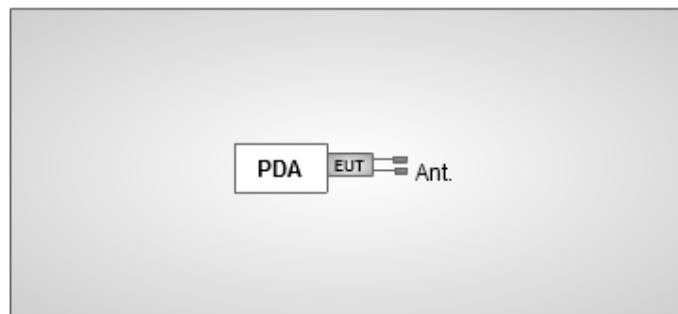

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures


Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

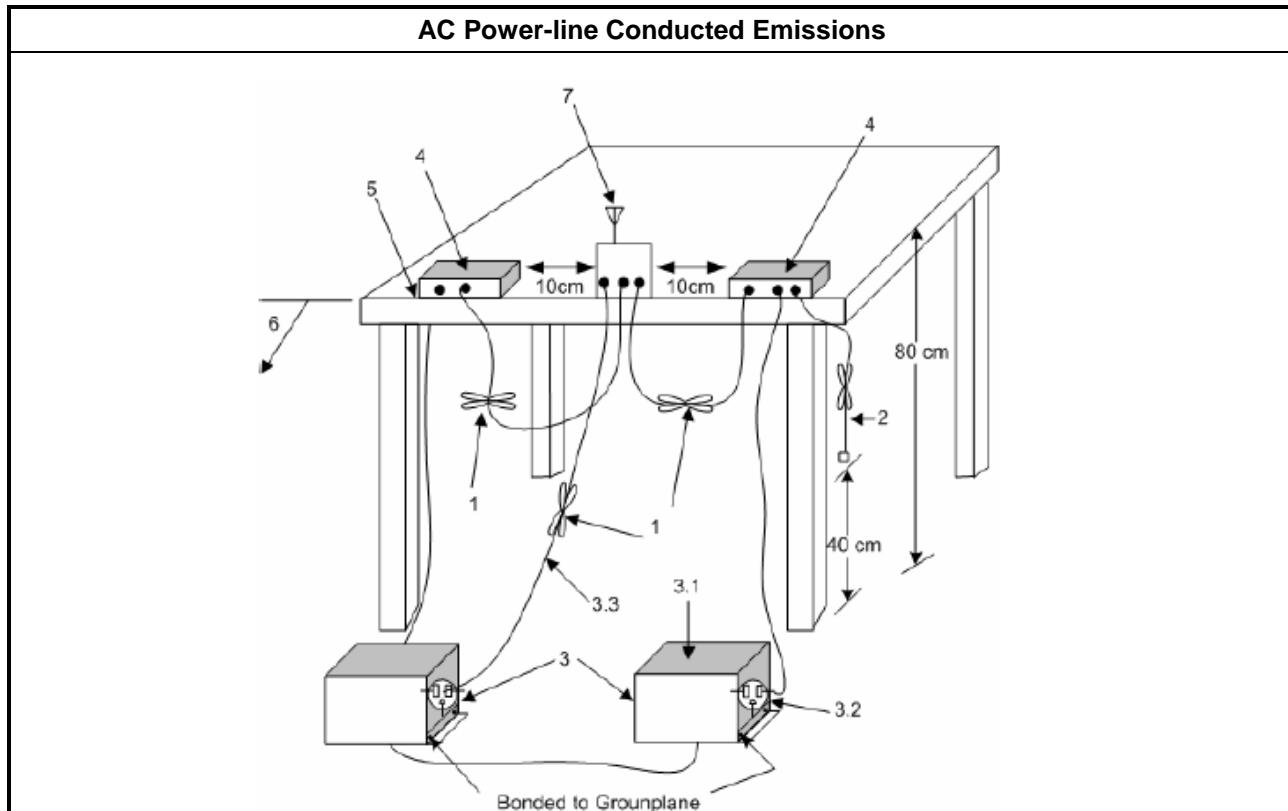




3.1.5 Test Result of AC Power-line Conducted Emissions

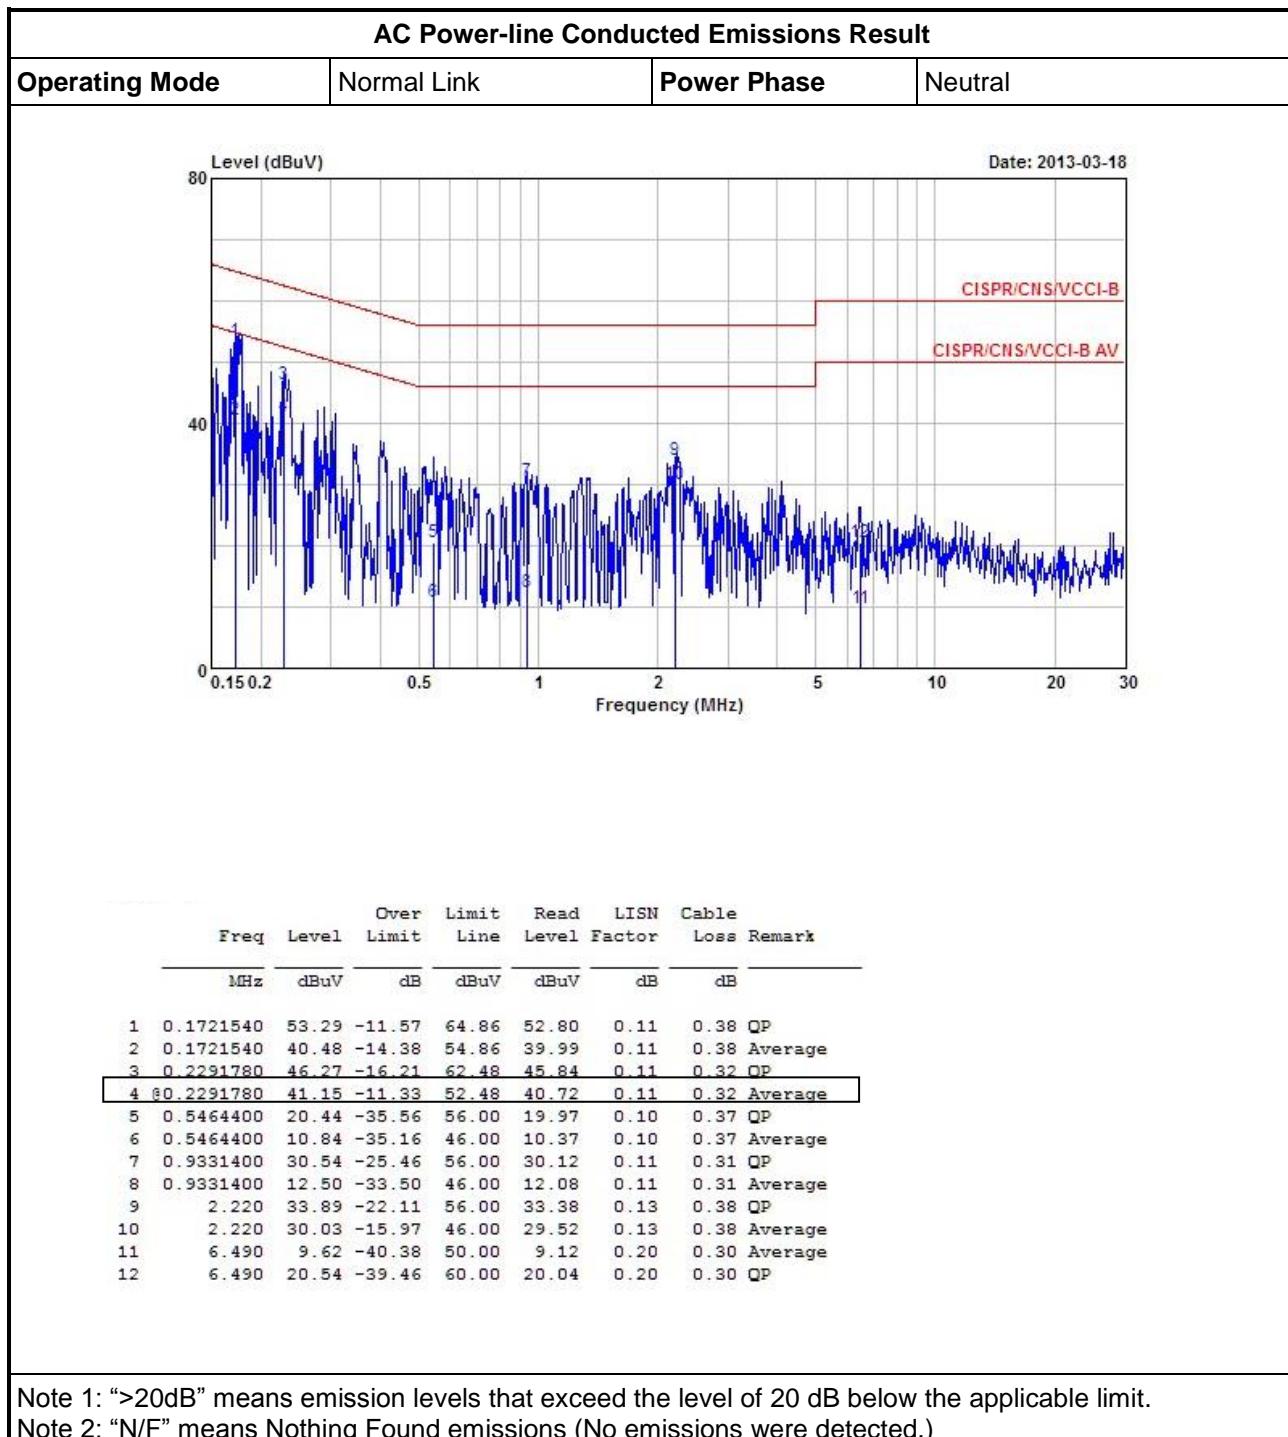



AC Power-line Conducted Emissions Result

Operating Mode	Normal Link	Power Phase	Line
----------------	-------------	-------------	------

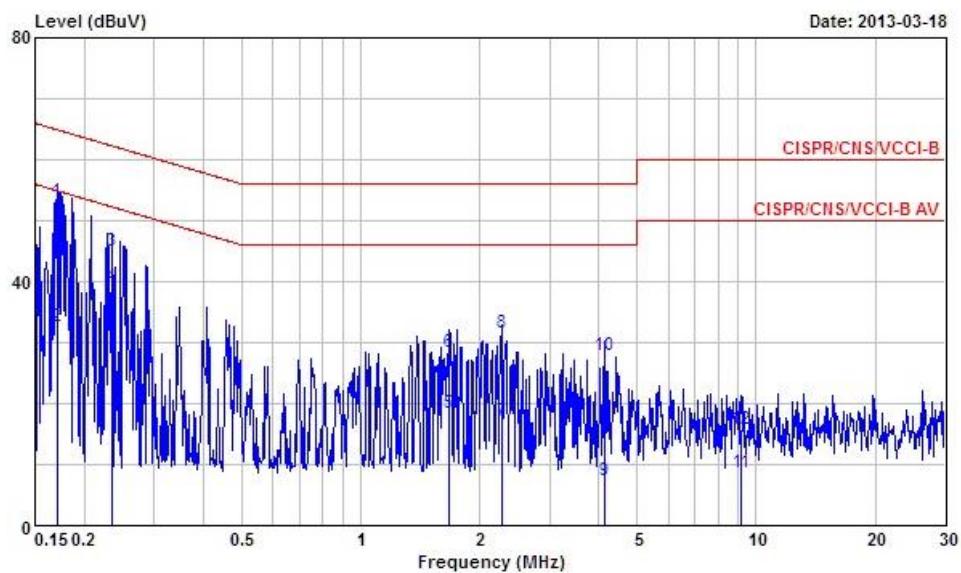

Freq MHz	Level dBuV	Over	Limit	Read	LISN	Cable	Remark
		Limit	Line	Level	Factor	Loss	
1	0.1712450	53.13	-11.77	64.90	52.50	0.24	0.39 QP
2	0.1712450	32.72	-22.18	54.90	32.09	0.24	0.39 Average
3	0.2340870	44.97	-17.33	62.30	44.42	0.23	0.32 QP
4	0.2340870	39.34	-12.96	52.30	38.79	0.23	0.32 Average
5	1.670	18.53	-27.47	46.00	17.92	0.24	0.37 Average
6	1.670	28.49	-27.51	56.00	27.88	0.24	0.37 QP
7	2.270	17.03	-28.97	46.00	16.39	0.26	0.38 Average
8	2.270	31.57	-24.43	56.00	30.93	0.26	0.38 QP
9	4.140	7.36	-38.64	46.00	6.77	0.29	0.30 Average
10	4.140	27.93	-28.07	56.00	27.34	0.29	0.30 QP
11	9.160	8.62	-41.38	50.00	7.91	0.41	0.30 Average
12	9.160	15.78	-44.22	60.00	15.07	0.41	0.30 QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)



3.2 RF Output Power

3.2.1 RF Output Power Limit

RF Output Power Limit for Frequency Hopping Systems		
Maximum Peak Conducted Output Power Limit		
<input type="checkbox"/> 902-928 MHz Band:		
<input type="checkbox"/> For Hopping Channel: $N \geq 50$		
<input type="checkbox"/> If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)		
<input type="checkbox"/> If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm		
<input type="checkbox"/> For Hopping Channel: $50 > N \geq 25$		
<input type="checkbox"/> If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 24$ dBm (0.25 W)		
<input type="checkbox"/> If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$ dBm		
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:		
<input checked="" type="checkbox"/> For Hopping Channel: $N \geq 79$		
<input checked="" type="checkbox"/> If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)		
<input type="checkbox"/> If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm		
<input type="checkbox"/> For Hopping Channel: $N \geq 15$		
<input type="checkbox"/> If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 21$ dBm (0.125 W)		
<input type="checkbox"/> If $G_{TX} > 6$ dBi, then $P_{Out} = 21 - (G_{TX} - 6)$ dBm		
<input type="checkbox"/> 5725-5850 MHz Band:		
<input type="checkbox"/> For Hopping Channel: $N \geq 79$		
<input type="checkbox"/> If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)		
<input type="checkbox"/> If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm		
e.i.r.p. Power Limit:		
<input type="checkbox"/> 902-928 MHz Band:		
<input type="checkbox"/> For Hopping Channel: $N \geq 50 - P_{eirp} \leq 36$ dBm (4 W)		
<input type="checkbox"/> For Hopping Channel: $50 > N \geq 25 - P_{eirp} \leq 30$ dBm (1 W)		
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:		
<input checked="" type="checkbox"/> For Hopping Channel: $N \geq 79 - P_{eirp} \leq 36$ dBm (4 W)		
<input type="checkbox"/> For Hopping Channel: $79 > N \geq 15 - P_{eirp} \leq 27$ dBm (0.5 W)		
<input type="checkbox"/> 5725-5850 MHz Band:		
<input type="checkbox"/> For Hopping Channel: $N \geq 79 - P_{eirp} \leq 36$ dBm (4 W)		
G_{TX} = the maximum transmitting antenna directional gain in dBi.		
P_{eirp} = e.i.r.p. Power in dBm.		
N : Number of Hopping Frequencies		
ChS : Hopping Channel Separation		


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Maximum Peak Conducted Output Power
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 5.2.1.1 Option 1 (RBW \geq EBW method).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 5.2.1.2 Option 2 (integrated band power method).
<input type="checkbox"/>	Refer as FCC DA 00-0705, spectrum analyzer for peak power.
<input checked="" type="checkbox"/>	Refer as FCC DA 00-0705, peak power meter for peak power.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.10.2.1 a) for peak power meter.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.10.2.1 a) for spectrum analyzer - (RBW \geq EBW).
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.10.2.1 b) for spectrum analyzer - BW correction factor.

3.2.4 Test Setup

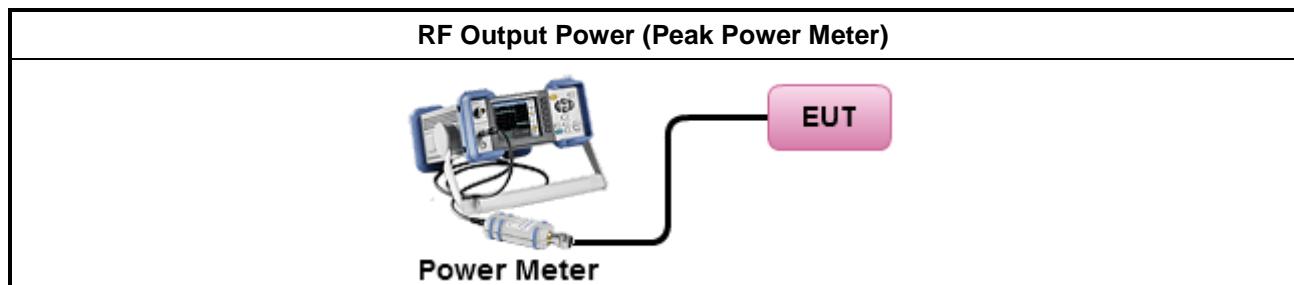




3.2.5 Test Result of Maximum Peak Conducted Output Power

Maximum Peak Conducted Output Power Result					
Directional Gain (dBi)	2	RF Output Power (dBm)			
Modulation Mode	Freq. (MHz)	RF Output Power	Power Limit	EIRP Power	EIRP Limit
BT-1M	2402	-1.84	30	0.16	36
BT-1M	2441	-0.43	30	1.57	36
BT-1M	2480	-0.12	30	1.88	36
Result		Complied			
RF Output Power Limit for Frequency Hopping Systems					

Maximum Peak Conducted Output Power Result					
Directional Gain (dBi)	2	RF Output Power (dBm)			
Modulation Mode	Freq. (MHz)	RF Output Power	Power Limit	EIRP Power	EIRP Limit
BT-3M	2402	0.48	30	2.48	36
BT-3M	2441	1.48	30	3.48	36
BT-3M	2480	2.03	30	4.03	36
Result		Complied			
RF Output Power Limit for Frequency Hopping Systems					

3.3 Transmitter Radiated Bandedge Emissions

3.3.1 Transmitter Radiated Bandedge Emissions Limit

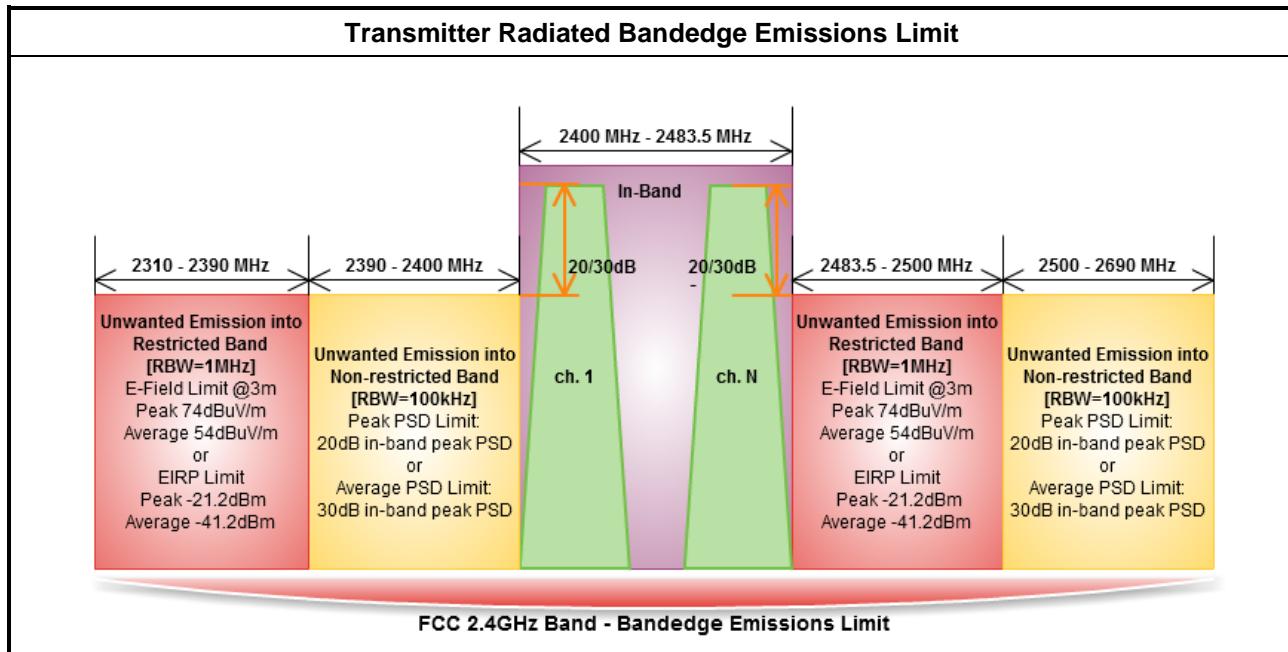


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method – General Information	
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/> For unwanted emissions into non-restricted bands, 20 dB relative to the in-band peak output power in 100 kHz. <input checked="" type="checkbox"/> For unwanted emissions into restricted bands.	
<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). – Duty cycle \geq 98%. <input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions. <input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.	
<input checked="" type="checkbox"/>	For the transmitter bandedge emissions shall be measured using following options below:
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.9.2 for band-edge testing. <input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements. <input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 7.7.9 for band-edge testing into non-restricted bands.	

3.3.4 Test Setup

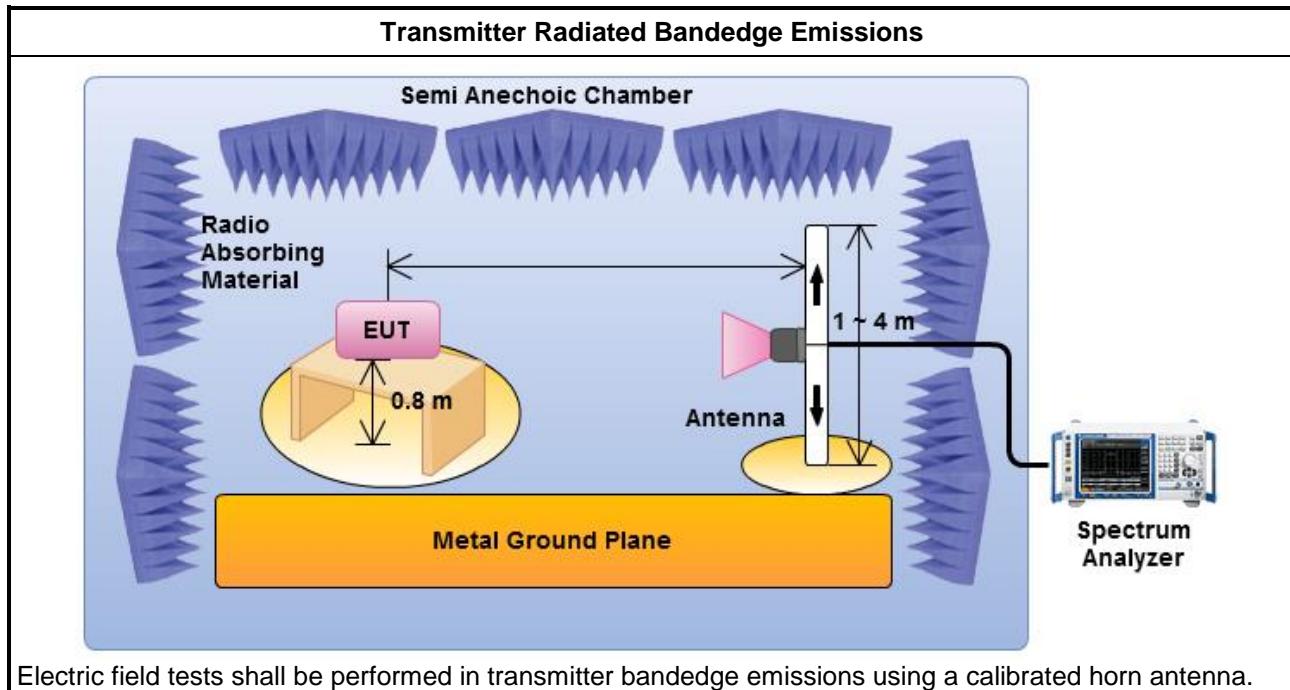



3.3.5 Test Result of Transmitter Radiated Bandedge Emissions

Transmitter Radiated Bandedge Emissions Result								
Modulation	BT-1M		Non-restricted Band Emissions					
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Level Type	Pol. note 1
2390-2400	2402	97.44	2399.97	38.30	59.14	20	PK	H
2500-2690	2480	102.15	2500.88	38.52	63.63	20	PK	H
Low Bandedge				Up Bandedge				

Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)

Transmitter Radiated Bandedge Emissions Result								
Modulation	BT-1M		Restricted Band Emissions					
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
2310-2390	2402	98.54	2390.00	3	44.41	74	PK	V
2310-2390	2402	97.77	2390.00	3	32.56	54	AV	V
2483.5-2500	2480	103.00	2483.50	3	50.65	74	PK	V
2483.5-2500	2480	102.36	2483.50	3	38.63	54	AV	V

Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).
Note 2: the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$ [-30dB]



Transmitter Radiated Bandedge Emissions Result								
Modulation	BT-3M		Non-restricted Band Emissions					
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Level Type	Pol. note 1
2390-2400	2402	91.51	2399.87	39.55	51.96	20	PK	V
2500-2690	2480	95.99	2500.96	34.68	61.31	20	PK	V
Low Bandedge				Up Bandedge				

Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)

Transmitter Radiated Bandedge Emissions Result								
Modulation	BT-3M		Restricted Band Emissions					
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
2310-2390	2402	95.74	2390.00	3	44.81	74	PK	V
2310-2390	2402	90.94	2390.00	3	29.55	54	AV	V
2483.5-2500	2480	100.16	2483.50	3	51.15	74	PK	V
2483.5-2500	2480	95.40	2483.50	3	35.16	54	AV	V

Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).
Note 2: the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$ [-30dB]



3.4 Transmitter Radiated Unwanted Emissions

3.4.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.



3.4.3 Test Procedures

Test Method – General Information	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input type="checkbox"/>	Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input type="checkbox"/>	Measurements in the frequency range above 18 GHz - 25GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC DA 00-0705, for spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$
<input checked="" type="checkbox"/>	For unwanted emissions into non-restricted bands, 20 dB relative to the in-band peak output power in 100 kHz.
<input checked="" type="checkbox"/>	For unwanted emissions into restricted bands.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) – Duty cycle \geq 98%.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input type="checkbox"/>	Refer as FCC DA 00-0705, for conducted measurement.
<input checked="" type="checkbox"/>	For radiated measurement.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.5 for radiated emissions from above 1 GHz.

3.4.4 Test Setup

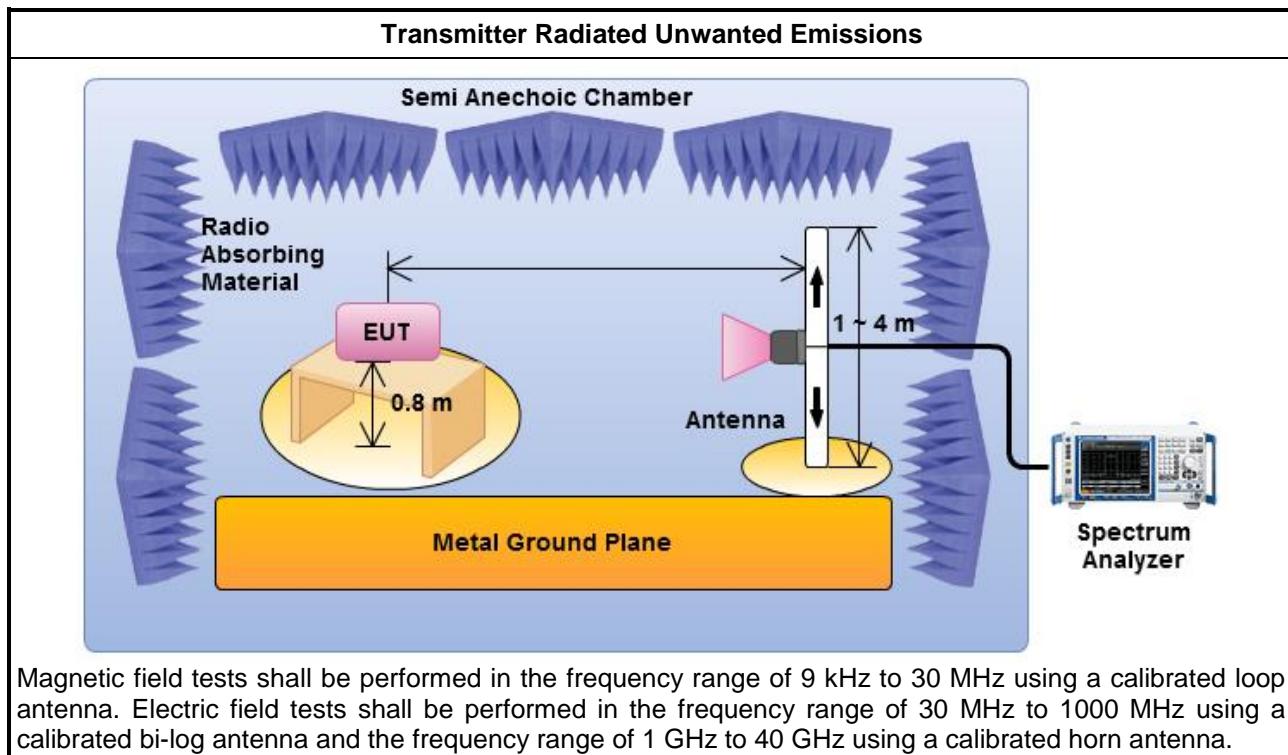


3.4.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.



3.4.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)


Transmitter Radiated Unwanted Emissions (Below 1GHz)

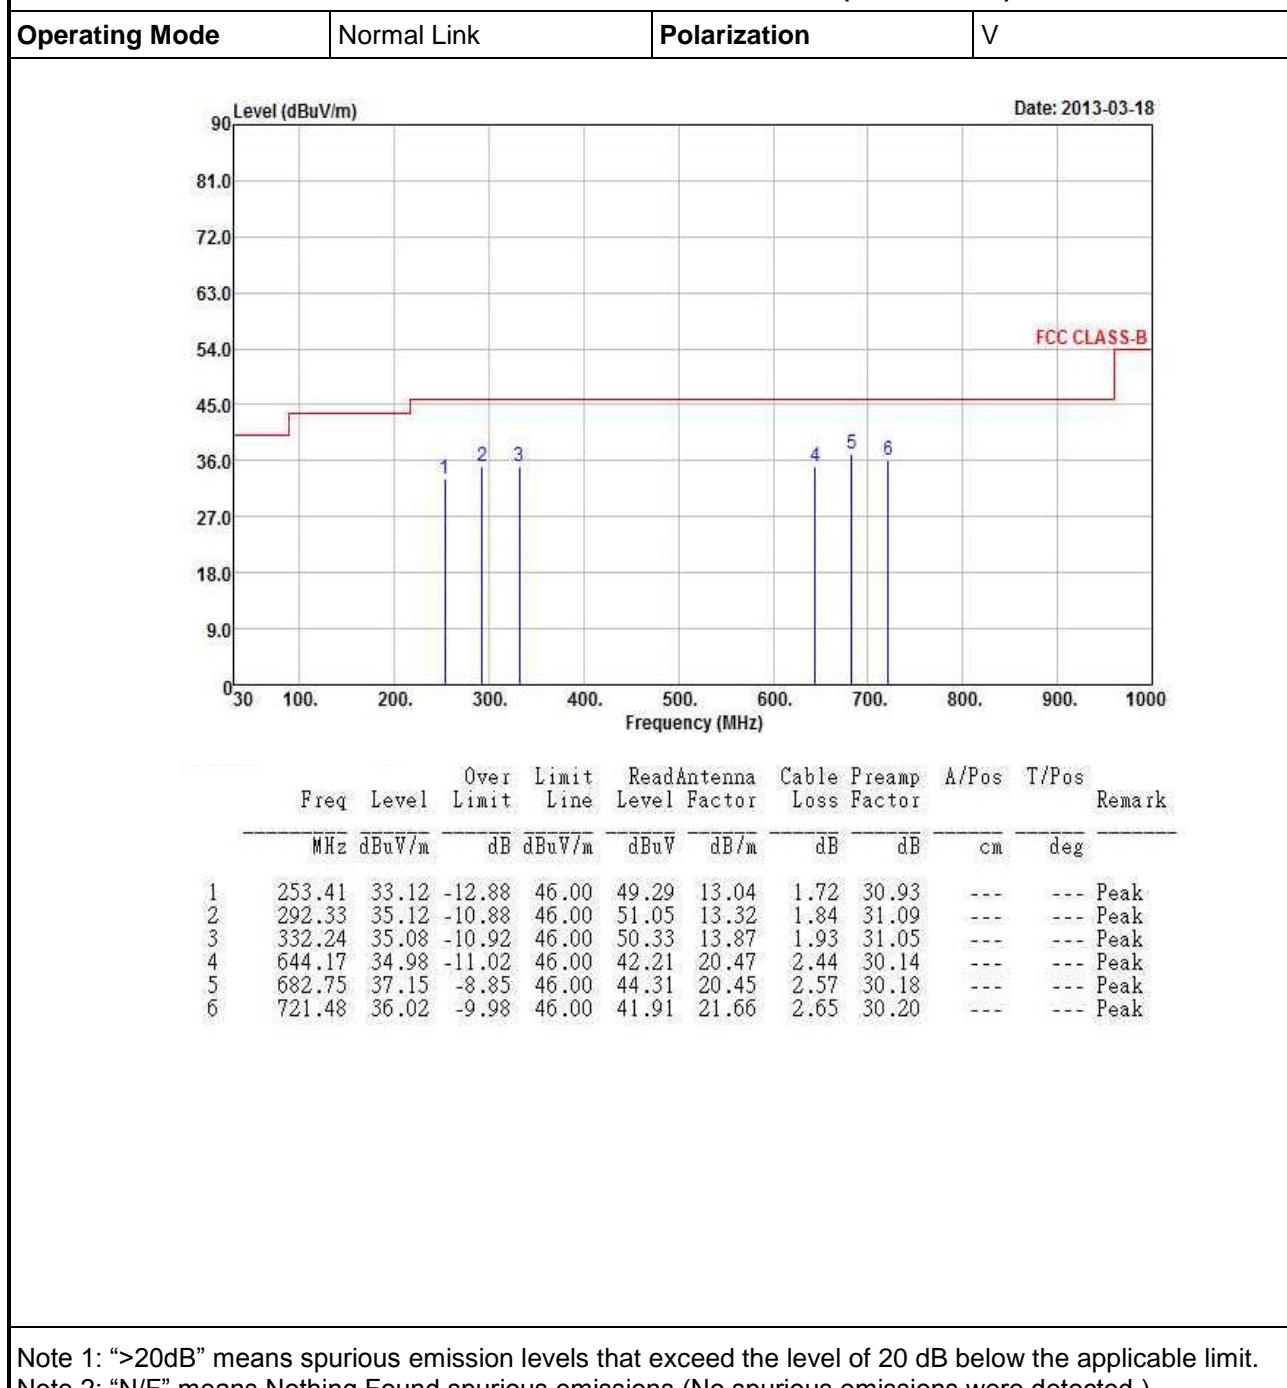



Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	Normal Link	Polarization	H
----------------	-------------	--------------	---

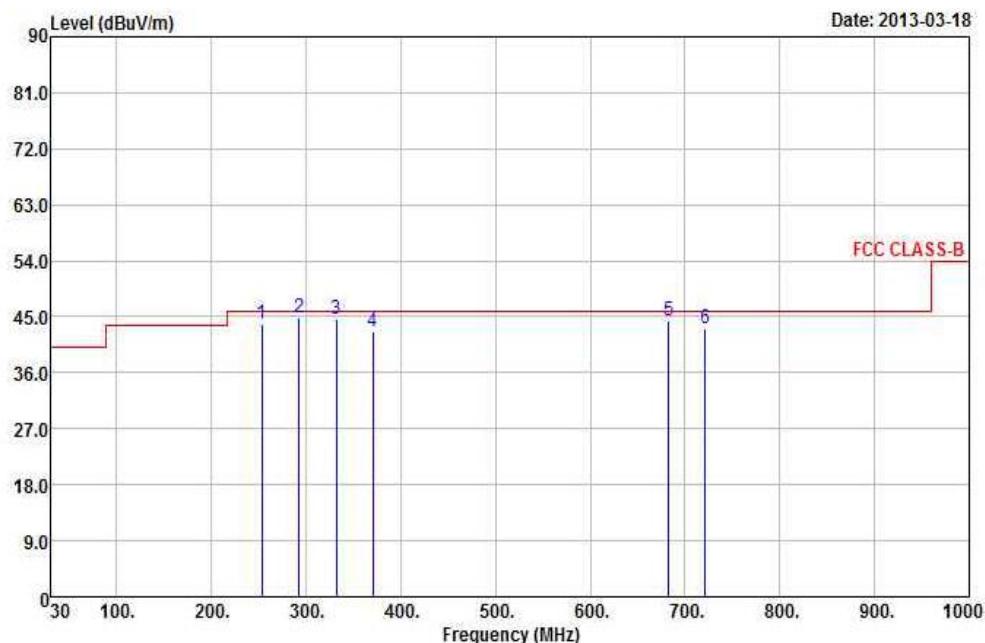

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark	
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	253.29	43.86	-2.14	46.00	60.05	13.03	1.71	30.93	---	---	QP
2	292.51	44.89	-1.11	46.00	60.79	13.33	1.85	31.08	---	---	QP
3	331.59	44.73	-1.27	46.00	59.99	13.85	1.93	31.04	---	---	QP
4	370.52	42.67	-3.33	46.00	56.73	14.92	2.05	31.03	---	---	Peak
5	682.93	44.29	-1.71	46.00	51.44	20.46	2.57	30.18	---	---	QP
6	721.47	43.16	-2.84	46.00	49.05	21.66	2.65	30.20	---	---	QP


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)




3.4.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for BT-1M

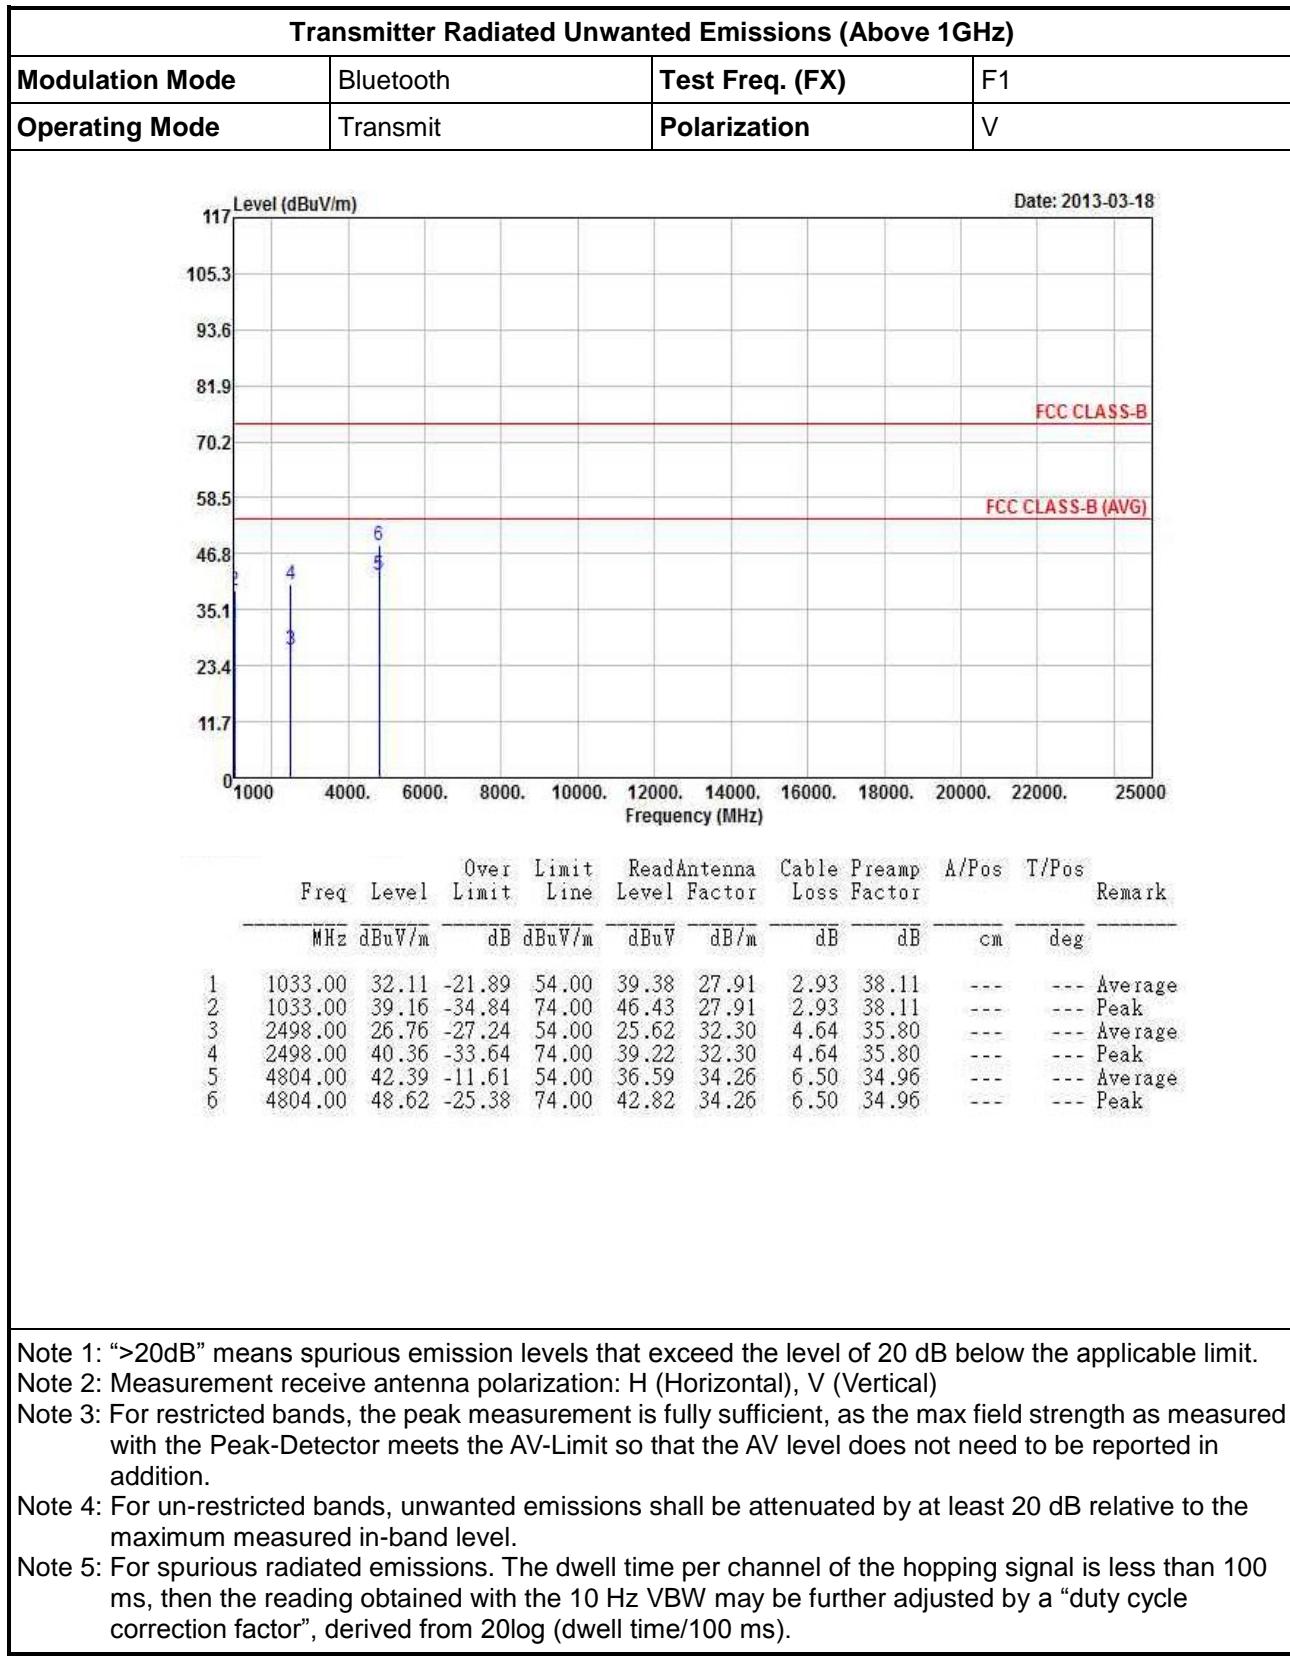



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	Bluetooth	Test Freq. (FX)	F1
Operating Mode	Transmit	Polarization	H

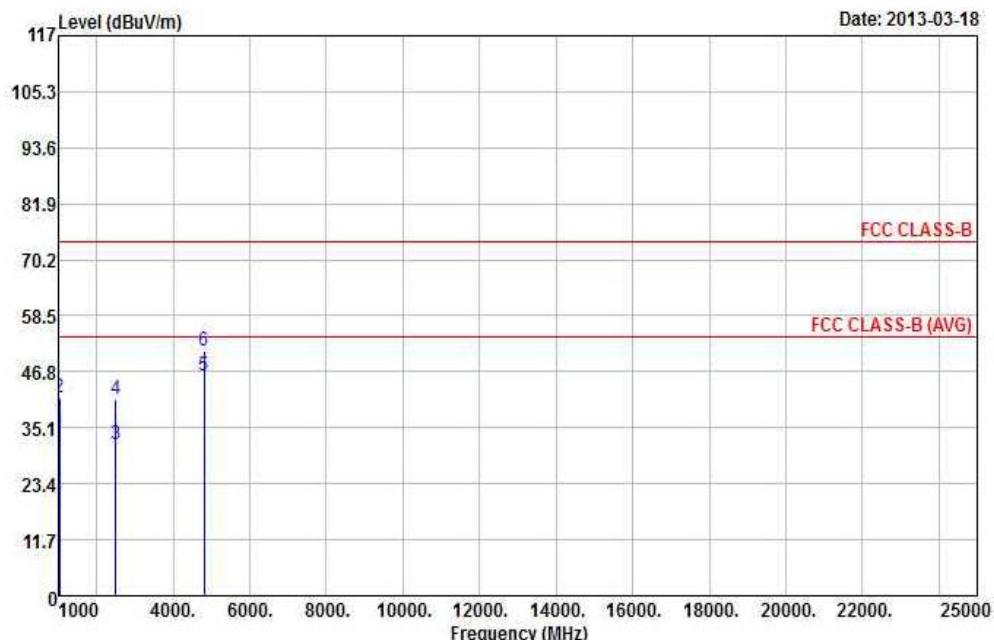

Freq	Level	Over Limit	Line	Read		Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
				Antenna Level	Factor					
1	1033.00	34.07	-19.93	54.00	41.34	27.91	2.93	38.11	---	Average
2	1033.00	41.28	-32.72	74.00	48.55	27.91	2.93	38.11	---	Peak
3	2498.00	31.60	-22.40	54.00	30.46	32.30	4.64	35.80	---	Average
4	2498.00	41.20	-32.80	74.00	40.06	32.30	4.64	35.80	---	Peak
5	4804.00	46.05	-7.95	54.00	40.25	34.26	6.50	34.96	---	Average
6	4804.00	51.09	-22.91	74.00	45.29	34.26	6.50	34.96	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: For spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	Bluetooth	Test Freq. (FX)	F2
Operating Mode	Transmit	Polarization	V

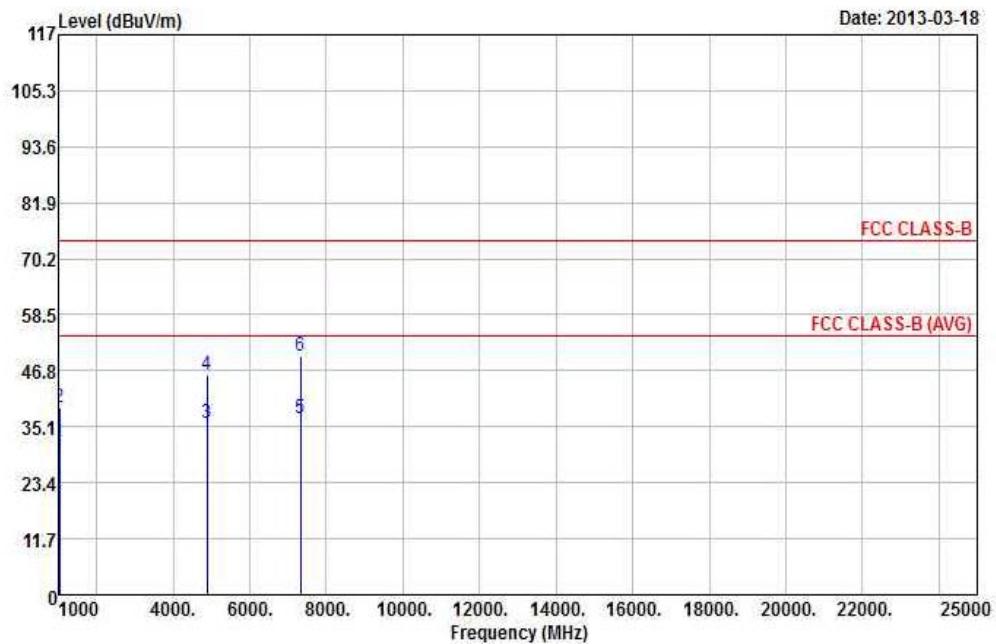

Freq	Level	Over Limit	Line	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1033.00	31.82	-22.18	54.00	39.09	27.91	2.93	38.11	---	Average
2	1033.00	39.00	-35.00	74.00	46.27	27.91	2.93	38.11	---	Peak
3	4882.00	35.72	-18.28	54.00	29.89	34.28	6.53	34.98	---	Average
4	4882.00	45.99	-28.01	74.00	40.16	34.28	6.53	34.98	---	Peak
5	7323.00	36.89	-17.11	54.00	27.45	36.04	8.43	35.03	---	Average
6	7323.00	50.02	-23.98	74.00	40.58	36.04	8.43	35.03	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: For spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	Bluetooth	Test Freq. (FX)	F2
Operating Mode	Transmit	Polarization	H

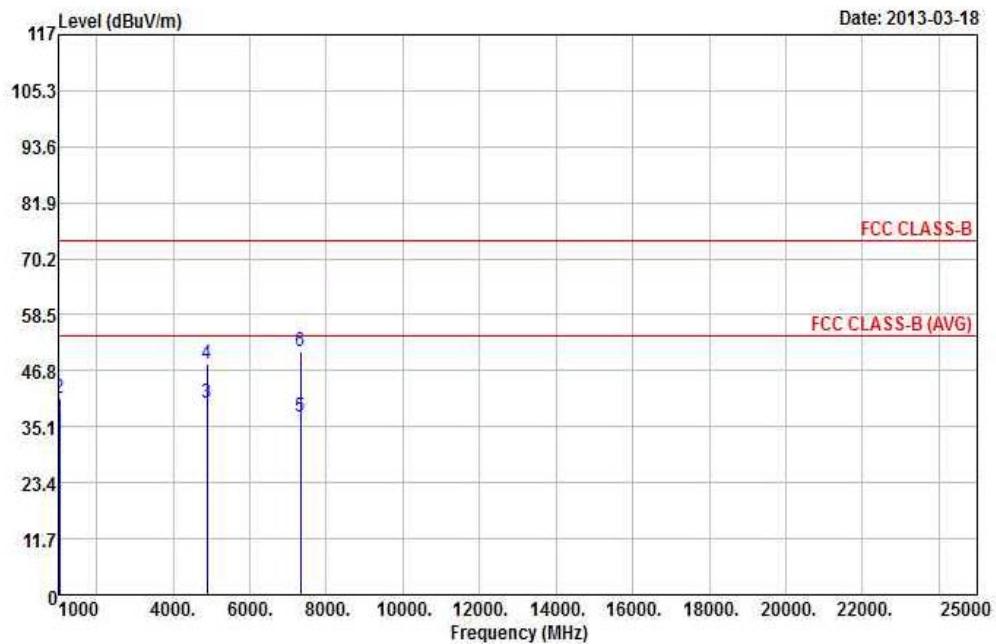

Freq	Over Limit	Line	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	1033.00	33.73	-20.27	54.00	41.00	27.91	2.93	38.11	---
2	1033.00	41.11	-32.89	74.00	48.38	27.91	2.93	38.11	---
3	4882.00	40.03	-13.97	54.00	34.20	34.28	6.53	34.98	---
4	4882.00	48.16	-25.84	74.00	42.33	34.28	6.53	34.98	---
5	7323.00	37.23	-16.77	54.00	27.79	36.04	8.43	35.03	---
6	7323.00	50.76	-23.24	74.00	41.32	36.04	8.43	35.03	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: For spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	Bluetooth	Test Freq. (FX)	F3
Operating Mode	Transmit	Polarization	V

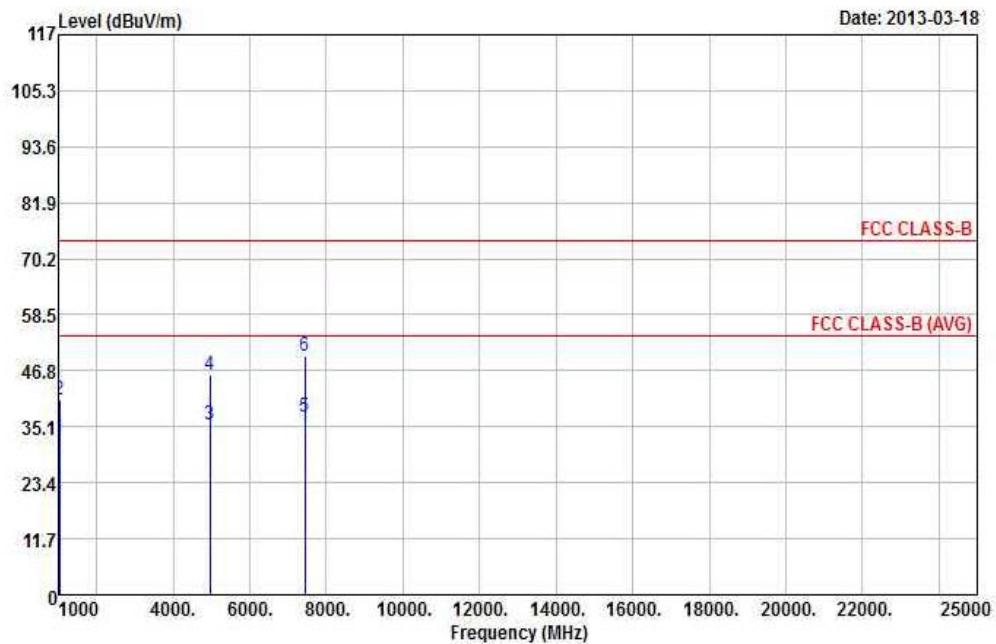

Freq	Over Limit	Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	1033.00	32.83	-21.17	54.00	40.10	27.91	2.93	38.11	---
2	1033.00	40.87	-33.13	74.00	48.14	27.91	2.93	38.11	---
3	4960.00	35.66	-18.34	54.00	29.79	34.29	6.57	34.99	---
4	4960.00	45.93	-28.07	74.00	40.06	34.29	6.57	34.99	---
5	7440.00	37.27	-16.73	54.00	27.68	36.01	8.66	35.08	---
6	7440.00	49.92	-24.08	74.00	40.33	36.01	8.66	35.08	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: For spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	Bluetooth	Test Freq. (FX)	F3
Operating Mode	Transmit	Polarization	H

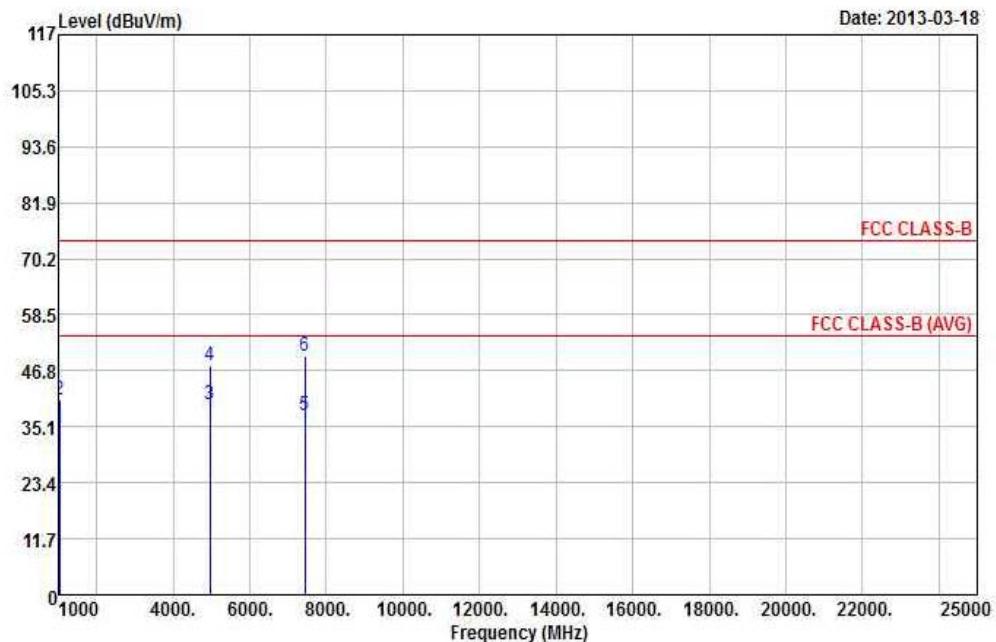

Freq MHz	Over Limit	Line	Read		Antenna Level Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
			Level dBuV/m	dB dBuV/m						
1 1033.00	34.79	-19.21	54.00	42.06	27.91	2.93	38.11	---	---	Average
2 1033.00	40.69	-33.31	74.00	47.96	27.91	2.93	38.11	---	---	Peak
3 4960.00	39.92	-14.08	54.00	34.05	34.29	6.57	34.99	---	---	Average
4 4960.00	47.94	-26.06	74.00	42.07	34.29	6.57	34.99	---	---	Peak
5 7440.00	37.38	-16.62	54.00	27.79	36.01	8.66	35.08	---	---	Average
6 7440.00	49.82	-24.18	74.00	40.23	36.01	8.66	35.08	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: For spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$.




3.4.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for BT-3M

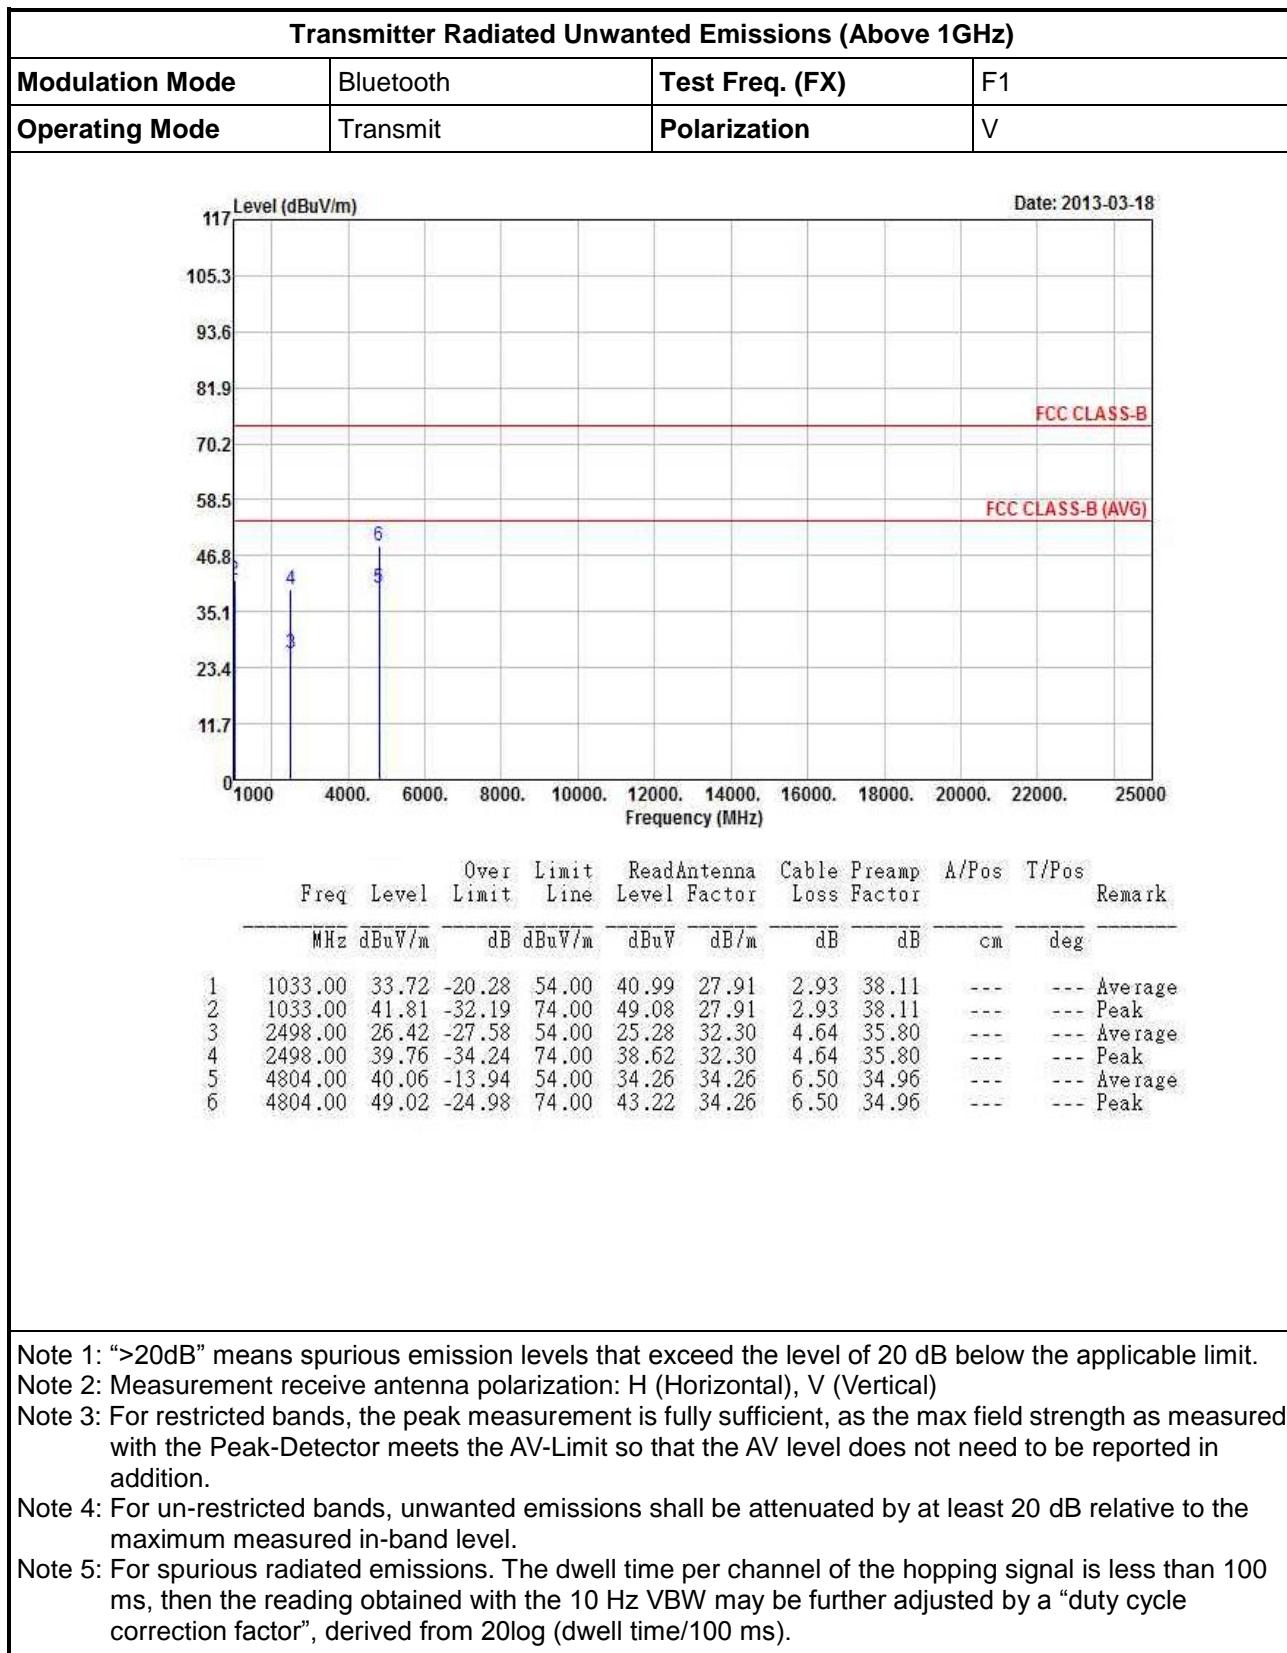



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	Bluetooth	Test Freq. (FX)	F1
Operating Mode	Transmit	Polarization	H

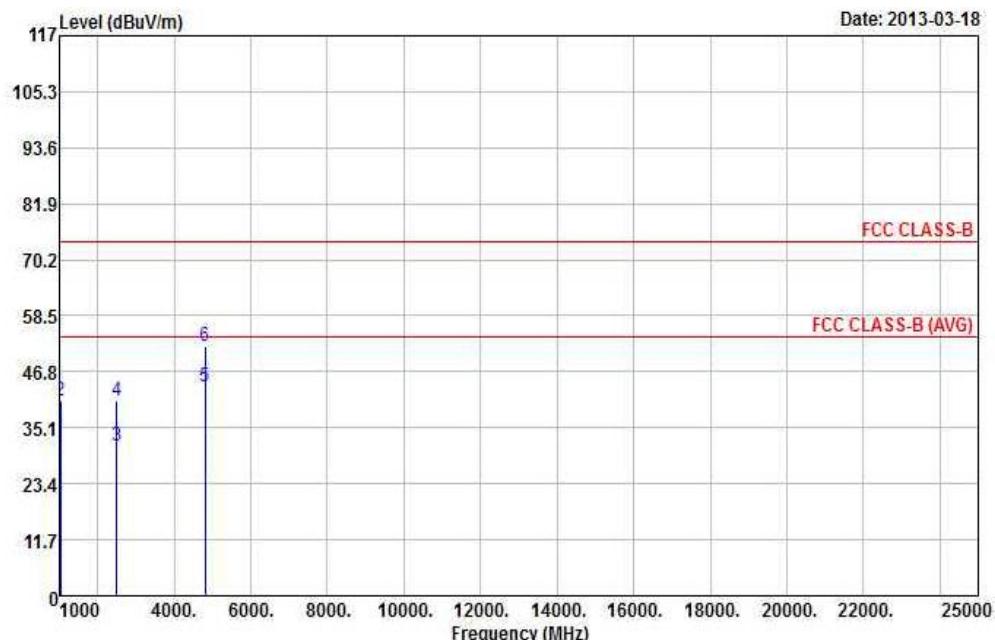

Freq	Level	Over Limit	Limit Line	Read		Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
				MHz	dBuV/m	dB	dBuV/m	dB	cm	deg
1	1033.00	34.23	-19.77	54.00	41.50	27.91	2.93	38.11	---	Average
2	1033.00	40.80	-33.20	74.00	48.07	27.91	2.93	38.11	---	Peak
3	2498.00	31.19	-22.81	54.00	30.05	32.30	4.64	35.80	---	Average
4	2498.00	40.80	-33.20	74.00	39.66	32.30	4.64	35.80	---	Peak
5	4804.00	43.73	-10.27	54.00	37.93	34.26	6.50	34.96	---	Average
6	4804.00	52.01	-21.99	74.00	46.21	34.26	6.50	34.96	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: For spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	Bluetooth	Test Freq. (FX)	F2
Operating Mode	Transmit	Polarization	V

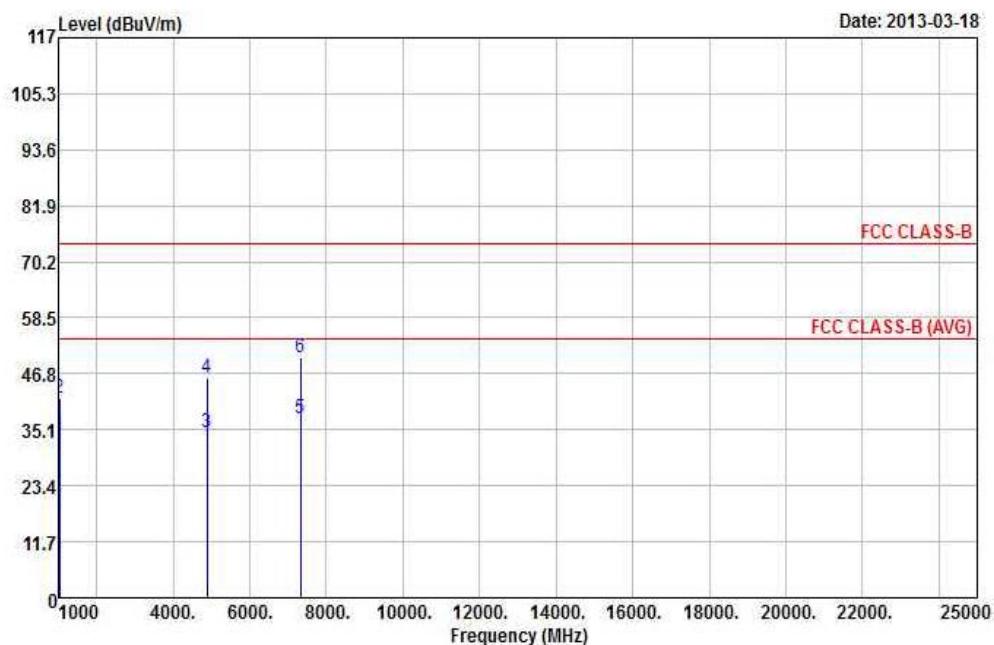

Freq MHz	Over Level dBuV/m	Limit dB	Line dBuV/m	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
				Level	Factor	dB	dB	cm	deg	
1 1033.00	33.85	-20.15	54.00	41.12	27.91	2.93	38.11	---	---	Average
2 1033.00	41.72	-32.28	74.00	48.99	27.91	2.93	38.11	---	---	Peak
3 4882.00	34.51	-19.49	54.00	28.68	34.28	6.53	34.98	---	---	Average
4 4882.00	45.84	-28.16	74.00	40.01	34.28	6.53	34.98	---	---	Peak
5 7323.00	37.51	-16.49	54.00	28.07	36.04	8.43	35.03	---	---	Average
6 7323.00	50.26	-23.74	74.00	40.82	36.04	8.43	35.03	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: For spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	Bluetooth	Test Freq. (FX)	F2
Operating Mode	Transmit	Polarization	H

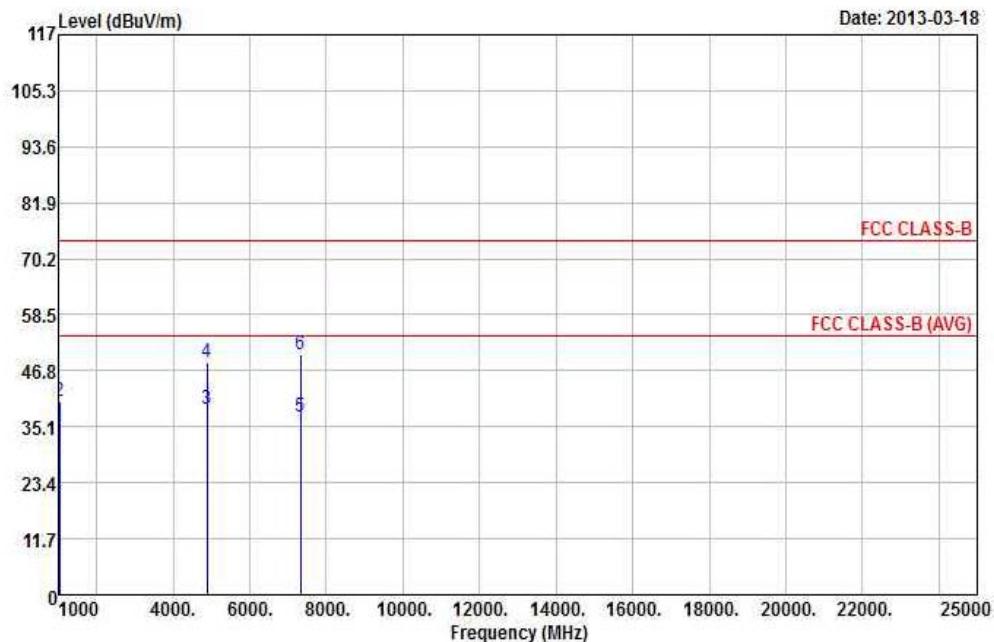

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
		MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	
1	1033.00	35.21	-18.79	54.00	42.48	27.91	2.93	38.11	---	Average
2	1033.00	40.53	-33.47	74.00	47.80	27.91	2.93	38.11	---	Peak
3	4882.00	38.66	-15.34	54.00	32.83	34.28	6.53	34.98	---	Average
4	4882.00	48.59	-25.41	74.00	42.76	34.28	6.53	34.98	---	Peak
5	7323.00	37.21	-16.79	54.00	27.77	36.04	8.43	35.03	---	Average
6	7323.00	50.05	-23.95	74.00	40.61	36.04	8.43	35.03	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: For spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	Bluetooth	Test Freq. (FX)	F3
Operating Mode	Transmit	Polarization	V

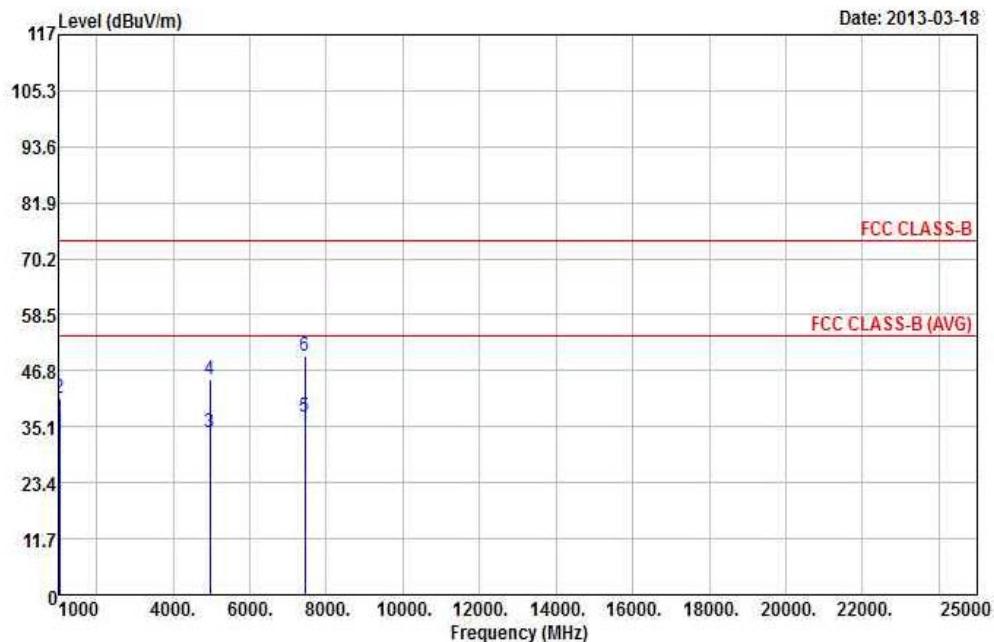

Freq	Over Limit	Line	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	1033.00	33.14	-20.86	54.00	40.41	27.91	2.93	38.11	---
2	1033.00	41.18	-32.82	74.00	48.45	27.91	2.93	38.11	---
3	4960.00	33.81	-20.19	54.00	27.94	34.29	6.57	34.99	---
4	4960.00	45.13	-28.87	74.00	39.26	34.29	6.57	34.99	---
5	7440.00	37.06	-16.94	54.00	27.47	36.01	8.66	35.08	---
6	7440.00	49.90	-24.10	74.00	40.31	36.01	8.66	35.08	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: For spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	Bluetooth	Test Freq. (FX)	F3
Operating Mode	Transmit	Polarization	H

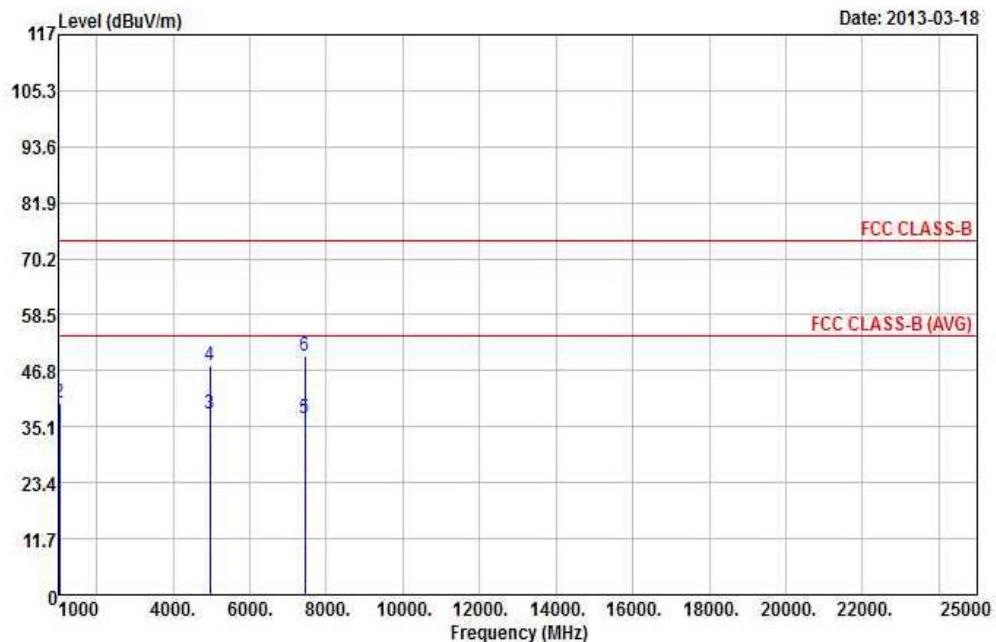

Freq	Level	Over Limit	Limit Line	Read		Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
				Antenna Level	Factor					
1	1033.00	34.62	-19.38	54.00	41.89	27.91	2.93	38.11	---	Average
2	1033.00	40.18	-33.82	74.00	47.45	27.91	2.93	38.11	---	Peak
3	4960.00	37.74	-16.26	54.00	31.87	34.29	6.57	34.99	---	Average
4	4960.00	47.89	-26.11	74.00	42.02	34.29	6.57	34.99	---	Peak
5	7440.00	36.86	-17.14	54.00	27.27	36.01	8.66	35.08	---	Average
6	7440.00	49.86	-24.14	74.00	40.27	36.01	8.66	35.08	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: For spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$.



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9 kHz ~ 2.75 GHz	Nov. 22, 2012	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRO NIK	NSLK 8127	8127-477	9kHz – 30MHz	Jan. 21, 2013	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9 kHz ~ 30 MHz	Apr. 20, 2012	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	7.61183201e+012	9kHz ~ 30MHz	Nov. 09, 2012	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP 30	100023/030	9KHz ~ 30GHz	Apr. 27, 2012	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Jun. 19, 2012	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20 ~ 100°C	Nov. 21, 2012	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jun. 26, 2012	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	1027452	300MHz ~ 40GHz	Sep. 08, 2012	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	1124009	300MHz ~ 40GHz	Sep. 08, 2012	Conducted (TH01-HY)
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345675/4	1GHz ~ 26.5GHz	NA	Conducted (TH01-HY)
RF Cable-3m	HUBER+SUHNER	SUCOFLEX_104	SN 345669/4	1GHz ~ 26.5GHz	NA	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 02, 2012	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP	100055	9Kz – 40GHz	Jun. 06, 2012	Radiation (03CH05-HY)
Receiver	R&S	ESIB26	100337	20Hz – 26.5GHz	Jun.21, 2012	Radiation (03CH05-HY)
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH05-HY	30 MHz - 1 GHz 3m	N/A	Radiation (03CH05-HY)
Amplifier	COM-POWER	PA-103	161050	1 MHz ~ 1 GHz	Mar. 20, 2012	Radiation (03CH05-HY)
Amplifier	Agilent	8449B	3008A02665	1GHz – 26.5 GHz	Aug. 28, 2012	Radiation (03CH05-HY)
Horn Antenna	ETS-LINDGREN	3117	66584	1GHz~18GHz	Aug. 09, 2012	Radiation (03CH05-HY)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170517	18G~40G	Jan. 14, 2013	Radiation (03CH05-HY)
RF Cable-R03m	Jye Bao	RG142	03CH05-HY	30 MHz - 1 GHz	Oct. 14, 2012	Radiation (03CH05-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX104	03CH05-HY	1GHz~40GHz	Oct. 14, 2012	Radiation (03CH05-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2725	30 MHz - 1 GHz	Oct. 06, 2012	Radiation (03CH05-HY)
Turn Table	HD	HD100	420/611	0 - 360 degree	N/A	Radiation (03CH05-HY)
Antenna Mast	HD	HD100	240/666	1 m - 4 m	N/A	Radiation (03CH05-HY)

Note: Calibration Interval of instruments listed above is one year.